

(a) LIP: structural affordance → query-independent interaction mass



Mass field over the input. Boxes mark all five queries' targets




prior-only keep @ r = 10% covers every target

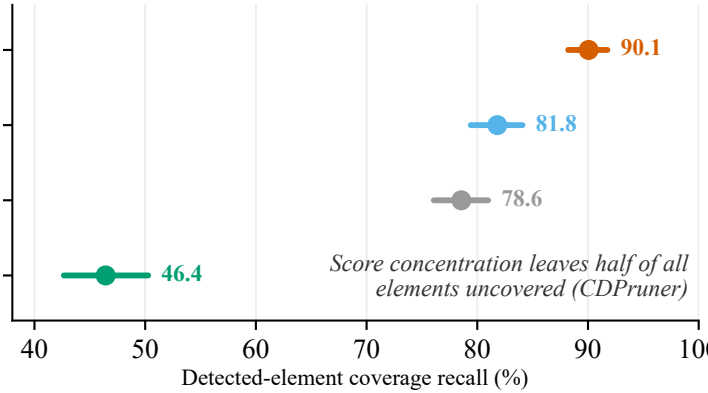


(b) NEO: instruction relevance without redundancy, one nested order




input frame




w/o diversity: budget stacks on look-alikes




full ordering: same k, spread across evidence

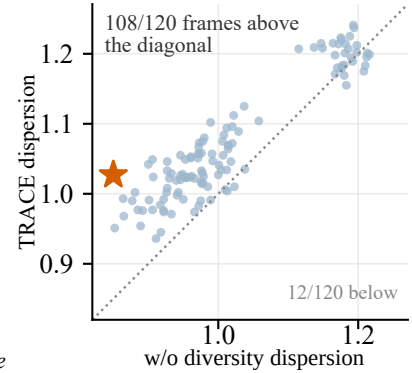

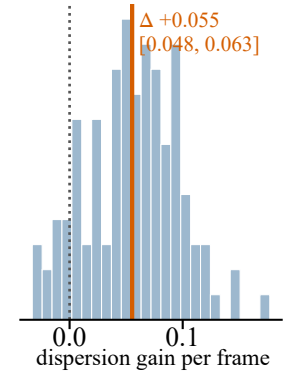


(c) NCR: native-token repair fixes the ordering tail within budget



input frame



greedy prefix only: coverage holes remain



+NCR repair (amber): same budget, holes filled

