



FINAL PROJECT RULES

Introduction to Programming 2021






HI-SCORE

10000


440



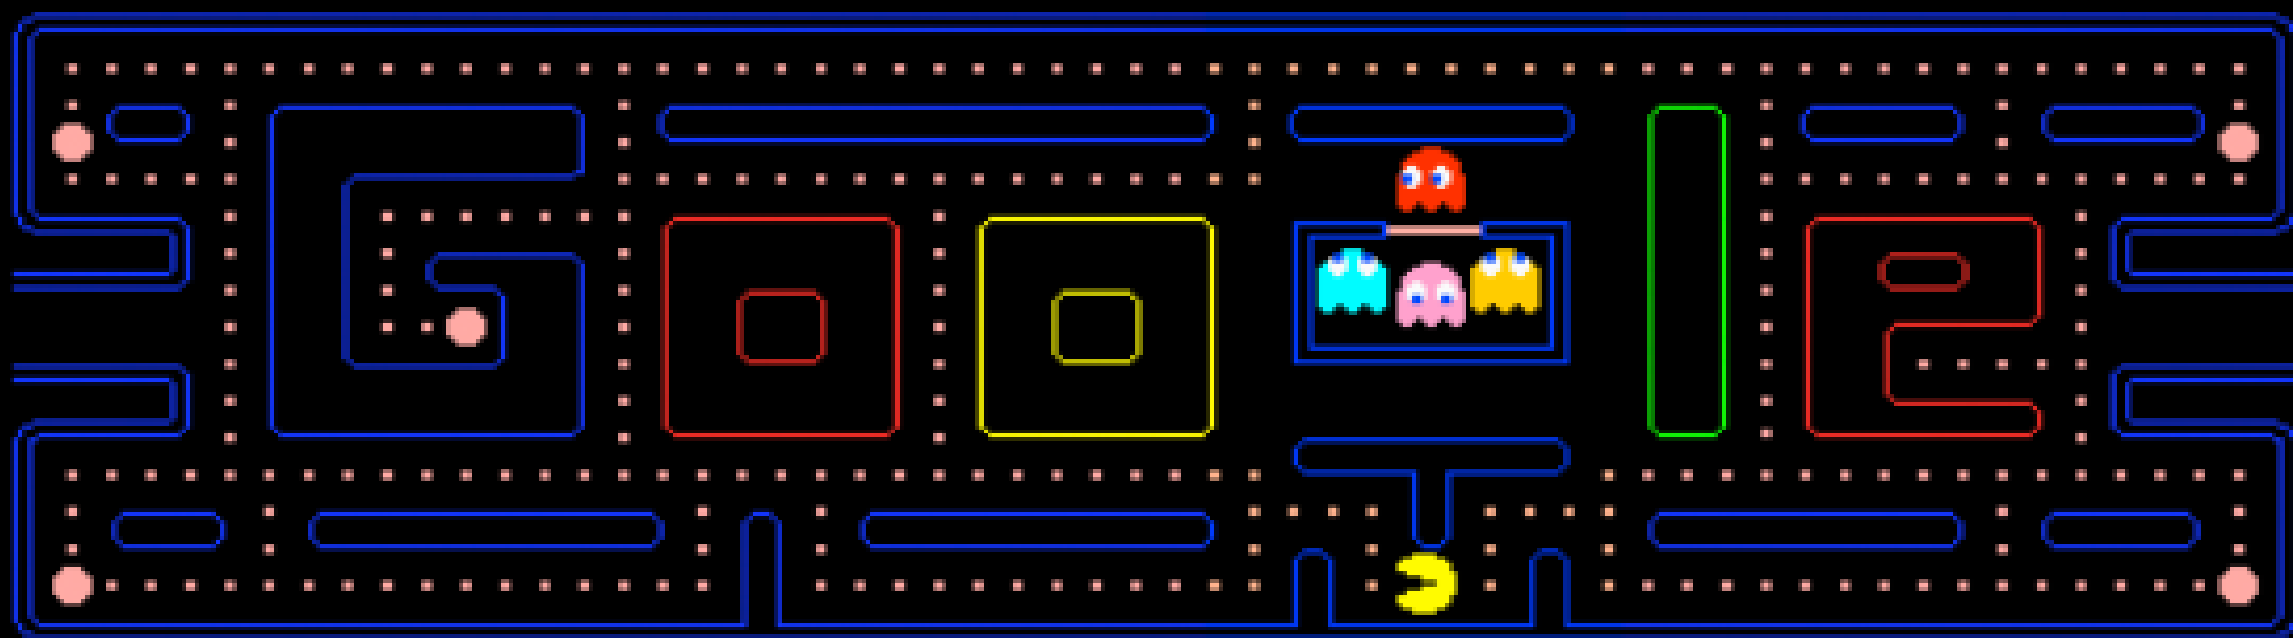


Rules

- 一人一組
- 占總成績20%
- 必須使用我們提供的template
- 2022年1月17、18日Demo
 - 需自備筆電
 - 詳細資訊前一周公布
- 用C語言，以及Allegro 提供boolean value
 - C++, Python等其他程式語言都不行

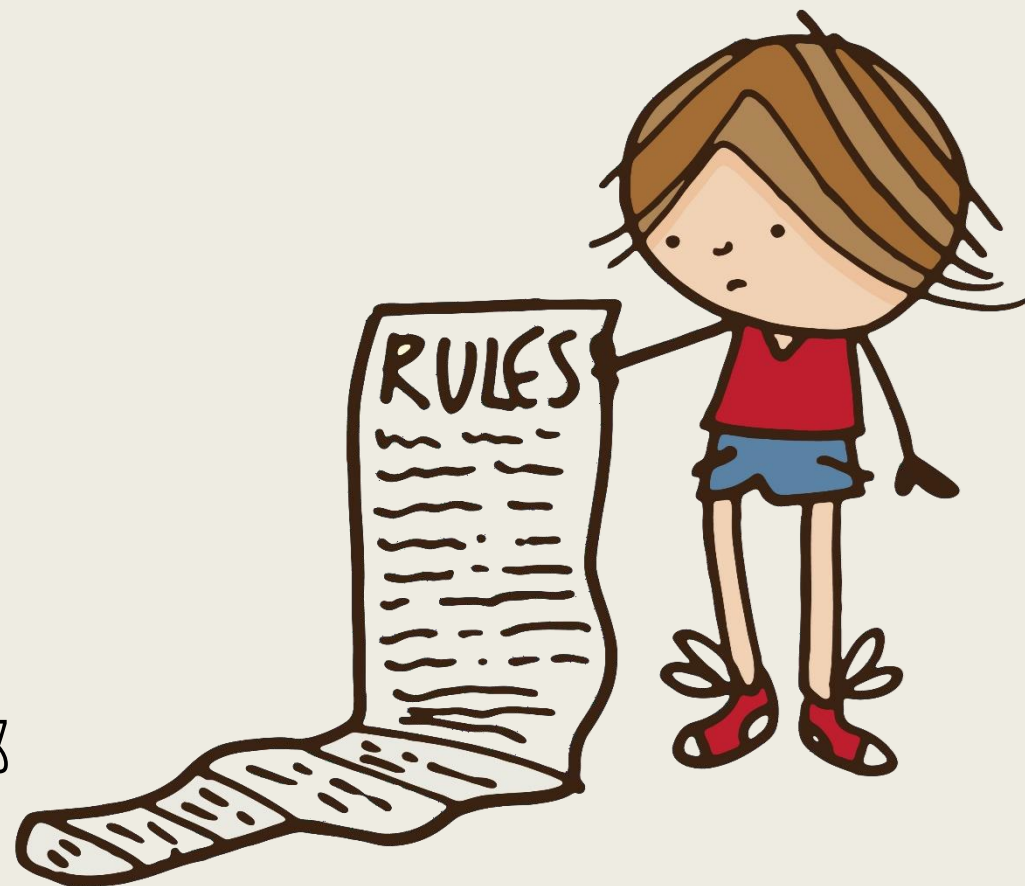


Given template

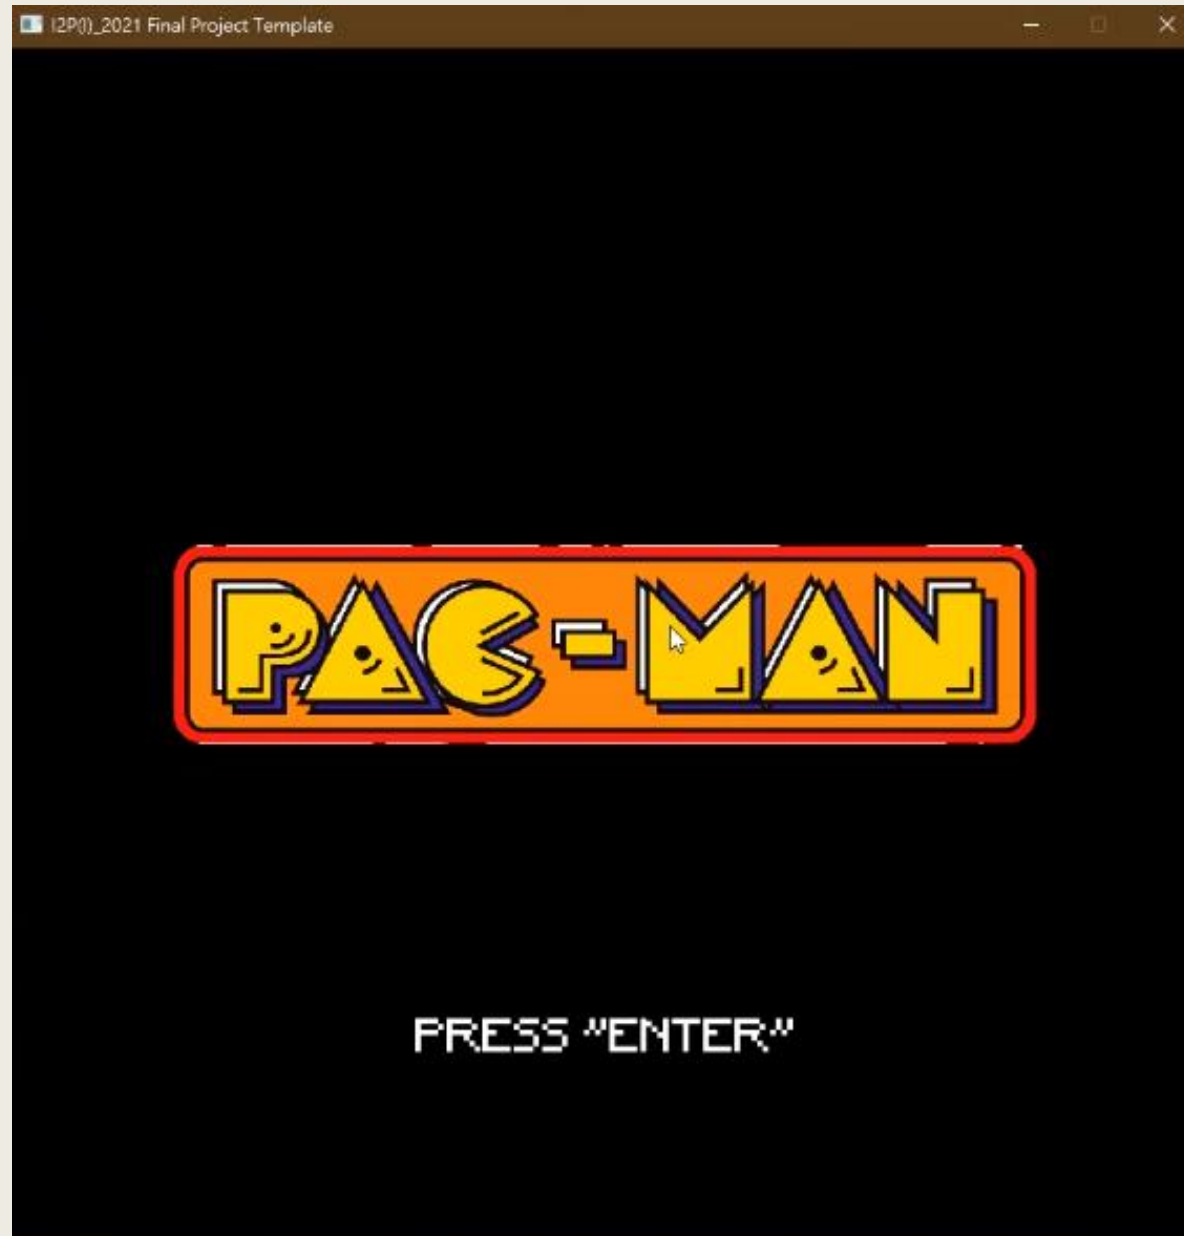

Given template



We'll finish 3% of
basic features today

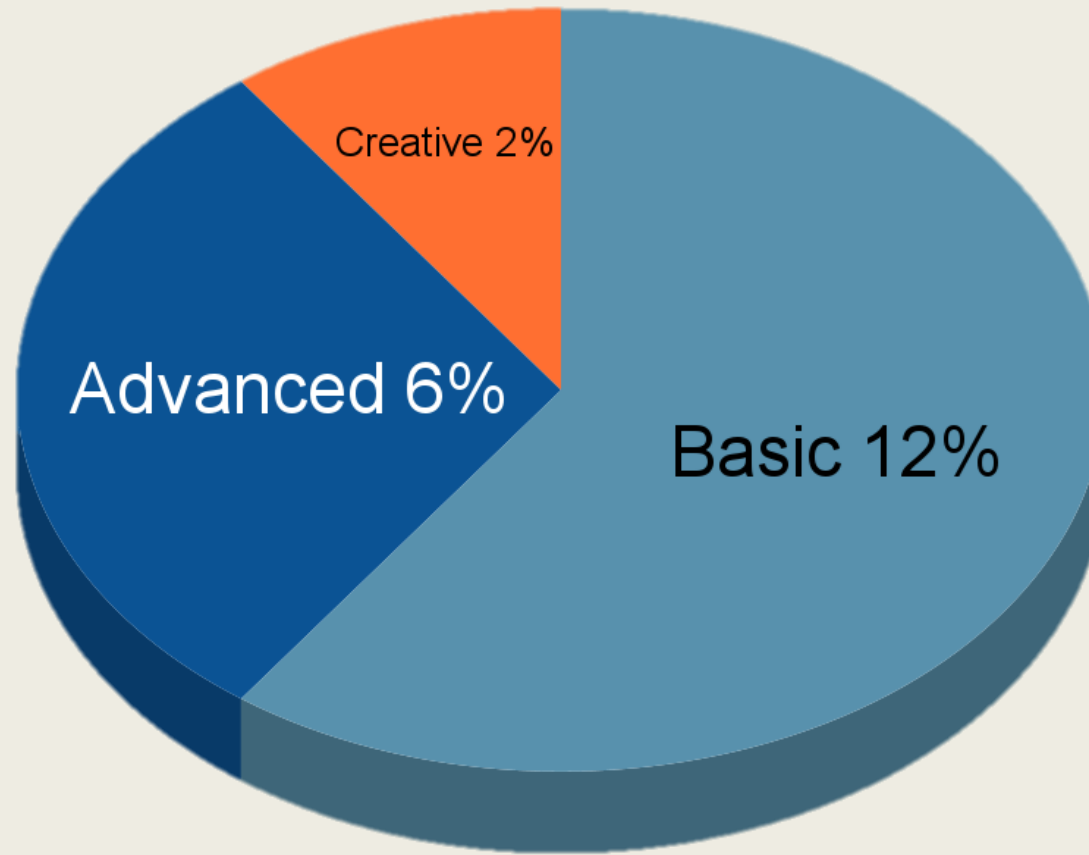

Basics (12%)

- 分為五個類別
- 遊戲完整性類別 3%
- 場景類別 2%
- 控制類別 2%
- 記憶體管理 2%
- HACKATHON 3%



Basics (12%) 遊戲完整性類別(3%)

- Pacman [HACKATHON-1]的正常移動 (不能出牆或是破圖)
- 基本吃豆子 [HACKATHON-1]
- Pacman碰到鬼要正常死亡，吃完豆子要結束遊戲(或開始下一關)
- Ghost
 - Ghost的正常移動[HACKATHON-2] (不能出牆或是破圖)
 - Ghost 出場方式 [HACKATHON-2]
- 讀取.txt檔案生成map
- 遊戲中計分及顯示 吃豆子獲得分數
- Random移動的Ghost
 - 不能來回抖動
 - 不走回頭路



Basics (12%) 場景類別(2%)

- 三個原始場景Menu, Game, Setting
[HACKATHON-3]
 - 要能正常轉場
 - Game結束後要能回到Menu或是轉往下個場景
 - 不可擅自關閉遊戲，關閉遊戲的唯一條件只有滑鼠點擊關閉視窗or自行設計的EXIT UI
- 另外增加第四個場景
 - e.g Win, Game Over, Restart, End, etc.



Basics (12%)

控制類別(2%)&記憶體管理(2%)

- 使用滑鼠(ex.點擊進入Setting場景)[HACKATHON-3]以及鍵盤控制pacman移動[HACKATHON-1]
 - Setting 要有音量、音效調節
- 記憶體管理
 - Memory 使用量的最大值是固定的
 - 即記憶體回收管理，不可無上限的增加記憶體用量
 - (實際demo的測試方式，助教會透過profiler觀看記憶體用量)



Basics (12%) HACKATHON(3%)


- (Those marked in red in previous slides)
- HACKATHON 1
 - Pacman 的正常移動以及吃豆子
- HACKATHON 2
 - Ghost 的出場和 random 移動 (會走回頭路)
- HACKATHON 3
 - 利用滑鼠點擊進入Setting頁面



Advance (6%)



- Power Bean 大力丸 (2%)
- 設計其他Ghost的追擊策略(1%)
- 角色動畫(ex. pacman的開合開合, Ghost的移動動畫) (1%)
- 美術類別 (1%)
- 遊戲性類別 (1%)
- 功能、介面性類別(1%)

(註: 這邊最多就是拿滿6%)

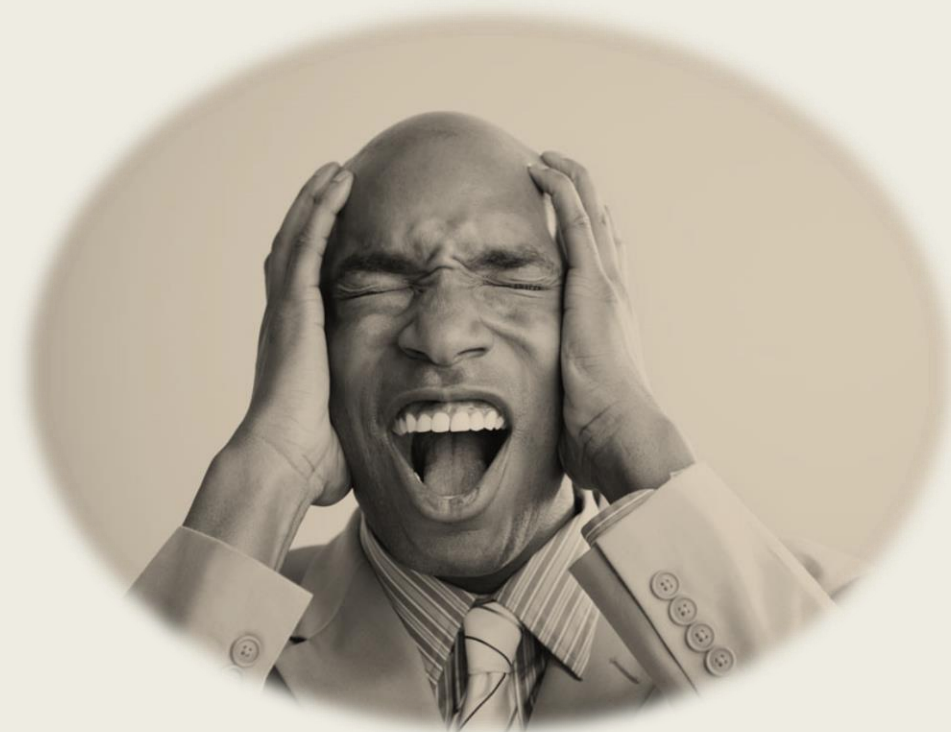


Advance (6%) Power Bean (2%)

- 實作Classic Pacman的大力丸機制
 - 吃到之後進入一定時間的 可以反過來吃掉鬼魂的力量
 - 鬼魂在這段時間內會變成深藍色(有提供sprite) 速度變慢
 - 大力丸的效果時間快到的時候鬼應該要藍白閃爍
 - 此時鬼魂的策略應是遠離小精靈
 - 鬼魂被吃到要跑回去籠子，跑的過程要變眼睛圖示，一段時間後出來
 - 可參考[google pacman](#)
 - 有關Ghost的詳細State Machine在下一張Slide

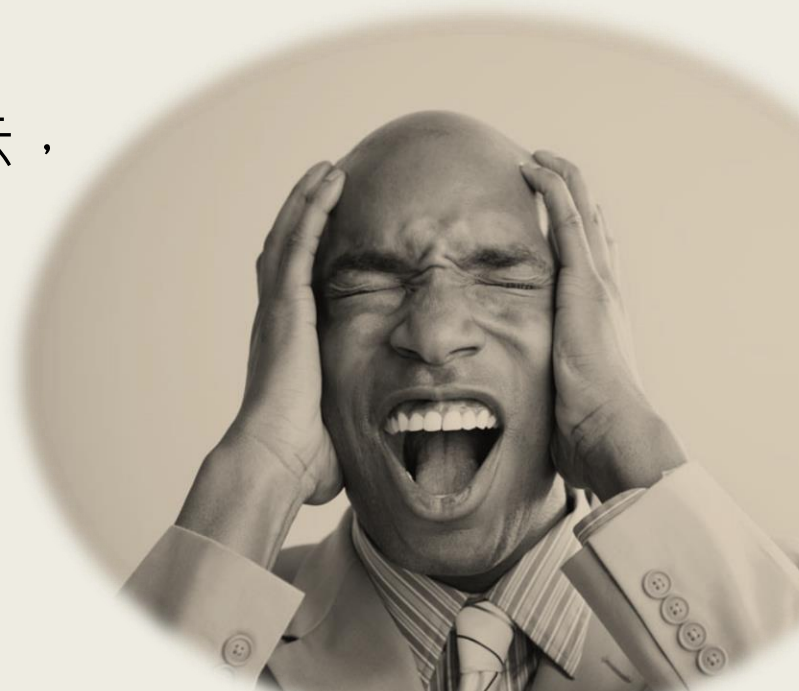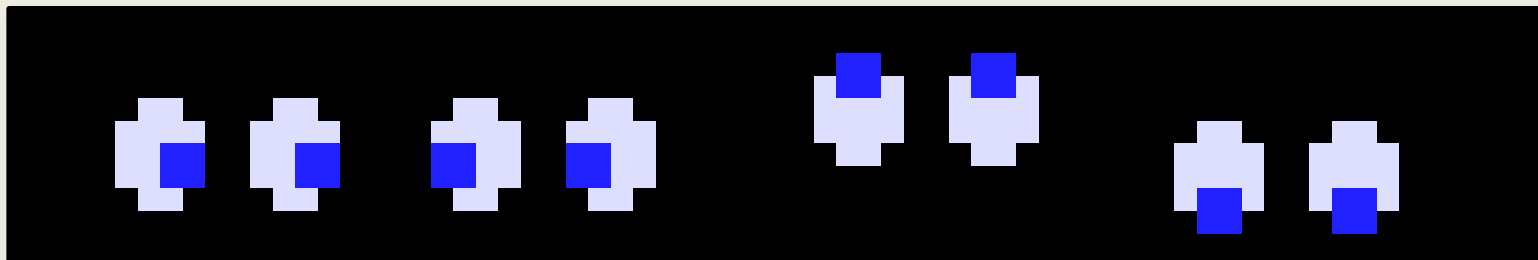


Advance (6%) Power Bean (2%)

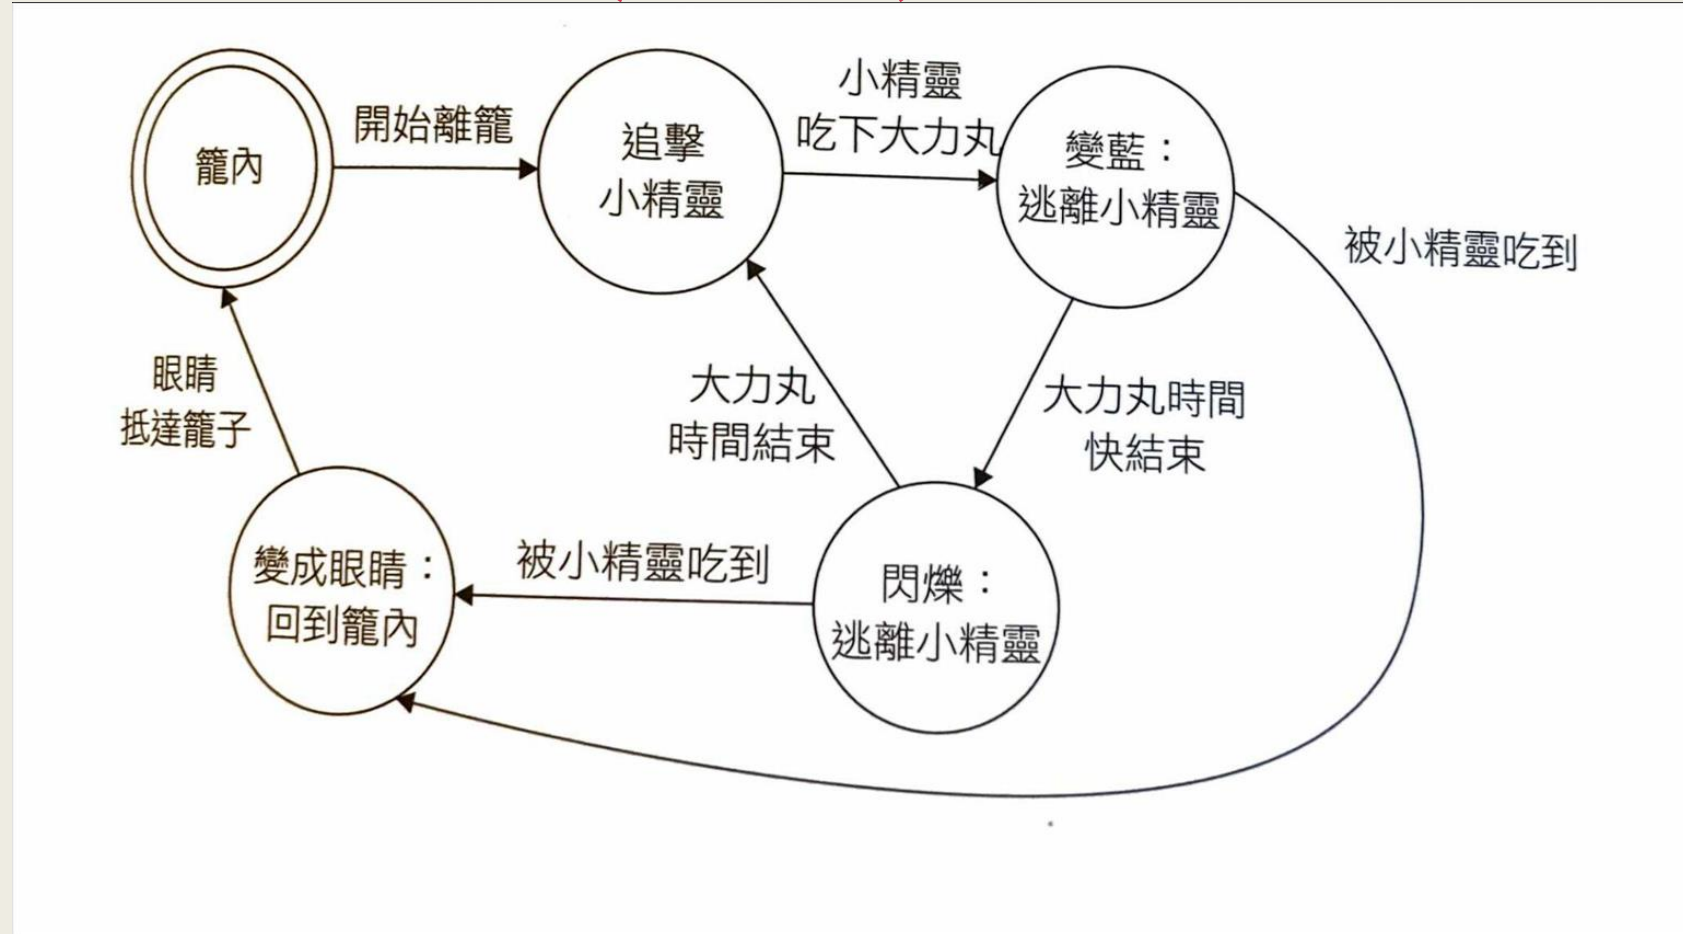


Advance (6%) 角色動畫(1%)

- pacman的開合動畫
- Ghost的移動動畫
- 可利用的sprites都已經放在 Assets裡面了
- 也可以自行使用其他的sprites
 - 請確保至少有四個方向，各個方向兩個以上(包含兩個)的sprites

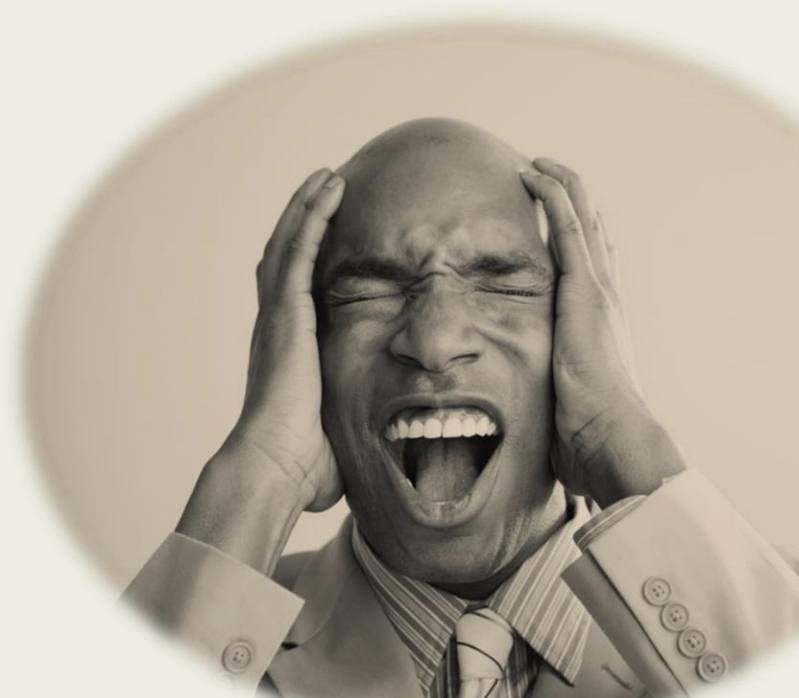

Advance (6%) 美術類別(1%)

- 不同場景有不同的BGM
- 不同版本的音效
- 美化 UI
- 美化地圖
- 其他任何美術相關
- (以上選兩項即可)
 - (其他美術相關請自行列舉)

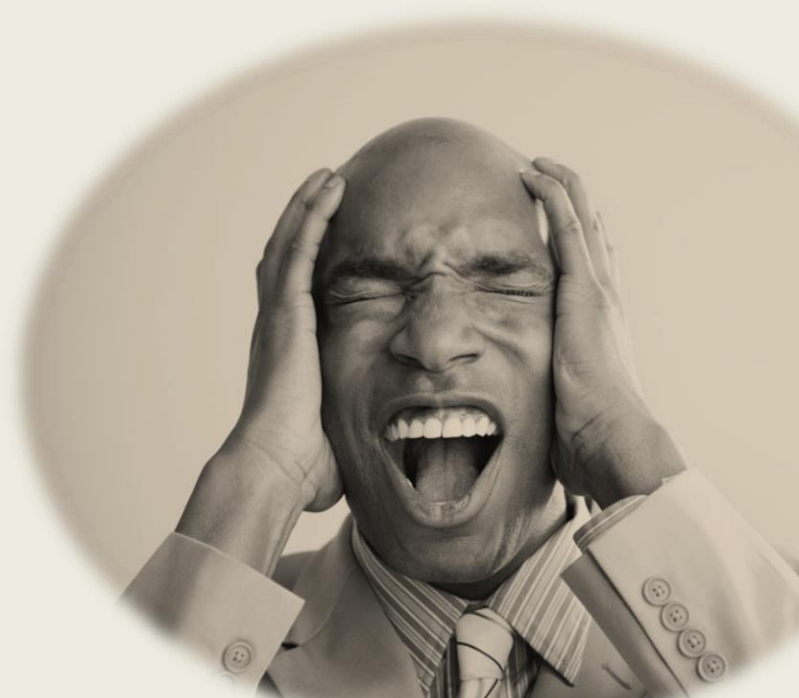

Advance (6%) 遊戲性類別(1%)

- 自行設計另外兩個道具並設計相關功能
- 可以接受的功能範例
 - 吃到道具後，提升移動速度
 - 吃到道具後，暫時獲得穿牆能力
 - 吃到道具後，開啟傳送門
- 不能接受的範例
 - 吃到道具後+50分
 - 吃到道具+秒數

註* 藍綠二擇一即可

- 可選擇地圖or多關卡設計
- 多人遊戲(2P以上合作破關)

Advance (6%) 功能、介面性類別(1%)

- 遊戲內角色選擇
- 永久計分並設計排行榜

註* 兩項都須達到

Creative (2%)

- 角色精細度
- 技能華麗度
- 動畫炫泡度
- 遊戲豐富度
- 整體流暢度
- 上述以及Advance以外，任何你覺得超酷或超有 Implement 難度的功能都可以實作出來並在Demo時候解釋給助教做評分



Template

- Multiple file template
 - *Template .zip*
 - functions and scenes are separated to different files.

Template (if you use Allegro 5.0)

■ Change


```
if (!al_init_font_addon())  
    game_abort("failed to initialize font add-on");
```

to

```
al_init_font_addon();
```

- (You only need to fix this if you followed the tutorial that uses `allegro-5.0.10-monolith-mt.dll`)

Template

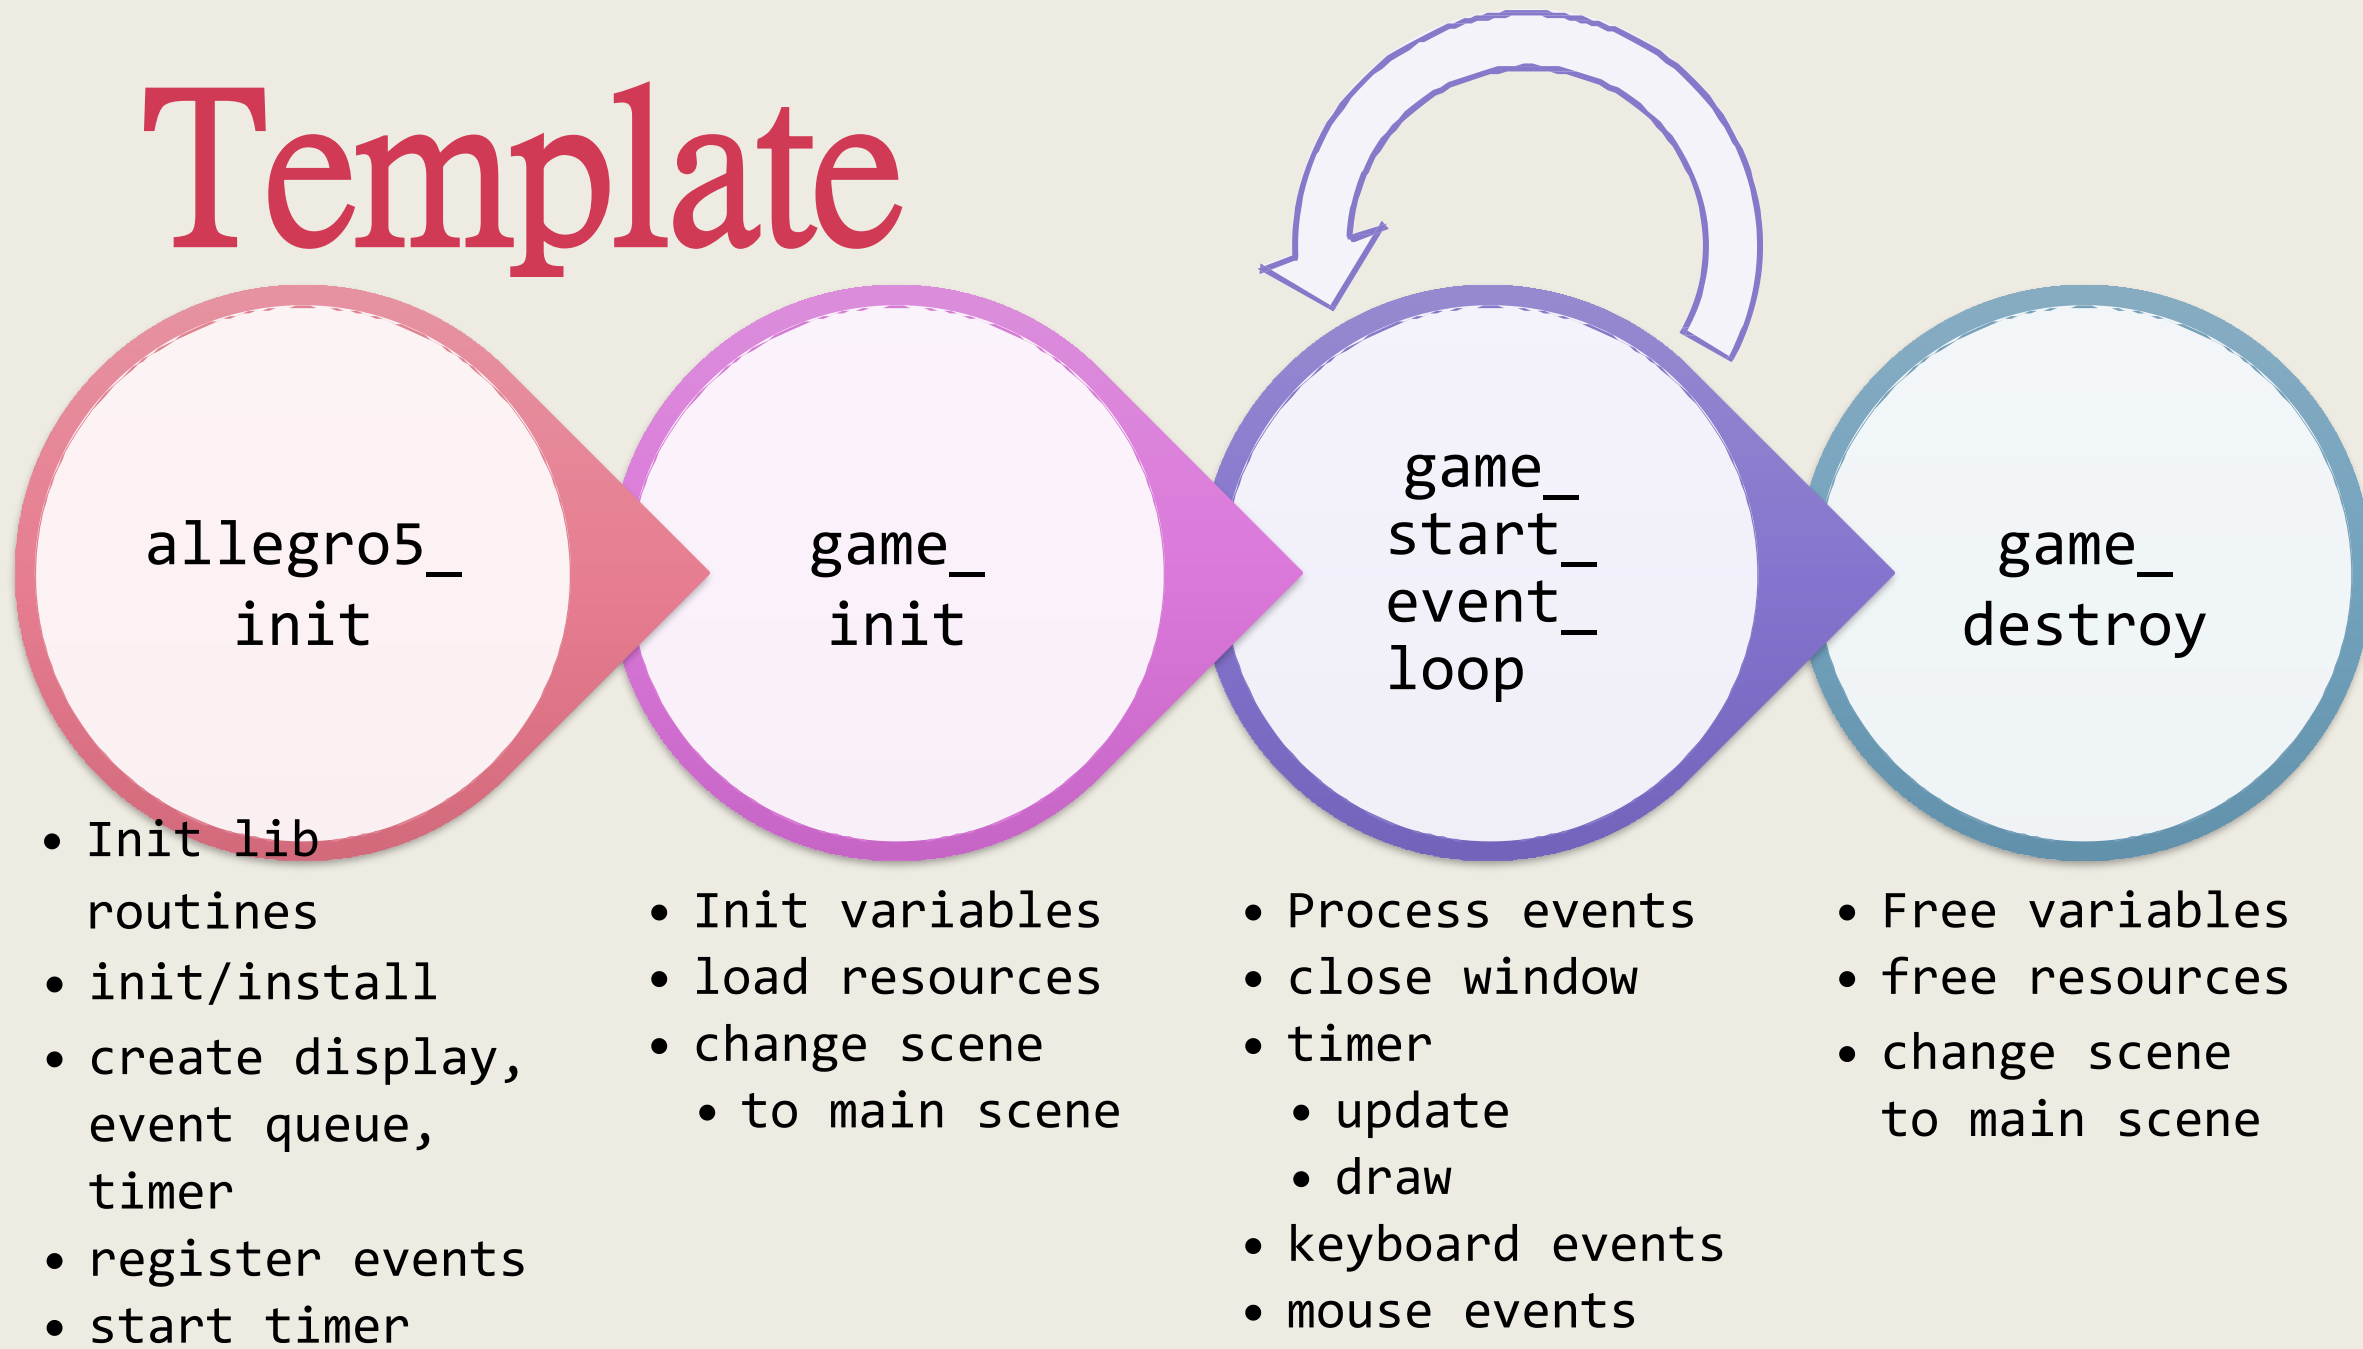

Template(states)

```
// The active scene id.  
int active_scene;  
// Keyboard state, whether the key is down or not.  
bool key_state[ALLEGRO_KEY_MAX];  
// Mouse state, whether the key is down or not.  
// 1 is for left, 2 is for right, 3 is for middle.  
bool *mouse_state;  
// Mouse position.  
int mouse_x, mouse_y;
```


Template(structs)

```
typedef struct object {  
    Pair_IntInt Coord; //  
    Pair_IntInt Size; // x for width, y for height  
    Directions facing;  
    Directions preMove;  
    Directions nextTryMove;  
    uint32_t moveCD;      // movement Countdown  
} object;
```

Template(enum)

```
typedef enum Directions{  
    NONE = 0,      UP = 1,  
    LEFT = 2,      RIGHT = 3,  
    DOWN = 4,      UP_DOWN = 5,  
    LEFT_RIGHT = 6,    UP_LEFT = 7,  
    DOWN_LEFT = 8,    DOWN_RIGHT = 9,  
    UP_RIGHT = 10  
} Directions;
```

Template(struct)

```
typedef struct RecArea{  
    float x, y, w, h;  
} RecArea;  
typedef struct Pair_IntInt {  
    int x;  
    int y;  
} Pair_IntInt;
```

```
typedef struct bitmapdata{  
    int bitmap_x;  
    int bitmap_y;  
    int bitmap_w;  
    int bitmap_h;  
} bitmapdata;
```

Template(structs)

```
typedef struct Pacman{  
    bitmapdata imgdata;  
    object objData;  
    func_ptr move;  
    int speed;  
    bool powerUp;  
    ALLEGRO_TIMER* death_anim_counter;  
    ALLEGRO_BITMAP* move_sprite;  
    ALLEGRO_BITMAP* die_sprite;  
} Pacman;
```

Template(routines)

```
// Initialize allegro5 library
void allegro5_init(void);
// Initialize variables and resources.
void game_init(void);
// Process events inside the event queue using an infinity
loop.
    void game_start_event_loop(void);
// Release resources.
void game_destroy(void);
// Function to change from one scene to another.
void game_change_scene(int next_scene);
```

Template(events/callbacks)

```
// This is called when the game should update its logic.  
void game_update(void);  
// This is called when the game should draw itself.  
void game_draw(void);  
void on_key_down(int keycode);  
void on_mouse_down(int btn, int x, int y);
```

Template (utilities/callbacks)

```
// Load resized bitmap and check if failed.  
ALLEGRO_BITMAP *load_bitmap_resized(const char *filename, int w, int h);  
// Display error message and exit the program, used like 'printf'.  
// Write formatted output to stdout and file from the format string.  
// If the program crashes unexpectedly, you can inspect "log.txt" for  
// further information.  
void game_abort(const char* format, ...);  
// Log events for later debugging, used like 'printf'.  
// Write formatted output to stdout and file from the format string.  
// You can inspect "log.txt" for logs in the last run.  
void game_log(const char* format, ...);
```

Template (draw)

```
RecArea drawArea = getDrawArea(pman->objData, GAME_TICK_CD);


//Draw default image
al_draw_scaled_bitmap(pman->move_sprite, 0, 0,
    16, 16,
    drawArea.x + fix_draw_pixel_offset_x,
    drawArea.y + fix_draw_pixel_offset_y,
    draw_region, draw_region, 0
);
```


Template Structure

Allegro5 routines & Scene control


Utility
functions &
Entry point
Shared
resources

Scenes

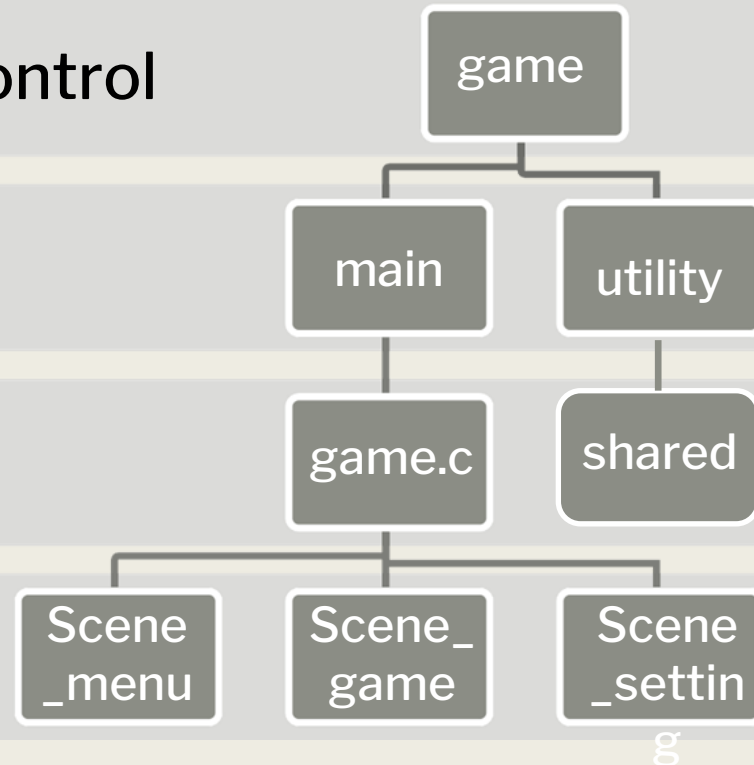


Today's Goal

- Pacman Movement and Eat Bean
- Ghost Go Out & random movement (may go back and forth)
- Mouse event(Click) and enter setting scene
 - *Create the settings scene.*
(can be entirely black with no functions)
 - *A button in main scene. (w/ mouse in/out animation)*

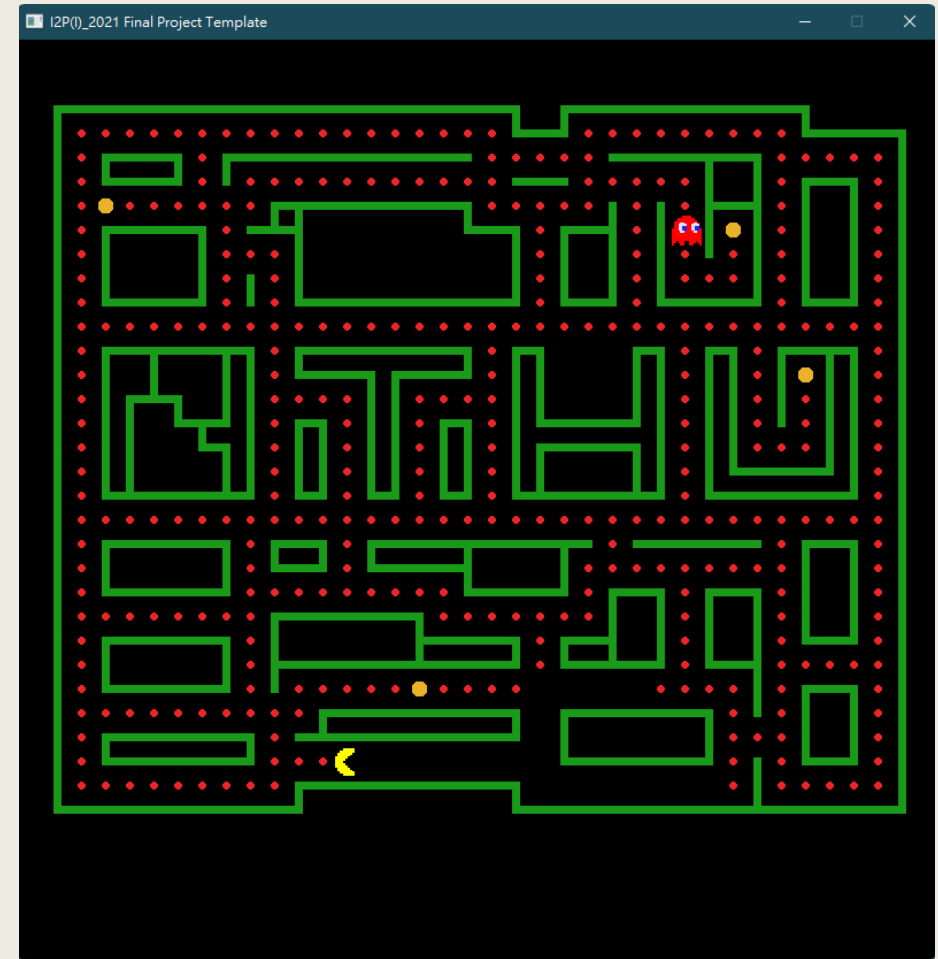

Today's Goal

- Pacman Movement and Eat Bean
- Ghost Go Out & random movement (may go back and forth)
- **Mouse event(Click) and enter setting scene**
 - *Create the settings scene.
(can be entirely black with no functions)*
 - *A button in main scene.
(w/ mouse in/out animation)*

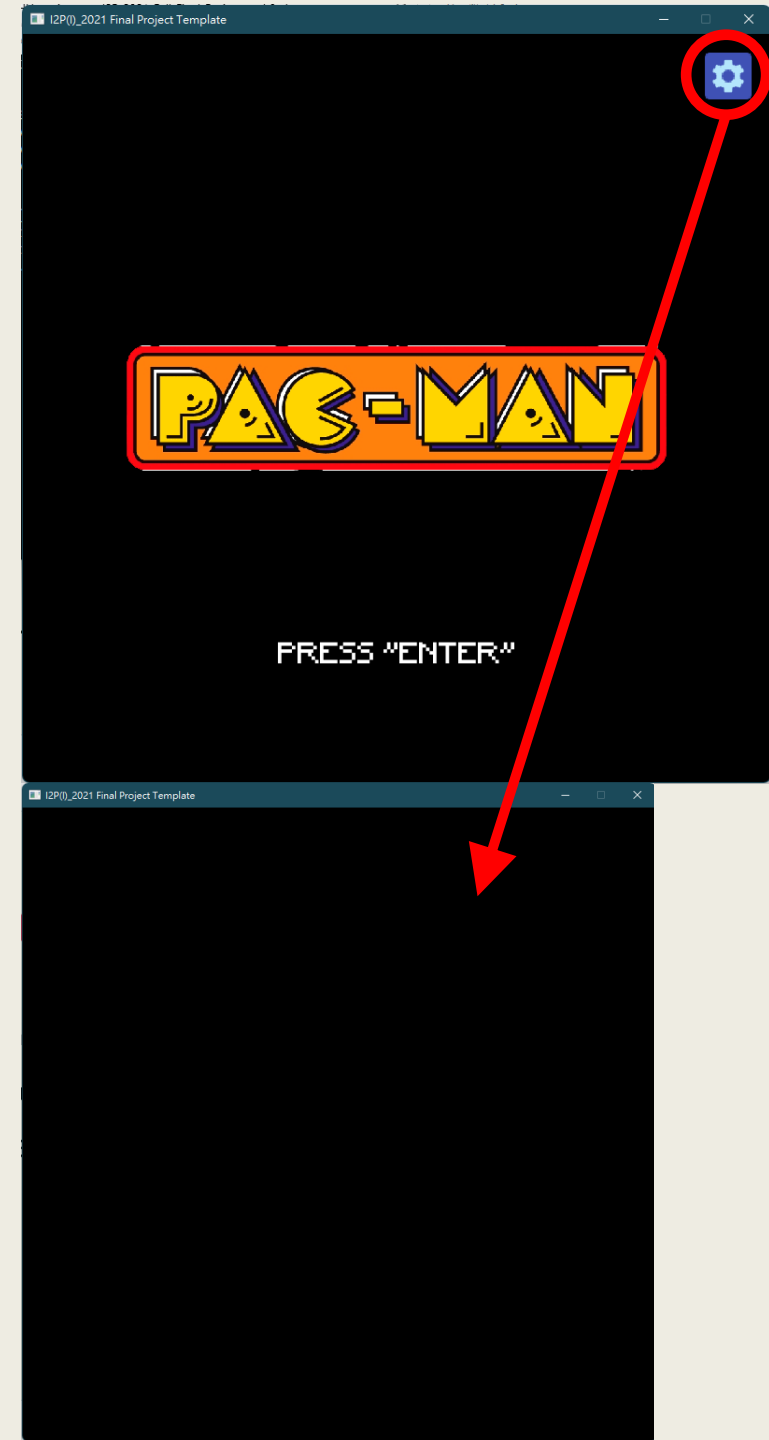

Today's Goal (Example)

- For today's goal, you only need to uncomment the codes and replace the “???” with the correct code.

```
// [HACKATHON 1-1]
    // TODO: Use allegro pre-defined enum ALLEGRO_KEY_<KEYNAME> to controll
pacman movement
    // we provided you a function `pacman_NextMove` to set the pacman's next
move direction.
    /*
    case ALLEGRO_KEY_W:
        pacman_NextMove(pman, ...);
        break;
    case ALLEGRO_KEY_A:
        pacman_NextMove(pman, ...);
        break;
    case ALLEGRO_KEY_S:
        pacman_NextMove(pman, ...);
        break;
```


.....

Today's Goal (I)

- Setup movement for your pacman
- (HACKATHON 0-1) line 161 in map.c for loading map
- [HACKATHON] 1-1 ~ 1-4
- Separate the x and y axes. Use the same calculation to detect each axis.


```
// [HACKATHON 0-1]
// You can just switch to nthu_map if you want to finish HACKATHON 0 later.
M->map[i][j] = default_map[i][j];
// M->map[i][j] = nthu_map[i][j];
```

Today's Goal (I)

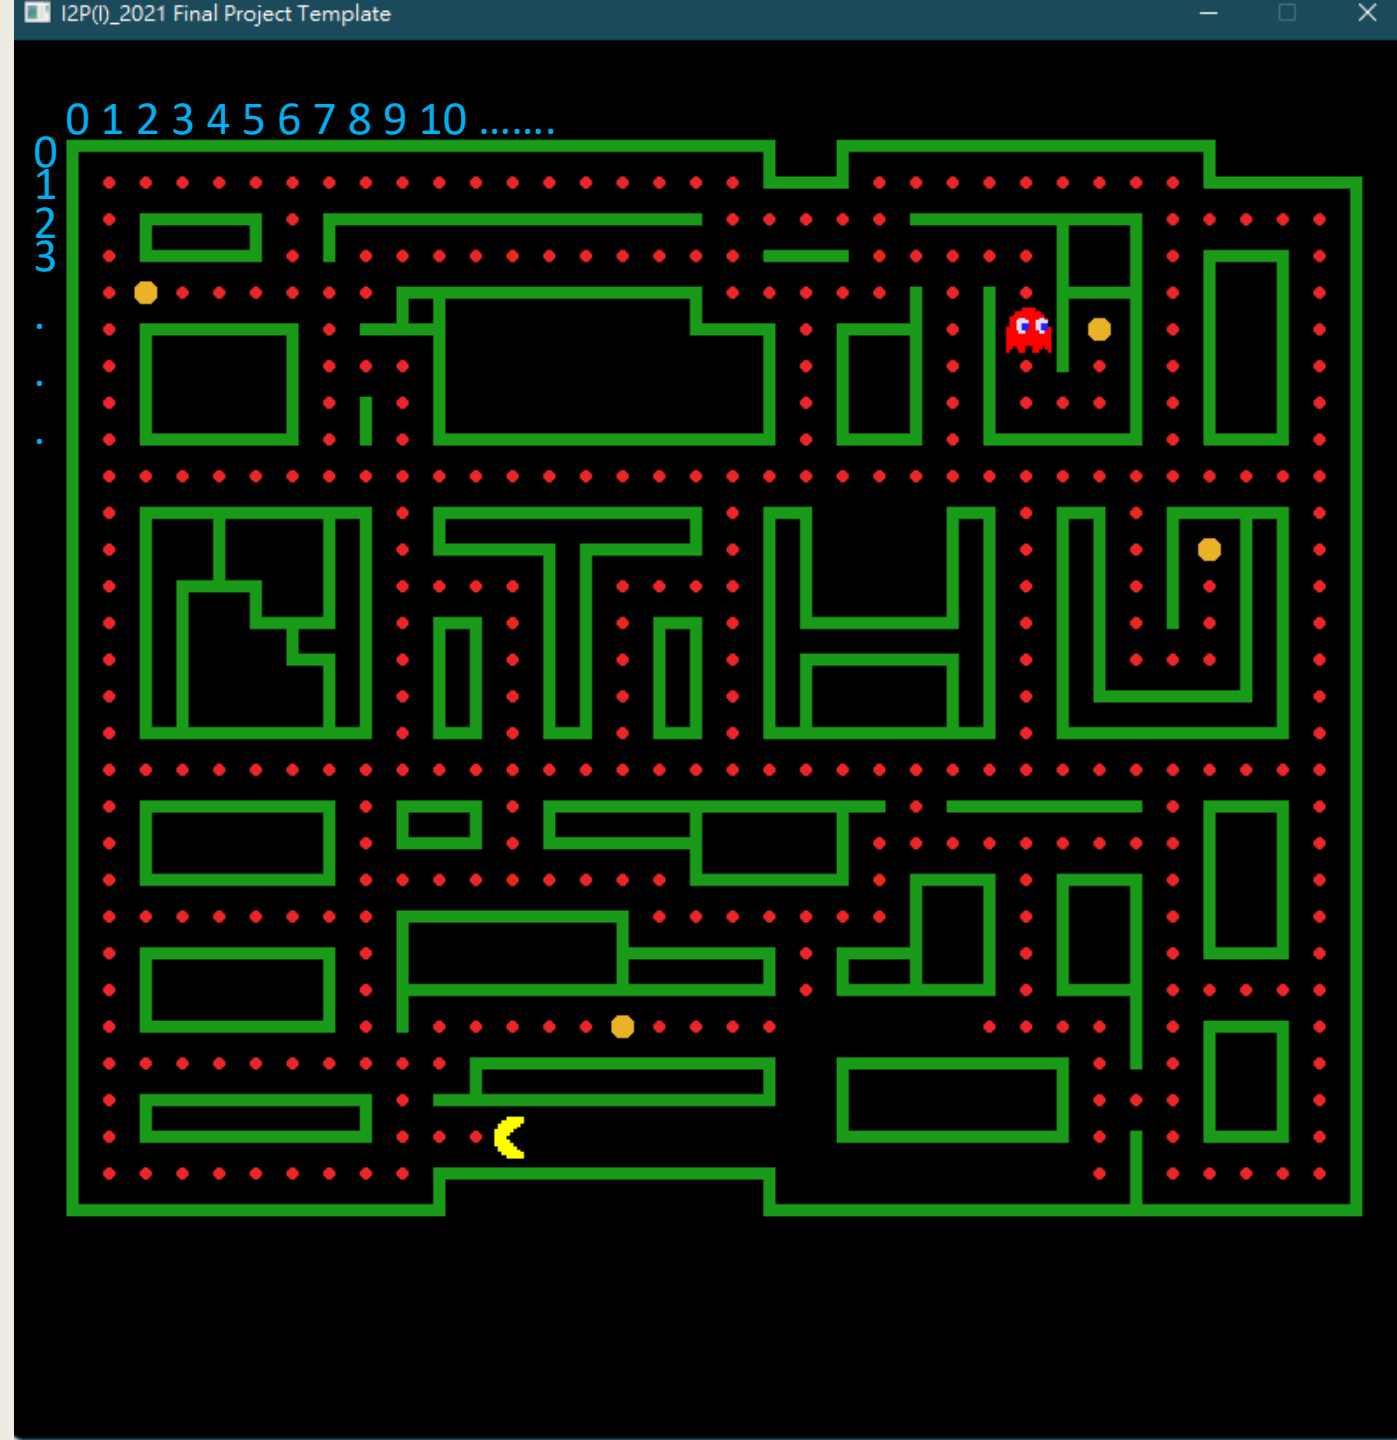


Today's Goal (I)

- [HACKATHON 1-2] Setup Check of valid movement in `pacman_movable(...)`
 - Valid
 - Non-Valid

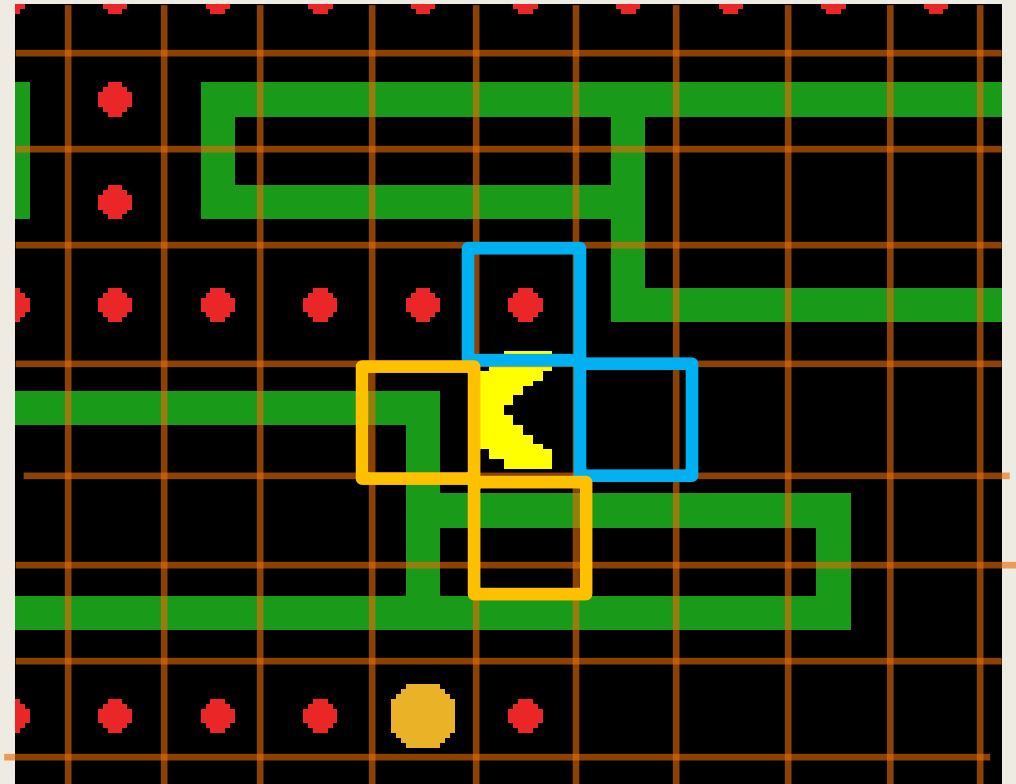

Today's Goal (I)

- [HACKATHON 1-3~4] Use ``pacman_eatItem(...)`` to activate the effect of item. (Playing sound)
- And erase the item from 2-D char Array map.

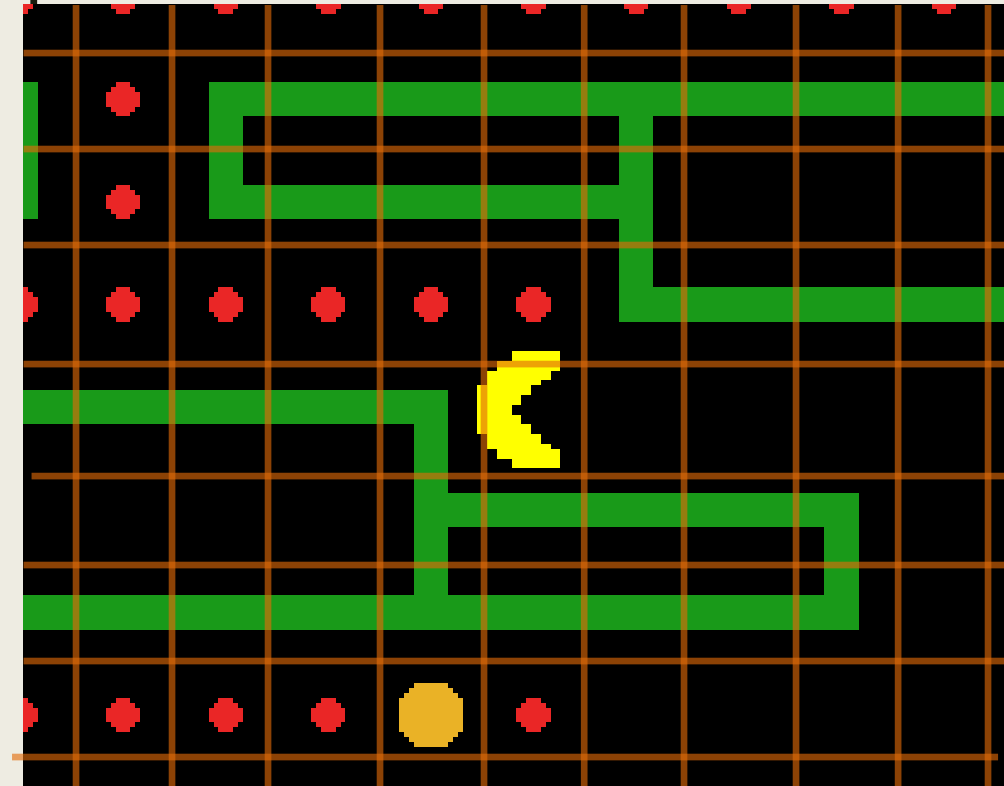

Today's Goal (II)

- Allocate ghosts. (Today, one ghost is enough.
- Let Ghost start to move.
- [HACKATHON] 2-0 ~ 2-4
- Control the state of ghost
- `ghost_movable` use the same logic of `pacman_movable`
- Today, only focus on the `ghost_red_move_script_FREEDOM` function.
 - But the state machine of ghost movement is important for your future programming.

```
typedef enum {  
    BLOCKED,  
    GO_OUT,  
    FREEDOM,  
    GO_IN,  
    FLEE  
} GhostStatus;
```

Today's Goal (III)

- Implement a new scene
 - *Create the settings scene. (can be entirely black with no functions)*
 - *A button in main scene. (with mouse in/out animation)*
- [HACKATHON] 3-1 ~ 3-9

In `game_change_scene`, `game_update`, `game_draw`, `on_key_down`, ...

```
if (active_scene == SCENE_MENU) {  
    //...  
} else if (active_scene == SCENE_START) {  
    //...  
} else if (active_scene == SCENE_SETTINGS) {
```

Today's Goal

- Aside from filling the blanks, make sure you understand the entire game flow and how each code section works.
- Find a TA and demo the 3 goals to get 3% score.
- The TA will ask you to explain how the 3 goals are implemented, you'll get 3% score if you can describe how the code works.
- (each goal deserves 1% score respectively)

Useful Resource

- Allegro 5 Wiki
 - <https://www.allegro.cc/manual/5/>
- Allegro 5 reference manual
 - <https://liballeg.org/a5docs/trunk/>
- Movie Tutorial
 - <https://www.youtube.com/watch?v=IZ2krJ8Ls2A&list=PL6B459AAE1642C8B4>
- 2D Game Development Course
 - <http://fixbyproximity.com/2d-game-development-course/>

DON'T
CHEAT



LET'S

CODE

Have a nice day~

