Verifying the HHL Algorithm in Isabelle/HOL

Quantum Hoare Logic from the Spectral Theorem to Elementary Gates

Dustin Bryant


Independent, USA brydustin@gmail.com

Abstract. The algorithm of Harrow, Hassidim and Lloyd (HHL) prepares a quantum state proportional to the solution of a linear system $Ax = b$, for sparse and well-conditioned A in time polylogarithmic in the dimension. Its correctness combines the spectral theorem, phase estimation, a controlled rotation, uncomputation, post-selection and amplitude amplification, and the error analysis in the paper's appendix is intricate. We verify HHL in Isabelle/HOL as programs of the quantum while-language of the AFP entry *QHLProver*, whose Hoare triples make probabilistic statements about measurements. Phase estimation, the core of HHL, is verified first as a program of its own, with the exact probability of every outcome and the textbook clock size for a given precision and confidence. For exact HHL, with eigenvalues on the phase-estimation grid, we prove total correctness: one run succeeds with probability $C^2\|A^{-1}b\|^2$, after which the state is exactly $|0\rangle \otimes A^{-1}b/\|A^{-1}b\| \otimes |1\rangle$, and the repeat-until-success loop terminates with probability one in that state, after $1/p$ rounds on average. For inexact HHL, with arbitrary spectra, we prove Theorem 1 of the paper and its run-time bound with explicit constants, and fidelity triples for the corresponding programs. We then refine the programs until every gate is a one- or two-qubit unitary, including the preparation of $|b\rangle$, the controlled rotation and, for sparse A, a Trotter circuit for e^{iAt} with explicit error. The formalisation corrects several statements of the HHL paper, among them the constant of its Lemma 3. The development rests on a formalisation of Paulsen's lecture course on quantum computing and completely positive maps, and it builds without `sorry` or axioms; the one oracle is the Types-To-Sets rule behind an imported AFP result.

Keywords: Isabelle/HOL · Quantum Hoare logic · HHL algorithm · Phase estimation · Hamiltonian simulation · Formal verification

1 Introduction

Solving a linear system $Ax = b$ is the workhorse of scientific computing. Harrow, Hassidim and Lloyd [13] observed that a quantum computer can prepare the state $|x\rangle \propto A^{-1}|b\rangle$ for a Hermitian $A \in \mathbb{C}^{N\times N}$ in time polynomial in $\log N$, in the condition number κ and in $1/\varepsilon$, provided A is sparse and $|b\rangle$ is easy to prepare, while classical algorithms take time polynomial in N. The algorithm,

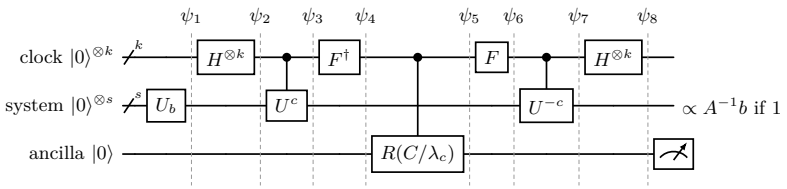

ψ_1 $|0\rangle \otimes b \otimes |0\rangle$
ψ_2 $u \otimes b \otimes |0\rangle$
ψ_3 $\sum_j |j\rangle \otimes N^{-1/2} U^j b \otimes |0\rangle$
ψ_4 $\sum_j |j\rangle \otimes \Pi_j b \otimes |0\rangle$
ψ_5 $\sum_j |j\rangle \otimes \Pi_j b \otimes R(C/\lambda_j)|0\rangle$
ψ_6 $\sum_j |j\rangle \otimes N^{-1/2}(U^j \otimes I)\, w$
ψ_7 $u \otimes w$
ψ_8 $|0\rangle \otimes w$

$$w = \sqrt{I - C^2 A^{-2}}\, b \otimes |0\rangle + C A^{-1} b \otimes |1\rangle$$

Fig. 1. The HHL circuit and the state after each of its eight gates, from $\psi_0 = |0\rangle|0\rangle|0\rangle$, for $N = 2^k$, $U = e^{iAt_0}$, $u = N^{-1/2}\sum_j |j\rangle$ and every eigenvalue of A on the grid $\lambda_j = 2\pi j/(Nt_0)$ (taken as $2\pi(j-N)/(Nt_0)$ for $j \geq N/2$). Gate 3 applies U^c when the clock holds c, gate 5 applies $R(C/\lambda_c)$ to the ancilla, where $R(c)|0\rangle = \sqrt{1-c^2}|0\rangle + c|1\rangle$, and Π_j is the spectral projector of A at λ_j. The table is the theorem `hhl_steps` (Section 4).

now called HHL, started the study of quantum algorithms for linear algebra and quantum machine learning. Its fine print (state preparation, sparse access, the condition number, and the fact that the output is a quantum state rather than a list of numbers) has become part of how quantum speedups are assessed [1].

Figure 1 shows the circuit. Write $A = \sum_j \lambda_j |u_j\rangle\langle u_j|$ and $|b\rangle = \sum_j \beta_j |u_j\rangle$. Phase estimation with the unitaries e^{iAt_0} writes an approximation $\tilde{\lambda}_j$ of each eigenvalue into a clock register, which gives the state $\sum_j \beta_j |\tilde{\lambda}_j\rangle|u_j\rangle$. A rotation of an ancilla qubit, controlled by the clock, produces the amplitudes $C/\tilde{\lambda}_j$. Uncomputing the clock and measuring the ancilla then leaves, on outcome 1, the state $\sum_j (\beta_j/\lambda_j)|u_j\rangle$, which is $A^{-1}|b\rangle$ up to normalisation. The success probability is $C^2\|A^{-1}b\|^2$, which is at least $1/\kappa^2$ for $C = \lambda_{\min}$ and unit b, so the measurement is repeated or amplified. Moreover, every step is approximate: the eigenvalues are not exactly representable in the clock, e^{iAt_0} has to be simulated, and the condition number enters through the rotation angles. The appendix of the HHL paper bounds all of these errors.

HHL is a natural target for program verification. Its specification is probabilistic: it says what holds after a measurement and with which probability, and the full algorithm is a loop whose number of rounds is random. Quantum Hoare logic [33,11] was designed for such statements. A predicate is an operator $0 \leq P \leq I$, read as the observable "P holds", and the triple $\{P\}\, S\, \{Q\}$ states that for every input the probability of Q after running S is at least the probability of P before. HHL has been verified in this style in Coq: Zhou et al. [35] formalised the pen-and-paper proof of [36], and Wu, Deng and Xu [32] verified it in a logic with distribution formulas. Both treat the exact case, in which every eigenvalue satisfies $\lambda_j t_0/2\pi \in \{1, \ldots, N-1\}$. Both prove the partial-correctness triple $\{I\}\ \mathit{HHL}\ \{|x\rangle\langle x|\}$ for the repeat-until-success loop (whenever the loop ter-

minates, the system holds $|x\rangle$), and both take U_b, the controlled rotation and the controlled evolution as given unitaries.

This paper reports a verification of HHL in Isabelle/HOL that goes beyond the exact case and below the given unitaries. Its theme is one kind of statement, a Hoare triple of the logic of Liu et al. [18,19] about a program, established at four levels (Fig. 2). The first is the mathematics behind the algorithm. The second is the algorithm with its error analysis. The third is the program, with initialisation, measurement and loop. The fourth is the circuit of elementary gates. Concretely, the contributions are as follows.

- *Phase estimation as a program* (Section 3). For every set J of clock values, the probability that phase estimation ends with the clock in J is exactly $\sum_{j\in J} |\alpha_j|^2$; this is a triple with the weakest possible precondition. The textbook guarantees follow as triples: an exact phase is read with certainty, the nearest grid value with probability at least $4/\pi^2$, and with $n + \lceil \log_2(2 + 1/(2\varepsilon)) \rceil$ clock qubits the estimate is within 2^{-n} with probability at least $1 - \varepsilon$ [22].
- *Exact HHL, total correctness* (Section 4). One run of the program succeeds with probability $C^2\|A^{-1}b\|^2$ and then holds exactly $|0\rangle \otimes A^{-1}b/\|A^{-1}b\| \otimes |1\rangle$. The repeat-until-success loop terminates with probability one in that state; it exits after exactly m failures with probability $(1-p)^m p$ and needs $1/p$ rounds on average. The logic has no total-correctness rule for loops, so we derive one for loops whose body re-initialises the state. On a 2×2 system the circuit also runs: Isabelle evaluates it in exact arithmetic, and each computed state is, by a theorem, the state of the trajectory.
- *Inexact HHL* (Section 5). For eigenvalues anywhere in the spectral window, an inexact simulation oracle and the paper's filter functions, we prove the bounds of the paper's Theorem 1 and its run-time claim with explicit constants. We also prove fidelity triples $\{(1-e^2)\, I\}\ \mathit{HHL}\ \{|t\rangle\langle t|\}$ for the corresponding programs, the inexact counterparts of the exact triples (Table 2).
- *Elementary gates* (Section 6). The programs are refined, triple by triple, until every gate is a one- or two-qubit unitary on adjacent wires. This covers the Fourier transform; the controlled rotation, as a uniformly controlled rotation with Walsh–Hadamard angles; the preparation of the clock and of an arbitrary $|b\rangle$; and, for s-sparse A, a Trotter circuit for e^{iAt} obtained from a graph colouring, with error $8(sLt)^2/r$ after $r(6s-2)$ queries. Suzuki's higher-order product formulas are verified with error of order $|t|^{2k+3}/r^{2k+2}$.
- *Errata* (Section 7). Mechanising the appendix exposed several false statements in the HHL paper, among them the constant in Lemma 3, which must be π^2 rather than $\pi^2/2$. Each erratum reported here is backed by a formal counterexample or a corrected theorem.
- *The foundation* (Section 8). Everything rests on a formalisation of Vern Paulsen's lectures on quantum computing and completely positive maps [23]. Its 34 lectures are formalised in 50 theories and audited statement by statement. The linear algebra and positivity theory of its first ten lectures carry the HHL development. Its later lectures develop the completely positive maps that give quantum programs their meaning [34].

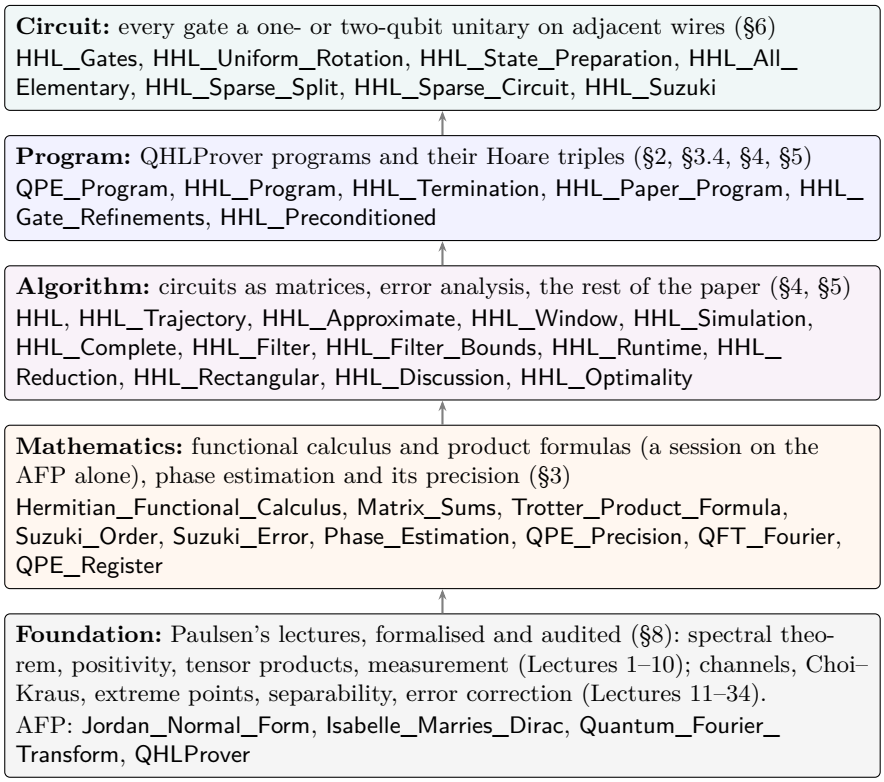


Fig. 2. The four levels of the HHL development and the theories at each level. Part VI of the development has 35 theories; the foundation has 50.

All results are checked by Isabelle2025-2 with `quick_and_dirty = false`, so no `sorry` survives. An audit with Thm_Deps.all_oracles over all theorems of the development finds one oracle: the search bound imported from the AFP entry *Compressed Oracles* inherits the Types-To-Sets rule cancel_type_definition, an extension of HOL that Isabelle records as an oracle. The sources, the generated documents and the audits are in the project repository.[1] Each listing below links to its source line ( ).

The rest of the paper is organised as follows. Section 2 recalls quantum Hoare logic and explains how HHL's specifications read as triples. Section 3 covers the functional calculus and phase estimation, including its precision and its verification as a program. Section 4 verifies exact HHL as a program, and Section 5 verifies inexact HHL, in the regime of the paper's error analysis. Section 6 compiles the programs to elementary gates, and Section 7 collects the errata. Section 8 describes the foundation. Sections 9 and 10 discuss related work, the trusted base and the limitations.

[1] `https://github.com/brydustin/Quantum_Computing`

2 Quantum Hoare Logic in Isabelle

2.1 States, Gates and Programs

We use the concrete representation of the Jordan-Normal-Form library [27], shared by Isabelle Marries Dirac [6,5], the quantum Fourier transform entry [20] and QHLProver [18,19]. A state is a vector `v :: complex vec` with a dimension hypothesis `dim_vec v = n`, an operator is a matrix with a carrier hypothesis `A ∈ carrier_mat n n`, $\otimes$ is the Kronecker product (`tensor_vec` for vectors), $|j\rangle$ is the unit vector `unit_vec n j`, $\langle v|w\rangle$ is antilinear in v, and $A^\dagger$ is the conjugate transpose. Dimensions are hypotheses rather than types, which is how the lecture notes and the physics literature treat them, and which lets the libraries share their definitions. The registers of HHL are ordered clock $\otimes$ system $\otimes$ ancilla, of dimensions $N = 2^k$, n and 2.

QHLProver formalises Ying's quantum while-language [33,34]:

$$S ::= \textbf{skip} \mid U \mid S_1; S_2 \mid \textbf{measure}\ M\ [S_0, \ldots, S_{m-1}] \mid \textbf{while}\ M\ \textbf{do}\ S.$$

A measurement is a family $M_0, \ldots, M_{m-1}$ with $\sum_k M_k^\dagger M_k = I$, and a loop is controlled by a two-outcome measurement. Programs act on partial density operators ($\rho \geq 0$, $\operatorname{tr}\rho \leq 1$):

$$[\![U]\!]\rho = U\rho U^\dagger, \qquad [\![S_1; S_2]\!] = [\![S_2]\!] \circ [\![S_1]\!],$$
$$[\![\textbf{measure}\ M\ \bar{S}]\!]\rho = \textstyle\sum_k [\![S_k]\!](M_k \rho M_k^\dagger),$$
$$[\![\textbf{while}\ M\ \textbf{do}\ S]\!]\rho = \textstyle\sum_{m\geq 0} M_0 \left(([\![S]\!] \circ \mathcal{M}_1)^m \rho\right) M_0^\dagger, \quad \text{where } \mathcal{M}_1(\rho) = M_1 \rho M_1^\dagger.$$

The loop runs S on outcome 1 and exits on outcome 0, and the m-th summand is the part of the input that exits after m rounds. The meaning of a program is a completely positive, trace-non-increasing map, and the trace lost by a loop is the probability that it does not terminate.

2.2 Predicates and Triples

A quantum predicate is an operator $0 \leq P \leq I$. For a state ρ, $\operatorname{tr}(P\rho)$ is the expected value of the observable P; for a projector it is the probability that measuring $\{P, I - P\}$ yields P. A triple compares these probabilities before and after the program (Listing 1): $\models_t \{P\}\ S\ \{Q\}$ holds if $\operatorname{tr}(P\rho) \leq \operatorname{tr}(Q[\![S]\!]\rho)$ for every input ρ, and partial correctness adds the probability $\operatorname{tr}\rho - \operatorname{tr}[\![S]\!]\rho$ of not terminating to the right-hand side. These are D'Hondt and Panangaden's predicates [11] with Ying's notion of correctness [33].

```
definition is_quantum_predicate :: "complex mat ⇒ bool" where
  "is_quantum_predicate P ⟷ P ∈ carrier_mat d d ∧ positive P ∧ P ≤L
      1m d"
definition hoare_total_correct :: "complex mat ⇒ com ⇒ complex mat
    ⇒ bool" where
  "⊨t {P} S {Q} ⟷ (∀ρ∈density_states. trace (P * ρ) ≤ trace (Q *
      denote S ρ))"
definition hoare_partial_correct :: "complex mat ⇒ com ⇒ complex
    mat ⇒ bool" where
  "⊨p {P} S {Q} ⟷ (∀ρ∈density_states.
      trace (P * ρ) ≤ trace (Q * denote S ρ) + (trace ρ - trace
          (denote S ρ)))"
```

Listing 1. Quantum predicates and triples in QHLProver (inside the locale state_sig, where d is the dimension of the state space; syntax annotations omitted)

QHLProver also defines a proof system $\vdash_p$ for partial correctness and proves it sound and complete [18]:

$$\frac{}{\{U^\dagger P U\}\ U\ \{P\}} \qquad \frac{\{P\}\,S_1\,\{Q\} \quad \{Q\}\,S_2\,\{R\}}{\{P\}\ S_1; S_2\ \{R\}} \qquad \frac{P \le P' \quad \{P'\}\,S\,\{Q'\} \quad Q' \le Q}{\{P\}\ S\ \{Q\}}$$

$$\frac{\{P_k\}\,S_k\,\{Q\} \quad (k < m)}{\{\textstyle\sum_k M_k^\dagger P_k M_k\}\ \textbf{measure}\ M\ \bar{S}\ \{Q\}} \qquad \frac{\{Q\}\ S\ \{R\}}{\{R\}\ \textbf{while}\ M\ \textbf{do}\ S\ \{P\}}$$

where $R = M_0^\dagger P M_0 + M_1^\dagger Q M_1$ in the loop rule, together with the rule for **skip**. The rules compute weakest preconditions backwards through a program. For loop-free programs, partial and total correctness coincide because such programs preserve the trace.

2.3 HHL's Specification as Triples

Every statement about HHL in this paper is a triple of one of four shapes (Table 1). Let P_0 and P_1 be the projectors onto ancilla value 0 and 1 (anc_proj), and let $|t\rangle$ be a unit vector with $P_1|t\rangle = |t\rangle$, typically $|t\rangle = |0\rangle \otimes A^{-1}b/\|A^{-1}b\| \otimes |1\rangle$. Since $\operatorname{tr}\rho = 1$ for a state, a precondition $q \cdot I$ asserts the number q for every input. The second reading needs a short argument. Let $\sigma = [\![S]\!]\rho$ for a state ρ. Then $\operatorname{tr}\sigma \le 1$, and $\operatorname{tr}((P_0 + |t\rangle\langle t|)\sigma) \ge 1$ forces $\operatorname{tr}((P_1 - |t\rangle\langle t|)\sigma) \le 0$. Since $P_1 - |t\rangle\langle t| \ge 0$, this gives $P_1\sigma P_1 = \langle t|\sigma|t\rangle\,|t\rangle\langle t|$: whenever the ancilla reads 1, the state is exactly $|t\rangle$.

2.4 What We Add to the Logic

Initialisation. QHLProver has no statement that prepares a fixed state. We build one from a measurement in the computational basis followed by a permutation that moves the outcome k to 0. Its rule says that after init_com the probability

Table 1. The four shapes of triple used for HHL, for a state ρ with $\operatorname{tr}\rho = 1$.

Triple	Reading
$\models_t \{p \cdot I\}\ S\ \{P_1\}$	S terminates with the ancilla in $\|1\rangle$ with probability $\geq p$
$\models_t \{I\}\ S\ \{P_0 + \|t\rangle\langle t\|\}$	whenever the ancilla reads 1 at the end, the state is exactly $\|t\rangle$
$\models_t \{I\}\ S\ \{\|t\rangle\langle t\|\}$	S terminates with probability one, in the state $\|t\rangle$
$\models_t \{q \cdot I\}\ S\ \{\|t\rangle\langle t\|\}$	the output has fidelity at least q with $\|t\rangle$

of Q is $\langle 0|Q|0\rangle$, whatever the input.

```
definition init_com :: "nat ⇒ com" where
  "init_com K = Measure K (proj_basis K) (map (λk. Utrans (swap0 K
      k)) [0..<K])"
theorem hoare_init:
  assumes Q: "is_quantum_predicate Q" and d0: "0 < d"
  shows "⊢_p {Q $$ (0, 0) ·_m 1_m d} init_com d {Q}"
```

Listing 2. Initialisation: a measurement and K swaps, and its proof rule

Gate lists. A circuit $U_1, \ldots, U_m$ becomes the program $\mathsf{utrans_seq}\,[U_1, \ldots, U_m] = U_1; \ldots; U_m$. All theorems about HHL programs are proved for every list of unitaries whose product ($\mathsf{circuit_mat}$) equals that of the eight gates of Fig. 1. A refinement that replaces gates by circuits with the same product therefore inherits every triple, which is how Section 6 reaches elementary gates.

Total correctness of loops. The proof system covers partial correctness only. For loops whose body re-initialises the state, we derive total correctness from the semantics (Section 4.3).

Fidelity triples. For a program that initialises, runs a circuit and measures, the probability of $|t\rangle\langle t|$ is the overlap $|\langle t|\psi\rangle|^2$ with the circuit's output ψ. Section 5.4 uses this to turn the error bounds of the algorithm into triples.

3 Functional Calculus and Phase Estimation

3.1 A Functional Calculus for Hermitian Matrices

HHL applies three functions to A: the evolution e^{iAt}, the inverse A^{-1}, and $x \mapsto \sqrt{1 - C^2/x^2}$, which appears in the output. We define $g(A)$ for Hermitian A and any $g : \mathbb{R} \to \mathbb{C}$ as the matrix that acts on every eigenvector by the value of g at its eigenvalue (Listing 3).

Theorem 1 (functional calculus). *Let $A \in \mathbb{C}^{n\times n}$ be Hermitian. There is exactly one matrix $g(A)$ with $g(A)v = g(\lambda)v$ for every eigenvector v of A with*

eigenvalue λ*, and* $g(A) = U\,\mathrm{diag}(g(d_1),\ldots,g(d_n))U^\dagger$ *for every spectral decomposition* $U^\dagger AU = \mathrm{diag}(d_1,\ldots,d_n)$.

Existence comes from the spectral theorem, here derived from QHLProver's Schur decomposition so that the functional calculus depends only on the AFP (Paulsen's Lecture 4 proves it too, as hermitian_spectral_decomp), and uniqueness from the fact that the eigenvectors span. Multiplicativity $g(A)h(A) = (gh)(A)$, $g(A)^\dagger = \bar{g}(A)$, unitarity when $|g| = 1$ on the spectrum, and positivity when $g \geq 0$ on it are all checked on eigenvectors. The instances are evolution $A\ t = e^{itA}$, with its group law, and herm_inv $A = A^{-1}$. Since $1/0 = 0$ in HOL, herm_inv is the pseudo-inverse when 0 is an eigenvalue (Section 4.5). The device behind the whole development is the following lemma: two matrices that agree on every eigenvector of a Hermitian A are equal (eigvec_mat_eql). It lets every statement about all right-hand sides b be proved for an eigenvector, without sums over an eigenbasis.

```
definition acts_on_eigenvectors :: "complex mat ⇒ (real ⇒ complex) ⇒
    complex mat ⇒ bool" where
  "acts_on_eigenvectors A g B ⟷ (∀v l. dim_vec v = dim_row A ⟶
     A *v v = complex_of_real l ·v v ⟶ B *v v = g l ·v v)"
definition mat_fun :: "(real ⇒ complex) ⇒ complex mat ⇒ complex
    mat" where
  "mat_fun g A = (SOME B. B ∈ carrier_mat (dim_row A) (dim_row A)
      ∧ B acts_as g on_eigenvectors_of A)"
theorem mat_fun_eigen:
  assumes A: "A ∈ carrier_mat n n" "hermitian A"
      and v: "dim_vec v = n" and ev: "A *v v = complex_of_real l ·v
          v"
  shows "mat_fun g A *v v = g l ·v v"
theorem mat_fun_decomp:
  assumes A: "A ∈ carrier_mat n n" "hermitian A" and sd:
      "spectral_decomp A U D"
  shows "mat_fun g A = U * diag_matrix (map g D) * (U†)"
```

Listing 3. The functional calculus

3.2 Phase Estimation

Let F_N be the Fourier matrix, $(F_N)_{jk} = \omega^{jk}/\sqrt{N}$ with $\omega = e^{2\pi i/N}$, and let $\Lambda(U) = \sum_c |c\rangle\langle c| \otimes U^c$ be the controlled powers of U (ctrl_pow). Phase estimation is $(F_N^\dagger \otimes I)\Lambda(U)$ applied to the uniform clock state $u = N^{-1/2}\sum_c |c\rangle$ (Fig. 1, gates 2–4).

Theorem 2 (phase estimation). *If* $Uv = e^{2\pi i\varphi}v$*, then* $(F_N^\dagger \otimes I)\Lambda(U)(u \otimes v) = (\sum_j \alpha_j |j\rangle) \otimes v$ *with* $\alpha_j = \frac{1}{N}\sum_{k<N} e^{2\pi i k(\varphi - j/N)}$*. If* $\varphi = j_0/N$*, then* $\alpha = |j_0\rangle$*. If* $|\varphi - j/N| \leq 1/(2N)$*, then* $|\alpha_j|^2 \geq 4/\pi^2$.

The first part is phase kickback: $\Lambda(U)(|c\rangle \otimes v) = e^{2\pi i c\varphi}|c\rangle \otimes v$. The bound follows from the geometric sum, $|e^{ix} - 1| = 2|\sin(x/2)|$ and Jordan's inequality

$\sin x \geq 2x/\pi$ on $[0, \pi/2]$. Two bridges connect the theorem to circuits. The quantum Fourier transform circuit of the AFP [20] is the Fourier matrix (ordered_QFT_fourier, by induction over its Kronecker structure), and k Hadamard gates prepare the uniform state from $|0 \cdots 0\rangle$ (hadamard_layer_zero, from Isabelle Marries Dirac).

```
theorem phase_estimation:
  assumes U: "U ∈ carrier_mat m m" and u: "dim_vec u = m"
      and ev: "U *_v u = cis (2 * pi * φ) ·_v u"
  shows "(((fourier N)†) ⊗ 1_m m) *_v (ctrl_pow N m U *_v tensor_vec
      (uniform_state N) u) =
         tensor_vec (Matrix.vec N (pe_amp N φ)) u"
theorem phase_estimation_bound:
  assumes N: "0 < N" and close: "|φ - real j / real N| ≤ 1 / (2 *
      real N)"
  shows "4 / pi^2 ≤ (cmod (pe_amp N φ j))^2"
theorem ordered_QFT_fourier: "ordered_QFT n = fourier (2 ^ n)"
theorem hadamard_layer_zero:
  assumes n: "1 ≤ n"
  shows "(Hadamard ⊗^n) *_v unit_vec (2 ^ n) 0 = uniform_state (2 ^
      n)"
```

Listing 4. Phase estimation, the $4/\pi^2$ bound, and the bridges to circuits

3.3 The Precision of Phase Estimation

Theorem 2 bounds the probability of the best outcome from below. Choosing the size of the clock needs the converse: distant outcomes must be unlikely. We measure the error of outcome j on the circle $\mathbb{R}/\mathbb{Z}$, as the distance d_j from $\varphi - j/N$ to the nearest integer (circ_dist), so that phases close to 0 and to 1 count as close.

Theorem 3 (precision of phase estimation). *Let $N \geq 1$ and $e > 1$. For every phase φ, the outcomes with $Nd_j > e$ have total probability*

$$\sum_{Nd_j > e} |\alpha_j|^2 \;\leq\; \tfrac{1}{2(e-1)}.$$

With $k = n + \lceil \log_2(2 + 1/(2\varepsilon)) \rceil$ clock qubits, the outcome therefore satisfies $d_j \leq 2^{-n}$ with probability at least $1 - \varepsilon$.

This is Eq. (5.34) of Nielsen and Chuang and the choice of the clock size after it [22, Sect. 5.2.1]; Fig. 3 shows an instance. The proof has two steps. The geometric sum gives $|\alpha_j| \leq 1/(2Nd_j)$ (pe_amp_circ_tail). The signed errors y_j, which are $N(\varphi - j/N)$ reduced into $[-\frac{N}{2}, \frac{N}{2}]$, differ by nonzero integers for distinct outcomes. So $j \mapsto \lceil y_j - e \rceil$ is injective on the outcomes with $y_j > e$, and $y_j > e + \lceil y_j - e \rceil - 1$. Telescoping gives $\sum_{y_j > e} y_j^{-2} \leq \sum_{m \geq 1} (e + m - 1)^{-2} \leq 1/(e-1)$ (sum_inv_sq_spaced). The same holds below $-e$, and the two halves give $\frac{1}{4} \cdot \frac{2}{e-1}$. For the second part, $\sum_j |\alpha_j|^2 = 1$ and $e = 2^{k-n} \geq 2 + 1/(2\varepsilon)$.

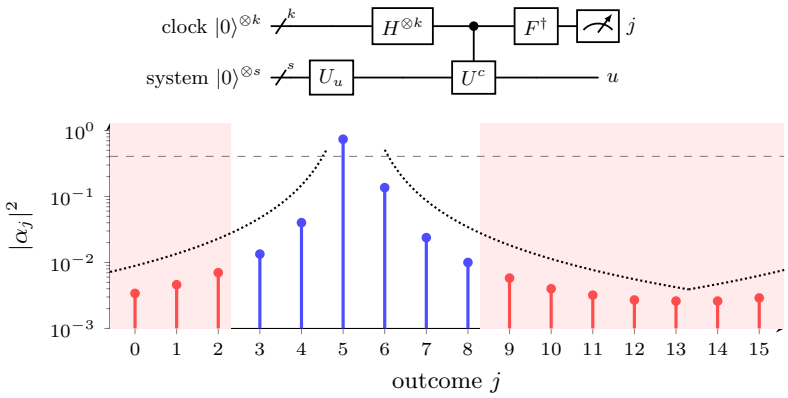


Fig. 3. Phase estimation as a program (top), and its outcome distribution for $N = 16$ and $N\varphi = 5.3$ (bottom, logarithmic scale). The nearest value $j = 5$ has probability $0.74 \geq 4/\pi^2$ (dashed line). The dotted curve is the tail bound $|\alpha_j|^2 \leq 1/(4N^2 d_j^2)$. The outcomes more than $e = 3$ from $N\varphi$ (shaded) have total probability 0.039, below the bound $1/(2(e-1)) = \frac{1}{4}$ of Theorem 3.

```
definition wrap :: "real ⇒ real" where
  "wrap x = x - of_int (round x)"
definition circ_dist :: "real ⇒ real ⇒ real" where
  "circ_dist x y = |wrap (x - y)|"
theorem pe_tail_bound:
  assumes N: "0 < N" and e: "1 < e"
  shows "(∑j | j < N ∧ e < real N * circ_dist φ (real j /
      real N). (cmod (pe_amp N φ j))²) ≤ 1 / (2 * (e - 1))"
theorem pe_precision:
  assumes eps: "0 < ε"
      and t: "t = n + nat ⌈log 2 (2 + 1 / (2 * ε))⌉"
  shows "1 - ε ≤ (∑j | j < 2 ^ t ∧ circ_dist φ (real j /
      2 ^ t) ≤ 1 / 2 ^ n. (cmod (pe_amp (2 ^ t) φ j))²)"
```

Listing 5. Theorem 3

3.4 Phase Estimation as a Program

Before HHL, phase estimation itself shows how probabilistic guarantees become triples. The program qpe_program initialises the state, prepares an eigenvector $u = U_u|0\rangle$ of U in the system register, and applies the gates of Theorem 2 (Fig. 3, top). For a set J of clock values, the predicate $\Pi_J = \sum_{j\in J} |j\rangle\langle j| \otimes I$ (clock_proj) holds when the clock reads a value in J.

Theorem 4 (phase estimation as a program). *Let U and U_u be unitary, $u = U_u|0\rangle$, $Uu = e^{2\pi i\varphi}u$ and $N = 2^k$. For every set J of clock values,*

$$\models_t \{(\textstyle\sum_{j\in J} |\alpha_j|^2)\, I\}\ QPE\ \{\Pi_J\},$$

and on every input ρ the probability of Π_J is exactly $\sum_{j\in J}|\alpha_j|^2\,\mathrm{tr}\,\rho$, so no larger multiple of I is a precondition. In particular:

1. *if $\varphi = j_0/N$ with $j_0 < N$, then $\models_t \{I\}$ QPE $\{\Pi_{\{j_0\}}\}$;*
2. *for every φ, $\models_t \{(4/\pi^2)\,I\}$ QPE $\{\Pi_{\{j^*\}}\}$, where $j^* = \mathrm{round}(N\varphi) \bmod N$;*
3. *if $k = n + \lceil \log_2(2 + 1/(2\varepsilon))\rceil$, then $\models_t \{(1-\varepsilon)\,I\}$ QPE $\{\Pi_{\{j\,:\,d_j \le 2^{-n}\}}\}$.*

The first triple also holds for the program whose gates are k Hadamard gates, one controlled U^{2^j} per clock qubit and the inverted Fourier circuit of the AFP.

The program initialises and then runs a unitary circuit, so its semantics maps every ρ to $\mathrm{tr}\,\rho\,|\psi\rangle\langle\psi|$, where $\psi = (\sum_j \alpha_j|j\rangle)\otimes u$ by Theorem 2 and hadamard_layer_zero (qpe_out, qpe_prob). The rule for initialisation and the gate rules of Section 2 give the triple with the precondition $\langle\psi|\Pi_J|\psi\rangle\,I$, and $\langle\psi|\Pi_J|\psi\rangle = \sum_{j\in J}|\alpha_j|^2$ because u is a unit vector (clock_proj_value). Soundness gives the semantic triple, and the program has no loop, so partial and total correctness agree. Items (1)–(3) weaken the precondition by Theorems 2 and 3; for (2), j^* is within $\frac{1}{2N}$ of φ on the circle, and the periodicity of α_j in φ reduces this to Theorem 2 (pe_round_dist, pe_amp_near). In the gate-level program the Hadamard gates multiply to $H^{\otimes k}$ (had_gates), the controlled powers to $\Lambda(U)$ (ctrl_pow_qubits) and the inverted gate list to $F_N^\dagger$ (qft_inv_circuit). The triples of an initialised circuit depend only on the product of its gates (init_circuit_transfer, qpe_elem_total).

4 Exact HHL as a Verified Program

In this section every eigenvalue of A is a grid value: $\lambda_k = 2\pi k/(Nt_0)$ for $k < N/2$ and $2\pi(k-N)/(Nt_0)$ otherwise (reg_eig), so that $e^{it_0\lambda_k} = \omega^k$ and phase estimation is exact. This is the setting of the Coq proofs [35,32]; Section 5 removes it. The HHL program extends the phase-estimation program of Section 3.4 by the controlled rotation, the uncomputation and a measurement of an ancilla.

4.1 The Circuit

The circuit is $W^\dagger RW$, with phase estimation $W = (F_N^\dagger\otimes I)\Lambda(e^{iAt_0}\otimes I)$ and the controlled rotation $R = \sum_k |k\rangle\langle k|\otimes I\otimes R(C/\lambda_k)$. Here $R(c) = \begin{pmatrix} \sqrt{1-c^2} & -c \\ c & \sqrt{1-c^2}\end{pmatrix}$ is unitary for $|c|\le 1$.

Theorem 5 (exact HHL). *Let $A\in\mathbb{C}^{n\times n}$ be Hermitian with every eigenvalue a nonzero grid value λ_k, $0<k<N$. Then for every $b\in\mathbb{C}^n$ and every real C,*

$$W^\dagger RW\,(u\otimes b\otimes|0\rangle) = u\otimes\big(\sqrt{I - C^2A^{-2}}\,b\otimes|0\rangle + CA^{-1}b\otimes|1\rangle\big).$$

Hence $x = A^{-1}b$ solves $Ax = b$, the ancilla reads 1 with probability $C^2\|x\|^2$, and if $C\le|\lambda|\le\Lambda$ on the spectrum, this probability is at least $(C/\Lambda)^2\|b\|^2$, which is $1/\kappa^2$ for unit b and $C = \lambda_{\min}$.

```
definition qpe_program :: "nat ⇒ complex mat ⇒ complex mat ⇒
    com" where
  "qpe_program k U Uu = init_com (2 ^ k * dim_row U) ;; utrans_seq
      (qpe_gates k U Uu)"
context
  fixes U Uu :: "complex mat" and u :: "complex vec" and m k :: nat
      and φ :: real
  assumes U: "U ∈ carrier_mat m m" "unitary U" and m0: "0 < m"
      and k: "1 ≤ k"
    and Uu: "Uu ∈ carrier_mat m m" "unitary Uu" "Uu *v unit_vec m 0
        = u"
    and ev: "U *v u = cis (2 * pi * φ) ·v u"
begin
theorem qpe_total:
  "state_sig.hoare_total_correct [2 ^ k, m]
     (complex_of_real (∑j | j < 2 ^ k ∧ j ∈ Js. (cmod (pe_amp
         (2 ^ k) φ j))^2) ·m 1m (2 ^ k * m))
     (qpe_program k U Uu) (clock_proj (2 ^ k) m Js)"
corollary qpe_nearest_total:
  "state_sig.hoare_total_correct [2 ^ k, m] (complex_of_real (4 /
      pi^2) ·m 1m (2 ^ k * m))
     (qpe_program k U Uu) (clock_proj (2 ^ k) m {pe_round (2 ^ k)
         φ})"
corollary qpe_precision_total:
  assumes eps: "0 < ε"
      and t: "k = n + nat ⌈log 2 (2 + 1 / (2 * ε))⌉"
  shows "state_sig.hoare_total_correct [2 ^ k, m] (complex_of_real (1
      - ε) ·m 1m (2 ^ k * m))
     (qpe_program k U Uu) (clock_proj (2 ^ k) m {j. circ_dist φ
         (real j / 2 ^ k) ≤ 1 / 2 ^ n})"
```

Listing 6. Theorem 4 (Js is the set J)

```
theorem hhl:
  assumes A: "A ∈ carrier_mat n n" "hermitian A" and t0: "0 < t0"
      and N: "0 < N"
      and spec: "⋀l. l ∈ herm_spectrum A ⟹ ∃k. 0 < k ∧ k < N ∧ l =
          reg_eig t0 N k"
      and b: "dim_vec b = n"
  shows "hhl_circuit A t0 N C *v tensor_vec (uniform_state N)
      (tensor_vec b (unit_vec 2 0)) =
         tensor_vec (uniform_state N)
           (tensor_vec (mat_fun (λx. complex_of_real (sqrt (1 - (C
               / x)^2))) A *v b) (unit_vec 2 0) +
            tensor_vec ((complex_of_real C ·m herm_inv A) *v b)
                (unit_vec 2 1))"
```

Listing 7. Exact HHL as a matrix identity, for every right-hand side

The proof first takes b to be an eigenvector with eigenvalue λ_k (hhl_eigen). Phase estimation sends $u \otimes b$ to $|k\rangle \otimes b$ by Theorem 2, the rotation acts on the single branch k, and $W^\dagger$ undoes W. Both sides of the identity are linear in b and of the form Mb for matrices M built with lift_mat, so eigvec_mat_eql extends the identity to all b. The success bound applies the functional calculus to $g(x) = 1/x^2 - 1/\Lambda^2$, which is non-negative on the spectrum, so $g(A)$ is positive (hhl_success_bound).

4.2 The Program and its Trajectory

As a program, HHL starts from $|0\rangle|0\rangle|0\rangle$. It prepares $|b\rangle = U_b|0\rangle$ and the uniform clock with Hadamard gates, so the circuit has eight gates (hhl_gates, Fig. 1). The table of Fig. 1 is the theorem hhl_steps, which gives the state after each gate for every b. Phase estimation leaves $\sum_j |j\rangle \otimes \Pi_j b \otimes |0\rangle$, where $\Pi_j = g_j(A)$ for the indicator g_j of $\{\lambda_j\}$. With the unitary rule and the rule of consequence, each line becomes a triple $\{|\psi_i\rangle\langle\psi_i|\}\, U_i\, \{|\psi_{i+1}\rangle\langle\psi_{i+1}|\}$ (hhl_step_triples). The program initialises all registers, runs the gates and measures the ancilla (Listing 8).

Theorem 6 (exact HHL, one run). *Let A be as in Theorem 5 with $N = 2^k$, let U_b be a unitary with $U_b|0\rangle = b$, and let $|C/\lambda_j| \le 1$ for all $j < N$. Let $p = C^2\|A^{-1}b\|^2$ and $|t\rangle = |0\rangle \otimes A^{-1}b/\|A^{-1}b\| \otimes |1\rangle$. Then*

$$\models_t \{p \cdot I\}\ \mathit{hhl_program}\ \{P_1\} \qquad \text{and} \qquad \models_t \{I\}\ \mathit{hhl_program}\ \{P_0 + |t\rangle\langle t|\}.$$

By Table 1, a single run succeeds with probability at least p, and on success the state is exactly $|t\rangle$. The hypothesis on C makes the rotation gate unitary, as the program semantics requires. Listing 9 shows the formal statement, including the context that fixes the hypotheses.

```
definition prog_meas :: "nat ⇒ (nat ⇒ complex mat) ⇒ complex mat list
    ⇒ com" where
  "prog_meas K M Us = init_com K ;; utrans_seq Us ;; Measure 2 M
      [SKIP, SKIP]"
definition rus_meas :: "nat ⇒ (nat ⇒ complex mat) ⇒ complex mat list
    ⇒ com" where
  "rus_meas K M Us = init_com K ;; utrans_seq Us ;;
                     While (λj. M (1 - j)) (init_com K
                         ;; utrans_seq Us)"
abbreviation hhl_prog :: "nat ⇒ complex mat list ⇒ com" where
  "hhl_prog K Us ≡ prog_meas K (anc_proj K) Us"
abbreviation hhl_rus_prog :: "nat ⇒ complex mat list ⇒ com" where
  "hhl_rus_prog K Us ≡ rus_meas K (anc_proj K) Us"
definition hhl_program :: "complex mat ⇒ complex mat ⇒ real ⇒ nat
    ⇒ real ⇒ com" where
  "hhl_program A Ub t0 k C = hhl_prog (2 ^ k * (dim_row A * 2))
      (hhl_gates A Ub t0 k C)"
```

Listing 8. The programs for a gate list and a two-outcome measurement: one run, and repeat until the outcome is 1. HHL measures the ancilla

```
context
  fixes A Ub :: "complex mat" and b :: "complex vec" and n k ::
      nat and t0 C :: real
  assumes A: "A ∈ carrier_mat n n" "hermitian A" and n0: "0 < n"
      and k: "1 ≤ k" and t0: "0 < t0"
    and spec: "⋀l. l ∈ herm_spectrum A ⟹ ∃j. 0 < j ∧ j < 2 ^ k ∧ l
       = reg_eig t0 (2 ^ k) j"
    and Ub: "Ub ∈ carrier_mat n n" "unitary Ub" "Ub *v unit_vec n
       0 = b"
    and Cb: "⋀j. j < 2 ^ k ⟹ |C / reg_eig t0 (2 ^ k) j| ≤ 1"
begin
theorem hhl_success_total:
  "state_sig.hoare_total_correct [2 ^ k, n, 2]
     (complex_of_real (C^2 * ‖herm_inv A *v b‖^2) ·m 1m (2 ^ k * (n
         * 2)))
     (hhl_program A Ub t0 k C) (anc_proj (2 ^ k * (n * 2)) 1)"
theorem hhl_correct_total:
  "state_sig.hoare_total_correct [2 ^ k, n, 2] (1m (2 ^ k * (n *
      2))) (hhl_program A Ub t0 k C)
     (anc_proj (2 ^ k * (n * 2)) 0 + outer_prod (hhl_target A k b)
         (hhl_target A k b))"
```

Listing 9. Theorem 6 (state_sig.hoare_total_correct dims is $\models_t$ on the registers dims)

The partial-correctness versions are derived with the proof rules (hhl_success, hhl_correct). The postcondition is pulled back through the measurement with the measurement rule, through the gates with the unitary rule, which along the

trajectory turns it into a predicate whose value on $|000\rangle$ is p (respectively 1), and through the initialisation with hoare_init. Total correctness follows because programs without loops preserve the trace (denote_trace_eq). All of this is proved for any gate list with the circuit of the eight gates (hhl_prog_success, hhl_prog_correct).

4.3 Repeat Until Success

A failed run (ancilla 0) is discarded and the program is run again. This is the loop hhl_rus_prog of Listing 8, which exits when the ancilla reads 1. Partial correctness, $\models_p \{I\}$ *hhl_rus* $\{|t\rangle\langle t|\}$ (hhl_rus_correct), follows from the loop rule. Its invariant is $P_0 + |t\rangle\langle t|$, the postcondition of the second triple of Theorem 6. It says nothing about termination, and QHLProver has no rule for total correctness of loops. We therefore work in the semantics. Because the body begins with init_com, it maps every input ρ to $(\operatorname{tr}\rho)\,\sigma$ for the fixed state $\sigma = [\![init; U_1; \ldots; U_8]\!](|0\rangle\langle 0|)$. The m-th summand of the loop semantics is then $(1-p)^m$ times the exit of one round, and the loop is a geometric series.

Lemma 1 (loops with a resetting body). *Let M be a two-outcome measurement and S a body with $[\![S]\!]\rho = (\operatorname{tr}\rho)\,\sigma$ for every partial density operator ρ, where $\operatorname{tr}\sigma = 1$, $\operatorname{tr}(M_1\sigma M_1^\dagger) = 1-p$ and $0 < p \le 1$. Let Q be a predicate and $v = \operatorname{tr}(QM_0\sigma M_0^\dagger)$. Then $\operatorname{tr}\big(Q\,[\![\textbf{while } M \textbf{ do } S]\!](c\sigma)\big) \ge cv/p$ for $0 \le c \le 1$.*

```
lemma while_reset_total:
  assumes M: "measurement d 2 M" and Sc: "well_com Sc"
    and σ: "σ ∈ carrier_mat d d" "partial_density_operator σ"
        "trace σ = 1"
    and reset: "⋀ρ. ρ ∈ carrier_mat d d ⟹ partial_density_operator
        ρ ⟹ denote Sc ρ = trace ρ ·m σ"
    and p: "trace (M 1 * σ * adjoint (M 1)) = complex_of_real (1 -
        p)" "0 < p" "p ≤ 1"
    and Q: "is_quantum_predicate Q" and v: "trace (Q * (M 0 * σ *
        adjoint (M 0))) = complex_of_real v"
    and c: "0 ≤ c" "c ≤ 1"
  shows "complex_of_real (c * v / p) ≤ trace (Q * denote (While M
      Sc) (complex_of_real c ·m σ))"
```

Listing 10. Lemma 1

For HHL, $M_0 = P_1$ and the exit of one round is $p\,|t\rangle\langle t|$, so $Q = |t\rangle\langle t|$ gives $v = p$. The probability of $|t\rangle$ at the end is then at least the trace of the input, which is total correctness.

Theorem 7 (exact HHL, repeat until success). *Under the hypotheses of Theorem 6 and $C \neq 0$:*

1. $\models_t \{I\}$ *hhl_rus* $\{|t\rangle\langle t|\}$*, i.e. the loop terminates with probability one in* $|t\rangle$*;*
2. *after exactly m failed rounds the loop exits with probability $(1-p)^m p$, in the state $|t\rangle$, and is still running with probability $(1-p)^m$;*

3. the expected number of rounds is $\sum_m (m+1)p(1-p)^m = 1/p$.

```
theorem hhl_rus_total:
  assumes "C ≠ 0"
  shows "state_sig.hoare_total_correct [2 ^ k, n, 2] (1_m (2 ^ k *
      (n * 2))) (hhl_rus A Ub t0 k C)
     (outer_prod (hhl_target A k b) (hhl_target A k b))"
theorem hhl_rus_expected_rounds:
  assumes C0: "C ≠ 0"
  defines "p ≡ C² * ‖herm_inv A *_v b‖²"
  shows "(λm. real (Suc m) * (p * (1 - p) ^ m)) sums (1 / p)" and
      "(λm. (1 - p) ^ m) sums (1 / p)"
```

Listing 11. Theorem 7(1) and (3), in the context of Listing 9

Part (2) is hhl_rus_prog_rounds, which computes the m-th iterate of the loop semantics in closed form. With $C = \lambda_{\min}$ and unit b, the expected number of rounds is at most κ^2; amplitude amplification reduces this to $O(\kappa)$ (Section 5).

4.4 Running the Circuit

The semantics of programs is denotational and $g(A)$ is defined by choice, so hhl_program cannot be evaluated as it stands. Its circuit can, once A is concrete. Take

$$A = \begin{pmatrix} 2 & 1 \\ 1 & 2 \end{pmatrix}, \qquad b = |0\rangle, \qquad k = 3, \qquad t_0 = \pi/4, \qquad C = 1.$$

Then $H^\dagger A H = \operatorname{diag}(3, 1)$, so the eigenvalues sit on the clock values 3 and 1, and $e^{iAt_0} = H \operatorname{diag}(\omega^3, \omega) H^\dagger$ with $\omega = e^{i\pi/4}$ (demo_evolution, by mat_fun_decomp). Every amplitude lies in $\mathbb{Q}(i, \sqrt{2})$. With exact arithmetic in $\mathbb{Q}(\sqrt{b})$ from the AFP [26], matrices as arrays, and index formulas for the tensor products, Isabelle's value command runs the eight gates in a few seconds and prints the nine states. Three of them, as $|\text{clock}\rangle|\text{system}\rangle|\text{ancilla}\rangle$:

$$\begin{aligned}
\psi_4 &= \tfrac{1}{2}|1\rangle(|0\rangle - |1\rangle)|0\rangle + \tfrac{1}{2}|3\rangle(|0\rangle + |1\rangle)|0\rangle, \\
\psi_5 &= \tfrac{1}{2}|1\rangle(|0\rangle - |1\rangle)|1\rangle + |3\rangle(|0\rangle + |1\rangle)\big(\tfrac{\sqrt{2}}{3}|0\rangle + \tfrac{1}{6}|1\rangle\big), \\
\psi_8 &= |0\rangle\Big(\tfrac{\sqrt{2}}{3}(|0\rangle + |1\rangle)|0\rangle + \big(\tfrac{2}{3}|0\rangle - \tfrac{1}{3}|1\rangle\big)|1\rangle\Big).
\end{aligned}$$

After phase estimation the clock holds the eigenvalue of each component of b; the rotation sends the $\lambda = 1$ part to ancilla 1 entirely and the $\lambda = 3$ part with amplitude $1/3$; after uncomputation the ancilla-1 branch is $A^{-1}b = (\frac{2}{3}, -\frac{1}{3})$, read with probability $\frac{5}{9}$.

The printed states are theorems. The gate list is the instance of hhl_gates, and its i-th prefix produces hhl_states ! i (Listing 12), so the run is an instance of hhl_steps; demo_output states ψ_8. Theorem 6 specialises to this program with $p = \frac{5}{9}$ and $|t\rangle = |0\rangle \otimes (2, -1)/\sqrt{5} \otimes |1\rangle$ (demo_correct, demo_success). The

```
theorem demo_gates_eq:
  "hhl_gates demo_A (1_m 2) (pi / 4) 3 1 = demo_gates"
theorem demo_trajectory:
  "i ≤ 8 ⟹ run_gates (unit_vec 32 0) (take i demo_gates)
                = hhl_states demo_A (unit_vec 2 0) (pi / 4) 3 1 ! i"
value [code] "demo_trace"
```

Listing 12. The example run: the gate list is the instance, each prefix gives the trajectory's state, and value prints the states

code equations are proved, so value evaluates the verified definitions; only the evaluation itself is trusted to the code generator, and no theorem depends on it. The example is a separate session, as [26] replaces the code setup of the reals.

4.5 Other Systems

For an invertible non-Hermitian A, the program runs on the Hermitian dilation $\tilde{A} = \left(\begin{smallmatrix} 0 & A \\ A^\dagger & 0 \end{smallmatrix}\right)$, and $\tilde{A}^{-1}$ maps $b \oplus 0$ to $0 \oplus x$ (herm_embed_inverse). A preconditioned system $BAx = Bb$ is run in the same way. On success the system register holds $0 \oplus x/\|x\|$ for the solution of the original $Ax = b$, and the success probability is at least $(C/s)^2$ when $\|BAv\| \leq s\|v\|$ (hhl_elem_precond_correct, hhl_elem_precond_bound). For a rectangular $A \in \mathbb{C}^{M\times N}$, the pseudo-inverse of the dilation maps $b \oplus 0$ to $0 \oplus x$ with $A^\dagger Ax = A^\dagger b$ and x in the range of $A^\dagger$. So x is the minimum-norm solution when $Ax = b$ is solvable, and a least-squares solution otherwise (pinv_solution, normal_eq_least_squares). The proof uses $Jg(H)J = g(-H)$ for the parity J, and it is here that $1/0 = 0$, which makes herm_inv the pseudo-inverse, pays off.

5 Inexact HHL: the Paper's Error Analysis

Section 4 assumed that every eigenvalue lies on the phase-estimation grid. In general the eigenvalues of A lie anywhere in a spectral window, e^{iAt_0} is available only approximately, and the success probability must be amplified. This section verifies this inexact case. It follows the paper's analysis [14, App. A] at the level of the algorithm and ends with the inexact counterparts of the triples of Section 4 (Section 5.4, Table 2).

5.1 Inexact Phase Estimation and the Sine Window

If λ is not a grid value, phase estimation leaves the clock in a superposition $\sum_j \alpha_j|j\rangle$, the rotation acts on branch j with angle C/λ_j, and uncomputation is inexact. We write states as register sums $\sum_j |j\rangle \otimes f_j$ (reg_sum). Block operators act branch by branch and branches are orthogonal, which gives an exact identity

for an eigenvector v (hhl_approx_error_real, the qubit-flag case of flag_error, which holds for any register state and flag gates):

$$\left\| \text{out} - u \otimes v \otimes R(c)|0\rangle \right\|^2 = \|v\|^2 \sum_j |\alpha_j|^2 \, \|R(c_j)|0\rangle - R(c)|0\rangle\|^2,$$

where $c_j = C/\lambda_j$ and $c = C/\lambda$. For grid values below C the coefficient c_j exceeds 1 and $R(c_j)$ is not unitary, so the physical circuit clamps it to $[-1, 1]$ (hhl_circuit_clamped). The error vectors of distinct eigenvectors are orthogonal, so the bound for eigenvectors extends to every b with no loss in the dimension. With the uniform clock state, the amplitudes decay only like $|\alpha_j| \le 1/(2N|\delta_j|)$, where $\delta_j = \varphi - j/N$, and the squared error is $O(1/N)$ (hhl_clamped_bound). Precision ε would then need $N \sim 1/\varepsilon^2$. The paper prepares the clock in the sine window $\psi_\tau = \sqrt{2/N}\,\sin(\pi(\tau + \frac{1}{2})/N)$ instead, whose amplitudes decay like δ^{-2}. From a closed form of the window sum we prove $|\alpha_j|^2 \le \pi^2/(2N^4\delta_j^4)$ for $1/N \le |\delta_j| \le \frac{1}{2}$ (win_amp_tail). This gives the following theorem.

Theorem 8 (window register). *Let A be Hermitian, let its spectrum lie in the interval $[\lambda_{\min}, \pi/(2t_0)]$, and let $0 < C$, $0 < \theta < 1$ and $2C/\theta \le \lambda_{\min}$. Then for every b, the clamped circuit with the window register satisfies*

$$\|\text{out} - \psi \otimes w\|^2 \le \left(\frac{K_1}{N^2} + \frac{K_2}{N^3}\right)\|b\|^2,$$

where w is the exact output of Theorem 5, $K_1 = 8\pi^2(2+\pi^2)\theta^4/(t_0^2C^2(1-\theta^2))$ and $K_2 = 512\pi^6/(t_0^4\lambda_{\min}^4)$. Hence $N \ge Q/\varepsilon$ gives error at most $\varepsilon\|b\|$, for an explicit Q.

```
theorem hhl_window_bound:
  assumes A: "A ∈ carrier_mat n n" "hermitian A" and t0: "0 < t0"
      and N: "2 ≤ N"
      and C: "0 < C" and th: "0 < θ" "θ < 1" and lmin: "2 * C / θ
          ≤ lmin"
      and spec: "⋀l. l ∈ herm_spectrum A ⟹ lmin ≤ l ∧ t0 * l ≤ pi
          / 2"
      and b: "dim_vec b = n"
  shows "Re ⟨Δ|Δ⟩ ≤ (8 * pi² * (2 + pi²) * θ ^ 4 / ((real N)² * t0² *
      C² * (1 - θ²))
                      + 512 * pi ^ 6 / ((real N) ^ 3 * t0 ^ 4 *
                          lmin ^ 4)) * Re ⟨b|b⟩"
  (* Δ = hhl_circuit_clamped A t0 N C *v (win_state N ⊗ b ⊗ |0⟩) -
      win_state N ⊗ hhl_out A C b *)
```

Listing 13. Theorem 8 (abridged: Δ is written out in the source)

On branches close to the eigenvalue the distance is $O(\delta_j^2)$, so each term is at most $K\,w(N\varphi - j)/N^2$ for a weight w with $\sum_j w(N\varphi - j) \le 4 + 2\pi^2$. Clamped and negative branches have $|\delta_j| \ge \varphi/2$ and contribute $O(1/N^3)$ in total.

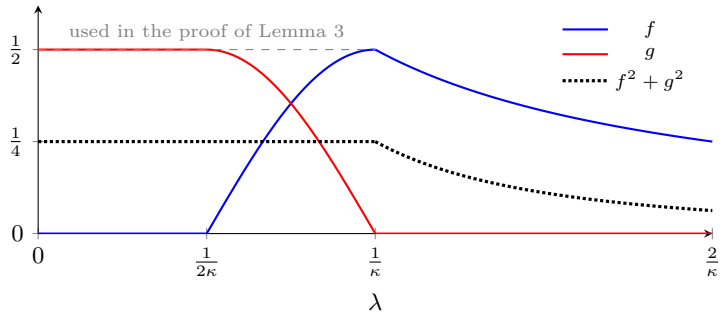


Fig. 4. The filter functions of the HHL paper for $\kappa = 2$. On $[\frac{1}{2\kappa}, \frac{1}{\kappa})$ the point (f, g) moves on a circle of radius $\frac{1}{2}$ with angular speed $\pi\kappa$. So $|h(\lambda)\rangle$ moves with speed exactly $\frac{\pi}{2}\kappa$ there (Lemma 2), $f^2 + g^2 = \frac{1}{4}$ rather than the $\frac{1}{2}$ used in the paper's proof of Lemma 3, and the constant of Lemma 3 is π^2.

5.2 Filter Functions and Theorem 1 of the Paper

The paper's appendix replaces the ancilla by a three-level flag register. The state $|h(\lambda)\rangle = \sqrt{1 - f^2 - g^2}\,|nothing\rangle + f|well\rangle + g|ill\rangle$ is built from two filter functions (Fig. 4). The well-conditioned part $f = 1/(2\kappa\lambda)$ for $\lambda \geq 1/\kappa$ inverts the matrix, and g flags the ill-conditioned eigenvalues below $1/(2\kappa)$. Lemma 2 of the paper states that $\lambda \mapsto |h(\lambda)\rangle$ is $\frac{\pi}{2}\kappa$-Lipschitz, and we prove it with that constant (hflag_lipschitz). Lemma 3 is a relative version:

$$|f(\lambda) - f(\tilde{\lambda})|^2 + |g(\lambda) - g(\tilde{\lambda})|^2 \;\leq\; c\,\kappa^2(\lambda - \tilde{\lambda})^2\big(f(\lambda)^2 + g(\lambda)^2\big),$$

stated with $c = \pi^2/2$. Its proof uses $f^2 + g^2 = \frac{1}{2}$ on the middle region $[\frac{1}{2\kappa}, \frac{1}{\kappa})$, but there $f^2 + g^2 = \frac{1}{4}$ (Fig. 4). The lemma is false with $c = \pi^2/2$ and true with π^2, and π^2 cannot be improved (Listing 14).

The counterexample is $\lambda = \frac{1}{2\kappa}$, $\tilde{\lambda} = \frac{1}{\kappa}$, where the two sides are $\frac{1}{2}$ and $\pi^2/32$. Sharpness takes both points in the middle region, where the left side is $\sin^2(\pi\kappa(\lambda - \tilde{\lambda})/2)$, and uses $\sin w \geq w - w^3/6$. The paper uses Lemma 3 for the two error terms of the post-selected output, (A13)–(A17), and states Theorem 1 only up to $O(\kappa/t_0)$, so the corrected constant does not change that statement. With the corrected lemma, the window register and the wrapped distances of the grid values, all three parts of Theorem 1 of the paper hold for every b with explicit constants. For $t = Nt_0$ the total evolution time, $\|(\tilde{U} - U)b\| \leq 3\pi^2\sqrt{4 + 2\pi^2}\,\kappa\|b\|/t$, and the states post-selected on $\{well, ill\}$, or on $well$ when b lies in the well-conditioned subspace, are within $12\pi^2\sqrt{4 + 2\pi^2}\,\kappa/t$ of the ideal ones (flag_bound, flag_post_normalized, flag_well_normalized).

5.3 Oracles, Amplification and Run Time

The circuit uses e^{iAt_0} only through controlled powers. We model it in a small language of fixed gates, controlled calls to an oracle V, and sequencing (qcirc),

```
definition filt_f :: "real ⇒ real ⇒ real" where
  "filt_f κ x = (if 1 / κ ≤ x then 1 / (2 * κ * x)
                 else if 1 / (2 * κ) ≤ x then sin (pi / 2 * (2 *
                     κ * x - 1)) / 2 else 0)"
definition filt_g :: "real ⇒ real ⇒ real" where
  "filt_g κ x = (if 1 / κ ≤ x then 0
                 else if 1 / (2 * κ) ≤ x then cos (pi / 2 * (2 *
                     κ * x - 1)) / 2 else 1 / 2)"
theorem lemma3:
  "(filt_f κ a - filt_f κ b)^2 + (filt_g κ a - filt_g κ b)^2
     ≤ pi^2 * κ^2 * (a - b)^2 * ((filt_f κ a)^2 + (filt_g κ a)^2)"
theorem lemma3_paper_constant:
  "pi^2 / 2 * κ^2 * (1 / (2 * κ) - 1 / κ)^2 * ((filt_f κ (1 / (2 *
      κ)))^2 + (filt_g κ (1 / (2 * κ)))^2)
   < (filt_f κ (1 / (2 * κ)) - filt_f κ (1 / κ))^2 + (filt_g κ (1 /
       (2 * κ)) - filt_g κ (1 / κ))^2"
theorem lemma3_sharp:
  assumes c: "c < pi^2"
  shows "∃a b. c * κ^2 * (a - b)^2 * ((filt_f κ a)^2 + (filt_g κ a)^2)
                < (filt_f κ a - filt_f κ b)^2 + (filt_g κ a -
                    filt_g κ b)^2"
```

Listing 14. The filter functions, Lemma 3 with the corrected constant, the counterexample to the paper's constant, and sharpness (for fixed $\kappa > 0$)

with a matrix semantics (sem) and a call count (calls). HHL makes $2(N-1)$ calls, and replacing the oracle by any unitary V with $\|Vv - e^{iAt_0}v\| \le \eta\|v\|$ moves the output by at most $2(N-1)\eta$, because each call adds at most η (hhl_sim_robust). Post-selection is stable: if the output is within δ of the exact one, the post-selected state is within $2\delta/(C\|A^{-1}b\|)$ of $\psi \otimes A^{-1}b/\|A^{-1}b\| \otimes |1\rangle$ (hhl_readout). Amplitude amplification is proved in the plane spanned by the good and bad components (Fig. 5). As a circuit, each round uses the HHL circuit and its inverse once.

The paper states its run time in a normalisation where the spectrum lies in $[1/\kappa, 1]$. In that normalisation the components combine as follows.

Theorem 9 (run time). *Let the spectrum of A lie in $[1/\kappa, 1]$, let $t_0 \le \pi/2$, $\varepsilon\kappa \le 1$ and $Nt_0 \ge 12\pi^2\sqrt{4+2\pi^2}\,\kappa/\varepsilon$, and let the flag gates prepare $|h(\tilde{\lambda}_k)\rangle$. Then the post-selected well-conditioned output is within ε of $A^{-1}b/\|A^{-1}b\|$, its amplitude is at least $1/(4\kappa)$, and at most $\pi\kappa$ rounds of amplitude amplification, each with $2(N-1)$ oracle calls, succeed with probability at least $1 - \|y\|^2$, where y is the well-flagged part of one run.*




Fig. 5. Amplitude amplification. The Grover iterate $G = (2|\psi\rangle\langle\psi| - I)(I - 2P)$ rotates the plane of the good component $P\psi$ and the bad component by 2θ, where $\sin\theta = \|P\psi\|$. After k rounds the good amplitude is $\sin((2k+1)\theta)$: $PG^k\psi = \frac{\sin((2k+1)\theta)}{\sin\theta} P\psi$ (amplitude_amplification).

```
theorem hhl_paper_runtime:
  assumes ... "⋀l. l ∈ herm_spectrum A ⟹ 1 / κ ≤ l ∧ l ≤ 1"
      and ... "0 < ε" "ε * κ ≤ 1" and "12 * pi² * sqrt (4 + 2 *
          pi²) * κ / ε ≤ real N * t0"
  defines "out ≡ sem N (n * 3) (evolution A t0 ⊗ 1_m 3)
      (flag_full_prog N n G Prep) *_v unit_vec (N * (n * 3)) 0"
  defines "y ≡ pflag 3 (λc. c = 1) out" and "x ≡ herm_inv A *_v b"
  shows "‖complex_of_real (1 / ‖y‖) ·_v y - tensor_vec (win_state
      N)
            (tensor_vec (complex_of_real (1 / ‖x‖) ·_v x)
                (unit_vec 3 1))‖ ≤ ε"
    and "1 / (4 * κ) ≤ ‖y‖"
    and "‖y‖ < 1 ⟹ ∃k. 1 - ‖y‖² ≤ ‖pflag 3 (λc. c = 1) (sem
        ... (aa_prog ... k) ...)‖²
           ∧ calls (aa_prog (N * (n * 3)) 3 (λc. c = 1)
               (flag_full_prog N n G Prep) k) = (2 * k + 1) * (2 *
               (N - 1))
           ∧ real k ≤ pi * κ"
```

Listing 15. Theorem 9 (hypotheses abridged; out is the output of the flag circuit and y its well-flagged part)

Each round runs the circuit and its inverse, so the total simulated time is $(2k+1)\cdot 2(N-1)t_0 = O(\kappa^2/\varepsilon)$, and the state preparation is used $O(\kappa)$ times. The number of rounds depends on the unknown success amplitude. Following the paper, we use the averaging lemma of Brassard, Høyer, Mosca and Tapp [7]. For k uniform below $M \geq 1/\sin 2\theta$, the mean of $\sin^2((2k+1)\theta)$ is at least $\frac{1}{4}$ (bhmt_quarter). Stages with k uniform below $1, 2, 4, \ldots$, stopped at the first success, therefore succeed with probability at least $\frac{1}{4}$ in fewer than $8\sqrt{2}\,\kappa$ rounds (doubling_schedule_kappa).

Table 2. HHL as programs: the triples of the exact case (Section 4) and their inexact counterparts (this section). In the exact column $p = C^2\|A^{-1}b\|^2$ and the clock of $|t\rangle$ is $|0\rangle$; in the inexact column e is as in Theorem 10, the clock of $|t\rangle$ is the window state, and y is the post-selected part of one run.

	Exact	Inexact
One run	$\{p\,I\}\,S\,\{P_1\}$ and $\{I\}\,S\,\{P_0 + \|t\rangle\langle t|\}$	$\{(Ct_0/\pi)^2(1-e^2)\,I\}\,S\,\{|t\rangle\langle t|\}$
Repeat until success	$\{I\}\,S\,\{|t\rangle\langle t|\}$, $1/p$ rounds on average	$\{(1-e^2)\,I\}\,S\,\{|t\rangle\langle t|\}$
Amplified	–	$\{(1-\|y\|^2)(1-e^2)\,I\}\,S\,\{|t\rangle\langle t|\}$, at most $\pi^2/(4Ct_0)$ rounds
Filter functions	–	loop $\{(1-\varepsilon^2)\,I\}$; amplified, at most $\pi\kappa$ rounds
Theorems	hhl_success_total, hhl_correct_total, hhl_rus_total	hhl_apx_program, hhl_apx_rus, hhl_apx_amplified, hhl_flag_rus, hhl_flag_amplified

5.4 Inexact HHL as a Program

The circuits of this section become gate lists with the same semantics (qgates_sem) and run as programs. The post-selected state is now only close to the target, so the triples of Theorems 6 and 7, which assert the target exactly, become fidelity triples, the last shape of Table 1. For a program that initialises, runs a circuit with output ψ and measures with M, where $|t\rangle$ lies in the range of M_1, we prove the triple $\models_t \{|\langle t|\psi\rangle|^2 I\}$ *prog* $\{|t\rangle\langle t|\}$. For the repeat-until-success loop we prove the precondition $|\langle t|\psi\rangle|^2/\|M_1\psi\|^2$ (hoare_prog_overlap, hoare_rus_overlap). If the post-selected state is within e of $|t\rangle$, the fidelity is at least $1-e^2$.

Theorem 10 (inexact HHL as programs). *Assume the hypotheses of Theorem 8 with $\|b\| = 1$ and $N \geq Q/\varepsilon$, a unitary oracle V with $\|Vv - e^{iAt_0}v\| \leq \eta\|v\|$ and $\varepsilon + 2(N-1)\eta \leq Ct_0/\pi$, and a unitary that prepares $\psi\otimes b\otimes|0\rangle$, where ψ is the window state. Let $e = 2(\varepsilon+2(N-1)\eta)/(C\|A^{-1}b\|)$ and $|t\rangle = \psi\otimes A^{-1}b/\|A^{-1}b\|\otimes|1\rangle$. Then one run satisfies $\models_t \{(Ct_0/\pi)^2(1-e^2)\,I\}$ prog $\{|t\rangle\langle t|\}$, and the repeat-until-success loop satisfies $\models_t \{(1-e^2)\,I\}$ rus $\{|t\rangle\langle t|\}$.*

With e from Theorem 8 and the oracle bound, these are hhl_apx_program and hhl_apx_rus. Amplitude amplification as a program needs at most $\pi^2/(4Ct_0)$ rounds (hhl_apx_amplified). The filtered version of Theorem 9 gives $\{(1-\varepsilon^2)\,I\}$ for the loop, and amplitude amplification as a program needs at most $\pi\kappa$ rounds (hhl_flag_rus, hhl_flag_amplified). Table 2 puts the exact and the inexact triples side by side.

```
abbreviation (input) "apx_K ≡ N * (n * 2)"
abbreviation (input) "apx_O ≡ V ⊗ 1_m 2"
abbreviation (input) "apx_x ≡ herm_inv A *_v b"
abbreviation (input) "apx_t ≡ tensor_vec (win_state N) (tensor_vec
    (complex_of_real (1 / ‖apx_x‖) ·_v apx_x) (unit_vec 2 1))"
abbreviation (input) "apx_e ≡ 2 * (ε + 2 * real (N - 1) * η) / (C
    * ‖apx_x‖)"
theorem hhl_apx_rus:
  "state_sig.hoare_total_correct [N, n, 2] (complex_of_real (1 -
     apx_e^2) ·_m 1_m apx_K)
    (rus_meas apx_K (anc_proj apx_K) (qgates N (n * 2) apx_O
        (hhl_full_prog A t0 N C Prep))) (outer_prod apx_t apx_t)"
```

Listing 16. The repeat-until-success loop in the paper's regime (inside a context with the hypotheses of Theorem 8, an oracle V that is η-close to e^{iAt_0} and a preparation Prep of the window state)

6 Down to Elementary Gates

The programs of Sections 4 and 5 use large gates: $H^{\otimes k}$, the controlled powers $\Lambda(U)$, F_N, the rotation stage, the preparations of $|b\rangle$ and of the clock, and the oracle e^{iAt_0}. A gate is *elementary* if it is a one- or two-qubit unitary acting on adjacent wires, $I_a \otimes G \otimes I_b$ with G a 2×2 or 4×4 unitary (Listing 17). This section replaces every large gate by elementary ones. Each refinement proves that the product of the new gates equals the old gate, so every triple carries over (Section 2).

6.1 The Gate-Level Circuit

The Hadamard layer is k single-qubit Hadamards. The controlled powers factor over the clock bits, $\Lambda(U) = \prod_j C_j(U^{2^j})$, where C_j is controlled by bit j of the clock (ctrl_pow_qubits). Equivalently, they use $2^k - 1$ singly controlled copies of U (ctrl_pow_queries). The Fourier transform is the AFP's gate-level circuit, flattened into Hadamards, controlled phase rotations and swaps (qft_circuit). It has $(k^3 + 2k)/3$ gates, which is cubic because its controlled rotations are routed through nearest-neighbour swaps. The resulting circuit for HHL has $(2k^3 + 16k + 6)/3$ gates (length_hhl_elem_gates), and every gate is elementary except the oracle calls $C_j(U^{\pm 2^j})$, the preparation U_b and the rotation stage (hhl_elem_gate_kinds).

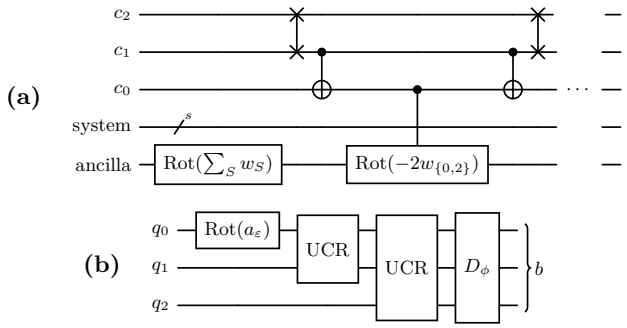


Fig. 6. (a) One block of the uniformly controlled rotation for $k = 3$ and $S = \{0, 2\}$: the SWAP and CNOT put $c_0 \oplus c_2$ into c_0, a rotation of the ancilla controlled by c_0 follows, and the chain is undone. The ancilla rotation controlled by c_0 crosses the system register, and is routed by adjacent swaps. (b) State preparation on three qubits. Level j rotates qubit j by an angle that depends on the qubits before it, $a_c = \arcsin(\|b_{c1}\|/\|b_c\|)$ for the blocks b_c of b indexed by the prefix c, as a uniformly controlled rotation; a diagonal unitary D_ϕ then sets the phases.

```
definition elementary :: "nat ⇒ complex mat ⇒ bool" where
  "elementary K U ⟷ (∃a b q G. q ∈ {1, 2} ∧ G ∈ carrier_mat (2 ^
      q) (2 ^ q) ∧ unitary G ∧ 0 < a ∧ 0 < b ∧
     K = a * (2 ^ q * b) ∧ U = 1_m a ⊗ (G ⊗ 1_m b))"
theorem qft_circuit:
  shows "circuit_mat (2 ^ n) (qft_circuit n) = fourier (2 ^ n)"
    and "U ∈ set (qft_circuit n) ⟹ elementary (2 ^ n) U"
theorem length_hhl_elem_gates: "3 * length (hhl_elem_gates A Ub t0
    k C) = 2 * k ^ 3 + 16 * k + 6"
```

Listing 17. Elementary gates, the Fourier circuit, and the gate count

6.2 The Rotation as a Uniformly Controlled Rotation

The rotation stage $\sum_c |c\rangle\langle c| \otimes I \otimes \mathrm{Rot}(\theta_c)$, with $\theta_c = \arcsin(C/\lambda_c)$ and $\mathrm{Rot}(a)$ the real rotation by a, applies a different angle for each of the 2^k clock values. Write the angles in the Walsh–Hadamard basis, $\theta_c = \sum_{S \subseteq \{0,\ldots,k-1\}} w_S (-1)^{\pi_S(c)}$, where $\pi_S(c)$ is the parity of the bits of c in S and $w_S = 2^{-k} \sum_{c'} \theta_{c'} (-1)^{\pi_S(c')}$ (walsh_inversion). Then the stage is one rotation of the ancilla by $\sum_S w_S$, followed by one block per non-empty S. A block computes $\pi_S(c)$ into the last clock qubit with a chain of nearest-neighbour CNOT and SWAP gates, rotates the ancilla by $-2w_S$ controlled by that qubit, and uncomputes the chain (Fig. 6a, ucr_circuit). For a system register of s qubits, the controlled rotation is moved next to the clock by s adjacent swaps (route_cv0).

```
theorem ucr_circuit:
  assumes n0: "0 < n"
  shows "circuit_mat (2 ^ k * (n * 2)) (ucr_gates k n θ) =
      ctrl_blocks (2 ^ k) (n * 2) (λc. 1_m n ⊗ Rot (θ c))"
theorem ucr_gate_kinds:
  assumes U: "U ∈ set (ucr_gates k n θ)" and n0: "0 < n"
  shows "elementary (2 ^ k * (n * 2)) U ∨ (∃a. U = cv0 k n (Rot
      a))"
```

Listing 18. The rotation stage as a uniformly controlled rotation

6.3 State Preparation

A state with non-negative amplitudes a on k qubits is prepared by k levels of uniformly controlled rotations, the construction of Grover and Rudolph [12] and Möttönen et al. [21]. Level j rotates qubit j by the angle $\arcsin(\|a_{c1}\|/\|a_c\|)$ determined by the block norms (cascade_prepares, state_prep). The sine window is one instance (window_prep). For a complex b, the magnitudes are prepared first and the phases are set by a diagonal unitary. A diagonal unitary on $k+1$ qubits splits into a diagonal unitary on k qubits, carrying the means of the phases of each pair, and a uniformly controlled rotation conjugated by a fixed one-qubit gate, carrying their differences (diag_gates_circuit). This yields the following theorem.

```
theorem bprep:
  assumes s: "1 ≤ s" and b: "dim_vec b = 2 ^ s" "‖b‖ = 1"
  shows "circuit_mat (2 ^ s) (bprep_gates s b) *_v unit_vec (2 ^ s)
      0 = b"
    and "⋀U. U ∈ set (bprep_gates s b) ⟹ elementary (2 ^ s) U"
    and "circuit_mat (2 ^ s) (bprep_gates s b) ∈ carrier_mat (2 ^
      s) (2 ^ s)"
    and "unitary (circuit_mat (2 ^ s) (bprep_gates s b))"
```

Listing 19. Every normalised $|b\rangle$ is prepared by elementary gates

6.4 Every Gate Elementary

For $n = 2^s$, the refinements combine into the program hhl_elementary: it satisfies the three triples of Theorems 6 and 7, and every gate is elementary or an oracle call $C_j(U^{\pm 2^j})$. The same holds for the paper-regime programs of Section 5.4 (hhl_apx_elementary), where the oracle is the approximate evolution V. The oracle calls themselves can be compiled. By the spectral theorem for normal matrices (taken from QHLProver), every unitary is $U = \prod_k (I + (\lambda_k - 1) p_k p_k^\dagger)$ for an orthonormal eigenbasis (p_k). Each factor is $Q_k D_k Q_k^\dagger$, where Q_k is the preparation circuit of p_k and D_k multiplies $|0\rangle$ by the phase λ_k. This gives exact universality, and hence HHL programs in which every gate is elementary.

```
theorem exact_universality:
  assumes U: "U ∈ carrier_mat (2 ^ m) (2 ^ m)" "unitary U" and m:
      "1 ≤ m"
  shows "∃Gs. (∀G ∈ set Gs. elementary (2 ^ m) G) ∧ circuit_mat (2
      ^ m) Gs = U"
theorem hhl_compiled:
  assumes ...
  defines "K ≡ 2 ^ k * (2 ^ s * 2)"
  shows "∃Gs. (∀G ∈ set Gs. elementary K G)
     ∧ state_sig.hoare_total_correct [2 ^ k, 2 ^ s, 2]
         (complex_of_real (C^2 * ‖herm_inv A *v b‖^2) ·m 1m K)
           (hhl_prog K Gs) (anc_proj K 1)
     ∧ state_sig.hoare_total_correct [2 ^ k, 2 ^ s, 2] (1m K)
         (hhl_prog K Gs)
           (anc_proj K 0 + outer_prod (hhl_target A k b)
               (hhl_target A k b))
     ∧ (C ≠ 0 ⟶ state_sig.hoare_total_correct [2 ^ k, 2 ^ s, 2]
         (1m K) (hhl_rus_prog K Gs)
           (outer_prod (hhl_target A k b) (hhl_target A k b)))"
```

Listing 20. Exact universality, and HHL with every gate elementary (the triples are those of Listings 9 and 11; hypotheses as there, with $n = 2^s$ and $\|b\| = 1$)

Universality comes with no useful bound on the number of gates, so for cost statements the oracle calls remain the unit of measure. When A is sparse, a better circuit for the oracle exists.

6.5 Sparse Hamiltonian Simulation

The paper assumes s-sparse A and cites simulation results for e^{iAt} [3]. We formalise the first-order version of this construction in three steps.

Trotter. For Hermitian $H_1, \ldots, H_m$ with $\|H_j\| \le L$,

$$\left\| (e^{itH_1/r} \cdots e^{itH_m/r})^r - e^{it(H_1+\cdots+H_m)} \right\| \le 2(mLt)^2/r$$

(trotter, Listing 21). The proof stays in the functional calculus. $|e^{ix} - 1 - ix| \le x^2$ bounds each factor to first order, and the errors add along products and powers of unitaries.

Colouring. The graph of an s-sparse Hermitian A is edge-coloured greedily with $2s - 1$ colours. Each colour class is a matching, given by an involution q_c of the index set, so A is its diagonal plus $2s - 1$ Hermitian 1-sparse matrices whose entries are entries of A (sparse_split) [2,3].

The 1-sparse circuit. Each 1-sparse evolution is implemented exactly on $|x\rangle|y\rangle|b\rangle$ (Fig. 7). A colour oracle O_c writes the partner $q_c(x)$ into the second register. A comparator sorts the pair and records the order in b. An entry gate rotates b by

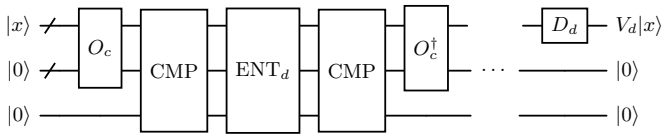


Fig. 7. One Trotter step for an s-sparse A with $d = t/r$. For each of the $2s-1$ colours c, five gates implement e^{idH_c} on $|x\rangle$ with both ancilla registers returned to $|0\rangle$, where H_c is the 1-sparse part of colour c. A diagonal phase gate $D_d = e^{id\,\mathrm{diag}\,A}$ follows, so the step acts on $|x\rangle$ as the product V_d of the $2s$ part evolutions. It has $5(2s-1)+1$ gates, and r steps use $r(6s-2)$ oracle queries.

$e^{id\left(\begin{smallmatrix}0 & a\\ \bar{a} & 0\end{smallmatrix}\right)}$ with $a = A_{xy}$. The comparator and $O_c^\dagger$ then uncompute (colour_circ_basis). The oracle is a hypothesis, any unitary with $|x\rangle|0\rangle|b\rangle \mapsto |x\rangle|q_c(x)\rangle|b\rangle$, and one exists for every colouring. A final gate applies the phases of the diagonal.

The circuit acts on inputs with both ancilla registers zero as a unitary V on the system (emb embeds the system). V is within $8(sLt)^2/r$ of e^{itA}, where L bounds the entries of A. Plugged into the error bound of Section 5, this gives the output error $(\varepsilon + 16(N-1)(sLt_0)^2/r)\|b\|$ (hhl_sparse_window_error).

Higher order. The cost the paper cites [3] rests on Suzuki's symmetric formulas $S_2(\delta) = e^{i\delta H_1/2}\cdots e^{i\delta H_m/2} e^{i\delta H_m/2}\cdots e^{i\delta H_1/2}$ and $S_{2k+2}(\delta) = S_{2k}(u\delta)^2\, S_{2k}((1-4u)\delta)\, S_{2k}(u\delta)^2$ with $u = 1/(4-4^{1/(2k+3)})$. A formula is a list F of factors $e^{ia\delta H_j}$, written as pairs (a, H_j) (suzuki, Listing 22), and S_{2k+2} has $|F| = 2\cdot 5^k m$ of them. We prove

$$\left\| S_{2k+2}(t/r)^r - e^{itH} \right\| \le r\,(2|F|+1)\,\frac{(\Lambda|t|/r)^{2k+3}}{(2k+3)!}\,e^{\Lambda|t|/r}$$

with $\Lambda = L\sum_{(a,H)\in F}|a| \ge mL$ (suzuki_error), so $r \sim |t|^{1+1/(2k+2)}$ steps suffice, against $r \sim t^2$ at first order. The proof works with the Taylor coefficients of products, which are convolutions of matrix sequences. A palindromic product that agrees with e^{tX} below an even degree also agrees in that degree, and the five-fold recursion cancels the next odd degree because $4u^q + (1-4u)^q = 0$; so S_{2k+2} agrees with e^{itH} up to degree $2k+2$ (suzuki_order). Both sides are then compared with their common Taylor polynomial: e^{itH} through $|e^z - \sum_{q\le P} z^q/q!| \le |z|^{P+1}e^{|z|}/(P+1)!$ on the spectrum, and the product through a bound on the coefficients of each factor. For s-sparse A the factors are the $2s$ parts of the colouring (sparse_suzuki), and the bound enters the HHL error bound as before (hhl_suzuki_window_error). These theorems are about products of part evolutions: the circuit of Fig. 7 realises the first-order product, a higher-order circuit would chain the same 1-sparse circuits with step lengths $a\delta$, and the reversible arithmetic inside the oracles is not formalised.

```
theorem trotter:
  assumes Hs: "⋀H. H ∈ set Hs ⟹ herm_bounded n L H" and r: "0 < r"
  shows "evolution_product n (t / real r) Hs ^m r
           ≈(2 * (real (length Hs) * L * t)^2 / real r) evolution (hamiltonian_sum
    n Hs) t"
theorem sparse_split:
  assumes A: "A ∈ carrier_mat n n" "hermitian A" and sp: "sparse n
      s A" and s: "1 ≤ s"
  shows "∃p. edge_cover n (2 * s - 1) p (edges n A) ∧
           length (sparse_parts n A (2 * s - 1) p) = 2 * s ∧
    hamiltonian_sum
              n (sparse_parts n A (2 * s - 1) p) = A"
theorem sparse_simulation_circuit:
  assumes A: "A ∈ carrier_mat n n" "hermitian A" and s: "1 ≤ s"
      and L: "0 ≤ L" and Lb: "⋀i j. i < n ⟹ j < n ⟹ cmod (A $$ (i,
          j)) ≤ L"
      and cov: "edge_cover n (2 * s - 1) p (edges n A)"
      and Os: "⋀c. c < 2 * s - 1 ⟹ colour_oracle n (p c) (Os c)"
          and r: "0 < r"
  shows "sg_run n (t / real r) A Os (sim_gates (2 * s - 1) r) *
      emb n = emb n * sim_mat n (t / real r) A (2 * s - 1) p r"
    and "sim_mat n (t / real r) A (2 * s - 1) p r ∈ carrier_mat n
        n"
    and "unitary (sim_mat n (t / real r) A (2 * s - 1) p r)"
    and "sim_mat n (t / real r) A (2 * s - 1) p r
        ≈(8 * (real s * L * t)^2 / real r) evolution A t"
    and "length (filter is_query (sim_gates (2 * s - 1) r)) = r *
        (6 * s - 2)"
```

Listing 21. Trotter, the colouring, and the sparse simulation circuit

```
fun suzuki :: "nat ⇒ complex Matrix.mat list ⇒ (real × complex
    Matrix.mat) list" where
  "suzuki 0 Hs = strang Hs"
| "suzuki (Suc k) Hs = concat (map (λc. map (λx. (c * fst x, snd x))
    (suzuki k Hs)) (suzuki_weights (2 * k + 3)))"
theorem suzuki_error:
  fixes k :: nat and t :: real
  assumes Hs: "∀H ∈ set Hs. herm_bounded n L H" and L: "0 ≤ L" and r:
    "0 < r"
  defines "F ≡ suzuki k Hs" and "q ≡ 2 * k + 3"
  shows "formula_product n (t / real r) F ^m r
           ≈real r * ((2 * real (length F) + 1) * (total_weight L F *
             |t| / real r) ^ q * exp (total_weight L F * |t| / real r) /
             fact q)
           evolution (hamiltonian_sum n Hs) t"
```

Listing 22. Suzuki's formulas and their error

Table 3. Errata in the HHL paper (arXiv:0811.3171v3). "Formal" names the theorem that refutes the claim or proves the correction.

Where	Claim	Correction	Formal
Lemma 3	$c = \pi^2/2$	false for every κ (at $\lambda = \frac{1}{2\kappa}$, $\bar{\lambda} = \frac{1}{\kappa}$); $c = \pi^2$ holds and is sharp	lemma3_paper_constant, lemma3, lemma3_sharp
Proof of Thm. 4	$m = \frac{2}{\delta}\log(2n)/\log\log n$ rounds suffice	too few: for $n_0 = 2^{64}$, $\delta = \frac{1}{2}$ it gives $m = 130/3$, and after $m \le 44$ rounds the bound on T_m still exceeds n_0; $m \ge \frac{2}{\delta}\ln(2n_0)$ suffices	paper_rounds_insufficient, corrected_rounds
(A34)	the dilation satisfies $\kappa^{-1}I \le A \le I$	impossible: its diagonal is zero	herm_embed_diag
(A37)	the first qubit of $\boldsymbol{y}$ decides acceptance	the top half of $\boldsymbol{y}$ is always 0; permuting the dilation fixes it	first_half_perm, red_first_qubit
Thm. 6(2)	precision $\varepsilon = 2^{-n-2}$	cannot separate counts C and $C+1$ once the clock factor ($\le \frac{1}{4}$) is included	paper_precision_insufficient
App. A5	$1/(3\varepsilon^2)$ samples	too few: $\varepsilon = \frac{1}{4}$, $p = \frac{1}{2}$ and 6 samples fail with probability $\frac{11}{16}$; $3/\varepsilon^2$ suffice	paper_sample_count_too_small, estimate_expectation
§IV	preconditioned system $(AB)c = Bb$	neither left nor right preconditioning: in a 2×2 example its unique solution gives no solution of $Ax = b$	paper_precondition_wrong
App. A5	undo gates $U^\dagger_{3T+1-t}$	must be $U^\dagger_{T+1-t}$	construction red_U, red_inverse
App. A5	$\kappa \le 2T$	$\kappa = \coth\frac{1}{2T} > 2T$ when $3T$ is even (not formalised); we prove $\kappa \le 2T+1$	red_A_bounds

7 What the Formalisation Found

The HHL paper is a carefully written letter with a long appendix, and its main claims survive mechanisation. Its details do not all survive. Table 3 lists the statements of the arXiv version [14] that are false as written, with the correction and its formal witness. Most errors are in the appendix on the optimality of the algorithm, which reduces quantum circuits to matrix inversion (Theorems 4–6). Each optimality theorem is formalised up to the external complexity-theoretic fact it cites (PSPACE-completeness of TQBF, BQP $\subseteq$ PSPACE, and the classical lower bounds for Simon's problem and parity). The search lower bound of Theorem 4(2) is imported from the AFP entry *Compressed Oracles*.

The last two rows are corrections built into the formal construction rather than refutations: the reduction is defined with the correct undo gates, and only the weaker bound $2T + 1$ is proved. The other rows are refuted by explicit counterexamples. Three observations are worth recording. First, none of the errors we found invalidates a main claim of the paper: those are stated with $O(\cdot)$ and survive with other constants. Second, the errors sit where a proof sketch compresses a computation, for instance an evaluation of $f^2 + g^2$, an index, or a number of rounds. Third, a recent re-derivation of the error analysis [17] remarks that the factor $\pi/2$ of Lemma 2 "is not correct for certain values of κ". With the paper's choice $\kappa' = 2\kappa$, which places the middle region at $[\frac{1}{2\kappa}, \frac{1}{\kappa})$, our proof

hflag_lipschitz shows that $\lambda \mapsto |h(\lambda)\rangle$ is $\frac{\pi}{2}\kappa$-Lipschitz for every $\kappa > 0$, so Lemma 2 is correct as stated. A machine-checked proof settles such disagreements.

The lecture notes of Section 8 also contain false statements, all found because a statement failed to be provable as written. The Day 29 "Hamming $[7, 1, 3]$" code has distance 2 and cannot correct one error (notes_hamming_not_correcting). The Day 32 claim that distinct one-qubit Pauli errors map the Shor code to orthogonal subspaces fails for $Z_1 \neq Z_2$, which agree on the code space (shor_notes_Z1_Z2; the notes correct it on Day 33). A reformulation of the Day 21 conjecture is false for $n = 2$, $d = 1$ (notes_form_i_false). Two Day 23 examples, a formula of Day 31 and Cholesky's reduction on Day 5 each need an extra hypothesis.

8 The Foundation: Paulsen's Lectures, Formalised

The HHL development builds on a formalisation of one complete set of lecture notes: Vern Paulsen's *Lectures on Quantum Computing and Completely Positive Maps* (Houston, 2011) [23]. The notes are an unedited transcription of 34 lectures in five parts: basic mathematics, an introduction to quantum computing, completely positive maps, entanglement, and error correction. Taking a course as the specification forces one to formalise the whole supporting theory rather than the shortest path to a headline theorem. It also gives an external measure of completeness.

Audit and document. The repository's audit lists every definition, theorem, proposition, corollary, example and remark of the notes with its formal counterpart. Of the 170 items, 9 are deliberately not formalised (overviews, history, classical asides). Of the remaining 161, 156 are formalised faithfully, 5 in a variant form, and none is missing. The variants are a different proof route (Choi's Theorem 3 through a Radon–Nikodym theorem for completely positive maps, and Arveson's extension theorem by cone separation), or a statement of the notes that needs a hypothesis or is false (Section 7). The HHL paper is audited in the same way, in 23 items. An Isabelle-generated document of 404 pages restates the notes lecture by lecture, with the formal statements in place of the informal proofs, and it is rebuilt and re-checked by every build.

Contents. Lectures 1–10 give the linear algebra and the postulates: Schur's theorem, the spectral theorem, four characterisations of positivity, Cholesky's reduction, tensor products, measurements and POVMs. Part VI imports exactly this part. Lectures 11–22 give density matrices, partial traces, and completely positive maps with Choi's theorem (Listing 23) and the Choi–Kraus representation. Lectures 23–28 give the extreme points of the unital and of the trace-preserving channels (Choi's Theorem 3), the Hahn–Banach theorem on matrix spaces, Arveson's extension theorem, and the separating-hyperplane theory of entanglement witnesses. Lectures 29–34 give classical and quantum codes, the Knill–Laflamme conditions in both directions, and Shor's nine-qubit code. One

```
fun kraus_of :: "nat ⇒ com ⇒ complex mat list" where
  "kraus_of d SKIP = [1_m d]"
| "kraus_of d (Utrans U) = [U]"
| "kraus_of d (c1 ;; c2) = kraus_compose (kraus_of d c2) (kraus_of d
    c1)"
| "kraus_of d (Measure n M Ss) = meas_kraus n M (map (kraus_of d) Ss)"
| "kraus_of d (While M c) = []"
theorem program_channel:
  assumes "well_com c" "while_free c"
  shows "cptp_kraus_rep d d (denote c) (kraus_of d c)"
```

Listing 24. Kraus operators of a loop-free program, and the program as a channel (in the locale of the registers, with d their dimension)

CPTP map corrects every single-qubit unitary error on each of the nine qubits (shor_code_theorem); the 2^9-dimensional space is never handled entrywise but as three blocks of three qubits.

```
theorem choi_theorem:
  fixes Φ :: "complex mat ⇒ complex mat"
  assumes linear: "⋀A B. A ∈ carrier_mat n n ⟹ B ∈ carrier_mat n n
      ⟹ Φ (A + B) = Φ A + Φ B"
      and smult: "⋀c A. A ∈ carrier_mat n n ⟹ Φ (c ·_m A) = c ·_m Φ A"
      and range: "∀A. A ∈ carrier_mat n n ⟶ Φ A ∈ carrier_mat d d"
      and npos: "n > 0" and dpos: "d > 0"
  shows "completely_positive n d Φ ⟷ psd (choi_matrix n d Φ)"
```

Listing 23. Choi's theorem (Lecture 19)

Programs are channels. The two halves of the development meet in one theorem. For a QHLProver program c without loops, kraus_of reads Kraus operators off the program text: a gate U gives U, a sequence gives the products BA (the composition kraus_compose of Lectures 32–33), and a measurement $\{M_k\}$ gives BM_k for every Kraus operator B of branch k (Listing 24). The meaning of c is the Kraus map of these operators, and they satisfy $\sum_i K_i^* K_i = I$ (denote_kraus, kraus_of_operators); by Choi's theorem the meaning is completely positive and trace preserving (program_cptp). The HHL program is an instance (hhl_program_channel). The theory is a separate session, since it loads both the notes and Part VI.

Two lessons. First, HOL functions are total, while a map $M_n \to M_d$ is constrained only on the carrier. The naive definition of an extreme point ("Φ is not the midpoint of two different channels") is therefore vacuous, since any channel agrees on the carrier with maps that differ from it elsewhere. Extremality has to be defined through disagreement on the carrier. Second, two places in the notes genuinely need topology: the compactness of the unital channels, and the separation of a point from the closed convex cone of separable matrices. For these

we wrap matrices of fixed dimension in a type, instantiate HOL-Analysis up to euclidean_space, and transport the statements back. The carrier-predicate world carries almost all of the development, and the typed world is used only where HOL-Analysis is applied.

An open problem. Lecture 21 asks whether every unital completely positive map $\Phi : M_n \to M_d$ is the average of n unital maps of Choi rank at most d. This is the strong Ruskai–Audenaert conjecture for the dual channel, which is open in general [16]. We state it formally (D21_2) and prove the cases with direct constructions. If the Kraus operators split into n groups that are orthogonal in a suitable sense, Fourier mixtures give the decomposition (fourier_split). This covers measurement maps and, via Horn's lemma, the case $d = 1$. Following Bacon, Smolin and Wolf, every unital map with $n = 2$ is such an average (ra_two): the off-diagonal block of the Choi matrix is $R_1 K R_2^\dagger$ for a contraction K, and $K = \frac{1}{2}(U_1 + U_2)$ for unitaries obtained from a singular value decomposition, which we build from the spectral theorem. A reformulation in the notes turned out to be false (Section 7).

Size. The formalisation of the notes has 50 theories with 51 101 lines and 1 551 results (lemmas, theorems, corollaries and propositions). Part VI has 35 theories with 23 062 lines and 1 188 results, five of which (the functional calculus and the product formulas) form a session that depends only on the AFP, plus an 80-line bridge to the AFP's quantum search bound in a separate session (Table 4).

9 Related Work

Verified HHL. Zhou, Yu and Ying introduced an applied quantum Hoare logic with projection predicates and rules for robustness, and used it for a pen-and-paper verification of HHL [36]. CoqQ [35] formalised that proof in Coq. Under the assumption that every $\lambda_j t_0/2\pi$ lies in $\{1, \ldots, N-1\}$, it proves $\models_p \{I\}$ *HHL* $\{|x\rangle\langle x|\}$ for the repeat-until-success program, in about 280 lines. U_b and the controlled rotation are built from partial specifications, and the controlled evolution is a built-in multiplexer. Wu, Deng and Xu [32] verify the same exact HHL, and Shor's algorithm, in a quantum Hoare logic with distribution formulas embedded in Coq. Our development is in Isabelle/HOL and differs in scope. It proves total correctness, including termination and the distribution of the number of rounds; it treats the regime of the paper's error analysis, with inexact eigenvalues, an approximate oracle, the filter functions and amplitude amplification; it compiles the programs to elementary gates and simulates sparse Hamiltonians; and it records the errata of Section 7.

Other verified quantum algorithms. In Coq, SQIR and its applications verify phase estimation, Grover's algorithm and others [15], and an end-to-end implementation of Shor's algorithm, including the reversible arithmetic of modular exponentiation [24]. In Why3, QBricks verifies phase estimation, Grover's algorithm and the order-finding part of Shor's algorithm [9]. Besides the $4/\pi^2$

bound, our phase-estimation results include the tail bound and the number of clock qubits of Nielsen and Chuang, stated as triples with exact weakest preconditions. A recent HOL Light development treats Grover's algorithm [25]. In Isabelle, Isabelle Marries Dirac formalises qubits, gates, teleportation, the no-cloning theorem and the Deutsch–Jozsa algorithm [6,5]. QHLProver verifies Grover's algorithm with the logic we use [18], and the AFP contains the quantum Fourier transform [20]. Unruh's libraries develop bounded operators, tensor products of Hilbert spaces and Kraus maps in infinite dimension [8,29,31]; they underlie his quantum relational Hoare logic [28] and the compressed-oracle technique, whose search lower bound [30] we import for Theorem 4(2) of the HHL paper. We also import Sylvester's criterion from the AFP [4].

Error analyses of HHL. Li and Phillips [17] re-derive the paper's error analysis by hand, with corrections of typos and with more detail on the amplitudes after phase estimation. Their remark on Lemma 2 is discussed in Section 7. The later literature improves the dependence on κ and ε [10]. Verifying those algorithms is future work.

10 Discussion

What is trusted. Beyond Isabelle's kernel, the statements depend on the definitions they use. Those of the AFP entries Jordan-Normal-Form, Isabelle Marries Dirac and QHLProver fix matrices, gates, programs, their semantics and the meaning of triples. Our own definitions are the ones shown in the listings: the grid values reg_eig, the functional calculus, the eight gates and the programs, the filter functions, the predicate elementary, and the colour oracle. A reader who accepts the listings and the AFP's semantics can check that the theorems say what this paper claims.

Assumptions and limitations. The preparation of $|b\rangle$ is a hypothesis ($U_b|0\rangle = b$) in Sections 4–5 and a circuit in Section 6. The colour oracles of the sparse simulation are hypotheses about their action on basis states, and the reversible arithmetic that would implement them is not formalised. Suzuki's higher-order formulas are verified for products of part evolutions; only the first-order product is verified as a circuit. Universality is exact but gives no gate count, and the routing of the controlled rotation assumes $n = 2^s$. Costs are stated as numbers of gates, oracle calls and rounds, not as membership in complexity classes. The optimality theorems are formalised up to the complexity-theoretic facts they cite.

Lessons. Four proof patterns carried most of the work. First, statements about every right-hand side are proved for eigenvectors and extended by the lemma that matrices agreeing on all eigenvectors are equal, so no sum over an eigenbasis appears. Second, register sums $\sum_j |j\rangle \otimes f_j$ make block-diagonal operators act branch by branch, which turns the error analysis into scalar estimates. Third,

Table 4. Size of the development (results are lemmas, theorems, corollaries and propositions).

Part	Theories	Lines	Results
Functional calculus, product formulas (own session)	5	2 775	185
Mathematics (phase estimation)	4	1 073	58
Algorithm (circuits, error analysis, rest of the paper)	13	10 141	476
Program (QHLProver programs and triples)	6	3 743	182
Circuit (elementary gates, simulation)	7	5 330	287
Part VI, HHL	35	23 062	1188
Bridge to the AFP search bound (separate session)	1	80	4
The example run of Section 4.4 (separate session)	1	313	34
Programs are channels (separate session)	1	206	9
Paulsen's lectures (the foundation)	50	51 101	1 551

every triple is proved for all gate lists with a given product, so each refinement towards elementary gates is a circuit identity with no new program reasoning. Fourth, the total correctness of repeat-until-success loops reduces to a geometric series once the body resets the state. On the side of the tools, an oracle audit (Thm_Deps.all_oracles) is meaningful only for builds with `quick_and_dirty = false`. With `quick_and_dirty = true`, Isabelle discharges internal goals of the fun and record packages by Skip_Proof.cheat_tac, and every theorem downstream of such a definition reports the oracle skip_proof, even in a development without a single `sorry`.

11 Conclusion

We have verified the HHL algorithm in Isabelle/HOL as programs of a quantum while-language, with quantum Hoare logic as the common language from the functional calculus up to elementary gates. Phase estimation, its core, is verified as a program with exact weakest preconditions, from which the textbook guarantees, including the clock size for a given precision and confidence, follow as triples. In the exact case the HHL program is totally correct: it succeeds with probability $C^2\|A^{-1}b\|^2$, it is exact on success, and its repeat-until-success loop terminates with probability one after $1/p$ expected rounds. In the inexact case, the regime of the paper's error analysis, the bounds of Theorem 1 and the run time hold with explicit constants, and the programs satisfy the corresponding fidelity triples. All of this persists down to circuits of one- and two-qubit gates, including the preparation of $|b\rangle$ and, for sparse A, the simulation of e^{iAt}. On the way, the formalisation corrected the constant of Lemma 3 and several statements of the paper's optimality proofs.

The development is also an argument for formalising a whole course before an algorithm. Paulsen's notes supplied the linear algebra and the positivity theory that HHL needs. Their later lectures supply the completely positive maps and

Choi–Kraus representations that are the semantics of quantum programs, and for programs without loops the two halves of the development now meet in one theorem: QHLProver's denotations are the channels of Lecture 19. Programs with loops, whose meaning is a limit, are the next step. Higher-order simulation circuits with verified arithmetic oracles, gate-count bounds for compilation, and the later linear-systems algorithms are further natural continuations.

Acknowledgements. The lecture notes were written by Vern Paulsen and transcribed by Brandon Lee. The formalisation was carried out with the assistance of AI coding agents, and all statements were checked by Isabelle.

References

1. Aaronson, S.: Read the fine print. Nature Physics **11**(4), 291–293 (2015)
2. Aharonov, D., Ta-Shma, A.: Adiabatic quantum state generation and statistical zero knowledge. In: 35th Annual ACM Symposium on Theory of Computing (STOC 2003). pp. 20–29. ACM (2003)
3. Berry, D.W., Ahokas, G., Cleve, R., Sanders, B.C.: Efficient quantum algorithms for simulating sparse Hamiltonians. Communications in Mathematical Physics **270**(2), 359–371 (2007)
4. Binder, S., Jiang, Z.: Two theorems on Hermitian matrices. Archive of Formal Proofs, `https://isa-afp.org/entries/Two_Hermitian_Results.html` (Nov 2024)
5. Bordg, A., Lachnitt, H., He, Y.: Isabelle marries Dirac: a library for quantum computation and quantum information. Archive of Formal Proofs, `https://isa-afp.org/entries/Isabelle_Marries_Dirac.html` (Nov 2020)
6. Bordg, A., Lachnitt, H., He, Y.: Certified quantum computation in Isabelle/HOL. Journal of Automated Reasoning **65**, 691–709 (2021). `https://doi.org/10.1007/s10817-020-09584-7`
7. Brassard, G., Høyer, P., Mosca, M., Tapp, A.: Quantum amplitude amplification and estimation. In: Quantum Computation and Information, Contemporary Mathematics, vol. 305, pp. 53–74. American Mathematical Society (2002)
8. Caballero, J.M.R., Unruh, D.: Complex bounded operators. Archive of Formal Proofs, `https://isa-afp.org/entries/Complex_Bounded_Operators.html` (Sep 2021)
9. Chareton, C., Bardin, S., Bobot, F., Perrelle, V., Valiron, B.: An automated deductive verification framework for circuit-building quantum programs. In: Programming Languages and Systems (ESOP 2021). LNCS, vol. 12648, pp. 148–177. Springer (2021)
10. Childs, A.M., Kothari, R., Somma, R.D.: Quantum algorithm for systems of linear equations with exponentially improved dependence on precision. SIAM Journal on Computing **46**(6), 1920–1950 (2017)
11. D'Hondt, E., Panangaden, P.: Quantum weakest preconditions. Mathematical Structures in Computer Science **16**(3), 429–451 (2006)
12. Grover, L., Rudolph, T.: Creating superpositions that correspond to efficiently integrable probability distributions. arXiv:quant-ph/0208112 (2002)
13. Harrow, A.W., Hassidim, A., Lloyd, S.: Quantum algorithm for linear systems of equations. Physical Review Letters **103**, 150502 (2009)

14. Harrow, A.W., Hassidim, A., Lloyd, S.: Quantum algorithm for solving linear systems of equations. arXiv:0811.3171v3 (2009)
15. Hietala, K., Rand, R., Hung, S.H., Li, L., Hicks, M.: Proving quantum programs correct. In: Interactive Theorem Proving (ITP 2021). LIPIcs, vol. 193, pp. 21:1–21:19 (2021)
16. Kumar, N., Wolf, M.M.: The Ruskai–Audenaert conjecture & equipartitions of positive operators. arXiv:2607.23066 (2026)
17. Li, X., Phillips, C.: Detailed error analysis of the HHL algorithm. arXiv:2401.17182 (2024)
18. Liu, J., Zhan, B., Wang, S., Ying, S., Liu, T., Li, Y., Ying, M., Zhan, N.: Formal verification of quantum algorithms using quantum Hoare logic. In: Computer Aided Verification (CAV 2019). LNCS, vol. 11562, pp. 187–207. Springer (2019). https://doi.org/10.1007/978-3-030-25543-5_12
19. Liu, J., Zhan, B., Wang, S., Ying, S., Liu, T., Li, Y., Ying, M., Zhan, N.: Quantum Hoare logic. Archive of Formal Proofs, https://isa-afp.org/entries/QHLProver.html (Mar 2019)
20. Manrique, P.: Quantum Fourier transform. Archive of Formal Proofs, https://isa-afp.org/entries/Quantum_Fourier_Transform.html (Jan 2025)
21. Möttönen, M., Vartiainen, J.J., Bergholm, V., Salomaa, M.M.: Transformation of quantum states using uniformly controlled rotations. Quantum Information and Computation **5**(6), 467–473 (2005)
22. Nielsen, M.A., Chuang, I.L.: Quantum Computation and Quantum Information. Cambridge University Press (2010)
23. Paulsen, V.: Lectures on quantum computing and completely positive maps (2011), lecture notes, University of Houston, Fall 2011; transcribed by Brandon Lee, December 16, 2011. Unpublished
24. Peng, Y., Hietala, K., Tao, R., Li, L., Rand, R., Hicks, M., Wu, X.: A formally certified end-to-end implementation of Shor's factorization algorithm. Proceedings of the National Academy of Sciences **120**(21), e2218775120 (2023)
25. Sun, H., Shi, Z., Chen, S., Wang, G., Li, X., Guan, Y., Zhang, Q., Shao, Z.: Formal modeling and verification of Grover's algorithm. arXiv:2601.02435 (2026)
26. Thiemann, R.: Implementing field extensions of the form $\mathbb{Q}[\sqrt{b}]$. Archive of Formal Proofs, https://isa-afp.org/entries/Real_Impl.html (2014)
27. Thiemann, R., Yamada, A.: Matrices, Jordan normal forms, and spectral radius theory. Archive of Formal Proofs, https://isa-afp.org/entries/Jordan_Normal_Form.html (Aug 2015)
28. Unruh, D.: Quantum relational Hoare logic. Proceedings of the ACM on Programming Languages **3**(POPL), 33:1–33:31 (2019)
29. Unruh, D.: The tensor product on Hilbert spaces. Archive of Formal Proofs, https://isa-afp.org/entries/Hilbert_Space_Tensor_Product.html (Sep 2024)
30. Unruh, D.: Compressed oracles. Archive of Formal Proofs, https://isa-afp.org/entries/Compressed_Oracles.html (Dec 2025)
31. Unruh, D.: Kraus maps. Archive of Formal Proofs, https://isa-afp.org/entries/Kraus_Maps.html (Jun 2025)
32. Wu, H., Deng, Y., Xu, M.: Local reasoning about probabilistic behaviour for classical–quantum programs. arXiv:2308.04741 (2023), VMCAI 2024
33. Ying, M.: Floyd–Hoare logic for quantum programs. ACM Transactions on Programming Languages and Systems **33**(6), 19:1–19:49 (2011)
34. Ying, M.: Foundations of Quantum Programming. Morgan Kaufmann (2016)

35. Zhou, L., Barthe, G., Strub, P.Y., Liu, J., Ying, M.: CoqQ: Foundational verification of quantum programs. Proceedings of the ACM on Programming Languages **7**(POPL), 833–865 (2023). https://doi.org/10.1145/3571222
36. Zhou, L., Yu, N., Ying, M.: An applied quantum Hoare logic. In: Programming Language Design and Implementation (PLDI 2019). pp. 1149–1162. ACM (2019). https://doi.org/10.1145/3314221.3314584

A The Theories of Part VI

Table 5. The theories of Part VI (sessions Hermitian_Functional_Calculus and HHL_Algorithm), by level, with their lines and results. The bridge HHL_Search_Bound (80 lines, 4 results) is a separate session because it imports the AFP entry *Compressed Oracles*; so is the example HHL_Demo (313 lines, 34 results), which imports *Real_Impl*.

Theory	Content	Lines	Results
Functional calculus and product formulas (session Hermitian_Functional_Calculus)			
Hermitian_Functional_Calculus	$g(A)$, e^{itA}, A^{-1}, vector norms	668	61
Matrix_Sums	entries of QHLProver's matrix sums	30	2
Trotter_Product_Formula	Lie–Trotter with explicit error	596	28
Suzuki_Order	order conditions, Suzuki's recursion	735	53
Suzuki_Error	Suzuki's formulas with explicit error	746	41
Mathematics			
Phase_Estimation	Fourier matrix, phase estimation, $4/\pi^2$	524	30
QPE_Precision	tail bound, number of clock qubits	341	17
QFT_Fourier	the AFP QFT circuit is F_{2^n}	104	4
QPE_Register	$H^{\otimes n}\|0\cdots0\rangle$ is uniform	104	7
Algorithm			
HHL	exact circuit, $h(A)\|b\rangle$, solution, $1/\kappa^2$, dilation	834	46
HHL_Trajectory	the eight gates and their states	594	29
HHL_Approximate	branches for any register and flag, clamping	1 156	54
HHL_Window	sine window, $N \sim 1/\varepsilon$	849	28
HHL_Simulation	oracle circuits, robustness	752	48
HHL_Complete	readout, amplitude amplification	881	46
HHL_Filter	filter functions, Lemmas 2–3	1 272	51
HHL_Filter_Bounds	Theorem 1 for every b	595	20
HHL_Runtime	(A32), BHMT averaging, run time	480	12
HHL_Reduction	circuits to matrix inversion	596	40
HHL_Rectangular	rectangular A, pseudo-inverse	351	16
HHL_Discussion	SWAP test, sampling, schedules	758	40
HHL_Optimality	Theorems 4–6 up to cited facts	1 023	46
Program			
QPE_Program	phase estimation as a program	364	20
HHL_Program	initialisation, programs, triples	1 269	71
HHL_Termination	repeat until success: total correctness	480	18
HHL_Paper_Program	the paper's regime as programs	839	28
HHL_Gate_Refinements	rotation split, window reflection	616	27
HHL_Preconditioned	preconditioned systems	175	18
Circuit			
HHL_Gates	elementary gates, QFT circuit, count	843	69
HHL_Uniform_Rotation	uniformly controlled rotation	1 067	63
HHL_State_Preparation	state preparation, window	778	29
HHL_All_Elementary	$\|b\rangle$, routing, exact universality	1 037	44
HHL_Sparse_Split	sparse A as $2s$ 1-sparse parts	447	18
HHL_Sparse_Circuit	the sparse simulation circuit	1 090	62
HHL_Suzuki	Suzuki's formulas in the HHL error bound	68	2