

# ggbeeswarm package usage example (version 0.5.0)

Erik Clarke [aut, cre], Scott Sherrill-Mix [aut]

---

## Abstract

This is a collection of examples of usage for the **ggbeeswarm** package.


*Keywords:* visualization, display, one dimensional, grouped, groups, violin, scatter, points, quasirandom, beeswarm, van der Corput, beeswarm, ggplot, ggplot2.

---

## 1. The basics


This is the simplest example of using `geom_quasirandom` to generate violin scatter plots:

```
> library(vipor)
> set.seed(12345)
> n<-100
> dat<-rnorm(n*2)
> labs<-rep(c('a','b'),n)
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom()
```

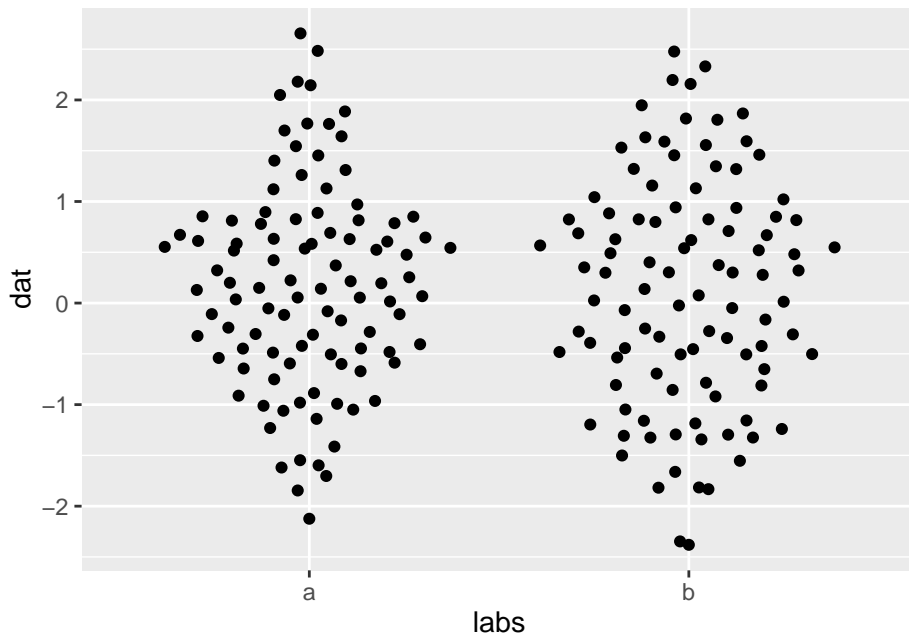

Normal **ggplot** options can be used:

```
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom(aes(color=labs))
```

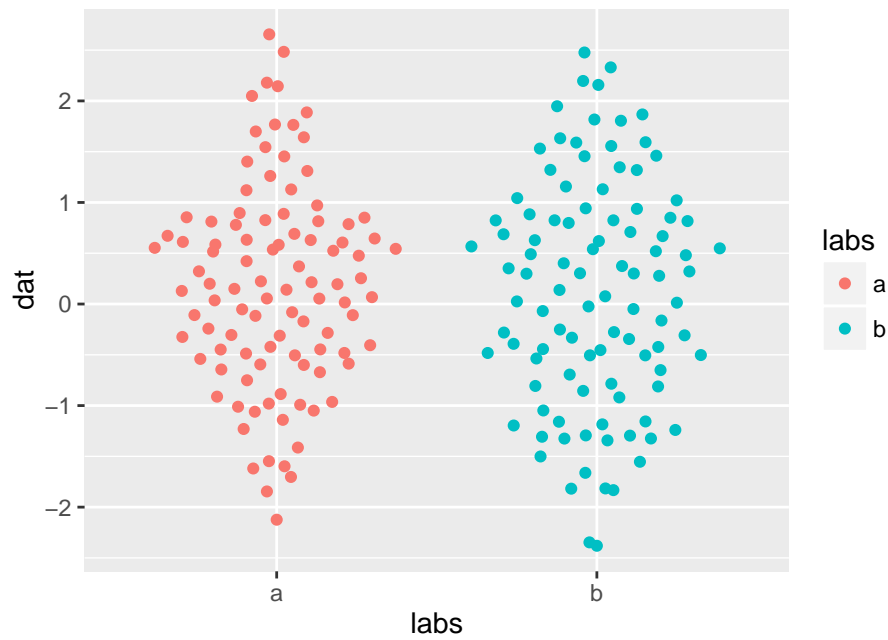**Affiliation:**

Github: <http://github.com/eclarke/ggbeeswarm> Cran: <https://cran.r-project.org/package=ggbeeswarm>