

# ggbeeswarm package usage example (version 0.5.0)

Erik Clarke [aut, cre], Scott Sherrill-Mix [aut]

---

## Abstract

This is a collection of examples of usage for the **ggbeeswarm** package.


*Keywords:* visualization, display, one dimensional, grouped, groups, violin, scatter, points, quasirandom, beeswarm, van der Corput, beeswarm, ggplot, ggplot2.

---

## 1. The basics


This is the simplest example of using `geom_quasirandom` to generate violin scatter plots:

```
> library(ggbeeswarm)
> set.seed(12345)
> n<-100
> dat<-rnorm(n*2)
> labs<-rep(c('a','b'),n)
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom()
```

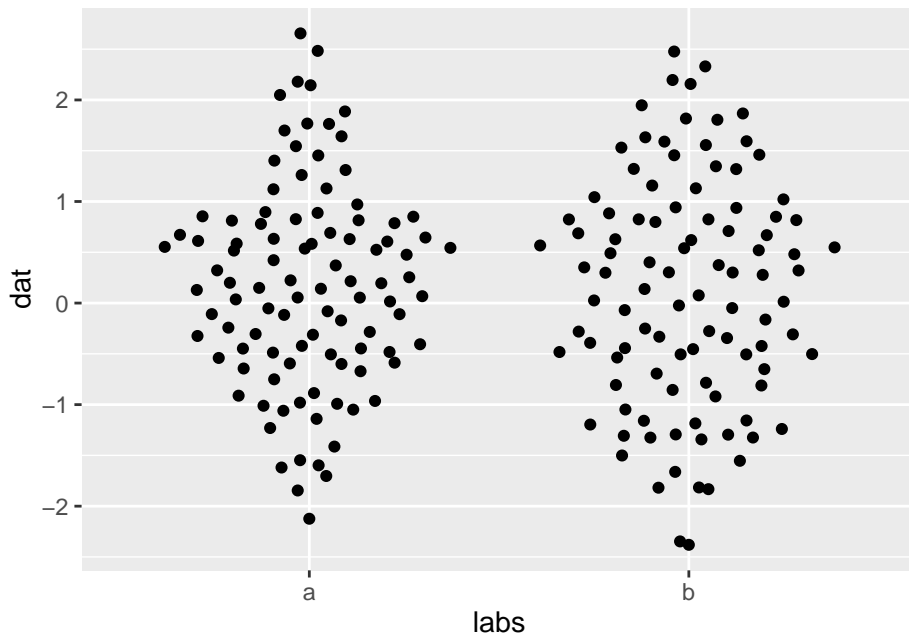


Normal **ggplot** options can be used:

```
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom(aes(color=labs))
```

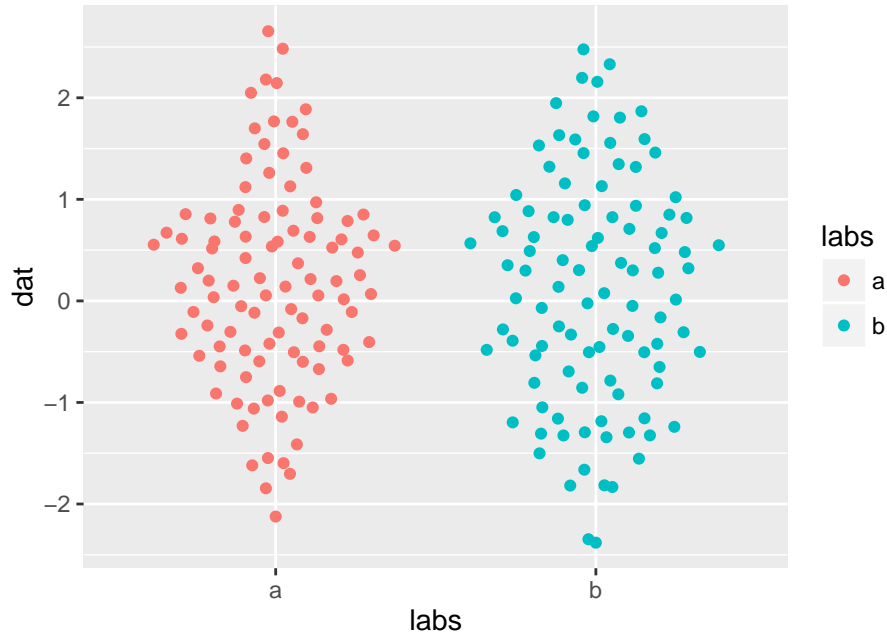

Factors can be used to generate custom group orderings:


```
> labs2<-factor(labs,levels=c('b','a'))
> ggplot(mapping=aes(labs2, dat)) + geom_quasirandom(aes(color=labs))
```

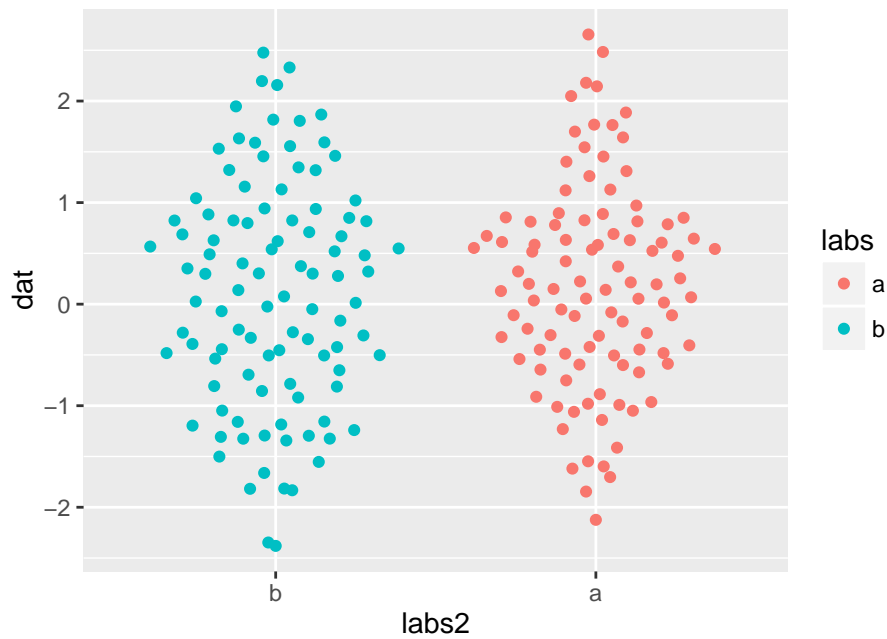

## 2. Options


`quasirandom` calls `vipor::offsetX` which calls `stats::density` to compute kernel density estimates. The tightness of the fit can be adjusted with the `adjust` option and the width of the offset with `width`. `nbins` to adjust the number of bins used in the kernel density is also provided but this can usually be left at its default when using `quasirandom` offsets but is useful for non-`quasirandom` methods:

```
> dat <- list(  
+   'Normal'=rnorm(50),  
+   'Dense normal'= rnorm(500),  
+   'Bimodal'=c(rnorm(100), rnorm(100,5)),  
+   'Extremes'=rcauchy(100)  
+ )  
> labs<-rep(names(dat),sapply(dat,length),levels=names(dat))  
> dat<-unlist(dat)  
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom(bandwidth=2)  
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom(bandwidth=.1)  
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom(width=.1)  
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom(nbins=100)
```

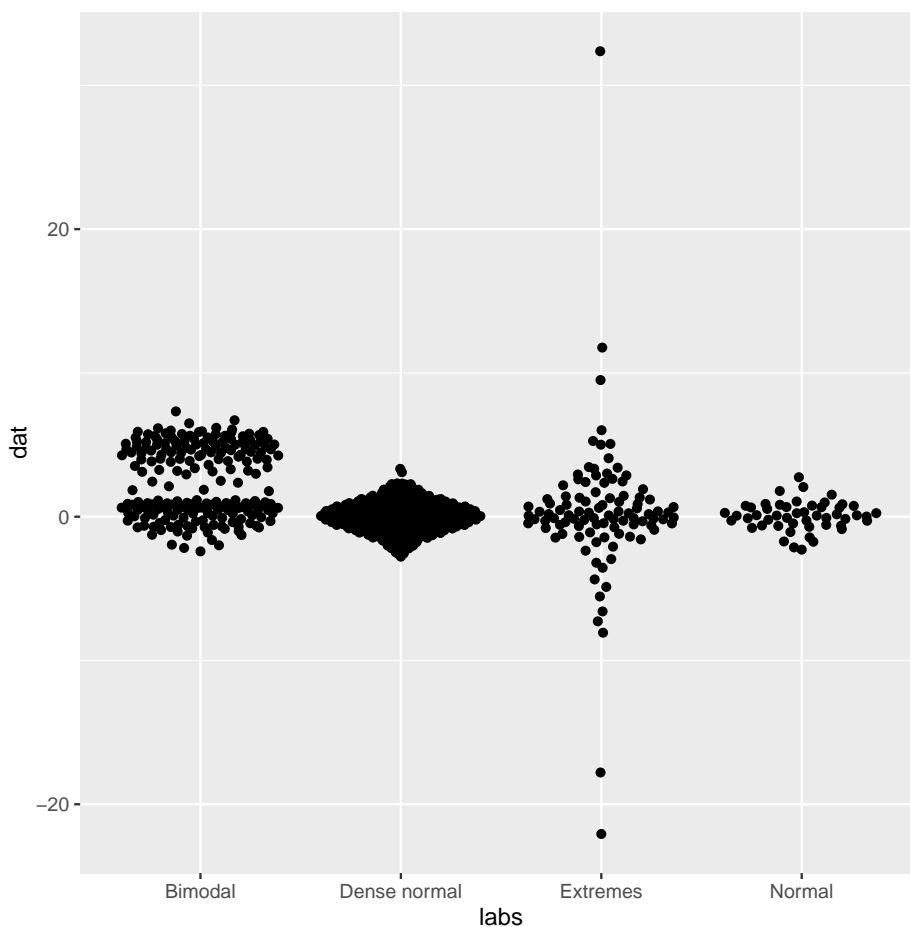

The `varwidth` argument scales the width of a group by the square root of the number of observations in that group (as in the function `boxplot`):

```
> dat <- list(
+   '10 points'=rnorm(10),
+   '50 points'=rnorm(50,2),
+   '200 points'=c(rnorm(400), rnorm(100,5)),
+   '5000 points'= rnorm(5000,1)
+ )
> labs<-rep(names(dat),sapply(dat,length))
> labs<-factor(labs,levels=unique(labs))
> dat<-unlist(dat)
> ggplot(mapping=aes(labs, dat)) + geom_quasirandom(varwidth=TRUE)
```

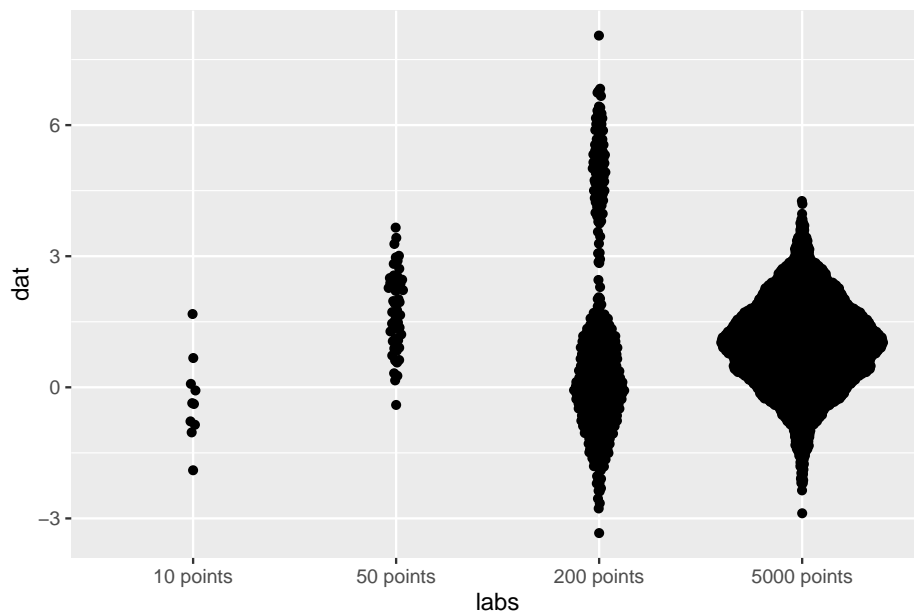

### Affiliation:

Github: <http://github.com/eclarke/ggbeeswarm> Cran: <https://cran.r-project.org/package=ggbeeswarm>