

Conduction in a rod with internal heat production

This is a derivation of the temperature distribution function $T(x)$ for a steady-state heat conduction in a straight rod of length L . We assume that the internal heat production Q_p is present in every point inside the rod volume (which may simulate heating up of an electrical wire). The rod is perfectly insulated along its length and it loses heat only through its endpoints which in a steady-state case are kept at a fixed temperature T_0 .

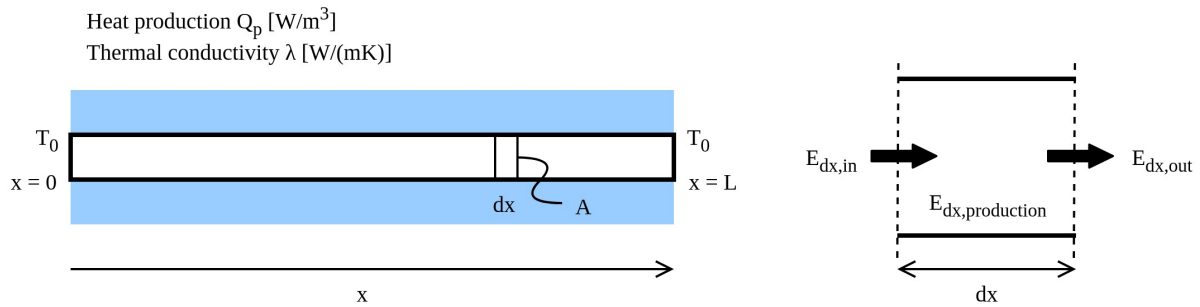


Figure 1: Conduction in a rod with internal heat production

We will take for the control volume a slice dx from the rod.

The energy balance for the rod element dx reads

$$\frac{dE_{dx}}{dt} = E_{dx,in} - E_{dx,out} + E_{dx,production} \quad (1)$$

(note here that $E_{dx,in}$, $E_{dx,out}$ and $E_{dx,production}$ are energies per unit time and so have the units of W)

The heat flow is described by the Fourier's law

$$\phi = \lambda A \left(- \frac{dT}{dx} \right) \quad (2)$$

Hence

$$E_{dx,in} = \lambda A \left(- \frac{dT}{dx} \right)_x \quad (3)$$

$$E_{dx,out} = \lambda A \left(- \frac{dT}{dx} \right)_{x+dx} \quad (4)$$

The energy per unit time coming from the production can be written as Q_p multiplied by the volume of the slice dx

$$E_{dx,production} = Q_p A dx \quad (5)$$

In the steady-state $\frac{dE}{dt} = 0$ and the energy balance becomes

$$\lambda A \left(-\frac{dT}{dx} \right)_x - \lambda A \left(-\frac{dT}{dx} \right)_{x+dx} + Q_p A dx = 0 \quad (6)$$

Simplifying the above energy balance we get

$$\frac{\left(\frac{dT}{dx} \right)_{x+dx} - \left(\frac{dT}{dx} \right)_x}{dx} = -\frac{Q_p}{\lambda}$$

It is interesting to note here that we have lost the dependence on the cross-sectional surface area of the rod.

If we now substitute some function $f(x) = \frac{dT}{dx}$ we notice that we have

$$\frac{f(x+dx) - f(x)}{dx} = -\frac{Q_p}{\lambda}$$

in other words

$$\frac{df(x)}{dx} = -\frac{Q_p}{\lambda} \quad (7)$$

With the above substitution, the differential equation that we are about to solve becomes

$$\frac{d^2T}{dx^2} = -\frac{Q_p}{\lambda} \quad (8)$$

Applying the boundary conditions from both ends of the rod, the solution to the above differential equation is

$$T(x) = -\frac{Q_p}{2\lambda}(x^2 - Lx) + T_0 \quad (9)$$

Computational example

As a computational example we will draw the graph of the temperature distribution in a copper rod $200m$ long. We take that the thermal conductivity for this rod is $400 \frac{W}{m \cdot K}$. The internal heat production in the entire rod is $20W$.

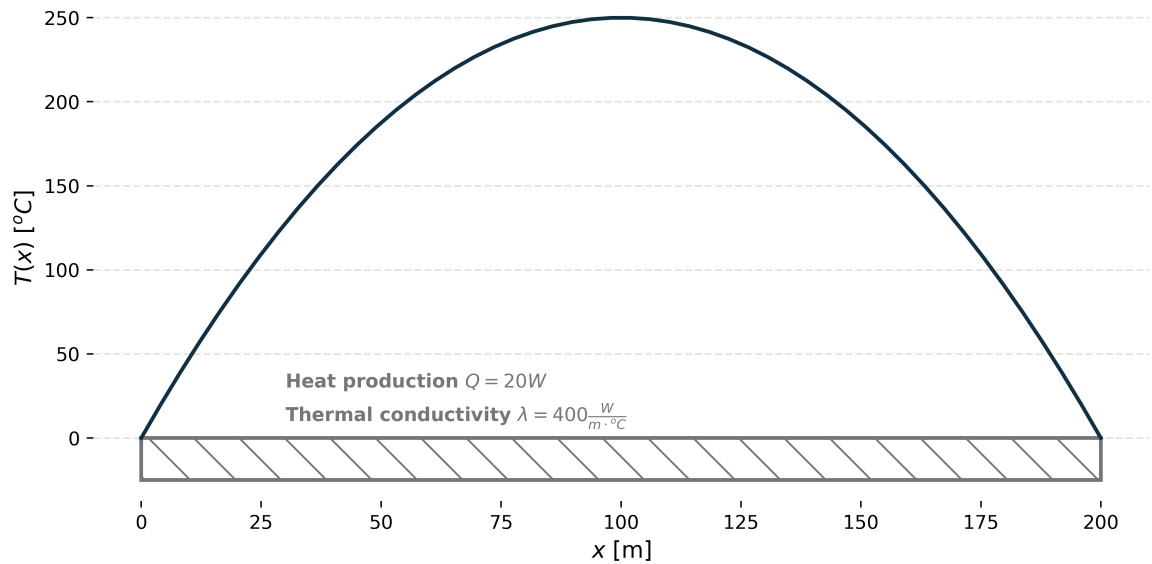


Figure 2: Temperature distribution in a rod with internal heat production of $20W$

This material was created by or adapted from material posted on the DelftX website, delftx.tudelft.nl, and created by TU Delft faculty members Robert Mudde, Professor of Multiphase Flow at the Dept. of Chemical Engineering and Peter Hamersma, Associate professor at the Dept. of Chemical Engineering, 2015. DelftX is not responsible for any changes made to the original materials posted on its website and any such changes are the sole responsibility of Kamila Zdybał.

The course materials by Delft University of Technology are subjected to copyright and are licensed under a Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License.

<https://creativecommons.org/licenses/by-nc-sa/4.0/>

Copyright © K. Zdybał, 2018
For more projects similar to this one
visit me on GitHub: @camillejr
camillejr.github.io/science-docs/
To contact me personally drop me a line at:
kamilazdybal@gmail.com

Conduction in a rod with internal heat production
Typeset with \LaTeX

This work is licensed under the Creative Commons
Attribution-NonCommercial-ShareAlike 4.0 International
(CC BY-NC-SA 4.0) license.