

accounts		
id 🔑	uuid	- o
user_id 🔗	uuid	
account_type	varchar(20)	
account_status_id 🔗	integer	>
name	varchar	
robux	double	
cost_php	currency	
price_php	currency	
profit_php	currency	
sold_rate_usd	currency	
sold_date	timestamp	
is_deleted	boolean	
created_at	timestamp	
updated_at	timestamp	
account_status		
$id \mathcal{D}$	integer —⊙—	
name	varchar	

timestamp

timestamp


created_at

updated_at

daily_transactions	daily_transactions		
id 🔑	uuid		
eaccount_id 🔗	uuid		
account_type	varchar(20)		
action	varchar(20)		
robux_amount	double		
cost_php	currency		
profit_php	currency		
created_at	timestamp		

daily_summary	
id 🔑	uuid
account_type	varchar(20)
total_robux_invested	double
total_robux_sold	double
total_cost_php	currency
total_profit_php	currency
summary_date	date
created_at	timestamp
updated_at	timestamp



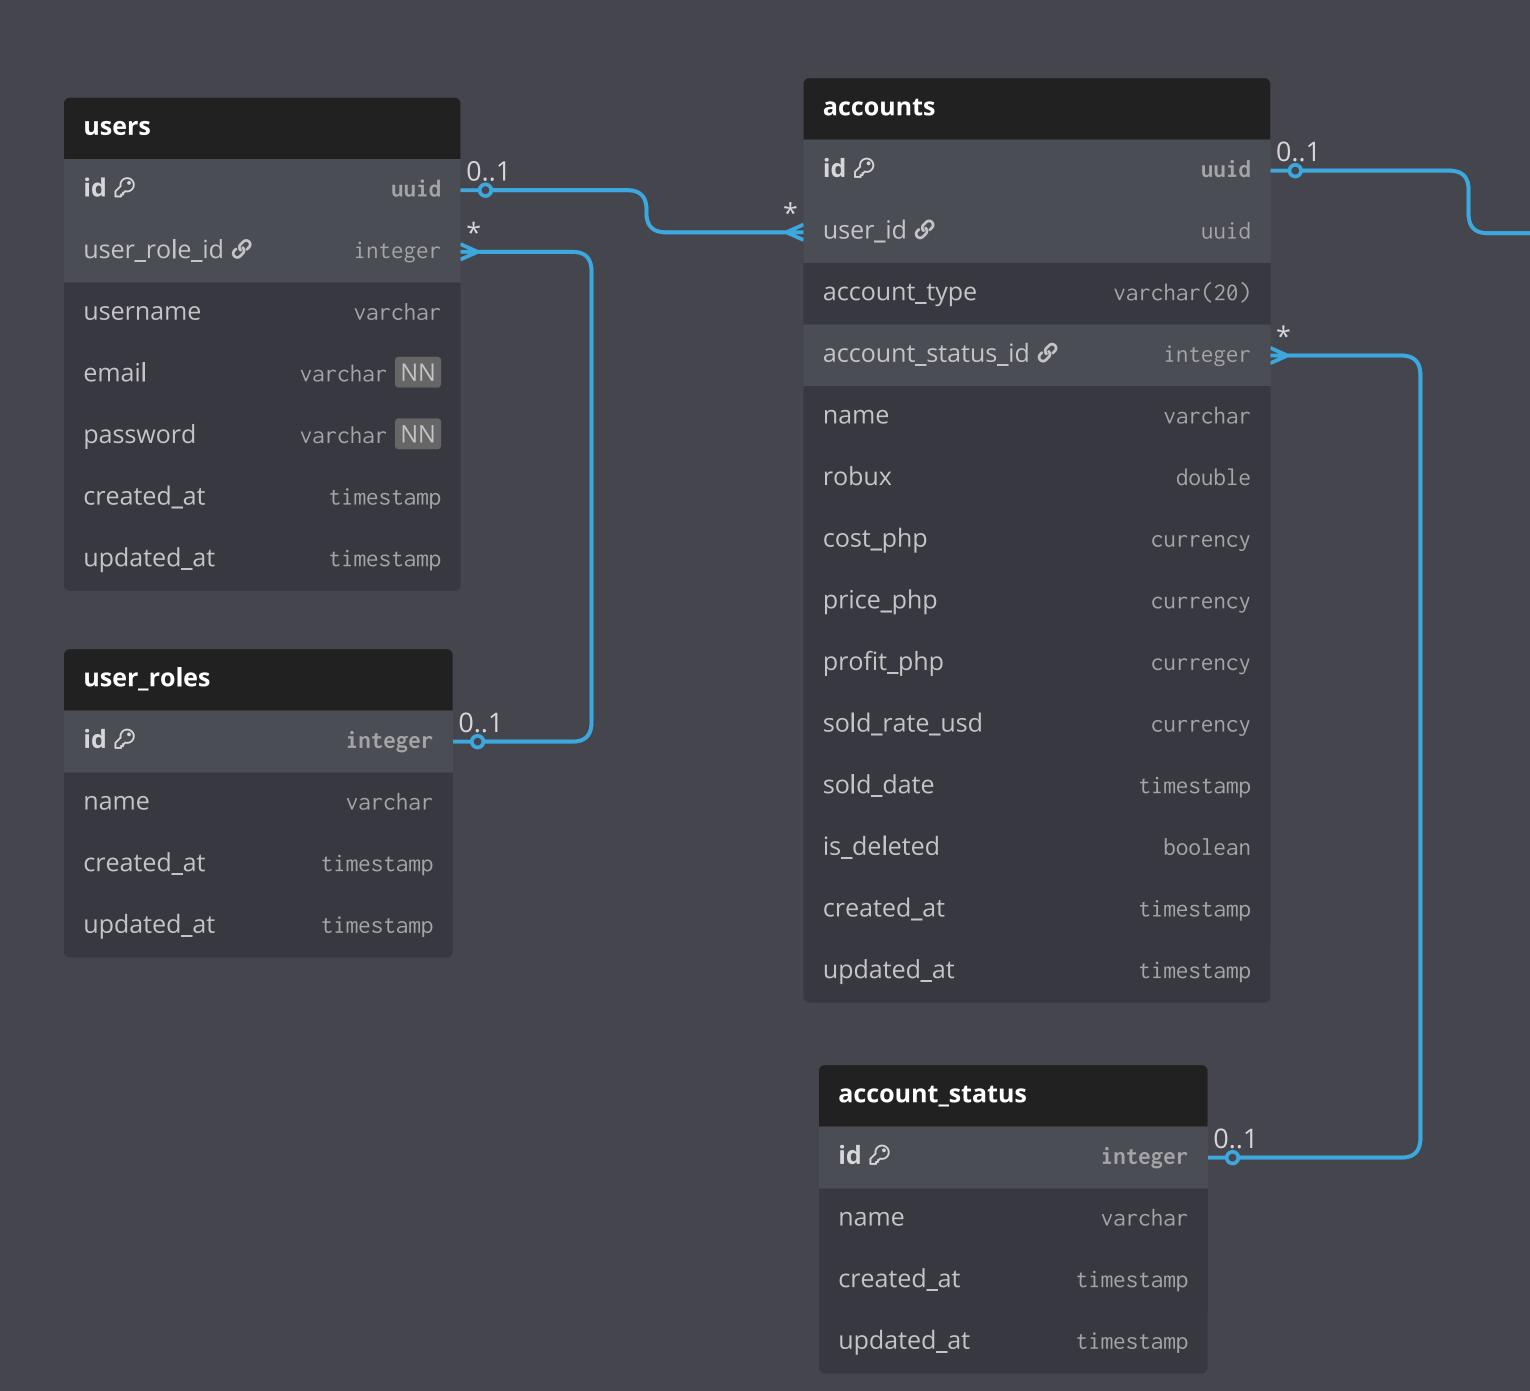

	daily_transactions	
	id 🛭	uuid
* ≪	account_id <i>&</i>	uuid
	account_type	varchar(20)
	action	varchar(20)
	robux_amount	double
	cost_php	currency
	profit_php	currency
	created_at	timestamp

daily_summary	
id 🔑	uuid
account_type	varchar(20)
total_robux_invested	double
total_robux_sold	double
total_cost_php	currency
total_profit_php	currency
summary_date	date
created_at	timestamp
updated_at	timestamp

