

# W13-P1: Get 3 menu data from /api/data\_xx.json

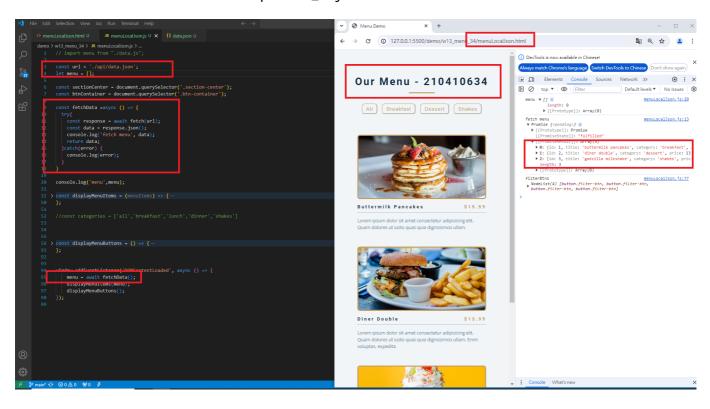


c9566b6 A-iong Sat May 18 14:32:43 2024 +0800 W13-P1: Get 3 menu data from /api/data\_xx.json

## W13-P2: Create 3 menu data from Supabase


## => create menu\_xx table, and add 1 menu data

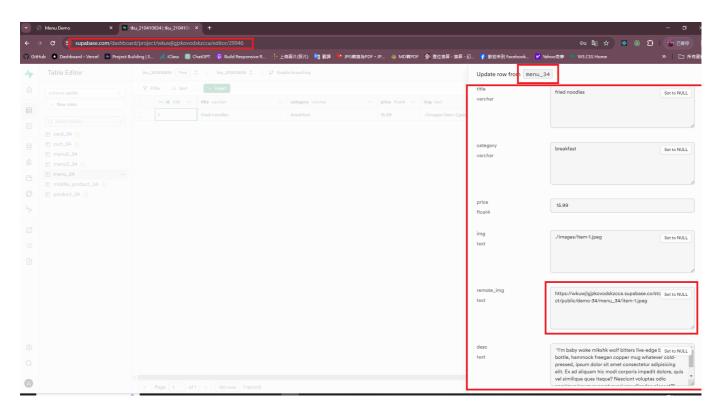


## => add RLS read policy for public access

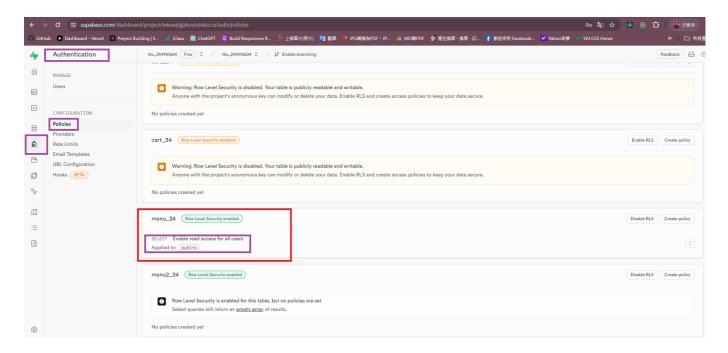

### => add two more menu data from SQL command

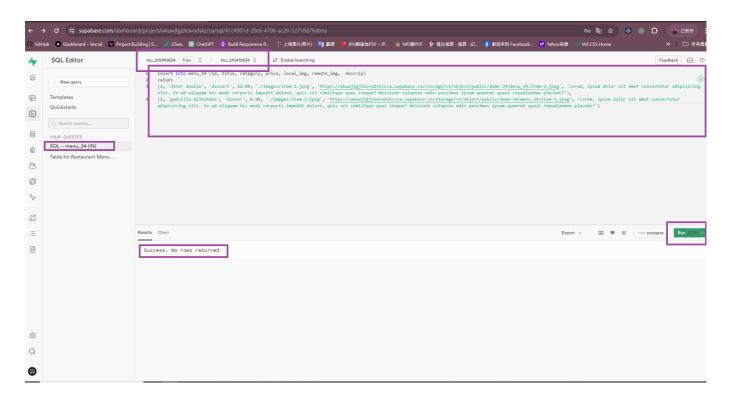



## => show 3 menu data from menu\_xx table

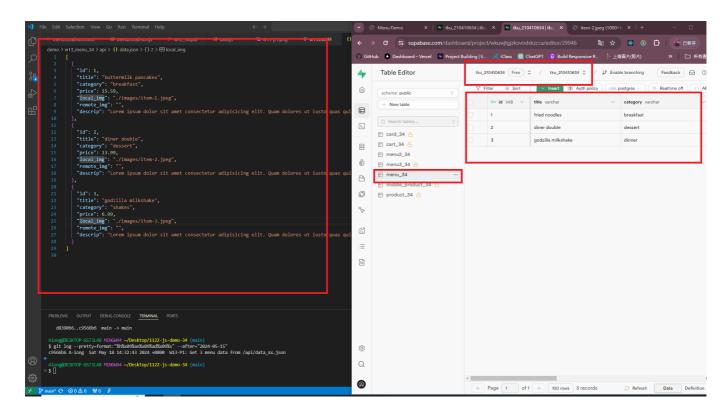

b2bc679 A-iong Sat May 18 16:31:36 2024 +0800 W13-P2: Create 3 menu data from Supabase

# W13-P3: Use menuSupa.html, menuSupa.js to get 3 menu data from Supabase

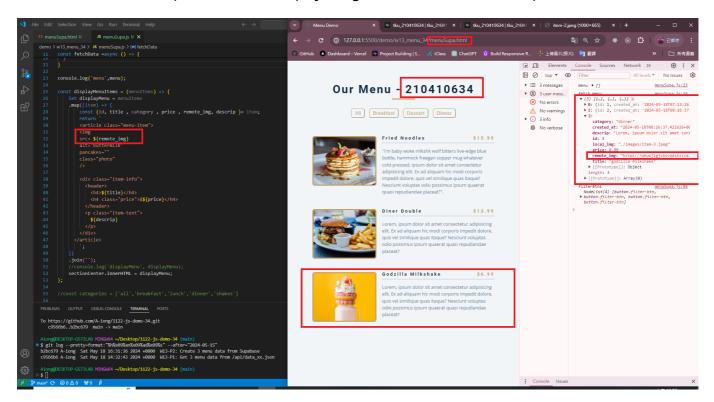


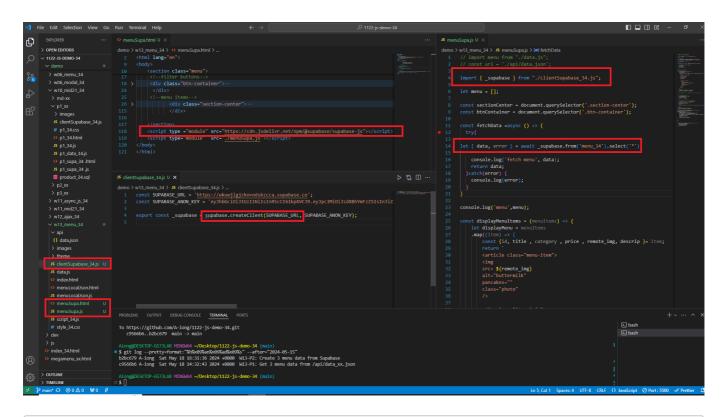


08bbea5 A-iong Sun May 19 00:13:05 2024 +0800 W13-P3: Use menuSupa.html, menuSupa.js to get 3 menu data from Supabase

## W13-P4: Create company\_xx and store\_xx tables, and insert all data

#### => data in store\_xx table

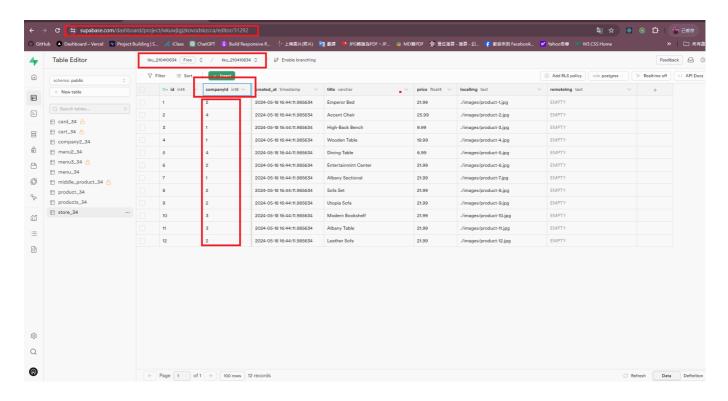

### => data in company\_xx table

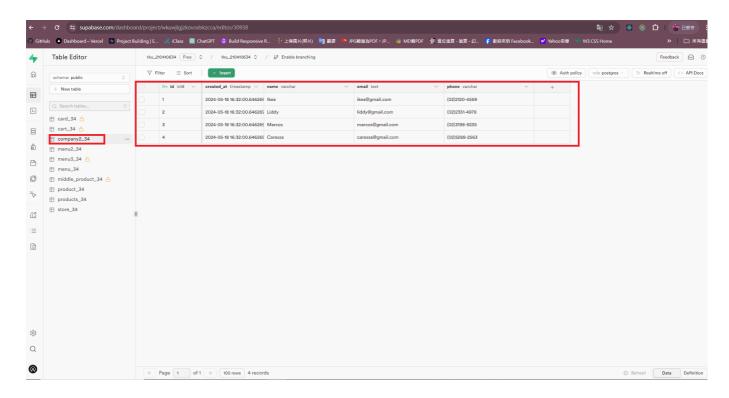

9e3e683 A-iong Sun May 19 01:01:03 2024 +0800 W13-P4: Create company\_xx and store\_xx tables, and insert all data

# W13-P5: git logs for W13

git log --pretty=format:"%h%x09%an%x09%ad%x09%s" --after="2024-05-15" 9e3e683 A-iong Sun May 19 01:01:03 2024 +0800 W13-P4: Create company\_xx and store\_xx tables, and insert all data 08bbea5 A-iong Sun May 19 00:13:05 2024 +0800 W13-P3: Use menuSupa.html, menuSupa.js to get 3 menu data from Supabase b2bc679 A-iong Sat May 18 16:31:36 2024 +0800 W13-P2: Create 3 menu data from Supabase