



# ITA\_System Configuration / Environment Construction Guide

Terraform-driver

—Version 1.5 —

## Disclaimer

All the contents of this document are protected by copyright owned by NEC Corporation  
Unauthorized reproduction or copying of all or part of the contents of this document is prohibited  
The contents of this document are subject to change without prior notice in the future.  
NEC Corporation is not responsible for any technical or editorial errors or omissions in this document.  
NEC Corporation do not guarantee accuracy, usability, certainty of the content in this document.

## Trademark

- Linux is registered trademark or trademark of Linux Torvalds, registered in the U.S. and other countries.
- Red Hat is registered trademark or trademark of Red Hat, Inc., registered in the U.S. and other countries.
- Apache, Apache Tomcat and Tomcat are registered trademarks or trademarks of the Apache Software Foundation.
- Oracle and MySQL are registered trademarks of Oracle Corporation and its subsidiaries and affiliates in the U.S. and other countries.
- MariaDB is a registered trademark or trademark of the MariaDB Foundation.
- Terraform is a registered trademark or trademark of HashiCorp, Inc..

The names of other systems, company name and products mentioned in this document are registered trademarks or trademarks of their respective companies.

The® mark and TM mark are not specified in this document.

※「Exastro IT Automation 」 is written as「ITA」in this document.

# Table of Contents

---

Introduction .....	3
1    Function.....	4
2    System configuration.....	5
3    System requirements .....	6
4    Terraform Enterprise initial setting .....	7
4.1    Prepare required resource.....	7

## Introduction

---

This document explains the system configuration and environment construction for operating Terraform optional function (referred to as Terraform driver hereafter) in ITA.

To use the ITA Terraform driver, it is assumed that the basic ITA functions have been built. Please refer to "System Configuration/Environment Construction Guide - Basics" for constructing ITA basic function.

## 1 Function

---

Terraform driver provides the following functions.

**Table 1-1. Function name**

No	Function name	User	WEB Content	BackYard Content
1	Terraform driver	Generate an execution plan and execute the construction bases on the coded infrastructure configuration in ITA via Terraform Enterprise. In addition, it is possible manage coded access policies based on Policy as Code.	◎	◎


## 2 System configuration

The system configuration of Terraform driver is same as the ITA system.

Terraform driver is considered to be configured in a dedicated Terraform Enterprise separated from the ITA server.

This figure shows a configuration in which a Terraform Enterprise server is added to the balanced HA type, the recommended configuration for the ITA system.

※The figure here is a omitted version. Please refer to "System Configuration/Environment Construction Guide - Basics" for details.

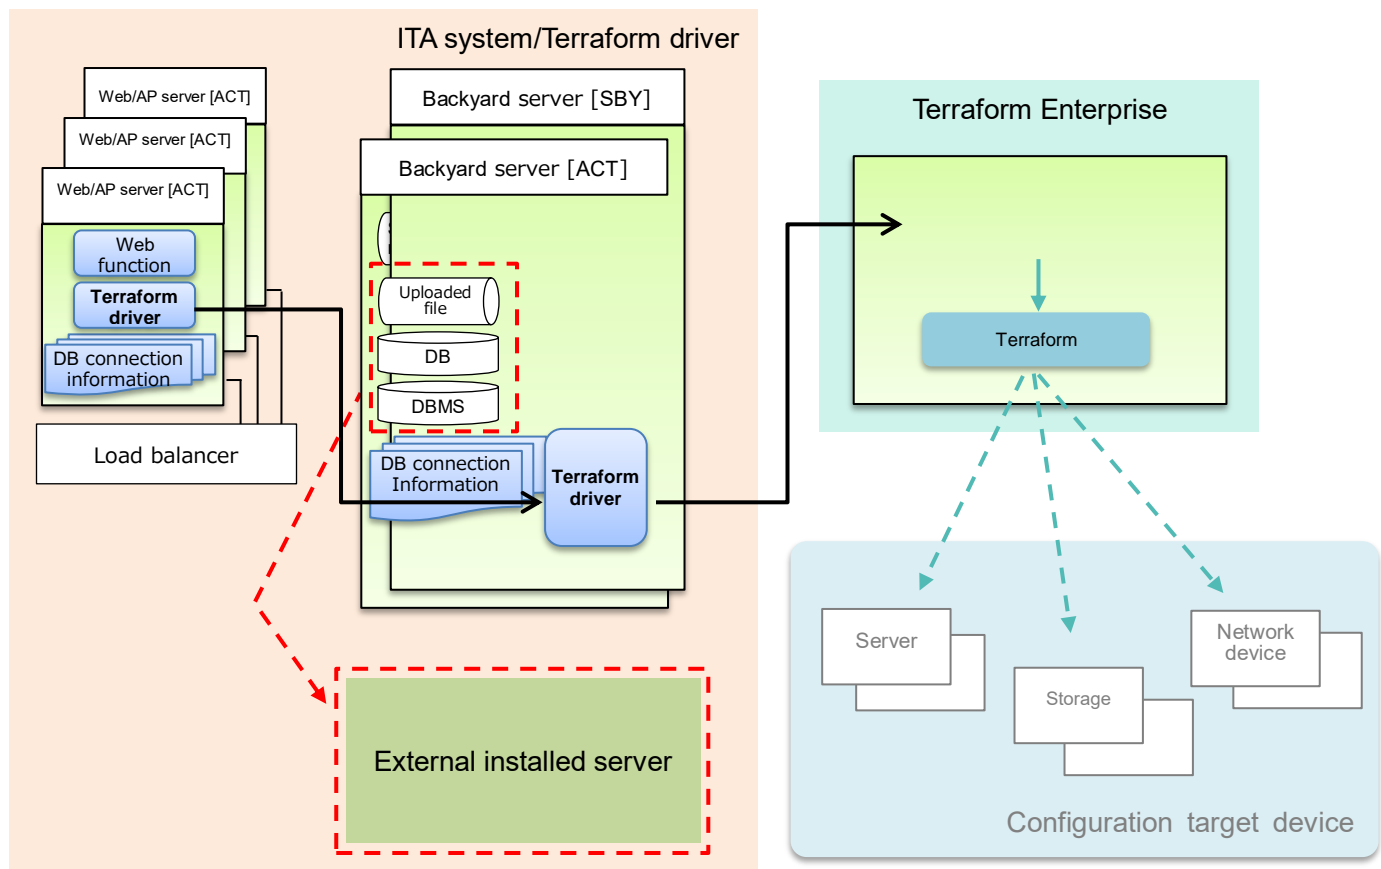

### 3 System requirements

---

Since Terraform driver (ITA side) is based on system requirements of ITA system, please refer to "System Configuration/Environment Construction Guide - Basics". This section describes the requirements for BackYard.

#### ● BackYard

**Table 3-1. Linux commands required for Terraform backyard**


Command	Note
tar	
zip	

## 4 Terraform Enterprise initial setting

### 4.1 Prepare required resource

For Terraform Driver to link with Terraform Enterprise, it is required to create user token from Terraform Enterprise.

Login Terraform Enterprise from browser, then click [User Setting] → [Tokens] → [Create an API token] to create API token.

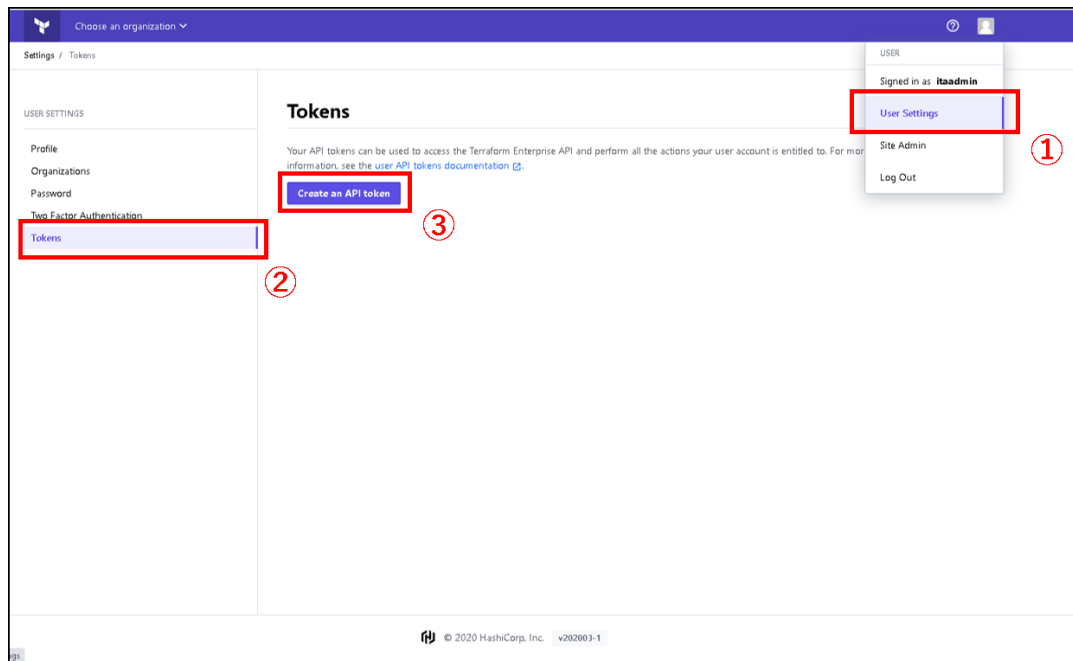

The created user token should be set to “Interface information” of Terraform console in ITA. Please refer to “User Instruction manual Terraform-driver” for details.