### **Configurando:**

```
MINGW64:/c/Users/carlo
```

```
carlo@LAPTOP-2RSA47RN MINGW64 ~

$ git --version
git version 2.33.0.windows.2

carlo@LAPTOP-2RSA47RN MINGW64 ~

$ git config --global user.name "CarlosFlores01"

carlo@LAPTOP-2RSA47RN MINGW64 ~

$ git config --global user.email carlos_flores_fe01@outlook.es

carlo@LAPTOP-2RSA47RN MINGW64 ~

$ git config --global user.editor "nano --wait"

carlo@LAPTOP-2RSA47RN MINGW64 ~

$ git config --global -e
```

### En nano:

```
MINGW64:/c/Users/carlo
                                                                           ×
 GNU nano 5.8
                              C:/Users/carlo/.gitconfig
[user]
        name = CarlosFlores01
        email = carlos_flores_fe01@outlook.es
        editor = nano --wait
[core]
        editor = nano
            ^O Write Out ^W Where Is ^K Cut
^R Read File ^\ Replace ^U Paste
^G Help
                                                      AT Execute AC Location
                                                      ^J Justify
X Exit
                                                                    ^/ Go To Line
```


### En vim:



# MINGW64:/c/Users/carlo

```
[user]
       name = CarlosFlores01
       email = carlos_flores_fe01@outlook.es
       editor = nano --wait
```

## Cuenta de GitHub:

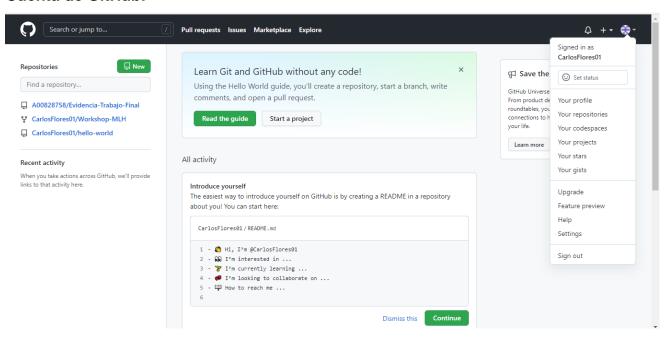

#### Clonando el archivo de GitHub:

```
carlo@LAPTOP-2RSA47RN MINGW64 ~
$ mkdir GitHub
carlo@LAPTOP-2RSA47RN MINGW64 ~
$ cd github
carlo@LAPTOP-2RSA47RN MINGW64 ~/github
$ git clone https://github.com/CarlosFlores01/Actividad-GitHub.git
Cloning into 'Actividad-GitHub'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.
carlo@LAPTOP-2RSA47RN MINGW64 ~/github
$ 1s
Actividad-GitHub/
carlo@LAPTOP-2RSA47RN MINGW64 ~/github
$ cd Actividad-GitHub
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/Actividad-GitHub (main)
$ cat README.md
# Actividad-GitHub
arlo@LAPTOP-2RSA47RN MINGW64 ~/github/Actividad-GitHub (main)
```

```
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/Actividad-GitHub (main)
$ cd ..
carlo@LAPTOP-2RSA47RN MINGW64 ~/github
Actividad-GitHub/
carlo@LAPTOP-2RSA47RN MINGW64 ~/github
$ mkdir otro_repo
carlo@LAPTOP-2RSA47RN MINGW64 ~/github
$ cd otro_repo
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/otro_repo
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/otro_repo
$ git init
Initialized empty Git repository in C:/Users/carlo/GitHub/otro_repo/.git/
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/otro_repo (master)
$ ls -al
total 4
drwxr-xr-x 1 carlo 197609 0 Sep 16 23:22 ./
drwxr-xr-x 1 carlo 197609 0 Sep 16 23:21 ../
drwxr-xr-x 1 carlo 197609 0 Sep 16 23:22 .git/
```

```
arlo@LAPTOP-2RSA47RN MINGW64 ~/github/otro_repo (master)
$ cd ..
 carlo@LAPTOP-2RSA47RN MINGW64 ~/github
$ 1s
Actividad-GitHub/ otro_repo/
carlo@LAPTOP-2RSA47RN MINGW64 ~/github
$ cd actividad-github
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ 1s
README.md
 arlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ git --status
unknown option: --status
<command> [<args>]
 arlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ nano hola.py
 arlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.
nothing to commit, working tree clean
 arlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ nano hola.py
 arlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.
Untracked files:
  (use "git add <file>..." to include in what will be committed)
```

```
nothing added to commit but untracked files present (use "git add" to track)

carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)

$ ls

README.md hola.py

carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)

$ nano README.md

carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)

$ git status

On branch main

Your branch is up to date with 'origin/main'.

Changes not staged for commit:

(use "git add <file>..." to update what will be committed)

(use "git restore <file>..." to discard changes in working directory)

modified: README.md

Untracked files:

(use "git add <file>..." to include in what will be committed)

hola.py

no changes added to commit (use "git add" and/or "git commit -a")

carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)

$ |
```

Initial commit

```
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ git add .
warning: LF will be replaced by CRLF in README.md.
The file will have its original line endings in your working directory
warning: LF will be replaced by CRLF in hola.py.
The file will have its original line endings in your working directory
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
         new file:
                      hola.py
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ git commit -m "version 0.1 de los programas"
[main 077f411] version 0.1 de los programas
 2 files changed, 4 insertions(+), 1 deletion(-)
 create mode 100644 hola.py
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)
nothing to commit, working tree clean
carlo@LAPTOP-2RSA47RN MINGW64 ~/github/actividad-github (main)
$ git log
commit 077f4114e76c5da615a7c65b872300753b1116e2 (HEAD -> main)
Author: CarlosFlores01 <carlos_flores_fe01@outlook.es>
Date: Thu Sep 16 23:34:44 2021 -0500
    version 0.1 de los programas
commit 199107bc21033df3d96df68436cc88bdc67ed23f (origin/main, origin/HEAD)
Author: CarlosFlores01 <74108373+CarlosFlores01@users.noreply.github.com>
Date:
         Thu Sep 16 23:09:42 2021 -0500
```