```
MINGW64:/c/Users/flore

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git --version
git version 2.33.0.windows.2

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git config --global user.name "Francisco Flores"

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git config --global user.email "a00828758@itesm.mx"

flore@LAPTOP-6Q769TN2 MINGW64 ~
$

flore@LAPTOP-6Q769TN2 MINGW64 ~
$

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git config --global user.editor "nano --wait"

flore@LAPTOP-6Q769TN2 MINGW64 ~
$

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git config --global -e

flore@LAPTOP-6Q769TN2 MINGW64 ~
$
```
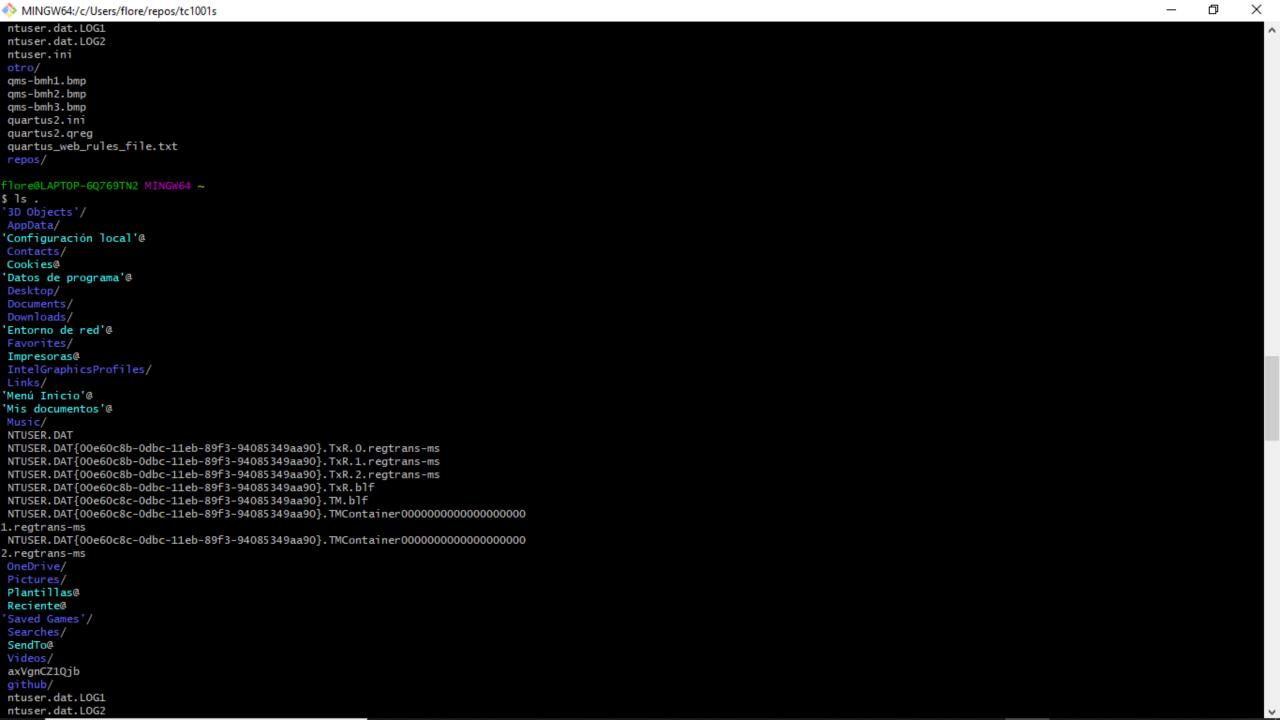
```
[user]
        name = Francisco Flores
        email = a00828758@itesm.mx
        editor = nano --wait
```

```
flore@LAPTOP-6Q769TN2 MINGW64 ~
$ pwd
/c/Users/flore

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ mkdir repos

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ cd repos

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ pwd
/c/Users/flore/repos

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ git clone https://github.com/A00828758/tc1001s.git
Cloning into 'tc1001s'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (6/6), done.

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ ls
tc1001s/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ ls -al
total 16
drwxr-xr-x 1 flore 197609 0 Sep 14 12:13 ./
drwxr-xr-x 1 flore 197609 0 Sep 14 12:10 ../
drwxr-xr-x 1 flore 197609 0 Sep 14 12:13 tc1001s/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ cd tc1001s

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ ls -al
total 5
drwxr-xr-x 1 flore 197609  0 Sep 14 12:13 ./
drwxr-xr-x 1 flore 197609  0 Sep 14 12:13 ../
drwxr-xr-x 1 flore 197609  0 Sep 14 12:13 .git/
-rw-r--r-- 1 flore 197609 49 Sep 14 12:13 README.md

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ cat README.md
# tc1001s
Ejemplo para tc1001s sept 2021
Hola

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$
```

```
flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git --version
git version 2.33.0.windows.2

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git config --global user.name "Francisco Flores"

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git config --global user.email "a00828758@itesm.mx"

flore@LAPTOP-6Q769TN2 MINGW64 ~
$

flore@LAPTOP-6Q769TN2 MINGW64 ~
$

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git config --global user.editor "nano --wait"

flore@LAPTOP-6Q769TN2 MINGW64 ~
$

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ git config --global -e

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ mkdir github

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ pwd
/c/Users/flore

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ mkdir repos

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ cd repos

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ pwd
/c/Users/flore/repos

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ git clone https://github.com/A00828758/tc1001s.git
Cloning into 'tc1001s'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (6/6), done.

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
```

```
Receiving objects: 100% (6/6), done.

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ ls
tc1001s/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ ls -al
total 16
drwxr-xr-x 1 flore 197609 0 Sep 14 12:13 ./
drwxr-xr-x 1 flore 197609 0 Sep 14 12:10 ../
drwxr-xr-x 1 flore 197609 0 Sep 14 12:13 tc1001s/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ cd tc1001s

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ ls -al
total 5
drwxr-xr-x 1 flore 197609  0 Sep 14 12:13 ./
drwxr-xr-x 1 flore 197609  0 Sep 14 12:13 ../
drwxr-xr-x 1 flore 197609  0 Sep 14 12:13 .git/
-rw-r--r-- 1 flore 197609 49 Sep 14 12:13 README.md

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ cat README.md
# tc1001s
Ejemplo para tc1001s sept 2021
Hola

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ ..
bash: ..: command not found
l
flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ ls
README.md

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ cd..
bash: cd..: command not found

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ cd ..

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ ls
tc1001s/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ mkdir otro_repo

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
```

```
$ mkdir otro_repo

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ cd otro_repo

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo
$ ls

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo
$ get init
bash: get: command not found

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo
$ git init
Initialized empty Git repository in C:/Users/flore/repos/otro_repo/.git/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo (master)
$ ls -al
total 4
drwxr-xr-x 1 flore 197609 0 Sep 14 12:24 ./
drwxr-xr-x 1 flore 197609 0 Sep 14 12:23 ../
drwxr-xr-x 1 flore 197609 0 Sep 14 12:24 .git/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo (master)
$ git status
On branch master

No commits yet

nothing to commit (create/copy files and use "git add" to track)

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo (master)
$ nano hola.py

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        hola.py

nothing added to commit but untracked files present (use "git add" to track)

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo (master)
$ ls
hola.py

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/otro_repo (master)
$ cd ..
```

```
flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ ls
otro_repo/   tc1001s/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ cd ..

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ ls
'3D Objects'/
 AppData/
'Configuración local'@
 Contacts/
 Cookies@
'Datos de programa'@
 Desktop/
 Documents/
 Downloads/
'Entorno de red'@
 Favorites/
 Impresoras@
 IntelGraphicsProfiles/
 Links/
'Menú Inicio'@
'Mis documentos'@
 Music/
 NTUSER.DAT
 NTUSER.DAT{00e60c8b-0dbc-11eb-89f3-94085349aa90}.TxR.0.regtrans-ms
 NTUSER.DAT{00e60c8b-0dbc-11eb-89f3-94085349aa90}.TxR.1.regtrans-ms
 NTUSER.DAT{00e60c8b-0dbc-11eb-89f3-94085349aa90}.TxR.2.regtrans-ms
 NTUSER.DAT{00e60c8b-0dbc-11eb-89f3-94085349aa90}.TxR.blf
 NTUSER.DAT{00e60c8c-0dbc-11eb-89f3-94085349aa90}.TM.blf
 NTUSER.DAT{00e60c8c-0dbc-11eb-89f3-94085349aa90}.TMContainer00000000000000000000
1.regtrans-ms
 NTUSER.DAT{00e60c8c-0dbc-11eb-89f3-94085349aa90}.TMContainer00000000000000000000
2.regtrans-ms
 OneDrive/
 Pictures/
 Plantillas@
 Reciente@
'Saved Games'/
 Searches/
 SendTo@
 Videos/
 axVgnCZ1Qjb
 github/
 ntuser.dat.LOG1
 ntuser.dat.LOG2
 ntuser.ini
 otro/
 qms-bmh1.bmp
 qms-bmh2.bmp
```

```
ntuser.dat.LOG1
ntuser.dat.LOG2
ntuser.ini
otro/
qms-bmh1.bmp
qms-bmh2.bmp
qms-bmh3.bmp
quartus2.ini
quartus2.qreg
quartus_web_rules_file.txt
repos/

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ ls .
'3D Objects'/
 AppData/
'Configuración local'@
 Contacts/
 Cookies@
'Datos de programa'@
 Desktop/
 Documents/
 Downloads/
'Entorno de red'@
 Favorites/
 Impresoras@
 IntelGraphicsProfiles/
 Links/
'Menú Inicio'@
'Mis documentos'@
 Music/
 NTUSER.DAT
 NTUSER.DAT{00e60c8b-0dbc-11eb-89f3-94085349aa90}.TxR.0.regtrans-ms
 NTUSER.DAT{00e60c8b-0dbc-11eb-89f3-94085349aa90}.TxR.1.regtrans-ms
 NTUSER.DAT{00e60c8b-0dbc-11eb-89f3-94085349aa90}.TxR.2.regtrans-ms
 NTUSER.DAT{00e60c8b-0dbc-11eb-89f3-94085349aa90}.TxR.blf
 NTUSER.DAT{00e60c8c-0dbc-11eb-89f3-94085349aa90}.TM.blf
 NTUSER.DAT{00e60c8c-0dbc-11eb-89f3-94085349aa90}.TMContainer0000000000000000000
1.regtrans-ms
 NTUSER.DAT{00e60c8c-0dbc-11eb-89f3-94085349aa90}.TMContainer0000000000000000000
2.regtrans-ms
 OneDrive/
 Pictures/
 Plantillas@
 Reciente@
'Saved Games'/
 Searches/
 SendTo@
 Videos/
 axVgnCZ1Qjb
 github/
 ntuser.dat.LOG1
 ntuser.dat.LOG2
```

```
NTUSER.DAT{00e60c8c-0dbc-11eb-89f3-94085349aa90}.TMContainer0000000000000000000
2.regtrans-ms
 OneDrive/
 Pictures/
 Plantillas@
 Reciente@
'Saved Games'/
 Searches/
 SendTo@
 Videos/
 axVgnCZ1Qjb
 github/
 ntuser.dat.LOG1
 ntuser.dat.LOG2
 ntuser.ini
 otro/
 qms-bmh1.bmp
 qms-bmh2.bmp
 qms-bmh3.bmp
 quartus2.ini
 quartus2.qreg
 quartus_web_rules_file.txt
 repos/

flore@LAPTOP-6Q769TN2 MINGW64 ~
$ cd repos

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ ls
otro_repo/  tc1001s/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ ls -al
total 16
drwxr-xr-x 1 flore 197609 0 Sep 14 12:23 ./
drwxr-xr-x 1 flore 197609 0 Sep 14 12:10 ../
drwxr-xr-x 1 flore 197609 0 Sep 14 12:31 otro_repo/
drwxr-xr-x 1 flore 197609 0 Sep 14 12:13 tc1001s/

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos
$ cd tc1001s

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ ls
README.md

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ nano hola.py

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ ls
README.md  hola.py
```

```
$ nano hola.py

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ ls
README.md   hola.py

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        hola.py

nothing added to commit but untracked files present (use "git add" to track)

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git add .
warning: LF will be replaced by CRLF in hola.py.
The file will have its original line endings in your working directory

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   hola.py


flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ nano README.rd

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ nano README.md

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ ls
README.md   hola.py

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   hola.py

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
```

```
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   hola.py

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   README.md


flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git add .

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   README.md
        new file:   hola.py


flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git commit -m "Version 0.1 de los programas"
[main 3b3ba1f] Version 0.1 de los programas
 2 files changed, 2 insertions(+)
 create mode 100644 hola.py

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git log
commit 3b3ba1f740d4d800db8f8f1ee5ed3666078b85fc (HEAD -> main)
Author: Francisco Flores <a00828758@itesm.mx>
Date:   Tue Sep 14 12:46:45 2021 -0500

    Version 0.1 de los programas

commit 3d3af914845c2b8f41be890e3a953b897e972966 (origin/main, origin/HEAD)
Author: A00828758 <90715825+A00828758@users.noreply.github.com>
Date:   Tue Sep 14 12:07:09 2021 -0500

    Update README.md

commit f6de9f23af27e088728d7324a9accc6843df5250
```

```
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git log
commit 3b3ba1f740d4d800db8f8f1ee5ed3666078b85fc (HEAD -> main)
Author: Francisco Flores <a00828758@itesm.mx>
Date:   Tue Sep 14 12:46:45 2021 -0500

    Version 0.1 de los programas

commit 3d3af914845c2b8f41be890e3a953b897e972966 (origin/main, origin/HEAD)
Author: A00828758 <90715825+A00828758@users.noreply.github.com>
Date:   Tue Sep 14 12:07:09 2021 -0500

    Update README.md

commit f6de9f23af27e088728d7324a9accc6843df5250
Author: A00828758 <90715825+A00828758@users.noreply.github.com>
Date:   Tue Sep 14 12:03:00 2021 -0500

    Initial commit

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git status
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$ git push origin

Excepción no controlada: System.ComponentModel.Win32Exception: El identificador
de la ventana no es válido
   en MS.Win32.ManagedWndProcTracker.HookUpDefWindowProc(IntPtr hwnd)
   en MS.Win32.ManagedWndProcTracker.OnAppDomainProcessExit()
   en MS.Internal.ShutDownListener.HandleShutDown(Object sender, EventArgs e)
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 8 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 364 bytes | 52.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/A00828758/tc1001s.git
   3d3af91..3b3ba1f  main -> main

flore@LAPTOP-6Q769TN2 MINGW64 ~/repos/tc1001s (main)
$
```