
MODULE 1: SPECTRAL BAND ATTENTION MODULE (SBAM)

Network Stage: Stage I — Input Recalibration (Pre-Convolution) | **Parameter Footprint:** 10,225 params (3.32% of SGSCF-Net)

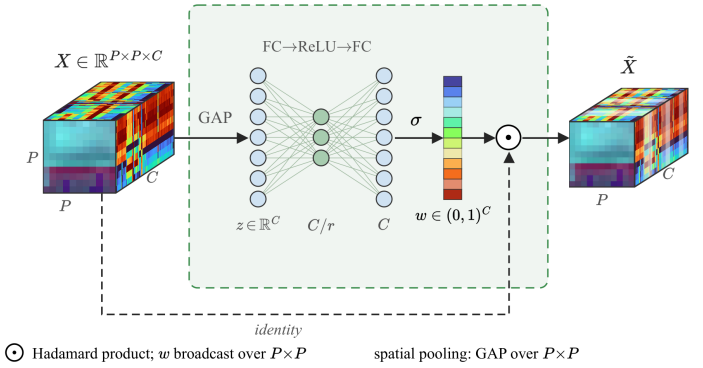

1. PROBLEM STATEMENT & ARCHITECTURAL MOTIVATION

- **Atmospheric Noise & Degradation:** Airborne hyperspectral sensors (AVIRIS/ROSIS) capture 100–200+ contiguous bands. Critical regions suffer from severe **atmospheric water vapor absorption** (bands 104–108 at 1.4 µm, bands 150–163 at 1.9 µm). If raw cubes enter 3D convolutions directly, noisy zero-transmission bands corrupt representations, propagating errors into deep layers.
- **Pre-Convolution Solution:** Unlike SENet or CBAM that operate strictly on deep latent feature maps, SBAM operates **directly on raw spectral bands before any convolution occurs**. It dynamically learns continuous soft attention weights per scene, shielding downstream representation learning.

2. MATHEMATICAL FORMULATION & TENSOR TRANSFORMATIONS

- **Step 1 (Spatial Compression):** For volumetric patch X ∈ ■^(B×1×P×P×C), adaptive 3D average pooling compresses spatial grid P×P to extract global spectral energy descriptor z ∈ ■^(B×C):
  z_c = (1 / P²) ∑_{u=1}^P ∑_{v=1}^P X(b, 1, u, v, c), for each band c ∈ {1, ..., C}.
- **Step 2 (MLP Bottleneck with Reduction r=8):** z passes through two linear projections with reduction ratio r=8 (bottleneck channels C_mid = max(■C/8■, 8)), applying ReLU δ and Sigmoid σ:
  w = σ(W■ · δ(W■ z + b■) + b■) ∈ (0, 1)^(B×C), where W■ ∈ ■^(C_mid×C) and W■ ∈ ■^(C×C_mid).
- **Step 3 (Channel-Wise Hadamard Modulation):** Attention vector w is broadcast across spatial dimensions ■(w) and multiplied element-wise with input cube X:
  X■ = X ■ ■(w) ∈ ■^(B×1×P×P×C). Noisy water absorption bands receive near-zero weights and are attenuated at the physical boundary.

3. VIVA DEFENSE SHIELD & NOVELTY HIGHLIGHTS

Examiner: Why not simply delete noisy water absorption bands manually during data preprocessing?


Winning Defense Answer: Manual band removal relies on rigid, hardcoded indices (e.g. deleting 20 bands in AVIRIS). However, atmospheric attenuation, sensor drift, and noise vary continuously across different flight lines and times. SBAM dynamically learns continuous, data-driven attention weights per scene, preserving useful residual spectral signal while filtering corrupted channels adaptively with only 10,225 parameters.

4. WHAT TO UTTER IN YOUR PPT (Simple Words Spoken Script)

- **Exact Words to Speak:** *"Respected committee, let me explain **SBAM** in simple terms: Satellite hyperspectral images contain noisy atmospheric water absorption bands. Standard models pass all bands straight into 3D convolutions, which spreads this noise into deep layers. What SBAM does is very simple: **BEFORE any convolution starts**, it pools the spatial patch into a per-band energy vector, runs it through an 8× reduction bottleneck, and produces an attention weight between 0 and 1 for each band. Corrupted bands get near-zero weights and are suppressed upfront through simple element-wise multiplication. It cleans the data at the physical input layer using only 10,225 parameters (3.3% of the network)."*

MODULE 2: COMPLEMENTARY BRANCH SPECTRAL ATTENTION (CBSA)

Network Stage: Stage I — Dual-Stream Spectral Feature Entry | **Parameter Footprint:** 80 params (0.03% of SGSCF-Net)

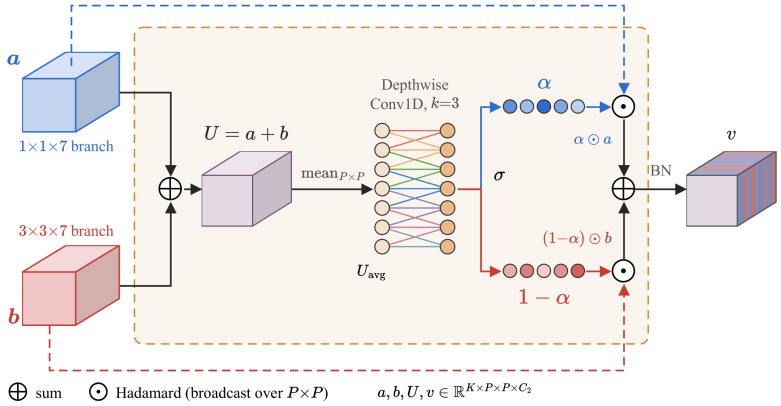

1. PROBLEM STATEMENT & ARCHITECTURAL MOTIVATION

- **Multi-Branch Redundancy Problem:** Dual-stream 3D networks (e.g. Double-Branch CNNs, A2S2K-ResNet) extract features using parallel branches. However, combining them via direct summation (a + b) or shared attention assigns identical importance to both streams, causing co-dependent, duplicated feature representations and severe parameter explosion.
- **Complementary Branch Solution:** CBSA decouples spectral and spatial-spectral modeling into two dedicated parallel 3D streams, fused via a learned gating scalar α strictly constrained by **α + (1 - α) ≡ 1**. This forces orthogonal specialization and zero branch redundancy.

2. MATHEMATICAL FORMULATION & TENSOR TRANSFORMATIONS

- **Step 1 (Dual Receptive Fields):** Recalibrated patch X■ enters two parallel 3D convolutions (K=16 filters, spectral stride=2, C■ = ■(C-7)/2■ + 1):
  Branch a (Pure Spectral): a = ReLU(BN(Conv3D_{(1×1×7)}(X■))) ∈ ■^(B×16×P×P×C■) (captures narrow inter-band absorption lines).
  Branch b (Spatial-Spectral): b = ReLU(BN(Conv3D_{(3×3×7)}(X■))) ∈ ■^(B×16×P×P×C■) (captures joint spatial context).
- **Step 2 (Spatial Pooling & Depthwise Conv1D Gate):** Spatial context is pooled over fused features U = a + b:
  U_avg = (1 / P²) ∑_{u,v} (a + b)[:, :, u, v, :] ∈ ■^(B×16×C■).
  A depthwise 1D convolution (kernel k_s=3, grouped across 16 channels, only 48 params) models cross-band dependencies:
  α = σ(Conv1D_{k_s}(U_avg)) ∈ ■^(B×16×C■).
- **Step 3 (Complementary Convex Fusion):** The streams are fused via complementary combination and 3D batch normalization:
  v = BN(α ■ a + (1 - α) ■ b) ∈ ■^(B×16×P×P×C■).
  Because α + (1 - α) ≡ 1, the branches compete for capacity: when spectral fidelity dominates, α → 1; when spatial texture dominates, (1 - α) → 1.

3. VIVA DEFENSE SHIELD & NOVELTY HIGHLIGHTS

Examiner: Why enforce α and (1 - α) instead of learning two independent attention gates α and β?


Winning Defense Answer: If α and β are learned independently, both can saturate to 1, causing high feature redundancy and doubling the feature magnitude. Enforcing the partition of unity α + (1 - α) = 1 mathematically guarantees that the branches compete and specialize into orthogonal representations without duplicating features, using only 80 parameters.

4. WHAT TO UTTER IN YOUR PPT (Simple Words Spoken Script)

- **Exact Words to Speak:** *"Moving to our second module, **CBSA** in simple terms: Existing dual-branch networks use narrow and wide 3D filters, but combine them with simple addition, which causes both branches to duplicate the exact same features. In CBSA, Branch a (1×1×7) captures pure spectral absorption lines, while Branch b (3×3×7) captures spatial context. Here is our key mathematical punchline: we compute a learned gate α, and fuse them as **α · Branch a + (1 - α) · Branch b**. Because α + (1 - α) always equals 1, the two branches are mathematically forced to specialize: when spectral fidelity is needed, α goes to 1; when spatial context dominates, (1 - α) takes over. Branch redundancy is mathematically zero, costing only 80 parameters."*

MODULE 3: SECOND-ORDER COVARIANCE FUSION GATE (SCFG)

Network Stage: Stage I ■■■ Stage II Transition Bridge (Spectral to Spatial) | **Parameter Footprint:** 82 params (0.03% of SGSCF-Net)

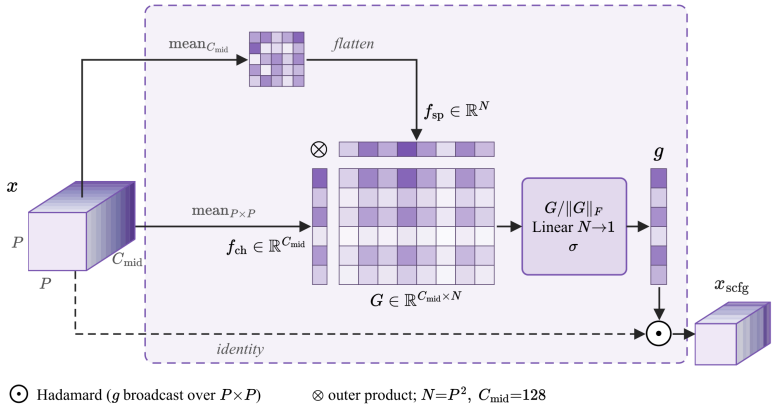

1. PROBLEM STATEMENT & ARCHITECTURAL MOTIVATION

- **The Flaw of First-Order GAP:** Standard spatial attention mechanisms and global pooling compute only the **first-order spatial mean** μ_c = (1/N) ∑ x_{c,i}. In remote sensing, this discards spatial-channel co-activations (e.g. how specific spectral channels correlate with edges vs homogeneous interiors), failing to separate spectrally similar materials like asphalt and gravel, or subtle shadow gradients.
- **Second-Order Covariance Solution:** SCFG computes a **bilinear outer product G = f_ch ⊗ f_sp** between the channel descriptor and spatial position descriptor, normalized via the Frobenius norm. This models second-order statistics with zero iterative decompositions.

2. MATHEMATICAL FORMULATION & TENSOR TRANSFORMATIONS

- **Step 1 (Spectral Collapse & Channel Expansion):** Adaptive 3D average pooling collapses spectral dimension C■ → 1; Conv3D_{(1×1×1)} expands channels 16 → C_mid = 128. Squeezing yields 2D spatial feature map x ∈ ■^(B×128×P×P) with N = P × P pixels.
- **Step 2 (Dual Descriptors):** Global channel descriptor f_ch and spatial position descriptor f_sp are extracted:
  f_ch(b, c) = (1 / N) ∑_{n=1}^N x(b, c, n) ∈ ■^(B×128), **f_sp(b, n) = (1 / 128) ∑_{c=1}^{128} x(b, c, n) ∈ ■^(B×N)**.
- **Step 3 (Bilinear Covariance Matrix via Outer Product):** Outer product captures cross-domain co-occurrences:
  G = f_ch ⊗ f_sp = f_ch f_sp^T ∈ ■^(B×128×N), where G(b, c, n) = f_ch(b, c) · f_sp(b, n).
- **Step 4 (Frobenius Normalization & Gating):** Normalized to stabilize gradient backpropagation without matrix square roots:
  G■ = G / (■G■_F + ε), where ■G■_F = √(∑_c ∑_n G(b, c, n)²) and ε = 10■■.
  Linear projection W_G ∈ ■^(1×N) produces channel gate: **g = σ(W_G G■)** ∈ ■^(B×128).
  Spatial features are modulated element-wise: **x_scfg = x ■ g**.

3. VIVA DEFENSE SHIELD & NOVELTY HIGHLIGHTS

Examiner: What physical information does the outer product f_ch ⊗ f_sp capture in remote sensing?

Winning Defense Answer: In remote sensing, a pixel's reflectance is strongly coupled to its spatial context. First-order pooling averages these out independently. The outer product captures the second-order co-occurrence: how specific spectral absorption bands vary across spatial locations. This enabled SGSCF-Net to achieve 99.34% accuracy on shadow pixels and 99.76% on gravel in Pavia University using only 82 parameters.

4. WHAT TO UTTER IN YOUR PPT (Simple Words Spoken Script)

- **Exact Words to Speak:** *"Finally, our third module, **SCFG** in simple terms: Standard networks use Global Average Pooling, which only computes the average intensity of each channel. But in remote sensing, simple averages completely miss how spectral channels interact across spatial locations—which is why standard models confuse asphalt with gravel. In SCFG, we take the channel descriptor and spatial descriptor and compute their **outer product G = f_ch ⊗ f_sp**, creating a second-order covariance matrix that captures bilinear interactions. We normalize it with the Frobenius norm so gradients stay stable, and project it into a spatial gate. This captures subtle material boundaries using only 82 parameters and lifts shadow accuracy to 99.34%."*