

Тестирование API

Тестирование реализованного API из Практического занятия 2

The screenshot shows a REST client interface with the following components:

- URL Bar:** Method: GET, URL: `{{base_url}}/products`. A dropdown menu is open showing the variable `http://localhost:3000`.
- Params:** Tabs for Params, Authorization, and Cookies. The Params tab is active, showing a table with columns Key, Value, and Description.
- Query Params:** A table with columns Key, Value, and Description.
- Body:** Tabs for Body, Cookies, Headers (7), and Test Results (1/1). The Body tab is active, showing a JSON response.
- Response Status:** 200 OK, 17 ms, 381 B.

The JSON response is as follows:

```
1 [
2   {
3     "id": 1,
4     "name": "Наушники",
5     "price": 5000
6   },
7   {
8     "id": 2,
9     "name": "Смартфон",
10    "price": 30000
11  },
12  {
13    "id": 3,
14    "name": "Ноутбук",
15    "price": 80000
16  }
17 ]
```

Рисунок 1 - Получить список всех товаров

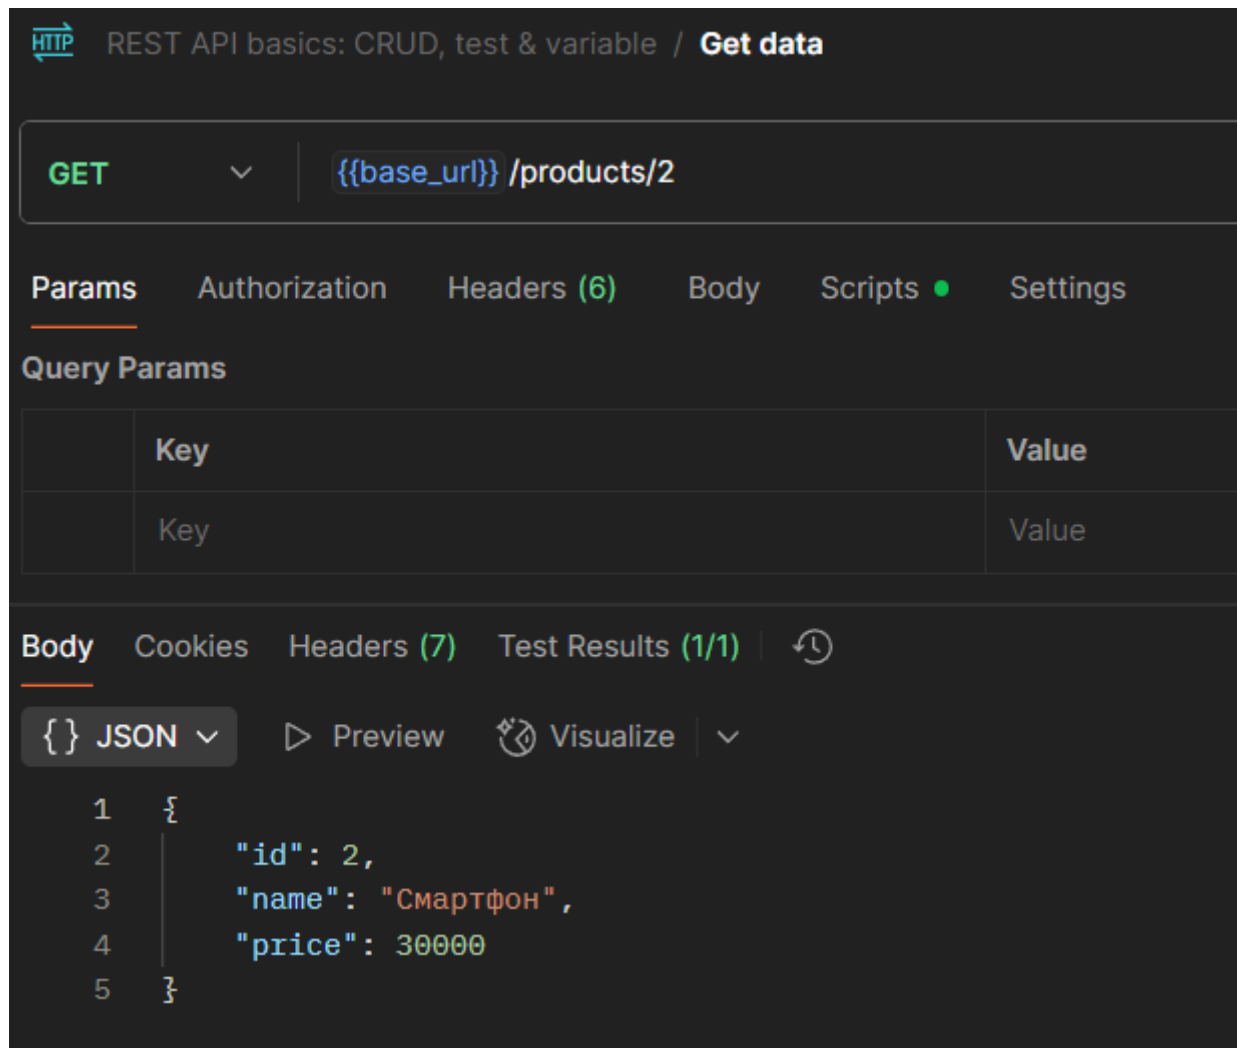


Рисунок 2 - Получить товар по ID

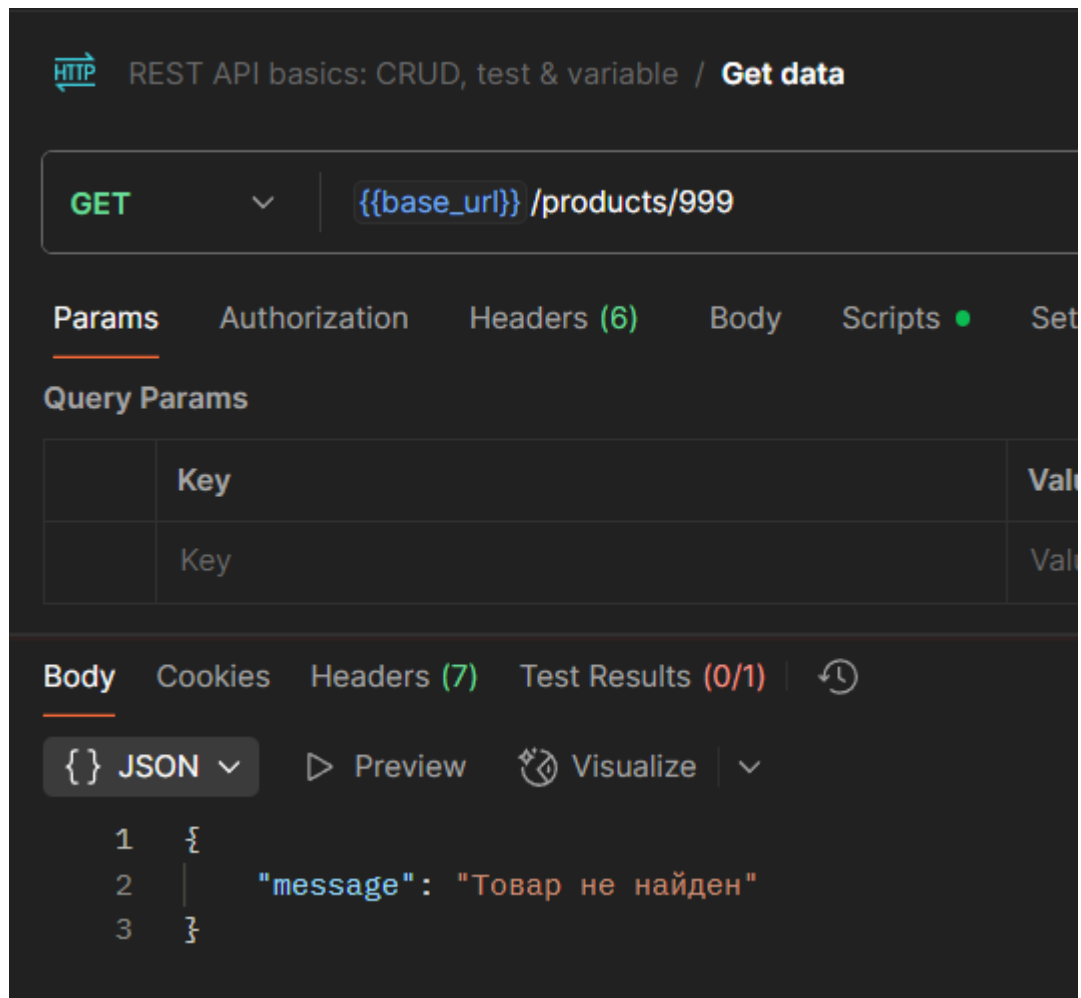


Рисунок 3 - Товар не найден

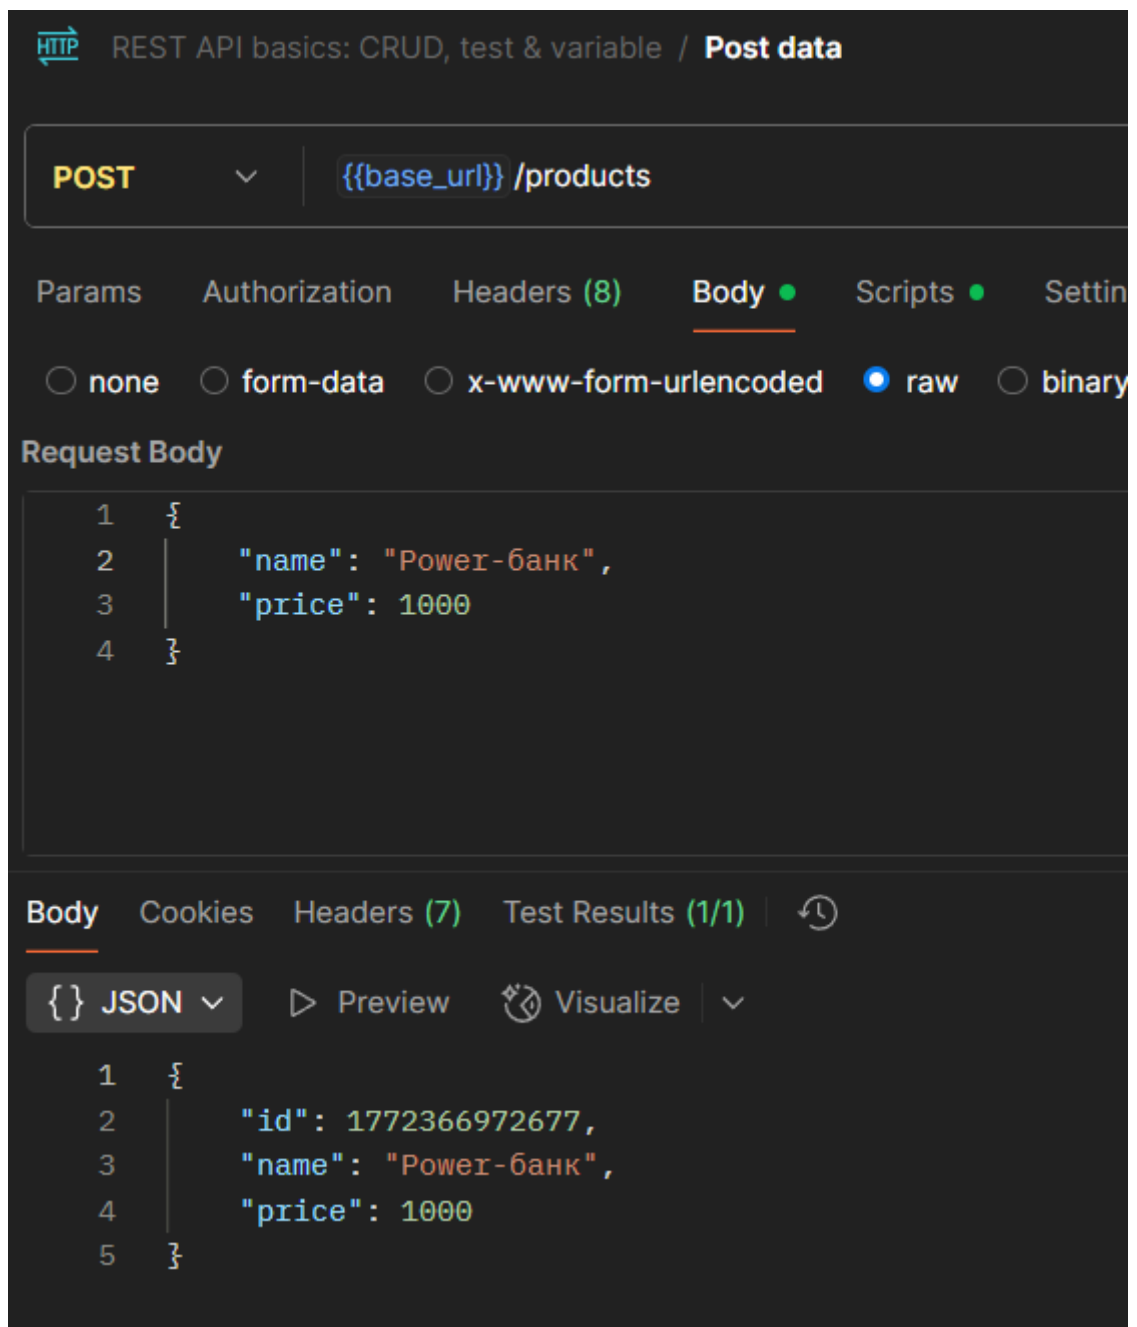


Рисунок 4 - Создать новый товар

HTTP

REST API basics: CRUD, test & variable / **Get data**

GET

▼

{{base_url}} /products

Params

Authorization

Headers (6)

Body

Scripts ●

Settings

Query Params

	Key	Value
	Key	Value

Body

Cookies

Headers (7)

Test Results (1/1)

↺

{ } JSON ▼

▶ Preview

🔍 Visualize

▼

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

{

" id ": 1,

" name ": "Наушники",

" price ": 5000

},

{

" id ": 2,

" name ": "Смартфон",

" price ": 30000

},

{

" id ": 3,

" name ": "Ноутбук",

" price ": 80000

},

{

" id ": 1772366972677,

" name ": "Power-банк",

" price ": 1000

}

]

Рисунок 5 – Проверка в списке товаров

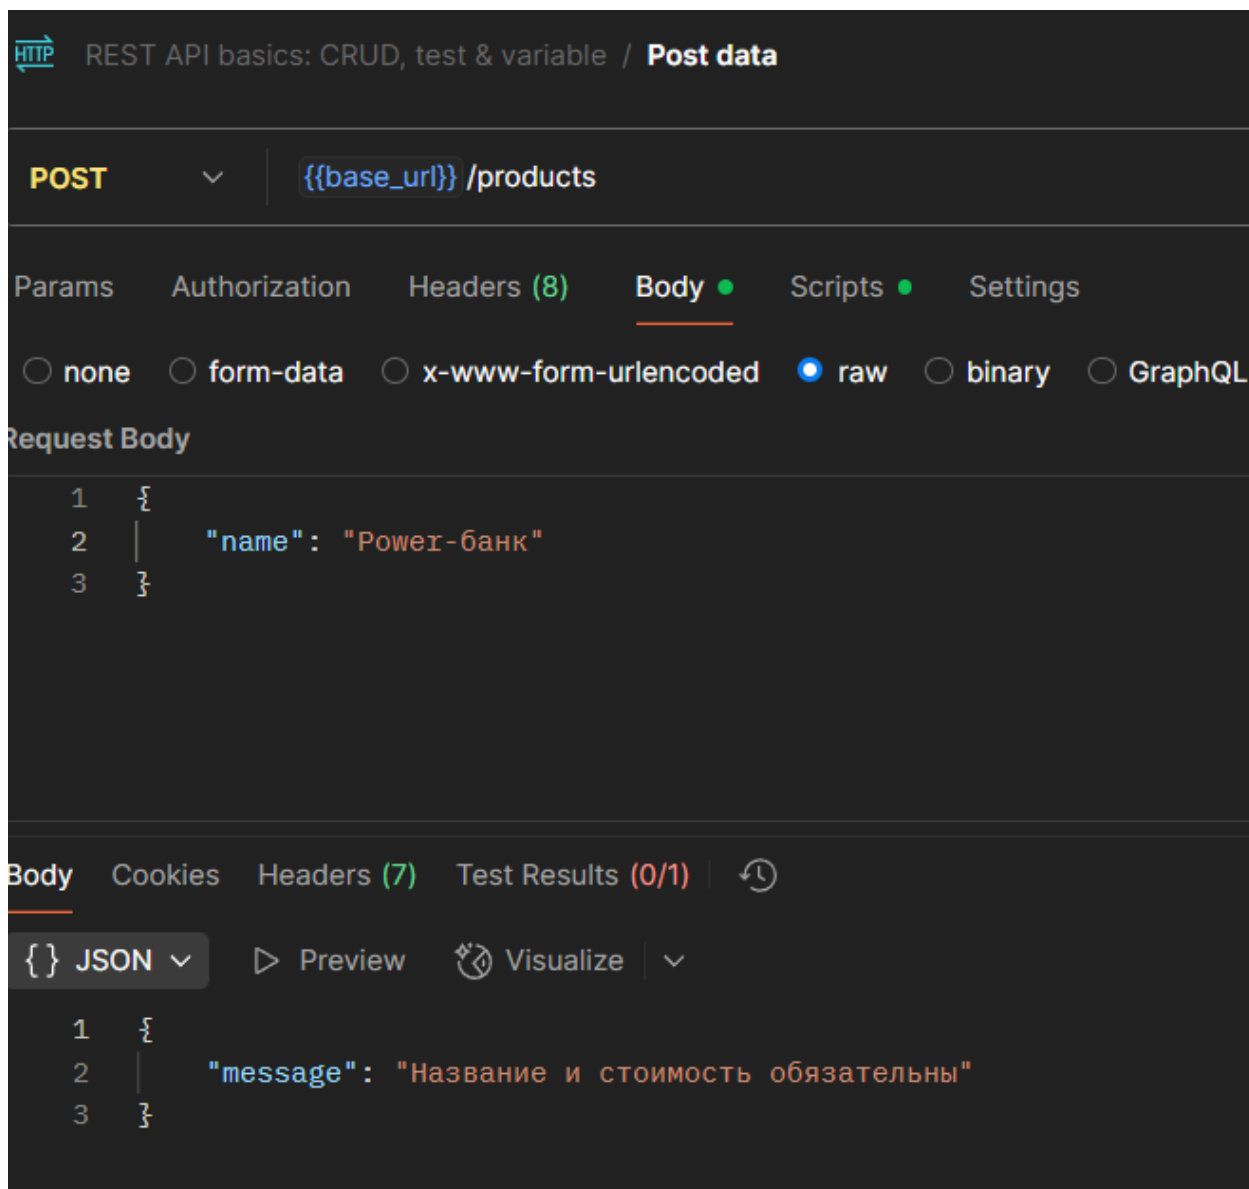


Рисунок 6 – Ошибка: не указаны обязательные поля

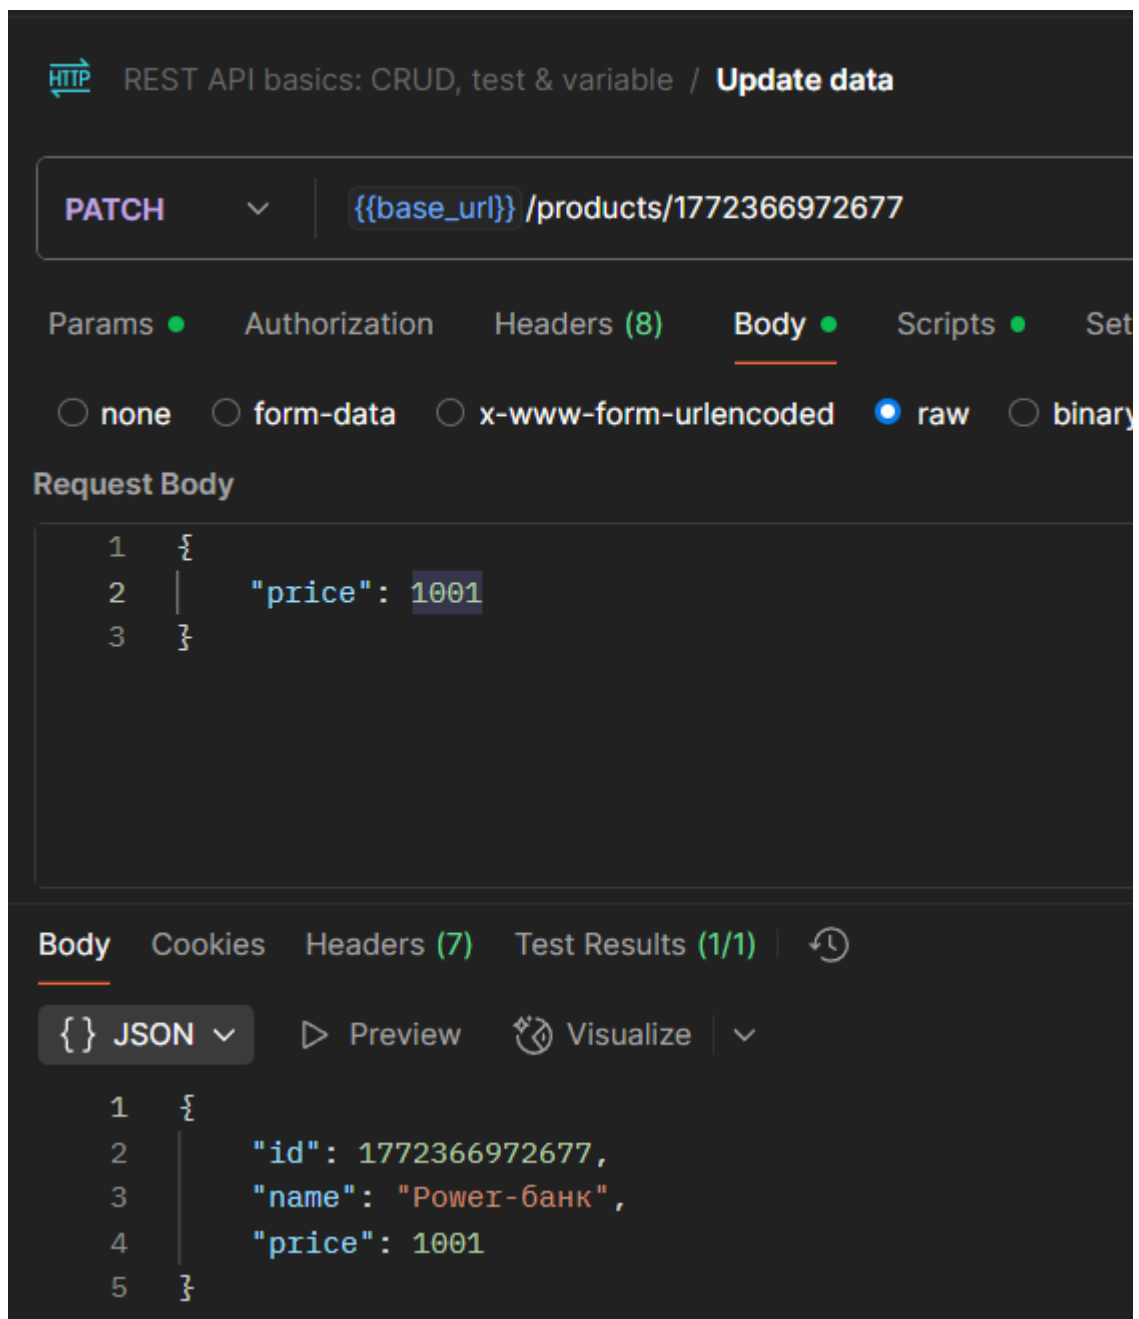


Рисунок 7 – Обновить товар

REST API basics: CRUD, test & variable / **Delete data**

DELETE ▼ | `{{base_url}} /products/1772366972677`

Params | Authorization | Headers (6) | Body | Scripts ● | Settings

Query Params

	Key	Value
	Key	Value

Body | Cookies | Headers (7) | Test Results (1/1) | ↺

`{}` **JSON** ▼ | ▶ Preview | 📄 Visualize | ▼

```
1  {
2    "message": "Товар удалён",
3    "product": {
4      "id": 1772366972677,
5      "name": "Power-банк",
6      "price": 1001
7    }
8  }
```

Рисунок 8 – Удалить товар

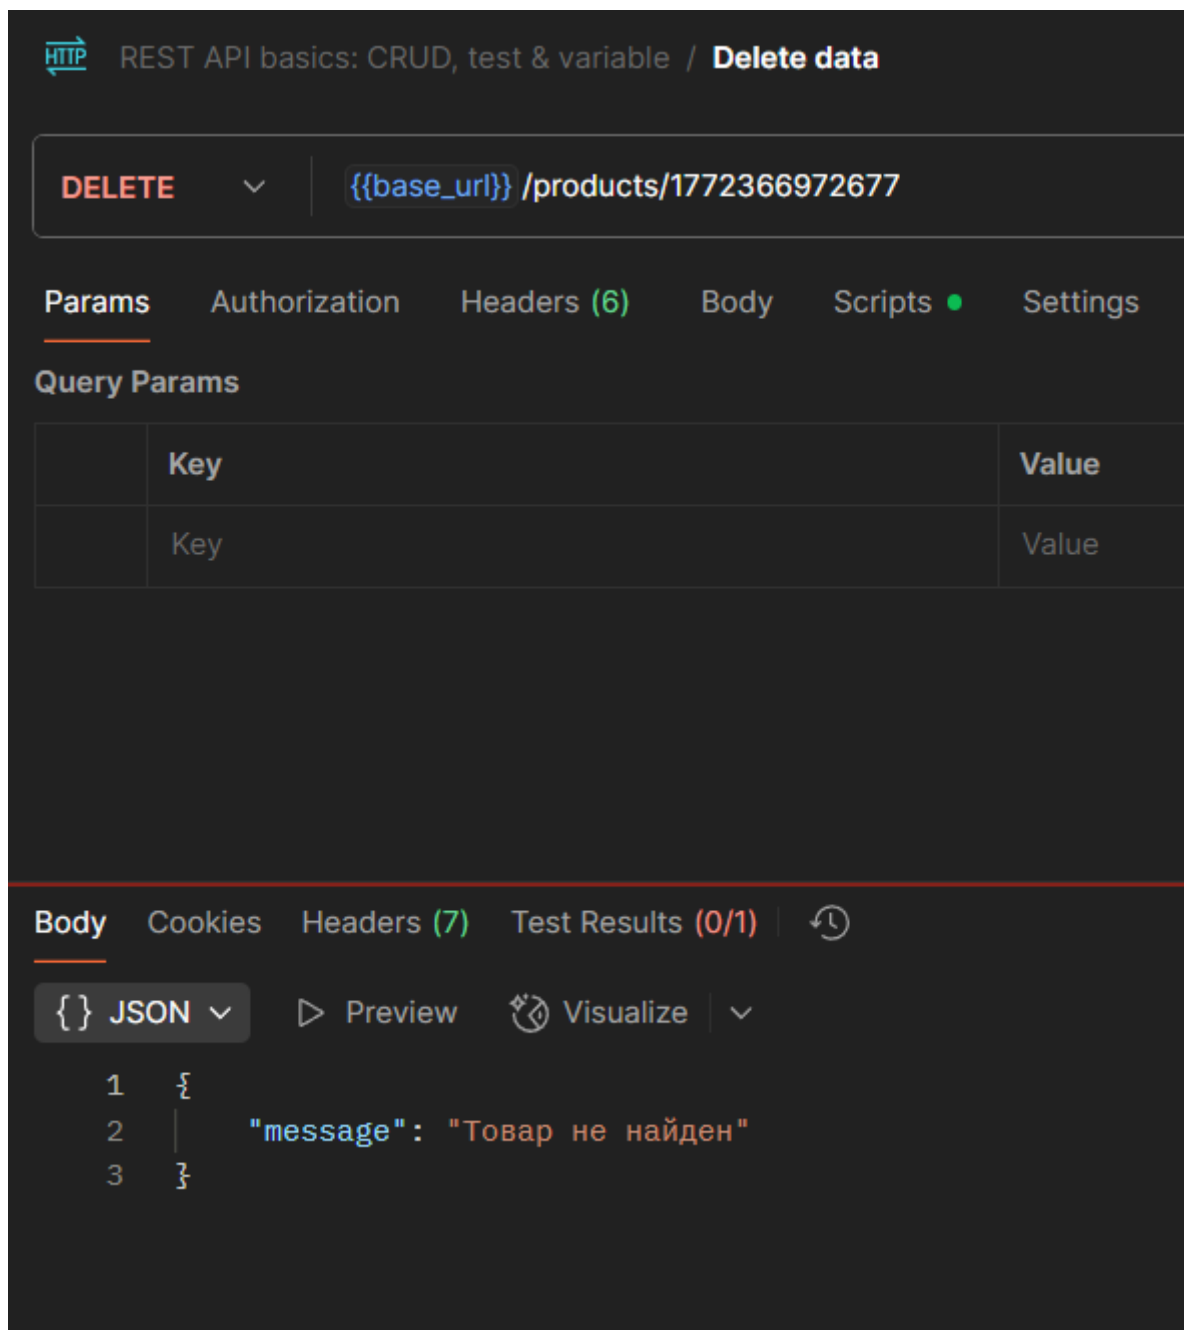


Рисунок 9 – Ошибка: удаление товара

Тестирование открытого API Numverify

The screenshot shows a REST client interface with the following details:

- Request Method:** GET
- URL:** `https://apilayer.net/api/validate?number=78005553535`
- Params:**

Key	Value
access_key	
number	78005553535
- Body:** JSON response:

```
1  {
2    "valid": true,
3    "number": "78005553535",
4    "local_format": "88005553535",
5    "international_format": "+78005553535",
6    "country_prefix": "+7",
7    "country_code": "RU",
8    "country_name": "Russian Federation",
9    "location": "",
10   "carrier": "",
11   "line_type": "toll_free"
12 }
```

Рисунок 10 – Валидация международного номера

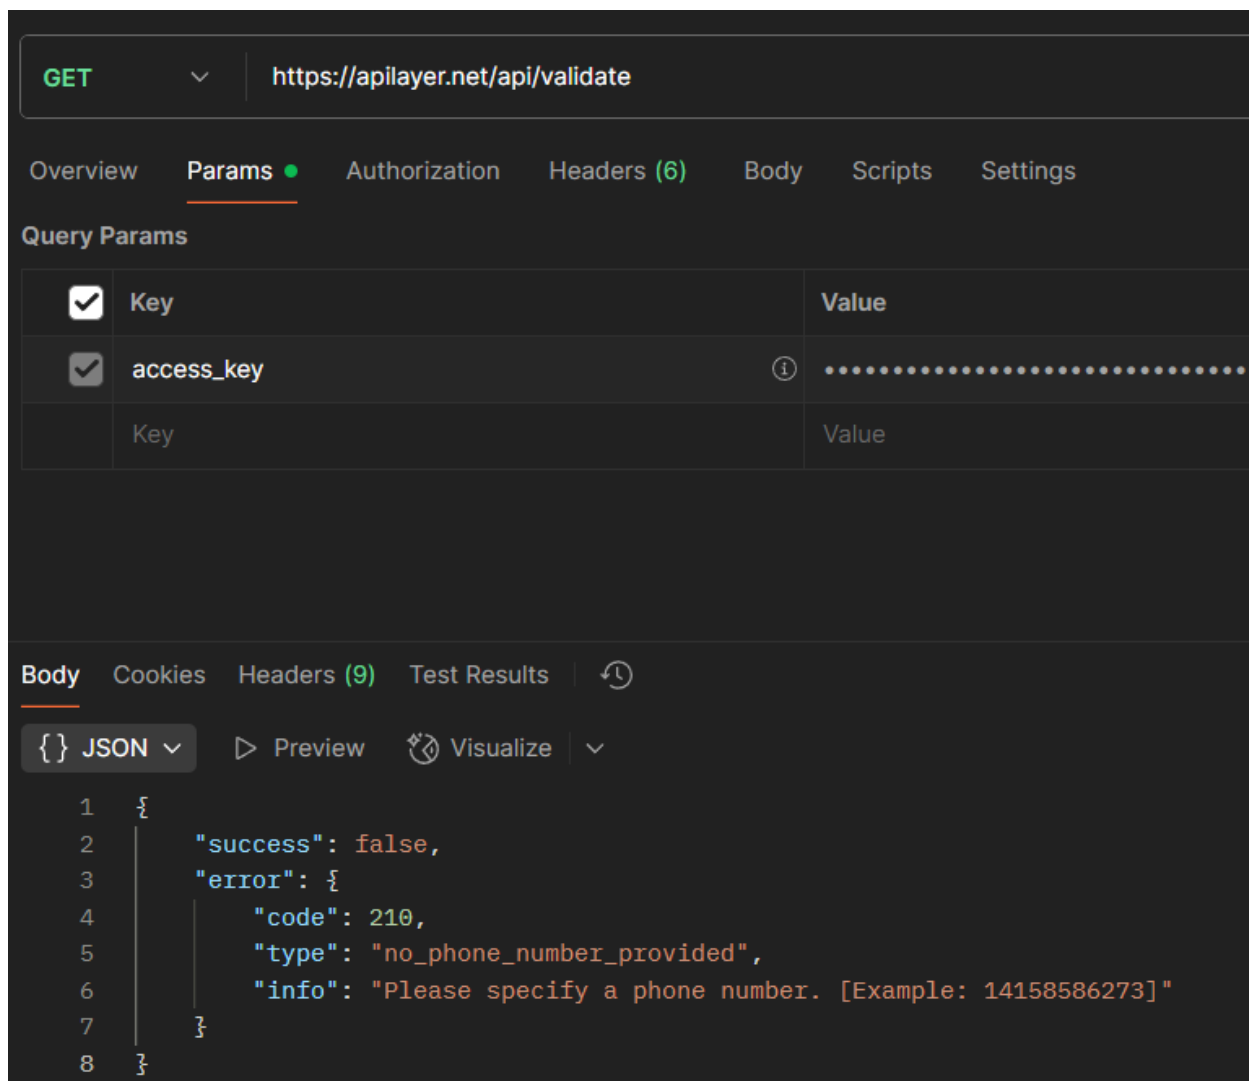


Рисунок 11 – Запрос без номера

HTTP Numverify / Validate / **New Request**

GET ▼ `https://apilayer.net/api/validate?number=78005553535&country_code=US`

Overview **Params** ● Authorization Headers (6) Body Scripts Settings

Query Params

☒	Key	Value
☒	access_key	
☒	number	78005553535
☒	country_code	US
	Key	Value

Body Cookies Headers (10) Test Results ↺

{} **JSON** ▼ ▶ Preview 🔗 Visualize ▼

```
1  {
2    "valid": false,
3    "number": "178005553535",
4    "local_format": "",
5    "international_format": "",
6    "country_prefix": "+1",
7    "country_code": "AS",
8    "country_name": "American Samoa",
9    "location": "",
10   "carrier": "",
11   "line_type": null
12 }
```

Рисунок 12 – Валидация национального номера с указанием страны

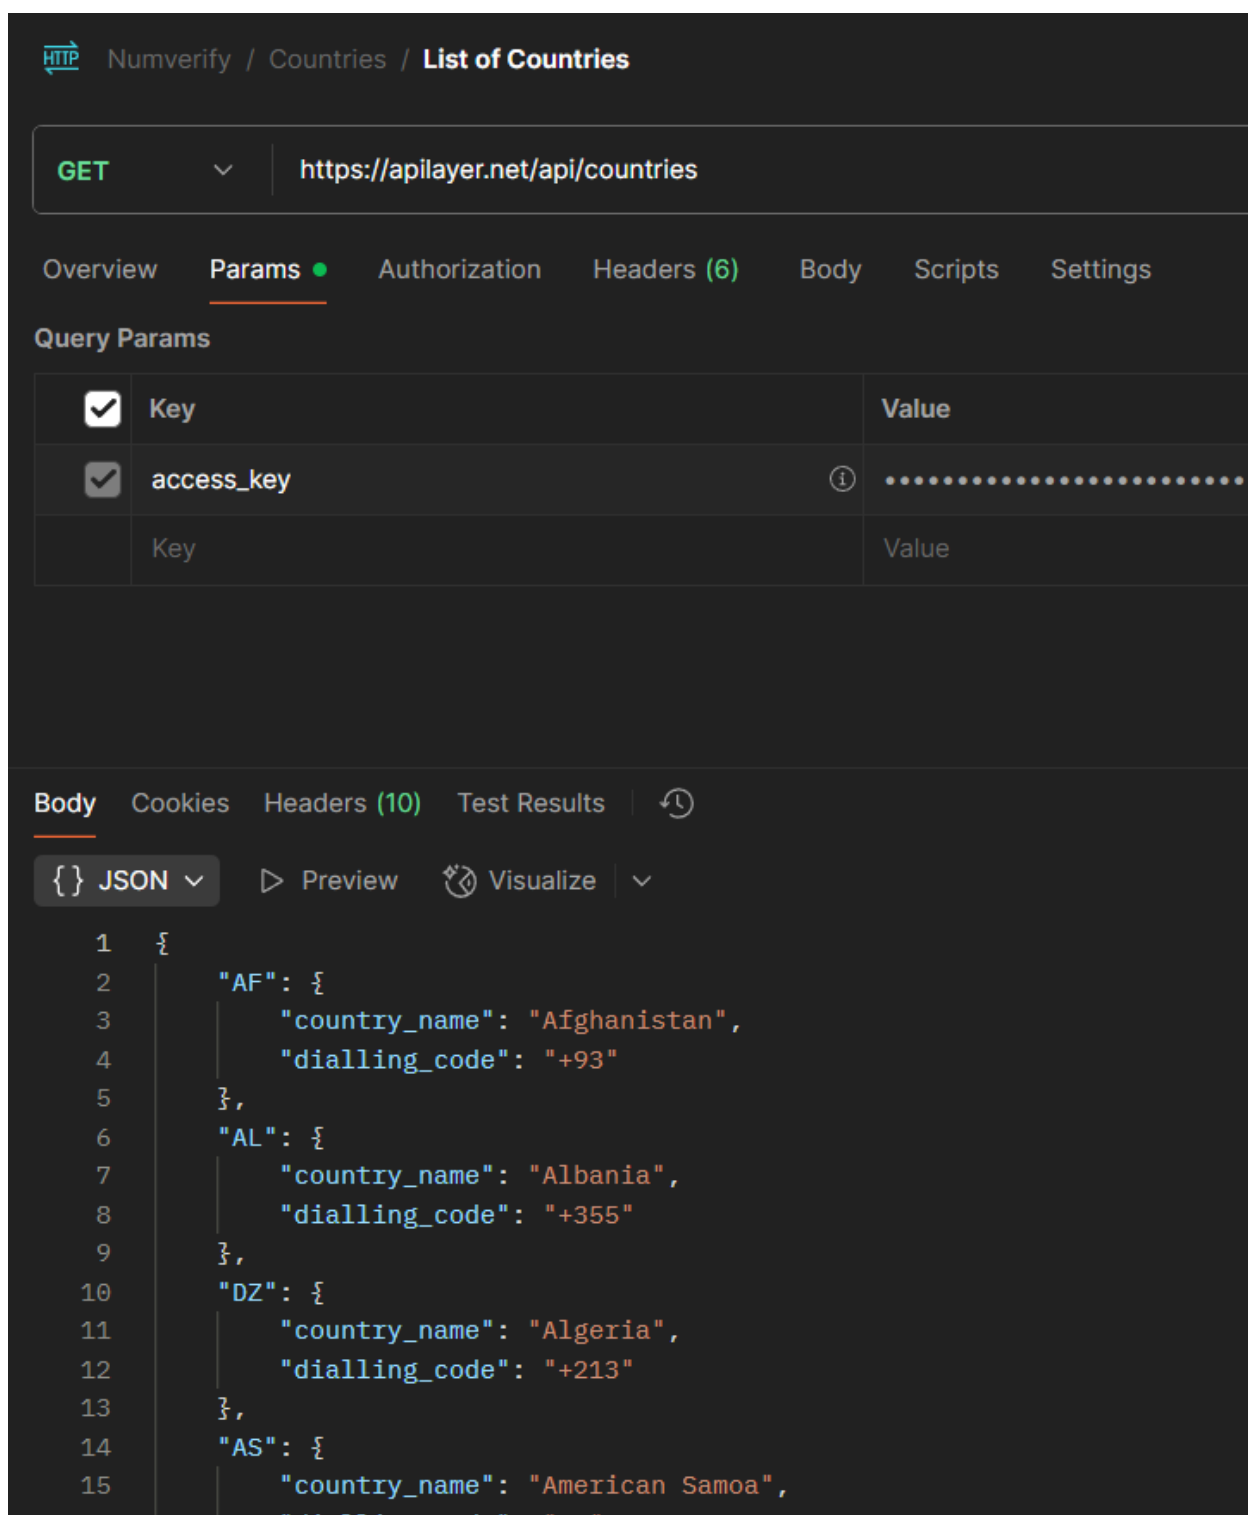


Рисунок 13 – Список поддерживаемых стран

HTTP Numverify / Validate / **Validate Phone Number**

GET ▼ | <https://apilayer.net/api/validate?number=441179287870>

Overview **Params** • Authorization Headers (6) Body Scripts Settings

Query Params

☒	Key	Value
☒	access_key	
☒	number	441179287870
	Key	Value

Body Cookies Headers (10) Test Results ↺

{ } JSON ▼ ▶ Preview 🔗 Visualize ▼

```
1 {
2   "valid": true,
3   "number": "441179287870",
4   "local_format": "01179287870",
5   "international_format": "+441179287870",
6   "country_prefix": "+44",
7   "country_code": "GB",
8   "country_name": "United Kingdom of Great Britain and Northern Ireland",
9   "location": "Bristol",
10  "carrier": "",
11  "line_type": "landline"
12 }
```

Рисунок 14 – Валидация номера другой страны