

ФЕДЕРАЛЬНОЕ АГЕНТСТВО СВЯЗИ
ФЕДЕРАЛЬНОЕ ГОСУДАРСТВЕННОЕ БЮДЖЕТНОЕ ОБРАЗОВАТЕЛЬНОЕ
УЧРЕЖДЕНИЕ ВЫСШЕГО ОБРАЗОВАНИЯ
«САНКТ-ПЕТЕРБУРГСКИЙ ГОСУДАРСТВЕННЫЙ УНИВЕРСИТЕТ
ТЕЛЕКОММУНИКАЦИЙ ИМ. ПРОФ. М.А. БОНЧ-БРУЕВИЧА»
(СПбГУТ)

Факультет Инфокоммуникационных сетей и систем

Кафедра Защищенных систем связи

Лабораторная работа №1

Выполнили студенты группы ИКТЗ-83:

Громов А.А., Миколаени М.С., Мазеин Д.С.

(Ф.И.О., № группы)

(подпись)

Проверил:

Казанцев А.А.

(уч. степень, уч. звание, Ф.И.О.)

(подпись)

Санкт-Петербург

2021

Часть 1 - Настройка фильтрации пакетов (фаервол)

```
File Actions Edit View Help
iktz-83@kali ~$ sudo iptables -L
[sudo] password for iktz-83:
Chain INPUT (policy ACCEPT)
target prot opt source destination
Chain FORWARD (policy ACCEPT)
target prot opt source destination
Chain OUTPUT (policy ACCEPT)
target prot opt source destination
iktz-83@kali ~$
```

Рис. 1 Выводим список правил iptables.

```
iktz-83@kali ~$ sudo iptables -L -v
Chain INPUT (policy ACCEPT 0 packets, 0 bytes)
pkts bytes target prot opt in out source destination
Chain FORWARD (policy ACCEPT 0 packets, 0 bytes)
pkts bytes target prot opt in out source destination
Chain OUTPUT (policy ACCEPT 0 packets, 0 bytes)
pkts bytes target prot opt in out source destination
iktz-83@kali ~$
```

Рис. 2 Выводим список правил iptables подробнее.

```
iktz-83@kali ~$ sudo iptables -S
-P INPUT ACCEPT
-P FORWARD ACCEPT
-P OUTPUT ACCEPT
iktz-83@kali ~$
```

Рис. 3 Выводим список команд необходимых для активации правил и политик.

```
iktz-83@kali ~$ sudo iptables -A INPUT -p tcp -m tcp --dport 22 -j ACCEPT
iktz-83@kali ~$ sudo iptables -A INPUT -p tcp -m tcp --dport 80 -j ACCEPT
iktz-83@kali ~$ sudo iptables -L
Chain INPUT (policy ACCEPT)
target prot opt source destination
ACCEPT tcp -- anywhere anywhere tcp dpt:ssh
ACCEPT tcp -- anywhere anywhere tcp dpt:http
Chain FORWARD (policy ACCEPT)
target prot opt source destination
Chain OUTPUT (policy ACCEPT)
target prot opt source destination
iktz-83@kali ~$
```

Рис. 4 Разрешаем трафик на 80 и 22 порты для tcp протокола.

```

iktz-83@kali ~$ sudo iptables -D INPUT -p tcp -m tcp --dport 22 -j ACCEPT
iktz-83@kali ~$ sudo iptables -L
Chain INPUT (policy ACCEPT)
target prot opt source destination
ACCEPT tcp -- anywhere anywhere tcp dpt:http

Chain FORWARD (policy ACCEPT)
target prot opt source destination

Chain OUTPUT (policy ACCEPT)
target prot opt source destination
iktz-83@kali ~$

```

Рис. 5 Удаляем разрешение для порта 22.

```

iktz-83@kali ~$ sudo iptables -I INPUT -m state --state ESTABLISHED,RELATED -j ACCEPT
iktz-83@kali ~$ sudo iptables -L
Chain INPUT (policy ACCEPT)
target prot opt source destination
ACCEPT all -- anywhere anywhere state RELATED,ESTABLISHED
ACCEPT tcp -- anywhere anywhere tcp dpt:http

Chain FORWARD (policy ACCEPT)
target prot opt source destination

Chain OUTPUT (policy ACCEPT)
target prot opt source destination
iktz-83@kali ~$

```

Рис. 6 Правило, позволяющее устанавливать исходящее соединение.

```

iktz-83@kali ~$ sudo iptables -P OUTPUT ACCEPT
iktz-83@kali ~$ sudo iptables -P INPUT DROP
iktz-83@kali ~$ sudo iptables -L
Chain INPUT (policy DROP)
target prot opt source destination
ACCEPT all -- anywhere anywhere state RELATED,ESTABLISHED
ACCEPT tcp -- anywhere anywhere tcp dpt:http

Chain FORWARD (policy ACCEPT)
target prot opt source destination

Chain OUTPUT (policy ACCEPT)
target prot opt source destination
iktz-83@kali ~$

```

Рис. 7 Запрещаем все входящие и разрешаем все исходящие.

```

target prot opt source destination
iktz-83@kali ~$ sudo iptables -A INPUT -p tcp --tcp-flags ALL NONE -j DROP
iktz-83@kali ~$ sudo iptables -A INPUT -p tcp ! --syn -m state --state NEW -j DROP
iktz-83@kali ~$ sudo iptables -A INPUT -p tcp --tcp-flags ALL ALL -j DROP
iktz-83@kali ~$ sudo iptables -L
Chain INPUT (policy DROP)
target prot opt source destination
ACCEPT all -- anywhere anywhere state RELATED,ESTABLISHED
ACCEPT tcp -- anywhere anywhere tcp dpt:http
DROP tcp -- anywhere anywhere tcp flags:FIN,SYN,RST,PSH,ACK,URG/NONE
DROP tcp -- anywhere anywhere tcp flags:!FIN,SYN,RST,ACK/SYN state NEW
DROP tcp -- anywhere anywhere tcp flags:FIN,SYN,RST,PSH,ACK,URG/FIN,SYN,RST,PSH,ACK,URG


Chain FORWARD (policy ACCEPT)
target prot opt source destination

Chain OUTPUT (policy ACCEPT)
target prot opt source destination
iktz-83@kali ~$

```


Рис. 8 Правила для блокировки наиболее распространенных атак.

Часть 2 - Мониторинг журналов с использованием logcheck

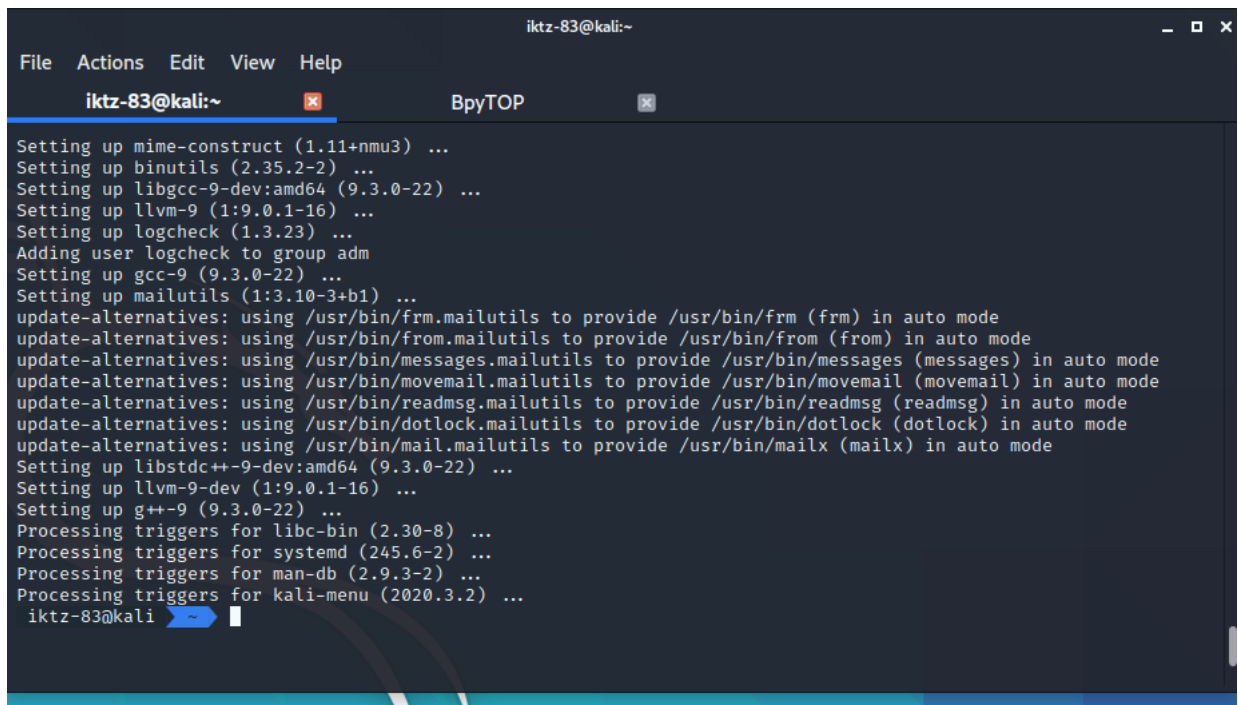

```
iktz-83@kali:~  
File Actions Edit View Help  
iktz-83@kali:~ BpyTOP  
Setting up mime-construct (1.11+nmu3) ...  
Setting up binutils (2.35.2-2) ...  
Setting up libgcc-9-dev:amd64 (9.3.0-22) ...  
Setting up llvm-9 (1:9.0.1-16) ...  
Setting up logcheck (1.3.23) ...  
Adding user logcheck to group adm  
Setting up gcc-9 (9.3.0-22) ...  
Setting up mailutils (1:3.10-3+b1) ...  
update-alternatives: using /usr/bin/frm.mailutils to provide /usr/bin/frm (frm) in auto mode  
update-alternatives: using /usr/bin/from.mailutils to provide /usr/bin/from (from) in auto mode  
update-alternatives: using /usr/bin/messages.mailutils to provide /usr/bin/messages (messages) in auto mode  
update-alternatives: using /usr/bin/movemail.mailutils to provide /usr/bin/movemail (movemail) in auto mode  
update-alternatives: using /usr/bin/readmsg.mailutils to provide /usr/bin/readmsg (readmsg) in auto mode  
update-alternatives: using /usr/bin/dotlock.mailutils to provide /usr/bin/dotlock (dotlock) in auto mode  
update-alternatives: using /usr/bin/mail.mailutils to provide /usr/bin/mailx (mailx) in auto mode  
Setting up libstdc++-9-dev:amd64 (9.3.0-22) ...  
Setting up llvm-9-dev (1:9.0.1-16) ...  
Setting up g++-9 (9.3.0-22) ...  
Processing triggers for libc-bin (2.30-8) ...  
Processing triggers for systemd (245.6-2) ...  
Processing triggers for man-db (2.9.3-2) ...  
Processing triggers for kali-menu (2020.3.2) ...  
iktz-83@kali ~
```

Рис. 9

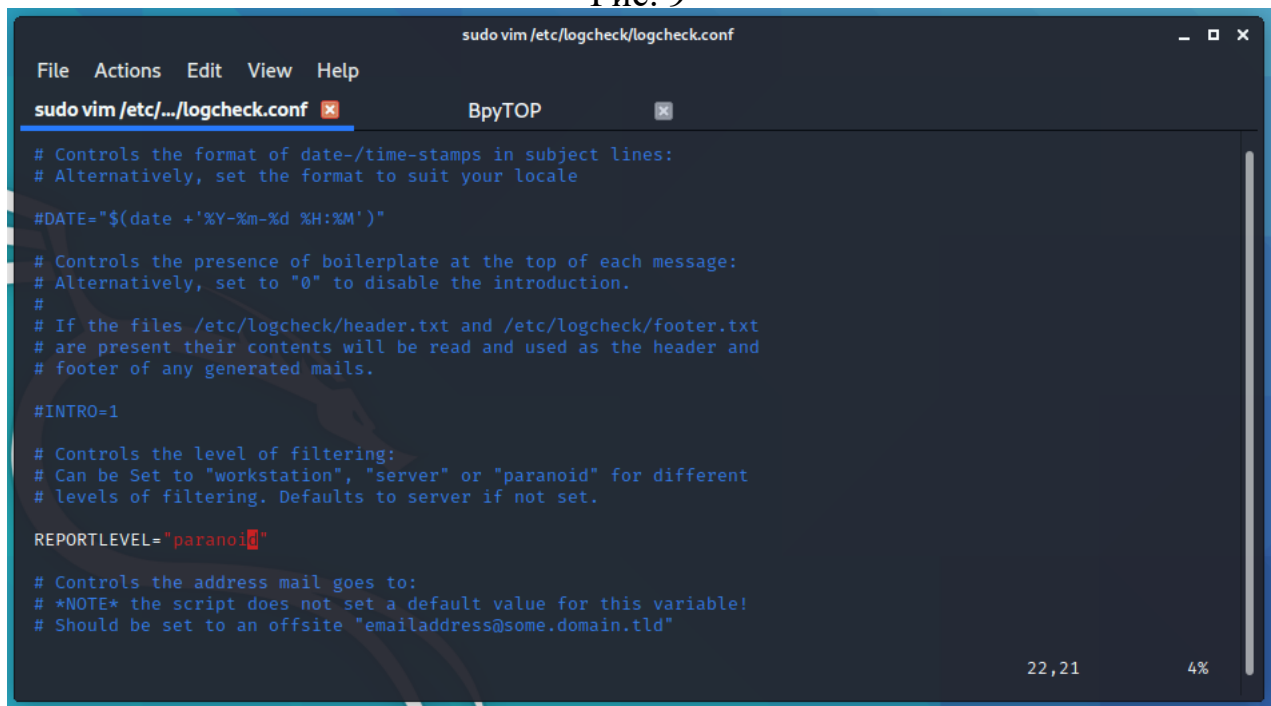

```
sudo vim /etc/logcheck/logcheck.conf  
File Actions Edit View Help  
sudo vim /etc/.../logcheck.conf BpyTOP  
# Controls the format of date-/time-stamps in subject lines:  
# Alternatively, set the format to suit your locale  
  
#DATE="$(date +%Y-%m-%d %H:%M)"  
  
# Controls the presence of boilerplate at the top of each message:  
# Alternatively, set to "0" to disable the introduction.  
#  
# If the files /etc/logcheck/header.txt and /etc/logcheck/footer.txt  
# are present their contents will be read and used as the header and  
# footer of any generated mails.  
  
#INTRO=1  
  
# Controls the level of filtering:  
# Can be Set to "workstation", "server" or "paranoid" for different  
# levels of filtering. Defaults to server if not set.  
  
REPORTLEVEL="paranoid"  
  
# Controls the address mail goes to:  
# *NOTE* the script does not set a default value for this variable!  
# Should be set to an offsite "emailaddress@some.domain.tld"  
  
22,21 4%
```

Рис. 10

```
File Actions Edit View Help
iktz-83@kali:~/var/log BpyTOP
Apr 27 15:15:01 kali CRON[1330]: (root) CMD (command -v debian-sa1 > /dev/null && debian-sa1 1 1)
Apr 27 15:17:01 kali CRON[1634]: (root) CMD ( cd / && run-parts --report /etc/cron.hourly)
Apr 27 15:18:19 kali systemd[1]: Starting Cleanup of Temporary Directories...
Apr 27 15:18:19 kali systemd-tmpfiles[1769]: /usr/lib/tmpfiles.d/iodined.conf:1: Line references path below legacy directory /var/run/, updating /var/run/iodine -> /run/iodine; please update the tmpfiles.d/ drop-in file accordingly.
Apr 27 15:18:19 kali systemd[1]: systemd-tmpfiles-clean.service: Succeeded.
Apr 27 15:18:19 kali systemd[1]: Finished Cleanup of Temporary Directories.
Apr 27 15:25:01 kali CRON[1953]: (root) CMD (command -v debian-sa1 > /dev/null && debian-sa1 1 1)
Apr 27 15:30:36 kali systemd[1]: Reloading.
Apr 27 15:30:36 kali systemd[1]: Reloading.
Apr 27 15:30:36 kali systemd[1]: Reloading.
Apr 27 15:30:37 kali systemd[1]: Reloading.
Apr 27 15:30:37 kali systemd[1]: Reloading.
Apr 27 15:30:37 kali systemd[1]: Started Daily exim4-base housekeeping.
Apr 27 15:30:39 kali systemd[1]: Reloading.
Apr 27 15:34:19 kali kernel: [ 1872.404733] hrtimer: interrupt took 4134907 ns
Apr 27 15:35:01 kali CRON[4140]: (root) CMD (command -v debian-sa1 > /dev/null && debian-sa1 1 1)
Apr 27 15:39:01 kali CRON[4251]: (root) CMD ([ -x /usr/lib/php/sessionclean ] && if [ ! -d /run/systemd/system ]; then /usr/lib/php/sessionclean; fi)
Apr 27 15:39:02 kali systemd[1]: Starting Clean php session files...
Apr 27 15:39:02 kali systemd[1]: phpsessionclean.service: Succeeded.
Apr 27 15:39:02 kali systemd[1]: Finished Clean php session files.
Apr 27 15:45:01 kali CRON[5001]: (root) CMD (command -v debian-sa1 > /dev/null && debian-sa1 1 1)
iktz-83@kali ~ /var/log
```

Рис. 11

Часть 3 - Установка и настройка netfilter

```
File Actions Edit View Help
iktz-83@kali:~ BpyTOP
iktz-83@kali ~ sudo iptables -A INPUT -i eth0 -m conntrack --ctstate ESTABLISHED,RELATED -j ACCEPT
iktz-83@kali ~ sudo iptables -A INPUT -i eth0 -p tcp --dport 80 -m conntrack --ctstate NEW -j ACCEPT
iktz-83@kali ~ sudo iptables -L
Chain INPUT (policy DROP)
target prot opt source destination
ACCEPT all -- anywhere anywhere state RELATED,ESTABLISHED
ACCEPT tcp -- anywhere anywhere tcp dpt:http
DROP tcp -- anywhere anywhere tcp flags:FIN,SYN,RST,PSH,ACK,URG/NONE
DROP tcp -- anywhere anywhere tcp flags:!FIN,SYN,RST,ACK/SYN state NEW
DROP tcp -- anywhere anywhere tcp flags:FIN,SYN,RST,PSH,ACK,URG/FIN,SYN,RST,PSH,ACK,URG
ACCEPT all -- anywhere anywhere ctstate RELATED,ESTABLISHED
ACCEPT tcp -- anywhere anywhere tcp dpt:http ctstate NEW
Chain FORWARD (policy ACCEPT)
target prot opt source destination
Chain OUTPUT (policy ACCEPT)
target prot opt source destination
```

Рис. 12

```
iktz-83@kali ~ sudo iptables -A INPUT -m conntrack --ctstate NEW,INVALID -p tcp --tcp-flags SYN,ACK SYN,ACK -j REJECT --reject-with tcp-reset
iktz-83@kali ~ sudo iptables -L
Chain INPUT (policy DROP)
target prot opt source destination
ACCEPT all -- anywhere anywhere state RELATED,ESTABLISHED
ACCEPT tcp -- anywhere anywhere tcp dpt:http
DROP tcp -- anywhere anywhere tcp flags:FIN,SYN,RST,PSH,ACK,URG/NONE
DROP tcp -- anywhere anywhere tcp flags:!FIN,SYN,RST,ACK/SYN state NEW
DROP tcp -- anywhere anywhere tcp flags:FIN,SYN,RST,PSH,ACK,URG/FIN,SYN,RST,PSH,ACK,URG
ACCEPT all -- anywhere anywhere ctstate RELATED,ESTABLISHED
ACCEPT tcp -- anywhere anywhere tcp dpt:http ctstate NEW
REJECT tcp -- anywhere anywhere ctstate INVALID,NEW tcp flags:SYN,ACK/SYN,ACK reject-with tcp-reset
Chain FORWARD (policy ACCEPT)
target prot opt source destination
Chain OUTPUT (policy ACCEPT)
target prot opt source destination
iktz-83@kali ~
```

Рис. 13

Часть 4 - Осуществить защиту файловой системы.

```

iktz-83@kali ~$ sudo iptables -t nat -A POSTROUTING -o eth0 -j MASQUERADE
iktz-83@kali ~$ sudo iptables -A FORWARD -i wlan0 -o eth0 -j ACCEPT
iktz-83@kali ~$ cat /proc/sys/net/ipv4/ip_forward
0
iktz-83@kali ~$ sudo bash -c 'echo 1 > /proc/sys/net/ipv4/ip_forward'
iktz-83@kali ~$ cat /proc/sys/net/ipv4/ip_forward
1
iktz-83@kali ~$

```

Рис. 14

```

Do you want to continue? [Y/n] y
Get:1 http://mirror-1.truenetwork.ru/kali kali-rolling/main amd64 netfilter-persistent all 1.0.15 [11.0 kB]
Get:2 http://mirror-1.truenetwork.ru/kali kali-rolling/main amd64 iptables-persistent all 1.0.15 [12.4 kB]
Fetched 23.4 kB in 1s (17.8 kB/s)
Preconfiguring packages ...
Selecting previously unselected package netfilter-persistent.
(Reading database ... 277664 files and directories currently installed.)
Preparing to unpack .../netfilter-persistent_1.0.15_all.deb ...
Unpacking netfilter-persistent (1.0.15) ...
Selecting previously unselected package iptables-persistent.
Preparing to unpack .../iptables-persistent_1.0.15_all.deb ...
Unpacking iptables-persistent (1.0.15) ...
Setting up netfilter-persistent (1.0.15) ...
update-rc.d: We have no instructions for the netfilter-persistent init script.
update-rc.d: It looks like a non-network service, we enable it.
netfilter-persistent.service is a disabled or a static unit, not starting it.
Setting up iptables-persistent (1.0.15) ...
update-alternatives: using /lib/systemd/system/netfilter-persistent.service to provide /lib/systemd/system/iptables.service (iptables.service) in auto mode
Processing triggers for systemd (245.6-2) ...
Processing triggers for man-db (2.9.3-2) ...
Processing triggers for kali-menu (2020.3.2) ...
iktz-83@kali ~$

```

Рис. 15

Часть 6 - Установка LOIC на Kali Linux.

```

iktz-83@kali ~$ wget http://ftp.br.debian.org/debian/pool/main/g/git/git-core_2.1.4-2.1+deb8u6_all.deb
--2021-04-27 16:06:03-- http://ftp.br.debian.org/debian/pool/main/g/git/git-core_2.1.4-2.1+deb8u6_all.deb
Resolving ftp.br.debian.org (ftp.br.debian.org)... 200.236.31.3, 2801:82:80ff:8000::4
Connecting to ftp.br.debian.org (ftp.br.debian.org)|200.236.31.3|:80... connected.
HTTP request sent, awaiting response... 200 OK
Length: 1506 (1.5K) [application/vnd.debian.binary-package]
Saving to: 'git-core_2.1.4-2.1+deb8u6_all.deb'

git-core_2.1.4-2.1+deb8u6_all.d 100%[=====] 1.47K --KB/s in 0s

2021-04-27 16:06:04 (50.3 MB/s) - 'git-core_2.1.4-2.1+deb8u6_all.deb' saved [1506/1506]

```

Рис. 16

```

iktz-83@kali ~$ sudo dpkg -i git-core_2.1.4-2.1+deb8u6_all.deb
Selecting previously unselected package git-core.
(Reading database ... 277690 files and directories currently installed.)
Preparing to unpack git-core_2.1.4-2.1+deb8u6_all.deb ...
Unpacking git-core (1:2.1.4-2.1+deb8u6) ...
Setting up git-core (1:2.1.4-2.1+deb8u6) ...
iktz-83@kali ~$

```

Рис. 17

```

iktz-83@kali ~$ sudo apt list --installed | grep git-core

WARNING: apt does not have a stable CLI interface. Use with caution in scripts.

git-core/now 1:2.1.4-2.1+deb8u6 all [installed,local]
iktz-83@kali ~$

```

Рис. 18

```

Processing triggers for kali-menu (2020.3.2) ...
iktz-83@kali ~$ sudo apt-key adv --keyserver hkp://keyserver.ubuntu.com:80 --recv-keys 3FA7E0328081BFF6A14DA29AA6A19B38D3D831EF
Executing: /tmp/apt-key-gpg/home.LopYZGDV0E/gpg.1.sh --keyserver hkp://keyserver.ubuntu.com:80 --recv-keys 3FA7E0328081BFF6A14DA29AA6A19B38D3D831EF

gpg: key A6A19B38D3D831EF: public key "Xamarin Public Jenkins (auto-signing) <releng@xamarin.com>" imported
gpg: Total number processed: 1
gpg: imported: 1

```

Рис. 19


```

iktz-83@kali ~$ mkdir loic
iktz-83@kali ~$ cd loic
iktz-83@kali ~/loic$ ls -l
total 0
iktz-83@kali ~/loic$ wget https://www.dropbox.com/s/m2gqmq8b4v5c5ib/loic.sh
--2021-04-27 16:31:46-- https://www.dropbox.com/s/m2gqmq8b4v5c5ib/loic.sh
Resolving www.dropbox.com (www.dropbox.com)... 162.125.71.18, 2620:100:6026:18::a27d:4612
Connecting to www.dropbox.com (www.dropbox.com)|162.125.71.18|:443... connected.
HTTP request sent, awaiting response... 301 Moved Permanently
Location: /s/raw/m2gqmq8b4v5c5ib/loic.sh [following]
--2021-04-27 16:31:47-- https://www.dropbox.com/s/raw/m2gqmq8b4v5c5ib/loic.sh
Reusing existing connection to www.dropbox.com:443.
HTTP request sent, awaiting response... 302 Found
Location: https://uc7514cc9ee7b30317da8c2d6981.dl.dropboxusercontent.com/cd/0/inline/BNYPKCCVPAlMSDOBdmU4PDmodsSqo06kgmITyOjTFN30swmkita6SJUsRB_lVmBWIRXWbmSicbsAeWsyZ1bjQzTZbDYpRki8dyCmXcW3EGEZ6-ALWPdiJA0h_cXy3T7DL7BuVr5UxP9mPZWactP6vidm/file# [following]
--2021-04-27 16:31:48-- https://uc7514cc9ee7b30317da8c2d6981.dl.dropboxusercontent.com/cd/0/inline/BNYPKCCVPAlMSDOBdmU4PDmodsSqo06kgmITyOjTFN30swmkita6SJUsRB_lVmBWIRXWbmSicbsAeWsyZ1bjQzTZbDYpRki8dyCmXcW3EGEZ6-ALWPdiJA0h_cXy3T7DL7BuVr5UxP9mPZWactP6vidm/file
Resolving uc7514cc9ee7b30317da8c2d6981.dl.dropboxusercontent.com (uc7514cc9ee7b30317da8c2d6981.dl.dropboxusercontent.com)... 162.125.71.15, 2620:100:6026:15::a27d:460f
Connecting to uc7514cc9ee7b30317da8c2d6981.dl.dropboxusercontent.com (uc7514cc9ee7b30317da8c2d6981.dl.dropboxusercontent.com)|162.125.71.15|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 2331 (2.3K) [text/plain]
Saving to: 'loic.sh'

loic.sh                               100%[=====] 2.28K --KB/s in 0s

2021-04-27 16:31:48 (25.1 MB/s) - 'loic.sh' saved [2331/2331]

iktz-83@kali ~/loic$

```

Рис. 23

```

iktz-83@kali ~/loic$ ls -l
total 4
-rw-r--r-- 1 iktz-83 iktz-83 2331 Apr 27 16:31 loic.sh
iktz-83@kali ~/loic$ sudo chmod a+x loic.sh
[sudo] password for iktz-83:
iktz-83@kali ~/loic$ ls -l
total 4
-rwxr-xr-x 1 iktz-83 iktz-83 2331 Apr 27 16:31 loic.sh
iktz-83@kali ~/loic$

```

Рис. 24

```

compile_loic() {
    get_loic
    if ! is_loic ; then
        echo "Error: You are not in a LOIC repository."
        exit 1
    fi
    if [[ $DISTRO = 'ubuntu' || $DISTRO = 'debian' ]] ; then
        sudo apt-get install $DEB_MONO_PKGS
    elif [[ $DISTRO = 'fedora' ]] ; then
        sudo yum install $FED_MONO_PKGS
    fi
    cd src; xbuild
}

```

Рис. 25

```

iktz-83@kali ~/loic$ vim loic.sh
iktz-83@kali ~/loic$ ./loic.sh install
/usr/bin/git
Cloning into 'LOIC' ...
warning: redirecting to https://github.com/NewEraCracker/LOIC.git/
remote: Enumerating objects: 1915, done.
remote: Total 1915 (delta 0), reused 0 (delta 0), pack-reused 1915
Receiving objects: 100% (1915/1915), 4.28 MiB | 1.27 MiB/s, done.
Resolving deltas: 100% (1191/1191), done.

>>>> xbuild tool is deprecated and will be removed in future updates, use msbuild instead <<<<

XBuild Engine Version 14.0
Mono, Version 6.12.0.122
Copyright (C) 2005-2013 Various Mono authors

Build started 4/28/2021 9:47:34 AM.

Project "/home/iktz-83/loic/LOIC/src/LOIC.sln" (default target(s)):
Target "ValidateSolutionConfiguration"

```

Рис. 26


```
iktz-83@kali ~/loic$ ./loic.sh update
/usr/bin/git
warning: redirecting to https://github.com/NewEraCracker/LOIC.git/
Already up to date.
/usr/bin/git

>>>> xbuild tool is deprecated and will be removed in future updates, use msbuild instead <<<<

XBuild Engine Version 14.0
Mono, Version 6.12.0.122
Copyright (C) 2005-2013 Various Mono authors

Build started 4/28/2021 9:48:40 AM.

Project "/home/iktz-83/loic/LOIC/src/LOIC.sln" (default target(s)):
Target ValidateSolutionConfiguration:
    Building solution configuration "Debug|Any CPU".
Target Build:
    Project "/home/iktz-83/loic/LOIC/src/IRC/IRC.csproj" (default target(s)):
        Target PrepareForBuild:
            Configuration: Debug Platform: AnyCPU
        Target GenerateSatelliteAssemblies:
            No input files were specified for target GenerateSatelliteAssemblies, skipping.
        Target CoreCompile:
            Skipping target "CoreCompile" because its outputs are up-to-date.
    Done building project "/home/iktz-83/loic/LOIC/src/IRC/IRC.csproj".
    Project "/home/iktz-83/loic/LOIC/src/LOIC.csproj" (default target(s)):
        Target PrepareForBuild:
            Configuration: Debug Platform: AnyCPU
        Target GenerateSatelliteAssemblies:
            No input files were specified for target GenerateSatelliteAssemblies, skipping.
        Target CoreCompile:
            Skipping target "CoreCompile" because its outputs are up-to-date.
        Target _CopyAppConfigFile:
            Skipping target "_CopyAppConfigFile" because its outputs are up-to-date.
```

Рис. 27

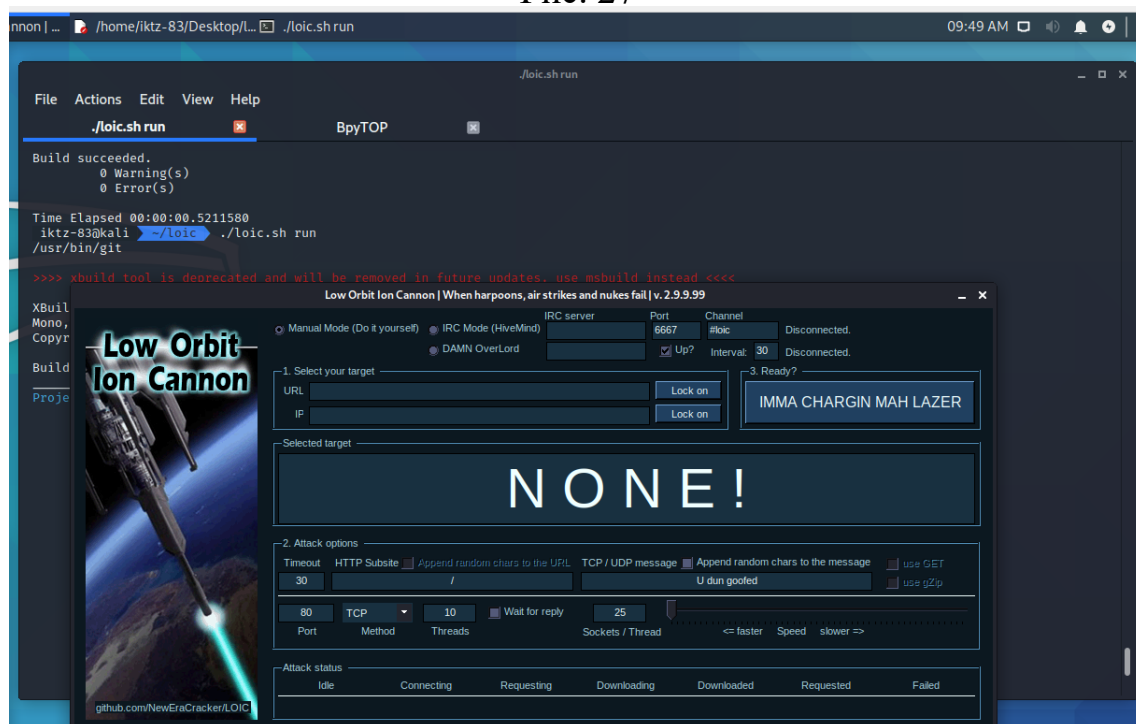


Рис. 28

Часть 7 - Установка Wifi_Jammer на Kali Linux.

```
iktz-83@kali:~/wifijammer$ git clone https://github.com/DanMcInerney/wifijammer.git
Cloning into 'wifijammer'...
remote: Enumerating objects: 274, done.
remote: Total 274 (delta 0), reused 0 (delta 0), pack-reused 274
Receiving objects: 100% (274/274), 82.17 KiB | 1.05 MiB/s, done.
Resolving deltas: 100% (111/111), done.
iktz-83@kali$ cd wifijammer
iktz-83@kali$ git checkout master
```

Рис. 29

```
iktz-83@kali ~$ sudo python wifijammer.py --help
python: can't open file 'wifijammer.py': [Errno 2] No such file or directory
iktz-83@kali ~$ sudo python wifijammer --help
Traceback (most recent call last):
  File "wifijammer", line 6, in <module>
    from scapy.all import *
ImportError: No module named scapy.all
iktz-83@kali ~$
```

Рис. 30

```
iktz-83@kali ~$ sudo python wifijammer --help
[sudo] password for iktz-83:
usage: wifijammer [-h] [-s [SKIP [SKIP ... ]]] [-i INTERFACE] [-c CHANNEL]
                  [-m MAXIMUM] [-n] [-t TIMEINTERVAL] [-p PACKETS] [-d]
                  [-a [ACCESSPOINT [ACCESSPOINT ... ]]] [--world] [--dry-run]

optional arguments:
  -h, --help            show this help message and exit
  -s [SKIP [SKIP ... ]], --skip [SKIP [SKIP ... ]]
                        Skip deauthing this MAC address. Example: -s
                        00:11:BB:33:44:AA
  -i INTERFACE, --interface INTERFACE
                        Choose monitor mode interface. By default script will
                        find the most powerful interface and starts monitor
                        mode on it. Example: -i mon5
  -c CHANNEL, --channel CHANNEL
                        Listen on and deauth only clients on the specified
                        channel. Example: -c 6
  -m MAXIMUM, --maximum MAXIMUM
                        Choose the maximum number of clients to deauth. List
                        of clients will be emptied and repopulated after
                        hitting the limit. Example: -m 5
  -n, --noupdate         Do not clear the deauth list when the maximum (-m)
                        number of client/AP combos is reached. Must be used in
                        conjunction with -m. Example: -m 10 -n
```

Рис. 31

Часть 8 - Использование SQLMAP на Kali Linux: взлом веб-сайтов и баз данных через SQL-инъекции

```
iktz-83@kali ~$ sudo sqlmap -u http://zss.sut.ru --batch

[!] legal disclaimer: Usage of sqlmap for attacking targets without prior mutual consent is illegal. It is the end user's respons
ibility to obey all applicable local, state and federal laws. Developers assume no liability and are not responsible for any misu
se or damage caused by this program

[*] starting @ 15:49:41 /2021-04-28/

[15:49:42] [INFO] testing connection to the target URL
you have not declared cookie(s), while server wants to set its own ('language=ru'). Do you want to use those [Y/n] Y
[15:49:44] [INFO] checking if the target is protected by some kind of WAF/IPS
[15:49:46] [WARNING] reflective value(s) found and filtering out
[15:49:46] [INFO] testing if the target URL content is stable
[15:49:49] [INFO] target URL content is stable
[15:49:49] [CRITICAL] no parameter(s) found for testing in the provided data (e.g. GET parameter 'id' in 'www.site.com/index.php?
id=1'). You are advised to rerun with '--forms --crawl=2'

[*] ending @ 15:49:49 /2021-04-28/
```

Рис. 32

```
iktz-83@kali ~$ sudo sqlmap -u http://zss.sut.ru --batch --random-agent

[!] legal disclaimer: Usage of sqlmap for attacking targets without prior mutual consent is illegal. It is the end user's respons
ibility to obey all applicable local, state and federal laws. Developers assume no liability and are not responsible for any misu
se or damage caused by this program

[*] starting @ 15:51:24 /2021-04-28/

[15:51:24] [INFO] fetched random HTTP User-Agent header value 'Opera/9.00 (Windows NT 5.2; U; ru)' from file '/usr/share/sqlmap/d
ata/txt/user-agents.txt'
[15:51:24] [INFO] testing connection to the target URL
you have not declared cookie(s), while server wants to set its own ('language=ru'). Do you want to use those [Y/n] Y
[15:51:26] [INFO] testing if the target URL content is stable
[15:51:28] [INFO] target URL content is stable
[15:51:28] [CRITICAL] no parameter(s) found for testing in the provided data (e.g. GET parameter 'id' in 'www.site.com/index.php?
id=1'). You are advised to rerun with '--forms --crawl=2'

[*] ending @ 15:51:28 /2021-04-28/
```

Рис. 33

Часть 9 - Crunch — генератор паролей. Установка и тест.

```
iktz-83@kali ~$ crunch 1 9 0123456789abcdefg
Crunch will now generate the following amount of data: 1252121211606 bytes
1194115 MB
1166 GB
1 TB
0 PB
Crunch will now generate the following number of lines: 125999618777
```

Рис. 34

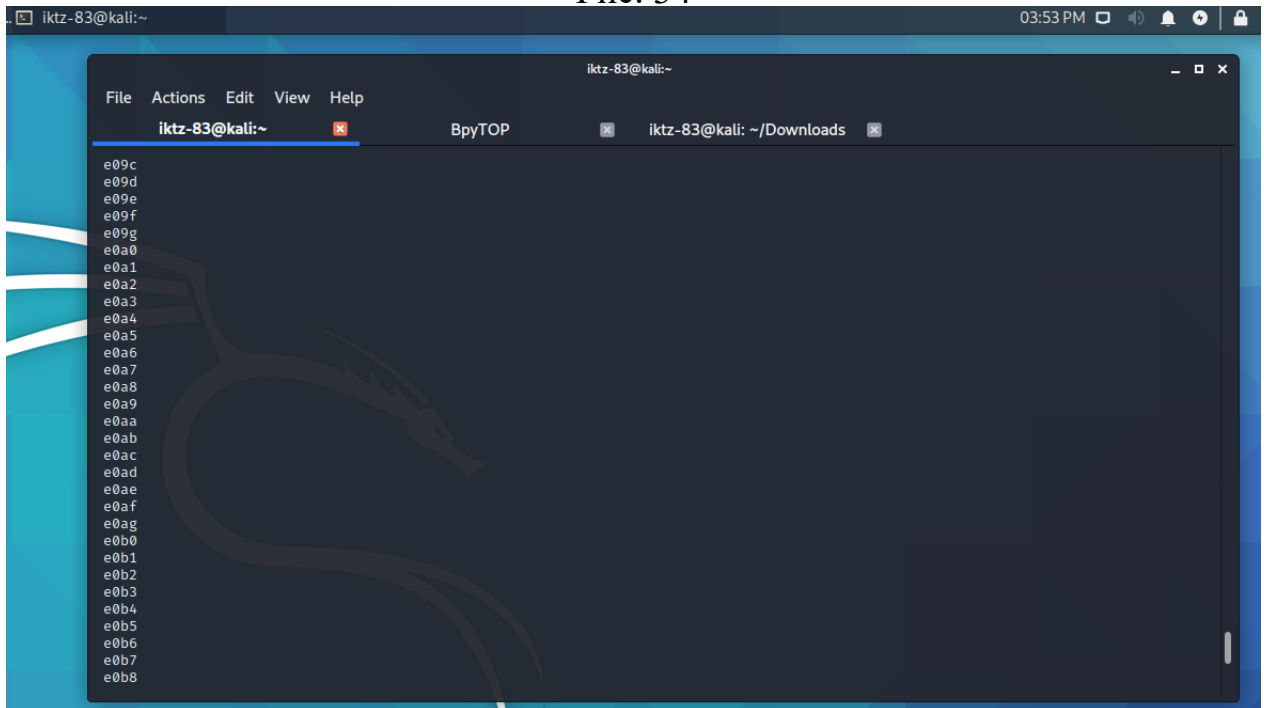


Рис. 35

```
iktz-83@kali ~$ crunch 9 9 0123 -o passwords.txt
Crunch will now generate the following amount of data: 2621440 bytes
2 MB
0 GB
0 TB
0 PB
Crunch will now generate the following number of lines: 262144
crunch: 100% completed generating output
iktz-83@kali ~$
```

Рис. 36

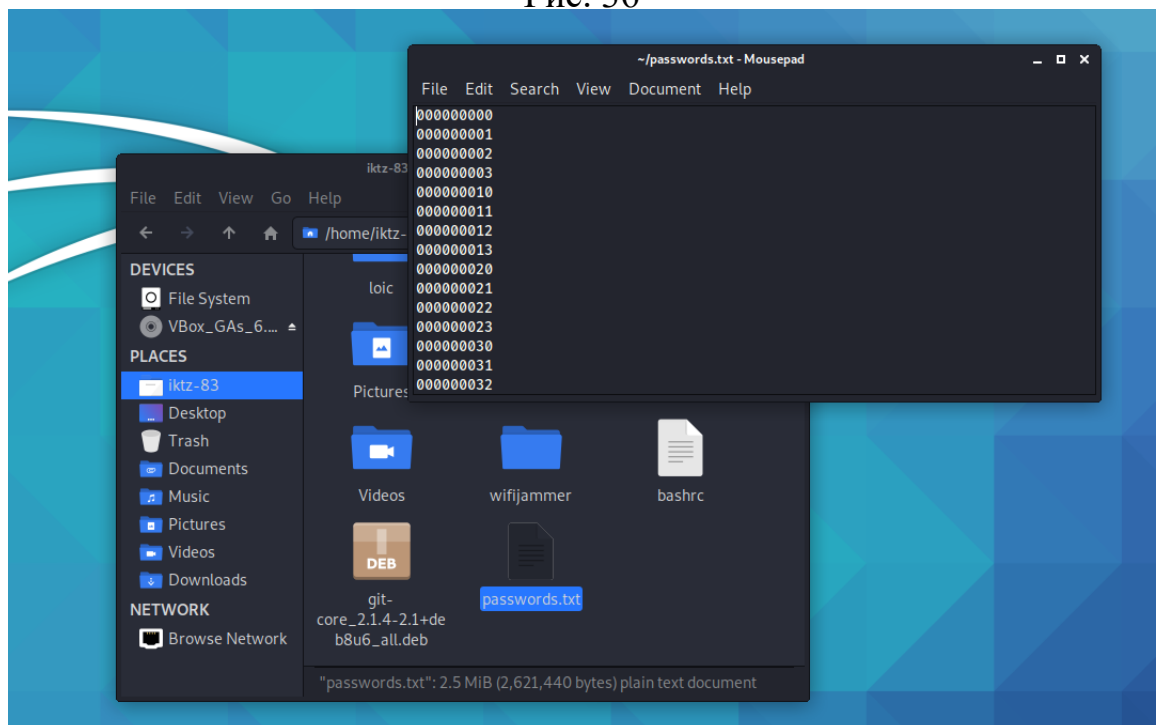


Рис. 37