

Adrian Cuellar

<https://github.com/AACuellar96/CS380-EX6>

Users' Account Information / Dashboard

0%


☒ ☐ Description ▲

Username:
admin
seed
peter
alice
ted
bob

Password: same as the username.



Notice: 'admin' and 'seed' are two administrators for this application. When doing the Lab, please leave one of them untouched for safety.
Once you mess up the users' account information, use this account to back up yourself.

To login as Ted, essentially I just provided the username 'ted' and then added a '); which would then end that query as it is expecting a '); eventually, and for the rest of the statement in the original query, I comment it out with a # so it is not read.

 **collabtive**
Projectmanagement

☐ Stay logged in

The process is essentially the same for admin, I just replace 'ted' with 'admin.'

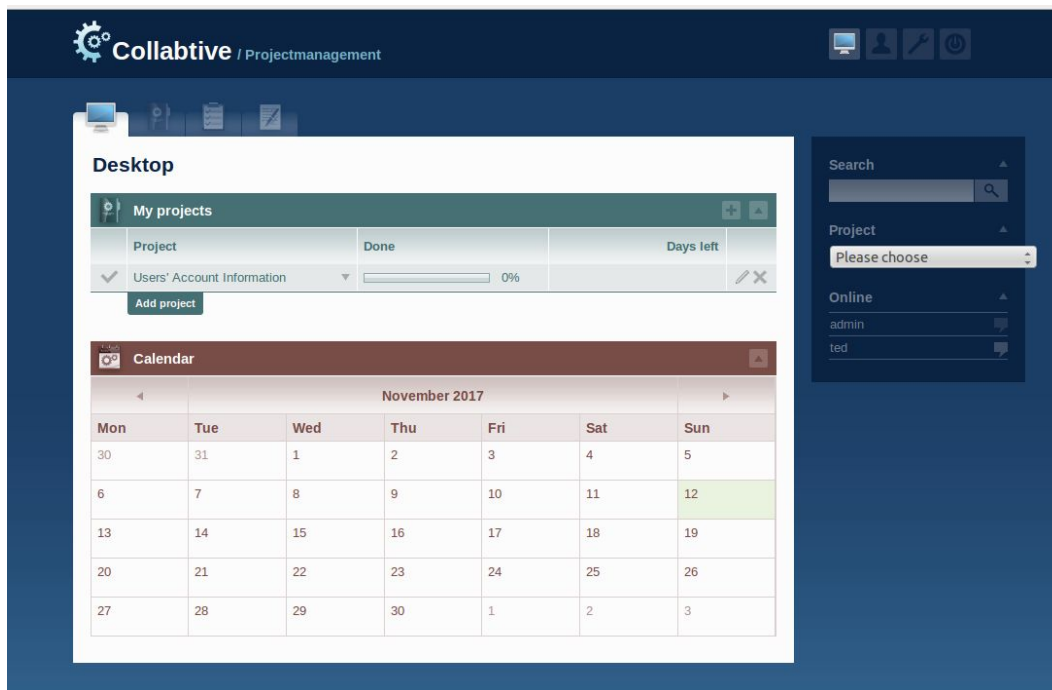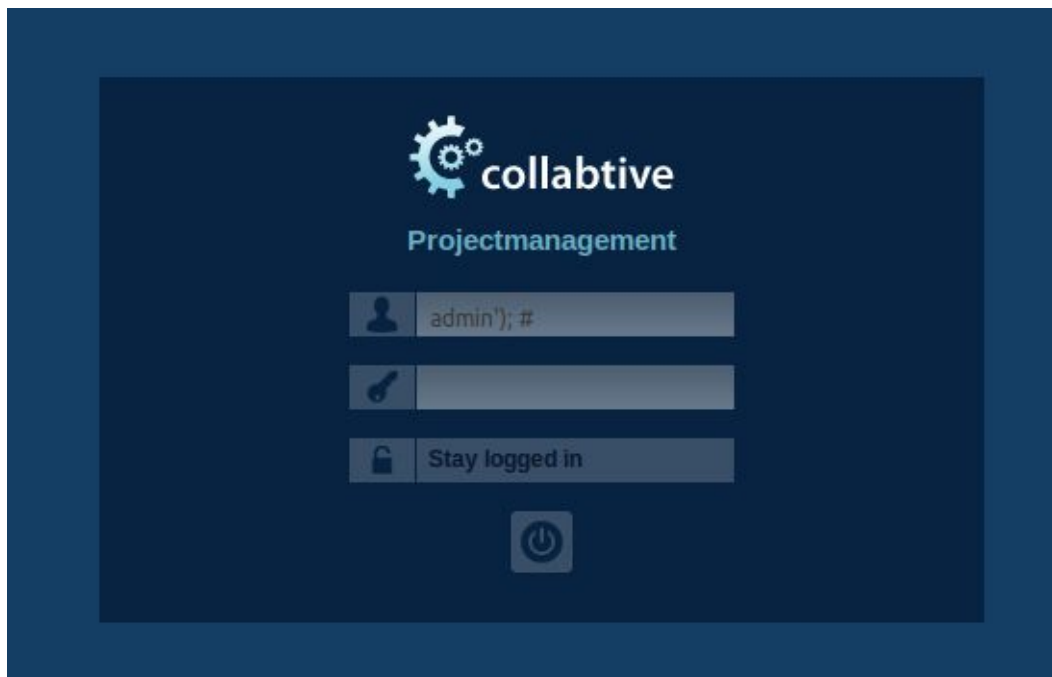

For a blank username it is a little different, I have to include an OR '1'='1' statement so that the query always evaluates to true despite their being no inputted username, but otherwise it is the same as the process for the two user logins. In doing this, the website thinks I am the admin.

