


Procédure Wi-Fi Unifi

Cyrus DEGHAN

<https://cyrusdehghan60.wixsite.com/cyrusdehghanportefol>

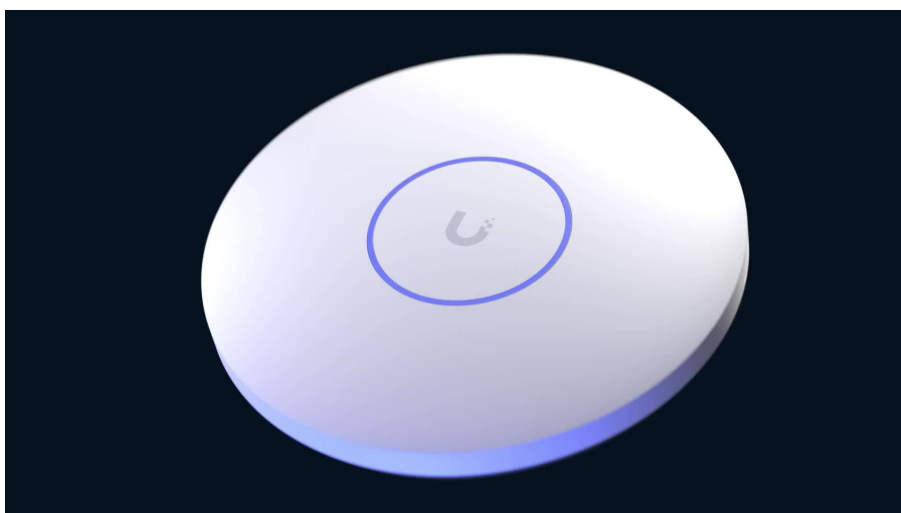

Le **point d'accès Wi-Fi (UniFi U6+)** est l'équipement chargé de **diffuser le réseau Wi-Fi** et de permettre aux appareils sans fil (ordinateurs, smartphones, objets connectés) de se connecter au réseau local. Il assure la couverture radio et les performances Wi-Fi, mais n'est pas configuré de manière autonome.

Le **contrôleur UniFi** est l'outil de **configuration, de gestion et de supervision** du réseau Wi-Fi. Il permet de créer et modifier les réseaux sans fil (SSID), de définir les règles de sécurité, de gérer les points d'accès et de surveiller l'activité du réseau. Le contrôleur centralise la configuration et la applique aux points d'accès.

En fonctionnement normal, le point d'accès diffuse le Wi-Fi en continu, tandis que le contrôleur est utilisé principalement pour la configuration, les mises à jour et la supervision du réseau.

Dans cette procédure on va voir comment mettre en place un réseau WIFI sur notre vlan 20 qui sera réservé au personnel externe (intervenants, invités, fans...)

Dans un premier temps, on commence par configurer notre deuxième Vlan sur notre routeur, ici vlan 20

Edit VLAN

Show Advanced Settings

General Settings

☒ Enable Interface

Interface Properties

Interface Type: Internal

Interface Name: vlan20

Zone: LAN1

Base Port: lan1

VLAN ID: 20 (1-4094)

☒ Advance

Description: Vlan WIFI (Optional)

IP Address Assignment

IP Address: 192.168.20.254

Subnet Mask: 255.255.255.0

☐ Enable IGMP Support

☐ IGMP Upstream

OK Cancel

On met notre AD1 en relais, il fait office de serveur dhcp

Interface Parameters

Egress Bandwidth: 1048576 Kbps

☒ Advance

☒ Advance

DHCP Setting

DHCP: DHCP Relay

Relay Server 1: 192.168.10.1 (IP Address)

Relay Server 2: (IP Address)

Static DHCP Table

+ Add Edit Remove Import

#	IP Address	MAC	Description
---	------------	-----	-------------

Page 0 of 0 Show 50 items No data to display

☒ Advance

OK Cancel

Configuration

Interface	Description	Port/ID	IP Address	Mask
vlan20	MANVLAN	lan1/10	192.168.20.254	255.255.255.0
vlan20	Vlan WIFI	lan1/10	192.168.20.254	255.255.255.0

Page 1 of 1 Show 50 items

Displaying 1 - 2 of 2

On va ensuite sur notre AD1 dans l'outil DHCP pour créer une nouvelle étendue

Gestionnaire de serveur

Gestionnaire de serveur > Tableau de bord

BIENVENUE DANS GESTIONNAIRE DE SERVEUR

Configurer ce serveur local

Tableau de bord

Serveur local

Tous les serveurs

Gérer Outils Afficher Aide


Analyseur de performances

Centre d'administration Active Directory


Configuration du système

Défragmenter et optimiser les lecteurs

DHCP

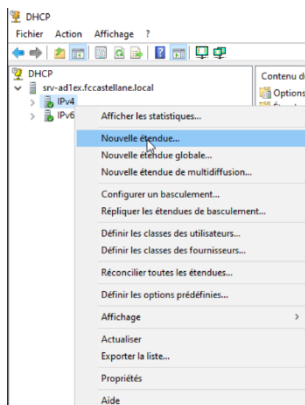

On suit l'assistant de config et on configure comme on le souhaite

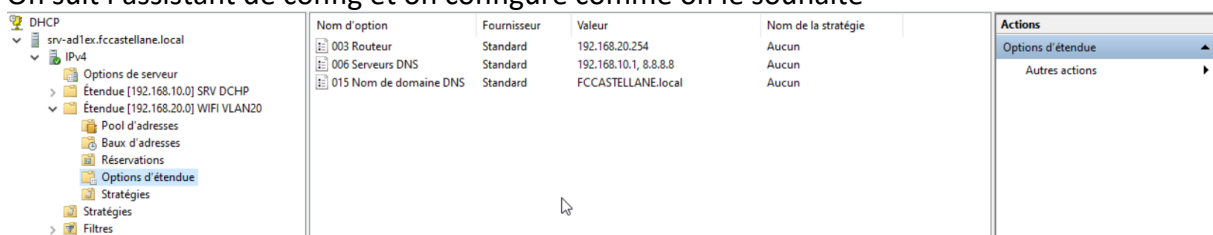


Une fois la nouvelle étendue configurée, on configure notre switch de sorte à avoir des ports attribués au VLAN 20 (rajouter les screens du switches)

Une fois notre switch paramétré, on branche notre point d'accès Wi-Fi sur notre vlan 20.

Ensuite, on installe notre machine debian sur le proxmox et on monte le contrôleur Wi-Fi via des commandes trouvés sur le site d'unifi (à rechercher en fonction de l'appareil)


Virtual Machine 207 (SRV-CONTROLWIFI) on node 'SRVPROX-DEPLOY5'

sio2026

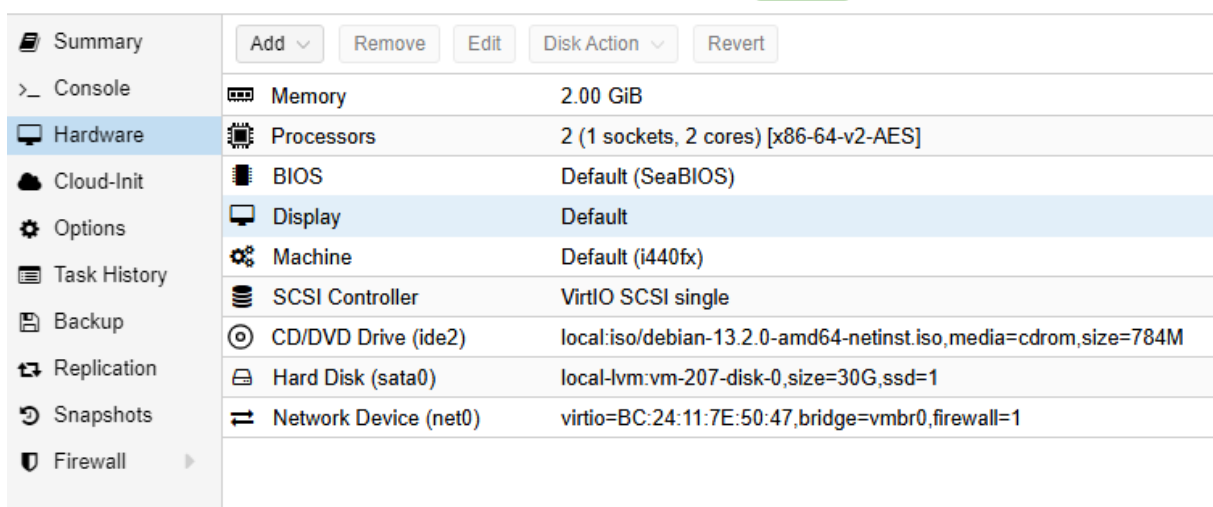


Une fois la machine prête, on se connecte au serveur d'admin web + suivre l'assistant pour configurer les paramètres du serveur web (création de compte nécessaire)

<https://<votreip>:11443>

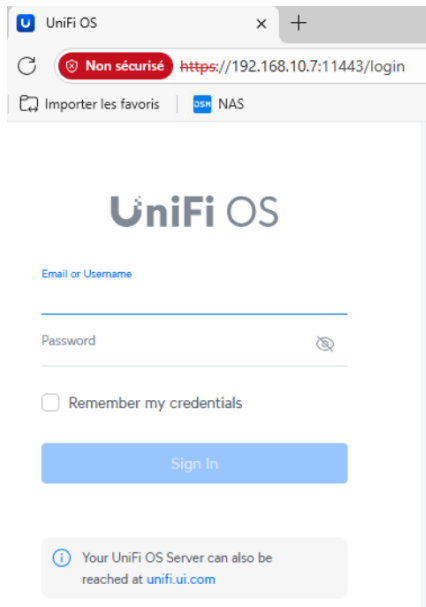

The image shows the UniFi OS login page in a web browser. The address bar displays 'https://192.168.10.7:11443/login' with a 'Non sécurisé' (Not secure) warning. The page features the 'UniFi OS' logo at the top. Below it, there are input fields for 'Email or Username' and 'Password'. A checkbox labeled 'Remember my credentials' is present. A blue 'Sign In' button is located below the password field. At the bottom, a message states: 'Your UniFi OS Server can also be reached at unifi.ui.com'.

Si les branchements ont bien été faits, le point d'accès apparaît avec une IP de la nouvelle étendu de notre serveur DHCP, ici 192.168.20.xxx (vlan 20)

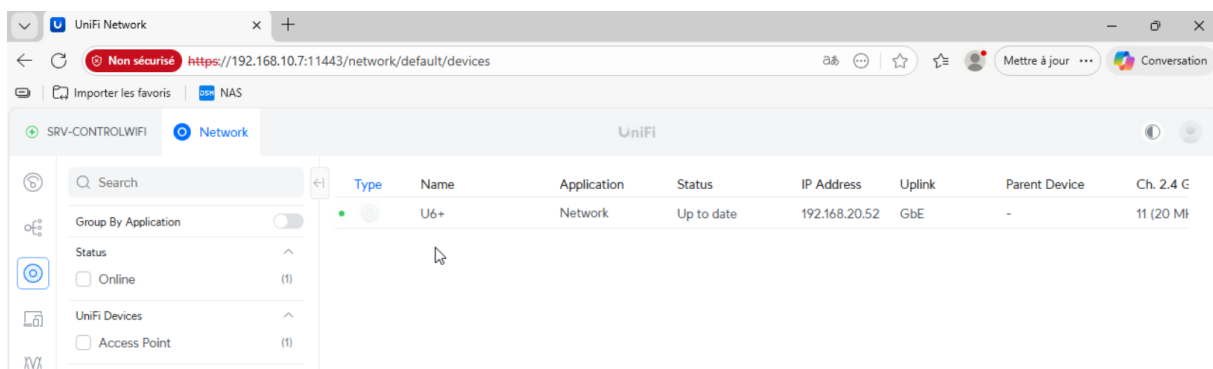

The image shows the UniFi Network interface in a web browser. The address bar displays 'https://192.168.10.7:11443/network/default/devices'. The interface includes a sidebar with navigation options like 'SRV-CONTROLWIFI' and 'Network'. The main area displays a table of devices. The table has columns: Type, Name, Application, Status, IP Address, Uplink, Parent Device, and Ch. 2.4 G. A single device is listed with the name 'U6+', IP Address '192.168.20.52', and Uplink 'GbE'.

Type	Name	Application	Status	IP Address	Uplink	Parent Device	Ch. 2.4 G
U6+	U6+	Network	Up to date	192.168.20.52	GbE	-	11 (20 Mi)

On va ensuite créer le nouveau réseau Wi-Fi

The screenshot shows the UniFi Network Settings interface. On the left is a sidebar with navigation options: Overview, WiFi (selected), Networks, Internet, VPN, CyberSecure, Policy Engine, System, UniFi OS Server, Control Plane, and Identity. The main panel displays the 'WiFi' settings. At the top, there's a table with columns: Name, Network, Broadcasting APs, WiFi Band, Clients, and Security. It lists two networks: 'WIFI FCCASTELLANE' and 'hotspot castellane'. Below the table are links for 'Create New' and 'Manage'. The 'Channel Plan' section below shows frequency ranges and channel availability for 2.4 GHz and 5 GHz bands.

Name	Network	Broadcasting APs	WiFi Band	Clients	Security
WIFI FCCASTELLANE	Native Network	All APs	2.4 GHz 5 GHz	-	WPA2/WPA3
hotspot castellane	Native Network	All APs	2.4 GHz 5 GHz	-	Open

This is a configuration modal for the 'WIFI FCCASTELLANE' network. It includes fields for Name, Password, and Network. The 'Broadcasting APs' section has radio buttons for 'All' (selected), 'Group', and 'Specific'. The 'WiFi Optimization' section has tabs for 'Standard' (selected), 'Hotspot', and 'IoT'.

Pour créer un portail captif (hotspot), sélectionner hotspot

This is a configuration modal for the 'hotspot castellane' network. It includes fields for Name, Password, and Network. The 'Broadcasting APs' section has radio buttons for 'All' (selected), 'Group', and 'Specific'. The 'WiFi Optimization' section has tabs for 'Standard', 'Hotspot' (selected), and 'IoT'. The 'Hotspot Type' section has radio buttons for 'Captive Portal' (selected) and 'Passpoint'. A note at the bottom states: 'We have applied your Hotspot Portal to this WiFi name. By default, portal guests will be isolated from other guests and network resources. Hotspot Portal can be found in Clients.'

Pour administrer et personnaliser notre portail captif

SRV-CONTROLWIFI Network

UniFi

Name	Network	Broadcasting APs	WiFi Band
WIFI FCCASTELLANE	Native Network	All APs	2.4 GHz
hotspot castellane	Native Network	All APs	2.4 GHz

Create New Manage

Channel Plan

Click on a channel to exclude it from use

2.4 GHz 2412-2484 MHz

Channels 1 2 3 4 5 6 7 8 9 10 11 12 13 14

20 MHz

40 MHz

5 GHz 5180-5885 MHz

Channels 36 40 44 48 52 56 60 64 100 104 108 112 116 120 124 128 132 136 140 144 149 153 157

20 MHz

40 MHz

80 MHz

160 MHz

Legend: In Use, Enabled, DFS, Not available, Excluded

hotspot castellane

Name: hotspot castellane

Password: (Must have at least 8 characters)

Network: Native Network

Broadcasting APs: All (Selected), Group, Specific

WiFi Optimization: Standard, Hotspot (Selected), IoT

Hotspot Type: Captive Portal (Selected), Passpoint

We have applied your Hotspot Portal to this WiFi name. By default, portal guests will be isolated from other guests and network resources. Hotspot Portal can be found in Clients.

Pour paramétrer les codes vouchers du portail

SRV-CONTROLWIFI Network

UniFi

Hotspot

Vouchers

Name	Code	Expiration	Type	Data Limit	Download Li...	Upload Limit
1M	59047-50981	1 minute	Single-use	Unlimited	Unlimited	Unlimited

Guests Payments Vouchers

Landing Page

Search Vouchers

Add Voucher

Clear Filters

Customize Columns

Notre réseau Wi-Fi FC Castellane est désormais fonctionnel sur notre deuxième Vlan.