
ER Diagram For Deliverable 1

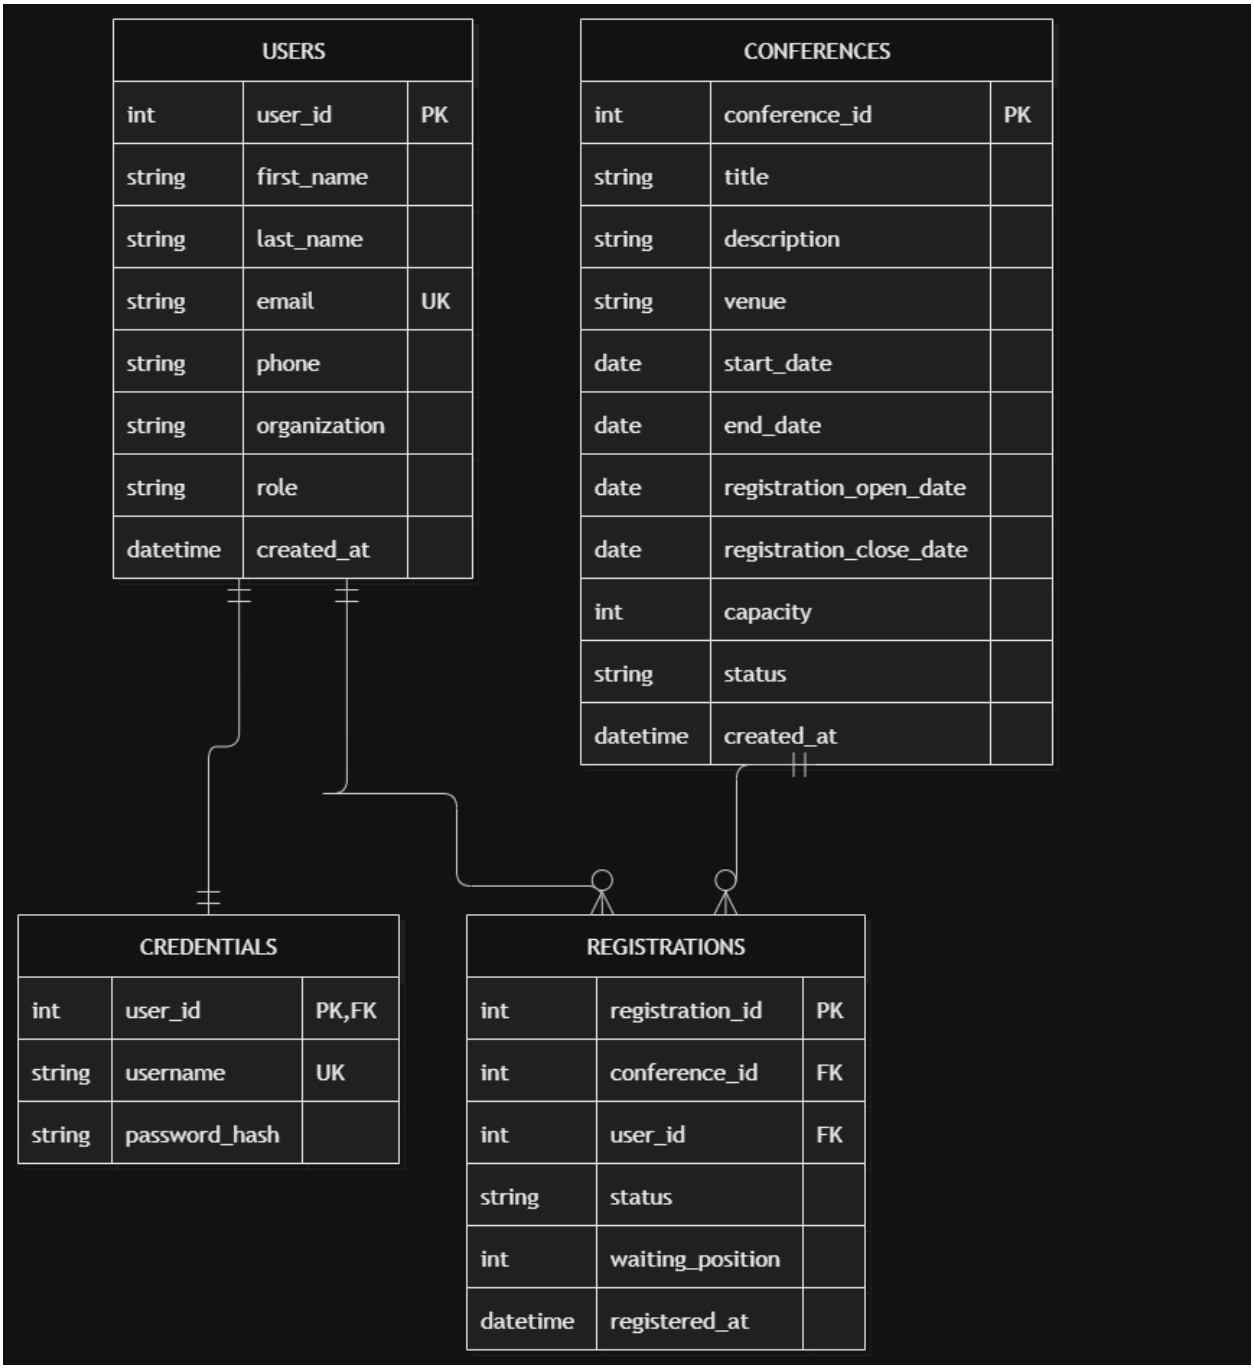

Tables and relationships

- User profile details and login details are kept in separate tables. A user can have one set of login details.

- A user can register for several conferences, and each conference can have many participants.

- Each registration links one user to one conference.

- A participant can only register for a conference once.

- The sample passwords are simple values for local testing. Real apps should store password hashes instead.

Constraints

- Email addresses and usernames must be different for each account.

- A user's role must be `ADMIN` or `PARTICIPANT`.

- A conference needs a capacity above zero. Its end date must be on or after its start date, and registration must open before it closes.

- Conference status can be `DRAFT`, `OPEN`, `FULL`, `CLOSED`, or `CANCELLED`.

- Registration status can be `CONFIRMED`, `WAITLISTED`, or `CANCELLED`.

- A wait-listed registration needs a positive position. Confirmed and cancelled registrations have no position.

- Deleting a user also deletes their credentials and registrations. Deleting a conference removes its registrations.

- The indexes help find registrations by conference, status, or user.