
Product requires C
goal: x = v
keep: l ≤ h ≤ u

Module: primitives A, B, C
pre, post, invariants, rates
h = a·x + b·y

Planner: flows built from the goal back to the start


1 Sequence

A needs what B gives: B first




2 Repetition

a goal beyond one step's range




3 Parallel

steps share no part or state

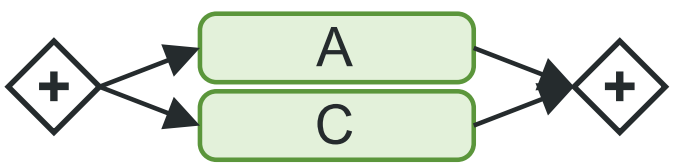

4 Matched rates

a bound links two moving states

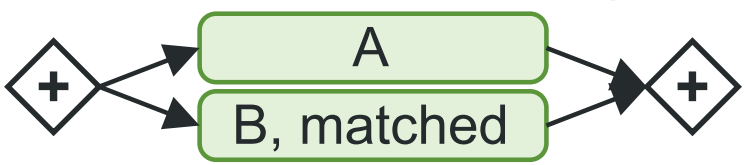

5 Decision

drawn by hand, then checked



Every flow
checked over time against C,
then described in the AAS