

Arduino Led Matrix Driver

Generated by Doxygen 1.8.9.1

Wed Aug 19 2015 01:06:57

Contents

1 Hierarchical Index

1.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

LedMatrixDriver	??
LedMatrixMAX7219Driver	??
MAX7219Driver	??

2 Class Index

2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

LedMatrixDriver Arduino - LED Matrix driver	??
LedMatrixMAX7219Driver	??
MAX7219Driver	??

3 File Index

3.1 File List

Here is a list of all files with brief descriptions:


LedMatrixDriver.cpp	??
LedMatrixDriver.h	??
LedMatrixDriverMAX7221.cpp	??
LedMatrixDriverMAX7221.h	??
LedMatrixMAX7219Driver.cpp	??
LedMatrixMAX7219Driver.h	??
MAX7219Driver.cpp	??
MAX7219Driver.h	??

4 Class Documentation

4.1 LedMatrixDriver Class Reference

```
#include <LedMatrixDriver.h>
```

Inheritance diagram for LedMatrixDriver:



Public Types

- enum `LedValue` { `OFF` = 0x00, `ON` = 0x01, `RED` = 0x02, `GREEN` = 0x04 }
- enum `ShiftDirection` { `LEFT` = 0x00, `RIGHT` = 0x01, `UP` = 0x02, `DOWN` = 0x03 }

Public Member Functions

- virtual `~LedMatrixDriver` ()
- `LedMatrixDriver` (unsigned char `cols`, unsigned char `rows`)
- virtual unsigned char `isOutOfBounds` (unsigned char `col`, unsigned char `row`)
- virtual void `clear` ()=0
- virtual void `fill` ()=0
- virtual unsigned char `getLed` (unsigned char `col`, unsigned char `row`)=0
- virtual void `setLed` (unsigned char `col`, unsigned char `row`, unsigned char `value`)=0
- virtual void `setRow` (unsigned char `row`, unsigned char `value`)=0
- virtual void `setCol` (unsigned char `col`, unsigned char `value`)=0
- virtual void `shiftLed` (unsigned char `col`, unsigned char `row`, unsigned char `direction`)=0
- virtual void `shiftRow` (unsigned char `row`, unsigned char `direction`)=0
- virtual void `shiftCol` (unsigned char `col`, unsigned char `direction`)=0
- virtual void `switchLeds` (unsigned char `colFrom`, unsigned char `rowFrom`, unsigned char `colTo`, unsigned char `rowTo`)=0
- virtual void `switchCols` (unsigned char `colFrom`, unsigned char `colTo`)=0
- virtual void `switchRows` (unsigned char `rowFrom`, unsigned char `rowTo`)=0
- virtual void `invertLed` (unsigned char `col`, unsigned char `row`)=0
- virtual void `invertCols` (unsigned char `col`)=0
- virtual void `invertRows` (unsigned char `row`)=0

Protected Attributes

- unsigned char `cols`
- unsigned char `rows`

4.1.1 Detailed Description

Arduino - LED Matrix driver.

[LedMatrixDriver.h](#)

LED Matrix Driver.

Author

Dalmir da Silva dalmirdasilva@gmail.com

Definition at line 14 of file [LedMatrixDriver.h](#).

4.1.2 Member Enumeration Documentation

4.1.2.1 enum LedMatrixDriver::LedValue

Enumerator

OFF

ON

RED

GREEN

Definition at line 22 of file [LedMatrixDriver.h](#).

4.1.2.2 enum LedMatrixDriver::ShiftDirection

Enumerator

LEFT

RIGHT

UP

DOWN

Definition at line 26 of file [LedMatrixDriver.h](#).

4.1.3 Constructor & Destructor Documentation

4.1.3.1 LedMatrixDriver::~LedMatrixDriver () [virtual]

Definition at line 16 of file [LedMatrixDriver.cpp](#).

4.1.3.2 LedMatrixDriver::LedMatrixDriver (unsigned char cols, unsigned char rows)

Definition at line 19 of file [LedMatrixDriver.cpp](#).

4.1.4 Member Function Documentation

4.1.4.1 virtual void LedMatrixDriver::clear () [pure virtual]

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.2 virtual void LedMatrixDriver::fill () [pure virtual]

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.3 `virtual unsigned char LedMatrixDriver::getLed (unsigned char col, unsigned char row) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.4 `virtual void LedMatrixDriver::invertCols (unsigned char col) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.5 `virtual void LedMatrixDriver::invertLed (unsigned char col, unsigned char row) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.6 `virtual void LedMatrixDriver::invertRows (unsigned char row) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.7 `unsigned char LedMatrixDriver::isOutOfBounds (unsigned char col, unsigned char row) [virtual]`

Definition at line 24 of file [LedMatrixDriver.cpp](#).

4.1.4.8 `virtual void LedMatrixDriver::setCol (unsigned char col, unsigned char value) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.9 `virtual void LedMatrixDriver::setLed (unsigned char col, unsigned char row, unsigned char value) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.10 `virtual void LedMatrixDriver::setRow (unsigned char row, unsigned char value) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.11 `virtual void LedMatrixDriver::shiftCol (unsigned char col, unsigned char direction) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.12 `virtual void LedMatrixDriver::shiftLed (unsigned char col, unsigned char row, unsigned char direction) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.13 `virtual void LedMatrixDriver::shiftRow (unsigned char row, unsigned char direction) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.14 `virtual void LedMatrixDriver::switchCols (unsigned char colFrom, unsigned char colTo) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.15 `virtual void LedMatrixDriver::switchLeds (unsigned char colFrom, unsigned char rowFrom, unsigned char colTo, unsigned char rowTo) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.4.16 `virtual void LedMatrixDriver::switchRows (unsigned char rowFrom, unsigned char rowTo) [pure virtual]`

Implemented in [LedMatrixMAX7219Driver](#).

4.1.5 Member Data Documentation

4.1.5.1 unsigned char LedMatrixDriver::cols [protected]

Definition at line 17 of file [LedMatrixDriver.h](#).

4.1.5.2 unsigned char LedMatrixDriver::rows [protected]

Definition at line 18 of file [LedMatrixDriver.h](#).


The documentation for this class was generated from the following files:

- [LedMatrixDriver.h](#)
- [LedMatrixDriver.cpp](#)


4.2 LedMatrixMAX7219Driver Class Reference

```
#include <LedMatrixMAX7219Driver.h>
```

Inheritance diagram for LedMatrixMAX7219Driver:



Collaboration diagram for LedMatrixMAX7219Driver:

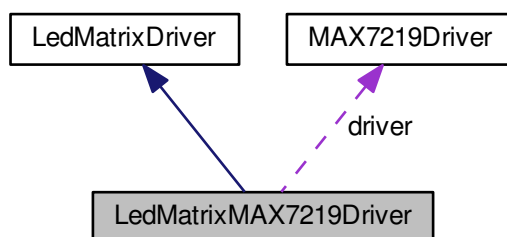

Public Member Functions

- [LedMatrixMAX7219Driver](#) ([MAX7219Driver](#) *[driver](#), unsigned char [cols](#), unsigned char [rows](#))
- [~LedMatrixMAX7219Driver](#) ()
- virtual void [clear](#) ()

- virtual void [fill](#) ()
- virtual unsigned char [getLed](#) (unsigned char col, unsigned char row)
- virtual void [setLed](#) (unsigned char col, unsigned char row, unsigned char value)
- virtual void [setRow](#) (unsigned char row, unsigned char value)
- virtual void [setCol](#) (unsigned char col, unsigned char value)
- virtual void [shiftLed](#) (unsigned char col, unsigned char row, unsigned char direction)
- virtual void [shiftRow](#) (unsigned char row, unsigned char direction)
- virtual void [shiftCol](#) (unsigned char col, unsigned char direction)
- virtual void [switchLeds](#) (unsigned char colFrom, unsigned char rowFrom, unsigned char colTo, unsigned char rowTo)
- virtual void [switchCols](#) (unsigned char colFrom, unsigned char colTo)
- virtual void [switchRows](#) (unsigned char rowFrom, unsigned char rowTo)
- virtual void [invertLed](#) (unsigned char col, unsigned char row)
- virtual void [invertCols](#) (unsigned char col)
- virtual void [invertRows](#) (unsigned char row)

Private Attributes

- [MAX7219Driver](#) * [driver](#)
- unsigned char [matrixData](#) [[MAX7219_MATRIX_WIDTH](#)]

Static Private Attributes

- static unsigned char [registerMap](#) [[MAX7219_MATRIX_WIDTH](#)]

Additional Inherited Members

4.2.1 Detailed Description

Definition at line 21 of file [LedMatrixMAX7219Driver.h](#).

4.2.2 Constructor & Destructor Documentation

4.2.2.1 [LedMatrixMAX7219Driver::LedMatrixMAX7219Driver](#) ([MAX7219Driver](#) * *driver*, unsigned char *cols*, unsigned char *rows*)

Definition at line 16 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.2.2 [LedMatrixMAX7219Driver::~LedMatrixMAX7219Driver](#) () [[inline](#)]

Definition at line 33 of file [LedMatrixMAX7219Driver.h](#).

4.2.3 Member Function Documentation

4.2.3.1 void [LedMatrixMAX7219Driver::clear](#) () [[virtual](#)]

Implements [LedMatrixDriver](#).

Definition at line 30 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.2 void [LedMatrixMAX7219Driver::fill](#) () [[virtual](#)]

Implements [LedMatrixDriver](#).

Definition at line 34 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.3 unsigned char LedMatrixMAX7219Driver::getLed (unsigned char *col*, unsigned char *row*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 38 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.4 void LedMatrixMAX7219Driver::invertCols (unsigned char *col*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 147 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.5 void LedMatrixMAX7219Driver::invertLed (unsigned char *col*, unsigned char *row*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 143 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.6 void LedMatrixMAX7219Driver::invertRows (unsigned char *row*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 151 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.7 void LedMatrixMAX7219Driver::setCol (unsigned char *col*, unsigned char *value*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 73 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.8 void LedMatrixMAX7219Driver::setLed (unsigned char *col*, unsigned char *row*, unsigned char *value*) [virtual]

Each row is a register.

Implements [LedMatrixDriver](#).

Definition at line 49 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.9 void LedMatrixMAX7219Driver::setRow (unsigned char *row*, unsigned char *value*) [virtual]

TODO: BUGGED.

Implements [LedMatrixDriver](#).

Definition at line 65 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.10 void LedMatrixMAX7219Driver::shiftCol (unsigned char *col*, unsigned char *direction*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 109 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.11 void LedMatrixMAX7219Driver::shiftLed (unsigned char *col*, unsigned char *row*, unsigned char *direction*)
[virtual]

Implements [LedMatrixDriver](#).

Definition at line 80 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.12 void LedMatrixMAX7219Driver::shiftRow (unsigned char *row*, unsigned char *direction*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 100 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.13 void LedMatrixMAX7219Driver::switchCols (unsigned char *colFrom*, unsigned char *colTo*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 133 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.14 void LedMatrixMAX7219Driver::switchLeds (unsigned char *colFrom*, unsigned char *rowFrom*, unsigned char *colTo*, unsigned char *rowTo*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 126 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.3.15 void LedMatrixMAX7219Driver::switchRows (unsigned char *rowFrom*, unsigned char *rowTo*) [virtual]

Implements [LedMatrixDriver](#).

Definition at line 138 of file [LedMatrixMAX7219Driver.cpp](#).

4.2.4 Member Data Documentation

4.2.4.1 MAX7219Driver* LedMatrixMAX7219Driver::driver [private]

Definition at line 23 of file [LedMatrixMAX7219Driver.h](#).

4.2.4.2 unsigned char LedMatrixMAX7219Driver::matrixData[MAX7219_MATRIX_WIDTH] [private]

Definition at line 25 of file [LedMatrixMAX7219Driver.h](#).

4.2.4.3 unsigned char LedMatrixMAX7219Driver::registerMap [static],[private]

Initial value:

```
= {MAX7219Driver::DIGIT0,
    MAX7219Driver::DIGIT1, MAX7219Driver::DIGIT2,
    MAX7219Driver::DIGIT3,
    MAX7219Driver::DIGIT4, MAX7219Driver::DIGIT5,
    MAX7219Driver::DIGIT6,
    MAX7219Driver::DIGIT7}
```

Definition at line 26 of file [LedMatrixMAX7219Driver.h](#).

The documentation for this class was generated from the following files:

- [LedMatrixMAX7219Driver.h](#)
- [LedMatrixMAX7219Driver.cpp](#)

4.3 MAX7219Driver Class Reference

```
#include <MAX7219Driver.h>
```

Public Types

- enum [Registers](#) {
NOOP = 0x00, DIGIT0 = 0x01, DIGIT1 = 0x02, DIGIT2 = 0x03,
DIGIT3 = 0x04, DIGIT4 = 0x05, DIGIT5 = 0x06, DIGIT6 = 0x07,
DIGIT7 = 0x08, DECODE_MODE = 0x09, INTENSITY = 0x0a, SCAN_LIMIT = 0x0b,
SHUTDOWN = 0x0c, DISPLAY_TEST = 0x0f }
- enum [ScanLimit](#) {
DIGIT_UPTO_0 = 0x00, DIGIT_UPTO_1 = 0x01, DIGIT_UPTO_2 = 0x02, DIGIT_UPTO_3 = 0x03,
DIGIT_UPTO_4 = 0x04, DIGIT_UPTO_5 = 0x05, DIGIT_UPTO_6 = 0x06, DIGIT_UPTO_7 = 0x07 }

- enum [ShutdownMode](#) { [SHUTDOWN_MODE](#) = 0x00, [NORMAL_MODE](#) = 0x01 }
- enum [DecodeMode](#) { [NO_DECODE](#) = 0x00, [DECODE_0](#) = 0x01, [DECODE_0_TO_3](#) = 0x0f, [DECODE_0_TO_7](#) = 0xff }
- enum [TestMode](#) { [TEST_MODE_OFF](#) = 0x00, [TEST_MODE_ON](#) = 0x01 }

Public Member Functions

- [MAX7219Driver](#) (unsigned char [dataPin](#), unsigned char [clockPin](#), unsigned char [loadPin](#))
- void [setShutdown](#) (unsigned char value)
- void [setDecodeMode](#) (unsigned char mode)
- void [setDisplayIntensity](#) (unsigned char intensity)
- void [setScanLimit](#) (unsigned char limit)
- void [setTestMode](#) (unsigned char mode)
- void [fill](#) (unsigned char pattern)
- void [writeRegister](#) (unsigned char reg, unsigned char value)
- void [sendPackage](#) (unsigned int package)
- unsigned int [createPackage](#) (unsigned char reg, unsigned char payload)

Private Attributes

- unsigned char [dataPin](#)
- unsigned char [clockPin](#)
- unsigned char [loadPin](#)

4.3.1 Detailed Description

Definition at line 30 of file [MAX7219Driver.h](#).

4.3.2 Member Enumeration Documentation

4.3.2.1 enum MAX7219Driver::DecodeMode

Enumerator

NO_DECODE
DECODE_0
DECODE_0_TO_3
DECODE_0_TO_7

Definition at line 70 of file [MAX7219Driver.h](#).

4.3.2.2 enum MAX7219Driver::Registers

Enumerator

NOOP
DIGIT0
DIGIT1
DIGIT2
DIGIT3
DIGIT4
DIGIT5
DIGIT6

DIGIT7
DECODE_MODE
INTENSITY
SCAN_LIMIT
SHUTDOWN
DISPLAY_TEST

Definition at line 38 of file [MAX7219Driver.h](#).

4.3.2.3 enum MAX7219Driver::ScanLimit

Enumerator

DIGIT_UPTO_0
DIGIT_UPTO_1
DIGIT_UPTO_2
DIGIT_UPTO_3
DIGIT_UPTO_4
DIGIT_UPTO_5
DIGIT_UPTO_6
DIGIT_UPTO_7

Definition at line 55 of file [MAX7219Driver.h](#).

4.3.2.4 enum MAX7219Driver::ShutdownMode

Enumerator

SHUTDOWN_MODE
NORMAL_MODE

Definition at line 66 of file [MAX7219Driver.h](#).

4.3.2.5 enum MAX7219Driver::TestMode

Enumerator

TEST_MODE_OFF
TEST_MODE_ON

Definition at line 74 of file [MAX7219Driver.h](#).

4.3.3 Constructor & Destructor Documentation

4.3.3.1 MAX7219Driver::MAX7219Driver (unsigned char *dataPin*, unsigned char *clockPin*, unsigned char *loadPin*)

Definition at line 16 of file [MAX7219Driver.cpp](#).

4.3.4 Member Function Documentation

4.3.4.1 unsigned int MAX7219Driver::createPackage (unsigned char *reg*, unsigned char *payload*)

Definition at line 71 of file [MAX7219Driver.cpp](#).

4.3.4.2 void MAX7219Driver::fill (unsigned char *patern*)

Definition at line 46 of file [MAX7219Driver.cpp](#).

4.3.4.3 void MAX7219Driver::sendPackage (unsigned int *package*)

Definition at line 59 of file [MAX7219Driver.cpp](#).

4.3.4.4 void MAX7219Driver::setDecodeMode (unsigned char *mode*)

Definition at line 30 of file [MAX7219Driver.cpp](#).

4.3.4.5 void MAX7219Driver::setDisplayIntensity (unsigned char *intensity*)

Definition at line 34 of file [MAX7219Driver.cpp](#).

4.3.4.6 void MAX7219Driver::setScanLimit (unsigned char *limit*)

Definition at line 38 of file [MAX7219Driver.cpp](#).

4.3.4.7 void MAX7219Driver::setShutdown (unsigned char *value*)

Definition at line 26 of file [MAX7219Driver.cpp](#).

4.3.4.8 void MAX7219Driver::setTestMode (unsigned char *mode*)

Definition at line 42 of file [MAX7219Driver.cpp](#).

4.3.4.9 void MAX7219Driver::writeRegister (unsigned char *reg*, unsigned char *value*)

Definition at line 54 of file [MAX7219Driver.cpp](#).

4.3.5 Member Data Documentation

4.3.5.1 unsigned char MAX7219Driver::clockPin [private]

Definition at line 33 of file [MAX7219Driver.h](#).

4.3.5.2 unsigned char MAX7219Driver::dataPin [private]

Definition at line 32 of file [MAX7219Driver.h](#).

4.3.5.3 unsigned char MAX7219Driver::loadPin [private]

Definition at line 34 of file [MAX7219Driver.h](#).

The documentation for this class was generated from the following files:


- [MAX7219Driver.h](#)
- [MAX7219Driver.cpp](#)

5 File Documentation

5.1 LedMatrixDriver.cpp File Reference

```
#include "LedMatrixDriver.h"
```

Include dependency graph for LedMatrixDriver.cpp:



Macros

- `#define __ARDUINO_DRIVER_LED_MATRIX_CPP__ 1`

5.1.1 Macro Definition Documentation

5.1.1.1 `#define __ARDUINO_DRIVER_LED_MATRIX_CPP__ 1`

Arduino - LED Matrix driver.

[LedMatrixDriver.cpp](#)

LED Matrix Driver.

Author

Dalmir da Silva dalmirdasilva@gmail.com

Definition at line 12 of file [LedMatrixDriver.cpp](#).


5.2 LedMatrixDriver.cpp

```

00001
00011 #ifndef __ARDUINO_DRIVER_LED_MATRIX_CPP__
00012 #define __ARDUINO_DRIVER_LED_MATRIX_CPP__ 1
00013
00014 #include "LedMatrixDriver.h"
00015
00016 LedMatrixDriver::~LedMatrixDriver() {
00017 }
00018
00019 LedMatrixDriver::LedMatrixDriver(unsigned char cols, unsigned char rows) {
00020     this->cols = cols;
00021     this->rows = rows;
00022 }
00023
00024 unsigned char LedMatrixDriver::isOutOfBounds(unsigned char col,
00025     unsigned char row) {
00026     if (col >= this->cols || row >= this->rows) {
00027         return true;
00028     }
00029     return false;
00030 }
00031
00032 #endif /* __ARDUINO_DRIVER_LED_MATRIX_CPP__ */
  
```

5.3 LedMatrixDriver.h File Reference

This graph shows which files directly or indirectly include this file:

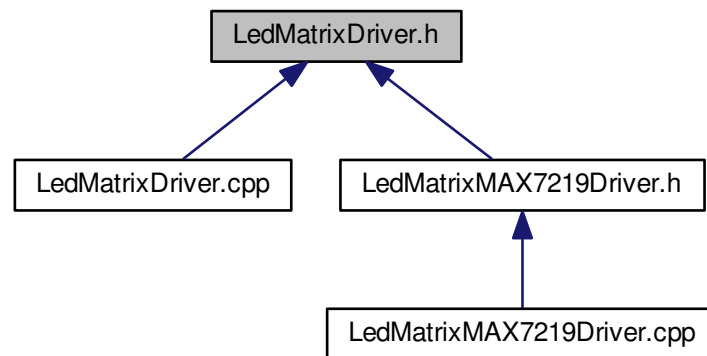

Classes

- class [LedMatrixDriver](#)

5.4 LedMatrixDriver.h

```

00001
00011 #ifndef __ARDUINO_DRIVER_LED_MATRIX_H__
00012 #define __ARDUINO_DRIVER_LED_MATRIX_H__ 1
00013
00014 class LedMatrixDriver {
00015
00016 protected:
00017     unsigned char cols;
00018     unsigned char rows;
00019
00020 public:
00021
00022     enum LedValue {
00023         OFF = 0x00, ON = 0x01, RED = 0x02, GREEN = 0x04
00024     };
00025
00026     enum ShiftDirection {
00027         LEFT = 0x00, RIGHT = 0x01, UP = 0x02, DOWN = 0x03
00028     };
00029
00033     virtual ~LedMatrixDriver();
00034
00038     LedMatrixDriver(unsigned char cols, unsigned char rows);
00039
00043     virtual unsigned char isOutOfBounds(unsigned char col, unsigned char row);
00044
00048     virtual void clear() = 0;
00049
00053     virtual void fill() = 0;
00054
00058     virtual unsigned char getLed(unsigned char col, unsigned char row) = 0;
00059
00063     virtual void setLed(unsigned char col, unsigned char row,
00064         unsigned char value) = 0;
00065
00069     virtual void setRow(unsigned char row, unsigned char value) = 0;
00070
00074     virtual void setCol(unsigned char col, unsigned char value) = 0;
00075
00079     virtual void shiftLed(unsigned char col, unsigned char row,
00080         unsigned char direction) = 0;
  
```

```

00081
00085     virtual void shiftRow(unsigned char row, unsigned char direction) = 0;
00086
00090     virtual void shiftCol(unsigned char col, unsigned char direction) = 0;
00091
00095     virtual void switchLeds(unsigned char colFrom, unsigned char rowFrom,
00096         unsigned char colTo, unsigned char rowTo) = 0;
00097
00101     virtual void switchCols(unsigned char colFrom, unsigned char colTo) = 0;
00102
00106     virtual void switchRows(unsigned char rowFrom, unsigned char rowTo) = 0;
00107
00111     virtual void invertLed(unsigned char col, unsigned char row) = 0;
00112
00116     virtual void invertCols(unsigned char col) = 0;
00117
00121     virtual void invertRows(unsigned char row) = 0;
00122 };
00123
00124 #endif /* __ARDUINO_DRIVER_LED_MATRIX_H__ */

```

5.5 LedMatrixDriverMAX7221.cpp File Reference

Macros

- `#define __ARDUINO_DRIVER_LED_MATRIX_MAX7221_CPP__ 1`

5.5.1 Macro Definition Documentation

5.5.1.1 `#define __ARDUINO_DRIVER_LED_MATRIX_MAX7221_CPP__ 1`

Arduino - LED Matrix MAX7221 driver.

LedMatrixDriverMAX7221.cpp

LED Matrix MAX7221 driver.

Author

Dalmir da Silva dalmirdasilva@gmail.com

Definition at line 12 of file [LedMatrixDriverMAX7221.cpp](#).

5.6 LedMatrixDriverMAX7221.cpp

```

00001
00011 #ifndef __ARDUINO_DRIVER_LED_MATRIX_MAX7221_CPP__
00012 #define __ARDUINO_DRIVER_LED_MATRIX_MAX7221_CPP__ 1
00013
00014
00015 #endif /* __ARDUINO_DRIVER_LED_MATRIX_MAX7221_CPP__ */

```

5.7 LedMatrixDriverMAX7221.h File Reference

5.8 LedMatrixDriverMAX7221.h

```


00001
00011 #ifndef __ARDUINO_DRIVER_LED_MATRIX_MAX7221_H__
00012 #define __ARDUINO_DRIVER_LED_MATRIX_MAX7221_H__ 1
00013
00014
00015 #endif /* __ARDUINO_DRIVER_LED_MATRIX_MAX7221_H__ */

```

5.9 LedMatrixMAX7219Driver.cpp File Reference

```
#include "LedMatrixMAX7219Driver.h"
```

Include dependency graph for LedMatrixMAX7219Driver.cpp:

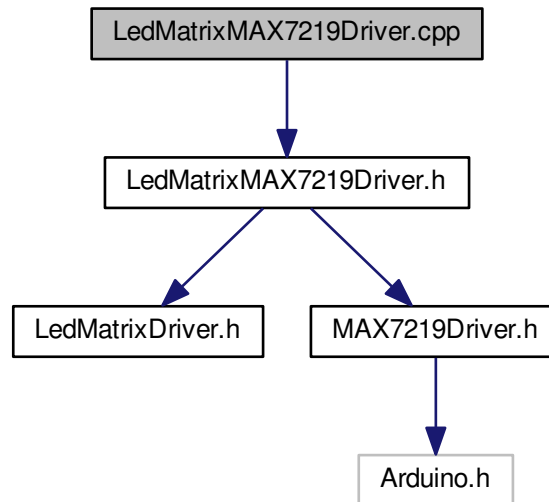

Macros

- `#define __ARDUINO_DRIVER_LED_MATRIX_MAX7219_CPP__ 1`

5.9.1 Macro Definition Documentation

5.9.1.1 `#define __ARDUINO_DRIVER_LED_MATRIX_MAX7219_CPP__ 1`

Arduino - LED Matrix MAX7219 driver.

[LedMatrixMAX7219Driver.cpp](#)

LED Matrix MAX7219 driver.

Author

Dalmir da Silva dalmirdasilva@gmail.com

Definition at line 12 of file [LedMatrixMAX7219Driver.cpp](#).

5.10 LedMatrixMAX7219Driver.cpp

```

00001
00011 #ifndef __ARDUINO_DRIVER_LED_MATRIX_MAX7219_CPP__
00012 #define __ARDUINO_DRIVER_LED_MATRIX_MAX7219_CPP__ 1
00013
00014 #include "LedMatrixMAX7219Driver.h"
00015
00016 LedMatrixMAX7219Driver::LedMatrixMAX7219Driver(
00017     MAX7219Driver *driver,
00017     unsigned char cols, unsigned char rows) :
  
```



```

00018     LedMatrixDriver(cols, rows), driver(driver) {
00019     driver->setTestMode(MAX7219Driver::TEST_MODE_OFF);
00020     driver->setScanLimit(MAX7219Driver::DIGIT_UPTO_7);
00021     driver->setDisplayIntensity(0xff);
00022     driver->setDecodeMode(MAX7219Driver::NO_DECODE);
00023     driver->setShutdown(MAX7219Driver::NORMAL_MODE);
00024     driver->fill(0x00);
00025     for (unsigned char i = 0; i < MAX7219_MATRIX_WIDTH; i++) {
00026         matrixData[i] = 0x00;
00027     }
00028 }
00029
00030 void LedMatrixMAX7219Driver::clear() {
00031     driver->fill(0x00);
00032 }
00033
00034 void LedMatrixMAX7219Driver::fill() {
00035     driver->fill(0xff);
00036 }
00037
00038 unsigned char LedMatrixMAX7219Driver::getLed(unsigned char col,
00039     unsigned char row) {
00040     unsigned char entry, mask;
00041     entry = matrixData[col];
00042     mask = 0x01 << row;
00043     return (entry & mask) ? LedMatrixDriver::ON :
LedMatrixDriver::OFF;
00044 }
00045
00049 void LedMatrixMAX7219Driver::setLed(unsigned char col, unsigned char row,
00050     unsigned char value) {
00051     unsigned char entry, mask = 0;
00052     if (!isOutOfBounds(col, row)) {
00053         entry = matrixData[col];
00054         mask = 0x01 << row;
00055         if (value) {
00056             entry |= mask;
00057         } else {
00058             entry &= ~mask;
00059         }
00060         matrixData[col] = entry;
00061         driver->writeRegister(registerMap[col], entry);
00062     }
00063 }
00064
00065 void LedMatrixMAX7219Driver::setRow(unsigned char row, unsigned char value) {
00066     if (!isOutOfBounds(0, row)) {
00067         for (unsigned char i = 0; i < rows; i++) {
00068             setLed(row, i, value);
00069         }
00070     }
00071 }
00072
00073 void LedMatrixMAX7219Driver::setCol(unsigned char col, unsigned char value) {
00074     if (!isOutOfBounds(col, 0)) {
00075         matrixData[col] = value;
00076         driver->writeRegister(registerMap[col], value);
00077     }
00078 }
00079
00080 void LedMatrixMAX7219Driver::shiftLed(unsigned char col, unsigned char row,
00081     unsigned char direction) {
00082     unsigned char led;
00083     if (!isOutOfBounds(col, row)) {
00084         led = getLed(col, row);
00085         setLed(col, row, (led ? LedMatrixDriver::OFF :
LedMatrixDriver::ON));
00086         if (direction == LEFT) {
00087             col--;
00088         } else if (direction == RIGHT) {
00089             col++;
00090         } else if (direction == UP) {
00091             row++;
00092         } else {
00093             row--;
00094         }
00095         setLed((col % cols), (row % rows), (
led ? LedMatrixDriver::ON : LedMatrixDriver::OFF));
00096     }
00097 }
00098 }
00099
00100 void LedMatrixMAX7219Driver::shiftRow(unsigned char row,
00101     unsigned char direction) {
00102     if (!isOutOfBounds(0, row)) {
00103         for (unsigned char i = 0; i < cols; i++) {
00104             shiftLed(i, row, direction);
00105         }
00106     }

```

```

00106     }
00107 }
00108
00109 void LedMatrixMAX7219Driver::shiftCol(unsigned char col,
00110     unsigned char direction) {
00111     if (!isOutOfBounds(col, 0)) {
00112         unsigned char current = matrixData[col];
00113         matrixData[col] = ~current;
00114         driver->writeRegister(registerMap[col],
matrixData[col]);
00115         if (direction == RIGHT) {
00116             col++;
00117         } else {
00118             col--;
00119         }
00120         col %= cols;
00121         matrixData[col] = current;
00122         driver->writeRegister(registerMap[col],
matrixData[col]);
00123     }
00124 }
00125
00126 void LedMatrixMAX7219Driver::switchLeds(unsigned char colFrom,
00127     unsigned char rowFrom, unsigned char colTo, unsigned char rowTo) {
00128     unsigned char led = getLed(colFrom, rowFrom);
00129     setLed(colFrom, rowFrom, getLed(colTo, rowTo));
00130     setLed(colTo, rowTo, led);
00131 }
00132
00133 void LedMatrixMAX7219Driver::switchCols(unsigned char colFrom,
00134     unsigned char colTo) {
00135
00136 }
00137
00138 void LedMatrixMAX7219Driver::switchRows(unsigned char rowFrom,
00139     unsigned char rowTo) {
00140
00141 }
00142
00143 void LedMatrixMAX7219Driver::invertLed(unsigned char col, unsigned char
row) {
00144
00145 }
00146
00147 void LedMatrixMAX7219Driver::invertCols(unsigned char col) {
00148
00149 }
00150
00151 void LedMatrixMAX7219Driver::invertRows(unsigned char row) {
00152
00153 }
00154
00155 #if MAX7219_MATRIX_INVERT_COLUMN_ORDER == 1
00156 unsigned char LedMatrixMAX7219Driver::registerMap[] = {
00157     MAX7219Driver::DIGIT7,
00158     MAX7219Driver::DIGIT6, MAX7219Driver::DIGIT5,
00159     MAX7219Driver::DIGIT4,
00160     MAX7219Driver::DIGIT3, MAX7219Driver::DIGIT2,
00161     MAX7219Driver::DIGIT1,
00162     MAX7219Driver::DIGIT0};
00163 #else
00164 unsigned char LedMatrixMAX7219Driver::registerMap[] = {
00165     MAX7219Driver::DIGIT0,
00166     MAX7219Driver::DIGIT1, MAX7219Driver::DIGIT2,
00167     MAX7219Driver::DIGIT3,
00168     MAX7219Driver::DIGIT4, MAX7219Driver::DIGIT5,
00169     MAX7219Driver::DIGIT6,
00170     MAX7219Driver::DIGIT7};
00171 #endif /* MATRIX_COL_ORDER */
00172
00173 #endif /* __ARDUINO_DRIVER_LED_MATRIX_MAX7219_CPP__ */

```


5.11 LedMatrixMAX7219Driver.h File Reference

```


#include <LedMatrixDriver.h>
#include <MAX7219Driver.h>

```

Include dependency graph for `LedMatrixMAX7219Driver.h`:

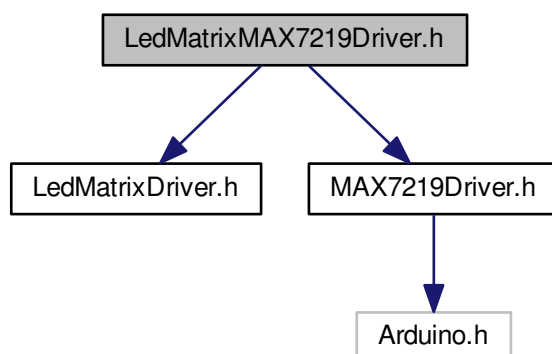

This graph shows which files directly or indirectly include this file:

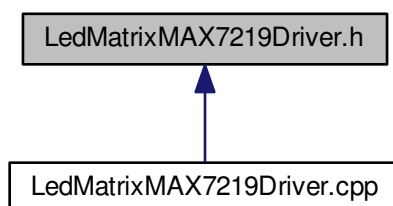

Classes

- class [LedMatrixMAX7219Driver](#)

Macros

- `#define` [MAX7219_MATRIX_WIDTH](#) 8
- `#define` [MAX7219_MATRIX_HEIGHT](#) 8
- `#define` [MAX7219_MATRIX_INVERT_COLUMN_ORDER](#) 0

5.11.1 Macro Definition Documentation

5.11.1.1 `#define` [MAX7219_MATRIX_HEIGHT](#) 8

Definition at line 18 of file [LedMatrixMAX7219Driver.h](#).

5.11.1.2 `#define MAX7219_MATRIX_INVERT_COLUMN_ORDER 0`

Definition at line 19 of file [LedMatrixMAX7219Driver.h](#).

5.11.1.3 `#define MAX7219_MATRIX_WIDTH 8`

Arduino - LED Matrix MAX7219 driver.

LedMatrixDriverMAX7219.h

LED Matrix MAX7219 driver.

Author

Dalmir da Silva dalmirdasilva@gmail.com

Definition at line 17 of file [LedMatrixMAX7219Driver.h](#).

5.12 LedMatrixMAX7219Driver.h

```

00001
00011 #ifndef __ARDUINO_DRIVER_LED_MATRIX_MAX7219_H__
00012 #define __ARDUINO_DRIVER_LED_MATRIX_MAX7219_H__ 1
00013
00014 #include <LedMatrixDriver.h>
00015 #include <MAX7219Driver.h>
00016
00017 #define MAX7219_MATRIX_WIDTH 8
00018 #define MAX7219_MATRIX_HEIGHT 8
00019 #define MAX7219_MATRIX_INVERT_COLUMN_ORDER 0
00020
00021 class LedMatrixMAX7219Driver : public LedMatrixDriver {
00022
00023     MAX7219Driver *driver;
00024
00025     unsigned char matrixData[MAX7219_MATRIX_WIDTH];
00026     static unsigned char registerMap[MAX7219_MATRIX_WIDTH];
00027
00028 public:
00029
00030     LedMatrixMAX7219Driver(MAX7219Driver *driver, unsigned char
cols,
00031                             unsigned char rows);
00032
00033     ~LedMatrixMAX7219Driver() {
00034     }
00035
00039     virtual void clear();
00040
00044     virtual void fill();
00045
00049     virtual unsigned char getLed(unsigned char col, unsigned char row);
00050
00054     virtual void setLed(unsigned char col, unsigned char row,
00055                         unsigned char value);
00056
00060     virtual void setRow(unsigned char row, unsigned char value);
00061
00065     virtual void setCol(unsigned char col, unsigned char value);
00066
00070     virtual void shiftLed(unsigned char col, unsigned char row,
00071                          unsigned char direction);
00072
00076     virtual void shiftRow(unsigned char row, unsigned char direction);
00077
00081     virtual void shiftCol(unsigned char col, unsigned char direction);
00082
00086     virtual void switchLeds(unsigned char colFrom, unsigned char rowFrom,
00087                            unsigned char colTo, unsigned char rowTo);
00088
00092     virtual void switchCols(unsigned char colFrom, unsigned char colTo);
00093
00097     virtual void switchRows(unsigned char rowFrom, unsigned char rowTo);
00098
00102     virtual void invertLed(unsigned char col, unsigned char row);
00103
00107     virtual void invertCols(unsigned char col);
00108
00112     virtual void invertRows(unsigned char row);

```

```


00113 };
00114
00115 #endif /* __ARDUINO_DRIVER_LED_MATRIX_MAX7219_H__ */

```

5.13 MAX7219Driver.cpp File Reference

```
#include "MAX7219Driver.h"
```

Include dependency graph for MAX7219Driver.cpp:

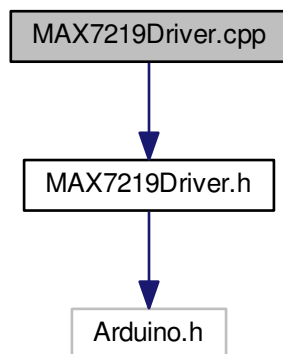

Macros

- `#define __ARDUINO_DRIVER_MAX7219_CPP__ 1`

5.13.1 Macro Definition Documentation

5.13.1.1 `#define __ARDUINO_DRIVER_MAX7219_CPP__ 1`

Arduino - MAX7219 driver.

[MAX7219Driver.cpp](#)

MAX7219 driver.

Author

Dalmir da Silva dalmirdasilva@gmail.com

Definition at line 12 of file [MAX7219Driver.cpp](#).

5.14 MAX7219Driver.cpp

```

00001
00011 #ifndef __ARDUINO_DRIVER_MAX7219_CPP__
00012 #define __ARDUINO_DRIVER_MAX7219_CPP__ 1
00013
00014 #include "MAX7219Driver.h"
00015
00016 MAX7219Driver::MAX7219Driver(unsigned char dataPin, unsigned char clockPin,
00017                               unsigned char loadPin) {
00018     this->dataPin = dataPin;
00019     this->clockPin = clockPin;

```

```


00020     this->loadPin = loadPin;
00021     pinMode(dataPin, OUTPUT);
00022     pinMode(clockPin, OUTPUT);
00023     pinMode(loadPin, OUTPUT);
00024 }
00025
00026 void MAX7219Driver::setShutdown(unsigned char value) {
00027     writeRegister(SHUTDOWN, value);
00028 }
00029
00030 void MAX7219Driver::setDecodeMode(unsigned char mode) {
00031     writeRegister(DECODE_MODE, mode);
00032 }
00033
00034 void MAX7219Driver::setDisplayIntensity(unsigned char intensity) {
00035     writeRegister(INTENSITY, intensity);
00036 }
00037
00038 void MAX7219Driver::setScanLimit(unsigned char limit) {
00039     writeRegister(SCAN_LIMIT, limit);
00040 }
00041
00042 void MAX7219Driver::setTestMode(unsigned char mode) {
00043     writeRegister(DISPLAY_TEST, mode);
00044 }
00045
00046 void MAX7219Driver::fill(unsigned char pattern) {
00047     unsigned char digitMap[MAX7219_WIDTH] = {DIGIT0, DIGIT1,
00048         DIGIT2, DIGIT3,
00049         DIGIT4, DIGIT5, DIGIT6, DIGIT7};
00049     for (unsigned char i = 0; i < MAX7219_WIDTH; i++) {
00050         writeRegister(digitMap[i], pattern);
00051     }
00052 }
00053
00054 void MAX7219Driver::writeRegister(unsigned char reg, unsigned char value) {
00055     unsigned int package = createPackage(reg, value);
00056     sendPackage(package);
00057 }
00058
00059 void MAX7219Driver::sendPackage(unsigned int package) {
00060     unsigned char reg = (unsigned char) ((package >> 8) & 0xff);
00061     unsigned char order = MSBFIRST;
00062     if (reg >= DIGIT0 && reg <= DIGIT7) {
00063         order = MAX7219_DIGIR_ORDER;
00064     }
00065     digitalWrite(loadPin, LOW);
00066     shiftOut(dataPin, clockPin, MSBFIRST, reg);
00067     shiftOut(dataPin, clockPin, order, (unsigned char) (package & 0xff));
00068     digitalWrite(loadPin, HIGH);
00069 }
00070
00071 unsigned int MAX7219Driver::createPackage(unsigned char reg,
00072     unsigned char payload) {
00073     unsigned int package;
00074     package = (0x000f & reg);
00075     package <= 8;
00076     package |= (0x00ff & payload);
00077     return package;
00078 }
00079
00080 #endif /* __ARDUINO_DRIVER_MAX7219_CPP__ */

```


5.15 MAX7219Driver.h File Reference

```
#include <Arduino.h>
```

Include dependency graph for MAX7219Driver.h:



This graph shows which files directly or indirectly include this file:

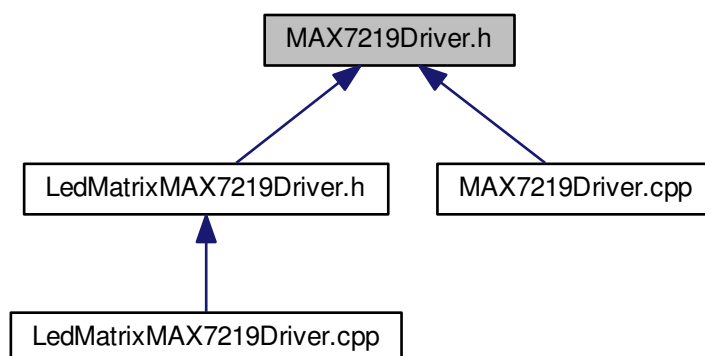

Classes

- class [MAX7219Driver](#)

Macros

- `#define` [MAX7219_WIDTH](#) 8
- `#define` [MAX7219_HEIGHT](#) 8
- `#define` [MAX7219_DIGIR_ORDER](#) LSBFIRST

5.15.1 Macro Definition Documentation

5.15.1.1 `#define` [MAX7219_DIGIR_ORDER](#) LSBFIRST

Definition at line 28 of file [MAX7219Driver.h](#).