


1. Class Diagram1

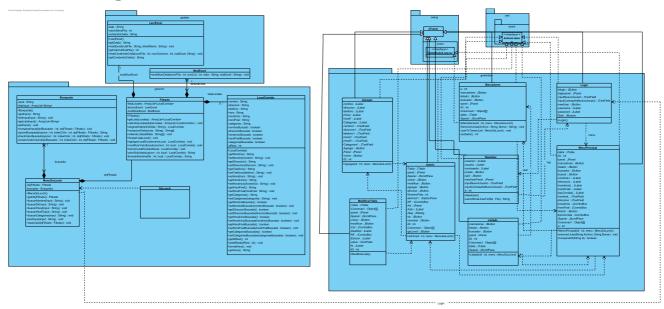

2. awt

2.1. Properties

Abstract	false
Leaf	false
Root	false
Visibility	public

2.2. Children Summary

Name	Description
event	

■3. event

3.1. Properties

Abstract	false
Leaf	false
Root	false
Visibility	public

3.2. Children Summary

Name	Description
ActionListener	

4. ActionListener

4.1. Stereotypes

<<Interface>>

4.2. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

4.3. Relationships

Relationship	From	То
< ^R unnamed	ActionListener	<u>Login</u>
√R. unnamed	ActionListener	<u>Marcadores</u>
√R unnamed	ActionListener	<u>Agregar</u>
√R unnamed	ActionListener	MenuPrincipal
< ^R unnamed	ActionListener	Admin
< ^R unnamed	ActionListener	NewUser
< ^R unnamed	<u>ActionListener</u>	<u>Listado</u>
√R unnamed	ActionListener	ModificarTabla

■5. godata

5.1. Properties

Abstract	false
Leaf	false
Root	false
Visibility	public

5.2. Children Summary

Name	Description		
<u>LeerExcel</u>			
ModExcel			

■ 6. LeerExcel

6.1. Properties

|--|--|

Abstract	false
Leaf	false
Root	false
Active	false

6.2. Attributes Summary

Name	Description
ontenidoCelda	
e data	
ovalorUltimaFila	

6.3. Operations Summary

Name	Description
⊕ getContenidoCelda	
⊖ getData	
egetValorUltimaFila	
⊖ LeerExcel	
ereadContenidoCeld	а
eadExcel excel exce	

6.4. Attributes

⊜ 6.4.1. contenidoCelda

Visibility	private
Туре	String
⊖ 6.4.2. data	

Visibility private

Visibility private

Type int

6.5. Operations

⊕ 6.5.1. getContenidoCelda

Visibility public

Return Type String

⊕ 6.5.2. getData

Visibility public

Return Type String

⊕ 6.5.3. getValorUltimaFila

Visibility public **Return Type** int **⊖** 6.5.4. LeerExcel Visibility public ⊕ 6.5.5. readContenidoCelda Visibility public **Return Type** void **⊕** 6.5.6. readExcel Visibility public **Return Type** void

6.6. Relationships

Relationship	From	То
modificarExcel	Filtrado	<u>LeerExcel</u>

7. ModExcel

7.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

7.2. Operations Summary

Name	Description

7.3. Operations

⊕ 7.3.1. modificarCelda

Visibility	public
Return Type	void

7.4. Relationships

Relationship	From	То
lecturaExcel	<u>Filtrado</u>	ModExcel

≥8. golunch

8.1. Properties

Abstract	false
Leaf	false

Root	false
Visibility	public

8.2. Children Summary

Name	Description
<u>Busqueda</u>	
Filtrado	
GoLunch	
<u>LocalComida</u>	
MenuGoLunch	

9. Busqueda

9.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

9.2. Attributes Summary

Name	Description	
input		
listaInput		

9.3. Operations Summary

Name	Desc	ription
Busqueda		
eheckValorB	Buscado	
⊖ compararInp	put	
egetInput		
getListaInpu	ut	
	queda	
erevisionValo	orVacio	
estInput		
⇔ splitInput		

9.4. Attributes

⊜ 9.4.1. input

Visibility private

Type String

9.4.2. listalnput

Visibility private

Type ArrayList<String>

9.5. Operations

⊕ 9.5.1. Busqueda

Visibility public

⊕ 9.5.2. checkValorBuscado

Visibility private

Return Type void

😝 9.5.3. compararinput

Visibility public

Return Type void

⊕ 9.5.4. getInput

Visibility public

Return Type String

9.5.5. getListaInput

Visibility public

Return Type ArrayList<String>

⊕ 9.5.6. opcionBusqueda

Visibility private

Return Type String

⊕ 9.5.7. revisionValorVacio

Visibility private

Return Type void

⊖ 9.5.8. setInput

Visibility public

Return Type void

⊕ 9.5.9. splitInput

Visibility private

Return Type void

9.6. Relationships

Relationship	From	То
— buscador	MenuGoLunch	Busqueda

■ 10. Filtrado

10.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

10.2. Attributes Summary

Name	Description
electuraExcel	
e listaLocales	
modificarExcel	

10.3. Operations Summary

Name	Description	
⊕ agregarLocalExce	N	
easignarDatos		
borrarLocalExcel ■		
Filtrado		
egetListaLocales		
modificarValorExc modificarValo	el	
erecepcionDatos		
ellenarLista		
estListaLocales		

10.4. Attributes

⊜ 10.4.1. lecturaExcel

Visibility	private
Туре	LeerExcel

⊜ 10.4.2. listaLocales

|--|

Type

ArrayList<LocalComida>

⊜ 10.4.3. modificarExcel

Visibility private

Type <u>ModExcel</u>

10.5. Operations

⊕ 10.5.1. agregarLocalExcel

Visibility public

Return Type void

⊕ 10.5.2. asignarDatos

Visibility public

Return Type LocalComida

⊕ 10.5.3. borrarLocalExcel

Visibility public

Return Type void

€ 10.5.4. Filtrado

Visibility public

⊕ 10.5.5. formatoNombre

Visibility private

Return Type String

⊕ 10.5.6. getListaLocales

Visibility public

Return Type ArrayList<LocalComida>

⊕ 10.5.7. limpiarListaLocal

Visibility public

Return Type void

⊕ 10.5.8. modificarValorExcel

Visibility public

Return Type void

⊕ 10.5.9. recepcionDatos

Visibility public

Return Type String[]

⊕ 10.5.10. rellenarLista

Visibility public

Return Type void

⊕ 10.5.11. setListaLocales

Visibility public

Return Type void

⊖ 10.5.12. valorSolicitado

Visibility private

Return Type String

10.6. Relationships

Relationship	From	То
— lecturaExcel	<u>Filtrado</u>	ModExcel
listaLocales	Filtrado	<u>LocalComida</u>
modificarExcel	<u>Filtrado</u>	LeerExcel
objFiltrado	MenuGoLunch	<u>Filtrado</u>

11. LocalComida

11.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

11.2. Attributes Summary

Name	Description
e categorias	
e categoriasBusc	adas
direccion	
direccionBusca	da
hora	
e horaFinal	
	ada
noralnicio	
	ada
idRest	

Name	Description
nombre	
nombreBusca	ado
elefono	
11.3. Opera	tions Summary
Name	Description
egetCategorias	3
egetCategorias	sBusca
egetDireccion	
egetDireccionE	Buscad
egetHora	
egetHoraFinal	
egetHoraFinalla	Buscad
egetHoralnicio	
egetHoraInicio	Busca
egetIdRest	
egetNombre	
egetNombreBu	ıscado
egetTelefono	
estCategorias	3
estCategorias das	Busca
estDireccion	
e setDireccionE	3uscad
esetHora	
esetHoraFinal	
estHoraFinalE	Buscad

Name	Description
estHoralnicio	
estHoralnicioBusca	
⇒ setIdRest	
⊕ setNombre	
setTelefono	
11.4. Attributes	
⊜ 11.4.1. categoria	as
Visibility	private
Туре	String
	asBuscadas
Visibility	private
Туре	boolean
11.4.3. direccion	n
Visibility	private
Туре	String
11.4.4. direccion	nBuscada
Visibility	private
Туре	boolean
⊜ 11.4.5. hora	
Visibility	private
Туре	String
⊜ 11.4.6. horaFina	il
Visibility	private
Туре	String
⊜ 11.4.7. horaFina	alBuscada
Visibility	private
Туре	boolean

Type String

private

⊜ 11.4.8. horalnicio

Visibility

⊜ 11.4.9. horalnicioBuscada

Visibility private

Type boolean

Visibility private

Type int

⊜ 11.4.11. nombre

Visibility private

Type String

⊜ 11.4.12. nombreBuscado

Visibility private

Type boolean

Visibility private

Type String

11.5. Operations

⊕ 11.5.1. formatHora

Visibility private

Return Type void

⊕ 11.5.2. getCategorias

Visibility public

Return Type String

⊕ 11.5.3. getCategoriasBuscadas

Visibility public

Return Type boolean

€ 11.5.4. getDireccion

Visibility public

Return Type String

⊕ 11.5.5. getDireccionBuscada

Visibility public

Return Type boolean

⊕ 11.5.6. getHora

Visibility public

Return Type String

⊕ 11.5.7. getHoraFinal

Visibility public

Return Type String

⊕ 11.5.8. getHoraFinalBuscada

Visibility public

Return Type boolean

⊕ 11.5.9. getHoralnicio

Visibility public

Return Type String

⊕ 11.5.10. getHoralnicioBuscada

Visibility public

Return Type boolean

⊕ 11.5.11. getIdRest

Visibility public

Return Type int

⊕ 11.5.12. getNombre

Visibility public

Return Type String

⊕ 11.5.13. getNombreBuscado

Visibility public

Return Type boolean

⊕ 11.5.14. getTelefono

Visibility public

Return Type String

⊕ 11.5.15. LocalComida

Visibility public

⊕ 11.5.16. setCategorias

Visibility public

Return Type void

€ 11.5.17. setCategoriasBuscadas

Visibility public

Return Type void

⊕ 11.5.18. setDireccion

Visibility public

Return Type void

⊕ 11.5.19. setDireccionBuscada

Visibility public

Return Type void

⊕ 11.5.20. setHora

Visibility public

Return Type void

⊕ 11.5.21. setHoraFinal

Visibility public

Return Type void

⊕ 11.5.22. setHoraFinalBuscada

Visibility public

Return Type void

⊕ 11.5.23. setHoralnicio

Visibility public

Return Type void

⊕ 11.5.24. setHoralnicioBuscada

Visibility public

Return Type void

⊕ 11.5.25. setIdRest

Visibility public

Return Type void

⊕ 11.5.26. setNombre

Visibility public

Return Type void

€ 11.5.27. setNombreBuscado

Visibility public

Return Type void

⊕ 11.5.28. setTelefono

Visibility public

Return Type void

11.6. Relationships

Relationship	From	То
listaLocales	<u>Filtrado</u>	<u>LocalComida</u>

■ 12. MenuGoLunch

12.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

12.2. Attributes Summary

Name	Description		
⊖ buscador			
⊜ objFiltrado			

12.3. Operations Summary

Name	Description
buscarCategorias	
eb buscarDir	
⊕ buscarHiraF	
ebuscarHoral	
buscarNombre	
e clearList	
getObjFiltrado	
MenuGoLunch ■ ■ ■ MenuGoLunch ■ ■ □	
esendInput	

12.4. Attributes

⊜ 12.4.1. buscador

Visibility	private
Туре	<u>Busqueda</u>
⊜ 12.4.2. objF	iltrado
Visibility	private
Type	Filtrado

12.5. Operations

⊕ 12.5.1. buscarCategorias

Visibility	public	
Return Type	void	

⊕ 12.5.2. buscarDir

Visibility public

Return Type void

⊕ 12.5.3. buscarHiraF

Visibility public

Return Type void

⊕ 12.5.4. buscarHoral

Visibility public

Return Type void

⊕ 12.5.5. buscarNombre

Visibility public

Return Type void

⊕ 12.5.6. clearList

Visibility public

Return Type void

€ 12.5.7. getObjFiltrado

Visibility public

Return Type <u>Filtrado</u>

⊕ 12.5.8. MenuGoLunch

Visibility public

⊕ 12.5.9. sendInput

Visibility private

Return Type void

12.6. Relationships

Relationship	From	То
> unnamed	GoLunch	MenuGoLunch MenuGoLunch
— buscador	MenuGoLunch	<u>Busqueda</u>
objFiltrado	MenuGoLunch MenuGoLunch	<u>Filtrado</u>

■13. gowindow

13.1. Properties

Abstract	false
Leaf	false
Root	false
Visibility	public

13.2. Children Summary

Name	Description
<u>Admin</u>	
<u>Agregar</u>	
<u>Listado</u>	
Login	
Marcadores	
<u>MenuPrincipal</u>	
ModificarTabla	
NewUser	

14. Admin

14.1. Properties

	•	
Visibility	public	
Abstract	false	
Leaf	false	
Root	false	
Active	false	

14.2. Attributes Summary

Name	Description
⊜ Ad	
Adm	
agregar	
e cancelar	
⊖ Columnas1	

Name	Description
diag	
eliminar	
eliminar1	
goLunch	
⊜ID	
modificar	
⊖NF	
NumeroFilas	
⊜ ok	
e panel	
Spanel	
olver e	

14.3. Operations Summary

Name	Description
⊖ Admin	

14.4. Attributes

⊜ 14.4.1. Ad

Visibility	private
Туре	JPanel

⊜ 14.4.2. Adm

⊜ 14.4.3. agregar

Visibility	private	
Туре	JButton	

⊜ 14.4.4. cancelar

Visibility	private
Туре	JButton
∋ 14.4.5. Co	lumnas1

Type Object[][]

⊜ 14.4.6. diag

Visibility private

Type JDialog

⊜ 14.4.7. eliminar

Visibility private

Type JButton

⊜ 14.4.8. eliminar1

Visibility private

Type JOptionPane

⊜ 14.4.9. goLunch

Visibility private

Type JButton

⊜ 14.4.10. ID

Visibility private

Type int

⊜ 14.4.11. modificar

Visibility private

Type JButton

⊜ 14.4.12. NF

Visibility private

Type JComboBox

14.4.13. NumeroFilas

Visibility private

Type int

⊜ 14.4.14. ok

Visibility private

Type JButton

⊜ 14.4.15. panel

Visibility private

Type JPanel

⊜ 14.4.16. Spanel

Visibility private

Type JScrollPane

⊜ 14.4.17. Tabla

Visibility private

Type JTable

⊜ 14.4.18. volver

Visibility private

Type JButton

14.5. Operations

⊖ 14.5.1. Admin

Visibility public

14.6. Relationships

Relationship	From	То
> unnamed	<u>MenuPrincipal</u>	<u>Admin</u>
> unnamed	<u>Agregar</u>	Admin
← unnamed	<u>JFrame</u>	Admin
√R unnamed	ActionListener	<u>Admin</u>
> unnamed	<u>ModificarTabla</u>	Admin

15. Agregar

15.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

15.2. Attributes Summary

Name	Description		
Agregar			
Categorias			
Categorias1			
direccion			
e direccion1			
⊖ HoraF			

Name	Description
⊖ HoraF1	
⊖ Horal	
⊖ Horal1	
⊜ID	
nombre	
enombre1	
⊖ Panel	
elefono	
etelefono1	
olver e	

15.3. Operations Summary

Name	Description
⊖ Agregar	

15.4. Attributes

⊜ 15.4.1. Agregar

Visibility	private
Туре	JButton

⊜ 15.4.2. Categorias

Type JLabel	Visibility	private		
	Туре	JLabel		

⊜ 15.4.3. Categorias1

Visibility	private
Туре	JTextField

⊜ 15.4.4. direccion

Visibility	private		
Туре	JLabel		

⊜ 15.4.5. direccion1

Visibility	private
Туре	JTextField

1	5.	4.	6.	Н	0	ra	F

Type JLabel

⊜ 15.4.7. HoraF1

Visibility private

Type JTextField

⊜ 15.4.8. Horal

Visibility private

Type JLabel

⊜ 15.4.9. Horal1

Visibility private

Type JTextField

⊜ 15.4.10. ID

Visibility private

Type int

⊜ 15.4.11. nombre

Visibility private

Type JLabel

⊜ 15.4.12. nombre1

Visibility private

Type JTextField

⊜ 15.4.13. Panel

Visibility private

Type JPanel

⊜ 15.4.14. telefono

Visibility private

Type JLabel

⊜ 15.4.15. telefono1

Visibility private

Type JTextField

⊜ 15.4.16. volver

Visibility private

Type JButton

15.5. Operations

⊖ 15.5.1. Agregar

Visibility public

15.6. Relationships

Relationship	From	То
> unnamed	<u>Agregar</u>	Admin
← unnamed	J Frame	<u>Agregar</u>
< ^R unnamed	<u>ActionListener</u>	<u>Agregar</u>
·> unnamed	Admin	<u>Agregar</u>

■ 16. Listado

16.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

16.2. Attributes Summary

Name	Description
⊜ buscador	
⊖ Columnas1	
⊜ID	
e listado	
epanel	
Spanel	
e tabla	

16.3. Operations Summary

Name	Description
⊖ Listado	

16.4. Attributes

⊜ 16.4.1. buscador

⊜ 16.4.2. Columnas1

Visibility private

Type Object[][]

⊜ 16.4.3. ID

Visibility private

Type int

⊜ 16.4.4. listado

Visibility private

Type JButton

⊜ 16.4.5. marcadores

Visibility private

Type JButton

⊜ 16.4.6. panel

Visibility private

Type JPanel

⊜ 16.4.7. Spanel

Visibility private

Type JScrollPane

⊜ 16.4.8. tabla

Visibility private

Type JTable

16.5. Operations

⊖ 16.5.1. Listado

Visibility public

16.6. Relationships

Relationship	From	То
> unnamed	<u>Listado</u>	<u>Marcadores</u>
> unnamed	<u>Listado</u>	MenuPrincipal
d—unnamed	<u>JFrame</u>	<u>Listado</u>
R unnamed	ActionListener	<u>Listado</u>
> unnamed	MenuPrincipal	<u>Listado</u>

17. Login

17.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

17.2. Attributes Summary

Name	Description
e blogin	
⊜ inputContraseñaNue voUsuario	Э
inputNuevoUsuario	
e loginpanel	
newUser	
password	
Salir	
e username	

17.3. Operations Summary

Name	Description
⊖ Login	

17.4. Attributes

⊜ 17.4.1. blogin

Visibility	private
Туре	JButton

☐ 17.4.2. inputContraseñaNuevoUsuario

Visibility	private	
Туре	JTextField	
_		

⊜ 17.4.3. inputNuevoUsuario

⊜ 17.4.4. loginpanel

Visibility private

Type JButton

⊜ 17.4.6. password

Visibility private

Type JLabel

⊜ 17.4.7. Salir

Visibility private

Type JButoon

⊜ 17.4.8. username

Visibility private

Type JLabel

17.5. Operations

⊖ 17.5.1. Login

Visibility public

17.6. Relationships

Relationship	From	То
> log	NewUser	<u>Login</u>
> Login		Login
> menu	<u>Login</u>	<u>MenuPrincipal</u>
← unnamed	<u>JFrame</u>	Login
√ R unnamed	ActionListener	Login

18. Marcadores

18.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

18.2. Attributes Summary

Name	Description
buscador	

Name	Description
Columnas1	
⊜ID	
listado	
marcadores	
epanel	
⊜s	
Spanel	
e tabla	
18.3. Operation	ons Summary

Name	Description
⇔ contador	
⊖ LeerTxT	
Marcadores	
RemoverLinea	

18.4. Attributes

⊜ 18.4.1. buscador

⊜ 18.4.2. Columnas1

Visibility	private
Туре	Object[][]

⊜ 18.4.3. ID

Visibility	private
Туре	int

⊜ 18.4.4. listado

Visibility	private
Туре	JButton

⊜ 18.4.5. marcadores

Visibility	private	
Туре	JButton	

⊜ 18.4.6. panel

Visibility private

Type JPanel

⊜ 18.4.7. s

Visibility private

Type int

⊜ 18.4.8. Spanel

Visibility private

Type JScrollPane

⊜ 18.4.9. tabla

Visibility private

Type JTable

18.5. Operations

⊖ 18.5.1. contador

Visibility private

Return Type int

⊖ 18.5.2. LeerTxT

Visibility private

Return Type void

⊕ 18.5.3. Marcadores

Visibility public

⊕ 18.5.4. RemoverLinea

Visibility private

Return Type void

18.6. Relationships

Relationship	From	То
> unnamed	<u>Marcadores</u>	<u>MenuPrincipal</u>
> unnamed	<u>Listado</u>	Marcadores
← unnamed	■ JFrame	<u>Marcadores</u>
√R unnamed	<u>ActionListener</u>	<u>Marcadores</u>
> unnamed	MenuPrincipal	<u>Marcadores</u>

■ 19. MenuPrincipal

19.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

19.2. Attributes Summary

Admin buscador buscar Columnas1 direccion direccionL horaFinal horaFinalL horaInicio horalnicioL listado narcadores nombreL nombreLL panel ss Spanel tabla	Name	Description
 ⇒ buscar ⇒ Columnas1 ⇒ direccion ⇒ direccionL ⇒ horaFinal ⇒ horaFinalL ⇒ horaInicio ⇒ horaInicioL ⇒ ID ⇒ listado ⇒ marcadores ⇒ nombreL ⇒ panel ⇒ s ⇒ Spanel ⇒ tipoComida 	Admin	
 Columnas1 direccion direccionL horaFinal horaInicio horalnicioL ID listado marcadores nombreL panel s Spanel tabla tipoComida 		
 direccion direccionL horaFinal horaInicio horaInicioL ID listado marcadores nombreL panel s Spanel tabla tipoComida 	⊜ buscar	
 direccionL horaFinal horaInicio horaInicioL ID listado marcadores nombreL panel s Spanel tabla tipoComida 	Columnas1	
 ⇔ horaFinalL ⇔ horaInicio ⇔ horaInicioL ⇔ ID ⇔ listado ⇔ marcadores ⇔ nombreL ⇔ panel ⇔ s ⇔ Spanel ⇔ tabla ⇔ tipoComida 	direccion	
 ⇔ horaFinalL ⇔ horaInicio ⇔ horaInicioL ⇔ ID ⇔ listado ⇔ marcadores ⇔ nombreL ⇔ nombreLL ⇔ panel ⇔ s ⇔ Spanel ⇔ tabla ⇔ tipoComida 	direccionL	
 ⇔ horalnicio ⇔ horalnicioL ⇔ ID ⇔ listado ⇔ marcadores ⇔ nombreL ⇔ nombreLL ⇔ panel ⇔ s ⇔ Spanel ⇔ tabla ⇔ tipoComida 	⊖ horaFinal	
 ⊨ horalnicioL ⊨ ID ⊨ listado ⊨ marcadores ⊨ nombreL ⊨ nombreLL ⊨ panel ⊨ s ⊨ Spanel ⊨ tabla ⊨ tipoComida 	e horaFinalL	
 □ ID □ listado □ marcadores □ nombreL □ nombreLL □ panel □ s □ Spanel □ tabla □ tipoComida 	horalnicio	
 istado marcadores nombreL nombreLL panel s Spanel tabla tipoComida 	e horalnicioL	
marcadores nombreL nombreLL panel s Spanel tabla tipoComida	⊜ ID	
 nombreL nombreLL panel s Spanel tabla tipoComida 	listado	
nombreLL panel s Spanel tabla tipoComida	marcadores	
 panel s Spanel tabla tipoComida 	nombreL	
 ⇒ s ⇒ Spanel ⇒ tabla ⇒ tipoComida 	nombreLL	
⇒ Spanel⇒ tabla⇒ tipoComida	e panel	
 tabla tipoComida	⊜s	
etipoComida	Spanel	
	e tabla	
etipoComidaL	tipoComida	
	etipoComidaL	

19.3. Operations Summary

Name	Description
⊖ CompararID	

Name Description

emoverLinea

19.4. Attributes

⊜ 19.4.1. Admin

Visibility private

Type JButton

⊜ 19.4.2. buscador

Visibility private

Type JButton

⊜ 19.4.3. buscar

Visibility private

Type JButton

⊜ 19.4.4. Columnas1

Visibility private

Type Object[][]

Visibility private

Type JTextField

€ 19.4.6. direccionL

Visibility private

Type JLabel

⊜ 19.4.7. horaFinal

Visibility private

Type JComboBox

19.4.8. horaFinalL

Visibility private

Type JLabel

⊕ 19.4.9. horalnicio

Visibility private

Type JComboBox

₱ 19.4.10. horalnicioL

Visibility private

Type JLabel

⊜ 19.4.11. ID

Visibility private

Type int

⊜ 19.4.12. listado

Visibility private

Type JButton

₱ 19.4.13. marcadores

Visibility private

Type JButton

⊜ 19.4.14. nombreL

Visibility private

Type JTextField

⊜ 19.4.15. nombreLL

Visibility private

Type JLabel

⊜ 19.4.16. panel

Visibility private

Type JPanel

⊜ 19.4.17. s

Visibility private

Type int

⊜ 19.4.18. Spanel

Visibility private

Type JScrollPane

⊖ 19.4.19. tabla

Visibility private

Type JTable

Visibility private

Type JComboBox

⊕ 19.4.21. tipoComidaL

Visibility private

Type JLabel

19.5. Operations

⊖ 19.5.1. CompararID

Visibility private

Return Type boolean

⊕ 19.5.2. MenuPrincipal

Visibility public

⊖ 19.5.3. removerLinea

Visibility private

Return Type void

19.6. Relationships

Relationship	From	То
> menu	Login	<u>MenuPrincipal</u>
> unnamed	MenuPrincipal	Admin
> unnamed	MenuPrincipal	<u>Listado</u>
> unnamed	MenuPrincipal	<u>Marcadores</u>
> unnamed	<u>Marcadores</u>	MenuPrincipal
← unnamed	J Frame	MenuPrincipal
< ^R unnamed	<u>ActionListener</u>	MenuPrincipal MenuPrincipal
√R unnamed	<u>TableModelListener</u>	<u>MenuPrincipal</u>
> unnamed	<u>Listado</u>	MenuPrincipal MenuPrincipal
> unnamed	Admin	MenuPrincipal

20. ModificarTabla

20.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

20.2. Attributes Summary

Name	Description
⊝ Cat	

Name	Description		
Columnas1			
□ DesMod			
edicion			
⊜ID			
modificar			
⊜N			
⊜ NF			
panel			
Spanel			
□ Tabla			
e value			
volver			
20.3. Operation	ons Summary		
Name	Description		

⊜ 20.4.1. Cat

Visibility private

Type JComboBox

⊜ 20.4.2. Columnas1

Visibility private

Type Object[][]

⊜ 20.4.3. DesMod

Visibility private

Type JLabel

⊜ 20.4.4. Edicion

Visibility private

Type JLabel

⊜ 20.4.5. ID

Visibility private

Type int

⊜ 20.4.6. modificar

Visibility	private
Туре	JButton

⊜ 20.4.7. N

Visibility private

Type JLabel

⊜ 20.4.8. NF

Visibility private

Type JComboBox

⊜ 20.4.9. panel

Visibility private

Type JPanel

⊜ 20.4.10. Spanel

Visibility private

Type JScrollPane

⊜ 20.4.11. Tabla

Visibility private

Type JTable

⊜ 20.4.12. value

Visibility private

Type JTextField

⊜ 20.4.13. volver

Visibility private

Type JButton

20.5. Operations

⊕ 20.5.1. ModificarLista

Visibility public

20.6. Relationships

Relationship	From	То
> unnamed	<u>ModificarTabla</u>	Admin
← unnamed	<u>JFrame</u>	ModificarTabla
√R unnamed	ActionListener	ModificarTabla

21. NewUser

21.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

21.2. Attributes Summary					
Name	Description				
⊖ contraseña					
e creacion					
create					
inputContraseñaNue	Э				
inputNuevoUsuario					
enewUserPanel					
⊜s					
e salir					
usuario					

21.3. Operations Summary

private

Name	Description		
← LeerUltimaLineaTxt			
⊖ NewUser			

21.4. Attributes

Visibility

⊜ 21.4.1. contraseña

21.4.4. inputContraseñaNuevoUsuario

Visibility private

Type JTextField

● 21.4.5. inputNuevoUsuario

Visibility private

Type JTextField

⊜ 21.4.6. newUserPanel

Visibility private

Type JPanel

⊖ 21.4.7. s

Visibility private

Type int

Visibility private

Type JButton

⊜ 21.4.9. usuario

Visibility private

Type JLabel

21.5. Operations

⊕ 21.5.1. LeerUltimaLineaTxt

Visibility private

Return Type String

⊖ 21.5.2. NewUser

Visibility public

21.6. Relationships

Relationship	From	То
← unnamed	<u>JFrame</u>	NewUser
√ R unnamed	ActionListener	NewUser
> user	⊖ Login	NewUser NewUser

22. swing

22.1. Properties

Abstract	false
Leaf	false
Root	false
Visibility	public

22.2. Children Summary

Name	Description
event	
<u>JFrame</u>	

≥ 23. event

23.1. Properties

Abstract	false
Leaf	false
Root	false
Visibility	public

23.2. Children Summary

Name	Description		
TableModelListene	<u>er</u>		

24. JFrame

24.1. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

24.2. Relationships

Relationship	From	То
← unnamed	<u>JFrame</u>	<u>Agregar</u>
← unnamed	<u>JFrame</u>	<u>Marcadores</u>
← unnamed	<u>JFrame</u>	<u>Login</u>
← unnamed	<u>JFrame</u>	<u>MenuPrincipal</u>
← unnamed	<u>JFrame</u>	Admin

Relationship	From	То
← unnamed	<u>JFrame</u>	ModificarTabla
← unnamed	<u>JFrame</u>	<u>NewUser</u>
← unnamed	<u>JFrame</u>	<u>Listado</u>

25. TableModelListener

25.1. Stereotypes

<<Interface>>

25.2. Properties

Visibility	public
Abstract	false
Leaf	false
Root	false
Active	false

25.3. Relationships

Relationship	From	То
√ R unnamed	<u>TableModelListener</u>	MenuPrincipal MenuPrincipal
√ R unnamed	<u>TableModelListener</u>	<u>Marcadores</u>