Q2: OUTPUTS:

```
Examples:

hydra -l user -P passlist.txt ftp://192.168.0.1

hydra -L userlist.txt -p defaultpw imap://192.168.0.1/PLAIN


hydra -C defaults.txt -6 pop3s://[2001:db8::1]:143/TLS:DIGEST-MD5

hydra -l admin -p password ftp://[192.168.0.0/24]/

hydra -L logins.txt -P pws.txt -M targets.txt ssh

root@kali:~#
```

eth0 Link encap:Ethernet HWaddr 08:00:27:0c:c9:6e inet addr:192.168.1.101 Bcast:192.168.1.255 Mask:255.255.255.0 inet6 addr: fe80::a00:27ff:fe0c:c96e/64 Scope:Link

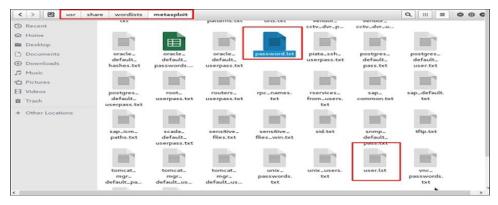

root@kali:-# hydra -l /usr/share/wordlists/metasploit/user -p /usr/share/wordlists/metasploit/password ftp://192
.168.1.101 -V