

# Port Forwarding & Case Study

## Introduction

TalkTalk's responsibility lies with ensuring that this facility works on their routers, they cannot be held responsible for you devices that you are trying to forward to.

This document not only deals with how to configure port forwarding on most of the TalkTalk routers, but also deals with the end to end solution. A lot of problems in this area are not the actual router configuration, but lay with the device on the local network that the ports are being forwarded to. These can be:-

- application problems,
- personal firewall problems,
- or ports that need to be translated to other ports. An example of this is if you try to forward port 80, the first “device” to see this & react to it is the web server within your router.
- how the scenario is being tested.

**Note:** you will not be able to test, or use port forwarding from a device on your network making a connection to your WAN IP address, or DDNS URL. If you did, the connection attempt would be routed out to the internet and back in again to your router. Once it comes back into your router again, it will not be forwarded to the device your port mapping rules state, but will be blocked by the router. This is known as “Loop back” traffic, which most routers will discard those packets as an additional security measure.

If you have a Smartphone temporarily disable the WiFi and turn on Mobile Data, which will enable you to test access to the device via your mobile phone network.

Basic order of work required

1. Add the port forwarding rule(s) to the router
2. Reboot the router
3. Add the required inbound rule(s) to the firewall
4. Launch the application
5. Test it locally from another device connected to your router's network (i.e. a device with a 192.168.1.x address)
6. Test it with <http://portchecker.co/check> you will have to run it once for each port you are trying to use. and only go to step 7, if it reports ALL of the ports you have forwarded as OPEN.
7. Test using other people on the internet

Please see the next page for the main sections covered in this document.

# Port Forwarding & Case Study

## *Sections in this document*

### Case Study

- [Test Setup](#)
- [FTP Server Settings](#)
- [FTP – active & passive modes](#)

Other sections in the document:-

- [Port forwarding on Huawei routers](#) (not HG633 or HG635)
- [Huawei HG633 & HG635 routers](#)
- [D-Link routers \(not DSL-3780\)](#)
- [D-Link DSL 3780 router](#)
- [Windows 7 firewall settings](#)
- [Test Locally](#)
- [Test from Internet](#)
- [DDNS](#)
- [Port Translation \(where a port is intercepted by the router, e.g. port 80\)](#)
- [Apple MACs running Windows applications](#)
- [Universal Plug and Play \(UPnP\)](#)

# **Port Forwarding & Case Study**

## ***Case Study***

This case study looks not only at port forwarding, but applications on the local PC that require the port forwarding, plus adding rules to the firewall that runs locally on that PC. It also deals with how to test this (crucially from the internet, as well as locally on your router's network).


## ***Test setup***

FTP server running on Windows 7 Home Premium (SP1) : FileZilla Server V0.9.45

FTP client running on Android V2.3.6 : FTPCafe FTP client

# Port Forwarding & Case Study

## FTP Server Settings

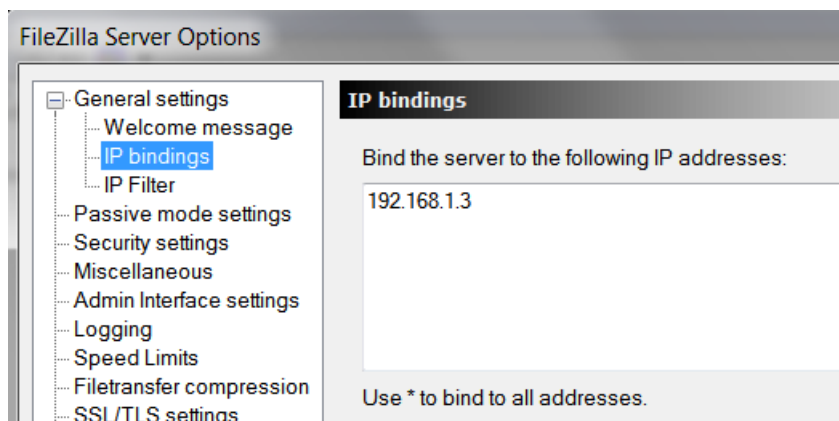

Set up a User account & password plus a home directory.

## Active or Passive FTP mode

The control of the FTP transfer is always done using TCP port 21, the port used to carry the data transfer varies on the FTP mode used. There are two modes used to transfer the data from the server to the client, active or passive mode.

Active mode always uses TCP port 20 and the data transfer session is initiated by the server to the client. The client requests active mode by sending the PORT command to the server. It will tell the server to start a session to the IP address & TCP port, that it gives the server. This will therefore be initiated from the PC and will automatically be allowed through its firewall. It will still need some port forwarding for the traffic from the client to the server, but as it is a static port, this is not a problem.

If the client on the other hand sends a PASV command to request passive mode, the server if it accepts this, will instruct the client to establish a new session to the required IP address & TCP port number. This port number is dynamically assigned & will be greater than 1024. This mode is regarded as more secure than active mode, but unless the router's port forwarding responded in a dynamic fashion, it will fail at this point.

From my tests the HG523a will allow passive FTP mode transfers to pass through it correctly, even though the FTP-DATA session is initiated from the client over the internet.


## Port Forwarding & Case Study

### ***Router login***

To do this work, you will need to log in to your router. To do this browse to your router at:-

<http://192.168.1.1>

At the prompt:-

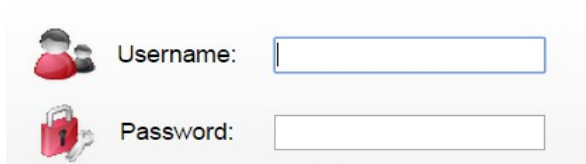A screenshot of a web-based login form for a router. It features two input fields: 'Username:' and 'Password:'. The 'Username:' field is preceded by a small icon of a person's head and shoulders. The 'Password:' field is preceded by a small icon of a red padlock. Both fields are empty and have a light blue border.

Enter your admin username & password. Unless you have changed this, the default is normally:-

Username : admin

password : admin

# Port Forwarding & Case Study

## Port Forwarding on Huawei routers (& some DSL-3780s)

[Log in to the router](#) & go into advanced mode. From there go to:-

Advanced > NAT > Port Mapping

Advanced > NAT > Port Mapping

ALG DMZ **Port Mapping** Port Triggering

**Port Mapping** New Remove

Mapping Name	Interface	Protocol	Remote Host	External Start Port	External end Port	Internal Port	Internal Host	Ena
Settings								
Type:	<input checked="" type="radio"/> Customization <input type="radio"/> Application Choose...							
Interface:	nas_0_38							
Protocol:	TCP							
Remote host:								
External start port:								
External end port:								
Internal host:								
Internal port:								
Mapping name:								
								Submit

Either select an existing “Application”, or use the “Customization” option. In this case the FTP Server application can be used, but the IP address (maybe 192.168.1.2) for the device hosting the FTP server will need to be added in the “Internal host” field:-


**Port Mapping** New Remove

Mapping Name	Interface	Protocol	Remote Host	External Start Port	External end Port	Internal Port	Internal Host	Ena
Settings								
Type:	<input type="radio"/> Customization <input checked="" type="radio"/> Application FTP server							
Interface:	nas_0_38							
Protocol:	TCP							
Remote host:								
External start port:	21							
External end port:	21							
Internal host:	192.168.1.2							
Internal port:	21							
Mapping name:	FTPServer							
								Submit

If both external start & end ports are left at 21 this will work in passive mode OK.

## Port Forwarding & Case Study

Note when adding this forwarding rule you will see this box:-

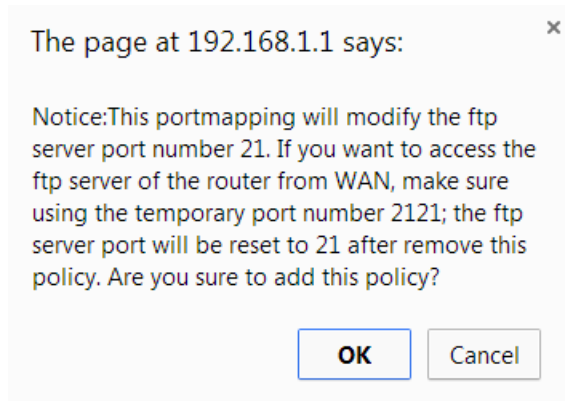

Click OK to that.

Click “Submit” & reboot the router.


For all [other routers, please see this section](#).

# Port Forwarding & Case Study

## Windows 7 Firewall settings

Go to:-

Programs (1)

 Windows Firewall with Advanced Security

Create a new inbound rule:-

### Rule Type

Select the type of firewall rule to create.

**Steps:**

- Rule Type
- Program
- Action
- Profile
- Name

What type of rule would you like to create?

☒ **Program**  
Rule that controls connections for a program.

☐ **Port**  
Rule that controls connections for a TCP or UDP port.

☐ **Predefined:**  
  
Rule that controls connections for a Windows experience.

☐ **Custom**  
Custom rule.

Click “Next” in the above screen, then on this next screen browse to the program's executable file. In the case of the FileZilla Server, allow the server application (not the interface to the server):-

### Program

Specify the full program path and executable name of the program that this rule matches.

**Steps:**

- Rule Type
- Program
- Action
- Profile
- Name

Does this rule apply to all programs or a specific program?

☐ **All programs**  
Rule applies to all connections on the computer that match other rule properties.

☒ **This program path:**

Example: c:\path\program.exe  
          %ProgramFiles%\browser\browser.exe



## Port Forwarding & Case Study

Click Next, then on this screen tick “Allow connection”:-

### Action

Specify the action to be taken when a connection matches the conditions specified in the rule.

**Steps:**

- Rule Type
- Program
- Action**
- Profile
- Name

What action should be taken when a connection matches the specified conditions?

☒ **Allow the connection**  
This includes connections that are protected with IPsec as well as those are not.

☐ **Allow the connection if it is secure**  
This includes only connections that have been authenticated by using IPsec. Connections will be secured using the settings in IPsec properties and rules in the Connection Security Rule node.  
[Customize...](#)

☐ **Block the connection**

Then click next and on the next screen set as appropriate:-

**Profile**

Specify the profiles for which this rule applies.

**Steps:**

- Rule Type
- Program
- Action
- Profile**
- Name

When does this rule apply?


☒ **Domain**  
Applies when a computer is connected to its corporate domain.

☒ **Private**  
Applies when a computer is connected to a private network location.

☒ **Public**  
Applies when a computer is connected to a public network location.

## Port Forwarding & Case Study

Click “Next” again, give it a unique name & click “Complete”:-

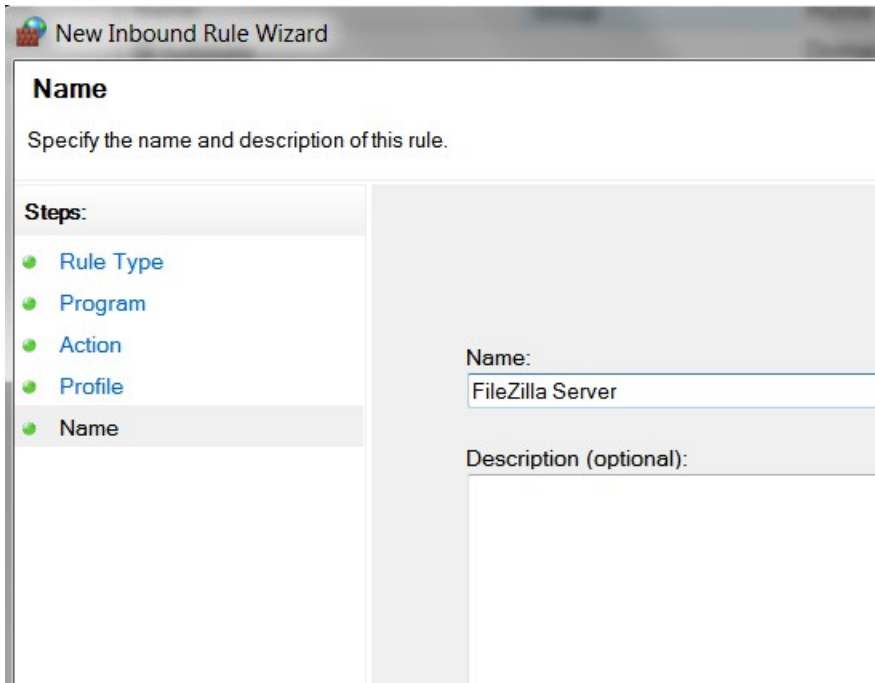

The screenshot shows the 'New Inbound Rule Wizard' window. The title bar says 'New Inbound Rule Wizard'. The main heading is 'Name'. Below it, the instruction says 'Specify the name and description of this rule.' On the left, there is a 'Steps:' list with five items: 'Rule Type', 'Program', 'Action', 'Profile', and 'Name'. The 'Name' step is currently selected and highlighted. On the right, there are two text input fields. The first is labeled 'Name:' and contains the text 'FileZilla Server'. The second is labeled 'Description (optional):' and is currently empty.

It will now be displayed in the list of inbound rules under the name you allocated to it.

## **Port Forwarding & Case Study**

### ***Test Locally***

The next thing is to test that the client when connected to the same subnet can access the FTP Server on 192.168.1.3 and download a file. If all is OK, then setup the port forwarding on the router.

## Port Forwarding & Case Study

### Testing from internet

**Note:** when testing, you must have your server software running (e.g. FTP or Minecraft server software etc). *Otherwise the port will always be closed.*

There is a website that can target your WAN IP address automatically & allow you to specify a port to check. It will report if it is open or closed. This should prove both your forwarding rule & your inbound rule within the firewall on your PC. This site is:-

<http://portchecker.co/check>

When you visit it from a device connected to your router (wired or wi-fi), it will populate the form with your router's WAN IP address & port 80. Change the port number to the one you want to test & click the "Check" button. The example below when the FTP server forwarding rule was working correctly:-

The screenshot shows the Port Checker website interface. The browser address bar displays 'portchecker.co/check'. The page title is 'Port Checker' with a 'MENU' button. The main heading is 'Checking port 21 on [redacted]'. Below this, there are input fields for 'Your IP Address' (containing a redacted address) and 'Port Number' (containing '21'). A 'Check' button is present. A list of common ports is shown: SMTP - 25, SSH - 22, IMAP - 143, HTTPS - 443, RSYNC - 873, POP3 - 110, and IMAPS - 993. At the bottom, a large banner states 'Port 21 is open.' with 'open' in green. Red callout boxes provide instructions: 'Your router's WAN IP address' points to the IP field, 'Port to test' points to the port number field, 'Click this button to test' points to the 'Check' button, and 'All is OK as port is open' points to the 'open' text in the banner.

Port Checker MENU

# Checking port 21 on [redacted]

Your IP Address [redacted] Port Number 21

**Check**

SMTP - 25 SSH - 22 IMAP - 143  
HTTPS - 443 RSYNC - 873 POP3 - 110  
IMAPS - 993

**Port 21 is open.**

Once that is OK finally test from a PC or phone that is not connected to your router's network (wired or wireless), but has access to the internet from another broadband connection or 3G or 4G etc.

## Port Forwarding & Case Study

**Note:** most routers do not allow 'Loop Back' access so you will need to access the device only from an external network when using the external internet address. You will not be able to access the external IP address from the internal IP address, when the external address is port forwarded to another local device. Most routers prevent 'Loop Back' as an additional security measure.

So if the device being forwarded to is 192.168.1.3 and the device making the test is 192.168.1.63, this device will not be able to make a test to the router's WAN IP address.

If you have a Smartphone temporarily disable the WiFi and turn on Mobile Data, which will enable you to test access to the device via your mobile phone network. Alternatively you could use a wireless hot spot.

As far as this case study is concerned an FTP client called "FTP Cafe" was run on an Android phone via the 3G network.

To test from a browser (if applicable) you must specify the port number e.g. port 81:-

<http://92.92.92.1:81>

## DDNS

TalkTalk like most ISPs only offer static WAN IP addresses in their business packages & even then possible only as an extra option. DDNS however, gives you a static URL, which automatically updates itself with your new WAN IP address. This allows you to direct the client on the internet accessing your server software on local network via port forwarding, to target the DDNS URL, rather than your WAN IP address, which will change from time to time.

For more details on DDNS, see this TalkTalk help page:-

<http://help2.talktalk.co.uk/using-ddns>

Testing via DDNS:-

To test via DDNS originate a request from the internet (not from your local network {[Loopback access will not work](#)}). If you are using a browser to access an IP camera etc use your DDNS URL followed by colon (:) and the port number. The example below shows someone trying to access port 81 via DDNS:-

<http://xxxxxxx.dyndns.com:81/>

If you are still having problems, ensure that the IP address used by the DDNS provider is correct.

## Port Forwarding & Case Study

### ***Port Translation (where a port is intercepted by the router, e.g. port 80)***

If you have a PC for example, connected to your local network whose IP address is 192.168.1.100 which is hosting a webserver (this will use TCP port 80) and you want to access this from the internet, normal port forwarding will fail.

Your webserver is expecting an incoming connection on port 80.

So you make your connection attempt from the internet to:-

<http://a.b.c.d>

where a.b.c.d is the external or WAN IP address of the router.

The router's management system is also a webserver, so your connection attempt (as it is targeting port 80), will be intercepted by the router's webserver. This is why you might see the router's login screen & your connection never reaches the web server on your PC.

What you need to do is choose an unused TCP port number (for example port 8888), then create a new port forwarding rule and translate the external port 8888 to the internal port 80 (called PAT or Port Address Translation) and point this to the PC running the webserver.

What you need is a rule like this:-

Protocol:	TCP ▼
Remote host:	<input type="text"/>
External start port:	8888
External end port:	8888
Internal host:	192.168.1.100
Internal port:	80
Mapping name:	MyPC-Webserver

Then from the internet try a browser connection to:-

<http://a.b.c.d:8888>

where again a.b.c.d is your router's WAN IP address or DDNS URL.

Note the colon character ":" that separates the IP address from the port number.

## Port Forwarding & Case Study

### ***Apple MACs running Windows applications***

Apple MACs for sometime now have been able to run Windows applications via the “Parallels Desktop” software:-

<http://www.parallels.com/uk/products/desktop/>

There are problems running certain Windows applications (e.g. Minecraft server), because these applications may not open the ports correctly when using “Parallels”. This will mean that port forwarding might not work, unless this is done correctly.

# Port Forwarding & Case Study

## ***Port Forwarding on other routers***

This will depend on the make & model of router that you have. The following are included in this guide. Once the PC firewall & port forwarding is all done, see the section on [testing from the internet](#).

1. [Huawei & some D-Link DSL-3780 variants](#) – (used in this case study)
2. [D-Link DSL routers \(not DSL-3780\)](#)
3. [D-Link DSL-3780 variants with D-Link style interface](#)
4. [Huawei HG633 & HG635 routers](#)



## Port Forwarding & Case Study

### D-Link DSL routers (not DSL-3780)

[Log in to the router](#), then click on the “Advanced tab at the top and “Port Forwarding” on the left:-

**PORT FORWARDING**

This is the ability to open ports in your router and re-direct data through those ports to a single PC on your network.

**Maximum number of entries which can be configured: 12**

**ACTIVE PORT FORWARDING**

Private IP	Protocol Type	Public Start Port	Public End Port	Connection
<div>Add</div>				

**ADD PORT FORWARDING**

Private IP :

0.0.0.0

0.0.0.0 ▼

Protocol Type :

All ▼

Public Start Port :

0

Public End Port :

0

Connection :

PVC0 ▼

Apply

Cancel

Try leaving the “Connection” as PVC0 but this could need changing to PVC1.

There is no need to make any firewall changes within the router.

Once the changes are complete, click “Apply” & then “Reboot” on the left.

## Port Forwarding & Case Study

### **D-Link DSL-3780**

This is a bit of a weird router, in so much as some versions, once you get past the summary screens into "Advanced" mode have the Huawei "Look and feel" interface and some go into the more traditional D-Link interface. If your variant is of the "Huawei" interface and you should be able to follow my guidelines for [Huawei routers](#).

However, the vast majority of the DSL-3780 routers though have the D-Link interface, with these the port forwarding is set up under "[Virtual Servers](#)".

There is also talk that you have to configure the "[Applications](#)" section as well, *but this is wrong*.

If the "Applications" are configured, *this makes the port forwarding operation very intermittent*, often leaving the port closed when tested via various port testers such as <http://portchecker.co/check>.

First need to [log in to the router](#).

# Port Forwarding & Case Study

## Virtual Servers

Follow these instructions below taking particular notice of the “interface” option. This should not be left as **WAN**, but change it to **PVC1**. You can replace the Internal IP/port number with whatever ones you need.

Click on the “Advanced” tab along the top and down the left hand side, click on “Virtual Servers”. The example below port forwards to an FTP server:-

DSL-3780	SETUP	ADVANCED	MAINTENANCE	STATUS
Advanced Wireless	<div><b>VIRTUAL SERVER</b></div> <p>The <i>DSL-3780</i> externally acts as server. It receives the requests of remote users under its public IP address and forwards them automatically to the Virtual Server. So a client in your network behind NAT or firewall can provide services as a Virtual Server. You just have to enable specific ports or port ranges and protocols (UDP/TCP). File sharing or web services for e.g. HTTP, FTP or POP3 are possible. The private IP addresses of the servers in the local network remain safe. If you have a dynamic IP address, you may want to enable DynDNS additionally.</p> <div><b>ADD VIRTUAL SERVER RULES</b></div> <div><b>Enable Virtual Server Rules :</b> <input checked="" type="checkbox"/></div> <div><b>Name :</b> <input type="text" value="test"/></div> <div><b>Interface :</b> <input type="text" value="PVC1"/></div> <div><b>Internal IP :</b> <input type="text" value="192.168.1.2"/></div> <div><b>Internal startport :</b> <input type="text" value="21"/></div> <div><b>Internal endpoint :</b> <input type="text" value="21"/></div> <div><b>External startport :</b> <input type="text" value="21"/></div> <div><b>External endpoint :</b> <input type="text" value="21"/></div> <div><b>Protocol Type :</b> <input type="text" value="Both"/></div> <div><b>Time :</b> <input checked="" type="radio"/> Disable <input type="radio"/> Enable</div> <div><b>Begin time :</b> <input type="text" value="00"/> : <input type="text" value="00"/></div> <div><b>End time :</b> <input type="text" value="00"/> : <input type="text" value="00"/></div> <div><b>Begin day :</b> <input type="text" value="Sun"/></div> <div><b>End day :</b> <input type="text" value="Sun"/></div> <div><input type="button" value="Add/Apply"/></div>			

Add the required rule & click the “Add/Apply” button.

## Port Forwarding & Case Study

### Applications

With the DSL-3780 you may also have to open up the ports on it's own firewall in addition to the firewall on the device you are attempting to forward these ports to.

*However, testing has proved that if configured, it can render the port forwarding operation to be very intermittent, at best with the port only showing open occasionally. At worst the port remains permanently closed.*

*Therefore I do not recommend configuring this section at all. In fact make sure that if you have set any applications up here, you remove them.*

DSL-3780	SETUP	ADVANCED	MAINTENANCE	STATUS
Advanced Wireless	<b>SPECIAL APPLICATION</b>			
Virtual Server	The Application is used to open single or multiple ports in your firewall when the router senses data sent to the Internet on a outgoing "Trigger" port or port range. Applications rules apply to all computers on your internal network. The max entry is 16.			
Applications	<b>SPECIAL APPLICATION</b>			
DMZ (Exposed Host)	Enable Application : <input type="radio"/> Disabled <input checked="" type="radio"/> Enabled			
Parental Control	Name : <input type="text" value="Test"/>			
Filter	Trigger Port Start : <input type="text" value="21"/>			
Advanced ADSL	Trigger Port End : <input type="text" value="21"/>			
Firewall	Trigger Traffic Protocol Type : <input type="text" value="All Protocol"/>			
DNS	Open Port : <input type="text" value="21"/>			
Dynamic DNS	Open Traffic Protocol Type : <input type="text" value="All Protocol"/>			
Network Tools	<input type="button" value="Add/Apply"/>			
Routing				
Logout				

### Router reboot

If the router is rebooted at this point you may lose some of your settings, so go to:-

Maintenance > System Settings > Save & reboot the device

Click the "Reboot" button:-

DSL-3780	SETUP	ADVANCED	MAINTENANCE	STATUS
Administration	<b>SYSTEM</b>			
System Settings	All settings will be automatically saved to your DSL-3780. There is no need to manually save or reboot. If you want to restart the device anyway, it is better done via the "Reboot" button.			
Firmware Update	<b>SYSTEM SETTINGS</b>			
Diagnostic Test	Save and Reboot the device : <input type="button" value="Reboot"/>			
System Log	Save Settings To Local Hard Drive : <input type="button" value="Save"/>			
Device	Load Settings From Local Hard Drive : <input type="button" value="Choose File"/> No file chosen			
Logout	<input type="button" value="Upload Settings"/>			
	Restore To Factory Default Settings : <input type="button" value="Restore Device"/>			

## Port Forwarding & Case Study


### Huawei HG633 & HG635 routers

This is quite easy to setup on this router, but there are two concepts that are slightly different:-


- **Applications** – these can be software programs such as an FTP Server, or the Minecraft game in server mode that run on a PC/server. They can also be stand alone devices such as CCTV cameras, or a set top box for a TV installation.
- **Internal Host** - you do not forward to a device's IP address, but you forward to a [LAN Device](#) using its MAC address. This address stays constant, even if the IP address changes. So it works well with a DHCP (automatically assigned) allocated address.

**Do not use Port Triggering**, in line with most other routers, this renders the port mapping to be very intermittent at best & at worst the rule will not work at all.

There are two routes to the port mapping page, either via the "Internet" tab followed by "Port Forwarding" on the left:-

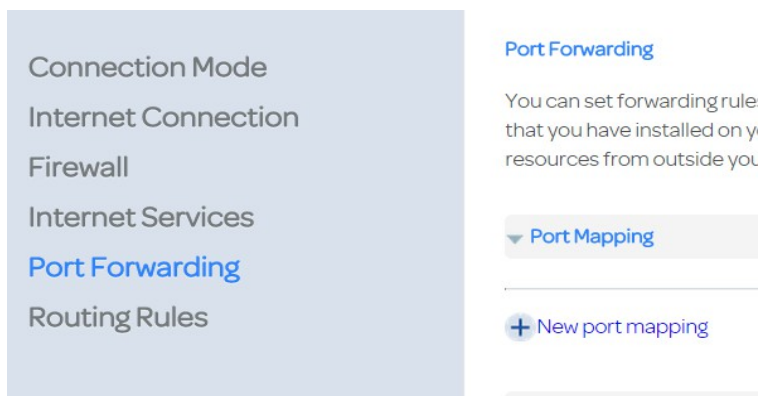


Alternatively click on "Home Network" and "LAN Devices" and click on one of the "Edit forwarding rules" links:-

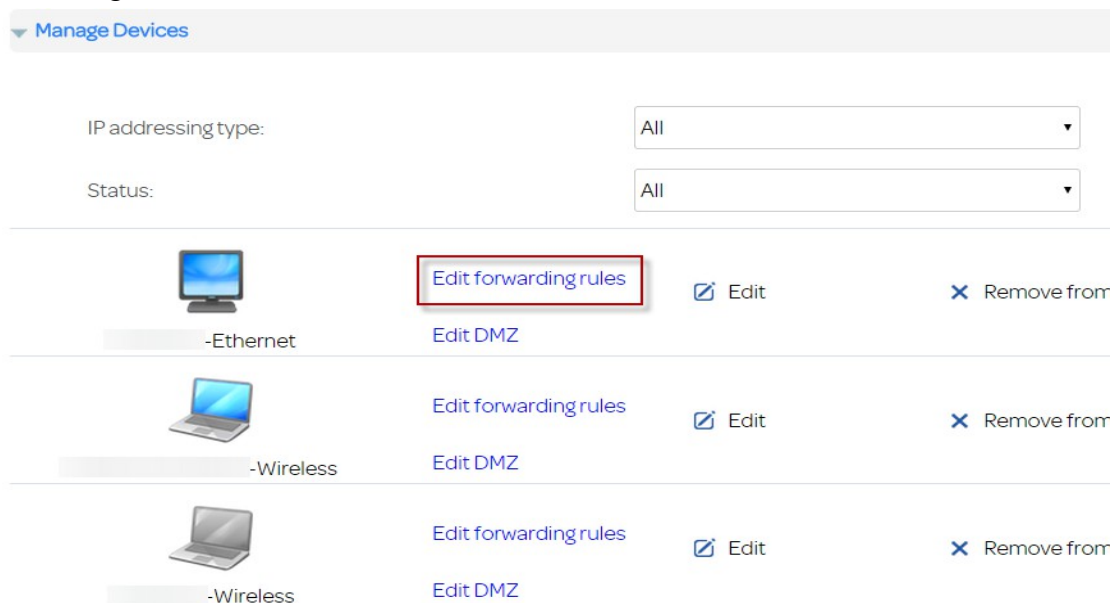

## Port Forwarding & Case Study


### Applying port forwarding

Once in the "Port Forwarding" configuration area, click "New port mapping":-

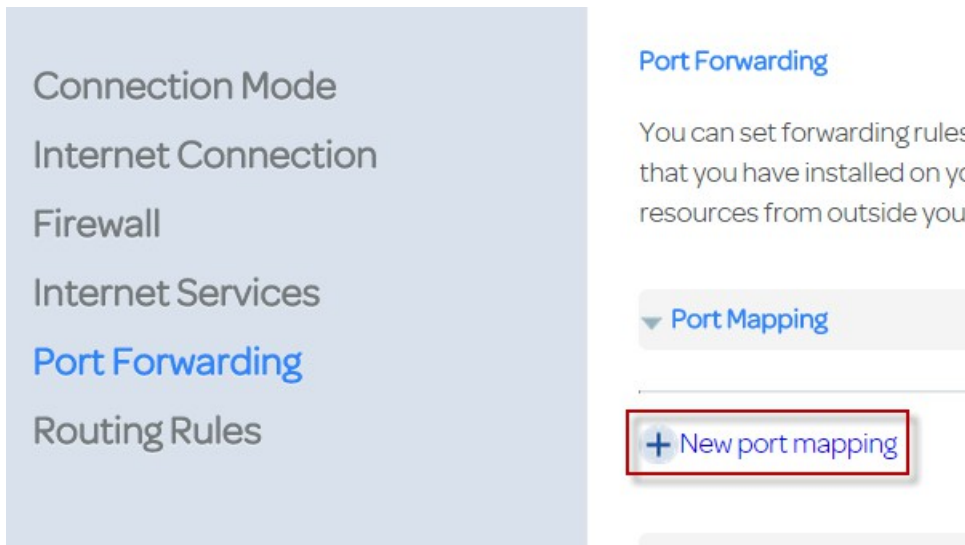

The first concept here is to ensure there is an entry for your desired application that is running on the device that you want to forward to. This could be an FTP Server, SNMP Server etc. This contains all of the port numbers required.

There are a certain amount of these pre-configured, so click the "Application" dropdown box to see the options:-

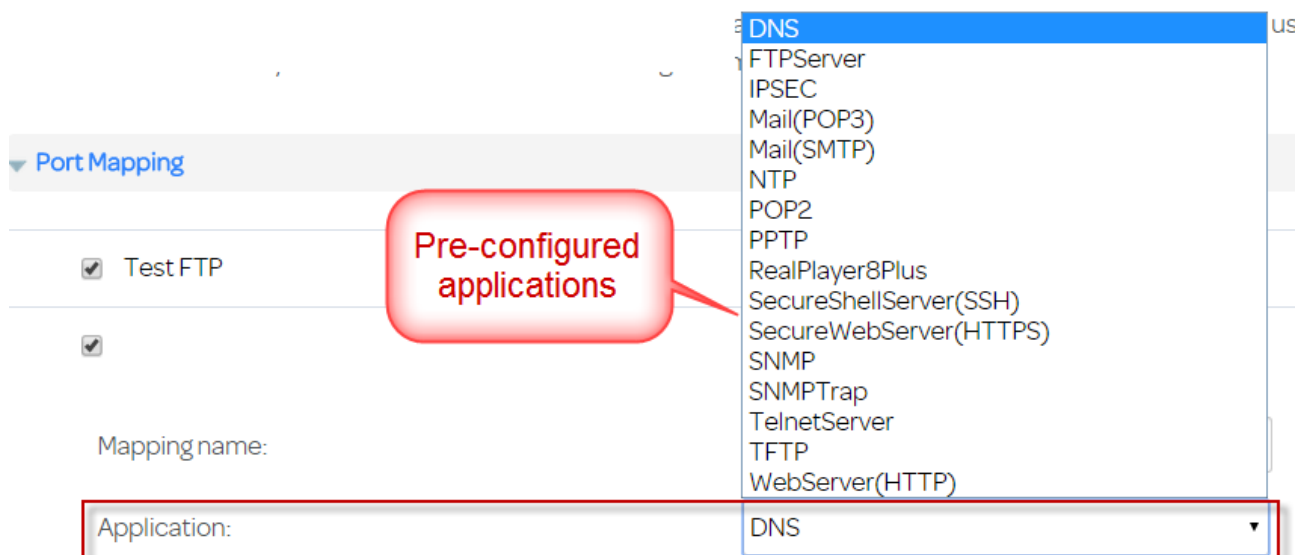

## Port Forwarding & Case Study

So in its simplest form, the rule can be done very easily.

Supposing you need to forward SNMP Traps (don't worry what these are, it is only a very simple example) to a PC connected to a LAN port on the router. This is an easy example as there is already a pre-configured application for this.

All you have to do in this case is:-

1. Allocate a name for this port mapping rule
2. Select "SNMPTrap" from the "Application" dropdown box
3. Select the desired PC to forward the traffic to from the "Internal Host" dropdown box.
4. ***Reboot the router*** & job done!

▼ Port Mapping

☒ My Trap Watcher

[Edit](#)

[Delete](#)

Mapping name:

Rule name

My Trap Watcher

Application:

Pre-configured application

SNMPTrap

[Add port mapping application](#)

Internal host:

Device to forward packets to

-Ethernet

[Add device](#)

Cancel

Save

## Port Forwarding & Case Study


### No suitable application available

In most cases there will be no suitable application existing in the "Application" dropdown box. This will require you to add your own application (e.g. Minecraft server, CCTV camera or DVR) to the port mapping application dropdown box.

Before doing this you will need to know which ports need to be forwarded & ideally if they are TCP or UDP. You should be able to get this information from the vendor of the kit/software you are trying to use.


Once you have added this new application, it is then automatically added to the dropdown box's list of applications. This new one is then ready for selection in the same way as the previous example.

So first click the "Add port mapping application" link:-

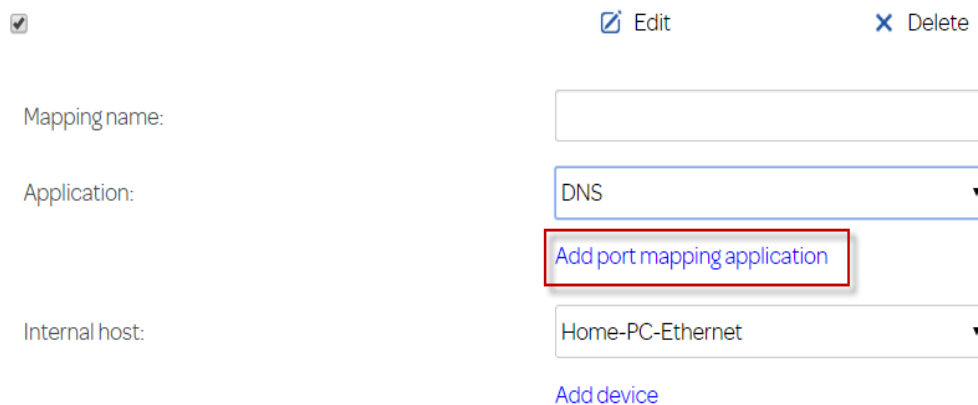

A screenshot of a web form for adding a port mapping application. At the top, there are three links: a checkbox, 'Edit', and 'Delete'. Below these are three input fields: 'Mapping name:' (empty), 'Application:' (containing 'DNS'), and 'Internal host:' (containing 'Home-PC-Ethernet'). A red rectangular box highlights the 'Add port mapping application' link, which is positioned below the 'Application' dropdown. Below the 'Internal host' field is a blue link labeled 'Add device'.

This will display the same list of applications, go down to the very bottom of the list, where an "Add port application" link will be found, click on that:-

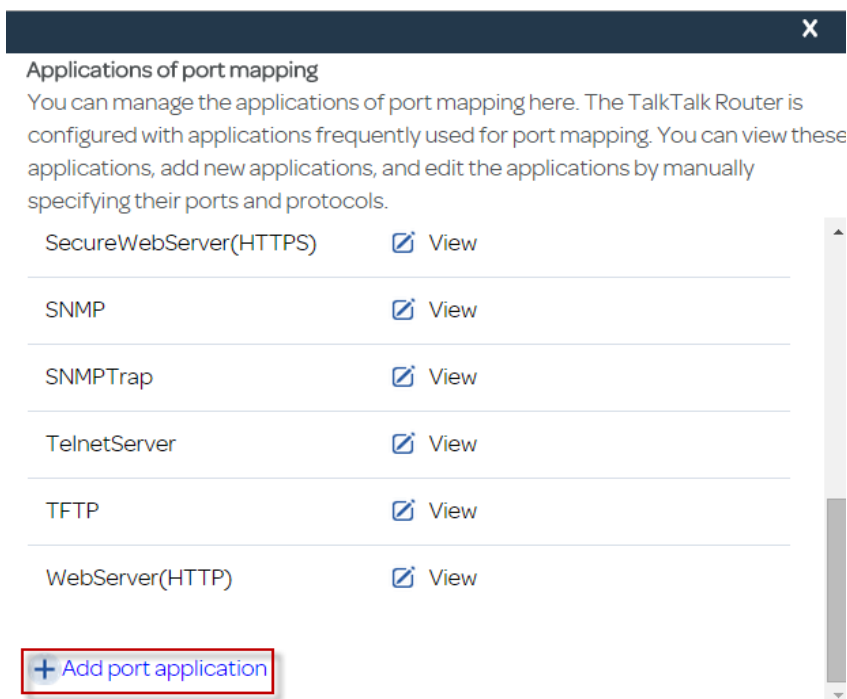

A screenshot of a web page titled 'Applications of port mapping'. It contains a list of applications with their names and a 'View' link for each. The applications listed are: SecureWebServer(HTTPS), SNMP, SNMPTrap, TelnetServer, TFTP, and WebServer(HTTP). A red rectangular box highlights the '+ Add port application' link at the bottom of the list. The page has a dark blue header bar with a close button (X) and a vertical scrollbar on the right side.

Application	Action
SecureWebServer(HTTPS)	<a href="#">View</a>
SNMP	<a href="#">View</a>
SNMPTrap	<a href="#">View</a>
TelnetServer	<a href="#">View</a>
TFTP	<a href="#">View</a>
WebServer(HTTP)	<a href="#">View</a>
<a href="#">+ Add port application</a>	



## Port Forwarding & Case Study

Although there is a pre-configured application for an FTP server, this example was used to test the port forwarding functionality of this router and is used as an example here. Give the new application a suitable name, add the ports & select the protocol. If in doubt, set the protocol to "TCP/UDP":-

✕

Applications of port mapping

You can manage the applications of port mapping here. The TalkTalk Router is configured with applications frequently used for port mapping. You can view these applications, add new applications, and edit the applications by manually specifying their ports and protocols.

Test FTP Server

✎ Edit

✕ Delete

Name:

Test FTP Server

External port:

21 ~ 21

Internal port:

21 ~ 21

Protocol:

TCP

✕ Delete

+ New

Cancel

Save

This is the name that will appear in the applications dropdown list

You will now see your newly created application has been automatically added to the dropdown list of available applications:-

✕

Applications of port mapping

You can manage the applications of port mapping here. The TalkTalk Router is configured with applications frequently used for port mapping. You can view these applications, add new applications, and edit the applications by manually specifying their ports and protocols.

SNMP

✎ View

SNMPTrap

✎ View

TelnetServer

✎ View

TFTP

✎ View

WebServer(HTTP)

✎ View

Test FTP Server

✎ Edit

✕ Delete

+ Add port application

## Port Forwarding & Case Study

Now all you have to do once back in the add new rule screen, is give the rule a name, select your new application and finally select the target device to forward traffic to. Then click the "Save" button & *reboot the router*:-

▼ Port Mapping

☒ Test FTP via ports

Rule name

Mapping name:

Application:

Internal host:

Test FTP via ports

Test FTP Server

Home-PC-Ethernet

✎ Edit

✕ Delete

Add port mapping application

Add device

Cancel

Save

If the required device is not listed, click the "Add device" link above, you will need to know its MAC address.

# Port Forwarding & Case Study

## Universal Plug and Play

UPnP means that a device can open the ports it needs as it wants to, and it can close them afterwards, nice and safe and very automatic.

Port forwarding would only open those very same ports and keep them open even when the device was switched off, not as safe but will speed things up for that device as the router 'just knows' already (the entries in its routing table) what port/IP this traffic is destined for, whether the device is switched on and listening or not.

Some devices allow the use of UPnP, this can be enabled within the router. To do this log into the router and follow the brief guide below:-

### Huawei routers (except HG633 & HG635)

Advanced Mode > Advanced > UPnP

### Huawei HG633 & HG635 routers

Home Network > LAN Interfaces > Universal Plug and Play

Universal Plug and Play

Enable UPnP: ☒

### D-Link routers

Advanced mode > Advanced > Advanced LAN > UPnP

### D-Link DSL-3780

Advanced mode > Advanced > Network Tools > Network Tools - UPNP & DNLA > UPNP Settings

DSL-3780	SETUP	ADVANCED	MAINTENANCE	STATUS
Advanced Wireless	<b>UPNP &amp; DLNA</b>			
Virtual Server	UPnP enables the devices to dynamically join a network, obtain an IP address, convey its capabilities, and learn about the presence and capabilities of other devices - without a dedicated server.			
Applications	<b>UPNP SETTINGS</b>			
DMZ (Exposed Host)	UPnP : <input checked="" type="radio"/> Activated <input type="radio"/> Deactivated			
Parental Control	Auto-configured : <input checked="" type="radio"/> Activated <input type="radio"/> Deactivated (by UPnP-enabled Application)			
Filter	<input type="button" value="Add/Apply"/>			
Advanced ADSL	<b>DLNA SETTINGS</b>			
Firewall				
DNS				
Dynamic DNS				
Network Tools				