

Hands-on Lab : INSERT, UPDATE, DELETE



Estimated time needed: 20 minutes

In this lab, you will learn some commonly used DML (Data Manipulation Language) statements of SQL other than SELECT. First, you will learn the INSERT statement, which is used to insert new rows into a table. Next, you will learn the UPDATE statement which is used to update the data in existing rows in the table. Lastly, you will learn the DELETE statement which is used to remove rows from a table.

Objectives

After completing this lab, you will be able to:

- Insert new rows into a table
- Update data in existing rows of the table
- Remove rows from a table

Concepts covered

How does the syntax of an INSERT statement look?



plaintext

```
INSERT INTO table_name (column1, column2, ... )  
VALUES (value1, value2, ... )  
;
```

How does the syntax of an UPDATE statement look?



plaintext

```
UPDATE table_name  
SET column1 = value1, column2 = value2, ...  
WHERE condition  
;
```

How does the syntax of a DELETE statement look?



plaintext

```
DELETE FROM table_name  
WHERE condition  
;
```


Introduction to Lab Environment

Software Used in this Lab

In this lab, you will use Datasette, an open source tool for exploring and publishing data. You can visit the [Datasette GitHub repository here](#).

Working with Datasette

The **Datasette** tool offers a platform to input and execute SQL queries. By clicking the **Submit query** button, you can execute the SQL query.

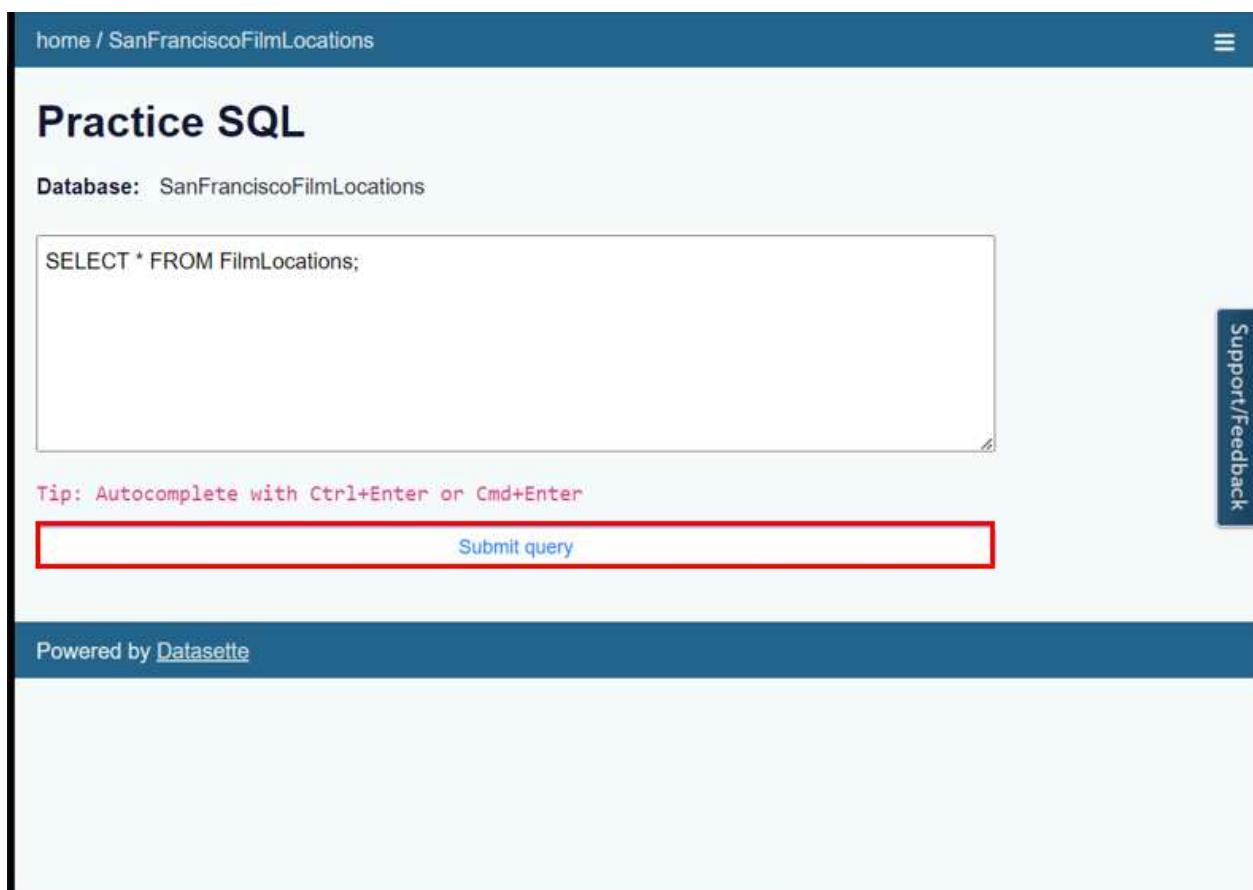

The screenshot shows the 'Practice SQL' interface of the Datasette tool. At the top, there is a breadcrumb navigation bar with 'home / SanFranciscoFilmLocations' and a hamburger menu icon. Below this, the title 'Practice SQL' is displayed. Under the title, the database name 'Database: SanFranciscoFilmLocations' is shown. A large text input field contains the SQL query 'SELECT * FROM FilmLocations;'. Below the input field, a tip message reads 'Tip: Autocomplete with Ctrl+Enter or Cmd+Enter'. A red rectangular box highlights the 'Submit query' button. On the right side of the interface, there is a vertical button labeled 'Support/Feedback'. At the bottom, a footer bar states 'Powered by [Datasette](#)'.

Database Used in this Lab

The dataset used in this lab is an internal database.

Exploring the Database

Let us first explore the **Instructors** database using the **Datasette** tool:

1. If the first statement listed below is not already in the Datasette textbox on the right, then copy the code below by clicking on the little copy button on the bottom right of the codeblock below and then paste it into the textbox of the Datasette tool using either **Ctrl+V** or right-click in the text box and choose **Paste**.



```
SELECT * FROM Instructor;
```

home / Practice SQL / Instructors

Practice SQL

Database: Instructors

```
1 SELECT * FROM Instructor;
```

Tip: Autocomplete with Ctrl+Enter or Cmd+Enter

Submit query

2. Click **Submit Query**.
3. Now you can scroll down the table and explore all the columns and rows of the **Instructor** table to get an overall idea of the table contents.

ins_id	lastname	firstname	city	country
1	Ahuja	Rav	Toronto	CA
2	Chong	Raul	Toronto	CA
3	Vasudevan	Hima	Chicago	US



plaintext

```
Instructor (  
    ins_id:    unique identification number of the instructors,  
    lastname:  last name of the instructors,  
    firstname: first name of the instructors,  
    city:      name of the cities where instructors are located,  
    country:   two-letter country code of the countries where instructor  
)
```

Exercise 1: INSERT

In this exercise, you will first go through some examples of using INSERT in queries and then solve some exercise problems by using it.

Task A

Example exercises on INSERT

Let us go through some examples of INSERT related queries:

1. In this example, suppose we want to insert a new single row into the **Instructor** table.

1. Problem:

Insert a new instructor record with id 4 for Sandip Saha who lives in Edmonton, CA into the "Instructor" table.

2. Solution:

plaintext

```
INSERT INTO Instructor(ins_id, lastname, firstname, city, country)
VALUES(4, 'Saha', 'Sandip', 'Edmonton', 'CA');
```

3. Copy the solution code above by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of the Datasette tool. Then click **Submit query**.
4. Copy the code below by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of the Datasette tool. Then click **Submit query**.

plaintext

```
SELECT * FROM Testtable;
```


5. Your output resultset should look like the image below:

[home](#) / [Practice SQL](#) / [Instructors](#)

Practice SQL

Database: Instructors

```
1 SELECT * FROM Instructor;
```

Tip: Autocomplete with Ctrl+Enter or Cmd+Enter

Submit query

Results

All commands ran successfully

Support

```
SELECT * FROM Instructor
```

ins_id	lastname	firstname	city	country
1	Ahuja	Rav	Toronto	CA
2	Chong	Raul	Toronto	CA
3	Vasudevan	Hima	Chicago	US
4	Saha	Sandip	Edmonton	CA

Powered by [Datasette](#)

2. In this example, suppose we want to insert some new multiple rows into the **Instructor** table.

1. Problem:

Insert two new instructor records into the "Instructor" table. First record with id 5 for John Doe who lives in Sydney, AU. Second record with id 6 for Jane Doe who lives in Dhaka, BD.

2. Solution:

[plaintext](#)

```
INSERT INTO Instructor(ins_id, lastname, firstname, city, country)
VALUES(5, 'Doe', 'John', 'Sydney', 'AU'), (6, 'Doe', 'Jane', 'Dhaka',
```

3. Copy the solution code above by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of the

4. Copy the code below by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of the Datasette tool. Then click **Submit query**.



```
SELECT * FROM Instructor;
```

5. Your output resultset should look like the image below:

home / Practice SQL / Instructors

Practice SQL

Database: Instructors

```
1 SELECT * FROM Instructor;
```

Tip: Autocomplete with Ctrl+Enter or Cmd+Enter

Submit query

Results

All commands ran successfully

SELECT * FROM Instructor

ins_id	lastname	firstname	city	country
1	Ahuja	Rav	Toronto	CA
2	Chong	Raul	Toronto	CA
3	Vasudevan	Hima	Chicago	US
4	Saha	Sandip	Edmonton	CA
5	Doe	John	Sydney	AU
6	Doe	Jane	Dhaka	BD

Powered by [Datasette](#)

Task B

Practice exercises on INSERT

Now, let us practice creating and running some INSERT related queries.

1. Problem:

Insert a new instructor record with id 7 for Antonio Cangiano who lives in Vancouver, CA into the "Instructor" table.

► Hint

Follow example 1 of the INSERT exercise.



plaintext

```
...  
  
INSERT INTO table_name([column1],[column2], [column3], [column4], [column  
VALUES(7, 'Cangiano', 'Antonio', 'Vancouver', 'CA');
```



plaintext

```
SELECT * FROM tablename;  
...
```



plaintext

<details><summary>Solution</summary>



plaintext

```
INSERT INTO Instructor(ins_id, lastname, firstname, city, country)
VALUES(7, 'Cangiano', 'Antonio', 'Vancouver', 'CA');
```

```
SELECT * FROM Instructor;
...
```

</details>

<details><summary>Output</summary>

</details>

2. Problem:

> _Insert two new instructor records into the "Instructor" table. First r

<details><summary>Hint</summary>

> Follow example 2 of the INSERT exercise.

...

```
INSERT INTO table_name([columnn1],[column2], [column3], [column4], [column
VALUES(8, 'Ryan', 'Steve', 'Barlby', 'GB'), (9, 'Sannareddy', 'Ramesh', '
```

```
SELECT * FROM tablename;
...
```

</details>

<details><summary>Solution</summary>



plaintext

```
INSERT INTO Instructor(ins_id, lastname, firstname, city, country)
VALUES(8, 'Ryan', 'Steve', 'Barlby', 'GB'), (9, 'Sannareddy', 'Ramesh', 'Hyde
```

```
SELECT * FROM Instructor;
...
```



plaintext

<details><summary>Output</summary>

```
1 INSERT INTO Instructor(ins_id, lastname, firstname, city, country)
2 VALUES(8, 'Ryan', 'Steve', 'Barlby', 'GB'), (9, 'Sannareddy', 'Ramesh', 'Hyderabad', 'IN');
3
4 SELECT * FROM Instructor;
```

Tip: Autocomplete with Ctrl+Enter or Cmd+Enter

Submit query

Results

All commands ran successfully

INSERT INTO Instructor(ins_id, lastname, firstname, city, country)
VALUES(8, 'Ryan', 'Steve', 'Barlby', 'GB'), (9, 'Sannareddy', 'Ramesh', 'Hyderabad', 'IN')
2 rows affected

SELECT * FROM Instructor

ins_id	lastname	firstname	city	country
1	Ahuja	Rav	Toronto	CA
2	Chong	Raul	Toronto	CA
3	Vasudevan	Hima	Chicago	US
4	Saha	Sandip	Edmonton	CA
5	Doe	John	Sydney	AU
6	Doe	Jane	Dhaka	BD
7	Cangiano	Antonio	Vancouver	CA
8	Ryan	Steve	Barlby	GB
9	Sannareddy	Ramesh	Hyderabad	IN

Exercise 2: UPDATE

In this exercise, you will first go through some examples of using UPDATE in queries and then solve some exercise problems by using it.

Task A

Example exercises on UPDATE

Let us go through some examples of UPDATE related queries:

1. In this example, we want to update one column of an existing row of the table.

1. Problem:

Update the city for Sandip to Toronto.

2. Solution:

plaintext

```
UPDATE Instructor
SET city='Toronto'
WHERE firstname="Sandip";
```

3. Copy the solution code above by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of the Datasette tool. Then click **Submit query**.
4. Copy the code below by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of the Datasette tool. Then click **Submit query**.

plaintext

```
SELECT * FROM Instructor;
```

5. Your output resultset should look like the image below:

Results

All commands ran successfully

SELECT * FROM Instructor

ins_id	lastname	firstname	city	country
1	Ahuja	Rav	Toronto	CA
2	Chong	Raul	Toronto	CA
3	Vasudevan	Hima	Chicago	US
4	Saha	Sandip	Toronto	CA
5	Doe	John	Sydney	AU
6	Doe	Jane	Dhaka	BD
7	Cangiano	Antonio	Vancouver	CA
8	Ryan	Steve	Barlby	GB
9	Sannareddy	Ramesh	Hyderabad	IN

2. In this example, we want to update multiple columns of an existing row of the table.

1. Problem:

Update the city and country for Doe with id 5 to Dubai and AE respectively.

2. Solution:

```
UPDATE Instructor
SET city='Dubai', country='AE'
WHERE ins_id=5;
```

3. Copy the solution code above by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of the Datasette tool. Then click **Submit query**.

4. Copy the code below by clicking on the little copy button on the bottom right

click **Submit query**.

[plaintext](#)

```
SELECT * FROM Instructor;
```

5. Your output resultset should look like the image below:

Practice SQL

Database: Instructors

```
1 SELECT * FROM Instructor;
```

Tip: Autocomplete with Ctrl+Enter or Cmd+Enter

[Submit query](#)

Results

All commands ran successfully

SELECT * FROM Instructor

ins_id	lastname	firstname	city	country
1	Ahuja	Rav	Toronto	CA
2	Chong	Raul	Toronto	CA
3	Vasudevan	Hima	Chicago	US
4	Saha	Sandip	Toronto	CA
5	Doe	John	Dubai	AE
6	Doe	Jane	Dhaka	BD
7	Cangiano	Antonio	Vancouver	CA
8	Ryan	Steve	Barlby	GB
9	Sannareddy	Ramesh	Hyderabad	IN

Task B

Practice exercises on UPDATE

Now, let us practice creating and running some UPDATE related queries.

1. Problem:

Update the city of the instructor record to Markham whose id is 1.

► Hint

Follow example 1 of the UPDATE exercise.



plaintext

```
```  
UPDATE table_name
SET [column1]='Markham'
WHERE [specifiedcolumn]=1;

SELECT * FROM tablename;
```
```



plaintext

```
<details><summary>Solution</summary>
```



plaintext

```
UPDATE Instructor
SET city='Markham'
WHERE ins_id=1;
```

```
SELECT * FROM Instructor;
...
```

</details>

<details><summary>Output</summary>

</details>

2. Problem:

> _Update the city and country for Sandip with id 4 to Dhaka and BD respe

<details><summary>Hint</summary>

> Follow example 2 of the UPDATE exercise.

...

```
UPDATE table_name
SET [column1]='Dhaka', [column2]='BD'
WHERE [specifiedcolumn]=4;
```

```
SELECT * FROM tablename;
...
```

</details>

<details><summary>Solution</summary>



plaintext

```
UPDATE Instructor
SET city='Dhaka', country='BD'
WHERE ins_id=4;
```

```
SELECT * FROM Instructor;
...
```



plaintext

<details><summary>Output</summary>

```
4  
5 SELECT * FROM Instructor;
```

Tip: Autocomplete with Ctrl+Enter or Cmd+Enter

Submit query

Results

All commands ran successfully

```
UPDATE Instructor  
SET city='Dhaka', country='BD'  
WHERE ins_id=4  
1 row affected
```

SELECT * FROM Instructor

ins_id	lastname	firstname	city	country
1	Ahuja	Rav	Markham	CA
2	Chong	Raul	Toronto	CA
3	Vasudevan	Hima	Chicago	US
4	Saha	Sandip	Dhaka	BD
5	Doe	John	Dubai	AE
6	Doe	Jane	Dhaka	BD
7	Cangiano	Antonio	Vancouver	CA
8	Ryan	Steve	Barlby	GB
9	Sannareddy	Ramesh	Hyderabad	IN

Support

Exercise 3: DELETE

In this exercise, you will first go through an example of using DELETE in a query and then solve an exercise problem by using it.

Task A

Example exercise on DELETE

Let us go through an example of a DELETE related query:

1. In this example, we want to remove a row from the table.

1. Problem:

Remove the instructor record of Doe whose id is 6.

2. Solution:

plaintext

```
DELETE FROM instructor
WHERE ins_id = 6;
```

3. Copy the solution code above by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of **Custom SQL query** of the Datasette tool. Then click **Submit query**.
4. Copy the code below by clicking on the little copy button on the bottom right of the codeblock below and paste it to the textbox of the Datasette tool. Then click **Submit query**.

plaintext

```
SELECT * FROM Instructor;
```

Practice SQL

Database: Instructors

```
1 SELECT * FROM Instructor;
```

Tip: Autocomplete with Ctrl+Enter or Cmd+Enter

Submit query

Results

All commands ran successfully

SELECT * FROM Instructor

ins_id	lastname	firstname	city	country
1	Ahuja	Rav	Markham	CA
2	Chong	Raul	Toronto	CA
3	Vasudevan	Hima	Chicago	US
4	Saha	Sandip	Dhaka	BD
5	Doe	John	Dubai	AE
7	Cangiano	Antonio	Vancouver	CA
8	Ryan	Steve	Barlby	GB
9	Sannareddy	Ramesh	Hyderabad	IN

Task B

Practice exercise on DELETE

Now, let us practice creating and running a DELETE related query.

1. Problem:

Remove the instructor record of Hima.

► Hint

Follow example 1 of the DELETE exercise.



plaintext

```
...  
  
DELETE FROM tablename  
WHERE [columnname1] = 'Hima';
```



plaintext

```
SELECT * FROM tablename;  
...
```



plaintext

```
<details><summary>Solution</summary>
```




plaintext

```
DELETE FROM instructor
WHERE firstname = 'Hima';

SELECT * FROM Instructor;
...
```

</details>

<details><summary>Output</summary>

</details>

::page{title=""}

Thank you for completing the Hands-on Lab : INSERT, UPDATE, DELETE! wher

Author(s)

- Sandip

Estimated time needed: 20 minutes

In this lab, you will learn some commonly used DML (Data Manipulation Language) statements of SQL other than SELECT. First, you will learn the INSERT statement, which is used to insert new rows into a table. Next, you will learn the UPDATE statement which is used to update the data in existing rows in the table. Lastly, you will learn the DELETE statement which is used to remove rows from a table.

Objectives

After completing this lab, you will be able to:

- Insert new rows into a table
- Update data in existing rows of the table
- Remove rows from a table

Concepts covered →