



Quantum Walks and its Applications in Quantum Networks



Undergraduate Thesis - Andre Nogueira Ribeiro
Supervisor: Prof. Fabio Kon (IME/USP)
Co-supervisor: Prof. Antonio Jorge Gomes Abelém (UFPA)
Supervisor at University of Massachusetts: Prof. Don Towsley(UMass)

Contents

1	Abstract	2
2	Important Concepts	2
2.1	Linear Algebra	2
2.2	Quantum Computation and Quantum Information	3
3	Introduction to Quantum Computing	5
3.1	Qubit	5
3.2	Mathematical model	5
3.3	Quantum Gates	6
4	Quantum Algorithms	9
4.1	Deutsch's algorithm	9
4.2	Deutsch-Jozsa algorithm	10
4.3	Simon's algorithm	11
4.4	Grover's algorithm	13
4.5	Shor's algorithm	15
5	Introduction to Quantum Information	18
5.1	Entanglement Swapping	19
5.2	Quantum Key Distribution	20
5.3	Quantum Internet	21
6	Introduction to Quantum Walks	23
6.1	One Dimensional Discrete Time Random Walks	23
6.2	Quantum Walks	25
7	Distributed Quantum Walk Control Plane for Quantum Networks	29
7.1	Quantum Walks Utility in this scenario	29
7.2	Mathematical Background	29
7.3	Coin and Shift operators	29
7.4	Paper	30
7.5	Linear Approach	30
7.6	Logarithmic Approach	30
7.7	Comparison of Approaches	31
7.8	Trade-Off Between Qubits, Time, and Circuits	31
8	Future Possibilities	32

1 Abstract

Quantum computing emerged from the idea of building a machine capable of simulating complex quantum systems, a concept proposed by physicist Richard Feynman and mathematician Yuri Manin. The challenge with simulating quantum systems on classical computers is that the computational effort increases exponentially with the size of the system, making it impractical for any significantly large problems. In addition to this focus, research in quantum algorithms has also achieved notable success. It has discovered algorithms with better complexity than classical ones being propose, such as Shor's algorithm for number factorization.

Quantum computing is also an exciting field of study, offering a wide range of unexplored possibilities, which makes it both intriguing and promising. Currently, companies like Google and IBM, have developed functional quantum machines that highlight the importance of this technology. These machines are capable of performing computations that are inaccessible to classical computers due to their distinct physical properties.

Some of the main challenges in advancing quantum computers include increasing the number of qubits (the basic unit of memory in quantum computing), reducing noise, and extending coherence time (the duration of quantum phenomena needed to execute an algorithm).

2 Important Concepts

This section describes some important concepts which will be needed to understand the content of this undergraduate thesis. You may read the concepts as they appear on this document.

2.1 Linear Algebra

- Hilbert space: A Hilbert space is a mathematical concept that extends the idea of Euclidean space to infinite dimensions. It is an inner product space, meaning it comes equipped with an inner product, which allows for the definition of norms. The space is also complete, meaning that any Cauchy sequence of vectors within the space converges to a point within the space. This property of completeness ensures that Hilbert spaces are well-suited for analysis, especially in quantum mechanics, where they provide the framework for representing quantum states and operators. The inner product in a Hilbert space allows for the measurement of orthogonality, projection, and distance, making it a foundational tool in functional analysis, quantum theory, and many other areas of mathematics and physics.
- $\langle \psi | \phi \rangle$: Notation for a inner product between ψ and ϕ .
- $|\psi\rangle |\phi\rangle$: Notation for a tensor product between ψ and ϕ .
- Normal Operator: An operator A on V is normal if $A^\dagger A = AA^\dagger$.
- Unitary Operator: An operator U is called unitary if it satisfies the condition: $U^\dagger U = UU^\dagger = I$, where $U^\dagger$ is the conjugate transpose of U , and I is the identity matrix. Unitary operators have several important properties: They are normal, meaning they are diagonalizable with respect to an orthonormal basis. The eigenvectors of a unitary operator associated with different eigenvalues are orthogonal, and each eigenvalue has unit modulus, meaning it has the form $e^{i\alpha}$, where α is a real number. Unitary operators preserve the inner product: for any vectors $|v_1\rangle$ and $|v_2\rangle$, $\langle Uv_1 | Uv_2 \rangle = \langle v_1 | v_2 \rangle$. As a result, the action of a unitary operator on a vector preserves its norm, ensuring that the vector's length remains unchanged. A complex square matrix U is unitary if its columns form an orthonormal set. Unitary evolution is fundamental in quantum mechanics, as unitary operators describe the evolution of closed quantum systems, maintaining consistent probabilities over time.
- Hermitian Operator: An operator A on V is Hermitian or self-adjoint if $A^\dagger = A$.
- Positive Operator: A positive operator A is defined to be an operator such that for any vector $|v\rangle$, $\langle v |, A |v\rangle$ is a real, non-negative number. If $\langle v |, A |v\rangle$ is strictly greater than zero for all $|v\rangle \neq 0$ then we say that A is positive definite. Any positive operator is automatically

Hermitian, and therefore by the spectral decomposition has diagonal representation $\sum_i \lambda_i |i\rangle \langle i|$, with non-negative eigenvalues λ_i . [2]

- Wavefunction: On the quantum computing field, a wavefunction is a function that the x axis corresponds to the basis states and the y axis corresponds to the quantum amplitude of the state.
- Orthogonal Projector: An operator P on V is an orthogonal projector if $P^2 = P$ and $P^\dagger = P$. [3]
- With high probability (WHP): In mathematics, an event that occurs with high probability is one whose probability depends on a certain number n and goes to 1 as n goes to infinity.
- Matrix rank: In linear algebra, the rank of a matrix A is the dimension of the vector space generated (or spanned) by its columns. This corresponds to the maximal number of linearly independent columns of A .

2.2 Quantum Computation and Quantum Information

- Superposition: In quantum mechanics, superposition refers to the ability of a quantum system to exist in multiple states simultaneously. A quantum particle, such as an electron, can be in a combination of different states until it is measured, at which point it collapses into one definite state. Superposition is a non intuitive fundamental principle that enables the unique behavior of quantum systems.
- Entanglement: In quantum mechanics, entanglement is a phenomenon where two or more particles become linked in such a way that the state of one particle instantly influences the state of the other(s), no matter how far apart they are. This correlation persists even when the particles are separated by large distances. Entanglement is a key feature of quantum mechanics, enabling phenomena such as quantum teleportation and playing a crucial role in quantum computing and cryptography.
- Phase (relative): In quantum computing, phase refers to the angle that describes the position of a qubit's state in relation to a reference point. When a qubit is in superposition (a combination of both 0 and 1), its state has a magnitude (how much it is in 0 or 1) and a phase (which affects how the states interact). Phases are important because they influence the interference between quantum states, which can change the probability of measuring certain outcomes. The relative phase between states is critical for how quantum algorithms work and how qubits interact.
- Global phase: In quantum computing, the global phase refers to an overall phase factor applied to a quantum state that does not affect measurement outcomes. A quantum state is typically represented as a vector, and multiplying the entire state by a complex number of unit magnitude (e.g., $e^{i\theta}$) introduces a global phase. This phase has no observable consequences, as quantum measurements are only sensitive to relative phases between components of a superposition. Therefore, global phase usually can be ignored in practical computations and is considered irrelevant to the behavior or outcomes of a quantum system.
- Quantum Error Correction: Quantum error correction is a set of techniques designed to protect quantum information from errors due to decoherence, noise, or other quantum disturbances. In quantum systems, qubits are fragile and susceptible to errors from their environment, which can lead to loss of information. Quantum error correction encodes logical qubits into entangled states of multiple physical qubits, allowing for the detection and correction of errors without directly measuring and collapsing the quantum state. It is a critical component in making quantum computers reliable and scalable for long computations, ensuring the integrity of quantum information over time.
- Pure or mixed state: On a Bloch sphere, pure states are represented by a point on the surface of the sphere, whereas mixed states are represented by an interior point. The completely mixed state of a single qubit is represented by the center of the sphere, by symmetry. The purity of a state can be visualized as the degree in which it is close to the surface of the sphere. In quantum mechanics, the state of a quantum system is represented by a state vector (or ket) $|\Psi\rangle$. A

quantum system with a state vector $|\Psi\rangle$ is called a pure state. However, it is also possible for a system to be in a statistical ensemble of different state vectors: For example, there may be a 50% probability that the state vector is $|\Psi_1\rangle$ and a 50% chance that the state vector is $|\Psi_2\rangle$. This system would be in a mixed state. The density matrix is especially useful for mixed states, because any state, pure or mixed, can be characterized by a single density matrix.

- **Measurement:** Quantum measurements are described by a collection M_m of measurement operators. These are operators acting on the state space of the system being measured. The index m refers to the measurement outcomes that may occur in the experiment. If the state of the quantum system is $|\psi\rangle$ immediately before the measurement then the probability that result m occurs is given by $p(m) = \langle\psi| M_m^\dagger M_m |\psi\rangle$ and the state of the system after the measurement is $\frac{M_m |\psi\rangle}{\sqrt{\langle\psi| M_m^\dagger M_m |\psi\rangle}}$. The measurement operators satisfy the completeness equation, $\sum_m M_m^\dagger M_m = I$. The completeness equation expresses the fact that probabilities sum to one: $1 = \sum_m p(m) = \sum_m \langle\psi| M_m^\dagger M_m |\psi\rangle$. [2]
- **Projective measurement:** A projective measurement is described by an observable, M , a Hermitian operator on the state space of the system being observed. The observable has a spectral decomposition, $\sum_m m P_m$, where P_m is the projector onto the eigenspace of M with eigenvalue m . The possible outcomes of the measurement correspond to the eigenvalues, m , of the observable. Upon measuring the state $|\psi\rangle$, the probability of getting result m is given by $p(m) = \langle\psi| P_m |\psi\rangle$. Given that outcome m occurred, the state of the quantum system immediately after the measurement is $\frac{P_m |\psi\rangle}{\sqrt{p(m)}}$. The average value of the observable M is often written $\langle M \rangle = \langle\psi| M |\psi\rangle$. [2]
- **Fidelity:** A second measure of distance between quantum states is the fidelity. The fidelity is not a metric on density operators, but we will see that it does give rise to a useful metric. This section reviews the definition and basic properties of the fidelity. The fidelity of states ρ and σ is defined to be $F(\rho, \sigma) = \text{tr} \sqrt{\rho^{\frac{1}{2}} \sigma \rho^{\frac{1}{2}}}$. Fidelity does satisfy many of the same properties as the trace distance. For example, it is invariant under unitary transformations: $F(U \rho U^\dagger, U \sigma U^\dagger) = F(\rho, \sigma)$. The fidelity between a pure state $|\psi\rangle$ and an arbitrary state ρ is $\langle\psi| \rho |\psi\rangle$. [2]
- **Quantum circuit depth:** The depth of a circuit is a metric that calculates the longest path between the data input and the output. Each gate counts as a unit.
- **Partial trace:** It can be calculated as the $\sum_B \langle\phi_B| \rho_A \otimes \rho_B |\phi_B\rangle = \rho_A \otimes \sum_B \langle\phi_B| \rho_B |\phi_B\rangle$. In a more clarified way $\text{tr}_B(L_{AB}) = \sum_i \langle i|_A L_{AB} |i\rangle_A = \langle 0|_0 \langle 0|_0 \langle 1|_1 \langle 0|_1 \rangle_B + \langle 1|_0 \langle 1|_1 \langle 0|_0 \langle 0|_1 \rangle_B = \langle 1|_1 \langle 0|_1 \rangle_B$.

3 Introduction to Quantum Computing

Quantum computing represents a transformative approach to computation, fundamentally different from classical computing. At its core, quantum computing leverages principles of quantum mechanics, such as superposition, entanglement, and interference, to process information in ways that classical computers cannot. This approach opens up new possibilities for solving complex problems in fields like cryptography, material science, and artificial intelligence. This section introduces the foundational concepts of quantum computing, beginning with the qubit and extending to the mathematical framework that describes quantum states and operations. Through an exploration of quantum gates and their applications, we lay the groundwork for understanding how quantum algorithms can achieve exponential speedups over their classical counterparts, demonstrating the remarkable potential of quantum computing.

3.1 Qubit

A qubit (quantum bit) is the fundamental unit of memory in a quantum computer, and unlike classical bits, which are limited to being in a state of either 0 or 1, a qubit can exist in a superposition of both 0 and 1 simultaneously. This unique property is a consequence of quantum mechanics, which allows qubits to represent not just one of two discrete states, but an infinite number of possibilities between 0 and 1.

In more technical terms, a qubit's state is described as a quantum superposition, where it can be in a combination of both 0 and 1, weighted by complex numbers called probability amplitudes. However, this superposition exists only until the qubit is measured. Upon measurement, the qubit collapses to a definite state, either 0 or 1, with probabilities determined by its probability amplitudes before the measurement.

The power of quantum computing lies in the ability to leverage these superposition states without directly measuring them. Through quantum algorithms, it's possible to manipulate and process data while qubits remain in superposition, exploring multiple possible solutions simultaneously. This parallelism can provide a significant computational advantage over classical computers, in problems such as factoring large numbers or simulating quantum systems.

Moreover, qubits also exhibit another quantum property called entanglement, where the state of one qubit is intrinsically linked to the state of another, regardless of the distance between them. This further enhances the computational potential of quantum systems, enabling qubits to work together in ways that classical bits cannot, exponentially increasing the power of quantum computations.

3.2 Mathematical model

Studying quantum computing requires a understanding of linear algebra, as it forms the mathematical foundation for describing quantum systems. I will briefly cover the key concepts. Every quantum system can be represented as a vector in a Hilbert space. A qubit, the fundamental unit of information in a quantum computer, can be represented as a two-dimensional vector, and the operations, or quantum gates, that act on this qubit are represented by unitary matrices. Unitary matrices preserve the norm of the vector, ensuring the system's total probability remains 1. The state of a qubit is expressed as:

$$|\psi\rangle = a|0\rangle + b|1\rangle$$

where $|0\rangle$ and $|1\rangle$ are basis vectors, defined as $(1,0)$ and $(0,1)$ respectively. These basis states correspond to the classical bit values 0 and 1. The complex numbers a and b are the probability amplitudes. The squared magnitudes, $|a|^2$ and $|b|^2$, represent the probabilities of the qubit collapsing to the state 0 or 1, respectively, upon measurement. For these probabilities to make physical sense, the normalization condition must be satisfied:

$$|a|^2 + |b|^2 = 1$$

This ensures that the sum of probabilities for all possible outcomes equals 1.

When we move beyond a single qubit, the dimensionality of the system increases exponentially. A system of two qubits is represented by a four-dimensional vector, and in general, a system of n qubits is described by a vector in a 2^n -dimensional space. This exponential growth in dimensionality is one thing which gives quantum computers advantage when compared to classical computers.

A common and intuitive way to visualize the state of a single qubit is through the Bloch sphere. The Bloch sphere represents the qubit as a point on the surface of a three-dimensional sphere, where the angles of the point correspond to the probability amplitudes and the global phase of the qubit. The global phase, while often not directly measurable, plays a crucial role in the evolution of the quantum system.

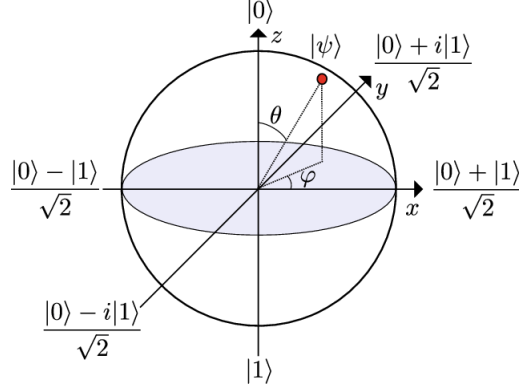


Figure 1: Bloch Sphere - https://www.researchgate.net/figure/The-Bloch-sphere-representation-of-a-qubit-state-The-north-pole-is-the-ground-state-0_fig1_35845744

In addition to these representations, understanding quantum systems requires grasping the probabilistic nature of quantum mechanics. The outcomes of quantum measurements are not deterministic but are governed by probability distributions, dictated by the amplitudes of the quantum state vector. This probabilistic behavior, though counterintuitive from a classical perspective, is a key aspect of quantum computing and forms the basis for algorithms that can outperform their classical counterparts.

3.3 Quantum Gates

In a quantum circuit, gates play a crucial role in manipulating the quantum information that passes through them. Unlike classical gates, which operate on bits, quantum gates operate on qubits and are represented mathematically by unitary matrices. These matrices are square, meaning that a gate acting on a single qubit is represented by a 2×2 matrix, while a gate acting on two qubits is represented by a 4×4 matrix. The unitary nature of these matrices ensures that the operations are reversible, a key property of quantum computations.

Quantum gates are the building blocks of quantum algorithms, and understanding how they function is essential for constructing and analyzing quantum circuits. Below are some important quantum gates commonly used in quantum computations:

The Hadamard gate creates a superposition of quantum states, transforming a qubit from a definite state (either $|0\rangle$ or $|1\rangle$) into an equal probability superposition of both states. This gate is crucial for many quantum algorithms, such as Grover's search algorithm and Shor's factoring algorithm. Its matrix representation is:

$$H = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix}$$

The Pauli-X gate, also known as the quantum NOT gate, flips the state of a qubit. If the qubit is in the state $|0\rangle$, the X gate transforms it to $|1\rangle$, and vice versa. Its matrix representation is:

$$X = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}$$

The CNOT (Controlled-Not) gate is a two-qubit gate that operates conditionally. Considering two qubits, control and target, it flips the state of the target qubit if and only if the control qubit is in the state $|1\rangle$. The CNOT gate plays a fundamental role in quantum entanglement and error correction. Its matrix representation for two qubits is:

$$CNOT = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{pmatrix}$$

The Toffoli gate is a three-qubit gate, also known as the controlled-controlled-X gate. It flips the state of the third qubit (the target) if and only if the first two qubits (the control qubits) are both in the state $|1\rangle$. This gate is essential for implementing reversible classical logic and can be used for quantum error correction.

$$CCX = \begin{pmatrix} 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \end{pmatrix}$$

The phase gate adds a phase factor to the quantum state without changing the probabilities of measuring the qubit in $|0\rangle$ or $|1\rangle$. Its matrix representation is:

$$S = \begin{pmatrix} 1 & 0 \\ 0 & i \end{pmatrix}$$

The T gate is a phase gate that applies a phase shift of $\frac{\pi}{4}$ to the state $|1\rangle$. It is an important component for creating universal quantum gates and can be represented as:

$$T = \begin{pmatrix} 1 & 0 \\ 0 & e^{i\frac{\pi}{4}} \end{pmatrix}$$

Quantum gates provide the essential operations needed to construct quantum circuits and perform quantum algorithms. Each gate manipulates the quantum state of one or more qubits in specific ways, and understanding these transformations is fundamental to working with quantum information. Below are examples of operations using some of the quantum gates introduced, along with the resulting states of the qubits:

Consider a single qubit initially in the state $|0\rangle$. Applying the Hadamard gate H to this qubit creates a superposition state:

$$H|0\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)$$

This operation transforms the qubit from a definite state $|0\rangle$ to an equal superposition of $|0\rangle$ and $|1\rangle$, a foundational step in quantum algorithms that require exploring multiple states simultaneously.

Suppose a qubit is in the state $|0\rangle$. Applying the Pauli-X gate, which acts as a quantum version of the classical NOT gate, flips the qubit's state:

$$X|0\rangle = |1\rangle$$

Similarly, if the qubit were initially in the state $|1\rangle$, the Pauli-X gate would transform it back to $|0\rangle$:

$$X|1\rangle = |0\rangle$$

Consider two qubits in the state $|0\rangle \otimes |0\rangle = |00\rangle$. First, we apply the Hadamard gate to the first qubit, resulting in the state:

$$(H \otimes I)|00\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) \otimes |0\rangle = \frac{1}{\sqrt{2}}(|00\rangle + |10\rangle)$$

Then, applying the CNOT gate with the first qubit as the control and the second qubit as the target gives:

$$\text{CNOT} \left(\frac{1}{\sqrt{2}}(|00\rangle + |10\rangle) \right) = \frac{1}{\sqrt{2}}(|00\rangle + |11\rangle)$$

This operation creates an entangled state, a key resource for quantum communication and computation.

Now consider three qubits in the state $|110\rangle$. Applying the Toffoli gate (CCX) to this state, with the first two qubits as controls and the third as the target, flips the state of the third qubit because both control qubits are in the state $|1\rangle$:

$$\text{CCX} |110\rangle = |111\rangle$$

If either of the control qubits were $|0\rangle$, the third qubit would remain unchanged, illustrating the conditional nature of the Toffoli gate.

Finally, consider a qubit in the state $|1\rangle$. Applying the Phase gate S to this qubit adds a phase factor of i to the $|1\rangle$ state:

$$S |1\rangle = i |1\rangle$$

Similarly, applying the T gate to $|1\rangle$ introduces a phase shift of $\frac{\pi}{4}$:

$$T |1\rangle = e^{i\frac{\pi}{4}} |1\rangle$$

These phase shifts are critical for creating complex interference patterns in quantum algorithms and are essential components in constructing universal quantum circuits.

Through the application of these gates, we observe how quantum operations differ significantly from classical logic gates. Quantum gates enable a variety of powerful transformations, including superposition, entanglement, and phase manipulation. Understanding and applying these gates allows for the construction of sophisticated quantum algorithms that leverage the unique properties of quantum mechanics to perform computations beyond the capabilities of classical systems.

4 Quantum Algorithms

Quantum algorithms are computational processes designed to harness the unique properties of quantum mechanics to solve certain problems more efficiently than classical algorithms.

One of the primary goals in developing quantum algorithms is to identify processes that can be executed with a polynomial number of quantum gates. In quantum computing, gates are the operations that manipulate qubits and thus form the steps of an algorithm. Algorithms requiring a polynomial number of gates are desirable because they remain efficient as problem sizes grow, ensuring that the quantum resources needed stay manageable.

By focusing on algorithms that require polynomial resources, researchers aim to make practical quantum computing a reality, enabling breakthroughs in fields such as cryptography, optimization, and materials science. In this section I will present some fundamentals and important quantum algorithms. Some of this content was based on learning provided by the IBM quantum material and qiskit.org

4.1 Deutsch's algorithm

Deutsch's algorithm is one of the earliest and simplest quantum algorithms, showcasing how quantum computing can solve certain types of problems more efficiently than classical computing. The problem it addresses is a simple example that demonstrates the power of quantum parallelism.

Imagine a black-box function, $f(x)$, that takes a single binary input x (either 0 or 1) and returns either 0 or 1. So, $f(x)$ has two possible inputs (0 and 1) and two possible outputs (0 or 1). There are four possible types of functions $f(x)$:

1. $f(0) = 0$ and $f(1) = 0$ (constant function returning 0 for both inputs)
2. $f(0) = 1$ and $f(1) = 1$ (constant function returning 1 for both inputs)
3. $f(0) = 0$ and $f(1) = 1$ (balanced function returning different values for each input)
4. $f(0) = 1$ and $f(1) = 0$ (also a balanced function)

The goal is to determine whether $f(x)$ is constant (both outputs are the same) or balanced (outputs are different).

Classically, we would need to check both inputs of $f(x)$ (i.e., $f(0)$ and $f(1)$) to determine if it is constant or balanced. This requires two function evaluations.

Quantumly, however, Deutsch's algorithm allows us to determine if $f(x)$ is constant or balanced with just one evaluation of $f(x)$. This efficiency comes from the ability of a qubit to exist in a superposition, allowing us to evaluate both inputs simultaneously. Below is how it works.

1. We start with two qubits:

- The first qubit, in state $|0\rangle$, will hold the input to the function $f(x)$.
- The second qubit, in state $|1\rangle$, is used to store the result of the function evaluation.

So, our initial state is:

$$|\psi_0\rangle = |0\rangle \otimes |1\rangle = |0, 1\rangle$$

2. Next, we apply the Hadamard gate to both qubits. The Hadamard gate creates a superposition state by transforming:

- $|0\rangle$ to $\frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)$
- $|1\rangle$ to $\frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)$

After applying Hadamard gates to both qubits, our state becomes:

$$|\psi_1\rangle = \frac{1}{2}(|0\rangle + |1\rangle) \otimes (|0\rangle - |1\rangle)$$

This sets up the first qubit in a superposition of inputs 0 and 1, allowing us to evaluate both cases simultaneously.

- Now, we apply the "oracle" or function gate, which encodes $f(x)$ into the second qubit. This operation, called the quantum oracle, flips the second qubit's sign based on the value of $f(x)$ without collapsing the state:

$$|\psi_2\rangle = \frac{1}{2} (|0\rangle \otimes (|0 \oplus f(0)\rangle - |1 \oplus f(0)\rangle) + |1\rangle \otimes (|0 \oplus f(1)\rangle - |1 \oplus f(1)\rangle))$$

- Next, we apply a Hadamard gate to the first qubit again. This final Hadamard gate transforms the state in such a way that, if $f(x)$ is constant, the first qubit will return to $|0\rangle$; if $f(x)$ is balanced, it will end up in $|1\rangle$.

After applying this Hadamard gate, we measure the first qubit:

- If the measurement outcome is 0, $f(x)$ is constant.
- If the measurement outcome is 1, $f(x)$ is balanced.

The magic of Deutsch's algorithm lies in the ability of the quantum oracle and superposition to use interference (through the Hadamard gates) to reveal whether $f(x)$ is constant or balanced with just one evaluation. This is impossible in classical computing, where we would need at least two evaluations to determine the nature of $f(x)$.

Below is the quantum circuit associated with Deutsch's algorithm.

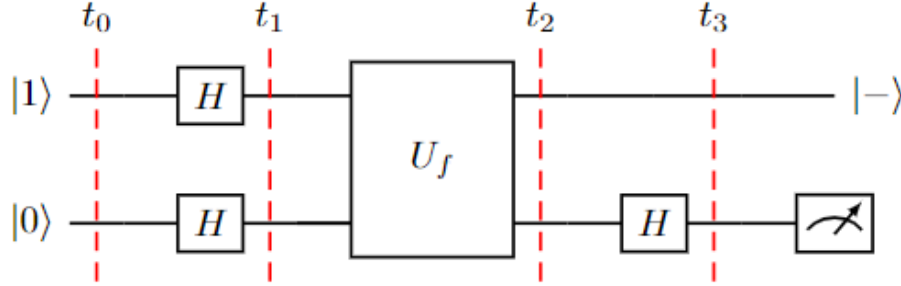


Figure 2: https://www.researchgate.net/figure/Graphical-representation-of-the-quantum-circuit-for-the-Deutsch-algorithm_fig5_381574807

4.2 Deutsch-Jozsa algorithm

The Deutsch-Jozsa algorithm is an extension of Deutsch's algorithm. It deals with a specific type of function. Suppose we have a function $f : \{0, 1\}^n \rightarrow \{0, 1\}$, meaning it takes an n -bit binary string as input and outputs either 0 or 1. The function $f(x)$, again, can be of two types: constant or balanced. In this case balanced means that the function outputs 0 for half of the inputs and 1 for the other half. Constant has the same meaning as before.

The goal is to determine if $f(x)$ is constant or balanced. Classically, we would need to evaluate $f(x)$ up to $2^{n-1} + 1$ times in the worst case to be certain, because we'd need to check enough inputs to ensure that it's not alternating between 0s and 1s.

In contrast, the Deutsch-Jozsa algorithm can determine whether $f(x)$ is constant or balanced with just one evaluation of the function, demonstrating an exponential speedup over classical approaches. Below is how it works

- We start with $n + 1$ qubits. The first n qubits represent the input to the function $f(x)$, and the last qubit will help with the evaluation:
 - Set the first n qubits to $|0\rangle$.
 - Set the last qubit to $|1\rangle$.

So our initial state is:

$$|\psi_0\rangle = |0\rangle^{\otimes n} \otimes |1\rangle$$

2. Apply the Hadamard gate to each of the $n + 1$ qubits. The Hadamard gate puts each qubit into a superposition, so we end up with all possible inputs (for the first n qubits) in superposition simultaneously. This transforms the state to:

$$|\psi_1\rangle = \frac{1}{\sqrt{2^n}} \sum_{x=0}^{2^n-1} |x\rangle \otimes \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)$$

The first n qubits are now in a superposition of all possible inputs, while the last qubit is in a superposition that allows it to act as a phase kickback in the next step.

3. Apply the Oracle (Quantum Function): Now we use a quantum oracle that applies the function $f(x)$ to the superposition state. The oracle is a black-box function that, for each input x , flips the phase of the state if $f(x) = 1$, but does nothing if $f(x) = 0$. This modifies our state to:

$$|\psi_2\rangle = \frac{1}{\sqrt{2^n}} \sum_{x=0}^{2^n-1} (-1)^{f(x)} |x\rangle \otimes \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle)$$

Here, $(-1)^{f(x)}$ introduces a phase factor based on the value of $f(x)$, changing the amplitude of each input state in a way that allows us to determine whether $f(x)$ is constant or balanced.

4. Apply the Hadamard gate again to the first n qubits, transforming our state once more. This step is crucial, as it amplifies the amplitudes in a way that depends on whether $f(x)$ is constant or balanced. After this transformation, the state will collapse into one of two distinct results based on the type of $f(x)$.
5. Finally, we measure the first n qubits:
 - If the measurement outcome is $|0\rangle^{\otimes n}$, $f(x)$ is constant.
 - If the measurement outcome is anything other than $|0\rangle^{\otimes n}$, $f(x)$ is balanced.

The Deutsch-Jozsa algorithm exploits quantum parallelism and interference. By putting the input qubits in a superposition, we can evaluate $f(x)$ for all possible inputs at once. The phase kickback and interference through the Hadamard gates allow us to detect whether the function outputs are the same (constant) or balanced across the inputs, without needing multiple evaluations.

Below is the quantum circuit associated with Deutsch-Jozsa algorithm.

4.3 Simon's algorithm

Simon's algorithm is one of the foundational quantum algorithms, demonstrating an exponential speedup over classical algorithms for a specific type of problem. It was a precursor to Shor's algorithm and is significant because it proved that quantum computing could solve certain problems exponentially faster than classical computing.

In Simon's problem, we are given a black-box function $f : \{0, 1\}^n \rightarrow \{0, 1\}^n$ with the promise that there exists a secret string $s \in \{0, 1\}^n$ such that:

- If $f(x) = f(y)$, then $x \oplus y = s$.

This means that $f(x)$ is 2-to-1: each output is produced by exactly two distinct inputs, and the difference (XOR) between these two inputs is the secret string s . The goal of Simon's algorithm is to determine the value of s .

Classically, solving Simon's problem requires $O(2^{n/2})$ evaluations of $f(x)$ to find s with high probability. In contrast, Simon's algorithm can find s using only $O(n)$ queries to $f(x)$ by taking advantage of quantum parallelism and interference.

1. Start with $2n$ qubits, where the first n qubits represent the input x and the second n qubits will store the output of $f(x)$. Initialize all qubits to $|0\rangle$:

$$|\psi_0\rangle = |0\rangle^{\otimes 2n}$$

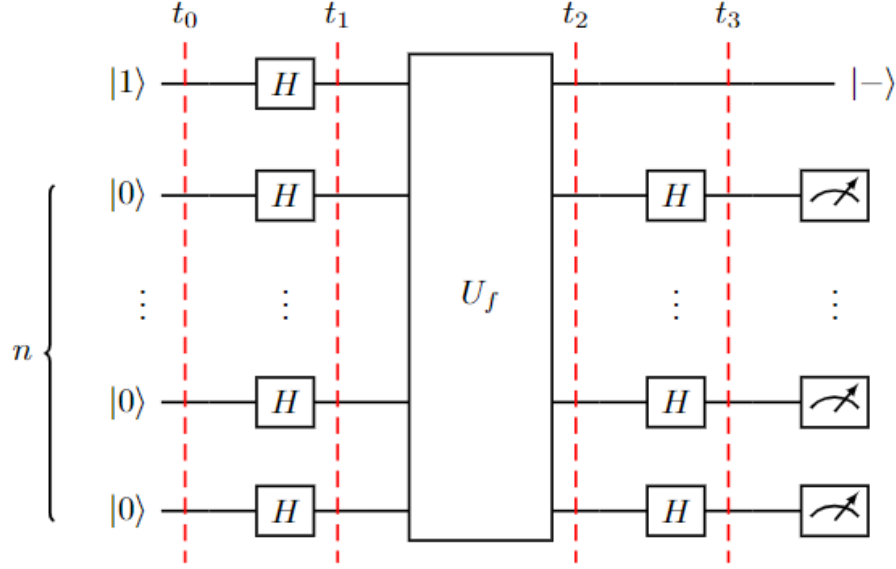


Figure 3: https://www.researchgate.net/figure/Graphical-representation-of-the-quantum-circuit-for-the-Deutsch-Jozsa-algorithm_fig6_381574807

2. Apply Hadamard gates to the first n qubits, putting them into a superposition of all possible inputs. The state becomes:

$$|\psi_1\rangle = \frac{1}{\sqrt{2^n}} \sum_{x=0}^{2^n-1} |x\rangle \otimes |0\rangle^{\otimes n}$$

3. Next, apply the oracle for $f(x)$, which maps $|x\rangle \otimes |0\rangle$ to $|x\rangle \otimes |f(x)\rangle$. After the oracle query, the state becomes:

$$|\psi_2\rangle = \frac{1}{\sqrt{2^n}} \sum_{x=0}^{2^n-1} |x\rangle \otimes |f(x)\rangle$$

Since $f(x)$ is 2-to-1, pairs of inputs differ by the secret string s and map to the same output. The result is an entangled state where knowing one x value gives a relationship to the other.

4. Measure the second n qubits. This collapses the state, and we are left with a superposition of the first register that includes only those x -values satisfying $x \oplus y = s$. This reduces our state to:

$$|\psi_3\rangle = \frac{1}{\sqrt{2}} (|x\rangle + |x \oplus s\rangle)$$

for some random x .

5. Apply Hadamard gates to the first n qubits. This transforms each $|x\rangle$ and $|x \oplus s\rangle$ component, giving us a new state where we can measure information about s :

$$|\psi_4\rangle = \frac{1}{\sqrt{2^n}} \sum_{z=0}^{2^n-1} (-1)^{x \cdot z} (|z\rangle + (-1)^{s \cdot z} |z\rangle)$$

The measurement yields a bitstring z that satisfies $z \cdot s = 0 \pmod{2}$, giving us information about the secret string s .

6. Repeat the process n times to get n linearly independent equations for s . Solve this system of linear equations to determine s .

This provides an exponential speedup, requiring only $O(n)$ evaluations instead of $O(2^{n/2})$.

Simon's algorithm was one of the first to demonstrate an exponential quantum speedup. It showcases how quantum algorithms can solve specific types of problems faster than classical algorithms by leveraging superposition and interference. The principles used in Simon's algorithm laid the groundwork for more complex algorithms, such as Shor's algorithm for factoring.

Below is the quantum circuit associated with Simon's algorithm.

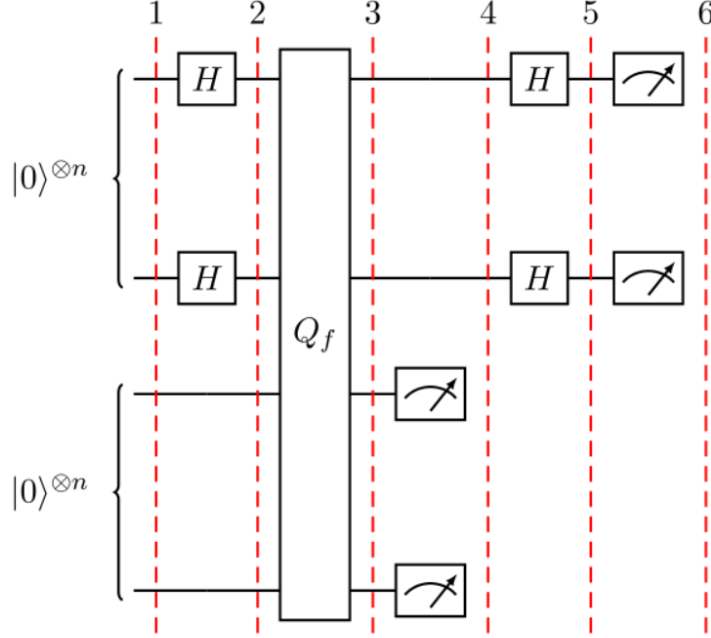


Figure 4: <https://medium.com/@monitsharma/learn-quantum-computing-with-qiskit-simons-algorithm-8525adecd091>

4.4 Grover's algorithm

Grover's algorithm is a quantum search algorithm that provides a quadratic speedup over classical search algorithms. It is used to search an unsorted database or solve search problems, where the goal is to locate a specific "marked" item among N possible entries. While a classical search requires $O(N)$ operations to find the item in the worst case, Grover's algorithm can find it in $O(\sqrt{N})$ operations.

The problem assumes a black-box function (oracle) $f(x)$ defined as:

$$f(x) = \begin{cases} 1 & \text{if } x \text{ is the marked item,} \\ 0 & \text{otherwise.} \end{cases}$$

The oracle function identifies the marked item by returning 1 for the correct input $x = x_0$ and 0 otherwise. The goal is to find x_0 using as few queries to the oracle as possible.

Grover's algorithm is optimal for problems where the marked item needs to be located within an unstructured search space, making it useful for various applications in cryptography, optimization, and more.

1. Begin with n qubits in the $|0\rangle$ state. Apply a Hadamard gate to each qubit to create an equal superposition of all possible states:

$$|\psi_0\rangle = \frac{1}{\sqrt{N}} \sum_{x=0}^{N-1} |x\rangle$$

where $N = 2^n$, the total number of possible states for n qubits.

2. Apply the oracle to flip the phase of the marked item. The oracle changes the amplitude of the target state $|x_0\rangle$ by introducing a phase of -1. The state after the oracle application becomes:

$$|\psi_1\rangle = \frac{1}{\sqrt{N}} \sum_{x \neq x_0} |x\rangle - \frac{1}{\sqrt{N}} |x_0\rangle$$

This marks the target item by shifting its amplitude, setting it up for amplification in the next steps.

3. Apply the Grover diffusion operator, which increases the amplitude of the marked state while decreasing the amplitudes of the other states. This operator consists of three steps:

- Apply a Hadamard transform to all qubits.
- Perform a phase flip on the $|0\rangle$ state (invert the amplitudes about the average).
- Apply the Hadamard transform to all qubits again.

After the amplitude amplification step, the state evolves closer to the target state. The diffusion operator is represented by:

$$D = 2|\psi_0\rangle\langle\psi_0| - I$$

4. Repeat the oracle and diffusion steps approximately $O(\sqrt{N})$ times. Each iteration increases the amplitude of the marked state and decreases the amplitudes of the unmarked states, converging on the solution.
5. After performing the oracle and amplitude amplification steps $O(\sqrt{N})$ times, measure the qubits. With high probability, the result will be the marked item x_0 .

The oracle marks the target state by inverting its phase, and the diffusion operator amplifies the amplitude of the marked state by rotating it closer to the target. By iterating these steps $O(\sqrt{N})$ times, Grover's algorithm amplifies the target state's amplitude, making it significantly more likely to be observed upon measurement.

Grover's algorithm illustrates the power of quantum computing for search problems. By reducing the search complexity from $O(N)$ to $O(\sqrt{N})$, it provides a quadratic speedup over classical methods. Although it is not an exponential improvement, this quadratic speedup is highly valuable for large search spaces and has potential applications in cryptography, database searching, and optimization.

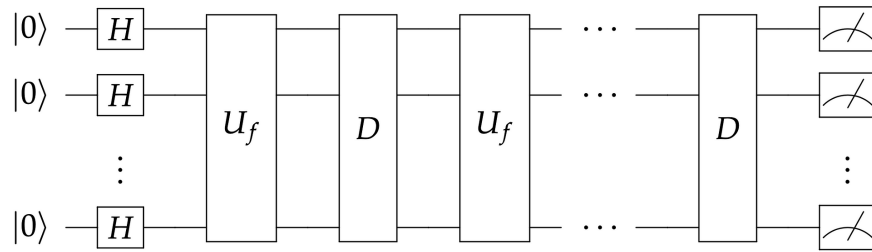


Figure 5: <https://towardsdatascience.com/grovers-quantum-search-algorithm-54c427315768>

For an easier understanding, Grover's algorithm has a geometric interpretation, which provides insight into why it efficiently locates the marked item. The algorithm's core process—phase inversion and amplitude amplification—can be visualized as a sequence of rotations in a multi-dimensional space.

Imagine that the quantum state space is represented by a vector space where each possible basis state (each possible value of x in the search space) corresponds to a unique axis in the space. In this space, we can define two important vectors:

- $(|x_0\rangle)$: This vector represents the quantum state corresponding to the marked item, which we want to identify.

- ($|s\rangle$): This vector represents an equal probability amplitude over all possible states, constructed as:

$$|s\rangle = \frac{1}{\sqrt{N}} \sum_{x=0}^{N-1} |x\rangle$$

where $N = 2^n$, the total number of possible states for n qubits.

The initial state of the algorithm, after applying Hadamard gates to all qubits, is $|s\rangle$, a uniform superposition over all possible items.

We can think of $|s\rangle$ as forming an angle with $|x_0\rangle$ (the solution state). Since $|s\rangle$ is an equal superposition of all possible states, it can be decomposed into two components:

- A component along the direction of $|x_0\rangle$.
- A component perpendicular to $|x_0\rangle$ (we can call this the "non-solution" space).

Let $|w\rangle$ represent the direction orthogonal to $|x_0\rangle$, which spans all states except the marked state. Thus, we can decompose $|s\rangle$ as:

$$|s\rangle = \alpha |x_0\rangle + \beta |w\rangle$$

where α and β are real coefficients representing the projection of $|s\rangle$ onto $|x_0\rangle$ and $|w\rangle$, respectively.

Grover's algorithm uses two main operations that act as rotations in this vector space:

1. The oracle marks the solution state by flipping the phase of $|x_0\rangle$, effectively rotating $|s\rangle$ through the angle between $|s\rangle$ and $|x_0\rangle$. This is equivalent to reflecting $|s\rangle$ across the hyperplane orthogonal to $|x_0\rangle$.
2. The Grover diffusion operator acts as a reflection about $|s\rangle$. This reflection moves the vector closer to $|x_0\rangle$ by effectively doubling the amplitude of the marked state (the component of $|s\rangle$ in the $|x_0\rangle$ direction).

Each application of the oracle and diffusion operators constitutes one "Grover iteration." These two reflections, applied in sequence, effectively rotate the state vector by a fixed angle closer to $|x_0\rangle$ in each iteration.

The rotation angle per Grover iteration is approximately:

$$\theta = 2 \arcsin\left(\frac{1}{\sqrt{N}}\right)$$

This angle depends on the size of the search space, N , and determines how quickly the algorithm converges to the solution state. To maximize the probability of measuring the marked state $|x_0\rangle$, Grover's algorithm requires approximately:

$$k = \frac{\pi}{4} \sqrt{N}$$

iterations, or applications of the oracle and diffusion operators, to rotate the state vector as close as possible to $|x_0\rangle$. The figure 6 makes it more tangible.

After $O(\sqrt{N})$ iterations, the state vector will be very close to $|x_0\rangle$, and a measurement of the state will yield the marked item with high probability. This geometric interpretation highlights why Grover's algorithm is optimal for unstructured search: each iteration moves the state vector closer to the target solution, and the quadratic speedup comes from the number of rotations required to reach the solution state, which scales as $\sqrt{N}$.

4.5 Shor's algorithm

Shor's algorithm is a quantum algorithm that efficiently finds the prime factors of a large integer N , solving the integer factorization problem. This problem is crucial because the security of many classical cryptographic systems, such as RSA, relies on the difficulty of factoring large integers. Shor's algorithm achieves exponential speedup over the best-known classical algorithms, making it a key example of quantum computing's potential.

Given a large integer N , Shor's algorithm aims to find a nontrivial factor of N . The algorithm relies on the following insight from number theory:

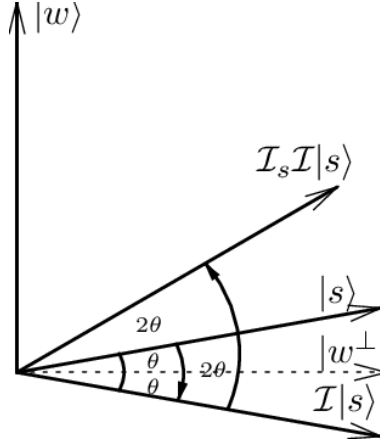


Figure 6: https://www.researchgate.net/figure/Geometric-visualization-of-Grovers-algorithm_fig147438604

- For a random integer a (where $1 < a < N$), if a and N are coprime, then there exists a smallest positive integer r (called the order) such that:

$$a^r \equiv 1 \pmod{N}$$

- If r is even, then with high probability, the factors of N are given by the greatest common divisor of N with $a^{r/2} - 1$ and $a^{r/2} + 1$.

Thus, finding the period r allows us to factor N . Classically, finding r would require exponential time, but quantum computing can efficiently determine r using a technique called the Quantum Fourier Transform (QFT). Following are the algorithm steps.

1. Choose a random integer a where $1 < a < N$ and $\gcd(a, N) = 1$.
2. The main quantum component of Shor's algorithm is finding the period r of the function $f(x) = a^x \pmod{N}$. To find r , we set up a quantum state that represents this function.
3. Initialize two quantum registers:
 - The first register holds an equal superposition of all possible values of x (from 0 to some $2^n - 1$), created using Hadamard gates.
 - The second register starts in the $|0\rangle$ state and will store the values $f(x) = a^x \pmod{N}$.

The initial state after applying Hadamard gates to the first register is:

$$|\psi_0\rangle = \frac{1}{\sqrt{2^n}} \sum_{x=0}^{2^n-1} |x\rangle \otimes |0\rangle$$

4. Using a quantum circuit, apply the function $f(x) = a^x \pmod{N}$ to entangle the first register with the output in the second register:

$$|\psi_1\rangle = \frac{1}{\sqrt{2^n}} \sum_{x=0}^{2^n-1} |x\rangle \otimes |f(x)\rangle$$

This state encodes periodicity information related to the order r .

5. To extract the period r , we apply the Quantum Fourier Transform to the first register. The QFT transforms a superposition of states into a frequency space that reveals periodic patterns.

Quantum Fourier Transform (QFT)

The Quantum Fourier Transform is the quantum analog of the discrete Fourier transform (DFT) and is essential for finding periodicity in quantum algorithms. For a state $|x\rangle = \sum_{k=0}^{N-1} x_k |k\rangle$, the QFT is defined as:

$$\text{QFT}(|x\rangle) = \frac{1}{\sqrt{N}} \sum_{y=0}^{N-1} e^{2\pi i xy/N} |y\rangle$$

where $N = 2^n$ for an n -qubit system.

In Shor's algorithm, the QFT allows us to move from a superposition over the computational basis to one where the periodicity of $f(x) = a^x \bmod N$ becomes measurable.

The QFT circuit consists of Hadamard gates and controlled phase rotations, with the following steps for an n -qubit register:

- (a) Apply a Hadamard gate to the first qubit.
- (b) Apply controlled phase rotations between each qubit, such that each subsequent qubit has a phase shift based on the values of the previous qubits.
- (c) Repeat this process for each qubit, applying decreasing rotations as the circuit progresses.
- (d) Finally, perform a "swap" operation to reverse the order of the qubits.

The QFT transforms the state so that measuring it will reveal information about the period r in the frequency domain.

6. After applying the QFT, measure the first register. The result will likely yield an integer k that is related to the period r by:

$$k \approx \frac{j}{r}$$

for some integer j . Using continued fractions, we can compute r from k with high probability.

7. Once r is found, check if it is even. Then compute the factors of N as $\gcd(a^{r/2} - 1, N)$ and $\gcd(a^{r/2} + 1, N)$. If these values yield nontrivial factors, the algorithm is complete. Otherwise, repeat the process with a new random a .

Shor's algorithm leverages the quantum superposition and the Quantum Fourier Transform to efficiently find the period r , a task that is exponentially hard on classical computers. By encoding the periodicity of $f(x) = a^x \bmod N$ in a quantum state and using the QFT to extract this periodicity, Shor's algorithm allows us to find factors of N with only polynomial quantum resources.

Shor's algorithm demonstrates the power of quantum computing for number-theoretic problems, achieving an exponential speedup in factoring large numbers. The algorithm combines classical number theory, modular exponentiation, and the Quantum Fourier Transform, which plays a central role in revealing periodicity. This algorithm has substantial implications for cryptography, as it provides an efficient means of breaking widely-used cryptographic systems like RSA.

On figure 7 is the associated quantum circuit.

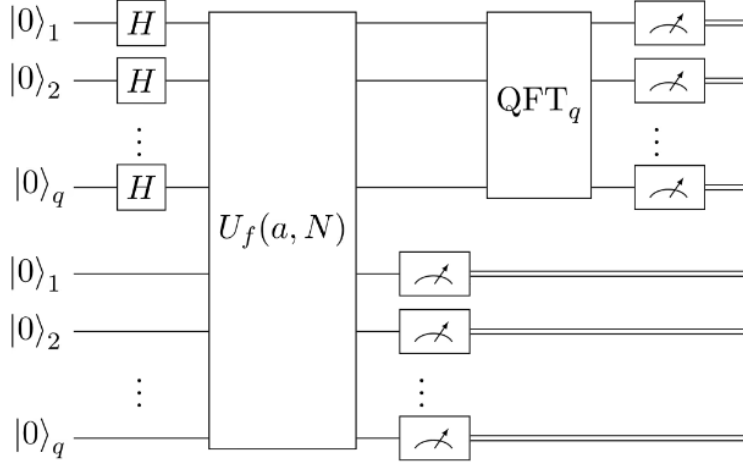


Figure 7: <https://prefetch.eu/know/concept/shors-algorithm/>

5 Introduction to Quantum Information

Following, is an introduction to some quantum information concepts based on the paper *"Quantum Internet: A Vision for the Road Ahead"* by *Stephanie Wehner, David Elkouss, and Ronald Hanson*, along with materials on quantum communication from the XXXVIII Brazilian Symposium on Computer Networks and Distributed Systems, provided by Professor Antônio Jorge Abelém.

The vision behind developing a quantum internet is to enable new technologies through quantum communication between any two points on the planet. Significant applications of quantum communication have already been identified, including secure communication, clock synchronization, secure user identification, exponential savings in communication, and secure access to remote quantum computers via the cloud.

Quantum computing operates under principles that differ substantially from classical computing, as proposed by Alan Turing. Quantum communication utilizes the laws of quantum physics to protect and transmit information. This can be done through the transfer of a quantum state (entangled or otherwise), the creation of an entangled state, or the use of a pre-established entangled state.

However, achieving quantum communication at scale presents several challenges: the difficulty of creating and maintaining quantum states, the challenge of transmitting qubits, and the need for integrating quantum systems with classical systems.

Before delving deeper, it is essential to understand Bell states. Also known as EPR pairs or maximally entangled states, Bell states are four specific quantum states of two qubits, named after physicist John S. Bell, who discovered them in 1964. Bell states are critical in quantum information and communication because they are maximally entangled, meaning their states cannot be described independently. When one qubit in a Bell state pair is measured, the state of the other qubit is instantly determined, regardless of the distance between them. Bell states have applications in quantum teleportation, quantum key distribution, and other quantum communication protocols.

The four Bell states are:

$$\begin{aligned} |\Phi^+\rangle &= \frac{|00\rangle + |11\rangle}{\sqrt{2}} \\ |\Phi^-\rangle &= \frac{|00\rangle - |11\rangle}{\sqrt{2}} \\ |\Psi^+\rangle &= \frac{|01\rangle + |10\rangle}{\sqrt{2}} \\ |\Psi^-\rangle &= \frac{|01\rangle - |10\rangle}{\sqrt{2}} \end{aligned}$$

A fundamental protocol in this field is quantum teleportation, which allows for the exact transfer of a qubit's quantum state to another qubit, essential because a qubit's state cannot be cloned. This protocol reflects a security advantage: quantum information cannot be copied or verified mid-process, making it inherently secure. Additionally, the entanglement property enables rapid and efficient communication, as it implies a correlation that is independent of the distance between the entangled particles. Below is the associated circuit.

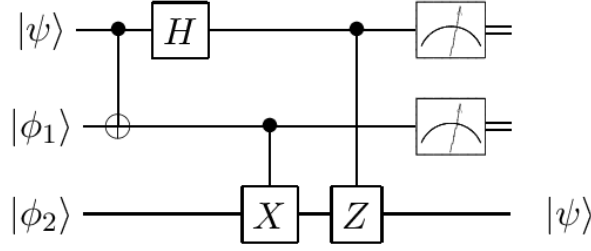


Figure 8: https://www.researchgate.net/figure/modified-quantum-teleportation-circuit_fig1_28663990

Another interesting exercise is the CHSH game (Clauser-Horne-Shimony-Holt), a game involving two players, Alice and Bob, who can communicate beforehand. Once the game begins, each player receives a random bit (0 or 1) from a referee and must return one of two possible values. Without further communication, they win if the exclusive OR of their outputs equals the logical AND of their inputs. Classical strategies allow them to win 75% of the time on average, but by using entangled qubits, they can increase their success rate, demonstrating a clear advantage of quantum communication.

Next, I will explain two critical protocols in the field of quantum communication and the quantum internet, *entanglement swapping* and *quantum key distribution* (QKD).

5.1 Entanglement Swapping

Entanglement Swapping is a quantum communication protocol that enables two distant parties to share entanglement without any direct interaction between them. This protocol is fundamental for building quantum communication networks and creating long-distance entanglement across large distances, which is essential for secure quantum communication. Here's a detailed explanation of the process:

First, it involves two pairs of entangled qubits. We label these pairs as:

- Pair AB, where qubits A and B are entangled.
- Pair CD, where qubits C and D are entangled.

Initially, the entangled pairs are in the following state:

$$|\Phi^+\rangle_{AB} \otimes |\Phi^+\rangle_{CD} = \frac{1}{2}(|00\rangle_{AB} + |11\rangle_{AB}) \otimes (|00\rangle_{CD} + |11\rangle_{CD})$$

1. The qubits from each pair are separated and sent to different locations: - Qubit A is sent to Alice. - Qubit D is sent to Bob. - Qubits B and C are sent to an intermediate station, often referred to as a "measurement node."
2. At the measurement node, a joint measurement is performed on qubits B and C to project them into one of the four possible Bell states. This measurement entangles the qubits at the measurement node and collapses them into a known entangled state. The four possible Bell states for qubits B and C are:

$$\begin{aligned} |\Phi^+\rangle &= \frac{|00\rangle + |11\rangle}{\sqrt{2}} \\ |\Phi^-\rangle &= \frac{|00\rangle - |11\rangle}{\sqrt{2}} \\ |\Psi^+\rangle &= \frac{|01\rangle + |10\rangle}{\sqrt{2}} \\ |\Psi^-\rangle &= \frac{|01\rangle - |10\rangle}{\sqrt{2}} \end{aligned}$$

3. When qubits B and C are measured in a Bell state, this measurement "swaps" the entanglement. This means that qubits A and D , which were previously unentangled, are now entangled with each other. The measurement on B and C projects the state of A and D into an entangled state. Importantly, this occurs without any direct interaction between qubits A and D .

4. After the measurement, qubits A and D are in one of the four possible Bell states, depending on the outcome of the measurement on qubits B and C . The specific entangled state of A and D can be determined based on the measurement result at the measurement node. Alice and Bob can then use this shared entanglement for further quantum communication tasks, such as quantum teleportation or quantum key distribution (QKD).

Entanglement Swapping has critical implications for quantum communication networks because it allows entanglement to be established over long distances without the need for a direct quantum link between the communicating parties. Instead of relying on a single quantum channel connecting Alice and Bob, entanglement swapping enables the creation of long-distance entanglement through intermediate nodes, which can be chained together to create a quantum repeater network.

By implementing entanglement swapping at multiple nodes, a "quantum repeater" architecture can be created, where entanglement is extended across increasingly larger distances. This process is crucial for overcoming the distance limitations of direct quantum communication, as qubits transmitted over long distances (e.g., via optical fiber or free-space optical links) are prone to errors and decoherence. Through entanglement swapping, secure quantum communication can be maintained across vast distances with high fidelity, providing a foundation for a global quantum internet.

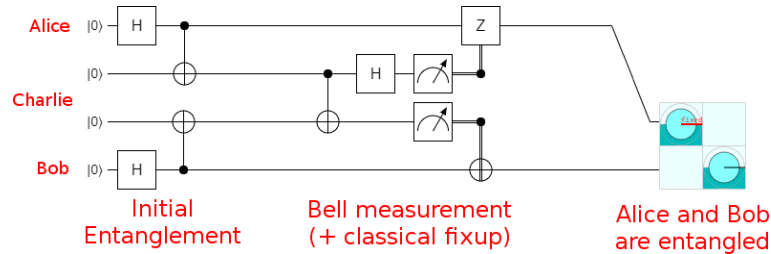


Figure 9: Illustration of Entanglement Swapping Protocol

5.2 Quantum Key Distribution

Quantum Key Distribution (QKD) is a quantum cryptographic protocol that enables two parties to securely share an encryption key, making it impossible for a third party to intercept without detection. QKD relies on the principles of quantum mechanics to generate cryptographic keys that are intrinsically secure, as any attempt to eavesdrop on the key would disturb the quantum states and be immediately detectable.

QKD involves two main participants, commonly called Alice (the sender) and Bob (the receiver). They share a quantum channel (such as optical fiber or free-space optical links) for the transmission of qubits and a classical communication channel for error correction and verification. The basic idea is to use the properties of quantum mechanics to generate a shared, random key between Alice and Bob that can be used to encrypt and decrypt messages securely.

The most widely known implementation of QKD is the BB84 protocol, developed by Charles Bennett and Gilles Brassard in 1984. The steps of this protocol are as follows:

1. Alice prepares a sequence of qubits, each randomly polarized in one of two bases:
 - The rectilinear basis (0° and 90°) where $|0\rangle$ and $|1\rangle$ represent the two states.
 - The diagonal basis (45° and 135°) where $|+\rangle$ and $|-\rangle$ represent the two states.

Alice randomly chooses the basis and polarization for each qubit and sends the sequence of qubits to Bob over the quantum channel.

2. Upon receiving the qubits, Bob measures each qubit in a randomly chosen basis (either rectilinear or diagonal). Due to the principles of quantum mechanics, if Bob chooses the correct basis (matching Alice's choice), he will measure the correct state. If he chooses the wrong basis, he will measure a random result.

3. After all qubits have been transmitted and measured, Alice and Bob communicate over the classical channel to disclose the bases they used for each qubit. They do not reveal the actual measurement outcomes, only the choice of basis. They discard any measurements where they used different bases and retain only the results where their bases matched.
4. To ensure that no eavesdropping has occurred, Alice and Bob compare a subset of their remaining bits (the ones with matching bases) to check for errors. If the error rate is within an acceptable range (indicating that eavesdropping is unlikely), they proceed with the key generation process. Otherwise, they discard the key and restart the protocol.
5. After correcting for any detected errors, Alice and Bob perform a privacy amplification process to further secure the key. This step reduces any partial information an eavesdropper might have obtained by compressing the shared key, ensuring that only Alice and Bob have a secure and private encryption key.

The security of QKD is guaranteed by the laws of quantum mechanics, particularly the no-cloning theorem and the disturbance caused by measurement. The no-cloning theorem states that it is impossible to create an identical copy of an unknown quantum state. Therefore, an eavesdropper (Eve) cannot intercept and reproduce the qubits without introducing detectable disturbances.

Furthermore, if Eve tries to measure the qubits in transit, she will introduce errors due to the random choice of measurement bases by Alice and Bob. This disturbance will reveal her presence, as the error rate in the transmitted key will increase. By comparing a subset of their key bits, Alice and Bob can detect any anomalies that indicate eavesdropping.

QKD has important applications in secure communications, especially in sectors requiring high levels of confidentiality, such as government communications, financial transactions, and military operations. By enabling the secure sharing of encryption keys, QKD provides a foundation for secure communication in a world where classical encryption could potentially be broken by quantum computers.

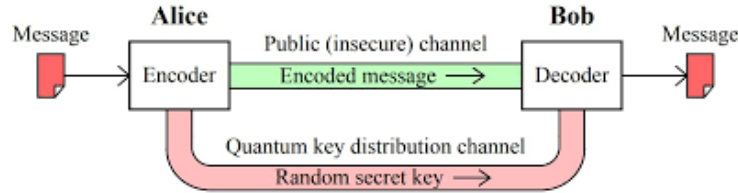


Figure 10: Illustration of Quantum Key Distribution (QKD) Protocol. Alice sends a sequence of qubits to Bob, who measures them. They then compare their measurement bases over a classical channel to generate a secure, shared encryption key.

5.3 Quantum Internet

A quantum internet is a network designed to enable the secure and efficient transmission of quantum information, allowing for quantum communication and computing on a global scale. Unlike the classical internet, which transmits bits, a quantum internet transmits qubits, the fundamental units of quantum information. Establishing a quantum internet involves overcoming significant challenges and requires three essential components: a physical medium for qubit transmission, methods to extend transmission distances, and quantum processors connected to the network to process quantum information.

A functional quantum internet requires three main elements:

1. **Physical Connection for Qubit Transmission:** Qubits can be transmitted through various channels, including optical fibers and free-space optical communication. Optical fiber, commonly used in conventional telecommunications, can transmit qubits over short to medium distances, but standard fibers are inadequate for quantum communication over long distances due to high error rates and decoherence. To address this, researchers have developed specialized optical fibers, such

as photonic crystal fibers, designed to minimize decoherence and better support qubit transmission. However, even with these advancements, error rates increase quadratically with distance in optical fibers, making long-distance transmission challenging.

Free-space optical communication, which uses lasers to transmit information through open air, is an alternative to fiber optics. This approach has been used to establish quantum communication links between ground stations and satellites in orbit, enabling much longer distances than achievable with fiber optics. While promising, free-space optical communication requires precise alignment and is subject to environmental disturbances, such as atmospheric conditions.

2. **Quantum Repeaters for Extended Distances:** In both fiber-optic and free-space systems, extending transmission distances within a quantum network requires *quantum repeaters*. Quantum repeaters are specialized devices that amplify and maintain quantum signals, effectively increasing the range of quantum communication. Each quantum repeater consists of various components, including information processors, entanglement generation mechanisms, and storage for qubits. The primary challenge for quantum repeaters is to preserve the fragile quantum information during signal amplification, which is accomplished using *quantum error correction protocols* to maintain the integrity of the transmitted qubits.

Quantum repeaters create entanglement between distant nodes in the network by linking shorter segments of entangled qubits, a process known as entanglement swapping. This allows for the extension of quantum communication over vast distances, making long-distance secure quantum communication feasible.

3. **Quantum Processors for Information Processing:** The final element of a quantum internet is the quantum processors connected to the network, which handle and process quantum information. Quantum processors act as nodes in the quantum network, receiving, manipulating, and transmitting quantum data. They play a crucial role in performing quantum operations required for tasks like quantum key distribution (QKD), entanglement generation, and quantum error correction. Quantum processors are essential for the execution of distributed quantum algorithms, enabling applications that rely on shared quantum resources.

The purpose of a quantum internet is not to replace classical communication but to complement it. A quantum internet would enable applications that are impossible to achieve with classical networks alone, offering enhanced security and efficiency for specific types of data transmission and computational tasks. The integration of quantum and classical networks allows for hybrid systems where quantum communication protocols, such as QKD, secure classical channels or provide computational advantages. [4]

The development of a quantum internet holds promise for a range of applications, including:

- **Secure Communication:** Quantum networks enable ultra-secure communication methods resistant to eavesdropping, as the principles of quantum mechanics prevent undetected interception.
- **Distributed Quantum Computing:** A quantum internet would allow remote access to quantum computers, enabling distributed quantum computing where complex computations can be performed across multiple quantum processors.
- **Enhanced Computational Protocols:** Quantum entanglement and superposition in a quantum internet enable computational protocols, such as quantum teleportation and entanglement swapping, for efficient communication and resource sharing.

In summary, a quantum internet would represent a paradigm shift in secure communication and computational power, enabling breakthroughs in fields that require advanced information security, distributed quantum computing, and new computational techniques. By combining quantum and classical systems, the quantum internet would open new frontiers in secure and efficient global communication.

6 Introduction to Quantum Walks

Quantum walks are a powerful algorithmic tool in quantum computing. They have proven to be universal for quantum computing [8] and have provided quantum speed-ups in a myriad of applications. Despite all their generality and properties, quantum walks are simple. In particular, discrete-time coined quantum walks are described by the product of two operators, known as the coin and shift operators, which are sufficient to implement arbitrary quantum algorithms.

They are the quantum analog of classical random walks but, unlike them, which are probabilistic and rely on flipping a coin to determine the next position, quantum walks are inherently different due to the principles of quantum superposition and entanglement. This results in a richer, more complex behavior that can be useful in achieving quantum algorithms.

6.1 One Dimensional Discrete Time Random Walks

A one dimensional discrete time random walk is a simple yet powerful model that describes the path of a "walker" moving along a line. At each discrete time step, the walker makes a move to the left or right, depending on a random event, such as the outcome of a coin flip. This stochastic process is widely used in physics, economics, computer science, and many other fields to model systems that evolve over time under randomness.

In a one dimensional discrete time random walk, we define the following:

- Let X_t denote the position of the walker at time t .
- The initial position $X_0 = 0$ is usually set to the origin.
- At each time step t , the walker moves either one unit to the left or one unit to the right, based on a probabilistic rule.

The movement rule is simple:

- With probability $p = \frac{1}{2}$, the walker moves one step to the right, increasing its position by 1.
- With probability $q = \frac{1}{2}$, the walker moves one step to the left, decreasing its position by 1.

We can describe the position of the walker after t steps as:

$$X_t = X_0 + \sum_{i=1}^t S_i$$

where S_i represents the i -th step, with $S_i = +1$ for a step to the right and $S_i = -1$ for a step to the left. Since each step is independent and equally likely, S_i is a random variable with an expectation $E[S_i] = 0$ and variance $\text{Var}(S_i) = 1$.

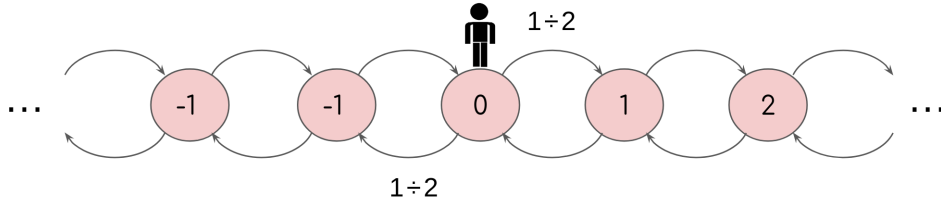


Figure 11: Illustration of a One Dimensional Discrete Time Random Walk with start position equal to zero.

Below is an example of a one dimensional discrete time random walk over five steps. Starting at $X_0 = 0$, suppose we flip a fair coin to determine each step:

- **Step 1:** The coin lands on heads, so the walker moves right. $X_1 = X_0 + 1 = 1$.
- **Step 2:** The coin lands on tails, so the walker moves left. $X_2 = X_1 - 1 = 0$.

- **Step 3:** The coin lands on heads, so the walker moves right. $X_3 = X_2 + 1 = 1$.
- **Step 4:** The coin lands on heads again, so the walker moves right. $X_4 = X_3 + 1 = 2$.
- **Step 5:** The coin lands on tails, so the walker moves left. $X_5 = X_4 - 1 = 1$.

After five steps, the walker's final position is $X_5 = 1$.

For a large number of steps, the probability distribution of the walker's position X_t tends to follow a normal (Gaussian) distribution centered around the initial position, with a variance that increases with time. Specifically, after t steps, the expected value of X_t is zero:

$$E[X_t] = 0$$

and the variance is given by:

$$\text{Var}(X_t) = t$$

Thus, the standard deviation of the position after t steps is $\sqrt{t}$. This implies that the probability of finding the walker at a specific position spreads out over time, following a bell curve centered at the origin.

The probability $P(X_t = k)$ that the walker is at position k after t steps can be calculated using the binomial distribution. Since each step has an equal chance of being to the left or right, we can express this probability as:

$$P(X_t = k) = \binom{t}{\frac{t+k}{2}} p^{\frac{t+k}{2}} q^{\frac{t-k}{2}}$$

where $\binom{t}{\frac{t+k}{2}}$ is the binomial coefficient, and $\frac{t+k}{2}$ and $\frac{t-k}{2}$ must be integers. This formula gives the exact probability distribution for the position of the walker at each step.

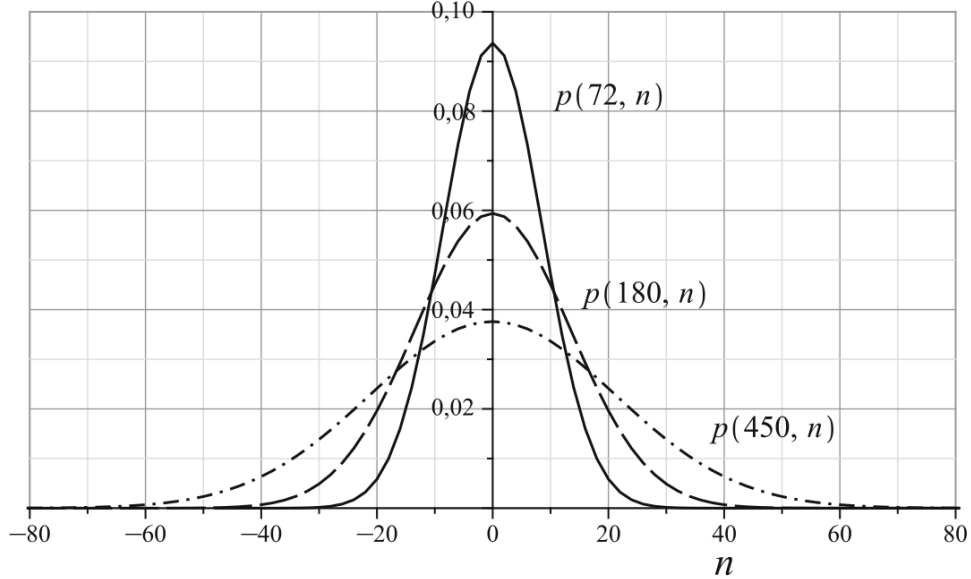


Figure 12: Probability Distribution of a One Dimensional Discrete Time Random Walk with start position equal to zero.[3]

For an easier understanding, consider a walker starting at position $X_0 = 0$ and taking four steps. The possible positions after four steps are $X_4 = -4, -2, 0, 2$, and 4 . The probabilities for each position can be calculated as follows:

- $P(X_4 = 4) = \binom{4}{4} \left(\frac{1}{2}\right)^4 = \frac{1}{16}$
- $P(X_4 = 2) = \binom{4}{3} \left(\frac{1}{2}\right)^4 = \frac{4}{16} = \frac{1}{4}$
- $P(X_4 = 0) = \binom{4}{2} \left(\frac{1}{2}\right)^4 = \frac{6}{16} = \frac{3}{8}$

- $P(X_4 = -2) = \binom{4}{1} \left(\frac{1}{2}\right)^4 = \frac{4}{16} = \frac{1}{4}$
- $P(X_4 = -4) = \binom{4}{0} \left(\frac{1}{2}\right)^4 = \frac{1}{16}$

These probabilities give us a discrete probability distribution for the position of the walker after four steps. For large t , this distribution approaches a normal distribution with mean 0 and variance t .

$t \backslash n$	-5	-4	-3	-2	-1	0	1	2	3	4	5
0						1					
1					$\frac{1}{2}$		$\frac{1}{2}$				
2				$\frac{1}{4}$		$\frac{1}{2}$		$\frac{1}{4}$			
3			$\frac{1}{8}$		$\frac{3}{8}$		$\frac{3}{8}$		$\frac{1}{8}$		
4		$\frac{1}{16}$		$\frac{1}{4}$		$\frac{3}{8}$		$\frac{1}{4}$		$\frac{1}{16}$	
5	$\frac{1}{32}$		$\frac{5}{32}$		$\frac{5}{16}$		$\frac{5}{16}$		$\frac{5}{32}$		$\frac{1}{32}$

Figure 13: Intuition on the Probability Distribution of a One Dimensional Discrete Time Random Walk with start position equal to zero.[3]

6.2 Quantum Walks

Quantum walks exist in both discrete-time and continuous-time variants. Here, we focus on the discrete-time quantum walk, starting with the one-dimensional case and then extending to multi-dimensional quantum walks.

In a one-dimensional quantum walk, a "walker", represented by a quantum state, moves along a line of discrete positions based on a quantum "coin" flip. This quantum coin introduces a superposition of states, allowing the walker quantum state to represent multiple positions simultaneously, unlike in a classical random walk.

The state of the walker in a one-dimensional quantum walk consists of:

- Position state $|x\rangle$: Represents the position of the walker along the line, where x is an integer.
- Coin state $|c\rangle$: Represents the direction of the walk, with $|0\rangle$ indicating a move to the left and $|1\rangle$ indicating a move to the right.

The combined state of the walker at a given time t is represented as a superposition of coin and position states:

$$|\psi(t)\rangle = \sum_x (\alpha_x(t) |0\rangle \otimes |x\rangle + \beta_x(t) |1\rangle \otimes |x\rangle)$$

where $\alpha_x(t)$ and $\beta_x(t)$ are complex amplitudes associated with each position and coin state.

On the evolution of a quantum walk, two main operators govern the evolution of the quantum walk:

- Coin Operator (C): The coin operator acts on the coin state, creating a superposition of directions. A common choice for this operator is the Hadamard operator H :

$$H = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix}$$

When applied to the coin state, H creates an equal superposition of moving left and right.

- Shift Operator (S): The shift operator acts on both the coin and position states, moving the walker to the left or right based on the coin state. The shift operator S is defined as:

$$S(|0\rangle \otimes |x\rangle) = |0\rangle \otimes |x-1\rangle, \quad S(|1\rangle \otimes |x\rangle) = |1\rangle \otimes |x+1\rangle$$

This means that a $|0\rangle$ on the coin space indicates that the "walker" should move decrease his position. Similarly, a $|1\rangle$ on the coin space makes the "walker" position increase by one after a shift operation. Because of that, we can think that each combined quantum state (coin and position) represents an arc on a directed graph where the nodes are the possible positions and the arcs represent the allowed directions. Figure 14 shows that idea.

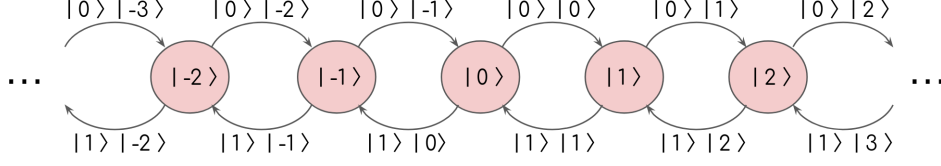


Figure 14: One dimensional discrete time quantum walk representation.

The evolution of the quantum walk over one time step is given by:

$$|\psi(t+1)\rangle = S \cdot (C \otimes I) |\psi(t)\rangle$$

where I is the identity operator on the position space. The identity operator is the one which does not change the state.

Consider an example of a one dimensional discrete time quantum walk where the walker starts at position $x = 0$ with the initial state:

$$|\psi(0)\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) \otimes |0\rangle$$

After applying the Hadamard coin operator and the shift operator for a single time step, the state evolves as:

$$|\psi(1)\rangle = \frac{1}{2} (|0\rangle \otimes |-1\rangle + |1\rangle \otimes |1\rangle)$$

At $t = 2$, another application of the coin and shift operators results in a superposition state with the walker having non-zero amplitudes at multiple positions, illustrating the parallel nature of quantum walks.

To determine the position of the walker in a quantum walk, we rely on the quantum mechanical principle of measurement. The quantum state of the walker after $t = 2$ time steps is a superposition of multiple position states, each with a complex amplitude. These amplitudes encode the probabilities of finding the walker at a specific position when measured.

As stated before, after t steps, the quantum state of the walker is represented as:

$$|\psi(t)\rangle = \sum_x (\alpha_x(t) |0\rangle \otimes |x\rangle + \beta_x(t) |1\rangle \otimes |x\rangle)$$

- $|x\rangle$ represents the position of the walker.
- $\alpha_x(t)$ and $\beta_x(t)$ are the complex amplitudes corresponding to the two coin states $|0\rangle$ (move left) and $|1\rangle$ (move right) at position x .

To find the walker's position, we measure the state $|\psi(t)\rangle$. The probability $P(x)$ of finding the walker at position x is given by the sum of the squared magnitudes of the amplitudes associated with both coin states at that position:

$$P(x) = |\alpha_x(t)|^2 + |\beta_x(t)|^2$$

This ensures that the probability of finding the walker at any position is determined by the total amplitude contribution from both possible directions.

For instance, if the state of the walker at $t = 2$ is:

$$|\psi(2)\rangle = \frac{1}{2} |0\rangle \otimes |-2\rangle + \frac{\sqrt{2}}{4} |0\rangle \otimes |0\rangle + \frac{\sqrt{2}}{4} |1\rangle \otimes |0\rangle + \frac{1}{2} |1\rangle \otimes |2\rangle$$

then the probabilities of finding the walker at each position are:

$$P(-2) = \left| \frac{1}{2} \right|^2 = \frac{1}{4}, \quad P(0) = \left| \frac{\sqrt{2}}{4} \right|^2 + \left| \frac{\sqrt{2}}{4} \right|^2 = \frac{1}{8} + \frac{1}{8} = \frac{1}{4}, \quad P(2) = \left| \frac{1}{2} \right|^2 = \frac{1}{4}$$

The sum of probabilities over all positions equals 1, ensuring consistency with the probabilistic interpretation of quantum mechanics.

When the quantum state is measured, the walker collapses to a specific position x with a probability $P(x)$. This collapse is non-deterministic, meaning the exact position cannot be predicted beforehand, but the probabilities reflect the likelihood of each outcome. The interference effects inherent in quantum walks lead to a probability distribution that is typically more spread out and skewed compared to classical random walks, enabling faster exploration of the state space. We usually say that it has a ballistic behavior as the probability of encountering the walker further from the initial position is higher than the probability to find it closer to the initial position.

This measurement process highlights the probabilistic and non-deterministic nature of quantum mechanics, which is central to understanding and utilizing quantum walks in algorithms and simulations.

$t \backslash n$	-5	-4	-3	-2	-1	0	1	2	3	4	5
0						1					
1					$\frac{1}{2}$		$\frac{1}{2}$				
2				$\frac{1}{4}$		$\frac{1}{2}$		$\frac{1}{4}$			
3			$\frac{1}{8}$		$\frac{1}{8}$		$\frac{5}{8}$		$\frac{1}{8}$		
4		$\frac{1}{16}$		$\frac{1}{8}$		$\frac{1}{8}$		$\frac{5}{8}$		$\frac{1}{16}$	
5	$\frac{1}{32}$		$\frac{5}{32}$		$\frac{1}{8}$		$\frac{1}{8}$		$\frac{17}{32}$		$\frac{1}{32}$

Figure 15: Initial steps of a one-dimensional quantum walk using hadamard coin and initial position $|0\rangle \otimes |0\rangle$. [3]

Moving to multi-dimensional quantum walks, the walker moves in a space with multiple dimensions (e.g., a two-dimensional grid). Each dimension has its own coin state, allowing the walker to explore more complex spaces. These walks are particularly useful in problems involving graphs and spatial structures, such as image processing and quantum search algorithms on networks.

For a two-dimensional quantum walk, the position state is given by $|x, y\rangle$, where x and y represent the coordinates on a grid. The coin state now has four possible outcomes, as it must determine movement in both the x - and y -directions. A typical choice is to use a 4-dimensional coin operator, such as:

$$C = \frac{1}{2} \begin{pmatrix} 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 \end{pmatrix}$$

The shift operator S acts based on the coin state, moving the walker along the grid. For example:

$$S(|0\rangle \otimes |x, y\rangle) = |0\rangle \otimes |x+1, y\rangle \quad (\text{right})$$

$$S(|1\rangle \otimes |x, y\rangle) = |1\rangle \otimes |x-1, y\rangle \quad (\text{left})$$

$$S(|2\rangle \otimes |x, y\rangle) = |2\rangle \otimes |x, y+1\rangle \quad (\text{up})$$

$$S(|3\rangle \otimes |x, y\rangle) = |3\rangle \otimes |x, y-1\rangle \quad (\text{down})$$

Consider a walker initially located at $(x, y) = (0, 0)$ with an equal superposition over the four possible coin states:

$$|\psi(0)\rangle = \frac{1}{2}(|0\rangle + |1\rangle + |2\rangle + |3\rangle) \otimes |0, 0\rangle$$

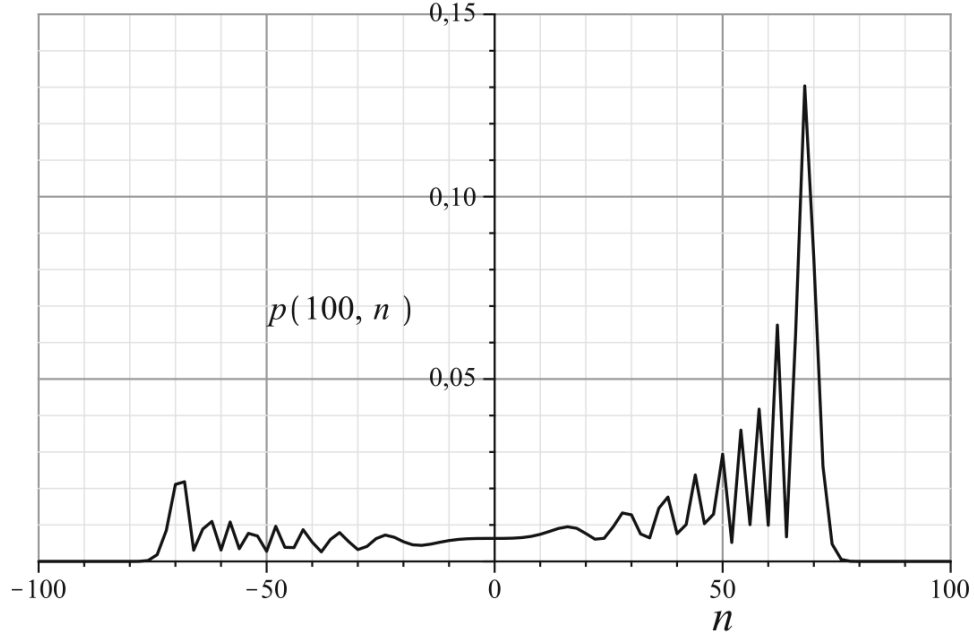


Figure 16: Probability distribution of a one-dimensional quantum walk using hadamard coin and initial position $|0\rangle \otimes |0\rangle$. [3]

After applying the coin and shift operators, the state at $t = 1$ evolves to:

$$|\psi(1)\rangle = \frac{1}{2} (|0\rangle \otimes |1, 0\rangle + |1\rangle \otimes |-1, 0\rangle + |2\rangle \otimes |0, 1\rangle + |3\rangle \otimes |0, -1\rangle)$$

After multiple steps, the walker's state becomes a complex superposition over various positions, and the resulting probability distribution shows multiple peaks due to interference effects, enabling efficient exploration of the grid.

In higher-dimensional quantum walks, the principles remain the same: each dimension has an associated coin state, and the shift operator moves the walker in each direction based on the coin state. These higher-dimensional walks are useful in applications such as quantum search algorithms on complex networks and in simulating quantum dynamics on large graphs.

To conclude, quantum walks have applications in various quantum algorithms and protocols. Some key examples include:

- **Search Algorithms:** Quantum walks enhance search processes in large datasets, as seen in Grover's Search algorithm.
- **Quantum Network Protocols:** Quantum walks enable information routing and entanglement distribution across quantum networks.
- **Graph Algorithms:** Quantum walks offer faster solutions to problems on graphs, such as graph traversal and element distinctness. [3]

7 Distributed Quantum Walk Control Plane for Quantum Networks

The primary outcome of this project is the research paper included at the end of this document. To provide a better understanding and context for the paper, I will introduce its main ideas here.

This project focuses on exploring quantum walks within the framework of quantum networks. Previous studies have demonstrated that quantum walks can be employed to control distributed quantum operations across network nodes, provided these nodes have access to ideal quantum gates and memories [7]. Our work builds upon this foundation by extending the initial formulation to include a more practical and physical implementation of the control plane [8].

What follows is an introduction to the protocol outlined in the paper, as well as an explanation of the contributions we made to complement the original formulation.

7.1 Quantum Walks Utility in this scenario

The protocol employs a quantum walk as a quantum control signal to execute distributed quantum operations. We generalize the discrete-time coined quantum walk model, which incorporates the interaction between a quantum walker system in the network graph with quantum registers inside the network nodes. The protocol abstracts hardware implementation and the transmission of quantum information through channels. The propagation of the walker system across the network represents the transmission of the control signal, while the application of coin operators integrates interactions between the control layer and the quantum registers. [7].

7.2 Mathematical Background

Consider a directed graph $G = (V, E)$ obtained from a non-directed graph by introducing two directed edges for each initial one. The sets $N^+(v) \subseteq V$ and $N^-(v) \subseteq V$ denote the sets of outward and inward neighbors of v , respectively.

A complex vector in a Hilbert space $Hw \subseteq Hv \otimes Hc$ evolves through a discrete-time coined quantum walk on graph G , defined by the graph structure. The vertex space Hv it is used to codify the vertices of the graph by assigning to each vertex a basis vector of Hv , which has dimension $|V|$. The coin space Hc denotes the degrees of freedom of the walker (possible movements for the walker) and has a dimension given by the maximum degree of the graph $D = \max d(v) : v \in V$. The basis for Hw is $|v, c\rangle : v \in V, c \in Cv$, where $Cv = 0, \dots, d(v) - 1$ is the integer set for the number of outward edges of a node v .

The basis for the spaces Hc and Hv are denoted as $|c\rangle$ and $|v\rangle$, respectively. Assuming $|\Psi(t)\rangle$ is the walker wavefunction at discrete time instant t , the evolution of the quantum walk is given by the action of two unitary operators $S : Hw \rightarrow Hw$ and $W : Hw \rightarrow Hw$ on the system state vector

$$|\Psi(t+1)\rangle = SW |\Psi(t)\rangle$$

[5]

7.3 Coin and Shift operators

The walker's degrees of freedom are affected by the coin operator (W). The general form of the coin operator is represented by:

$$W = \sum_{v \in V} |v\rangle \langle v| \otimes Wv$$

where Wv is a unitary operator. The coin operator mixes the amplitude of a particular state $|v, c\rangle$ with states $|v, c'\rangle$ such that $c, c' \in Cv$, which are the degrees of freedom of the same vertex. [6]

The shift operator, also known as the swap operator (S), is responsible for moving the mixed amplitudes generated by the coin operator W to outward edges. To define the operator, we introduce the function $\eta : V \times C \rightarrow V$, which maps outward edges to outward neighbors of each vertex. Thus, for a vertex v and an index c , $\eta(v, c)$ denotes the c -th outward neighbor of v , which we denote by u .

Additionally, we introduce $\sigma : V \times V \rightarrow C$, which maps an inward edge of a vertex to one of its outward edges.

The action of the shift operator is then formally defined as follows: for a state vector $|u, c\rangle$, the shift operator transforms it into $|\eta(u, c), \sigma(u, \eta(u, c))\rangle$. Note that η and σ can be defined arbitrarily as long as the operator remains unitary and respects the graph edges. In fact, different choices of η and σ can lead to different dynamics of state amplitudes. [6]

7.4 Paper

Back to our work, the research goal was defined as implementing the quantum walk protocol described on [7]. By implementation, we mean a go from the logical approach to a more physical approach, including encoding considering the actual physical qubits and showing how we would perform the operations considering the non-locality. Also, there is a presentation about the quantum walk control plane implementation <https://intercity.org/quantum-internet/>.

The paper explores two different implementations of the quantum walk control plane for quantum networks: the linear approach and the logarithmic approach. Both methods are analyzed for their encoding schemes, operational characteristics, and trade-offs in resource usage.

7.5 Linear Approach

The linear approach leverages a straightforward encoding strategy, associating each edge in the network graph with a single qubit. This approach prioritizes simplicity in qubit representation and make the operations easier.

In the linear approach:

- Each edge (u, v) in the directed graph is encoded using one qubit.
- If the qubit associated with an edge (u, v) is in the state $|1\rangle$, it indicates that the quantum walker is on that edge.
- The total number of encoding qubits required is proportional to $O(|V| \cdot d_{\max})$, where $|V|$ is the number of vertices and $d_{\max}$ is the maximum degree of the graph.

The linear approach employs:

- Local Coin Operator: Operates within a single node to mix the amplitudes associated with the outgoing edges.
- Non-Local Shift Operator: Performs the movement of the walker across edges. This is implemented using gate teleportation, which requires two EPR pairs per edge to perform a swap operation remotely. The circuit used to do the shift operation is on <https://algassert.com/post/1717> and it is optimal [1].

The linear approach offers simple and intuitive encoding, making it easier to implement and understand. Additionally, it requires fewer EPR pairs for operations compared to the logarithmic approach, which can simplify the resource requirements in certain scenarios.

Despite its simplicity, the linear approach has a high qubit overhead for encoding, as each edge in the graph requires a dedicated qubit. This makes the approach less efficient when the number of edges grow significantly, leading to scalability issues.

7.6 Logarithmic Approach

The logarithmic approach offers a more compact encoding by reducing the number of qubits required per node. This is achieved by leveraging a logarithmic representation of the graph's degrees.

In the logarithmic approach:

- Each node uses $\lceil \log_2(d(v) + 1) \rceil$ qubits, where $d(v)$ is the degree of the vertex v .
- The encoding of an edge (u, v) is the same as the encoding of (v, u) , enabling bidirectional representation.

- The total number of encoding qubits required is proportional to $O(|V| \cdot \log_2(d_{\max}))$.

The logarithmic approach utilizes:

- Local Coin Operator: Similar to the linear approach, operates within the node to mix amplitudes.
- Non-Local Shift Operator: A more complex implementation than in the linear approach, involving complex unitary transformations. In the worst case, teleportation techniques can be used to perform the shift operation.

The logarithmic approach significantly reduces the number of encoding qubits. It provides an efficient representation of graph degrees, which optimizes the use of quantum resources.

However, this approach requires more complex operations for the shift, often involving additional EPR pairs. Moreover, it introduces higher implementation complexity for non-local operations, which can pose challenges during practical deployment.

7.7 Comparison of Approaches

The linear and logarithmic approaches represent two different strategies for implementing the quantum walk control plane. The linear approach is straightforward but requires more qubits, while the logarithmic approach is more efficient in encoding qubit usage but introduces operational complexities.

Modeling details	Linear	Logarithmic
required encoding qubits	$O(V d_{\max})$	$O(V \lg(d_{\max}))$
coin operation	trivial	trivial
shift operation	remote swap	selected swap/non trivial
encoding qubits per shift	one	$\lg(d_{\max})$
operation qubits per shift	two	$O(\lg(d_{\max}))^*$
one node shift	parallel	sequential or parallel(time is negligible)

Table 1: Comparison of Linear and Logarithmic Approaches.

7.8 Trade-Off Between Qubits, Time, and Circuits

Both the linear and logarithmic approaches support parallel shifts when EPR pairs are available, with the time to execute shifts being negligible. However, the logarithmic approach requires more EPR pairs per shift, likely proportional to the number of qubits used in the encoding. The total number of EPR pairs needed for a global shift depends on the number of edges and the resources required per shift. In the linear approach, two EPR pairs are needed per shift, whereas in the logarithmic approach, the exact number is not known but is expected to scale logarithmically.

Performing parallel shifts demands more qubits for simultaneous EPR pairs, while sequential shifts introduce time delays as operations must wait for an operation to end to start attempting to establish the others EPR pairs.

In more details, each edge requires a shift operation, creating a trade-off between the number of Bell pairs and the time needed. Performing all shifts simultaneously requires $O(E \cdot b(e))$ EPR pairs, where $b(e)$ is the number of Bell pairs needed per shift. Reducing qubit usage necessitates sequential shifts, increasing time due to repeated Bell pair establishment. For example, in a 2D lattice, the minimum shift qubits per node equals $b(e)$, and $O(n)$ rounds of shifts are required for an $n \times n$ lattice.

Given that, we divided the system into two groups: encoding qubits and operation qubits (EPR pairs). Three configurations can be analyzed:

1. Linear encoding with parallel shifts.
2. Logarithmic encoding with sequential shifts.
3. Logarithmic encoding with parallel shifts.

These configurations illustrate the trade-offs between resource usage and operational efficiency, guiding the choice of approach based on network size and constraints.

8 Future Possibilities

References

- [1] Daniel Collins, Noah Linden, and Sandu Popescu. “Nonlocal content of quantum operations”. In: *Phys. Rev. A* (Aug. 2001).
- [2] C. I. Nielsen Michael A. *Quantum computation and quantum information: 10th Anniversary Edition*. New York: Cambridge University Press, 2010.
- [3] R Portugal. *Quantum Walks, and Search Algorithms*. Switzerland: Springer Nature, 2018.
- [4] Wehner Stephanie, Elkouss David, and Hanson Ronald. “Quantum internet: A vision for the road ahead”. In: *Science* 362.6412 (2018).
- [5] Matheus Guedes de Andrade. “Characterizing the inherent relationship between unitary quantum walks and non-homogeneous random walks on finite graphs”. In: *Rio de Janeiro:UFRJ/COPPE* (2020).
- [6] F. de Lima Marquezino M.G. de Andrade and D.R. Figueiredo. “On the equivalence between quantum and random walks on finite graphs in Quantum Information Processing”. In: (2020).
- [7] Matheus Guedes de Andrade et al. “A quantum walk control plane for distributed quantum computing in quantum networks”. In: *IEEE International Conference on Quantum Computing and Engineering (QCE)* (2021).
- [8] Matheus Guedes de Andrade et al. “Universal Quantum Walk Control Plane for Quantum Networks”. In: *arXiv preprint arXiv:2307.06492* (2023).