subquery

Description | Accepted × | Editorial | Solutions | Submissions

All Submissions

Accepted 15 / 15 testcases passed

Bhagyesh12396 submitted at Mar 18, 2026 20:01

Solution

Runtime

642 ms | Beats 26.39%

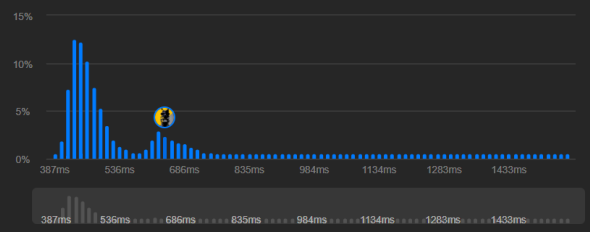

Code | MySQL

```
# Write your MySQL query statement below
SELECT
    p.product_id,
    COALESCE(pr.new_price, 10) AS price
FROM
    (SELECT DISTINCT product_id FROM Products) p
```

Code | Code Sample ×

Runtime: 1567ms

Sql

```
# Write your MySQL query statement below
Select DISTINCT product_id,
IFNULL(
    (Select p2.new_price from Products as p2
    WHERE p1.product_id=p2.product_id
    AND p2.change_date<="2019-08-16"
    ORDER BY p2.change_date DESC
    LIMIT 1)
    ,10) price
FROM Products as p1
```

Testcase | Test Result

You must run your code first

Description | Editorial | Solutions | Submissions

183. Customers Who Never Order

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Customers`

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| id          | int     |
| name        | varchar |
+-------------+---------+
id is the primary key (column with unique values) for this table.
Each row of this table indicates the ID and name of a customer.
```

Table: `Orders`

```
+-------------+------+
| Column Name | Type |
+-------------+------+
| id          | int  |
| customerId  | int  |
+-------------+------+
id is the primary key (column with unique values) for this table.
customerId is a foreign key (reference columns) of the ID from the Customers table.
Each row of this table indicates the ID of an order and the ID of the customer who
```

Code

MySQL | Auto

```
# Write your MySQL query statement below
SELECT name AS Customers
FROM Customers
WHERE id NOT IN (
    SELECT customerId FROM Orders
);
```

Ln 6, Col 3 | Saved

Run | Submit

Testcase | Test Result

You must run your code first

subquery

Expand Panel Ctrl] | Solutions | Submissions

607. Sales Person

Solved

Easy | Topics | Companies | Hint

SQL Schema > Pandas Schema >

Table: SalesPerson

Column Name	Type
sales_id	int
name	varchar
salary	int
commission_rate	int
hire_date	date

sales_id is the primary key (column with unique values) for this table.
Each row of this table indicates the name and the ID of a salesperson alongside their salary, commission rate, and hire date.

Table: Company

Column Name	Type
com_id	int

Code

MySQL | Auto

```mysql
SELECT name
FROM SalesPerson
WHERE sales_id NOT IN (
    SELECT o.sales_id
    FROM Orders o
    JOIN Company c
    ON o.com_id = c.com_id
    WHERE c.name = 'RED'
);
```

Ln 10, Col 3 | Saved | Run | Sub

Accepted

All Submissions

Runtime

1584 ms | Beats 17.49%

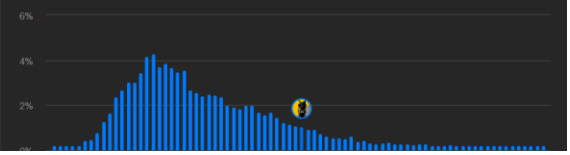

Description | Editorial | Solutions | Submissions

197. Rising Temperature

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: Weather

Column Name	Type
id	int
recordDate	date
temperature	int

id is the column with unique values for this table.
There are no different rows with the same recordDate.
This table contains information about the temperature on a certain day.

Write a solution to find all dates' id with higher temperatures compared to its previous dates (yesterday).

Return the result table in **any order**.

The result format is in the following example.

Example 1:

Code

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT w1.id
FROM Weather w1
JOIN Weather w2
ON DATEDIFF(w1.recordDate, w2.recordDate) = 1
WHERE w1.temperature > w2.temperature;
```

Ln 1, Col 1 | Saved | Run | Submit

Accepted

All Submissions

Accepted 15 / 15 testcases passed

Bhagyesh12396 submitted at Mar 18, 2026 21:22

Solution

Runtime

1088 ms | Beats 5.01%

180. Consecutive Numbers

Solved

Medium | Topics | Companies

SQL Schema > Pandas Schema >

Table: Logs

Column Name	Type
id	int
num	varchar

In SQL, id is the primary key for this table.
id is an autoincrement column starting from 1.

Find all numbers that appear at least three times consecutively.

Return the result table in **any order**.

The result format is in the following example.

Example 1:

Input:

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT DISTINCT l1.num AS ConsecutiveNums
FROM Logs l1
JOIN Logs l2 ON l1.id = l2.id - 1
JOIN Logs l3 ON l1.id = l3.id - 2
WHERE l1.num = l2.num
AND l2.num = l3.num;
```

Ln 7, Col 21 | Saved | Run | Submit

Accepted

All Submissions

Accepted 23 / 23 testcases passed

Bhagyesh12396 submitted at Mar 18, 2026 21:23

Solution

Runtime

545 ms | Beats 48.59%



subquery

Description | Editorial | Solutions | Submissions

175. Combine Two Tables

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Person`

Column Name	Type
personId	int
lastName	varchar
firstName	varchar

personId is the primary key (column with unique values) for this table.
This table contains information about the ID of some persons and their first and last names.

Table: `Address`

Column Name	Type
addressId	int
personId	int
city	varchar
state	varchar

Code

MySQL | Auto

```mysql
SELECT p.firstName, p.lastName, a.city, a.state
FROM Person p
LEFT JOIN Address a
ON p.personId = a.personId;
```

Ln 4, Col 28 | Saved

Run | Submit

Accepted

All Submissions

Accepted 8 / 8 testcases passed

Bhagyesh12396 submitted at Mar 18, 2026 21:25

Solution

Runtime

418 ms | Beats 32.67%

10%

178. Rank Scores

Solved

Medium | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Scores`

Column Name	Type
id	int
score	decimal

id is the primary key (column with unique values) for this table.
Each row of this table contains the score of a game. Score is a floating point value with two decimal places.

Write a solution to find the rank of the scores. The ranking should be calculated according to the following rules:

- The scores should be ranked from the highest to the lowest.
- If there is a tie between two scores, both should have the same ranking.
- After a tie, the next ranking number should be the next consecutive integer value. In other words, there should be no holes between ranks.

Return the result table ordered by `score` in descending order.

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT score,
DENSE_RANK() OVER (ORDER BY score DESC) AS `rank`
FROM Scores;
```

Ln 4, Col 13 | Saved

Run | Submit

Accepted

All Submissions

Accepted 11 / 11 testcases passed

Bhagyesh12396 submitted at Mar 18, 2026 21:27

Solution

Runtime

294 ms | Beats 67.98%

15%

196. Delete Duplicate Emails

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Person`

Column Name	Type
id	int
email	varchar

id is the primary key (column with unique values) for this table.
Each row of this table contains an email. The emails will not contain uppercase letters.

Write a solution to **delete** all duplicate emails, keeping only one unique email with the smallest `id`.

For SQL users, please note that you are supposed to write a `DELETE` statement and not a `SELECT` one.

For Pandas users, please note that you are supposed to modify `Person` in place.

After running your script, the answer shown is the `Person` table. The driver will first compile and run your piece of code and then show the `Person` table. The final order of the `Person` table **does not matter**.

The result format is in the following example.

MySQL | Auto

```mysql
# Write your MySQL query statement below
DELETE p1
FROM Person p1
JOIN Person p2
ON p1.email = p2.email
AND p1.id > p2.id;
```

Ln 6, Col 19 | Saved

Run | Submit

Accepted

All Submissions

Accepted 22 / 22 testcases passed

Bhagyesh12396 submitted at Mar 18, 2026 21:29

Solution

Runtime

996 ms | Beats 12.40%

8%

6%

subquery

Description | Editorial | Solutions | Submissions

176. Second Highest Salary

Solved

Medium | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Employee`

```
+-------------+------+
| Column Name | Type |
+-------------+------+
| id          | int  |
| salary      | int  |
+-------------+------+
id is the primary key (column with unique values) for this table.
Each row of this table contains information about the salary of an employee.
```

Write a solution to find the second highest **distinct** salary from the `Employee` table. If there is no second highest salary, return `null (return None in Pandas)`.

The result format is in the following example.

Example 1:

Input:
Employee table:

Code

MySQL | Auto

```sql
# Write your MySQL query statement below
SELECT (
    SELECT DISTINCT salary
    FROM Employee
    ORDER BY salary DESC
    LIMIT 1 OFFSET 1
) AS SecondHighestSalary;
```

Ln 7, Col 26 | Saved

Run | Submit

Accepted

All Submissions

Accepted 10 / 10 testcases passed

Bhagyesh12396 submitted at Mar 18, 2026 21:31

Solution

Runtime

268 ms | Beats 52.04%

15%