

---

# **LittlevGL Documentation**

*Release 7.0.0*

**Gabor Kiss-Vamosi**

**Apr 19, 2020**

# CONTENTS

<b>1</b>	<b>Key features</b>	<b>2</b>
<b>2</b>	<b>Requirements</b>	<b>3</b>
<b>3</b>	<b>FAQ</b>	<b>4</b>
3.1	Where to get started? . . . . .	4
3.2	Where can I ask questions? . . . . .	4
3.3	Is my MCU/hardware supported? . . . . .	4
3.4	Is my display supported? . . . . .	5
3.5	Is LittlevGL free? How can I use it in a commercial product? . . . . .	5
3.6	Nothing happens, my display driver is not called. What have I missed? . . . . .	5
3.7	Why the display driver is called only one? Only the upper part of the display is refreshed. . . . .	5
3.8	Why I see only garbage on the screen? . . . . .	5
3.9	Why I see non-sense colors on the screen? . . . . .	6
3.10	How to speed up my UI? . . . . .	6
3.11	How to reduce flash/ROM usage? . . . . .	6
3.12	How to reduce the RAM usage . . . . .	7
3.13	How to work with an operating system? . . . . .	7
3.14	How to contribute to LittlevGL? . . . . .	7
3.15	How is LittlevGL versioned? . . . . .	7
3.16	Where can I find the documentation of the previous version (v5.3)? . . . . .	7

English (en) - 中文 (zh-CN) - Français (fr) - Magyar (hu) - Türk (tr)

PDF version: [LittlevGL.pdf](#)



LittlevGL is a free and open-source graphics library providing everything you need to create embedded GUI with easy-to-use graphical elements, beautiful visual effects and low memory footprint.

[Website](#) • [GitHub](#) • [Forum](#) • [Live demo](#) • [Simulator](#) • [Blog](#)

## **KEY FEATURES**

- Powerful building blocks such as buttons, charts, lists, sliders, images etc.
- Advanced graphics with animations, anti-aliasing, opacity, smooth scrolling
- Various input devices such as touchpad, mouse, keyboard, encoder etc.
- Multi-language support with UTF-8 encoding
- Multi-display support, i.e. use more TFT, monochrome displays simultaneously
- Fully customizable graphic elements
- Hardware independent to use with any microcontroller or display
- Scalable to operate with little memory (64 kB Flash, 16 kB RAM)
- OS, External memory and GPU supported but not required
- Single frame buffer operation even with advanced graphical effects
- Written in C for maximal compatibility (C++ compatible)
- Simulator to start embedded GUI design on a PC without embedded hardware
- Tutorials, examples, themes for rapid GUI design
- Documentation is available as online and offline
- Free and open-source under MIT license

## REQUIREMENTS

- 16, 32 or 64 bit microcontroller or processor
- Greater than 16 MHz clock speed is recommended
- Flash/ROM: Greater than 64 kB size for the very essential components (greater than 180 kB is recommended)
- RAM:
  - Static RAM usage: approximately 8 to 16 kB depending on the used features and objects types
  - Stack: greater than 2kB (greater than 4 kB is recommended)
  - Dynamic data (heap): greater than 4 KB (greater than 16 kB is recommended if using several objects). Set by `LV_MEM_SIZE` in `lv_conf.h`
  - Display buffer: greater than “*Horizontal resolution*” pixels (greater than  $10 \times$  “*Horizontal resolution*” is recommended)
- C99 or newer compiler
- Basic C (or C++) knowledge: [pointers](#), [structs](#), [callbacks](#)

*Note that the memory usage might vary depending on the architecture, compiler and build options.*

### 3.1 Where to get started?

- For a general overview of LittlevGL visit [littlevgl.com](http://littlevgl.com)
- Go to the *Get started* section to try Live demos in you browser, learn about the Simulator(s) and learn the basics of LittlevGL
- A detailed porting guide can be found in the *Porting* section
- To learn how LittlevGL works go to the *Overview*
- To read tutorials or share your own experiences go to the *Blog*
- To see the source code of the library check it on GitHub: <https://github.com/littlevgl/lvgl/>

### 3.2 Where can I ask questions?

To ask questions in the Forum: <https://forum.littlevgl.com/>.

We use [GitHub issues](#) for development related discussion. So you should use them only if your question or issue is tightly related to the development of the library.

### 3.3 Is my MCU/hardware supported?

Every MCU which is capable of driving a display via Parallel port, SPI, RGB interface or anything else and fulfills the *Requirements* is supported by LittlevGL.

It includes:

- “Common” MCUs like STM32F, STM32H, NXP Kinetis, LPC, iMX, dsPIC33, PIC32 etc.
- Bluetooth, GSM, WiFi modules like Nordic NRF and Espressif ESP32
- Linux frame buffer like /dev/fb0 which includes Single board computers too like Raspberry Pi
- And anything else with a strong enough MCU and a periphery to drive a display

## 3.4 Is my display supported?

LittlevGL needs just one simple driver to copy an array of pixels into a given area of the display. If you can do this with your display then you can use the same display with LittlevGL.

It includes:

- TFTs with 16 or 24 bit color depth
- Monitors with HDMI port
- Small monochrome displays
- Gray-scale displays
- LED matrices
- or any other display where you can control the color/state of the pixels

See the *Porting* section to learn more.

## 3.5 Is LittlevGL free? How can I use it in a commercial product?

LittlevGL comes with [MIT license](#) which means you can download and use it for any purpose you want without any obligations.

## 3.6 Nothing happens, my display driver is not called. What have I missed?

Be sure you are calling `lv_tick_inc(x)` in an interrupt and `lv_task_handler()` in your main `while(1)`.

Learn more in the *Tick* and *Task handler* section.

## 3.7 Why the display driver is called only one? Only the upper part of the display is refreshed.

Be sure you are calling `lv_disp_flush_ready(drv)` at the end of your “*display flush callback*” .

## 3.8 Why I see only garbage on the screen?

Probably there a bug in your display driver. Try the following code without using LittlevGL:

```
#define BUF_W 20
#define BUF_H 10
lv_color_t buf[BUF_W * BUF_H];
lv_color_t * buf_p = buf;
uint16_t x, y;
for(y = 0; y < BUF_H; y++) {
    lv_color_t c = lv_color_mix(LV_COLOR_BLUE, LV_COLOR_RED, (y * 255) / BUF_H);
```

(continues on next page)

(continued from previous page)

```

    for(x = 0; x < BUF_W; x++){
        (*buf_p) = c;
        buf_p++;
    }
}

lv_area_t a;
a.x1 = 10;
a.y1 = 40;
a.x2 = a.x1 + BUF_W - 1;
a.y2 = a.y1 + BUF_H - 1;
my_flush_cb(NULL, &a, buf);

```

### 3.9 Why I see non-sense colors on the screen?

Probably LittlevGL's color format is not compatible with your displays color format. Check `LV_COLOR_DEPTH` in `lv_conf.h`.

If you are using 16 bit colors with SPI (or other byte-oriented) interface probably you need to set `LV_COLOR_16_SWAP 1` in `lv_conf.h`. It swaps the upper and lower bytes of the pixels.

### 3.10 How to speed up my UI?

- Turn on compiler optimization
- Increase the size of the display buffer
- Use 2 display buffers and flush the buffer with DMA (or similar periphery) in the background
- Increase the clock speed of the SPI or Parallel port if you use them to drive the display
- If you display has SPI port consider changing to a model with parallel because it has much higher throughput
- Keep the display buffer in the internal RAM (not in external SRAM) because LittlevGL uses it a lot and it should have a small access time

### 3.11 How to reduce flash/ROM usage?

You can disable all the unused feature (such as animations, file system, GPU etc.) and object types in `lv_conf.h`.

If you are using GCC you can add

- `-fdata-sections -ffunction-sections` compiler flags
- `--gc-sections` linker flag

to remove unused functions and variables.



## 3.12 How to reduce the RAM usage

- Lower the size of the *Display buffer*
- Reduce `LV_MEM_SIZE` in *lv\_conf.h*. This memory used when you create objects like buttons, labels, etc.
- To work with lower `LV_MEM_SIZE` you can create the objects only when required and deleted them when they are not required anymore

## 3.13 How to work with an operating system?

To work with an operating system where tasks can interrupt each other you should protect LittlevGL related function calls with a mutex. See the *Operating system and interrupts* section to learn more.

## 3.14 How to contribute to LittlevGL?

There are several ways to contribute to LittlevGL:

- Write a few lines about your project to inspire others
- Answer other' s questions
- Report and/or fix bugs
- Suggest and/or implement new features
- Improve and/or translate the documentation
- Write a blog post about your experiences

To learn more see [Contributing guide](#)

## 3.15 How is LittlevGL versioned?

LittlevGL follows the rules of [Semantic versioning](#):

- *Major* versions for incompatible API changes. E.g. v5.0.0, v6.0.0
- *Minor* version for new but backwards-compatible functionalities. E.g. v6.1.0, v6.2.0
- *Patch* version for backwards-compatible bug fixes. E.g. v6.1.1, v6.1.2

The new versions are developed in **dev-X.Y** branches on GitHub. It can be cloned to test the newset features, however, still anything can be changed there.

The bugfixes are added directly to the **master** branch on GitHub and a bugfix release is created every month.

## 3.16 Where can I find the documentation of the previous version (v5.3)?

You can download it here and open offline:

`Docs-v5-3.zip`

### 3.16.1 Get started

#### Live demos

You can see how LittlevGL looks like without installing and downloading anything either on target platform or on the host machine. There are some ready made user interfaces which you can easily try in your browser.

Go to the [Live demo](#) page and choose a demo you are interested in.

#### Simulator on PC

You can try out the LittlevGL **using only your PC** (i.e. without any development boards). The LittlevGL will run on a simulator environment on the PC where anyone can write and experiment the real LittlevGL applications.

Simulator on the PC have the following advantages:

- Hardware independent - Write a code, run it on the PC and see the result on the PC monitor.
- Cross-platform - Any Windows, Linux or OSX PC can run the PC simulator.
- Portability - the written code is portable, which means you can simply copy it when using an embedded hardware.
- Easy Validation - The simulator is also very useful to report bugs because it means common platform for every user. So it' s a good idea to reproduce a bug in simulator and use the code snippet in the [Forum](#).

#### Select an IDE

The simulator is ported to various IDEs (Integrated Development Environments). Choose your favorite IDE, read its README on GitHub, download the project, and load it to the IDE.

You can use any IDEs for the development but, for simplicity, the configuration for Eclipse CDT is focused in this tutorial. The following section describes the set-up guide of Eclipse CDT in more details.

**Note: If you are on Windows, it' s usually better to use the Visual Studio or CodeBlocks projects instead. They work out of the box without requiring extra steps.**

#### Set-up Eclipse CDT

##### Install Eclipse CDT

Eclipse CDT is a C/C++ IDE.

Eclipse is a Java based software therefore be sure **Java Runtime Environment** is installed on your system.

On Debian-based distros (e.g. Ubuntu): `sudo apt-get install default-jre`

Note: If you are using other distros, then please refer and install 'Java Runtime Environment' suitable to your distro. Note: If you are using macOS and get a "Failed to create the Java Virtual Machine" error, uninstall any other Java JDK installs and install Java JDK 8u. This should fix the problem.

You can download Eclipse' s CDT from: <https://www.eclipse.org/cdt/downloads.php>. Start the installer and choose *Eclipse CDT* from the list.

## Install SDL 2

The PC simulator uses the [SDL 2](#) cross platform library to simulate a TFT display and a touch pad.

### Linux

On **Linux** you can easily install SDL2 using a terminal:

1. Find the current version of SDL2: `apt-cache search libsdl2` (e.g. `libsdl2-2.0-0`)
2. Install SDL2: `sudo apt-get install libsdl2-2.0-0` (replace with the found version)
3. Install SDL2 development package: `sudo apt-get install libsdl2-dev`
4. If build essentials are not installed yet: `sudo apt-get install build-essential`

### Windows

If you are using **Windows** firstly you need to install MinGW ([64 bit version](#)). After installing MinGW, do the following steps to add SDL2:

1. Download the development libraries of SDL. Go to <https://www.libsdl.org/download-2.0.php> and download *Development Libraries: SDL2-devel-2.0.5-mingw.tar.gz*
2. Decompress the file and go to `x86_64-w64-mingw32` directory (for 64 bit MinGW) or to `i686-w64-mingw32` (for 32 bit MinGW)
3. Copy `...mingw32/include/SDL2` folder to `C:/MinGW/.../x86_64-w64-mingw32/include`
4. Copy `...mingw32/lib/` content to `C:/MinGW/.../x86_64-w64-mingw32/lib`
5. Copy `...mingw32/bin/SDL2.dll` to `{eclipse_worksapce}/pc_simulator/Debug/`. Do it later when Eclipse is installed.

Note: If you are using **Microsoft Visual Studio** instead of Eclipse then you don't have to install MinGW.

### OSX

On **OSX** you can easily install SDL2 with brew: `brew install sdl2`

If something is not working, then please refer [this tutorial](#) to get started with SDL.

### Pre-configured project

A pre-configured graphics library project (based on the latest release) is always available to get started easily. You can find the latest one on [GitHub](#) or on the [Download](#) page. (Please note that, the project is configured for Eclipse CDT).

### Add the pre-configured project to Eclipse CDT

Run Eclipse CDT. It will show a dialogue about the **workspace path**. Before accepting the path, check that path and copy (and unzip) the downloaded pre-configured project there. After that, you can accept the workspace path. Of course you can modify this path but, in that case copy the project to the corresponding location.

Close the start up window and go to **File->Import** and choose **General->Existing project into Workspace**. **Browse the root directory** of the project and click **Finish**

On **Windows** you have to do two additional things:

- Copy the **SDL2.dll** into the project's Debug folder
- Right click on the project -> Project properties -> C/C++ Build -> Settings -> Libraries -> Add ... and add *mingw32* above SDLmain and SDL. (The order is important: mingw32, SDLmain, SDL)

## Compile and Run

Now you are ready to run the LittlevGL Graphics Library on your PC. Click on the Hammer Icon on the top menu bar to Build the project. If you have done everything right, then you will not get any errors. Note that on some systems additional steps might be required to “see” SDL 2 from Eclipse but, in most of cases the configurations in the downloaded project is enough.

After a success build, click on the Play button on the top menu bar to run the project. Now a window should appear in the middle of your screen.

Now everything is ready to use the LittlevGL Graphics Library in the practice or begin the development on your PC.

## Quick overview

Here you can learn the most important things about LittlevGL. You should read it first to get a general impression and read the detailed *Porting* and *Overview* sections after that.

## Add LittlevGL into your project

The following steps show how to setup LittlevGL on an embedded system with a display and a touchpad. You can use the *Simulators* to get ‘ready to use’ projects which can be run on your PC.

- [Download](#) or [Clone](#) the library
- Copy the `lvgl` folder into your project
- Copy `lvgl/lv_conf_template.h` as `lv_conf.h` next to the `lvgl` folder and set at least `LV_HOR_RES_MAX`, `LV_VER_RES_MAX` and `LV_COLOR_DEPTH` macros.
- Include `lvgl/lvgl.h` where you need to use LittlevGL related functions.
- Call `lv_tick_inc(x)` every `x` milliseconds **in a Timer or Task** (`x` should be between 1 and 10). It is required for the internal timing of LittlevGL.
- Call `lv_init()`
- Create a display buffer for LittlevGL

```
static lv_disp_buf_t disp_buf;
static lv_color_t buf[LV_HOR_RES_MAX * 10];           /*Declare a buffer
↳for 10 lines*/
lv_disp_buf_init(&disp_buf, buf, NULL, LV_HOR_RES_MAX * 10); /*Initialize the
↳display buffer*/
```

- Implement and register a function which can **copy a pixel array** to an area of your display:

```

lv_disp_drv_t disp_drv;           /*Descriptor of a display driver*/
lv_disp_drv_init(&disp_drv);      /*Basic initialization*/
disp_drv.flush_cb = my_disp_flush; /*Set your driver function*/
disp_drv.buffer = &disp_buf;      /*Assign the buffer to the display*/
lv_disp_drv_register(&disp_drv);   /*Finally register the driver*/

void my_disp_flush(lv_disp_t * disp, const lv_area_t * area, lv_color_t * color_p)
{
    int32_t x, y;
    for(y = area->y1; y <= area->y2; y++) {
        for(x = area->x1; x <= area->x2; x++) {
            set_pixel(x, y, *color_p); /* Put a pixel to the display.*/
            color_p++;
        }
    }

    lv_disp_flush_ready(disp);      /* Indicate you are ready with the flushing*/
}

```

- Implement and register a function which can **read an input device**. E.g. for a touch pad:

```

lv_indev_drv_t indev_drv;          /*Descriptor of a input device driver*/
lv_indev_drv_init(&indev_drv);     /*Basic initialization*/
indev_drv.type = LV_INDEV_TYPE_POINTER; /*Touch pad is a pointer-like device*/
indev_drv.read_cb = my_touchpad_read; /*Set your driver function*/
lv_indev_drv_register(&indev_drv);  /*Finally register the driver*/

bool my_touchpad_read(lv_indev_t * indev, lv_indev_data_t * data)
{
    static lv_coord_t last_x = 0;
    static lv_coord_t last_y = 0;

    /*Save the state and save the pressed coordinate*/
    data->state = touchpad_is_pressed() ? LV_INDEV_STATE_PR : LV_INDEV_STATE_REL;
    if(data->state == LV_INDEV_STATE_PR) touchpad_get_xy(&last_x, &last_y);

    /*Set the coordinates (if released use the last pressed coordinates)*/
    data->point.x = last_x;
    data->point.y = last_y;

    return false; /*Return `false` because we are not buffering and no more data to
    ↳ read*/
}

```

- Call `lv_task_handler()` periodically every few milliseconds in the main `while(1)` loop, in Timer interrupt or in an Operation system task. It will redraw the screen if required, handle input devices etc.

## Learn the basics

### Objects (Widgets)

The graphical elements like Buttons, Labels, Sliders, Charts etc are called objects in LittelvGL. Go to [Object types](#) to see the full list of available types.

Every object has a parent object. The child object moves with the parent and if you delete the parent the

children will be deleted too. Children can be visible only on their parent.

The *screen* is the “root” parent. To get the current screen call `lv_scr_act()`.

You can create a new object with `lv_<type>_create(parent, obj_to_copy)`. It will return an `lv_obj_t *` variable which should be used as a reference to the object to set its parameters. The first parameter is the desired *parent*, the second parameters can be an object to copy (NULL is unused). For example:

```
lv_obj_t * slider1 = lv_slider_create(lv_scr_act(), NULL);
```

To set some basic attribute `lv_obj_set_<paramters_name>(obj, <value>)` function can be used. For example:

```
lv_obj_set_x(btn1, 30);
lv_obj_set_y(btn1, 10);
lv_obj_set_size(btn1, 200, 50);
```

The objects has type specific parameters too which can be set by `lv_<type>_set_<paramters_name>(obj, <value>)` functions. For example:

```
lv_slider_set_value(slider1, 70, LV_ANIM_ON);
```

To see the full API visit the documentation of the object types or the related header file (e.g. `lvgl/src/lv_objx/lv_slider.h`).

## Styles

Styles can be assigned to the objects to changed their appearance. A style describes the appearance of rectangle-like objects (like a button or slider), texts, images and lines at once.

You can create a new style like this:

```
static lv_style_t style1;           /*Declare a new style. Should be `static`*/
lv_style_copy(&style1, &lv_style_plain); /*Copy a buil-in style*/
style1.body.main_color = LV_COLOR_RED; /*Main color*/
style1.body.grad_color = lv_color_hex(0xffd83c) /*Gradient color (orange)*/
style1.body.radius = 3;
style1.text.color = lv_color_hex3(0x0F0) /*Label color (green)*/
style1.text.font = &lv_font_dejavu_22; /*Change font*/
...
```

To set a new style for an object use the `lv_<type>set_style(obj, LV_<TYPE>_STYLE_<NAME>, &my_style)` functions. For example:

```
lv_slider_set_style(slider1, LV_SLIDER_STYLE_BG, &slider_bg_style);
lv_slider_set_style(slider1, LV_SLIDER_STYLE_INDIC, &slider_indic_style);
lv_slider_set_style(slider1, LV_SLIDER_STYLE_KNOB, &slider_knob_style);
```

If an object’ s style is **NULL** then it will inherit its parent’ s style. For example, the labels’ style are **NULL** by default. If you place them on a button then they will use the `style.text` properties from the button’ s style.

Learn more in [Style overview](#) section.

## Events

Events are used to inform the user if something has happened with an object. You can assign a callback to an object which will be called if the object is clicked, released, dragged, being deleted etc. It should look like this:

```
lv_obj_set_event_cb(btn, btn_event_cb);           /*Assign a callback to the ↵
↵button*/

...

void btn_event_cb(lv_obj_t * btn, lv_event_t event)
{
    if(event == LV_EVENT_CLICKED) {
        printf("Clicked\n");
    }
}
```

Learn more about the events in the [Event overview](#) section.

## Examples

### Button with label

```
lv_obj_t * btn = lv_btn_create(lv_scr_act(), NULL); /*Add a button the current ↵
↵screen*/
lv_obj_set_pos(btn, 10, 10);                       /*Set its position*/
lv_obj_set_size(btn, 100, 50);                     /*Set its size*/
lv_obj_set_event_cb(btn, btn_event_cb);             /*Assign a callback to the ↵
↵button*/

lv_obj_t * label = lv_label_create(btn, NULL);      /*Add a label to the button*/
lv_label_set_text(label, "Button");                 /*Set the labels text*/

...

void btn_event_cb(lv_obj_t * btn, lv_event_t event)
{
    if(event == LV_EVENT_CLICKED) {
        printf("Clicked\n");
    }
}
```



### Button with styles

Add styles to the button from the previous example:

```

static lv_style_t style_btn_rel;           /*A variable to store the
↪released style*/
lv_style_copy(&style_btn_rel, &lv_style_plain); /*Initialize from a built-in
↪style*/
style_btn_rel.body.border.color = lv_color_hex3(0x269);
style_btn_rel.body.border.width = 1;
style_btn_rel.body.main_color = lv_color_hex3(0xADF);
style_btn_rel.body.grad_color = lv_color_hex3(0x46B);
style_btn_rel.body.shadow.width = 4;
style_btn_rel.body.shadow.type = LV_SHADOW_BOTTOM;
style_btn_rel.body.radius = LV_RADIUS_CIRCLE;
style_btn_rel.text.color = lv_color_hex3(0xDEF);

static lv_style_t style_btn_pr;           /*A variable to store the
↪pressed style*/
lv_style_copy(&style_btn_pr, &style_btn_rel); /*Initialize from the
↪released style*/
style_btn_pr.body.border.color = lv_color_hex3(0x46B);
style_btn_pr.body.main_color = lv_color_hex3(0x8BD);
style_btn_pr.body.grad_color = lv_color_hex3(0x24A);
style_btn_pr.body.shadow.width = 2;
style_btn_pr.text.color = lv_color_hex3(0xBCD);

lv_btn_set_style(btn, LV_BTN_STYLE_REL, &style_btn_rel); /*Set the button's
↪released style*/
lv_btn_set_style(btn, LV_BTN_STYLE_PR, &style_btn_pr); /*Set the button's
↪pressed style*/

```



### Slider and object alignment

```

lv_obj_t * label;

...

/* Create a slider in the center of the display */
lv_obj_t * slider = lv_slider_create(lv_scr_act(), NULL);
lv_obj_set_width(slider, 200); /*Set the width*/
lv_obj_align(slider, NULL, LV_ALIGN_CENTER, 0, 0); /*Align to the center of the
↪parent (screen)*/
lv_obj_set_event_cb(slider, slider_event_cb); /*Assign an event function*/

/* Create a label below the slider */
label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label, "0");
lv_obj_set_auto_realign(slider, true);
lv_obj_align(label, slider, LV_ALIGN_OUT_BOTTOM_MID, 0, 10);

...


```

(continues on next page)



(continued from previous page)

```
void slider_event_cb(lv_obj_t * slider, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        static char buf[4]; /* max 3 bytes for
        ↪number plus 1 null terminating byte */
        snprintf(buf, 4, "%u", lv_slider_get_value(slider));
        lv_label_set_text(slider_label, buf); /*Refresh the text*/
    }
}
```

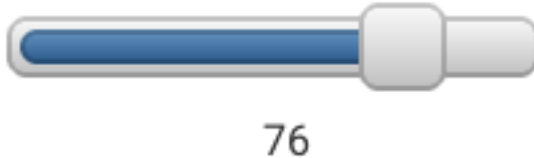

## List and themes

```
/*Texts of the list elements*/
const char * txts[] = {"First", "Second", "Third", "Forth", "Fifth", "Sixth", NULL};

/* Initialize and set a theme. `LV_THEME_NIGHT` needs to enabled in lv_conf.h. */
lv_theme_t * th = lv_theme_night_init(20, NULL);
lv_theme_set_current(th);

/*Create a list*/
lv_obj_t* list = lv_list_create(lv_scr_act(), NULL);
lv_obj_set_size(list, 120, 180);
lv_obj_set_pos(list, 10, 10);

/*Add buttons*/
uint8_t i;
for(i = 0; txts[i]; i++) {
    lv_obj_t * btn = lv_list_add_btn(list, LV_SYMBOL_FILE, txts[i]);
    lv_obj_set_event_cb(btn, list_event); /*Assign event function*/
    lv_btn_set_toggle(btn, true); /*Enable on/off states*/
}

/* Initialize and set an other theme. `LV_THEME_MATERIAL` needs to enabled in lv_conf.
↪h.
* If `LV_THEME_LIVE_UPDATE 1` then the previous list's style will be updated too.*/
th = lv_theme_material_init(210, NULL);
lv_theme_set_current(th);

/*Create an other list*/
list = lv_list_create(lv_scr_act(), NULL);
lv_obj_set_size(list, 120, 180);
lv_obj_set_pos(list, 150, 10);

/*Add buttons with the same texts*/
for(i = 0; txts[i]; i++) {
    lv_obj_t * btn = lv_list_add_btn(list, LV_SYMBOL_FILE, txts[i]);
    lv_obj_set_event_cb(btn, list_event);
}
```

(continues on next page)

(continued from previous page)


```

    lv_btn_set_toggle(btn, true);
}

...

static void list_event(lv_obj_t * btn, lv_event_t e)
{
    if(e == LV_EVENT_CLICKED) {
        printf("%s\n", lv_list_get_btn_text(btn));
    }
}

```

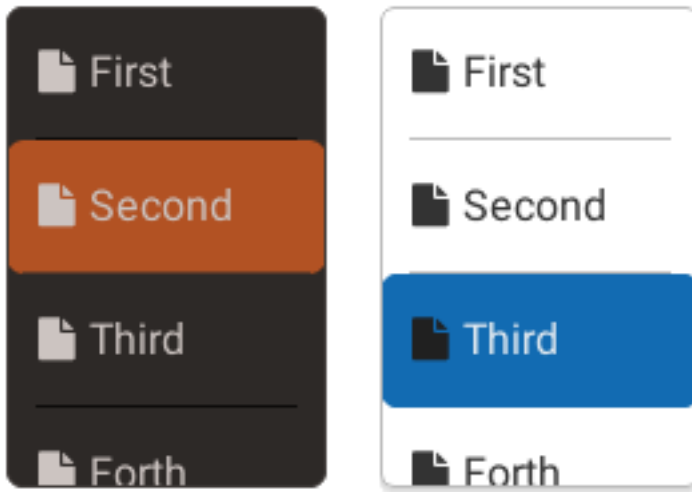

## Use LittlevGL from Micropython

Learn more about *Micropython*.

```

# Create a Button and a Label
scr = lv.obj()
btn = lv.btn(scr)
btn.align(lv.scr_act(), lv.ALIGN.CENTER, 0, 0)
label = lv.label(btn)
label.set_text("Button")

# Load the screen
lv.scr_load(scr)

```

## Contributing

LittlevGL uses the [Forum](#) to ask and answer questions and [GitHub's Issue tracker](#) for development-related discussion (such as bug reports, feature suggestions etc.).

There are many opportunities to contribute to LittlevGL such as:

- **Help others** in the [Forum](#).

- **Inspire people** by speaking about your project in [My project](#) category in the Forum or add it to the [References](#) post
- **Improve and/or translate the documentation.** Go to the [Documentation](#) repository to learn more
- **Write a blog post** about your experiences. See how to do it in the [Blog](#) repository
- **Report and/or fix bugs** in [GitHub](#)' s issue tracker
- **Help in the development.** Check the [Open issues](#) especially the ones with [Help wanted](#) label and tell your ideas about a topic or implement a feature.

If you are interested in contributing to LittlevGL, then please read the guides below to get started.

- [Contributing guide](#)
- [Coding style guide](#)

## Micropython

### What is Micropython?

[Micropython](#) is Python for microcontrollers. Using Micropython, you can write Python3 code and run it even on a bare metal architecture with limited resources.

### Highlights of Micropython

- **Compact** - Fits and runs within just 256k of code space and 16k of RAM. No OS is needed, although you can also run it with an OS, if you want.
- **Compatible** - Strives to be as compatible as possible with normal Python (known as CPython).
- **Versatile** - Supports many architectures (x86, x86-64, ARM, ARM Thumb, Xtensa).
- **Interactive** - No need for the compile-flash-boot cycle. With the REPL (interactive prompt) you can type commands and execute them immediately, run scripts etc.
- **Popular** - Many platforms are supported. The user base is growing bigger. Notable forks: [MicroPython](#), [CircuitPython](#), [MicroPython\\_ESP32\\_psRAM\\_LoBo](#)
- **Embedded Oriented** - Comes with modules specifically for embedded systems, such as the [machine module](#) for accessing low-level hardware (I/O pins, ADC, UART, SPI, I2C, RTC, Timers etc.)

### Why Micropython + LittlevGL?

Currently, Micropython does not have a good high-level GUI library by default. LittlevGL is an [Object Oriented Component Based](#) high-level GUI library, which seems to be a natural candidate to map into a higher level language, such as Python. LittlevGL is implemented in C and its APIs are in C.

### Here are some advantages of using LittlevGL in Micropython:

- Develop GUI in Python, a very popular high level language. Use paradigms such as Object Oriented Programming.
- Usually, GUI development requires multiple iterations to get things right. With C, each iteration consists of **Change code > Build > Flash > Run**. In Micropython it's just **Change code > Run** ! You can even run commands interactively using the [REPL](#) (the interactive prompt)

### Micropython + LittlevGL could be used for:

- Fast prototyping GUI.
  - Shorten the cycle of changing and fine-tuning the GUI.
  - Model the GUI in a more abstract way by defining reusable composite objects, taking advantage of Python's language features such as Inheritance, Closures, List Comprehension, Generators, Exception Handling, Arbitrary Precision Integers and others.
  - Make LittlevGL accessible to a larger audience. No need to know C in order to create a nice GUI on an embedded system. This goes well with [CircuitPython vision](#). CircuitPython was designed with education in mind, to make it easier for new or unexperienced users to get started with embedded development.
  - Creating tools to work with LittlevGL at a higher level (e.g. drag-and-drop designer).
- 

### So what does it look like?

TL;DR: It's very much like the C API, but Object Oriented for LittlevGL components.

Let's dive right into an example!

### A simple example

```
import lvgl as lv
lv.init()
scr = lv.obj()
btn = lv.btn(scr)
btn.align(lv.scr_act(), lv.ALIGN.CENTER, 0, 0)
label = lv.label(btn)
label.set_text("Button")
lv.scr_load(scr)
```

### How can I use it?

#### Online Simulator

If you want to experiment with LittlevGL + Micropython without downloading anything - you can use our online simulator! It's a fully functional LittlevGL + Micropython that runs entirely in the browser and allows you to edit a python script and run it.

[Click here to experiment on the online simulator](#)

Hello World

## PC Simulator

Micropython is ported to many platforms. One notable port is “unix” , which allows you to build and run Micropython (+LittlevGL) on a Linux machine. (On a Windows machine you might need Virtual Box or WSL or MinGW or Cygwin etc.)

[Click here to know more information about building and running the unix port](#)

## Embedded platform


At the end, the goal is to run it all on an embedded platform.Both Micropython and LittlevGL can be used on many embedded architectures, such as stm32, ESP32 etc.You would also need display and input drivers. We have some sample drivers (ESP32+ILI9341, as well as some other examples), but most chances are you would want to create your own input/display drivers for your specific purposes.Drivers can be implemented either in C as Micropython module, or in pure Micropython!

## Where can I find more information?

- On the [Blog Post](#)
- On [lv\\_micropython README](#)
- On [lv\\_binding\\_micropython README](#)
- On LittlevGL forum (Feel free to ask anything!)
- On Micropython [docs](#) and [forum](#)

## 3.16.2 Porting

### System overview

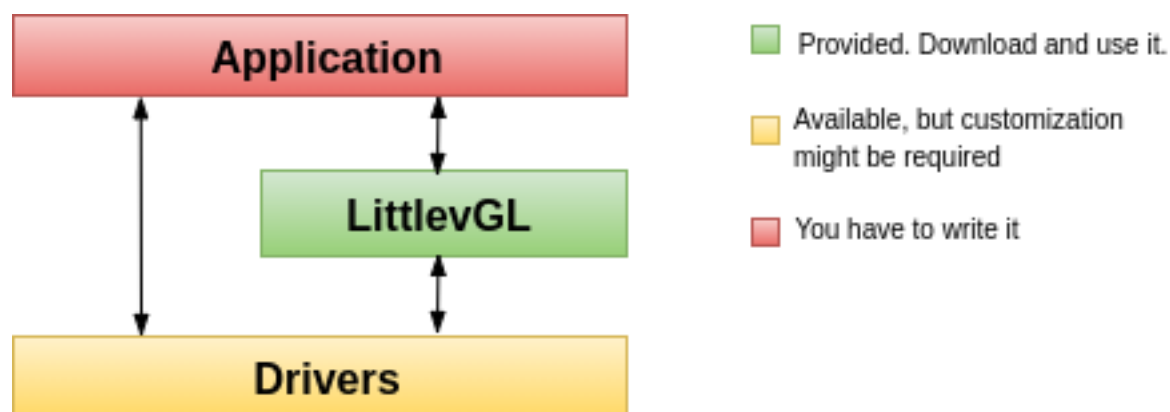

**Application** Your application which creates the GUI and handles the specific tasks.

**LittlevGL** The graphics library itself. Your application can communicate with the library to create a GUI. It contains a HAL (Hardware Abstraction Layer) interface to register your display and input device drivers.

**Driver** Besides your specific drivers, it contains functions to drive your display, optionally to a GPU and to read the touchpad or buttons.

---

Depending on the MCU, there are two typical hardware set-ups. One with built-in LCD/TFT driver periphery and another without it. In both cases, a frame buffer will be required to store the current image of the screen.

1. **MCU with TFT/LCD driver** If your MCU has a TFT/LCD driver periphery then you can connect a display directly via RGB interface. In this case, the frame buffer can be in the internal RAM (if the MCU has enough RAM) or in the external RAM (if the MCU has a memory interface).
2. **External display controller** If the MCU doesn't have TFT/LCD driver interface then an external display controller (E.g. SSD1963, SSD1306, ILI9341) has to be used. In this case, the MCU can communicate with the display controller via Parallel port, SPI or sometimes I2C. The frame buffer is usually located in the display controller which saves a lot of RAM for the MCU.

## Set-up a project

### Get the library

LittlevGL Graphics Library is available on GitHub: <https://github.com/littlevgl/lvgl>.

You can clone it or download the latest version of the library from GitHub or you can use the [Download](#) page as well.

The graphics library is the **lvgl** directory which should be copied into your project.

### Configuration file

There is a configuration header file for LittlevGL called **lv\_conf.h**. It sets the library's basic behaviour, disables unused modules and features, adjusts the size of memory buffers in compile-time, etc.

Copy **lvgl/lv\_conf\_template.h** next to the *lvgl* directory and rename it to *lv\_conf.h*. Open the file and change the **#if 0** at the beginning to **#if 1** to enable its content.

*lv\_conf.h* can be copied other places as well but then you should add **LV\_CONF\_INCLUDE\_SIMPLE** define to your compiler options (e.g. **-DLV\_CONF\_INCLUDE\_SIMPLE** for gcc compiler) and set the include path manually.

In the config file comments explain the meaning of the options. Check at least these three configuration options and modify them according to your hardware:

1. **LV\_HOR\_RES\_MAX** Your display's horizontal resolution.
2. **LV\_VER\_RES\_MAX** Your display's vertical resolution.
3. **LV\_COLOR\_DEPTH** 8 for (RG332), 16 for (RGB565) or 32 for (RGB888 and ARGB8888).

### Initialization

To use the graphics library you have to initialize it and the other components too. The order of the initialization is:

1. Call *lv\_init()*.
2. Initialize your drivers.

3. Register the display and input devices drivers in LittlevGL. More about *Display* and *Input device* registration.
4. Call `lv_tick_inc(x)` in every `x` milliseconds in an interrupt to tell the elapsed time. [Learn more](#).
5. Call `lv_task_handler()` periodically in every few milliseconds to handle LittlevGL related tasks. [Learn more](#).

## Display interface

To set up a display an `lv_disp_buf_t` and an `lv_disp_drv_t` variable has to be initialized.

- `lv_disp_buf_t` contains internal graphics buffer(s).
- `lv_disp_drv_t` contains callback functions to interact with the display and manipulate drawing related things.

## Display buffer

`lv_disp_buf_t` can be initialized like this:

```
/*A static or global variable to store the buffers*/
static lv_disp_buf_t disp_buf;

/*Static or global buffer(s). The second buffer is optional*/
static lv_color_t buf_1[MY_DISP_HOR_RES * 10];
static lv_color_t buf_2[MY_DISP_HOR_RES * 10];

/*Initialize `disp_buf` with the buffer(s) */
lv_disp_buf_init(&disp_buf, buf_1, buf_2, MY_DISP_HOR_RES*10);
```

There are 3 possible configurations regarding the buffer size:

1. **One buffer** LittlevGL draws the content of the screen into a buffer and sends it to the display. The buffer can be smaller than the screen. In this case, the larger areas will be redrawn in multiple parts. If only small areas changes (e.g. button press) then only those areas will be refreshed.
2. **Two non-screen-sized buffers** having two buffers LittlevGL can draw into one buffer while the content of the other buffer is sent to display in the background. DMA or other hardware should be used to transfer the data to the display to let the CPU draw meanwhile. This way the rendering and refreshing of the display become parallel. Similarly to the *One buffer*, LittlevGL will draw the display's content in chunks if the buffer is smaller than the area to refresh.
3. **Two screen-sized buffers.** In contrast to *Two non-screen-sized buffers* LittlevGL will always provide the whole screen's content not only chunks. This way the driver can simply change the address of the frame buffer to the buffer received from LittlevGL. Therefore this method works the best when the MCU has an LCD/TFT interface and the frame buffer is just a location in the RAM.

## Display driver

Once the buffer initialization is ready the display drivers need to be initialized. In the most simple case only the following two fields of `lv_disp_drv_t` needs to be set:

- **buffer** pointer to an initialized `lv_disp_buf_t` variable.
- **flush\_cb** a callback function to copy a buffer's content to a specific area of the display.

There are some optional data fields:

- **hor\_res** horizontal resolution of the display. (LV\_HOR\_RES\_MAX by default from *lv\_conf.h*).
- **ver\_res** vertical resolution of the display. (LV\_VER\_RES\_MAX by default from *lv\_conf.h*).
- **color\_chroma\_key** a color which will be drawn as transparent on chrome keyed images. LV\_COLOR\_TRANSP by default from *lv\_conf.h*.
- **user\_data** custom user data for the driver. Its type can be modified in *lv\_conf.h*.
- **anti-aliasing** use anti-aliasing (edge smoothing). LV\_ANTIALIAS by default from *lv\_conf.h*.
- **rotated** if 1 swap **hor\_res** and **ver\_res**. LittlevGL draws in the same direction in both cases (in lines from top to bottom) so the driver also needs to be reconfigured to change the display's fill direction.
- **screen\_transp** if 1 the screen can have transparent or opaque style. LV\_COLOR\_SCREEN\_TRANSP needs to be enabled in *lv\_conf.h*.

To use a GPU the following callbacks can be used:

- **gpu\_fill\_cb** fill an area in memory with colors.
- **gpu\_blend\_cb** blend two memory buffers using opacity.

Note that, these functions need to draw to the memory (RAM) and not your display directly.

Some other optional callbacks to make easier and more optimal to work with monochrome, grayscale or other non-standard RGB displays:

- **rounder\_cb** round the coordinates of areas to redraw. E.g. a 2x2 px can be converted to 2x8. It can be used if the display controller can refresh only areas with specific height or width (usually 8 px height with monochrome displays).
- **set\_px\_cb** a custom function to write the *display buffer*. It can be used to store the pixels more compactly if the display has a special color format. (e.g. 1-bit monochrome, 2-bit grayscale etc.) This way the buffers used in **lv\_disp\_buf\_t** can be smaller to hold only the required number of bits for the given area size. **set\_px\_cb** is not working with **Two screen-sized buffers** display buffer configuration.
- **monitor\_cb** a callback function tells how many pixels were refreshed in how much time.

To set the fields of *lv\_disp\_drv\_t* variable it needs to be initialized with **lv\_disp\_drv\_init(&disp\_drv)**. And finally to register a display for LittlevGL **lv\_disp\_drv\_register(&disp\_drv)** needs to be called.

All together it looks like this:

```
lv_disp_drv_t disp_drv;           /*A variable to hold the drivers. Can be
↪local variable*/
lv_disp_drv_init(&disp_drv);      /*Basic initialization*/
disp_drv.buffer = &disp_buf;     /*Set an initialized buffer*/
disp_drv.flush_cb = my_flush_cb; /*Set a flush callback to draw to the
↪display*/
lv_disp_t * disp;
disp = lv_disp_drv_register(&disp_drv); /*Register the driver and save the
↪created display objects*/
```

Here some simple examples of the callbacks:



```

void my_flush_cb(lv_disp_drv_t * disp_drv, const lv_area_t * area, lv_color_t * color_
↳p)
{
    /*The most simple case (but also the slowest) to put all pixels to the screen one-
    ↳by-one*/
    int32_t x, y;
    for(y = area->y1; y <= area->y2; y++) {
        for(x = area->x1; x <= area->x2; x++) {
            put_px(x, y, *color_p)
            color_p++;
        }
    }

    /* IMPORTANT!!!
     * Inform the graphics library that you are ready with the flushing*/
    lv_disp_flush_ready(disp);
}

void my_gpu_fill_cb(lv_disp_drv_t * disp_drv, lv_color_t * dest_buf, const lv_area_t_
↳* dest_area, const lv_area_t * fill_area, lv_color_t color);
{
    /*It's an example code which should be done by your GPU*/
    uint32_t x, y;
    dest_buf += dest_width * fill_area->y1; /*Go to the first line*/

    for(y = fill_area->y1; y < fill_area->y2; y++) {
        for(x = fill_area->x1; x < fill_area->x2; x++) {
            dest_buf[x] = color;
        }
        dest_buf+=dest_width; /*Go to the next line*/
    }
}

void my_gpu_blend_cb(lv_disp_drv_t * disp_drv, lv_color_t * dest, const lv_color_t *_
↳src, uint32_t length, lv_opa_t opa)
{
    /*It's an example code which should be done by your GPU*/
    uint32_t i;
    for(i = 0; i < length; i++) {
        dest[i] = lv_color_mix(dest[i], src[i], opa);
    }
}

void my_rounder_cb(lv_disp_drv_t * disp_drv, lv_area_t * area)
{
    /* Update the areas as needed. Can be only larger.
     * For example to always have lines 8 px height:*/
    area->y1 = area->y1 & 0x07;
    area->y2 = (area->y2 & 0x07) + 8;
}

void my_set_px_cb(lv_disp_drv_t * disp_drv, uint8_t * buf, lv_coord_t buf_w, lv_coord_
↳t x, lv_coord_t y, lv_color_t color, lv_opa_t opa)
{
    /* Write to the buffer as required for the display.
     * Write only 1-bit for monochrome displays mapped vertically:*/
    buf += buf_w * (y >> 3) + x;
}

```

(continues on next page)

(continued from previous page)

```

if(lv_color_brightness(color) > 128) (*buf) |= (1 << (y % 8));
else (*buf) &= ~(1 << (y % 8));
}

void my_monitor_cb(lv_disp_drv_t * disp_drv, uint32_t time, uint32_t px)
{
    printf("%d px refreshed in %d ms\n", time, ms);
}

```

## API

Display Driver HAL interface header file

### Typedefs

**typedef struct *\_\_disp\_drv\_t* lv\_disp\_drv\_t**  
 Display Driver structure to be registered by HAL

**typedef struct *\_\_disp\_t* lv\_disp\_t**  
 Display structure.

Note `lv_disp_drv_t` should be the first member of the structure.

### Enums

**enum lv\_disp\_size\_t**  
*Values:*

- LV\_DISP\_SIZE\_SMALL**
- LV\_DISP\_SIZE\_MEDIUM**
- LV\_DISP\_SIZE\_LARGE**
- LV\_DISP\_SIZE\_EXTRA\_LARGE**

### Functions

**void lv\_disp\_drv\_init(*lv\_disp\_drv\_t* \*driver)**  
 Initialize a display driver with default values. It is used to have known values in the fields and not junk in memory. After it you can safely set only the fields you need.

#### Parameters

- **driver**: pointer to driver variable to initialize

**void lv\_disp\_buf\_init(*lv\_disp\_buf\_t* \*disp\_buf, void \*buf1, void \*buf2, uint32\_t size\_in\_px\_cnt)**

Initialize a display buffer

#### Parameters

- **disp\_buf**: pointer *lv\_disp\_buf\_t* variable to initialize

- **buf1**: A buffer to be used by LittlevGL to draw the image. Always has to be specified and can't be NULL. Can be an array allocated by the user. E.g. `static lv_color_t disp_buf1[1024 * 10]` Or a memory address e.g. in external SRAM
- **buf2**: Optionally specify a second buffer to make image rendering and image flushing (sending to the display) parallel. In the `disp_drv->flush` you should use DMA or similar hardware to send the image to the display in the background. It lets LittlevGL to render next frame into the other buffer while previous is being sent. Set to **NULL** if unused.
- **size\_in\_px\_cnt**: size of the **buf1** and **buf2** in pixel count.

*lv\_disp\_t* \***lv\_disp\_drv\_register**(*lv\_disp\_drv\_t* \*driver)

Register an initialized display driver. Automatically set the first display as active.

**Return** pointer to the new display or NULL on error

#### Parameters

- **driver**: pointer to an initialized 'lv\_disp\_drv\_t' variable (can be local variable)

void **lv\_disp\_drv\_update**(*lv\_disp\_t* \*disp, *lv\_disp\_drv\_t* \*new\_drv)

Update the driver in run time.

#### Parameters

- **disp**: pointer to a display. (return value of `lv_disp_drv_register`)
- **new\_drv**: pointer to the new driver

void **lv\_disp\_remove**(*lv\_disp\_t* \*disp)

Remove a display

#### Parameters

- **disp**: pointer to display

void **lv\_disp\_set\_default**(*lv\_disp\_t* \*disp)

Set a default screen. The new screens will be created on it by default.

#### Parameters

- **disp**: pointer to a display

*lv\_disp\_t* \***lv\_disp\_get\_default**(void)

Get the default display

**Return** pointer to the default display

lv\_coord\_t **lv\_disp\_get\_hor\_res**(*lv\_disp\_t* \*disp)

Get the horizontal resolution of a display

**Return** the horizontal resolution of the display

#### Parameters

- **disp**: pointer to a display (NULL to use the default display)

lv\_coord\_t **lv\_disp\_get\_ver\_res**(*lv\_disp\_t* \*disp)

Get the vertical resolution of a display

**Return** the vertical resolution of the display

#### Parameters

- **disp**: pointer to a display (NULL to use the default display)

bool **lv\_disp\_get\_antialiasing**(*lv\_disp\_t* \*disp)

Get if anti-aliasing is enabled for a display or not

**Return** true: anti-aliasing is enabled; false: disabled

**Parameters**

- **disp**: pointer to a display (NULL to use the default display)

uint32\_t **lv\_disp\_get\_dpi**(*lv\_disp\_t* \*disp)

Get the DPI of the display

**Return** dpi of the display

**Parameters**

- **disp**: pointer to a display (NULL to use the default display)

*lv\_disp\_size\_t* **lv\_disp\_get\_size\_category**(*lv\_disp\_t* \*disp)

Get the size category of the display based on it's hor. res. and dpi.

**Return** LV\_DISP\_SIZE\_SMALL/MEDIUM/LARGE/EXTRA\_LARGE

**Parameters**

- **disp**: pointer to a display (NULL to use the default display)

*lv\_disp\_t* \***lv\_disp\_get\_next**(*lv\_disp\_t* \*disp)

Get the next display.

**Return** the next display or NULL if no more. Give the first display when the parameter is NULL

**Parameters**

- **disp**: pointer to the current display. NULL to initialize.

*lv\_disp\_buf\_t* \***lv\_disp\_get\_buf**(*lv\_disp\_t* \*disp)

Get the internal buffer of a display

**Return** pointer to the internal buffers

**Parameters**

- **disp**: pointer to a display

uint16\_t **lv\_disp\_get\_inv\_buf\_size**(*lv\_disp\_t* \*disp)

Get the number of areas in the buffer

**Return** number of invalid areas

void **lv\_disp\_pop\_from\_inv\_buf**(*lv\_disp\_t* \*disp, uint16\_t num)

Pop (delete) the last 'num' invalidated areas from the buffer

**Parameters**

- **num**: number of areas to delete

bool **lv\_disp\_is\_double\_buf**(*lv\_disp\_t* \*disp)

Check the driver configuration if it's double buffered (both **buf1** and **buf2** are set)

**Return** true: double buffered; false: not double buffered

**Parameters**

- **disp**: pointer to to display to check

bool **lv\_disp\_is\_true\_double\_buf**(*lv\_disp\_t* \*disp)

Check the driver configuration if it's TRUE double buffered (both **buf1** and **buf2** are set and **size** is screen sized)

**Return** true: double buffered; false: not double buffered

**Parameters**

- **disp**: pointer to display to check

struct **lv\_disp\_buf\_t**

*#include <lv\_hal\_disp.h>* Structure for holding display buffer information.

### Public Members

void \***buf1**

First display buffer.

void \***buf2**

Second display buffer.

void \***buf\_act**

uint32\_t **size**

lv\_area\_t **area**

volatile uint32\_t **flushing**

volatile uint32\_t **flushing\_last**

volatile uint32\_t **last\_area**

volatile uint32\_t **last\_part**

struct **\_disp\_drv\_t**

*#include <lv\_hal\_disp.h>* Display Driver structure to be registered by HAL

### Public Members

lv\_coord\_t **hor\_res**

Horizontal resolution.

lv\_coord\_t **ver\_res**

Vertical resolution.

*lv\_disp\_buf\_t* \***buffer**

Pointer to a buffer initialized with *lv\_disp\_buf\_init()*. LittlevGL will use this buffer(s) to draw the screens contents

uint32\_t **antialiasing**

1: antialiasing is enabled on this display.

uint32\_t **rotated**

1: turn the display by 90 degree.

**Warning** Does not update coordinates for you!

uint32\_t **screen\_transp**

Handle if the screen doesn't have a solid (opa == LV\_OPA\_COVER) background. Use only if required because it's slower.

uint32\_t **dpi**

DPI (dot per inch) of the display. Set to LV\_DPI from lv\_conf.h by default.

void (\***flush\_cb**)(struct \_\_disp\_drv\_t \*disp\_drv, const lv\_area\_t \*area, lv\_color\_t \*color\_p)

MANDATORY: Write the internal buffer (VDB) to the display. 'lv\_disp\_flush\_ready()' has to be called when finished

void (\***rounder\_cb**)(struct \_\_disp\_drv\_t \*disp\_drv, lv\_area\_t \*area)

OPTIONAL: Extend the invalidated areas to match with the display drivers requirements E.g. round y to, 8, 16 ..) on a monochrome display

void (\***set\_px\_cb**)(struct \_\_disp\_drv\_t \*disp\_drv, uint8\_t \*buf, lv\_coord\_t buf\_w, lv\_coord\_t x, lv\_coord\_t y, lv\_color\_t color, lv\_opa\_t opa)

OPTIONAL: Set a pixel in a buffer according to the special requirements of the display Can be used for color format not supported in LittlevGL. E.g. 2 bit -> 4 gray scales

**Note** Much slower then drawing with supported color formats.

void (\***monitor\_cb**)(struct \_\_disp\_drv\_t \*disp\_drv, uint32\_t time, uint32\_t px)

OPTIONAL: Called after every refresh cycle to tell the rendering and flushing time + the number of flushed pixels

void (\***gpu\_blend\_cb**)(struct \_\_disp\_drv\_t \*disp\_drv, lv\_color\_t \*dest, const lv\_color\_t \*src, uint32\_t length, lv\_opa\_t opa)

OPTIONAL: Blend two memories using opacity (GPU only)

void (\***gpu\_fill\_cb**)(struct \_\_disp\_drv\_t \*disp\_drv, lv\_color\_t \*dest\_buf, lv\_coord\_t dest\_width, const lv\_area\_t \*fill\_area, lv\_color\_t color)

OPTIONAL: Fill a memory with a color (GPU only)

lv\_color\_t **color\_chroma\_key**

On CHROMA\_KEYED images this color will be transparent. LV\_COLOR\_TRANSP by default. (lv\_conf.h)

lv\_disp\_drv\_user\_data\_t **user\_data**

Custom display driver user data

**struct \_\_disp\_t**

#include <lv\_hal\_disp.h> Display structure.

**Note** lv\_disp\_drv\_t should be the first member of the structure.

## Public Members

lv\_disp\_drv\_t **driver**

< Driver to the display A task which periodically checks the dirty areas and refreshes them

lv\_task\_t \***refr\_task**

lv\_ll\_t **scr\_ll**

Screens of the display

struct \_\_lv\_obj\_t \***act\_scr**

Currently active screen on this display

struct \_\_lv\_obj\_t \***top\_layer**

See lv\_disp\_get\_layer\_top

struct \_\_lv\_obj\_t \***sys\_layer**

See lv\_disp\_get\_layer\_sys

```
lv_area_t inv_areas[LV_INV_BUF_SIZE]
    Invalidated (marked to redraw) areas

uint8_t inv_area_joined[LV_INV_BUF_SIZE]

uint32_t inv_p

uint32_t last_activity_time
    Last time there was activity on this display
```

## Input device interface

### Types of input devices

To set up an input device an `lv_indev_drv_t` variable has to be initialized:

```
lv_indev_drv_t indev_drv;
lv_indev_drv_init(&indev_drv);           /*Basic initialization*/
indev_drv.type = ...                     /*See below.*/
indev_drv.read_cb = ...                  /*See below.*/
/*Register the driver in LittlevGL and save the created input device object*/
lv_indev_t * my_indev = lv_indev_drv_register(&indev_drv);
```

type can be

- **LV\_INDEV\_TYPE\_POINTER** touchpad or mouse
- **LV\_INDEV\_TYPE\_KEYPAD** keyboard or keypad
- **LV\_INDEV\_TYPE\_ENCODER** encoder with left, right, push options
- **LV\_INDEV\_TYPE\_BUTTON** external buttons pressing the screen

**read\_cb** is a function pointer which will be called periodically to report the current state of an input device. It can also buffer data and return **false** when no more data to be read or **true** when the buffer is not empty.

Visit [Input devices](#) to learn more about input devices in general.

### Touchpad, mouse or any pointer

Input devices which can click points of the screen belong to this category.

```
indev_drv.type = LV_INDEV_TYPE_POINTER;
indev_drv.read_cb = my_input_read;

...

bool my_input_read(lv_indev_drv_t * drv, lv_indev_data_t*data)
{
    data->point.x = touchpad_x;
    data->point.y = touchpad_y;
    data->state = LV_INDEV_STATE_PR or LV_INDEV_STATE_REL;
    return false; /*No buffering now so no more data read*/
}
```

---

**Important:** Touchpad drivers must return the last X/Y coordinates even when the state is `LV_INDEV_STATE_REL`.

---

To set a mouse cursor use `lv_indev_set_cursor(my_indev, &img_cursor)`. (`my_indev` is the return value of `lv_indev_drv_register`)

## Keypad or keyboard

Full keyboards with all the letters or simple keypads with a few navigation buttons belong here.

To use a keyboard/keypad:

- Register a `read_cb` function with `LV_INDEV_TYPE_KEYPAD` type.
- Enable `LV_USE_GROUP` in `lv_conf.h`
- An object group has to be created: `lv_group_t * g = lv_group_create()` and objects have to be added to it with `lv_group_add_obj(g, obj)`
- The created group has to be assigned to an input device: `lv_indev_set_group(my_indev, g)` (`my_indev` is the return value of `lv_indev_drv_register`)
- Use `LV_KEY_...` to navigate among the objects in the group. See `lv_core/lv_group.h` for the available keys.

```

indev_drv.type = LV_INDEV_TYPE_KEYPAD;
indev_drv.read_cb = my_input_read;

...

bool keyboard_read(lv_indev_drv_t * drv, lv_indev_data_t*data){
    data->key = last_key();           /*Get the last pressed or released key*/

    if(key_pressed()) data->state = LV_INDEV_STATE_PR;
    else data->state = LV_INDEV_STATE_REL;

    return false; /*No buffering now so no more data read*/
}

```

## Encoder

With an encoder you can do 4 things:

1. Press its button
2. Long-press its button
3. Turn left
4. Turn right

In short, the Encoder input devices work like this:

- By turning the encoder you can focus on the next/previous object.
- When you press the encoder on a simple object (like a button), it will be clicked.



- If you press the encoder on a complex object (like a list, message box, etc.) the object will go to edit mode whereby turning the encoder you can navigate inside the object.
- To leave edit mode press long the button.

To use an *Encoder* (similarly to the *Keypads*) the objects should be added to groups.

```
indev_drv.type = LV_INDEV_TYPE_ENCODER;
indev_drv.read_cb = my_input_read;

...

bool encoder_read(lv_indev_drv_t * drv, lv_indev_data_t*data){
    data->enc_diff = enc_get_new_moves();

    if(enc_pressed()) data->state = LV_INDEV_STATE_PR;
    else data->state = LV_INDEV_STATE_REL;

    return false; /*No buffering now so no more data read*/
}
```

## Button

*Buttons* mean external “hardware” buttons next to the screen which are assigned to specific coordinates of the screen. If a button is pressed it will simulate the pressing on the assigned coordinate. (Similarly to a touchpad)

To assign buttons to coordinates use `lv_indev_set_button_points(my_indev, points_array)`. `points_array` should look like `const lv_point_t points_array[] = { {12,30},{60,90}, ... }`

**Important:** The `points_array` can't go out of scope. Either declare it as a global variable or as a static variable inside a function.

```
indev_drv.type = LV_INDEV_TYPE_BUTTON;
indev_drv.read_cb = my_input_read;

...

bool button_read(lv_indev_drv_t * drv, lv_indev_data_t*data){
    static uint32_t last_btn = 0; /*Store the last pressed button*/
    int btn_pr = my_btn_read(); /*Get the ID (0,1,2...) of the pressed button*/
    if(btn_pr >= 0) { /*Is there a button press? (E.g. -1 indicated no button was pressed)*/
        last_btn = btn_pr; /*Save the ID of the pressed button*/
        data->state = LV_INDEV_STATE_PR; /*Set the pressed state*/
    } else {
        data->state = LV_INDEV_STATE_REL; /*Set the released state*/
    }

    data->btn = last_btn; /*Save the last button*/

    return false; /*No buffering now so no more data read*/
}
```

## Other features

Besides `read_cb` a `feedback_cb` callback can be also specified in `lv_indev_drv_t`. `feedback_cb` is called when any type of event is sent by the input devices. (independently from its type). It allows making feedback for the user e.g. to play a sound on `LV_EVENT_CLICK`.

The default value of the following parameters can be set in `lv_conf.h` but the default value can be overwritten in `lv_indev_drv_t`:

- **drag\_limit** Number of pixels to slide before actually drag the object
- **drag\_throw** Drag throw slow-down in [%]. Greater value means faster slow-down
- **long\_press\_time** Press time to send `LV_EVENT_LONG_PRESSED` (in milliseconds)
- **long\_press\_rep\_time** Interval of sending `LV_EVENT_LONG_PRESSED_REPEAT` (in milliseconds)
- **read\_task** pointer to the `lv_task` which reads the input device. Its parameters can be changed by `lv_task_...()` functions

Every Input device is associated with a display. By default, a new input device is added to the lastly created or the explicitly selected (using `lv_disp_set_default()`) display. The associated display is stored and can be changed in `disp` field of the driver.

## API

Input Device HAL interface layer header file

### Typedefs

**typedef** uint8\_t **lv\_indev\_type\_t**

**typedef** uint8\_t **lv\_indev\_state\_t**

**typedef** uint8\_t **lv\_drag\_dir\_t**

**typedef** uint8\_t **lv\_gesture\_dir\_t**

**typedef struct** *lv\_indev\_drv\_t* **lv\_indev\_drv\_t**  
 Initialized by the user and registered by 'lv\_indev\_add()'

**typedef struct** *lv\_indev\_proc\_t* **lv\_indev\_proc\_t**  
 Run time data of input devices Internally used by the library, you should not need to touch it.

**typedef struct** *lv\_indev\_t* **lv\_indev\_t**  
 The main input device descriptor with driver, runtime data ( 'proc' ) and some additional information

### Enums

**enum** [anonymous]  
 Possible input device types

*Values:*

**LV\_INDEV\_TYPE\_NONE**  
 Uninitialized state

**LV\_INDEV\_TYPE\_POINTER**  
 Touch pad, mouse, external button

#### **LV\_INDEV\_TYPE\_KEYPAD**

Keypad or keyboard

#### **LV\_INDEV\_TYPE\_BUTTON**

External (hardware button) which is assigned to a specific point of the screen

#### **LV\_INDEV\_TYPE\_ENCODER**

Encoder with only Left, Right turn and a Button

**enum** [anonymous]

States for input devices

*Values:*

**LV\_INDEV\_STATE\_REL** = 0

**LV\_INDEV\_STATE\_PR**

**enum** [anonymous]

*Values:*

**LV\_DRAG\_DIR\_HOR** = 0x1

Object can be dragged horizontally.

**LV\_DRAG\_DIR\_VER** = 0x2

Object can be dragged vertically.

**LV\_DRAG\_DIR\_BOTH** = 0x3

Object can be dragged in all directions.

**LV\_DRAG\_DIR\_ONE** = 0x4

Object can be dragged only one direction (the first move).

**enum** [anonymous]

*Values:*

**LV\_GESTURE\_DIR\_TOP**

Gesture dir up.

**LV\_GESTURE\_DIR\_BOTTOM**

Gesture dir down.

**LV\_GESTURE\_DIR\_LEFT**

Gesture dir left.

**LV\_GESTURE\_DIR\_RIGHT**

Gesture dir right.

## Functions

void **lv\_indev\_drv\_init**(*lv\_indev\_drv\_t* \**driver*)

Initialize an input device driver with default values. It is used to surly have known values in the fields ant not memory junk. After it you can set the fields.

**Parameters**

- **driver**: pointer to driver variable to initialize

*lv\_indev\_t* \***lv\_indev\_drv\_register**(*lv\_indev\_drv\_t* \**driver*)

Register an initialized input device driver.

**Return** pointer to the new input device or NULL on error

**Parameters**

- **driver**: pointer to an initialized ‘lv\_indev\_drv\_t’ variable (can be local variable)

void **lv\_indev\_drv\_update**(*lv\_indev\_t* \*indev, *lv\_indev\_drv\_t* \*new\_drv)  
Update the driver in run time.

#### Parameters

- **indev**: pointer to a input device. (return value of **lv\_indev\_drv\_register**)
- **new\_drv**: pointer to the new driver

*lv\_indev\_t* \***lv\_indev\_get\_next**(*lv\_indev\_t* \*indev)  
Get the next input device.

**Return** the next input device or NULL if no more. Give the first input device when the parameter is NULL

#### Parameters

- **indev**: pointer to the current input device. NULL to initialize.

bool **lv\_indev\_read**(*lv\_indev\_t* \*indev, *lv\_indev\_data\_t* \*data)  
Read data from an input device.

**Return** false: no more data; true: there more data to read (buffered)

#### Parameters

- **indev**: pointer to an input device
- **data**: input device will write its data here

**struct lv\_indev\_data\_t**

*#include <lv\_hal\_indev.h>* Data structure passed to an input driver to fill

#### Public Members

*lv\_point\_t* **point**

For LV\_INDEV\_TYPE\_POINTER the currently pressed point

uint32\_t **key**

For LV\_INDEV\_TYPE\_KEYPAD the currently pressed key

uint32\_t **btn\_id**

For LV\_INDEV\_TYPE\_BUTTON the currently pressed button

int16\_t **enc\_diff**

For LV\_INDEV\_TYPE\_ENCODER number of steps since the previous read

*lv\_indev\_state\_t* **state**

LV\_INDEV\_STATE\_REL or LV\_INDEV\_STATE\_PR

**struct \_lv\_indev\_drv\_t**

*#include <lv\_hal\_indev.h>* Initialized by the user and registered by ‘lv\_indev\_add()’

#### Public Members

*lv\_indev\_type\_t* **type**

< Input device type Function pointer to read input device data. Return ‘true’ if there is more data to be read (buffered). Most drivers can safely return ‘false’

bool (\***read\_cb**)(**struct** *lv\_indev\_drv\_t* \*indev\_drv, *lv\_indev\_data\_t* \*data)

void (\***feedback\_cb**)(**struct** *lv\_indev\_drv\_t* \*, uint8\_t)

Called when an action happened on the input device. The second parameter is the event from **lv\_event\_t**

*lv\_indev\_drv\_user\_data\_t* **user\_data**

**struct** *lv\_disp\_t* \***disp**

< Pointer to the assigned display Task to read the periodically read the input device

*lv\_task\_t* \***read\_task**

Number of pixels to slide before actually drag the object

uint8\_t **drag\_limit**

Drag throw slow-down in [%]. Greater value means faster slow-down

uint8\_t **drag\_throw**

At least this difference should be between two points to evaluate as gesture

uint8\_t **gesture\_min\_velocity**

At least this difference should be to send a gesture

uint8\_t **gesture\_limit**

Long press time in milliseconds

uint16\_t **long\_press\_time**

Repeated trigger period in long press [ms]

uint16\_t **long\_press\_rep\_time**

**struct** **\_lv\_indev\_proc\_t**

#include <lv\_hal\_indev.h> Run time data of input devices Internally used by the library, you should not need to touch it.

## Public Members

*lv\_indev\_state\_t* **state**

Current state of the input device.

*lv\_point\_t* **act\_point**

Current point of input device.

*lv\_point\_t* **last\_point**

Last point of input device.

*lv\_point\_t* **vect**

Difference between **act\_point** and **last\_point**.

*lv\_point\_t* **drag\_sum**

*lv\_point\_t* **drag\_throw\_vect**

**struct** *lv\_obj\_t* \***act\_obj**

**struct** *lv\_obj\_t* \***last\_obj**

**struct** *lv\_obj\_t* \***last\_pressed**

*lv\_gesture\_dir\_t* **gesture\_dir**

*lv\_point\_t* **gesture\_sum**

uint8\_t **drag\_limit\_out**

uint8\_t **drag\_in\_prog**

```

    lv_drag_dir_t drag_dir
    uint8_t gesture_sent
    struct _lv_indev_proc_t::[anonymous]::[anonymous] pointer
    lv_indev_state_t last_state
    uint32_t last_key
    struct _lv_indev_proc_t::[anonymous]::[anonymous] keypad
    union _lv_indev_proc_t::[anonymous] types
    uint32_t pr_timestamp
        Pressed time stamp
    uint32_t longpr_rep_timestamp
        Long press repeat time stamp
    uint8_t long_pr_sent
    uint8_t reset_query
    uint8_t disabled
    uint8_t wait_until_release
struct _lv_indev_t
    #include <lv_hal_indev.h> The main input device descriptor with driver, runtime data ( 'proc' )
    and some additional information

```

### Public Members

```

    lv_indev_drv_t driver
    lv_indev_proc_t proc
    struct _lv_obj_t *cursor
        Cursor for LV_INPUT_TYPE_POINTER
    struct _lv_group_t *group
        Keypad destination group
    const lv_point_t *btn_points
        Array points assigned to the button ()screen will be pressed here by the buttons

```

### Tick interface

The LittlevGL needs a system tick to know the elapsed time for animation and other tasks.

You need to call the `lv_tick_inc(tick_period)` function periodically and tell the call period in milliseconds. For example, `lv_tick_inc(1)` for calling in every millisecond.

`lv_tick_inc` should be called in a higher priority routine than `lv_task_handler()` (e.g. in an interrupt) to precisely know the elapsed milliseconds even if the execution of `lv_task_handler` takes longer time.

With FreeRTOS `lv_tick_inc` can be called in `vApplicationTickHook`.

On Linux based operating system (e.g. on Raspberry Pi) `lv_tick_inc` can be called in a thread as below:

```
void * tick_thread (void *args)
{
    while(1) {
        usleep(5*1000); /*Sleep for 5 millisecond*/
        lv_tick_inc(5); /*Tell LittlevGL that 5 milliseconds were elapsed*/
    }
}
```

## API

Provide access to the system tick with 1 millisecond resolution

### Functions

uint32\_t **lv\_tick\_get**(void)

Get the elapsed milliseconds since start up

**Return** the elapsed milliseconds

uint32\_t **lv\_tick\_elaps**(uint32\_t *prev\_tick*)

Get the elapsed milliseconds since a previous time stamp

**Return** the elapsed milliseconds since ‘prev\_tick’

**Parameters**

- **prev\_tick**: a previous time stamp (return value of `systick_get()` )

### Task Handler

To handle the tasks of LittlevGL you need to call `lv_task_handler()` periodically in one of the followings:

- *while(1)* of *main()* function
- timer interrupt periodically (low priority then `lv_tick_inc()`)
- an OS task periodically

The timing is not critical but it should be about 5 milliseconds to keep the system responsive.

Example:

```
while(1) {
    lv_task_handler();
    my_delay_ms(5);
}
```

To learn more about task visit the [Tasks](#) section.

### Sleep management

The MCU can go to sleep when no user input happens. In this case, the main `while(1)` should look like this:

```
while(1) {
    /*Normal operation (no sleep) in < 1 sec inactivity*/
    if(lv_disp_get_inactive_time(NULL) < 1000) {
        lv_task_handler();
    }
    /*Sleep after 1 sec inactivity*/
    else {
        timer_stop(); /*Stop the timer where lv_tick_inc() is called*/
        sleep();      /*Sleep the MCU*/
    }
    my_delay_ms(5);
}
```

You should also add below lines to your input device read function if a wake-up (press, touch or click etc.) happens:

```
lv_tick_inc(LV_DISP_DEF_REFR_PERIOD); /*Force task execution on wake-up*/
timer_start(); /*Restart the timer where lv_tick_inc() is
↳called*/
lv_task_handler(); /*Call `lv_task_handler()` manually to process
↳the wake-up event*/
```

In addition to `lv_disp_get_inactive_time()` you can check `lv_anim_count_running()` to see if every animations are finished.

## Operating system and interrupts

LittlevGL is **not thread-safe** by default.

However, in the following conditions it's valid to call LittlevGL related functions:

- In *events*. Learn more in [Events](#).
- In *lv\_tasks*. Learn more in [Tasks](#).

## Tasks and threads

If you need to use real tasks or threads, you need a mutex which should be invoked before the call of `lv_task_handler` and released after it. Also, you have to use the same mutex in other tasks and threads around every LittlevGL (`lv_...`) related function calls and codes. This way you can use LittlevGL in a real multitasking environment. Just make use of a mutex to avoid the concurrent calling of LittlevGL functions.

## Interrupts

Try to avoid calling LittlevGL functions from the interrupts (except `lv_tick_inc()` and `lv_disp_flush_ready()`). But, if you need to do this you have to disable the interrupt which uses LittlevGL functions while `lv_task_handler` is running. It's a better approach to set a flag or some value and periodically check it in an `lv_task`.

## Logging

LittlevGL has built-in *log* module to inform the user about what is happening in the library.



## Log level

To enable logging, set `LV_USE_LOG 1` in `lv_conf.h` and set `LV_LOG_LEVEL` to one of the following values:

- `LV_LOG_LEVEL_TRACE` A lot of logs to give detailed information
- `LV_LOG_LEVEL_INFO` Log important events
- `LV_LOG_LEVEL_WARN` Log if something unwanted happened but didn't cause a problem
- `LV_LOG_LEVEL_ERROR` Only critical issue, when the system may fail
- `LV_LOG_LEVEL_NONE` Do not log anything

The events which have a higher level than the set log level will be logged too. E.g. if you `LV_LOG_LEVEL_WARN`, *errors* will be also logged.

## Logging with printf

If your system supports `printf`, you just need to enable `LV_LOG_PRINTF` in `lv_conf.h` to send the logs with `printf`.

## Custom log function

If you can't use `printf` or want to use a custom function to log, you can register a “logger” callback with `lv_log_register_print_cb()`.

For example:

```
void my_log_cb(lv_log_level_t level, const char * file, int line, const char * dsc)
{
    /*Send the logs via serial port*/
    if(level == LV_LOG_LEVEL_ERROR) serial_send("ERROR: ");
    if(level == LV_LOG_LEVEL_WARN)  serial_send("WARNING: ");
    if(level == LV_LOG_LEVEL_INFO)  serial_send("INFO: ");
    if(level == LV_LOG_LEVEL_TRACE) serial_send("TRACE: ");

    serial_send("File: ");
    serial_send(file);

    char line_str[8];
    sprintf(line_str, "%d", line);
    serial_send("#");
    serial_send(line_str);

    serial_send(": ");
    serial_send(dsc);
    serial_send("\n");
}

...

lv_log_register_print_cb(my_log_cb);
```

## Add logs

You can also use the log module via the `LV_LOG_TRACE/INFO/WARN/ERROR(description)` functions.

## 3.16.3 Overview

### Objects

In the LittlevGL the **basic building blocks** of a user interface are the objects, also called *Widgets*. For example a *Button*, *Label*, *Image*, *List*, *Chart* or *Text area*.

Check all the *Object types* here.

### Object attributes

#### Basic attributes

All object types share some basic attributes:

- Position
- Size
- Parent
- Drag enable
- Click enable etc.

You can set/get these attributes with `lv_obj_set_...` and `lv_obj_get_...` functions. For example:

```
/*Set basic object attributes*/
lv_obj_set_size(btn1, 100, 50);           /*Button size*/
lv_obj_set_pos(btn1, 20,30);             /*Button position*/
```

To see all the available functions visit the Base object' s *documentation*.

#### Specific attributes

The object types have special attributes too. For example, a slider has

- Min. max. values
- Current value
- Custom styles

For these attributes, every object type have unique API functions. For example for a slider:

```
/*Set slider specific attributes*/
lv_slider_set_range(slider1, 0, 100);           /*Set min. and max. values*/
lv_slider_set_value(slider1, 40, LV_ANIM_ON);    /*Set the current value,
↪(position)*/
lv_slider_set_action(slider1, my_action);        /*Set a callback function*/
```

The API of the object types are described in their *Documentation* but you can also check the respective header files (e.g. `lv_objx/lv_slider.h`)

## Object' s working mechanisms

### Parent-child structure

A parent object can be considered as the container of its children. Every object has exactly one parent object (except screens), but a parent can have an unlimited number of children. There is no limitation for the type of the parent but, there are typical parent (e.g. button) and typical child (e.g. label) objects.

### Moving together

If the position of the parent is changed the children will move with the parent. Therefore all positions are relative to the parent.


The (0;0) coordinates mean the objects will remain in the top left-hand corner of the parent independently from the position of the parent.



```
lv_obj_t * par = lv_obj_create(lv_scr_act(), NULL); /*Create a parent object on the
↳current screen*/
lv_obj_set_size(par, 100, 80); /*Set the size of the
↳parent*/

lv_obj_t * obj1 = lv_obj_create(par, NULL); /*Create an object on the
↳previously created parent object*/
lv_obj_set_pos(obj1, 10, 10); /*Set the position of the new
↳object*/
```

Modify the position of the parent:

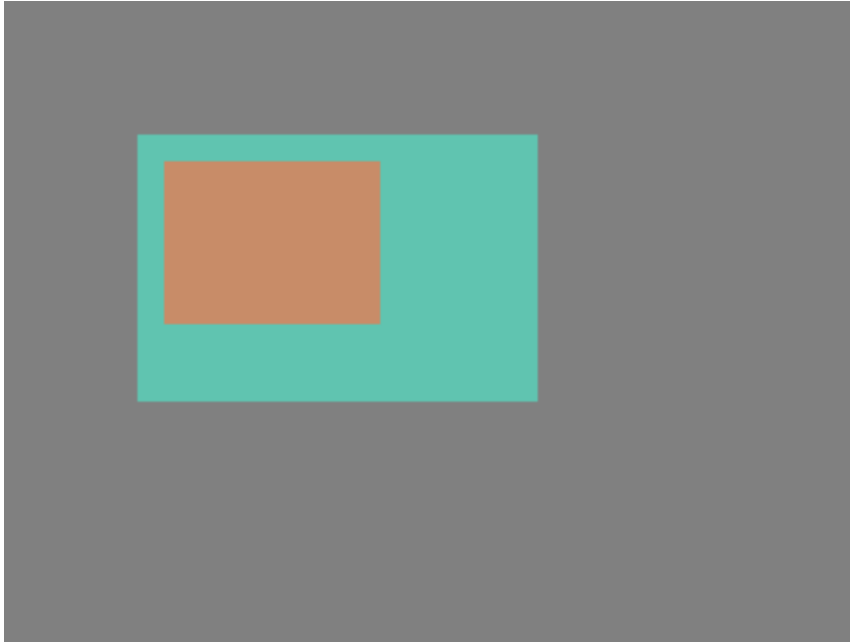

```
lv_obj_set_pos(par, 50, 50);           /*Move the parent. The child will move with it.*/
```

(For simplicity the adjusting of colors of the objects is not shown in the example.)

### Visibility only on the parent

If a child is partially or fully out of its parent then the parts outside will not be visible.



```
lv_obj_set_x(obj1, -30);                /*Move the child a little bit of the parent*/
```

## Create - delete objects

In LittlevGL objects can be created and deleted dynamically in run-time. It means only the currently created objects consume RAM. For example, if you need a chart, you can create it when required and delete it when it is not visible or necessary.

Every object type has its own **create** function with a unified prototype. It needs two parameters:

- A pointer to the *parent* object. To create a screen give *NULL* as parent.
- Optionally, a pointer to *copy* object with the same type to copy it. This *copy* object can be *NULL* to avoid the copy operation.

All objects are referenced in C code using an `lv_obj_t` pointer as a handle. This pointer can later be used to set or get the attributes of the object.

The create functions look like this:

```
lv_obj_t * lv_<type>_create(lv_obj_t * parent, lv_obj_t * copy);
```

There is a common **delete** function for all object types. It deletes the object and all of its children.

```
void lv_obj_del(lv_obj_t * obj);
```

`lv_obj_del` will delete the object immediately. If for any reason you can't delete the object immediately you can use `lv_obj_del_async(obj)`. It is useful e.g. if you want to delete the parent of an object in the child's `LV_EVENT_DELETE` signal.

You can remove all the children of an object (but not the object itself) using `lv_obj_clean`:

```
void lv_obj_clean(lv_obj_t * obj);
```

## Screen – the most basic parent

The screens are special objects which have no parent object. So it is created like:

```
lv_obj_t * scr1 = lv_obj_create(NULL, NULL);
```

There is always an active screen on each display. By default, the library creates and loads a “Base object” as the screen for each display. To get the currently active screen use the `lv_scr_act()` function. To load a new one, use `lv_scr_load(scr1)`.

Screens can be created with any object type. For example, a *Base object* or an image to make a wallpaper.

Screens are created on the currently selected *default display*. The *default screen* is the last registered screen with `lv_disp_drv_register` or you can explicitly select a new default display using `lv_disp_set_default(display)`. `lv_scr_act()` and `lv_scr_load()` operate on the currently default screen.


Visit [Multi-display support](#) to learn more.

## Layers

### Order of creation

By default, LittlevGL draws old objects on the background and new objects on the foreground.

For example, assume we added a button to a parent object named button1 and then another button named button2. Then button1 (with its child object(s)) will be in the background and can be covered by button2 and its children.

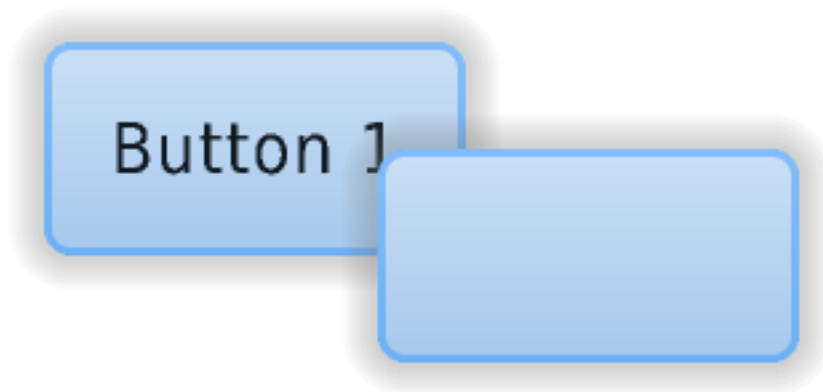

```
/*Create a screen*/
lv_obj_t * scr = lv_obj_create(NULL, NULL);
lv_scr_load(scr);          /*Load the screen*/

/*Create 2 buttons*/
lv_obj_t * btn1 = lv_btn_create(scr, NULL);          /*Create a button on the screen*/
lv_btn_set_fit(btn1, true, true);                    /*Enable to automatically set the
↪size according to the content*/
lv_obj_set_pos(btn1, 60, 40);                        /*Set the position of the
↪button*/

lv_obj_t * btn2 = lv_btn_create(scr, btn1);          /*Copy the first button*/
lv_obj_set_pos(btn2, 180, 80);                      /*Set the position of the button*/

/*Add labels to the buttons*/
lv_obj_t * label1 = lv_label_create(btn1, NULL);     /*Create a label on the first
↪button*/
lv_label_set_text(label1, "Button 1");               /*Set the text of the label*/

lv_obj_t * label2 = lv_label_create(btn2, NULL);     /*Create a label on the
↪second button*/
lv_label_set_text(label2, "Button 2");               /*Set the text of the
↪label*/

/*Delete the second label*/
lv_obj_del(label2);
```

### Bring to the foreground

There are several ways to bring an object to the foreground:

- Use `lv_obj_set_top(obj, true)`. If `obj` or any of its children is clicked, then LittlevGL will automatically bring the object to the foreground. It works similarly to a typical GUI on a PC. When a window in the background is clicked, it will come to the foreground automatically.
- Use `lv_obj_move_foreground(obj)` to explicitly tell the library to bring an object to the foreground. Similarly, use `lv_obj_move_background(obj)` to move to the background.
- When `lv_obj_set_parent(obj, new_parent)` is used, `obj` will be on the foreground on the `new_parent`.

## Top and sys layers

LittlevGL uses two special layers named as `layer_top` and `layer_sys`. Both are visible and common on all screens of a display. **They are not, however, shared among multiple physical displays.** The `layer_top` is always on top of the default screen (`lv_scr_act()`), and `layer_sys` is on top of `layer_top`.

The `layer_top` can be used by the user to create some content visible everywhere. For example, a menu bar, a pop-up, etc. If the `click` attribute is enabled, then `layer_top` will absorb all user click and acts as a modal.

```
lv_obj_set_click(lv_layer_top(), true);
```

The `layer_sys` is also using for similar purpose on LittlevGL. For example, it places the mouse cursor there to be sure it's always visible.

## Events

Events are triggered in LittlevGL when something happens which might be interesting to the user, e.g. if an object:

- is clicked
- is dragged
- its value has changed, etc.

The user can assign a callback function to an object to see these events. In practice, it looks like this:

```
lv_obj_t * btn = lv_btn_create(lv_scr_act(), NULL);
lv_obj_set_event_cb(btn, my_event_cb); /*Assign an event callback*/

...

static void my_event_cb(lv_obj_t * obj, lv_event_t event)
{
    switch(event) {
        case LV_EVENT_PRESSED:
            printf("Pressed\n");
            break;

        case LV_EVENT_SHORT_CLICKED:
            printf("Short clicked\n");
            break;

        case LV_EVENT_CLICKED:
            printf("Clicked\n");
```

(continues on next page)

(continued from previous page)

```

        break;

    case LV_EVENT_LONG_PRESSED:
        printf("Long press\n");
        break;

    case LV_EVENT_LONG_PRESSED_REPEAT:
        printf("Long press repeat\n");
        break;

    case LV_EVENT_RELEASED:
        printf("Released\n");
        break;
}

/*Etc.*/
}

```

More objects can use the same *event callback*.

## Event types

The following event types exist:

### Generic events

All objects (such as Buttons/Labels/Sliders etc.) receive these generic events regardless of their type.

### Related to the input devices

These are sent when an object is pressed/released etc. by the user. They are used not only for *Pointers* but can be used for *Keypad*, *Encoder* and *Button* input devices as well. Visit the [Overview of input devices](#) section to learn more about them.

- **LV\_EVENT\_PRESSED** The object has been pressed
- **LV\_EVENT\_PRESSING** The object is being pressed (sent continuously while pressing)
- **LV\_EVENT\_PRESS\_LOST** The input device is still being pressed but is no longer on the object
- **LV\_EVENT\_SHORT\_CLICKED** Released before **LV\_INDEV\_LONG\_PRESS\_TIME** time. Not called if dragged.
- **LV\_EVENT\_LONG\_PRESSED** Pressing for **LV\_INDEV\_LONG\_PRESS\_TIME** time. Not called if dragged.
- **LV\_EVENT\_LONG\_PRESSED\_REPEAT** Called after **LV\_INDEV\_LONG\_PRESS\_TIME** in every **LV\_INDEV\_LONG\_PRESS\_REPEAT\_TIME** ms. Not called if dragged.
- **LV\_EVENT\_CLICKED** Called on release if not dragged (regardless to long press)
- **LV\_EVENT\_RELEASED** Called in every case when the object has been released even if it was dragged. Not called if slid from the object while pressing and released outside of the object. In this case, **LV\_EVENT\_PRESS\_LOST** is sent.



## Related to pointer

These events are sent only by pointer-like input devices (E.g. mouse or touchpad)

- **LV\_EVENT\_DRAG\_BEGIN** Dragging of the object has started
- **LV\_EVENT\_DRAG\_END** Dragging finished (including drag throw)
- **LV\_EVENT\_DRAG\_THROW\_BEGIN** Drag throw started (released after drag with “momentum” )

## Related to keypad and encoder

These events are sent by keypad and encoder input devices. Learn more about *Groups* in [overview/indev](Input devices) section.

- **LV\_EVENT\_KEY** A *Key* is sent to the object. Typically when it was pressed or repeated after a long press
- **LV\_EVENT\_FOCUSED** The object is focused in its group
- **LV\_EVENT\_DEFOCUSED** The object is defocused in its group

## General events

Other general events sent by the library.

- **LV\_EVENT\_DELETE** The object is being deleted. Free the related user-allocated data.

## Special events

These events are specific to a particular object type.

- **LV\_EVENT\_VALUE\_CHANGED** The object value has changed (e.g. for a *Slider*)
- **LV\_EVENT\_INSERT** Something is inserted to the object. (Typically to a *Text area*)
- **LV\_EVENT\_APPLY** “Ok” , “Apply” or similar specific button has clicked. (Typically from a *Keyboard* object)
- **LV\_EVENT\_CANCEL** “Close” , “Cancel” or similar specific button has clicked. (Typically from a *Keyboard* object)
- **LV\_EVENT\_REFRESH** Query to refresh the object. Never sent by the library but can be sent by the user.

Visit particular *Object type’ s documentation* to understand which events are used by an object type.

## Custom data

Some events might contain custom data. For example, **LV\_EVENT\_VALUE\_CHANGED** in some cases tells the new value. For more information, see the particular *Object type’ s documentation*. To get the custom data in the event callback use `lv_event_get_data()`.

The type of the custom data depends on the sending object but if it’ s a

- single number then it’ s `uint32_t *` or `int32_t *`

- text then `char *` or `const char *`

### Send events manually

To manually send events to an object, use `lv_event_send(obj, LV_EVENT_..., &custom_data)`.

For example, it can be used to manually close a message box by simulating a button press (although there are simpler ways of doing this):

```
/*Simulate the press of the first button (indexes start from zero)*/
uint32_t btn_id = 0;
lv_event_send(mbox, LV_EVENT_VALUE_CHANGED, &btn_id);
```

Or to perform refresh generically:

```
lv_event_send(label, LV_EVENT_REFRESH, NULL);
```

### Styles

*Styles* are used to set the appearance of the objects. Styles in lvgl are heavily inspired by CSS. The concept in nutshell is the following:

- A style is an `lv_style_t` variable which can hold properties, for example border width, text color and so on. It's similar to `class` in CSS.
- Not all properties have to be specified. Unspecified properties will use a default value.
- Styles can be assigned to objects to change their appearance.
- A style can be used by any number of objects.
- Styles can be cascaded which means multiple styles can be assigned to an object and each style can have different properties. For example `style_btn` can result in a default gray button and `style_btn_red` can add only a `background-color=red` to overwrite the background color.
- Later added styles have higher precedence. It means if a property is specified in two styles the later added will be used.
- Some properties (e.g. text color) can be inherited from the parent(s) if it's not specified in the object.
- Objects can have local styles which has higher precedence than "normal" styles.
- Unlike CSS (where pseudo classes describes different states, e.g. `:hover`), in lvgl a property is assigned to a given state.
- Transition can be applied when the object changes state.

### States

The objects can be in the following states:

- `LV_STATE_DEFAULT` (0x00): Normal, released
- `LV_STATE_CHECKED` (0x01): Toggled or checked
- `LV_STATE_FOCUSED` (0x02): Focused via keypad or encoder or clicked via touchpad/mouse
- `LV_STATE_EDITED` (0x04): Edit by an encoder

- **LV\_STATE\_HOVERED** (0x08): Hovered by mouse (not supported now)
- **LV\_STATE\_PRESSED** (0x10): Pressed
- **LV\_STATE\_DISABLED** (0x20): Disabled or inactive

Combination of states are also possible, for example **LV\_STATE\_FOCUSED | LV\_STATE\_PRESSED**.

The styles properties can be defined in every state and state combination. For example setting different background color for default and pressed state. If a property is not defined in a state the best matching state's property will be used. Typically it means the property with **LV\_STATE\_DEFAULT** state. If the property is not set even for the default state the default value will be used. (See later)

But what does the “best matching state's property” really means? States has a precedence which is shown by their value (see in the above list). A higher value means a higher precedence. To determine which state's property to use let's use an example. Let's see the background color is defined like this:

- **LV\_STATE\_DEFAULT**: white
- **LV\_STATE\_PRESSED**: gray
- **LV\_STATE\_FOCUSED**: red

1. By the default the object is in default state, so it's a simple case: the property is perfectly defined in object's current state as white
2. When the object is pressed there are 2 related properties: default with white (default is related to every state) and pressed with gray. The pressed state has 0x10 precedence which is higher than the default state's 0x00 precedence, so gray color will be used.
3. When the object is focused the same thing happens as in pressed state and red color will be used.
4. When the object is focused and pressed both gray and red would work, but the pressed state has higher precedence than focused so gray color will be used.
5. It's possible to set e.g. rose color for **LV\_STATE\_PRESSED | LV\_STATE\_FOCUSED**. In this case this combined state has  $0x2 + 0x10 = 0x12$  precedence, which is higher than the pressed states precedence so rose color would be used.
6. When the object is checked there is no property to set the background color for this state. So in lack of a better option the object remains white from the default state's property.

## Cascading styles

It's not required to set all the properties in one style. It's possible to add more styles to an object and let the later added style to modify or extend the properties in the other styles. For example, create a general gray button style and create a new one for red buttons where only the new background color is set.

It's the same concept when in CSS all the used classes are listed like `<div class=".btn .btn-red">`.

The later added styles has higher precedence over the earlier ones. So from the previous gray/red the red background color will overwrite the gray background color. However the precedence coming from states are still taken into account. So let's examine the following case:

- the basic button style defines dark-gray color for default state and light-gray color pressed state
- the red button style sets the background color to red only in the default state

In this case when the button is pressed the light-gray color is a better match because it describes the current state perfectly.

## Inheritance

Some properties (typically that are related to texts) can be inherited from the parent object's styles. Inheritance is applied only if the given property is not set in the object's styles (even in default state). In this case, if the property is inheritable, the properties value will be searched in the parent too until a part can tell a value for the property. The parents will use their own state to tell the value. So is button is pressed, and text color comes from here, the pressed text color will be used.

## Part of the objects

Objects can have *parts* which can have their own style. For example a *page* has four parts:

- Background
- Scrollable
- Scrollbar
- Edge flash

)

There is three type of of object parts **main**, **virtual** and **real**.

The main part is usually the background and largest part of the object. Some object has only has main part. For example a button has only a background.

The virtual parts are additional parts just drawn on the fly to the main part. There is no “real” object behind them. For example the page's scrollbar is not a real object, it's just drawn when the page's background is drawn. The virtual parts always have the same state as the main part. If the property can be inherited, the main part will be also considered before going to the parent.

The real parts are real objects created and managed by the main object. For example the page's scrollable part is real object. Real parts can be in different state than the main part.

To see which parts an object has see their documentation.

## Initialize styles and set/get properties

Styles are stored in `lv_style_t` variables. Style variables should be **static**, global or dynamically allocated. In other words they can not be local variables in functions which are destroyed when the function exists. Before using a style it should be initialized with `lv_style_init(&my_style)`. After initializing the style properties can be set added to it. Property set functions looks like this: `lv_style_set_<property_name>(&style, <state>, <value>)`; For example the *above mentioned* example looks like this:

```
static lv_style_t style1;
lv_style_set_bg_color(&style1, LV_STATE_DEFAULT, LV_COLOR_WHITE);
lv_style_set_bg_color(&style1, LV_STATE_PRESSED, LV_COLOR_GRAY);
lv_style_set_bg_color(&style1, LV_STATE_FOCUSED, LV_COLOR_RED);
lv_style_set_bg_color(&style1, LV_STATE_FOCUSED | LV_STATE_PRESSED, lv_color_
↪ hex(0xf88));
```

It's possible to copy a style with `lv_style_copy(&style_destination, &style_source)`. After copy properties still can be added freely.

To remove a property use:

```
lv_style_remove_prop(&style, LV_STYLE_BG_COLOR | (LV_STATE_PRESSED << LV_STYLE_STATE_POS));
```

To get the value from style in a state functions with the following prototype are available: `lv_style_get_<property_name>(&style, <state>, <result pointer>);`. The the best matching property will be selected and it's precedence will be returned. -1 will be returned if the property is not found. For example:

```
lv_color_t color;
int16_t res;
res = lv_style_get_bg_color(&style1, LV_STATE_PRESSED, &color);
if(res >= 0) {
    //the bg_color is loaded into `color`
}
```

To reset a style (free all it's data) use

```
lv_style_reset(&style);
```

## Managing style list

A style on it's own not that useful. It should be assigned to an object to take its effect. Every part of the objects store a *style list* which is the list of assigned styles.

To add a style to an object use `lv_obj_add_style(obj, <part>, &style)` For example:

```
lv_obj_add_style(btn, LV_BTN_PART_MAIN, &btn); //Default button style*/
lv_obj_add_style(btn, LV_BTN_PART_MAIN, &btn_red); /*Overwrite only a some colors to red*/
```

An objects style list can be reset with `lv_obj_reset_style_list(obj, <part>)`

If a style which is already assigned to an object changes (i.e. one of it's property is set to a new value) the objects using that style should be notified with `lv_obj_refresh_style(obj)`

To get a final value of property, including cascading, inheritance, local styles and transitions (see below), get functions like this can be used: `lv_obj_get_style_<property_name>(obj, <part>)`. These functions uses the object's current state and if no better candidate returns a default value. For example:

```
lv_color_t color = lv_obj_get_style_bg_color(btn, LV_BTN_PART_MAIN);
```

## Local styles

In the object's style lists so called local properties can be stored as well. It's the same concept than CSS's `<div style="color:red">`. The local style just like a normal style created only for a given object.

To set a local property use functions like `lv_obj_set_style_local_<property_name>(obj, <part>, <state>, <value>);` For example:

```
lv_obj_set_style_local_bg_color(btn, LV_BTN_PART_MAIN, LV_STATE_DEFAULT, LV_COLOR_RED);
```

## Transitions

By default, when an object changes state (e.g. it's pressed) the new properties from the new state are set immediately. However with transitions it's possible to play an animation of value change. For example, on pressing a button its background color can be animated to the pressed color over 300 ms.

The parameters of the transitions are stored in the styles. It's possible to set

- the time of the transition
- the delay before starting the transition
- the animation path (also known as timing function)
- the properties to animate

The transition properties can be defined for each state. For example setting 500 ms transition time in default state will mean that when the object goes to default state 500 ms transition time will be applied. Setting 100 ms transition time in pressed state will mean 100 ms transition time when going to pressed state. In summary, this configuration will result in fast going to pressed state and slow going back to default.

## Properties

The following properties can be used in the styles.

### Mixed properties

- **radius** (`lv_style_int_t`): Set the radius of the background. 0: no radius, `LV_RADIUS_CIRCLE`: maximal radius.
- **clip\_corner** (`bool`): **true**: enable to clip the overflowed content on the rounded (`radius > 0`) corners.
- **size** (`lv_style_int_t`): Size of internal elements of the widgets. See the documentation of the widgets if this property is used or not.
- **transform\_width** (`lv_style_int_t`): Make the object wider on both sides with this value.
- **transform\_height** (`lv_style_int_t`): Make the object higher on both sides with this value.
- **opa\_scale** (`lv_style_int_t`): Inherited. Scale down all opacity values of the object by this factor. As it's inherited the children objects will be affected too.

### Padding properties

Set the space on the edges and between the children objects. Typically used by *Container* object if *layout* or *auto fit* is enabled. However other widgets also use them to set spacing. See the documentation of the widgets for the details.

- **pad\_top** (`lv_style_int_t`): Set the padding on the top.
- **pad\_bottom** (`lv_style_int_t`): Set the padding on the bottom.
- **pad\_left** (`lv_style_int_t`): Set the padding on the left.
- **pad\_right** (`lv_style_int_t`): Set the padding on the right.
- **pad\_inner** (`lv_style_int_t`): Set the padding inside the object between children.

## Background properties

The background is a simple rectangle which can have gradient and **radius** rounding.

- **bg\_color** (`lv_color_t`) Specifies the color of the background. Default value: `LV_COLOR_WHITE`
- **bg\_opa** (`lv_opa_t`) Specifies opacity of the background. Default value: `LV_OPA_TRANSP`.
- **bg\_grad\_color** (`lv_color_t`) Specifies the color of the background's gradient. The color on the right or bottom is **bg\_grad\_dir** `!= LV_GRAD_DIR_NONE`. Default value: `LV_COLOR_WHITE`.
- **bg\_main\_stop** (`uint8_t`): Specifies where should the gradient start. 0: at left/top most position, 255: at right/bottom most position.
- **bg\_grad\_stop** (`uint8_t`): Specifies where should the gradient start. 0: at left/top most position, 255: at right/bottom most position. Default value: 255.
- **bg\_grad\_dir** (`lv_grad_dir_t`) Specifies the direction of the gradient. Can be `LV_GRAD_DIR_NONE/HOR/VER`. Default value: `LV_GRAD_DIR_NONE`.
- **bg\_blend\_mode** (`lv_blend_mode_t`): Set the blend mode the background. Can be `LV_BLEND_MODE_NORMAL/ADDITIVE/SUBTRACTIVE`). Default value: `LV_BLEND_MODE_NORMAL`.



```
#include "lvgl/lvgl.h"

/**
 * Using the background style properties
 */
void lv_ex_style_1(void)
{
    static lv_style_t style;
    lv_style_init(&style);
    lv_style_set_radius(&style, LV_STATE_DEFAULT, 5);

    /*Make a gradient*/
    lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);
}
```

(continues on next page)

(continued from previous page)

```
lv_style_set_bg_grad_color(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
lv_style_set_bg_grad_dir(&style, LV_STATE_DEFAULT, LV_GRAD_DIR_VER);


/*Shift the gradient to the bottom*/
lv_style_set_bg_main_stop(&style, LV_STATE_DEFAULT, 128);
lv_style_set_bg_grad_stop(&style, LV_STATE_DEFAULT, 192);

/*Create an object with the new style*/
lv_obj_t * obj = lv_obj_create(lv_scr_act(), NULL);
lv_obj_add_style(obj, LV_OBJ_PART_MAIN, &style);
lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);
}
```

## Border properties

The border is drawn on top of the *background*. It has **radius** rounding.

- **border\_color** (`lv_color_t`) Specifies the color of the border.
- **border\_opa** (`lv_opa_t`) Specifies opacity of the border.
- **border\_width** (`lv_style_int_t`): Set the width of the border.
- **border\_side** (`lv_border_side_t`) Specifies which sides of the border to draw. Can be `LV_BORDER_SIDE_NONE/LEFT/RIGHT/TOP/BOTTOM/FULL`. ORed values are also possible. Default value: `LV_BORDER_SIDE_FULL`.
- **border\_post** (`bool`): If `true` the border will be drawn after children has been drawn.
- **border\_blend\_mode** (`lv_blend_mode_t`): Set the blend mode of the border. Can be `LV_BLEND_MODE_NORMAL/ADDITIVE/SUBTRACTIVE`). Default value: `LV_BLEND_MODE_NORMAL`.

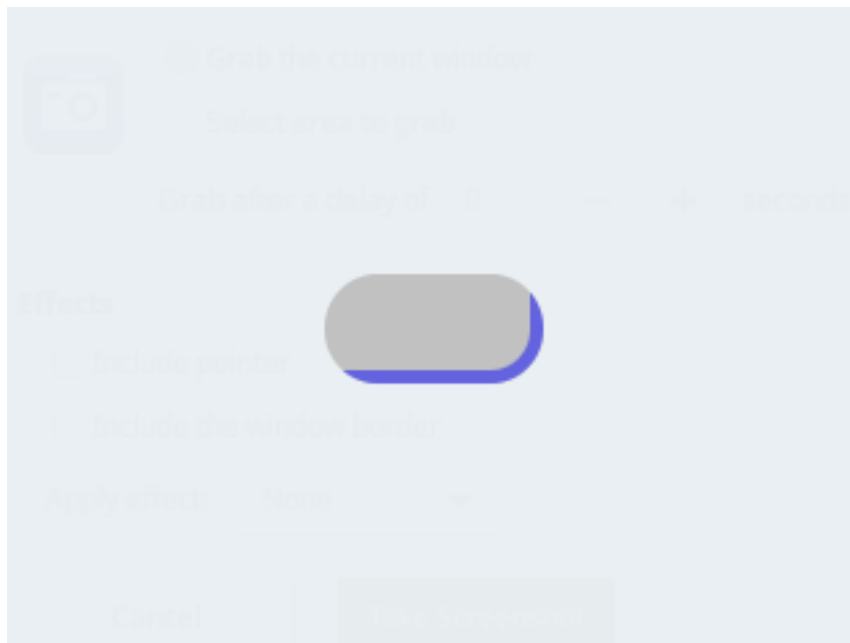



```
#include "lvgl/lvgl.h"

/**
 * Using the border style properties
 */
void lv_ex_style_2(void)
{
    static lv_style_t style;
    lv_style_init(&style);

    /*Set a background color and a radius*/
    lv_style_set_radius(&style, LV_STATE_DEFAULT, 20);
    lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);


    /*Add border to the bottom+right*/
    lv_style_set_border_color(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
    lv_style_set_border_width(&style, LV_STATE_DEFAULT, 5);
    lv_style_set_border_opa(&style, LV_STATE_DEFAULT, LV_OPA_50);
    lv_style_set_border_side(&style, LV_STATE_DEFAULT, LV_BORDER_SIDE_BOTTOM | LV_
↪BORDER_SIDE_RIGHT);

    /*Create an object with the new style*/
    lv_obj_t * obj = lv_obj_create(lv_scr_act(), NULL);
    lv_obj_add_style(obj, LV_OBJ_PART_MAIN, &style);
    lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);
}
```

## Outline properties

The outline is similar to *border* but is drawn outside of the object.

- **outline\_color** (`lv_color_t`) Specifies the color of the outline.
- **outline\_opa** (`lv_opa_t`) Specifies opacity of the outline.
- **outline\_width** (`lv_style_int_t`): Set the width of the outline.
- **outline\_pad** (`lv_style_int_t`) Set the space between the object and the outline.
- **outline\_blend\_mode** (`lv_blend_mode_t`): Set the blend mode of the outline. Can be `LV_BLEND_MODE_NORMAL`/`ADDITIVE`/`SUBTRACTIVE`). Default value: `LV_BLEND_MODE_NORMAL`.

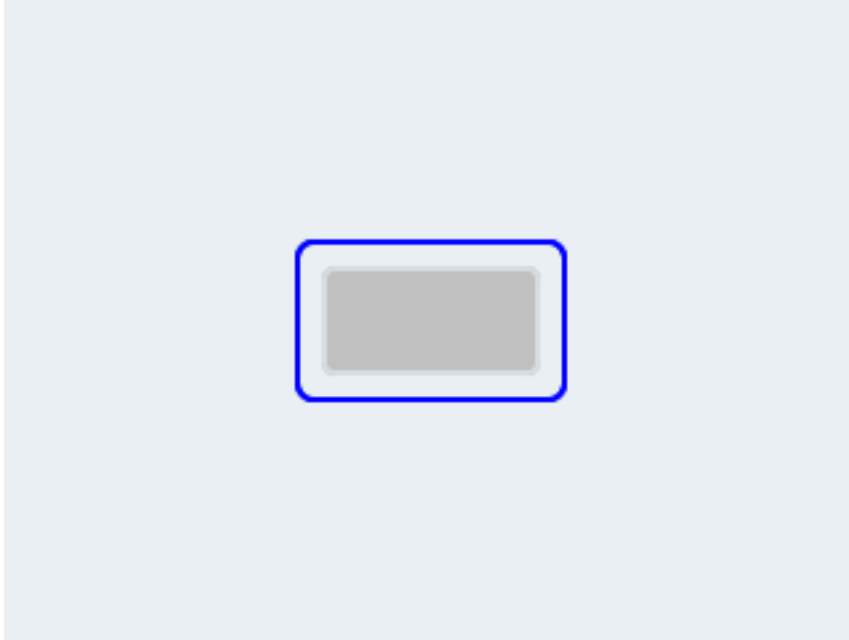

```
#include "lvgl/lvgl.h"

/**
 * Using the outline style properties
 */
void lv_ex_style_3(void)
{
    static lv_style_t style;
    lv_style_init(&style);

    /*Set a background color and a radius*/
    lv_style_set_radius(&style, LV_STATE_DEFAULT, 5);
    lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);

    /*Add outline*/
    lv_style_set_outline_width(&style, LV_STATE_DEFAULT, 2);
    lv_style_set_outline_color(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
    lv_style_set_outline_pad(&style, LV_STATE_DEFAULT, 8);


    /*Create an object with the new style*/
    lv_obj_t * obj = lv_obj_create(lv_scr_act(), NULL);
    lv_obj_add_style(obj, LV_OBJ_PART_MAIN, &style);
    lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);
}
```

## Shadow properties

The shadow is a blurred area under the object.

- **shadow\_color** (`lv_color_t`) Specifies the color of the shadow.
- **shadow\_opa** (`lv_opa_t`) Specifies opacity of the shadow.

- `shadow_width (lv_style_int_t)`: Set the width (blur size) of the outline.
- `shadow_ofs_x (lv_style_int_t)`: Set the an X offset for the shadow.
- `shadow_ofs_y (lv_style_int_t)`: Set the an Y offset for the shadow.
- `shadow_spread (lv_style_int_t)`: ake the shadow larger than the background in every direction by this value.
- `shadow_blend_mode (lv_blend_mode_t)`: Set the blend mode of the shadow. Can be `LV_BLEND_MODE_NORMAL/ADDITIVE/SUBTRACTIVE`). Default value: `LV_BLEND_MODE_NORMAL`.

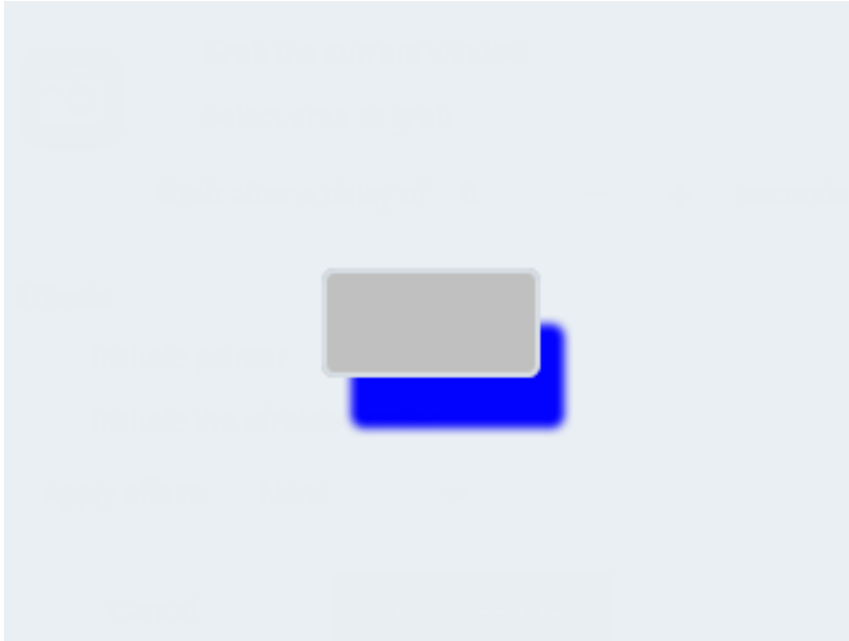

```
#include "lvgl/lvgl.h"

/**
 * Using the Shadow style properties
 */
void lv_ex_style_4(void)
{
    static lv_style_t style;
    lv_style_init(&style);

    /*Set a background color and a radius*/
    lv_style_set_radius(&style, LV_STATE_DEFAULT, 5);
    lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);

    /*Add a shadow*/
    lv_style_set_shadow_width(&style, LV_STATE_DEFAULT, 8);
    lv_style_set_shadow_color(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
    lv_style_set_shadow_ofs_x(&style, LV_STATE_DEFAULT, 10);
    lv_style_set_shadow_ofs_y(&style, LV_STATE_DEFAULT, 20);

    /*Create an object with the new style*/
    lv_obj_t * obj = lv_obj_create(lv_scr_act(), NULL);
    lv_obj_add_style(obj, LV_OBJ_PART_MAIN, &style);
}
```

(continues on next page)

(continued from previous page)

```
lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);
}
```

## Pattern properties

The pattern is an image (or symbol) drawn in the middle of the background or repeated to fill the whole background.

- **pattern\_image** (const void \*): Pointer to an lv\_img\_dsc\_t variable, a path to an image file or a symbol.
- **pattern\_opa** (lv\_opa\_t): Specifies opacity of the pattern.
- **pattern\_recolor** (lv\_color\_t): Mix this color to the pattern image. In case of symbols (texts) it will be the text color.
- **pattern\_recolor\_opa** (lv\_opa\_t): Intensity of recoloring. Default value: LV\_OPA\_TRANSP (no recoloring).
- **pattern\_repeat** (bool): **true**: the pattern will be repeated as a mosaic. **false**: place the pattern in the middle of the background.
- **pattern\_blend\_mode** (lv\_blend\_mode\_t): Set the blend mode of the pattern. Can be LV\_BLEND\_MODE\_NORMAL/ADDITIVE/SUBTRACTIVE). Default value: LV\_BLEND\_MODE\_NORMAL.



```
#include "lvgl/lvgl.h"

/**
 * Using the pattern style properties
 */
void lv_ex_style_5(void)
{
```

(continues on next page)

(continued from previous page)

```

static lv_style_t style;
lv_style_init(&style);

/*Set a background color and a radius*/
lv_style_set_radius(&style, LV_STATE_DEFAULT, 5);
lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);


/*Add a repeating pattern*/
lv_style_set_pattern_image(&style, LV_STATE_DEFAULT, LV_SYMBOL_OK);
lv_style_set_pattern_recolor(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
lv_style_set_pattern_opa(&style, LV_STATE_DEFAULT, LV_OPA_50);
lv_style_set_pattern_repeat(&style, LV_STATE_DEFAULT, true);

/*Create an object with the new style*/
lv_obj_t * obj = lv_obj_create(lv_scr_act(), NULL);
lv_obj_add_style(obj, LV_OBJ_PART_MAIN, &style);
lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);
}
    
```

## Value properties

Value is an arbitrary text drawn to the background. It can be a lightweight replacement of the creating label objects.

- **value\_str** (const char \*): Pointer to text to display. Only the pointer is saved.
- **value\_color** (lv\_color\_t): Color of the text.
- **value\_opa** (lv\_opa\_t): Opacity of the text.
- **value\_font** (const lv\_font\_t \*): Pointer to font of the text.
- **value\_letter\_space** (lv\_style\_int\_t): Letter space of the text.
- **value\_line\_space** (lv\_style\_int\_t): Line space of the text.
- **value\_align** (lv\_align\_t): Alignment of the text. Can be LV\_ALIGN\_....
- **value\_ofs\_x** (lv\_style\_int\_t): X offset from the original position of the alignment.
- **value\_ofs\_y** (lv\_style\_int\_t): Y offset from the original position of the alignment.
- **value\_blend\_mode** (lv\_blend\_mode\_t): Set the blend mode of the text. Can be LV\_BLEND\_MODE\_NORMAL/ADDITIVE/SUBTRACTIVE). Default value: LV\_BLEND\_MODE\_NORMAL.

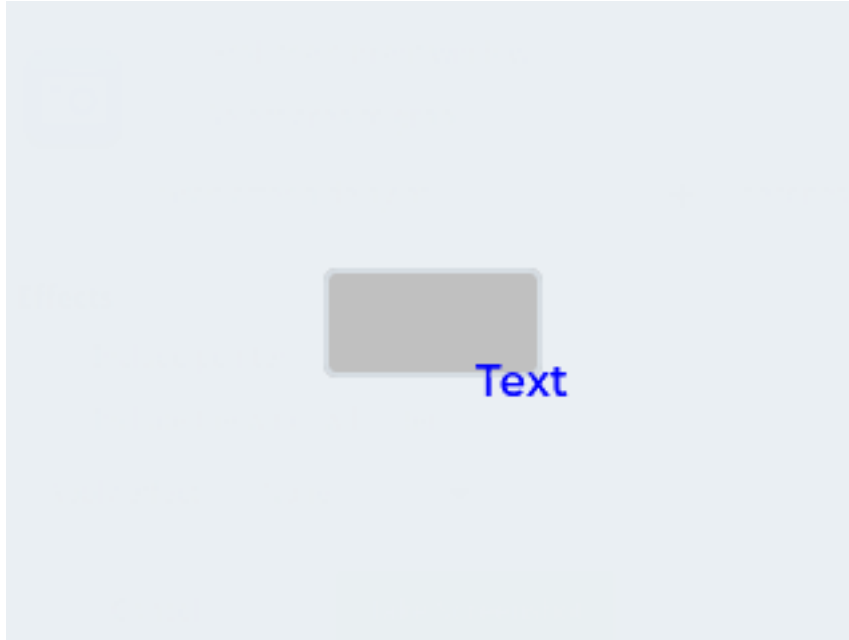

```
#include "lvgl/lvgl.h"

/**
 * Using the value style properties
 */
void lv_ex_style_6(void)
{
    static lv_style_t style;
    lv_style_init(&style);

    /*Set a background color and a radius*/
    lv_style_set_radius(&style, LV_STATE_DEFAULT, 5);
    lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);

    /*Add a value text properties*/
    lv_style_set_value_color(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
    lv_style_set_value_align(&style, LV_STATE_DEFAULT, LV_ALIGN_IN_BOTTOM_RIGHT);
    lv_style_set_value_ofs_x(&style, LV_STATE_DEFAULT, 10);
    lv_style_set_value_ofs_y(&style, LV_STATE_DEFAULT, 10);

    /*Create an object with the new style*/
    lv_obj_t * obj = lv_obj_create(lv_scr_act(), NULL);
    lv_obj_add_style(obj, LV_OBJ_PART_MAIN, &style);
    lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);

    /*Add a value text to the local style. This way every object can have different
    ↪ text*/
    lv_obj_set_style_local_value_str(obj, LV_OBJ_PART_MAIN, LV_STATE_DEFAULT, "Text");
}
```

## Text properties

Properties for textual object.

- **text\_color** (`lv_color_t`): Color of the text.
- **text\_opa** (`lv_opa_t`): Opacity of the text.
- **text\_font** (`const lv_font_t *`): Pointer to font of the text.
- **text\_letter\_space** (`lv_style_int_t`): Letter space of the text.
- **text\_line\_space** (`lv_style_int_t`): Line space of the text.
- **text\_decor** (`lv_text_decor_t`): Add text decoration. Can be `LV_TEXT_DECOR_NONE/UNDERLINE/STRIKETHROUGH`.
- **text\_sel\_color** (`lv_color_t`): Set background color of text selection.
- **text\_blend\_mode** (`lv_blend_mode_t`): Set the blend mode of the text. Can be `LV_BLEND_MODE_NORMAL/ADDITIVE/SUBTRACTIVE`. Default value: `LV_BLEND_MODE_NORMAL`.



```
#include "lvgl/lvgl.h"

/**
 * Using the text style properties
 */
void lv_ex_style_7(void)
{
    static lv_style_t style;
    lv_style_init(&style);

    lv_style_set_radius(&style, LV_STATE_DEFAULT, 5);
    lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);
    lv_style_set_border_width(&style, LV_STATE_DEFAULT, 2);
    lv_style_set_border_color(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
}
```

(continues on next page)

(continued from previous page)

```
lv_style_set_pad_top(&style, LV_STATE_DEFAULT, 10);
lv_style_set_pad_bottom(&style, LV_STATE_DEFAULT, 10);
lv_style_set_pad_left(&style, LV_STATE_DEFAULT, 10);
lv_style_set_pad_right(&style, LV_STATE_DEFAULT, 10);

lv_style_set_text_color(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
lv_style_set_text_letter_space(&style, LV_STATE_DEFAULT, 5);
lv_style_set_text_line_space(&style, LV_STATE_DEFAULT, 20);
lv_style_set_text_decor(&style, LV_STATE_DEFAULT, LV_TEXT_DECOR_UNDERLINE);

/*Create an object with the new style*/
lv_obj_t * obj = lv_label_create(lv_scr_act(), NULL);
lv_obj_add_style(obj, LV_LABEL_PART_MAIN, &style);
lv_label_set_text(obj, "Text of\n"
                    "a label");
lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);
}
```

## Line properties

Properties of lines.

- **line\_color** (`lv_color_t`): Color of the line.
- **line\_opa** (`lv_opa_t`): Opacity of the line.
- **line\_width** (`lv_style_int_t`): Width of the line.
- **line\_dash\_width** (`lv_style_int_t`): Width of dash. Dashing is drawn only for horizontal or vertical lines. 0: disable dash.
- **line\_dash\_gap** (`lv_style_int_t`): Gap between two dash line. Dashing is drawn only for horizontal or vertical lines. 0: disable dash.
- **line\_rounded** (`bool`): `true`: draw rounded line endings.
- **line\_blend\_mode** (`lv_blend_mode_t`): Set the blend mode of the line. Can be `LV_BLEND_MODE_NORMAL/ADDITIVE/SUBTRACTIVE`). Default value: `LV_BLEND_MODE_NORMAL`.

## Image properties

Properties of image.

- **image\_recolor** (`lv_color_t`): Mix this color to the pattern image. In case of symbols (texts) it will be the text color.
- **image\_recolor\_opa** (`lv_opa_t`): Intensity of recoloring. Default value: `LV_OPA TRANSP` (no recoloring).
- **image\_opa** (`lv_opa_t`): Opacity of the image.
- **image\_blend\_mode** (`lv_blend_mode_t`): Set the blend mode of the image. Can be `LV_BLEND_MODE_NORMAL/ADDITIVE/SUBTRACTIVE`). Default value: `LV_BLEND_MODE_NORMAL`.





```
#include "lvgl/lvgl.h"

/**
 * Using the image style properties
 */
void lv_ex_style_8(void)
{
    static lv_style_t style;
    lv_style_init(&style);

    /*Set a background color and a radius*/
    lv_style_set_radius(&style, LV_STATE_DEFAULT, 5);
    lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);
    lv_style_set_border_width(&style, LV_STATE_DEFAULT, 2);
    lv_style_set_border_color(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);

    lv_style_set_pad_top(&style, LV_STATE_DEFAULT, 10);
    lv_style_set_pad_bottom(&style, LV_STATE_DEFAULT, 10);
    lv_style_set_pad_left(&style, LV_STATE_DEFAULT, 10);
    lv_style_set_pad_right(&style, LV_STATE_DEFAULT, 10);


    lv_style_set_image_recolor(&style, LV_STATE_DEFAULT, LV_COLOR_BLUE);
    lv_style_set_image_recolor_opa(&style, LV_STATE_DEFAULT, LV_OPA_50);

    /*Create an object with the new style*/
    lv_obj_t * obj = lv_img_create(lv_scr_act(), NULL);
    lv_obj_add_style(obj, LV_IMG_PART_MAIN, &style);
    LV_IMG_DECLARE(img_cogwheel_argb);
    lv_img_set_src(obj, &img_cogwheel_argb);
    lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);
}
```

## Transition properties

Properties to describe state change animations.

- **transition\_time** (`lv_style_int_t`): Time of the transition.
- **transition\_delay** (`lv_style_int_t`): Delay before the transition.
- **transition\_1** (property name): A property on which transition should be applied. Use the property name with upper case with `LV_STYLE_` prefix, e.g. `LV_STYLE_BG_COLOR`
- **transition\_2** (property name): Same as *transition\_1* just for an other property.
- **transition\_3** (property name): Same as *transition\_1* just for an other property.
- **transition\_4** (property name): Same as *transition\_1* just for an other property.
- **transition\_5** (property name): Same as *transition\_1* just for an other property.
- **transition\_6** (property name): Same as *transition\_1* just for an other property.
- **transition\_path** (`lv_anim_path_cb_t`): An animation path for the transition. Built pats can be used, e.g. `lv_anim_path_overshoot`.

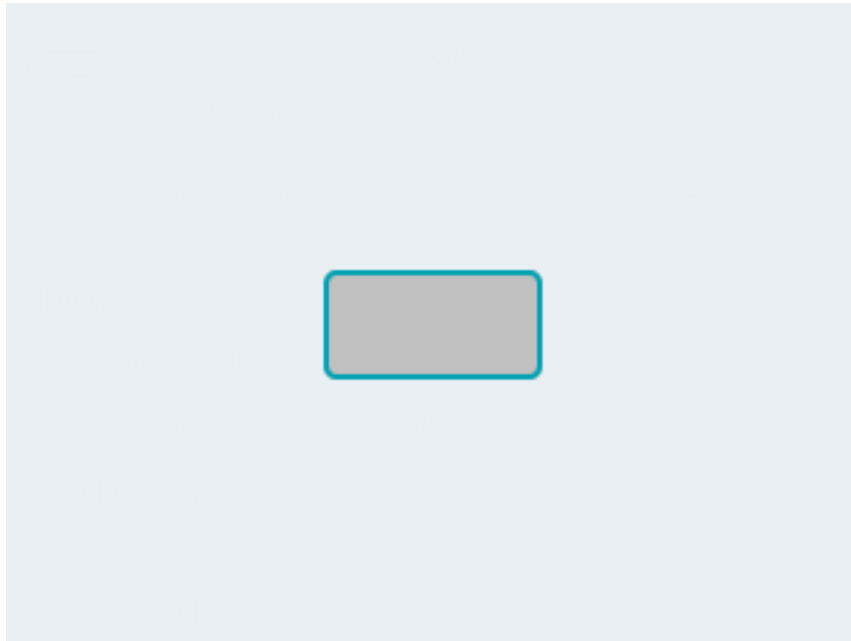

```
#include "lvgl/lvgl.h"

/**
 * Using the transitions style properties
 */
void lv_ex_style_9(void)
{
    static lv_style_t style;
    lv_style_init(&style);

    /*Set a background color and a radius*/
    lv_style_set_radius(&style, LV_STATE_DEFAULT, 5);
    lv_style_set_bg_opa(&style, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_bg_color(&style, LV_STATE_DEFAULT, LV_COLOR_SILVER);
}
```

(continues on next page)

(continued from previous page)

```

/*Set different background color in pressed state*/
lv_style_set_bg_color(&style, LV_STATE_PRESSED, LV_COLOR_GRAY);

/*Set different transition time in default and pressed state
 *fast press, slower revert to default*/
lv_style_set_transition_time(&style, LV_STATE_DEFAULT, 500);
lv_style_set_transition_time(&style, LV_STATE_PRESSED, 200);

/*Small delay to make transition more visible*/
lv_style_set_transition_delay(&style, LV_STATE_DEFAULT, 100);

/*Add `bg_color` to transitioned properties*/
lv_style_set_transition_prop_1(&style, LV_STATE_DEFAULT, LV_STYLE_BG_COLOR);

/*Create an object with the new style*/
lv_obj_t * obj = lv_obj_create(lv_scr_act(), NULL);
lv_obj_add_style(obj, LV_OBJ_PART_MAIN, &style);
lv_obj_align(obj, NULL, LV_ALIGN_CENTER, 0, 0);
}

```

## Scale properties

Auxiliary properties for scale like elements. Scales have a normal and end region. As the name implies the end region is the end of the scale where can be critical values or inactive values. The normal region is before the end region. Both region could have different properties.

- **scale\_grad\_color** (`lv_color_t`): In normal region make gradient to this color on the scale lines.
- **scale\_end\_color** (`lv_color_t`): Color of the scale lines in the end region.
- **scale\_width** (`lv_style_int_t`): Width of the scale. Default value: `LV_DPI / 8`.
- **scale\_border\_width** (`lv_style_int_t`): Width of a border drawn on the outer side of the scale in the normal region.
- **scale\_end\_border\_width** (`lv_style_int_t`): Width of a border drawn on the outer side of the scale in the end region.
- **scale\_end\_line\_width** (`lv_style_int_t`): Width of a scale lines in the end region.

## Themes

Themes are collection of styles. There is always an active theme whose styles are automatically applied when an object is created. It gives a default appearance to UI which can be modified by adding further styles.

The default theme is set in `lv_conf.h` with `LV_THEME_...` defines. Every theme has the following properties

- primary color
- secondary color
- small font
- normal font

- subtitle font
- title font

The usage of these parameters depends on the given theme.

There are 3 built-in themes:

- empty: no default styles are added
- default: an impressive, modern theme
- template: a very simple theme which can be copied to create custom theme

## Input devices

An input device usually means:

- Pointer-like input device like touchpad or mouse
- Keypads like a normal keyboard or simple numeric keypad
- Encoders with left/right turn and push options
- External hardware buttons which are assigned to specific points on the screen

---

**Important:** Before reading further, please read the [Porting](/porting/indev) section of Input devices

---

## Pointers

Pointer input devices can have a cursor. (typically for mouses)

```
...
lv_indev_t * mouse_indev = lv_indev_drv_register(&indev_drv);

LV_IMG_DECLARE(mouse_cursor_icon);           /*Declare the image file.
↪*/
lv_obj_t * cursor_obj = lv_img_create(lv_scr_act(), NULL); /*Create an image object ↪
↪for the cursor */
lv_img_set_src(cursor_obj, &mouse_cursor_icon);           /*Set the image source*/
lv_indev_set_cursor(mouse_indev, cursor_obj);             /*Connect the image ↪
↪object to the driver*/
```

Note that the cursor object should have `lv_obj_set_click(cursor_obj, false)`. For images, *clicking* is disabled by default.

## Keypad and encoder

You can fully control the user interface without touchpad or mouse using a keypad or encoder(s). It works similar to the *TAB* key on the PC to select the element in an application or a web page.

## Groups

The objects, you want to control with keypad or encoder, needs to be added to a *Group*. In every group, there is exactly one focused object which receives the pressed keys or the encoder actions. For example, if

a *Text area* is focused and you press some letter on a keyboard, the keys will be sent and inserted into the text area. Similarly, if a *Slider* is focused and you press the left or right arrows, the slider's value will be changed.

You need to associate an input device with a group. An input device can send the keys to only one group but, a group can receive data from more than one input device too.

To create a group use `lv_group_t * g = lv_group_create()` and to add an object to the group use `lv_group_add_obj(g, obj)`.

To associate a group with an input device use `lv_indev_set_group(indev, g)`, where `indev` is the return value of `lv_indev_drv_register()`

## Keys

There are some predefined keys which have special meaning:

- **LV\_KEY\_NEXT** Focus on the next object
- **LV\_KEY\_PREV** Focus on the previous object
- **LV\_KEY\_ENTER** Triggers `LV_EVENT_PRESSED/CLICKED/LONG_PRESSED` etc. events
- **LV\_KEY\_UP** Increase value or move upwards
- **LV\_KEY\_DOWN** Decrease value or move downwards
- **LV\_KEY\_RIGHT** Increase value or move the the right
- **LV\_KEY\_LEFT** Decrease value or move the the left
- **LV\_KEY\_ESC** Close or exit (E.g. close a *Drop down list*)
- **LV\_KEY\_DEL** Delete (E.g. a character on the right in a *Text area*)
- **LV\_KEY\_BACKSPACE** Delete a character on the left (E.g. in a *Text area*)
- **LV\_KEY\_HOME** Go to the beginning/top (E.g. in a *Text area*)
- **LV\_KEY\_END** Go to the end (E.g. in a *Text area*)

The most important special keys are `LV_KEY_NEXT/PREV`, `LV_KEY_ENTER` and `LV_KEY_UP/DOWN/LEFT/RIGHT`. In your `read_cb` function, you should translate some of your keys to these special keys to navigate in the group and interact with the selected object.

Usually, it's enough to use only `LV_KEY_LEFT/RIGHT` because most of the objects can be fully controlled with them.

With an encoder, you should use only `LV_KEY_LEFT`, `LV_KEY_RIGHT`, and `LV_KEY_ENTER`.

## Edit and navigate mode

Since keypad has plenty of keys, it's easy to navigate between the objects and edit them using the keypad. But, the encoders have a limited number of "keys" hence, difficult to navigate using the default options. *Navigate* and *Edit* are created to avoid this problem with the encoders.

In *Navigate* mode, the encoders `LV_KEY_LEFT/RIGHT` is translated to `LV_KEY_NEXT/PREV`. Therefore the next or previous object will be selected by turning the encoder. Pressing `LV_KEY_ENTER` will change to *Edit* mode.

In *Edit* mode, `LV_KEY_NEXT/PREV` is usually used to edit the object. Depending on the object's type, a short or long press of `LV_KEY_ENTER` changes back to *Navigate* mode. Usually, an object which can not be

pressed (like a *Slider*) leaves *Edit* mode on short click. But with object where short click has meaning (e.g. *Button*), long press is required.

## Styling the focused object

To visually highlight the focused element, its *Main style* will be updated. By default, some orange color is mixed with the original colors of the style. A new style modifier callback be set by `lv_group_set_style_mod_cb(g, my_style_mod_cb)`. A style modifier callback receives a pointer to a caller group and a pointer to a style to modify. The default style modifier looks like this (slightly simplified):

```
static void default_style_mod_cb(lv_group_t * group, lv_style_t * style)
{
    /*Make the bodies a little bit orange*/
    style->body.border.opa = LV_OPA_COVER;
    style->body.border.color = LV_COLOR_ORANGE;
    style->body.border.width = LV_DPI / 20;

    style->body.main_color = lv_color_mix(style->body.main_color, LV_COLOR_ORANGE,
    ↪ LV_OPA_70);
    style->body.grad_color = lv_color_mix(style->body.grad_color, LV_COLOR_ORANGE,
    ↪ LV_OPA_70);
    style->body.shadow.color = lv_color_mix(style->body.shadow.color, LV_COLOR_ORANGE,
    ↪ LV_OPA_60);

    /*Recolor text*/
    style->text.color = lv_color_mix(style->text.color, LV_COLOR_ORANGE, LV_OPA_70);

    /*Add some recolor to the images*/
    if(style->image.intense < LV_OPA_MIN) {
        style->image.color = LV_COLOR_ORANGE;
        style->image.intense = LV_OPA_40;
    }
}
```

This style modifier callback is used for keypads and encoder in *Navigate* mode. For the *Edit* mode and other callback is used which can be set with `lv_group_set_style_mod_edit_cb()`. By default, it has a greenish color.

## Live demo

Try this [Live demo](#) to see how a group and touchpad-less navigation works in the practice.

## API

### Input device

#### Functions

void **lv\_indev\_init**(void)  
Initialize the display input device subsystem

void **lv\_indev\_read\_task**(*lv\_task\_t* \*task)  
 Called periodically to read the input devices

**Parameters**

- **task**: pointer to the task itself

*lv\_indev\_t* \***lv\_indev\_get\_act**(void)  
 Get the currently processed input device. Can be used in action functions too.

**Return** pointer to the currently processed input device or NULL if no input device processing right now

*lv\_indev\_type\_t* **lv\_indev\_get\_type**(const *lv\_indev\_t* \*indev)  
 Get the type of an input device  
**Return** the type of the input device from *lv\_hal\_indev\_type\_t* (LV\_INDEV\_TYPE\_...)

**Parameters**

- **indev**: pointer to an input device

void **lv\_indev\_reset**(*lv\_indev\_t* \*indev, *lv\_obj\_t* \*obj)  
 Reset one or all input devices

**Parameters**

- **indev**: pointer to an input device to reset or NULL to reset all of them
- **obj**: pointer to an object which triggers the reset.

void **lv\_indev\_reset\_long\_press**(*lv\_indev\_t* \*indev)  
 Reset the long press state of an input device

**Parameters**

- **indev\_proc**: pointer to an input device

void **lv\_indev\_enable**(*lv\_indev\_t* \*indev, bool en)  
 Enable or disable an input devices

**Parameters**

- **indev**: pointer to an input device
- **en**: true: enable; false: disable

void **lv\_indev\_set\_cursor**(*lv\_indev\_t* \*indev, *lv\_obj\_t* \*cur\_obj)  
 Set a cursor for a pointer input device (for LV\_INPUT\_TYPE\_POINTER and LV\_INPUT\_TYPE\_BUTTON)

**Parameters**

- **indev**: pointer to an input device
- **cur\_obj**: pointer to an object to be used as cursor

void **lv\_indev\_set\_group**(*lv\_indev\_t* \*indev, *lv\_group\_t* \*group)  
 Set a destination group for a keypad input device (for LV\_INDEV\_TYPE\_KEYPAD)

**Parameters**

- **indev**: pointer to an input device
- **group**: point to a group

void **lv\_indev\_set\_button\_points**(*lv\_indev\_t* \*indev, const *lv\_point\_t* points[])

Set the an array of points for LV\_INDEV\_TYPE\_BUTTON. These points will be assigned to the buttons to press a specific point on the screen

**Parameters**

- **indev**: pointer to an input device
- **group**: point to a group

void **lv\_indev\_get\_point**(const *lv\_indev\_t* \*indev, *lv\_point\_t* \*point)

Get the last point of an input device (for LV\_INDEV\_TYPE\_POINTER and LV\_INDEV\_TYPE\_BUTTON)

**Parameters**

- **indev**: pointer to an input device
- **point**: pointer to a point to store the result

*lv\_gesture\_dir\_t* **lv\_indev\_get\_gesture\_dir**(const *lv\_indev\_t* \*indev)

Get the current gesture direct

**Return** current gesture direct

**Parameters**

- **indev**: pointer to an input device

uint32\_t **lv\_indev\_get\_key**(const *lv\_indev\_t* \*indev)

Get the last pressed key of an input device (for LV\_INDEV\_TYPE\_KEYPAD)

**Return** the last pressed key (0 on error)

**Parameters**

- **indev**: pointer to an input device

bool **lv\_indev\_is\_dragging**(const *lv\_indev\_t* \*indev)

Check if there is dragging with an input device or not (for LV\_INDEV\_TYPE\_POINTER and LV\_INDEV\_TYPE\_BUTTON)

**Return** true: drag is in progress

**Parameters**

- **indev**: pointer to an input device

void **lv\_indev\_get\_vect**(const *lv\_indev\_t* \*indev, *lv\_point\_t* \*point)

Get the vector of dragging of an input device (for LV\_INDEV\_TYPE\_POINTER and LV\_INDEV\_TYPE\_BUTTON)

**Parameters**

- **indev**: pointer to an input device
- **point**: pointer to a point to store the vector

*lv\_res\_t* **lv\_indev\_finish\_drag**(*lv\_indev\_t* \*indev)

Manually finish dragging. LV\_SIGNAL\_DRAG\_END and LV\_EVENT\_DRAG\_END will be sent.

**Return** LV\_RES\_INV if the object being dragged was deleted. Else LV\_RES\_OK.

**Parameters**

- **indev**: pointer to an input device



void **lv\_indev\_wait\_release**(*lv\_indev\_t* \*indev)

Do nothing until the next release

#### Parameters

- **indev**: pointer to an input device

*lv\_task\_t* \***lv\_indev\_get\_read\_task**(*lv\_disp\_t* \*indev)

Get a pointer to the indev read task to modify its parameters with **lv\_task\_...** functions.

**Return** pointer to the indev read refresher task. (NULL on error)

#### Parameters

- **indev**: pointer to an inout device

*lv\_obj\_t* \***lv\_indev\_get\_obj\_act**(void)

Gets a pointer to the currently active object in indev proc functions. NULL if no object is currently being handled or if groups aren't used.

**Return** pointer to currently active object

*lv\_obj\_t* \***lv\_indev\_search\_obj**(*lv\_obj\_t* \*obj, *lv\_point\_t* \*point)

Search the most top, clickable object by a point

**Return** pointer to the found object or NULL if there was no suitable object

#### Parameters

- **obj**: pointer to a start object, typically the screen
- **point**: pointer to a point for searching the most top child

## Groups

### Typedefs

**typedef** uint8\_t **lv\_key\_t**

**typedef** void (\***lv\_group\_style\_mod\_cb\_t**)(**struct** *\_\_lv\_group\_t* \*, *lv\_style\_t* \*)

**typedef** void (\***lv\_group\_focus\_cb\_t**)(**struct** *\_\_lv\_group\_t* \*)

**typedef** **struct** *\_\_lv\_group\_t* **lv\_group\_t**

Groups can be used to logically hold objects so that they can be individually focused. They are NOT for laying out objects on a screen (try **lv\_cont** for that).

**typedef** uint8\_t **lv\_group\_refocus\_policy\_t**

### Enums

**enum** [anonymous]

*Values:*

**LV\_KEY\_UP** = 17

**LV\_KEY\_DOWN** = 18

**LV\_KEY\_RIGHT** = 19

**LV\_KEY\_LEFT** = 20

**LV\_KEY\_ESC** = 27

```
LV_KEY_DEL = 127
LV_KEY_BACKSPACE = 8
LV_KEY_ENTER = 10
LV_KEY_NEXT = 9
LV_KEY_PREV = 11
LV_KEY_HOME = 2
LV_KEY_END = 3
```

**enum** [anonymous]

*Values:*

```
LV_GROUP_REFOCUS_POLICY_NEXT = 0
LV_GROUP_REFOCUS_POLICY_PREV = 1
```

## Functions

void **lv\_group\_init**(void)

Init. the group module

**Remark** Internal function, do not call directly.

*lv\_group\_t* \***lv\_group\_create**(void)

Create a new object group

**Return** pointer to the new object group

void **lv\_group\_del**(*lv\_group\_t* \*group)

Delete a group object

**Parameters**

- **group**: pointer to a group

void **lv\_group\_add\_obj**(*lv\_group\_t* \*group, *lv\_obj\_t* \*obj)

Add an object to a group

**Parameters**

- **group**: pointer to a group
- **obj**: pointer to an object to add

void **lv\_group\_remove\_obj**(*lv\_obj\_t* \*obj)

Remove an object from its group

**Parameters**

- **obj**: pointer to an object to remove

void **lv\_group\_remove\_all\_objs**(*lv\_group\_t* \*group)

Remove all objects from a group

**Parameters**

- **group**: pointer to a group

void **lv\_group\_focus\_obj**(*lv\_obj\_t* \*obj)

Focus on an object (defocus the current)

**Parameters**

- **obj**: pointer to an object to focus on

void **lv\_group\_focus\_next**(*lv\_group\_t \*group*)  
Focus the next object in a group (defocus the current)

**Parameters**

- **group**: pointer to a group

void **lv\_group\_focus\_prev**(*lv\_group\_t \*group*)  
Focus the previous object in a group (defocus the current)

**Parameters**

- **group**: pointer to a group

void **lv\_group\_focus\_freeze**(*lv\_group\_t \*group*, bool *en*)  
Do not let to change the focus from the current object

**Parameters**

- **group**: pointer to a group
- **en**: true: freeze, false: release freezing (normal mode)

lv\_res\_t **lv\_group\_send\_data**(*lv\_group\_t \*group*, uint32\_t *c*)  
Send a control character to the focuses object of a group

**Return** result of focused object in group.

**Parameters**

- **group**: pointer to a group
- **c**: a character (use LV\_KEY\_.. to navigate)

void **lv\_group\_set\_style\_mod\_cb**(*lv\_group\_t \*group*, *lv\_group\_style\_mod\_cb\_t style\_mod\_cb*)

Set a function for a group which will modify the object' s style if it is in focus

**Parameters**

- **group**: pointer to a group
- **style\_mod\_cb**: the style modifier function pointer

void **lv\_group\_set\_style\_mod\_edit\_cb**(*lv\_group\_t \*group*, *lv\_group\_style\_mod\_edit\_cb\_t style\_mod\_edit\_cb*)

Set a function for a group which will modify the object' s style if it is in focus in edit mode

**Parameters**

- **group**: pointer to a group
- **style\_mod\_edit\_cb**: the style modifier function pointer

void **lv\_group\_set\_focus\_cb**(*lv\_group\_t \*group*, *lv\_group\_focus\_cb\_t focus\_cb*)  
Set a function for a group which will be called when a new object is focused

**Parameters**

- **group**: pointer to a group
- **focus\_cb**: the call back function or NULL if unused

void **lv\_group\_set\_refocus\_policy**(*lv\_group\_t \*group*, *lv\_group\_refocus\_policy\_t policy*)  
Set whether the next or previous item in a group is focused if the currently focussed obj is deleted.

**Parameters**

- **group**: pointer to a group
- **new**: refocus policy enum

void **lv\_group\_set\_editing**(*lv\_group\_t* \*group, bool edit)

Manually set the current mode (edit or navigate).

**Parameters**

- **group**: pointer to group
- **edit**: true: edit mode; false: navigate mode

void **lv\_group\_set\_click\_focus**(*lv\_group\_t* \*group, bool en)

Set the **click\_focus** attribute. If enabled then the object will be focused then it is clicked.

**Parameters**

- **group**: pointer to group
- **en**: true: enable **click\_focus**

void **lv\_group\_set\_wrap**(*lv\_group\_t* \*group, bool en)

Set whether focus next/prev will allow wrapping from first->last or last->first object.

**Parameters**

- **group**: pointer to group
- **en**: true: wrapping enabled; false: wrapping disabled

*lv\_style\_t* \***lv\_group\_mod\_style**(*lv\_group\_t* \*group, const *lv\_style\_t* \*style)

Modify a style with the set ‘style\_mod’ function. The input style remains unchanged.

**Return** a copy of the input style but modified with the ‘style\_mod’ function

**Parameters**

- **group**: pointer to group
- **style**: pointer to a style to modify

*lv\_obj\_t* \***lv\_group\_get\_focused**(const *lv\_group\_t* \*group)

Get the focused object or NULL if there isn’t one

**Return** pointer to the focused object

**Parameters**

- **group**: pointer to a group

*lv\_group\_user\_data\_t* \***lv\_group\_get\_user\_data**(*lv\_group\_t* \*group)

Get a pointer to the group’s user data

**Return** pointer to the user data

**Parameters**

- **group**: pointer to an group

*lv\_group\_style\_mod\_cb\_t* **lv\_group\_get\_style\_mod\_cb**(const *lv\_group\_t* \*group)

Get a the style modifier function of a group

**Return** pointer to the style modifier function

**Parameters**

- **group**: pointer to a group

*lv\_group\_style\_mod\_cb\_t* **lv\_group\_get\_style\_mod\_edit\_cb**(const *lv\_group\_t* \*group)

Get a the style modifier function of a group in edit mode

**Return** pointer to the style modifier function

**Parameters**

- **group**: pointer to a group

*lv\_group\_focus\_cb\_t* **lv\_group\_get\_focus\_cb**(const *lv\_group\_t* \*group)

Get the focus callback function of a group

**Return** the call back function or NULL if not set

**Parameters**

- **group**: pointer to a group

bool **lv\_group\_get\_editing**(const *lv\_group\_t* \*group)

Get the current mode (edit or navigate).

**Return** true: edit mode; false: navigate mode

**Parameters**

- **group**: pointer to group

bool **lv\_group\_get\_click\_focus**(const *lv\_group\_t* \*group)

Get the `click_focus` attribute.

**Return** true: `click_focus` is enabled; false: disabled

**Parameters**

- **group**: pointer to group

bool **lv\_group\_get\_wrap**(*lv\_group\_t* \*group)

Get whether focus next/prev will allow wrapping from first->last or last->first object.

**Parameters**

- **group**: pointer to group
- **en**: true: wrapping enabled; false: wrapping disabled

**struct \_lv\_group\_t**

*#include <lv\_group.h>* Groups can be used to logically hold objects so that they can be individually focused. They are NOT for laying out objects on a screen (try `lv_cont` for that).

## Public Members

*lv\_ll\_t* **obj\_ll**

Linked list to store the objects in the group

*lv\_obj\_t* \*\***obj\_focus**

The object in focus

*lv\_group\_style\_mod\_cb\_t* **style\_mod\_cb**

A function to modifies the style of the focused object

*lv\_group\_style\_mod\_cb\_t* **style\_mod\_edit\_cb**

A function which modifies the style of the edited object

*lv\_group\_focus\_cb\_t* **focus\_cb**

A function to call when a new object is focused (optional)

`lv_style_t` **style\_tmp**  
 Stores the modified style of the focused object

`lv_group_user_data_t` **user\_data**

`uint8_t` **frozen**  
 1: can't focus to new object

`uint8_t` **editing**  
 1: Edit mode, 0: Navigate mode

`uint8_t` **click\_focus**  
 1: If an object in a group is clicked by an indev then it will be focused

`uint8_t` **refocus\_policy**  
 1: Focus prev if focused on deletion. 0: Focus next if focused on deletion.

`uint8_t` **wrap**  
 1: Focus next/prev can wrap at end of list. 0: Focus next/prev stops at end of list.

## Displays

---

**Important:** The basic concept of *display* in LittlevGL is explained in the [Porting](/porting/display) section. So before reading further, please read the [Porting](/porting/display) section first.

---

In LittlevGL, you can have multiple displays, each with their own driver and objects.

Creating more displays is easy: just initialize more display buffers and register another driver for every display. When you create the UI, use `lv_disp_set_default(disp)` to tell the library which display to create objects on.

Why would you want multi-display support? Here are some examples:

- Have a “normal” TFT display with local UI and create “virtual” screens on VNC on demand. (You need to add your VNC driver).
- Have a large TFT display and a small monochrome display.
- Have some smaller and simple displays in a large instrument or technology.
- Have two large TFT displays: one for a customer and one for the shop assistant.

## Using only one display

Using more displays can be useful, but in most cases, it's not required. Therefore, the whole concept of multi-display is completely hidden if you register only one display. By default, the lastly created (the only one) display is used as default.

`lv_scr_act()`, `lv_scr_load(scr)`, `lv_layer_top()`, `lv_layer_sys()`, `LV_HOR_RES` and `LV_VER_RES` are always applied on the lastly created (default) screen. If you pass `NULL` as `disp` parameter to display related function, usually the default display will be used. E.g. `lv_disp_trig_activity(NULL)` will trigger a user activity on the default screen. (See below in *In-activity*).

## Mirror display

To mirror the image of the display to another display, you don't need to use the multi-display support. Just transfer the buffer received in `drv.flush_cb` to another display too.

## Split image

You can create a larger display from smaller ones. You can create it as below:

1. Set the resolution of the displays to the large display's resolution.
2. In `drv.flush_cb`, truncate and modify the `area` parameter for each display.
3. Send the buffer's content to each display with the truncated area.

## Screens

Every display has each set of [Screens](#) and the object on the screens.

Be sure not to confuse displays and screens:

- **Displays** are the physical hardware drawing the pixels.
- **Screens** are the high-level root objects associated with a particular display. One display can have multiple screens associated with it, but not vice versa.

Screens can be considered the highest level containers which have no parent. The screen's size is always equal to its display and size their position is (0;0). Therefore, the screens coordinates can't be changed, i.e. `lv_obj_set_pos()`, `lv_obj_set_size()` or similar functions can't be used on screens.

A screen can be created from any object type but, the two most typical types are the *Base object* and the *Image* (to create a wallpaper).

To create a screen, use `lv_obj_t * scr = lv_<type>_create(NULL, copy)`. `copy` can be an other screen to copy it.

To load a screen, use `lv_scr_load(scr)`. To get the active screen, use `lv_scr_act()`. These functions works on the default display. If you want to specify which display to work on, use `lv_disp_get_scr_act(displ)` and `lv_disp_load_scr(displ, scr)`.

Screens can be deleted with `lv_obj_del(scr)`, but ensure that you do not delete the currently loaded screen.

## Opaque screen

Usually, the opacity of the screen is `LV_OPA_COVER` to provide a solid background for its children.

However, in some special cases, you might want a transparent screen. For example, if you have a video player that renders video frames on a lower layer, you want to create an OSD menu on the upper layer (over the video) using LittlevGL.

To do this, the screen should have a style that sets `body.opa` or `image.opa` to `LV_OPA_TRANSP` (or another non-opaque value) to make the screen opaque.

Also, `LV_COLOR_SCREEN_TRANSP` needs to be enabled. Please note that it only works with `LV_COLOR_DEPTH = 32`.

The Alpha channel of 32-bit colors will be 0 where there are no objects and will be 255 where there are solid objects.

## Features of displays

### Inactivity

The user's inactivity is measured on each display. Every use of an *Input device* (if associated with the display) counts as an activity. To get time elapsed since the last activity, use `lv_disp_get_inactive_time disp`). If `NULL` is passed, the overall smallest inactivity time will be returned from all displays (**not the default display**).

You can manually trigger an activity using `lv_disp_trig_activity disp`). If `disp` is `NULL`, the default screen will be used (**and not all displays**).

### Colors

The color module handles all color-related functions like changing color depth, creating colors from hex code, converting between color depths, mixing colors, etc.

The following variable types are defined by the color module:

- `lv_color1_t` Store monochrome color. For compatibility, it also has R, G, B fields but they are always the same value (1 byte)
- `lv_color8_t` A structure to store R (3 bit), G (3 bit), B (2 bit) components for 8-bit colors (1 byte)
- `lv_color16_t` A structure to store R (5 bit), G (6 bit), B (5 bit) components for 16-bit colors (2 byte)
- `lv_color32_t` A structure to store R (8 bit), G (8 bit), B (8 bit) components for 24-bit colors (4 byte)
- `lv_color_t` Equal to `lv_color1/8/16/24_t` according to color depth settings
- `lv_color_int_t` `uint8_t`, `uint16_t` or `uint32_t` according to color depth setting. Used to build color arrays from plain numbers.
- `lv_opa_t` A simple `uint8_t` type to describe opacity.

The `lv_color_t`, `lv_color1_t`, `lv_color8_t`, `lv_color16_t` and `lv_color32_t` types have got four fields:

- `ch.red` red channel
- `ch.green` green channel
- `ch.blue` blue channel
- `full` red + green + blue as one number

You can set the current color depth in `lv_conf.h`, by setting the `LV_COLOR_DEPTH` define to 1 (monochrome), 8, 16 or 32.

### Convert color

You can convert a color from the current color depth to another. The converter functions return with a number, so you have to use the `full` field:



```
lv_color_t c;
c.red   = 0x38;
c.green = 0x70;
c.blue  = 0xCC;

lv_color1_t c1;
c1.full = lv_color_to1(c);           /*Return 1 for light colors, 0 for dark colors*/

lv_color8_t c8;
c8.full = lv_color_to8(c);          /*Give a 8 bit number with the converted color*/

lv_color16_t c16;
c16.full = lv_color_to16(c); /*Give a 16 bit number with the converted color*/

lv_color32_t c24;
c24.full = lv_color_to32(c);        /*Give a 32 bit number with the converted color*/
```

## Swap 16 colors

You may set `LV_COLOR_16_SWAP` in `lv_conf.h` to swap the bytes of *RGB565* colors. It's useful if you send the 16-bit colors via a byte-oriented interface like SPI.

As 16-bit numbers are stored in Little Endian format (lower byte on the lower address), the interface will send the lower byte first. However, displays usually need the higher byte first. A mismatch in the byte order will result in highly distorted colors.

## Create and mix colors

You can create colors with the current color depth using the `LV_COLOR_MAKE` macro. It takes 3 arguments (red, green, blue) as 8-bit numbers. For example to create light red color: `my_color = COLOR_MAKE(0xFF, 0x80, 0x80)`.

Colors can be created from HEX codes too: `my_color = lv_color_hex(0x288ACF)` or `my_color = lv_color_hex3(0x28C)`.

Mixing two colors is possible with `mixed_color = lv_color_mix(color1, color2, ratio)`. Ratio can be 0..255. 0 results fully color2, 255 result fully color1.

Colors can be created with from HSV space too using `lv_color_hsv_to_rgb(hue, saturation, value)`. `hue` should be in 0..360 range, `saturation` and `value` in 0..100 range.

## Opacity


To describe opacity the `lv_opa_t` type is created as a wrapper to `uint8_t`. Some defines are also introduced:

- **LV\_OPA\_TRANSP** Value: 0, means the opacity makes the color completely transparent
- **LV\_OPA\_10** Value: 25, means the color covers only a little
- **LV\_OPA\_20 ... OPA\_80** come logically
- **LV\_OPA\_90** Value: 229, means the color near completely covers
- **LV\_OPA\_COVER** Value: 255, means the color completely covers

You can also use the `LV_OPA_*` defines in `lv_color_mix()` as a *ratio*.

## Built-in colors

The color module defines the most basic colors such as:

-  `#FFFFFF LV_COLOR_WHITE`
-  `#000000 LV_COLOR_BLACK`
-  `#808080 LV_COLOR_GRAY`
-  `#c0c0c0 LV_COLOR_SILVER`
-  `#ff0000 LV_COLOR_RED`
-  `#800000 LV_COLOR_MAROON`
-  `#00ff00 LV_COLOR_LIME`
-  `#008000 LV_COLOR_GREEN`
-  `#808000 LV_COLOR_OLIVE`
-  `#0000ff LV_COLOR_BLUE`
-  `#000080 LV_COLOR_NAVY`
-  `#008080 LV_COLOR_TEAL`
-  `#00ffff LV_COLOR_CYAN`
-  `#00ffff LV_COLOR_AQUA`
-  `#800080 LV_COLOR_PURPLE`
-  `#ff00ff LV_COLOR_MAGENTA`
-  `#ffa500 LV_COLOR_ORANGE`
-  `#ffff00 LV_COLOR_YELLOW`

as well as `LV_COLOR_WHITE` (fully white).

## API

### Display

#### Functions

*lv\_obj\_t* \***lv\_disp\_get\_scr\_act**(*lv\_disp\_t* \*disp)

Return with a pointer to the active screen

**Return** pointer to the active screen object (loaded by ‘`lv_scr_load()`’ )

**Parameters**

- **disp**: pointer to display which active screen should be get. (NULL to use the default screen)

void **lv\_disp\_load\_scr**(*lv\_obj\_t* \*scr)

Make a screen active

**Parameters**

- **scr**: pointer to a screen

*lv\_obj\_t* \***lv\_disp\_get\_layer\_top**(*lv\_disp\_t* \*disp)

Return with the top layer. (Same on every screen and it is above the normal screen layer)

**Return** pointer to the top layer object (transparent screen sized lv\_obj)

**Parameters**

- **disp**: pointer to display which top layer should be get. (NULL to use the default screen)

*lv\_obj\_t* \***lv\_disp\_get\_layer\_sys**(*lv\_disp\_t* \*disp)

Return with the sys. layer. (Same on every screen and it is above the normal screen and the top layer)

**Return** pointer to the sys layer object (transparent screen sized lv\_obj)

**Parameters**

- **disp**: pointer to display which sys. layer should be get. (NULL to use the default screen)

void **lv\_disp\_assign\_screen**(*lv\_disp\_t* \*disp, *lv\_obj\_t* \*scr)

Assign a screen to a display.

**Parameters**

- **disp**: pointer to a display where to assign the screen
- **scr**: pointer to a screen object to assign

*lv\_task\_t* \***lv\_disp\_get\_refr\_task**(*lv\_disp\_t* \*disp)

Get a pointer to the screen refresher task to modify its parameters with **lv\_task\_...** functions.

**Return** pointer to the display refresher task. (NULL on error)

**Parameters**

- **disp**: pointer to a display

uint32\_t **lv\_disp\_get\_inactive\_time**(const *lv\_disp\_t* \*disp)

Get elapsed time since last user activity on a display (e.g. click)

**Return** elapsed ticks (milliseconds) since the last activity

**Parameters**

- **disp**: pointer to an display (NULL to get the overall smallest inactivity)

void **lv\_disp\_trig\_activity**(*lv\_disp\_t* \*disp)

Manually trigger an activity on a display

**Parameters**

- **disp**: pointer to an display (NULL to use the default display)

static *lv\_obj\_t* \***lv\_scr\_act**(void)

Get the active screen of the default display

**Return** pointer to the active screen

static *lv\_obj\_t* \***lv\_layer\_top**(void)

Get the top layer of the default display

**Return** pointer to the top layer

```
static lv_obj_t *lv_layer_sys(void)
    Get the active screen of the default display

    Return pointer to the sys layer
static void lv_scr_load(lv_obj_t *scr)
```

## Colors

### Typedefs

```
typedef uint32_t lv_color_int_t
typedef lv_color32_t lv_color_t
```

### Enums

```
enum [anonymous]
    Opacity percentages.

    Values:

    LV_OPA_TRANSP = 0
    LV_OPA_0 = 0
    LV_OPA_10 = 25
    LV_OPA_20 = 51
    LV_OPA_30 = 76
    LV_OPA_40 = 102
    LV_OPA_50 = 127
    LV_OPA_60 = 153
    LV_OPA_70 = 178
    LV_OPA_80 = 204
    LV_OPA_90 = 229
    LV_OPA_100 = 255
    LV_OPA_COVER = 255
```

### Functions

```
static uint8_t lv_color_to1(lv_color_t color)
static uint8_t lv_color_to8(lv_color_t color)
static uint16_t lv_color_to16(lv_color_t color)
static uint32_t lv_color_to32(lv_color_t color)
static lv_color_t lv_color_mix(lv_color_t c1, lv_color_t c2, uint8_t mix)
    Mix two colors with a given ratio.

    Return the mixed color
```

#### Parameters

- **c1**: the first color to mix (usually the foreground)
- **c2**: the second color to mix (usually the background)
- **mix**: The ratio of the colors. 0: full **c2**, 255: full **c1**, 127: half **c1** and half **c2**

**static** void **lv\_color\_premult**(*lv\_color\_t* c, uint8\_t mix, uint16\_t \*out)

**static** *lv\_color\_t* **lv\_color\_mix\_premult**(uint16\_t \*premult\_c1, *lv\_color\_t* c2, uint8\_t mix)

Mix two colors with a given ratio. It runs faster then **lv\_color\_mix** but requires some pre computation.

**Return** the mixed color

**Note** 255 won't give clearly **c1**.

#### Parameters

- **c1**: The first color. Should be preprocessed with **lv\_color\_premult(c1)**
- **c2**: The second color. As it is no pre computation required on it
- **mix**: The ratio of the colors. 0: full **c2**, 255: full **c1**, 127: half **c1** and half **c2**. Should be modified like  $\text{mix} = 255 - \text{mix}$

**static** void **lv\_color\_mix\_with\_alpha**(*lv\_color\_t* bg\_color, lv\_opa\_t bg\_opa, *lv\_color\_t* fg\_color, lv\_opa\_t fg\_opa, *lv\_color\_t* \*res\_color, lv\_opa\_t \*res\_opa)

Mix two colors. Both color can have alpha value. It requires ARGB888 colors.

#### Parameters

- **bg\_color**: background color
- **bg\_opa**: alpha of the background color
- **fg\_color**: foreground color
- **fg\_opa**: alpha of the foreground color
- **res\_color**: the result color
- **res\_opa**: the result opacity

**static** uint8\_t **lv\_color\_brightness**(*lv\_color\_t* color)

Get the brightness of a color

**Return** the brightness [0..255]

#### Parameters

- **color**: a color

**static** *lv\_color\_t* **lv\_color\_make**(uint8\_t r, uint8\_t g, uint8\_t b)

**static** *lv\_color\_t* **lv\_color\_hex**(uint32\_t c)

**static** *lv\_color\_t* **lv\_color\_hex3**(uint32\_t c)

*lv\_color\_t* **lv\_color\_lighten**(*lv\_color\_t* c, lv\_opa\_t lvl)

*lv\_color\_t* **lv\_color\_darken**(*lv\_color\_t* c, lv\_opa\_t lvl)

*lv\_color\_t* **lv\_color\_hsv\_to\_rgb**(uint16\_t h, uint8\_t s, uint8\_t v)

Convert a HSV color to RGB

**Return** the given RGB color in RGB (with LV\_COLOR\_DEPTH depth)

#### Parameters

- **h**: hue [0..359]
- **s**: saturation [0..100]
- **v**: value [0..100]

*lv\_color\_hsv\_t* **lv\_color\_rgb\_to\_hsv**(uint8\_t *r8*, uint8\_t *g8*, uint8\_t *b8*)

Convert a 32-bit RGB color to HSV

**Return** the given RGB color in HSV

#### Parameters

- **r8**: 8-bit red
- **g8**: 8-bit green
- **b8**: 8-bit blue

*lv\_color\_hsv\_t* **lv\_color\_to\_hsv**(*lv\_color\_t* *color*)

Convert a color to HSV

**Return** the given color in HSV

#### Parameters

- **color**: color

**union lv\_color1\_t**

#### Public Members

uint8\_t **blue**

uint8\_t **green**

uint8\_t **red**

**struct** *lv\_color1\_t*::[anonymous] **ch**

uint8\_t **full**

**union lv\_color8\_t**

#### Public Members

uint8\_t **blue**

uint8\_t **green**

uint8\_t **red**

**struct** *lv\_color8\_t*::[anonymous] **ch**

uint8\_t **full**

**union lv\_color16\_t**

### Public Members

```
uint16_t blue
uint16_t green
uint16_t red
uint16_t green_h
uint16_t green_l
struct lv_color16_t::[anonymous] ch
uint16_t full
union lv_color32_t
```

### Public Members

```
uint8_t blue
uint8_t green
uint8_t red
uint8_t alpha
struct lv_color32_t::[anonymous] ch
uint32_t full
struct lv_color_hsv_t
```

### Public Members

```
uint16_t h
uint8_t s
uint8_t v
```

## Fonts

In LittlevGL fonts are collections of bitmaps and other information required to render the images of the letters (glyph). A font is stored in a `lv_font_t` variable and can be set in style' s `text.font` field. For example:

```
my_style.text.font = &lv_font_roboto_28; /*Set a larger font*/
```

The fonts have a **bpp (bits per pixel)** property. It shows how many bits are used to describe a pixel in the font. The value stored for a pixel determines the pixel' s opacity. This way, with higher *bpp*, the edges of the letter can be smoother. The possible *bpp* values are 1, 2, 4 and 8 (higher value means better quality).

The *bpp* also affects the required memory size to store the font. For example, *bpp* = 4 makes the font nearly 4 times greater compared to *bpp* = 1.

## Unicode support

LittlevGL supports **UTF-8** encoded Unicode characters. You need to configure your editor to save your code/text as UTF-8 (usually this the default) and be sure that, `LV_TXT_ENC` is set to `LV_TXT_ENC_UTF8` in `lv_conf.h`. (This is the default value)

To test it try

```
lv_obj_t * label1 = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label1, LV_SYMBOL_OK);
```

If all works well, a ✓ character should be displayed.

## Built-in fonts

There are several built-in fonts in different sizes, which can be enabled in `lv_conf.h` by `LV_FONT_...` defines:


























































- `LV_FONT_ROBOTO_12` 12 px
- `LV_FONT_ROBOTO_16` 16 px
- `LV_FONT_ROBOTO_22` 22 px
- `LV_FONT_ROBOTO_28` 28 px

The built-in fonts are **global variables** with names like `lv_font_roboto_16` for 16 px high font. To use them in a style, just add a pointer to a font variable like shown above.

The built-in fonts have *bpp* = 4, contains the ASCII characters and uses the [Roboto](#) font.

In addition to the ASCII range, the following symbols are also added to the built-in fonts from the [FontAwesome](#) font.



	LV_SYMBOL_AUDIO		LV_SYMBOL_WARNING
	LV_SYMBOL_VIDEO		LV_SYMBOL_SHUFFLE
	LV_SYMBOL_LIST		LV_SYMBOL_UP
	LV_SYMBOL_OK		LV_SYMBOL_DOWN
	LV_SYMBOL_CLOSE		LV_SYMBOL_LOOP
	LV_SYMBOL_POWER		LV_SYMBOL_DIRECTORY
	LV_SYMBOL_SETTINGS		LV_SYMBOL_UPLOAD
	LV_SYMBOL_TRASH		LV_SYMBOL_CALL
	LV_SYMBOL_HOME		LV_SYMBOL_CUT
	LV_SYMBOL_DOWNLOAD		LV_SYMBOL_COPY
	LV_SYMBOL_DRIVE		LV_SYMBOL_SAVE
	LV_SYMBOL_REFRESH		LV_SYMBOL_CHARGE
	LV_SYMBOL_MUTE		LV_SYMBOL_PASTE
	LV_SYMBOL_VOLUME_MID		LV_SYMBOL_BELL
	LV_SYMBOL_VOLUME_MAX		LV_SYMBOL_KEYBOARD
	LV_SYMBOL_IMAGE		LV_SYMBOL_GPS
	LV_SYMBOL_EDIT		LV_SYMBOL_FILE
	LV_SYMBOL_PREV		LV_SYMBOL_WIFI
	LV_SYMBOL_PLAY		LV_SYMBOL_BATTERY_FULL
	LV_SYMBOL_PAUSE		LV_SYMBOL_BATTERY_3
	LV_SYMBOL_STOP		LV_SYMBOL_BATTERY_2
	LV_SYMBOL_NEXT		LV_SYMBOL_BATTERY_1
	LV_SYMBOL_EJECT		LV_SYMBOL_BATTERY_EMPTY
	LV_SYMBOL_LEFT		LV_SYMBOL_USB
	LV_SYMBOL_RIGHT		LV_SYMBOL_BLUETOOTH
	LV_SYMBOL_PLUS		LV_SYMBOL_BACKSPACE
	LV_SYMBOL_MINUS		LV_SYMBOL_SD_CARD
	LV_SYMBOL_EYE_OPEN		LV_SYMBOL_NEW_LINE
	LV_SYMBOL_EYE_CLOSE		

The symbols can be used as:

```
lv_label_set_text(my_label, LV_SYMBOL_OK);
```

Or with together with strings:

```
lv_label_set_text(my_label, LV_SYMBOL_OK "Apply");
```

Or more symbols together:

```
lv_label_set_text(my_label, LV_SYMBOL_OK LV_SYMBOL_WIFI LV_SYMBOL_PLAY);
```

## Special features

### Bidirectional support

Most of the languages use Left-to-Right (LTR for short) writing direction, however some languages (such as Hebrew) uses Right-to-Left (RTL for short) direction.

LittlevGL not only supports RTL texts but supports mixed (a.k.a. bidirectional, BiDi) text rendering too. Some examples:

The names of these states in Arabic  
are مصر, البحرين and الكويت respectively.

The title is مفتاح معايير الويب!

The BiDi support can be enabled by `LV_USE_BIDI` in `lv_conf.h`

All texts have a base direction (LTR or RTL) which determines some rendering rules and the default alignment of the text (Left or Right). However, in LittlevGL, base direction is not only for labels. It's a general property which can be set for every object. If unset then it will be inherited from the parent. So it's enough to set the base direction of the screen and every object will inherit it.

The default base direction of screen can be set by `LV_BIDI_BASE_DIR_DEF` in `lv_conf.h`.

To set an object's base direction use `lv_obj_set_base_dir(obj, base_dir)`. The possible base direction are:

- `LV_BIDI_DIR_LTR`: Left to Right base direction
- `LV_BIDI_DIR_RTL`: Right to Left base direction
- `LV_BIDI_DIR_AUTO`: Auto detect base direction
- `LV_BIDI_DIR_INHERIT`: Inherit the base direction from the parent (default for non-screen objects)

This list summarizes the effect of RTL base direction on objects:

- Create objects by default on the right
- `lv_tabview`: displays tabs from right to left
- `lv_cb`: Show the box on the right
- `lv_btm`: Show buttons from right to left
- `lv_list`: Show the icon on the right
- `lv_ddlist`: Align the options to the right
- The texts in `lv_table`, `lv_btm`, `lv_kb`, `lv_tabview`, `lv_ddlist`, `lv_roller` are processed to display correctly with RTL parts too

## Subpixel rendering

Subpixel rendering means to increase the horizontal resolution by rendering on Red, Green and Blue channel instead of pixel level. It results in higher quality letter anti-aliasing.

Subpixel rendering requires to generate the fonts with special settings:

- In the online converter tick the **Subpixel** box
- In the command line tool use `--lcd` flag. Note that the generated font needs about 3 times more memory.

Subpixel rendering works only if the color channels of the pixels have a horizontal layout. That is the R, G, B channels are next each other and not above each other. The order of color channels also needs to match with the library settings. By default the LittlevGL assumes **RGB** order, however it can be swapped by setting `LV_SUBPX_BGR 1` in `lv_conf.h`.

## Compress fonts

The bitmaps of the fonts can be compressed by

- ticking the **Compressed** check box in the online converter
- not passing `--no-compress` flag to the offline converter (applies compression by default)

The compression is more effective with larger fonts and higher bpp. However, it's about 30% slower to render the compressed fonts. Therefore it's recommended to compress only the largest fonts of user interface, because

- they need the most memory
- they can be compressed better
- and probably they are used less frequently than the medium sized fonts. (so performance cost is smaller)

## Add new font

There are several ways to add a new font to your project:

1. The simplest method is to use the [Online font converter](#). Just set the parameters, click the *Convert* button, copy the font to your project and use it. **Be sure to carefully read the steps provided on that site or you will get an error while converting.**
2. Use the [Offline font converter](#). (Requires Node.js to be installed)
3. If you want to create something like the built-in fonts (Roboto font and symbols) but in different size and/or ranges, you can use the `built_in_font_gen.py` script in `lvgl/scripts/built_in_font` folder. (It requires Python and `lv_font_conv` to be installed)

To declare the font in a file, use `LV_FONT_DECLARE(my_font_name)`.

To make the fonts globally available (like the builtin fonts), add them to `LV_FONT_CUSTOM_DECLARE` in `lv_conf.h`.

## Add new symbols

The built-in symbols are created from [FontAwesome](#) font.

1. Search symbol on <https://fontawesome.com>. For example the USB symbol. Copy it' s Unicode ID which is **0xf287** in this case.
2. Open the [Online font converter](#). Add Add FontAwesome.woff. .
3. Set the parameters such as Name, Size, BPP. You' ll use this name to declare and use the font in your code.
4. Add the Unicode ID of the symbol to the range field. E.g. **0xf287** for the USB symbol. More symbols can be enumerated with ,.
5. Convert the font and copy it to your project. Make sure to compile the .c file of your font.
6. Declare the font using `extern lv_font_t my_font_name;` or simply `LV_FONT_DECLARE(my_font_name);`.

### Using the symbol

1. Convert the Unicode value to UTF8. You can do it e.g on [this site](#). For **0xf287** the *Hex UTF-8 bytes* are **EF 8A 87**.
2. Create a **define** from the UTF8 values: `#define MY_USB_SYMBOL "\xEF\x8A\x87"`
3. Create a label and set the text. Eg. `lv_label_set_text(label, MY_USB_SYMBOL)`

Note - `lv_label_set_text(label, MY_USB_SYMBOL)` searches for this symbol in the font defined in `style.text.font` properties. To use the symbol you may need to change it. Eg `style.text.font = my_font_name`

### Add a new font engine

LittlevGL' s font interface is designed to be very flexible. You don' t need to use LittlevGL' s internal font engine but, you can add your own. For example, use [FreeType](#) to real-time render glyphs from TTF fonts or use an external flash to store the font' s bitmap and read them when the library needs them.

To do this a custom `lv_font_t` variable needs to be created:

```
/*Describe the properties of a font*/
lv_font_t my_font;
my_font.get_glyph_dsc = my_get_glyph_dsc_cb;          /*Set a callback to get info_
↳about glyphs*/
my_font.get_glyph_bitmap = my_get_glyph_bitmap_cb;    /*Set a callback to get bitmap of_
↳a glyph*/
my_font.line_height = height;                         /*The real line height where any_
↳text fits*/
my_font.base_line = base_line;                       /*Base line measured from the top_
↳of line_height*/
my_font.dsc = something_required;                    /*Store any implementation_
↳specific data here*/
my_font.user_data = user_data;                      /*Optionally some extra user_
↳data*/

...

/* Get info about glyph of `unicode_letter` in `font` font.
 * Store the result in `dsc_out`.
 * The next letter (`unicode_letter_next`) might be used to calculate the width_
↳required by this glyph (kerning)
 */
bool my_get_glyph_dsc_cb(const lv_font_t * font, lv_font_glyph_dsc_t * dsc_out,
↳uint32_t unicode_letter, uint32_t unicode_letter_next)
```

(continues on next page)

(continued from previous page)

```
{
    /*Your code here*/

    /* Store the result.
     * For example ...
     */
    dsc_out->adv_w = 12;      /*Horizontal space required by the glyph in [px]*/
    dsc_out->box_h = 8;       /*Height of the bitmap in [px]*/
    dsc_out->box_w = 6;       /*Width of the bitmap in [px]*/
    dsc_out->ofs_x = 0;       /*X offset of the bitmap in [pf]*/
    dsc_out->ofs_y = 3;       /*Y offset of the bitmap measured from the as line*/
    dsc_out->bpp  = 2;       /*Bits per pixel: 1/2/4/8*/

    return true;            /*true: glyph found; false: glyph was not found*/
}

/* Get the bitmap of `unicode_letter` from `font`. */
const uint8_t * my_get_glyph_bitmap_cb(const lv_font_t * font, uint32_t unicode_
↪letter)
{
    /* Your code here */

    /* The bitmap should be a continuous bitstream where
     * each pixel is represented by `bpp` bits */

    return bitmap;         /*Or NULL if not found*/
}
```

## Images

An image can be a file or variable which stores the bitmap itself and some metadata.

### Store images

You can store images in two places

- as a variable in the internal memory (RAM or ROM)
- as a file

## Variables

The images stored internally in a variable is composed mainly of an `lv_img_dsc_t` structure with the following fields:

- **header**
  - *cf* Color format. See *below*
  - *w* width in pixels ( $\leq 2048$ )
  - *h* height in pixels ( $\leq 2048$ )
  - *always zero* 3 bits which need to be always zero
  - *reserved* reserved for future use

- **data** pointer to an array where the image itself is stored
- **data\_size** length of **data** in bytes

These are usually stored within a project as C files. They are linked into the resulting executable like any other constant data.

## Files

To deal with files you need to add a *Drive* to LittlevGL. In short, a *Drive* is a collection of functions (*open*, *read*, *close*, etc.) registered in LittlevGL to make file operations. You can add an interface to a standard file system (FAT32 on SD card) or you create your simple file system to read data from an SPI Flash memory. In every case, a *Drive* is just an abstraction to read and/or write data to a memory. See the [File system](#) section to learn more.

Images stored as files are not linked into the resulting executable, and must be read to RAM before being drawn. As a result, they are not as resource-friendly as variable images. However, they are easier to replace without needing to recompile the main program.

## Color formats

Various built-in color formats are supported:

- **LV\_IMG\_CF\_TRUE\_COLOR** Simply stores the RGB colors (in whatever color depth LittlevGL is configured for).
- **LV\_IMG\_CF\_TRUE\_COLOR\_ALPHA** Like **LV\_IMG\_CF\_TRUE\_COLOR** but it also adds an alpha (transparency) byte for every pixel.
- **LV\_IMG\_CF\_TRUE\_COLOR\_CHROMA\_KEYED** Like **LV\_IMG\_CF\_TRUE\_COLOR** but if a pixel has **LV\_COLOR\_TRANSP** (set in *lv\_conf.h*) color the pixel will be transparent.
- **LV\_IMG\_CF\_INDEXED\_1/2/4/8BIT** Uses a palette with 2, 4, 16 or 256 colors and stores each pixel in 1, 2, 4 or 8 bits.
- **LV\_IMG\_CF\_ALPHA\_1/2/4/8BIT** Only stores the Alpha value on 1, 2, 4 or 8 bits. The pixels take the color of `style.image.color` and the set opacity. The source image has to be an alpha channel. This is ideal for bitmaps similar to fonts (where the whole image is one color but you'd like to be able to change it).

The bytes of the **LV\_IMG\_CF\_TRUE\_COLOR** images are stored in the following order.

For 32-bit color depth:

- Byte 0: Blue
- Byte 1: Green
- Byte 2: Red
- Byte 3: Alpha

For 16-bit color depth:

- Byte 0: Green 3 lower bit, Blue 5 bit
- Byte 1: Red 5 bit, Green 3 higher bit
- Byte 2: Alpha byte (only with **LV\_IMG\_CF\_TRUE\_COLOR\_ALPHA**)

For 8-bit color depth:

- Byte 0: Red 3 bit, Green 3 bit, Blue 2 bit
- Byte 2: Alpha byte (only with LV\_IMG\_CF\_TRUE\_COLOR\_ALPHA)

You can store images in a *Raw* format to indicate that, it's not a built-in color format and an external *Image decoder* needs to be used to decode the image.

- **LV\_IMG\_CF\_RAW** Indicates a basic raw image (e.g. a PNG or JPG image).
- **LV\_IMG\_CF\_RAW\_ALPHA** Indicates that the image has alpha and an alpha byte is added for every pixel.
- **LV\_IMG\_CF\_RAW\_CHROME\_KEYED** Indicates that the image is chrome keyed as described in **LV\_IMG\_CF\_TRUE\_COLOR\_CHROMA\_KEYED** above.

## Add and use images

You can add images to LittlevGL in two ways:

- using the online converter
- manually create images

### Online converter

The online Image converter is available here: <https://littlevgl.com/image-to-c-array>

Adding an image to LittlevGL via online converter is easy.

1. You need to select a *BMP*, *PNG* or *JPG* image first.
2. Give the image a name that will be used within LittlevGL.
3. Select the *Color format*.
4. Select the type of image you want. Choosing a binary will generate a **.bin** file that must be stored separately and read using the *file support*. Choosing a variable will generate a standard C file that can be linked into your project.
5. Hit the *Convert* button. Once the conversion is finished, your browser will automatically download the resulting file.

In the converter C arrays (variables), the bitmaps for all the color depths (1, 8, 16 or 32) are included in the C file, but only the color depth that matches **LV\_COLOR\_DEPTH** in *lv\_conf.h* will actually be linked into the resulting executable.

In case of binary files, you need to specify the color format you want:

- RGB332 for 8-bit color depth
- RGB565 for 16-bit color depth
- RGB565 Swap for 16-bit color depth (two bytes are swapped)
- RGB888 for 32-bit color depth

### Manually create an image

If you are generating an image at run-time, you can craft an image variable to display it using LittlevGL. For example:

```
uint8_t my_img_data[] = {0x00, 0x01, 0x02, ...};

static lv_img_dsc_t my_img_dsc = {
    .header.always_zero = 0,
    .header.w = 80,
    .header.h = 60,
    .data_size = 80 * 60 * LV_COLOR_DEPTH / 8,
    .header.cf = LV_IMG_CF_TRUE_COLOR,          /*Set the color format*/
    .data = my_img_data,
};
```

If the color format is `LV_IMG_CF_TRUE_COLOR_ALPHA` you can set `data_size` like `80 * 60 * LV_IMG_PX_SIZE_ALPHA_BYTE`.

Another (possibly simpler) option to create and display an image at run-time is to use the *Canvas* object.

## Use images

The simplest way to use an image in LittlevGL is to display it with an *lv\_img* object:

```
lv_obj_t * icon = lv_img_create(lv_scr_act(), NULL);

/*From variable*/
lv_img_set_src(icon, &my_icon_dsc);

/*From file*/
lv_img_set_src(icon, "S:my_icon.bin");
```

If the image was converted with the online converter, you should use `LV_IMG_DECLARE(my_icon_dsc)` to declare the image in the file where you want to use it.

## Image decoder

As you can see in the *Color formats* section, LittlevGL supports several built-in image formats. In many cases, these will be all you need. LittlevGL doesn't directly support, however, generic image formats like PNG or JPG.

To handle non-built-in image formats, you need to use external libraries and attach them to LittlevGL via the *Image decoder* interface.

The image decoder consists of 4 callbacks:

- **info** get some basic info about the image (width, height and color format).
- **open** open the image: either store the decoded image or set it to `NULL` to indicate the image can be read line-by-line.
- **read** if *open* didn't fully open the image this function should give some decoded data (max 1 line) from a given position.
- **close** close the opened image, free the allocated resources.

You can add any number of image decoders. When an image needs to be drawn, the library will try all the registered image decoder until finding one which can open the image, i.e. knowing that format.

The `LV_IMG_CF_TRUE_COLOR...`, `LV_IMG_INDEXED...` and `LV_IMG_ALPHA...` formats (essentially, all non-RAW formats) are understood by the built-in decoder.



## Custom image formats

The easiest way to create a custom image is to use the online image converter and set **Raw**, **Raw with alpha** or **Raw with chrome keyed** format. It will just take every byte of the binary file you uploaded and write it as the image “bitmap”. You then need to attach an image decoder that will parse that bitmap and generate the real, renderable bitmap.

`header.cf` will be `LV_IMG_CF_RAW`, `LV_IMG_CF_RAW_ALPHA` or `LV_IMG_CF_RAW_CHROME_KEYED` accordingly. You should choose the correct format according to your needs: fully opaque image, use alpha channel or use chroma keying.

After decoding, the *raw* formats are considered *True color* by the library. In other words, the image decoder must decode the *Raw* images to *True color* according to the format described in `[#color-formats](Color formats)` section.

If you want to create a custom image, you should use `LV_IMG_CF_USER_ENCODED_0..7` color formats. However, the library can draw the images only in *True color* format (or *Raw* but finally it’s supposed to be in *True color* format). So the `LV_IMG_CF_USER_ENCODED...` formats are not known by the library, therefore, they should be decoded to one of the known formats from `[#color-formats](Color formats)` section. It’s possible to decode the image to a non-true color format first, for example, `LV_IMG_INDEXED_4BITS`, and then call the built-in decoder functions to convert it to *True color*.

With *User encoded* formats, the color format in the open function (`dsc->header.cf`) should be changed according to the new format.

## Register an image decoder

Here’s an example of getting LittlevGL to work with PNG images.

First, you need to create a new image decoder and set some functions to open/close the PNG files. It should look like this:

```
/*Create a new decoder and register functions */
lv_img_decoder_t * dec = lv_img_decoder_create();
lv_img_decoder_set_info_cb(dec, decoder_info);
lv_img_decoder_set_open_cb(dec, decoder_open);
lv_img_decoder_set_close_cb(dec, decoder_close);

/**
 * Get info about a PNG image
 * @param decoder pointer to the decoder where this function belongs
 * @param src can be file name or pointer to a C array
 * @param header store the info here
 * @return LV_RES_OK: no error; LV_RES_INV: can't get the info
 */
static lv_res_t decoder_info(lv_img_decoder_t * decoder, const void * src, lv_img_header_t * header)
{
    /*Check whether the type `src` is known by the decoder*/
    if(is_png(src) == false) return LV_RES_INV;

    /* Read the PNG header and find `width` and `height` */
    ...

    header->cf = LV_IMG_CF_RAW_ALPHA;
    header->w = width;
}
```

(continues on next page)

(continued from previous page)

```

    header->h = height;
}

/**
 * Open a PNG image and return the decoded image
 * @param decoder pointer to the decoder where this function belongs
 * @param dsc pointer to a descriptor which describes this decoding session
 * @return LV_RES_OK: no error; LV_RES_INV: can't get the info
 */
static lv_res_t decoder_open(lv_img_decoder_t * decoder, lv_img_decoder_dsc_t * dsc)
{
    /*Check whether the type `src` is known by the decoder*/
    if(is_png(src) == false) return LV_RES_INV;

    /*Decode and store the image. If `dsc->img_data` is `NULL`, the `read_line`
    ↪ function will be called to get the image data line-by-line*/
    dsc->img_data = my_png_decoder(src);

    /*Change the color format if required. For PNG usually 'Raw' is fine*/
    dsc->header.cf = LV_IMG_CF_...

    /*Call a built in decoder function if required. It's not required if `my_png_
    ↪ decoder` opened the image in true color format.*/
    lv_res_t res = lv_img_decoder_built_in_open(decoder, dsc);

    return res;
}

/**
 * Decode `len` pixels starting from the given `x`, `y` coordinates and store them in
    ↪ `buf`.
 * Required only if the "open" function can't open the whole decoded pixel array.
    ↪ (dsc->img_data == NULL)
 * @param decoder pointer to the decoder the function associated with
 * @param dsc pointer to decoder descriptor
 * @param x start x coordinate
 * @param y start y coordinate
 * @param len number of pixels to decode
 * @param buf a buffer to store the decoded pixels
 * @return LV_RES_OK: ok; LV_RES_INV: failed
 */
lv_res_t decoder_built_in_read_line(lv_img_decoder_t * decoder, lv_img_decoder_dsc_t
    ↪ dsc, lv_coord_t x,
                                lv_coord_t y, lv_coord_t len, uint8_
    ↪ t * buf)
{
    /*With PNG it's usually not required*/

    /*Copy `len` pixels from `x` and `y` coordinates in True color format to `buf` */
}

/**
 * Free the allocated resources
 * @param decoder pointer to the decoder where this function belongs

```

(continues on next page)

(continued from previous page)

```
* @param dsc pointer to a descriptor which describes this decoding session
*/
static void decoder_close(lv_img_decoder_t * decoder, lv_img_decoder_dsc_t * dsc)
{
    /*Free all allocated data*/

    /*Call the built-in close function if the built-in open/read_line was used*/
    lv_img_decoder_built_in_close(decoder, dsc);
}
```

So in summary:

- In `decoder_info`, you should collect some basic information about the image and store it in `header`.
- In `decoder_open`, you should try to open the image source pointed by `dsc->src`. Its type is already in `dsc->src_type == LV_IMG_SRC_FILE/VARIABLE`. If this format/type is not supported by the decoder, return `LV_RES_INV`. However, if you can open the image, a pointer to the decoded *True color* image should be set in `dsc->img_data`. If the format is known but, you don't want to decode while image (e.g. no memory for it) set `dsc->img_data = NULL` to call `read_line` to get the pixels.
- In `decoder_close` you should free all the allocated resources.
- `decoder_read` is optional. Decoding the whole image requires extra memory and some computational overhead. However, if can decode one line of the image without decoding the whole image, you can save memory and time. To indicate that, the *line read* function should be used, set `dsc->img_data = NULL` in the open function.

### Manually use an image decoder

LittlevGL will use the registered image decoder automatically if you try and draw a raw image (i.e. using the `lv_img` object) but you can use them manually too. Create a `lv_img_decoder_dsc_t` variable to describe the decoding session and call `lv_img_decoder_open()`, `lv_img_decoder_open()`.

```
lv_res_t res;
lv_img_decoder_dsc_t dsc;
res = lv_img_decoder_open(&dsc, &my_img_dsc, &lv_style_plain);

if(res == LV_RES_OK) {
    /*Do something with `dsc->img_data`*/
    lv_img_decoder_close(&dsc);
}
```

### Image caching

Sometimes it takes a lot of time to open an image. Continuously decoding a PNG image or loading images from a slow external memory would be inefficient and detrimental to the user experience.

Therefore, LittlevGL caches a given number of images. Caching means some images will be left open, hence LittlevGL can quickly access them from `dsc->img_data` instead of needing to decode them again.

Of course, caching images is resource-intensive as it uses more RAM (to store the decoded image). LittlevGL tries to optimize the process as much as possible (see below), but you will still need to evaluate if this would

be beneficial for your platform or not. If you have a deeply embedded target which decodes small images from a relatively fast storage medium, image caching may not be worth it.

## Cache size

The number of cache entries can be defined in `LV_IMG_CACHE_DEF_SIZE` in `lv_conf.h`. The default value is 1 so only the most recently used image will be left open.

The size of the cache can be changed at run-time with `lv_img_cache_set_size(entry_num)`.

## Value of images

When you use more images than cache entries, LittlevGL can't cache all of the images. Instead, the library will close one of the cached images (to free space).

To decide which image to close, LittlevGL uses a measurement it previously made of how long it took to open the image. Cache entries that hold slower-to-open images are considered more valuable and are kept in the cache as long as possible.

If you want or need to override LittlevGL's measurement, you can manually set the *time to open* value in the decoder open function in `dsc->time_to_open = time_ms` to give a higher or lower value. (Leave it unchanged to let LittlevGL set it.)

Every cache entry has a “*life*” value. Every time an image opening happens through the cache, the *life* of all entries are decreased to make them older. When a cached image is used, its *life* is increased by the *time to open* value to make it more alive.

If there is no more space in the cache, always the entry with the smallest life will be closed.

## Memory usage

Note that, the cached image might continuously consume memory. For example, if 3 PNG images are cached, they will consume memory while they are opened.

Therefore, it's the user's responsibility to be sure there is enough RAM to cache, even the largest images at the same time.

## Clean the cache

Let's say you have loaded a PNG image into a `lv_img_dsc_t my_png` variable and use it in an `lv_img` object. If the image is already cached and you then change the underlying PNG file, you need to notify LittlevGL to cache the image again. Otherwise, there is no easy way of detecting that the underlying file changed and LittlevGL will still draw the old image.

To do this, use `lv_img_cache_invalidate_src(&my_png)`. If `NULL` is passed as a parameter, the whole cache will be cleaned.

## API

### Image decoder

## Typedefs

**typedef** uint8\_t **lv\_img\_src\_t**

**typedef** lv\_res\_t (\***lv\_img\_decoder\_info\_f\_t**)(**struct** *\_\_lv\_img\_decoder* \*decoder, **const** void \*src, lv\_img\_header\_t \*header)

Get info from an image and store in the header

**Return** LV\_RES\_OK: info written correctly; LV\_RES\_INV: failed

### Parameters

- **src**: the image source. Can be a pointer to a C array or a file name (Use **lv\_img\_src\_get\_type** to determine the type)
- **header**: store the info here

**typedef** lv\_res\_t (\***lv\_img\_decoder\_open\_f\_t**)(**struct** *\_\_lv\_img\_decoder* \*decoder, **struct** *\_\_lv\_img\_decoder\_dsc* \*dsc)

Open an image for decoding. Prepare it as it is required to read it later

### Parameters

- **decoder**: pointer to the decoder the function associated with
- **dsc**: pointer to decoder descriptor. **src**, **style** are already initialized in it.

**typedef** lv\_res\_t (\***lv\_img\_decoder\_read\_line\_f\_t**)(**struct** *\_\_lv\_img\_decoder* \*decoder, **struct** *\_\_lv\_img\_decoder\_dsc* \*dsc, lv\_coord\_t x, lv\_coord\_t y, lv\_coord\_t len, uint8\_t \*buf)

Decode **len** pixels starting from the given **x**, **y** coordinates and store them in **buf**. Required only if the “open” function can’t return with the whole decoded pixel array.

**Return** LV\_RES\_OK: ok; LV\_RES\_INV: failed

### Parameters

- **decoder**: pointer to the decoder the function associated with
- **dsc**: pointer to decoder descriptor
- **x**: start x coordinate
- **y**: start y coordinate
- **len**: number of pixels to decode
- **buf**: a buffer to store the decoded pixels

**typedef** void (\***lv\_img\_decoder\_close\_f\_t**)(**struct** *\_\_lv\_img\_decoder* \*decoder, **struct** *\_\_lv\_img\_decoder\_dsc* \*dsc)

Close the pending decoding. Free resources etc.

### Parameters

- **decoder**: pointer to the decoder the function associated with
- **dsc**: pointer to decoder descriptor

**typedef struct** *\_\_lv\_img\_decoder* **lv\_img\_decoder\_t**

**typedef struct** *\_\_lv\_img\_decoder\_dsc* **lv\_img\_decoder\_dsc\_t**

Describe an image decoding session. Stores data about the decoding

## Enums

**enum** [anonymous]

Source of image.

*Values:*

**LV\_IMG\_SRC\_VARIABLE**

**LV\_IMG\_SRC\_FILE**

Binary/C variable

**LV\_IMG\_SRC\_SYMBOL**

File in filesystem

**LV\_IMG\_SRC\_UNKNOWN**

Symbol (lv\_symbol\_def.h)

## Functions

void **lv\_img\_decoder\_init**(void)

Initialize the image decoder module

lv\_res\_t **lv\_img\_decoder\_get\_info**(const char \*src, lv\_img\_header\_t \*header)

Get information about an image. Try the created image decoder one by one. Once one is able to get info that info will be used.

**Return** LV\_RES\_OK: success; LV\_RES\_INV: wasn't able to get info about the image

### Parameters

- **src**: the image source. Can be 1) File name: E.g. "S:folder/img1.png" (The drivers needs to registered via `lv_fs_add_drv()`) 2) Variable: Pointer to an `lv_img_dsc_t` variable 3) Symbol: E.g. `LV_SYMBOL_OK`
- **header**: the image info will be stored here

lv\_res\_t **lv\_img\_decoder\_open**(lv\_img\_decoder\_dsc\_t \*dsc, const void \*src, lv\_color\_t color)

Open an image. Try the created image decoder one by one. Once one is able to open the image that decoder is save in **dsc**

**Return** LV\_RES\_OK: opened the image. `dsc->img_data` and `dsc->header` are set.  
LV\_RES\_INV: none of the registered image decoders were able to open the image.

### Parameters

- **dsc**: describe a decoding session. Simply a pointer to an `lv_img_decoder_dsc_t` variable.
- **src**: the image source. Can be 1) File name: E.g. "S:folder/img1.png" (The drivers needs to registered via `lv_fs_add_drv()`) 2) Variable: Pointer to an `lv_img_dsc_t` variable 3) Symbol: E.g. `LV_SYMBOL_OK`
- **style**: the style of the image

lv\_res\_t **lv\_img\_decoder\_read\_line**(lv\_img\_decoder\_dsc\_t \*dsc, lv\_coord\_t x, lv\_coord\_t y, lv\_coord\_t len, uint8\_t \*buf)

Read a line from an opened image

**Return** LV\_RES\_OK: success; LV\_RES\_INV: an error occurred

### Parameters

- **dsc**: pointer to `lv_img_decoder_dsc_t` used in `lv_img_decoder_open`

- **x**: start X coordinate (from left)
- **y**: start Y coordinate (from top)
- **len**: number of pixels to read
- **buf**: store the data here

void **lv\_img\_decoder\_close**(*lv\_img\_decoder\_dsc\_t* \*dsc)  
Close a decoding session

#### Parameters

- **dsc**: pointer to *lv\_img\_decoder\_dsc\_t* used in *lv\_img\_decoder\_open*

*lv\_img\_decoder\_t* \***lv\_img\_decoder\_create**(void)  
Create a new image decoder

**Return** pointer to the new image decoder

void **lv\_img\_decoder\_delete**(*lv\_img\_decoder\_t* \*decoder)  
Delete an image decoder

#### Parameters

- **decoder**: pointer to an image decoder

void **lv\_img\_decoder\_set\_info\_cb**(*lv\_img\_decoder\_t* \*decoder, *lv\_img\_decoder\_info\_f\_t* info\_cb)  
Set a callback to get information about the image

#### Parameters

- **decoder**: pointer to an image decoder
- **info\_cb**: a function to collect info about an image (fill an *lv\_img\_header\_t* struct)

void **lv\_img\_decoder\_set\_open\_cb**(*lv\_img\_decoder\_t* \*decoder, *lv\_img\_decoder\_open\_f\_t* open\_cb)  
Set a callback to open an image

#### Parameters

- **decoder**: pointer to an image decoder
- **open\_cb**: a function to open an image

void **lv\_img\_decoder\_set\_read\_line\_cb**(*lv\_img\_decoder\_t* \*decoder, *lv\_img\_decoder\_read\_line\_f\_t* read\_line\_cb)  
Set a callback to a decoded line of an image

#### Parameters

- **decoder**: pointer to an image decoder
- **read\_line\_cb**: a function to read a line of an image

void **lv\_img\_decoder\_set\_close\_cb**(*lv\_img\_decoder\_t* \*decoder, *lv\_img\_decoder\_close\_f\_t* close\_cb)  
Set a callback to close a decoding session. E.g. close files and free other resources.

#### Parameters

- **decoder**: pointer to an image decoder
- **close\_cb**: a function to close a decoding session

```
lv_res_t lv_img_decoder_built_in_info(lv_img_decoder_t *decoder, const void *src,
                                     lv_img_header_t *header)
```

Get info about a built-in image

**Return** LV\_RES\_OK: the info is successfully stored in **header**; LV\_RES\_INV: unknown format or other error.

#### Parameters

- **decoder**: the decoder where this function belongs
- **src**: the image source: pointer to an `lv_img_dsc_t` variable, a file path or a symbol
- **header**: store the image data here

```
lv_res_t lv_img_decoder_built_in_open(lv_img_decoder_t *decoder, lv_img_decoder_dsc_t
                                     *dsc)
```

Open a built in image

**Return** LV\_RES\_OK: the info is successfully stored in **header**; LV\_RES\_INV: unknown format or other error.

#### Parameters

- **decoder**: the decoder where this function belongs
- **dsc**: pointer to decoder descriptor. **src**, **style** are already initialized in it.

```
lv_res_t lv_img_decoder_built_in_read_line(lv_img_decoder_t *decoder,
                                           lv_img_decoder_dsc_t *dsc, lv_coord_t
                                           x, lv_coord_t y, lv_coord_t len, uint8_t
                                           *buf)
```

Decode **len** pixels starting from the given **x**, **y** coordinates and store them in **buf**. Required only if the “open” function can’t return with the whole decoded pixel array.

**Return** LV\_RES\_OK: ok; LV\_RES\_INV: failed

#### Parameters

- **decoder**: pointer to the decoder the function associated with
- **dsc**: pointer to decoder descriptor
- **x**: start x coordinate
- **y**: start y coordinate
- **len**: number of pixels to decode
- **buf**: a buffer to store the decoded pixels

```
void lv_img_decoder_built_in_close(lv_img_decoder_t *decoder, lv_img_decoder_dsc_t
                                  *dsc)
```

Close the pending decoding. Free resources etc.

#### Parameters

- **decoder**: pointer to the decoder the function associated with
- **dsc**: pointer to decoder descriptor

**struct \_lv\_img\_decoder**



## Public Members

*lv\_img\_decoder\_info\_f\_t* **info\_cb**  
*lv\_img\_decoder\_open\_f\_t* **open\_cb**  
*lv\_img\_decoder\_read\_line\_f\_t* **read\_line\_cb**  
*lv\_img\_decoder\_close\_f\_t* **close\_cb**  
*lv\_img\_decoder\_user\_data\_t* **user\_data**

## struct **lv\_img\_decoder\_dsc**

*#include <lv\_img\_decoder.h>* Describe an image decoding session. Stores data about the decoding

## Public Members

*lv\_img\_decoder\_t* \***decoder**  
 The decoder which was able to open the image source  
**const** void \***src**  
 The image source. A file path like “S:my\_img.png” or pointer to an *lv\_img\_dsc\_t* variable  
*lv\_color\_t* **color**  
 Style to draw the image.  
*lv\_img\_src\_t* **src\_type**  
 Type of the source: file or variable. Can be set in **open** function if required  
*lv\_img\_header\_t* **header**  
 Info about the opened image: color format, size, etc. MUST be set in **open** function  
**const** uint8\_t \***img\_data**  
 Pointer to a buffer where the image’s data (pixels) are stored in a decoded, plain format. MUST be set in **open** function  
 uint32\_t **time\_to\_open**  
 How much time did it take to open the image. [ms] If not set *lv\_img\_cache* will measure and set the time to open  
**const** char \***error\_msg**  
 A text to display instead of the image when the image can’t be opened. Can be set in **open** function or set NULL.  
 void \***user\_data**  
 Store any custom data here is required

## Image cache

## Functions

*lv\_img\_cache\_entry\_t* \***lv\_img\_cache\_open**(**const** void \**src*, *lv\_color\_t* *color*)

Open an image using the image decoder interface and cache it. The image will be left open meaning if the image decoder open callback allocated memory then it will remain. The image is closed if a new image is opened and the new image takes its place in the cache.

**Return** pointer to the cache entry or NULL if can open the image

**Parameters**

- **src**: source of the image. Path to file or pointer to an `lv_img_dsc_t` variable
- **style**: style of the image

void **lv\_img\_cache\_set\_size**(uint16\_t *new\_slot\_num*)

Set the number of images to be cached. More cached images mean more opened image at same time which might mean more memory usage. E.g. if 20 PNG or JPG images are open in the RAM they consume memory while opened in the cache.

#### Parameters

- **new\_entry\_cnt**: number of image to cache

void **lv\_img\_cache\_invalidate\_src**(const void \**src*)

Invalidate an image source in the cache. Useful if the image source is updated therefore it needs to be cached again.

#### Parameters

- **src**: an image source path to a file or pointer to an `lv_img_dsc_t` variable.

**struct lv\_img\_cache\_entry\_t**

*#include <lv\_img\_cache.h>* When loading images from the network it can take a long time to download and decode the image.

To avoid repeating this heavy load images can be cached.

#### Public Members

*lv\_img\_decoder\_dsc\_t* **dec\_dsc**

Image information

int32\_t **life**

Count the cache entries' s life. Add **time\_tio\_open** to **life** when the entry is used. Decrement all lifes by one every in every *lv\_img\_cache\_open*. If life == 0 the entry can be reused

#### File system

LittlevGL has a 'File system' abstraction module that enables you to attach any type of file systems. The file system is identified by a drive letter. For example, if the SD card is associated with the letter 'S', a file can be reached like "S:path/to/file.txt".

#### Add a driver

To add a driver, `lv_fs_drv_t` needs to be initialized like this:

```
lv_fs_drv_t drv;
lv_fs_drv_init(&drv);                                /*Basic initialization*/

drv.letter = 'S';                                     /*An uppercase letter to identify the drive_
↪*/
drv.file_size = sizeof(my_file_object);               /*Size required to store a file object*/
drv.rddir_size = sizeof(my_dir_object);               /*Size required to store a directory object_
↪(used by dir_open/close/read)*/
drv.ready_cb = my_ready_cb;                           /*Callback to tell if the drive is ready to_
↪use */
drv.open_cb = my_open_cb;                             /*Callback to open a file */
```

(continues on next page)

(continued from previous page)

```

drv.close_cb = my_close_cb;           /*Callback to close a file */
drv.read_cb = my_read_cb;             /*Callback to read a file */
drv.write_cb = my_write_cb;           /*Callback to write a file */
drv.seek_cb = my_seek_cb;             /*Callback to seek in a file (Move cursor)
↪ */
drv.tell_cb = my_tell_cb;             /*Callback to tell the cursor position */
drv.trunc_cb = my_trunc_cb;           /*Callback to delete a file */
drv.size_cb = my_size_cb;             /*Callback to tell a file's size */
drv.rename_cb = my_size_cb;           /*Callback to rename a file */

drv.dir_open_cb = my_dir_open_cb;     /*Callback to open directory to read its
↪content */
drv.dir_read_cb = my_dir_read_cb;     /*Callback to read a directory's content */
drv.dir_close_cb = my_dir_close_cb;   /*Callback to close a directory */

drv.free_space_cb = my_size_cb;       /*Callback to tell free space on the drive
↪ */

drv.user_data = my_user_data;         /*Any custom data if required*/

lv_fs_drv_register(&drv);             /*Finally register the drive*/

```

Any of the callbacks can be **NULL** to indicate that that operation is not supported.

As an example of how the callbacks are used, if you use `lv_fs_open(&file, "S:/folder/file.txt", LV_FS_MODE_WR)`, LittlevGL:

1. Verifies that a registered drive exists with the letter 'S'.
2. Checks if it's `open_cb` is implemented (not **NULL**).
3. Calls the set `open_cb` with "folder/file.txt" path.

## Usage example

The example below shows how to read from a file:

```

lv_fs_file_t f;
lv_fs_res_t res;
res = lv_fs_open(&f, "S:folder/file.txt", LV_FS_MODE_RD);
if(res != LV_FS_RES_OK) my_error_handling();

uint32_t read_num;
uint8_t buf[8];
res = lv_fs_read(&f, buf, 8, &read_num);
if(res != LV_FS_RES_OK || read_num != 8) my_error_handling();

lv_fs_close(&f);

```

The mode in `lv_fs_open` can be `LV_FS_MODE_WR` to open for write or `LV_FS_MODE_RD` | `LV_FS_MODE_WR` for both

This example shows how to read a directory's content. It's up to the driver how to mark the directories, but it can be a good practice to insert a '/' in front of the directory name.

```
lv_fs_dir_t dir;
lv_fs_res_t res;
res = lv_fs_dir_open(&dir, "S:/folder");
if(res != LV_FS_RES_OK) my_error_handling();

char fn[256];
while(1) {
    res = lv_fs_dir_read(&dir, fn);
    if(res != LV_FS_RES_OK) {
        my_error_handling();
        break;
    }

    /*fn is empty, if not more files to read*/
    if(strlen(fn) == 0) {
        break;
    }

    printf("%s\n", fn);
}

lv_fs_dir_close(&dir);
```

## Use drivers for images

*Image* objects can be opened from files too (besides variables stored in the flash).

To initialize the image, the following callbacks are required:

- open
- close
- read
- seek
- tell

## API

### Typedefs

```
typedef uint8_t lv_fs_res_t
typedef uint8_t lv_fs_mode_t
typedef struct __lv_fs_drv_t lv_fs_drv_t
```

### Enums

```
enum [anonymous]
    Errors in the file system module.
```

*Values:*

```
LV_FS_RES_OK = 0
```

**LV\_FS\_RES\_HW\_ERR**  
**LV\_FS\_RES\_FS\_ERR**  
**LV\_FS\_RES\_NOT\_EX**  
**LV\_FS\_RES\_FULL**  
**LV\_FS\_RES\_LOCKED**  
**LV\_FS\_RES\_DENIED**  
**LV\_FS\_RES\_BUSY**  
**LV\_FS\_RES\_TOUT**  
**LV\_FS\_RES\_NOT\_IMP**  
**LV\_FS\_RES\_OUT\_OF\_MEM**  
**LV\_FS\_RES\_INV\_PARAM**  
**LV\_FS\_RES\_UNKNOWN**

**enum** [anonymous]  
 Filesystem mode.

*Values:*

**LV\_FS\_MODE\_WR** = 0x01  
**LV\_FS\_MODE\_RD** = 0x02

## Functions

**void** **lv\_fs\_init**(void)  
 Initialize the File system interface

**void** **lv\_fs\_drv\_init**(*lv\_fs\_drv\_t* \*drv)  
 Initialize a file system driver with default values. It is used to surly have known values in the fields ant not memory junk. After it you can set the fields.

### Parameters

- **drv**: pointer to driver variable to initialize

**void** **lv\_fs\_drv\_register**(*lv\_fs\_drv\_t* \*drv\_p)  
 Add a new drive

### Parameters

- **drv\_p**: pointer to an *lv\_fs\_drv\_t* structure which is initied with the corresponding function pointers. The data will be copied so the variable can be local.

*lv\_fs\_drv\_t* \***lv\_fs\_get\_drv**(char letter)  
 Give a pointer to a driver from its letter

**Return** pointer to a driver or NULL if not found

### Parameters

- **letter**: the driver letter

**bool** **lv\_fs\_is\_ready**(char letter)  
 Test if a drive is rady or not. If the **ready** function was not initialized **true** will be returned.

**Return** true: drive is ready; false: drive is not ready

#### Parameters

- **letter**: letter of the drive

*lv\_fs\_res\_t* **lv\_fs\_open**(*lv\_fs\_file\_t* \**file\_p*, **const** char \**path*, *lv\_fs\_mode\_t* *mode*)

Open a file

**Return** LV\_FS\_RES\_OK or any error from *lv\_fs\_res\_t* enum

#### Parameters

- **file\_p**: pointer to a *lv\_fs\_file\_t* variable
- **path**: path to the file beginning with the driver letter (e.g. S:/folder/file.txt)
- **mode**: read: FS\_MODE\_RD, write: FS\_MODE\_WR, both: FS\_MODE\_RD | FS\_MODE\_WR

*lv\_fs\_res\_t* **lv\_fs\_close**(*lv\_fs\_file\_t* \**file\_p*)

Close an already opened file

**Return** LV\_FS\_RES\_OK or any error from *lv\_fs\_res\_t* enum

#### Parameters

- **file\_p**: pointer to a *lv\_fs\_file\_t* variable

*lv\_fs\_res\_t* **lv\_fs\_remove**(**const** char \**path*)

Delete a file

**Return** LV\_FS\_RES\_OK or any error from *lv\_fs\_res\_t* enum

#### Parameters

- **path**: path of the file to delete

*lv\_fs\_res\_t* **lv\_fs\_read**(*lv\_fs\_file\_t* \**file\_p*, void \**buf*, uint32\_t *btr*, uint32\_t \**br*)

Read from a file

**Return** LV\_FS\_RES\_OK or any error from *lv\_fs\_res\_t* enum

#### Parameters

- **file\_p**: pointer to a *lv\_fs\_file\_t* variable
- **buf**: pointer to a buffer where the read bytes are stored
- **btr**: Bytes To Read
- **br**: the number of real read bytes (Bytes Read). NULL if unused.

*lv\_fs\_res\_t* **lv\_fs\_write**(*lv\_fs\_file\_t* \**file\_p*, **const** void \**buf*, uint32\_t *btw*, uint32\_t \**bw*)

Write into a file

**Return** LV\_FS\_RES\_OK or any error from *lv\_fs\_res\_t* enum

#### Parameters

- **file\_p**: pointer to a *lv\_fs\_file\_t* variable
- **buf**: pointer to a buffer with the bytes to write
- **btr**: Bytes To Write
- **br**: the number of real written bytes (Bytes Written). NULL if unused.

*lv\_fs\_res\_t* **lv\_fs\_seek**(*lv\_fs\_file\_t* \**file\_p*, uint32\_t *pos*)

Set the position of the ‘cursor’ (read write pointer) in a file

**Return** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

**Parameters**

- **file\_p**: pointer to a *lv\_fs\_file\_t* variable
- **pos**: the new position expressed in bytes index (0: start of file)

*lv\_fs\_res\_t* **lv\_fs\_tell**(*lv\_fs\_file\_t* \*file\_p, uint32\_t \*pos)

Give the position of the read write pointer

**Return** LV\_FS\_RES\_OK or any error from 'fs\_res\_t'

**Parameters**

- **file\_p**: pointer to a *lv\_fs\_file\_t* variable
- **pos\_p**: pointer to store the position of the read write pointer

*lv\_fs\_res\_t* **lv\_fs\_trunc**(*lv\_fs\_file\_t* \*file\_p)

Truncate the file size to the current position of the read write pointer

**Return** LV\_FS\_RES\_OK: no error, the file is read any error from lv\_fs\_res\_t enum

**Parameters**

- **file\_p**: pointer to an 'ufs\_file\_t' variable. (opened with lv\_fs\_open )

*lv\_fs\_res\_t* **lv\_fs\_size**(*lv\_fs\_file\_t* \*file\_p, uint32\_t \*size)

Give the size of a file bytes

**Return** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

**Parameters**

- **file\_p**: pointer to a *lv\_fs\_file\_t* variable
- **size**: pointer to a variable to store the size

*lv\_fs\_res\_t* **lv\_fs\_rename**(const char \*oldname, const char \*newname)

Rename a file

**Return** LV\_FS\_RES\_OK or any error from 'fs\_res\_t'

**Parameters**

- **oldname**: path to the file
- **newname**: path with the new name

*lv\_fs\_res\_t* **lv\_fs\_dir\_open**(*lv\_fs\_dir\_t* \*rddir\_p, const char \*path)

Initialize a 'fs\_dir\_t' variable for directory reading

**Return** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

**Parameters**

- **rddir\_p**: pointer to a 'fs\_read\_dir\_t' variable
- **path**: path to a directory

*lv\_fs\_res\_t* **lv\_fs\_dir\_read**(*lv\_fs\_dir\_t* \*rddir\_p, char \*fn)

Read the next filename form a directory. The name of the directories will begin with '/'

**Return** LV\_FS\_RES\_OK or any error from lv\_fs\_res\_t enum

**Parameters**

- **rddir\_p**: pointer to an initialized 'fs\_rdir\_t' variable

- **fn**: pointer to a buffer to store the filename

*lv\_fs\_res\_t* **lv\_fs\_dir\_close**(*lv\_fs\_dir\_t* \**rddir\_p*)

Close the directory reading

**Return** LV\_FS\_RES\_OK or any error from *lv\_fs\_res\_t* enum

**Parameters**

- **rddir\_p**: pointer to an initialized 'fs\_dir\_t' variable

*lv\_fs\_res\_t* **lv\_fs\_free\_space**(char *letter*, uint32\_t \**total\_p*, uint32\_t \**free\_p*)

Get the free and total size of a driver in kB

**Return** LV\_FS\_RES\_OK or any error from *lv\_fs\_res\_t* enum

**Parameters**

- **letter**: the driver letter
- **total\_p**: pointer to store the total size [kB]
- **free\_p**: pointer to store the free size [kB]

char \***lv\_fs\_get\_letters**(char \**buf*)

Fill a buffer with the letters of existing drivers

**Return** the buffer

**Parameters**

- **buf**: buffer to store the letters ( '\0' added after the last letter)

const char \***lv\_fs\_get\_ext**(const char \**fn*)

Return with the extension of the filename

**Return** pointer to the beginning extension or empty string if no extension

**Parameters**

- **fn**: string with a filename

char \***lv\_fs\_up**(char \**path*)

Step up one level

**Return** the truncated file name

**Parameters**

- **path**: pointer to a file name

const char \***lv\_fs\_get\_last**(const char \**path*)

Get the last element of a path (e.g. U:/folder/file -> file)

**Return** pointer to the beginning of the last element in the path

**Parameters**

- **buf**: buffer to store the letters ( '\0' added after the last letter)

**struct \_lv\_fs\_drv\_t**

**Public Members**

char **letter**

uint16\_t **file\_size**



```

uint16_t rddir_size
bool (*ready_cb)(struct _lv_fs_drv_t *drv)
lv_fs_res_t (*open_cb)(struct _lv_fs_drv_t *drv, void *file_p, const char *path,
                        lv_fs_mode_t mode)
lv_fs_res_t (*close_cb)(struct _lv_fs_drv_t *drv, void *file_p)
lv_fs_res_t (*remove_cb)(struct _lv_fs_drv_t *drv, const char *fn)
lv_fs_res_t (*read_cb)(struct _lv_fs_drv_t *drv, void *file_p, void *buf, uint32_t btr,
                       uint32_t *br)
lv_fs_res_t (*write_cb)(struct _lv_fs_drv_t *drv, void *file_p, const void *buf,
                        uint32_t btw, uint32_t *bw)
lv_fs_res_t (*seek_cb)(struct _lv_fs_drv_t *drv, void *file_p, uint32_t pos)
lv_fs_res_t (*tell_cb)(struct _lv_fs_drv_t *drv, void *file_p, uint32_t *pos_p)
lv_fs_res_t (*trunc_cb)(struct _lv_fs_drv_t *drv, void *file_p)
lv_fs_res_t (*size_cb)(struct _lv_fs_drv_t *drv, void *file_p, uint32_t *size_p)
lv_fs_res_t (*rename_cb)(struct _lv_fs_drv_t *drv, const char *oldname, const char
                          *newname)
lv_fs_res_t (*free_space_cb)(struct _lv_fs_drv_t *drv, uint32_t *total_p, uint32_t
                              *free_p)
lv_fs_res_t (*dir_open_cb)(struct _lv_fs_drv_t *drv, void *rddir_p, const char *path)
lv_fs_res_t (*dir_read_cb)(struct _lv_fs_drv_t *drv, void *rddir_p, char *fn)
lv_fs_res_t (*dir_close_cb)(struct _lv_fs_drv_t *drv, void *rddir_p)
lv_fs_drv_user_data_t user_data
    Custom file user data

```

## struct lv\_fs\_file\_t

### Public Members

```

void *file_d
lv_fs_drv_t *drv

```

## struct lv\_fs\_dir\_t

### Public Members

```

void *dir_d
lv_fs_drv_t *drv

```

## Animations

You can automatically change the value of a variable between a start and an end value using animations. The animation will happen by the periodical call of an “animator” function with the corresponding value parameter.

The *animator* functions has the following prototype:

```
void func(void * var, lv_anim_var_t value);
```

This prototype is compatible with the majority of the *set* function of LittlevGL. For example `lv_obj_set_x(obj, value)` or `lv_obj_set_width(obj, value)`

## Create an animation

To create an animation an `lv_anim_t` variable has to be initialized and configured with `lv_anim_set_..()` functions.

```
lv_anim_t a;
lv_anim_set_exec_cb(&a, btn1, lv_obj_set_x);    /*Set the animator function and
↪variable to animate*/
lv_anim_set_time(&a, duration, delay);
lv_anim_set_values(&a, start, end);             /*Set start and end values. E.g. 0,
↪150*/
lv_anim_set_path_cb(&a, lv_anim_path_linear);    /*Set path from `lv_anim_path_...`
↪functions or a custom one.*/
lv_anim_set_ready_cb(&a, ready_cb);             /*Set a callback to call then
↪animation is ready. (Optional)*/
lv_anim_set_playback(&a, wait_time);            /*Enable playback of teh animation
↪with `wait_time` delay*/
lv_anim_set_repeat(&a, wait_time);              /*Enable repeat of teh animation with
↪`wait_time` delay. Can be compiled with playback*/

lv_anim_create(&a);                            /*Start the animation*/
```

You can apply **multiple different animations** on the same variable at the same time. For example, animate the x and y coordinates with `lv_obj_set_x` and `lv_obj_set_y`. However, only one animation can exist with a given variable and function pair. Therefore `lv_anim_create()` will delete the already existing variable-function animations.

## Animation path

You can determinate the **path of animation**. In the most simple case, it is linear, which means the current value between *start* and *end* is changed linearly. A *path* is a function which calculates the next value to set based on the current state of the animation. Currently, there are the following built-in paths:

- `lv_anim_path_linear` linear animation
- `lv_anim_path_step` change in one step at the end
- `lv_anim_path_ease_in` slow at the beginning
- `lv_anim_path_ease_out` slow at the end
- `lv_anim_path_ease_in_out` slow at the beginning and end too
- `lv_anim_path_overshoot` overshoot the end value
- `lv_anim_path_bounce` bounce back a little from the end value (like hitting a wall)

## Speed vs time

By default, you can set the animation time. But, in some cases, the **animation speed** is more practical.

The `lv_anim_speed_to_time(speed, start, end)` function calculates the required time in milliseconds to reach the end value from a start value with the given speed. The speed is interpreted in *unit/sec* dimension. For example, `lv_anim_speed_to_time(20,0,100)` will give 5000 milliseconds. For example, in case of `lv_obj_set_x` *unit* is pixels so *20* means *20 px/sec* speed.

## Delete animations

You can **delete an animation** by `lv_anim_del(var, func)` by providing the animated variable and its animator function.

## API

### Input device

### Typedefs

**typedef** uint8\_t **lv\_anim\_enable\_t**

**typedef** lv\_coord\_t **lv\_anim\_value\_t**

Type of the animated value

**typedef** void (\***lv\_anim\_exec\_xcb\_t**)(void \*, *lv\_anim\_value\_t*)

Generic prototype of “animator” functions. First parameter is the variable to animate. Second parameter is the value to set. Compatible with `lv_xxx_set_yyy(obj, value)` functions The *x* in *\_xcb\_t* means its not a fully generic prototype because it doesn't receive `lv_anim_t *` as its first argument

**typedef** void (\***lv\_anim\_custom\_exec\_cb\_t**)(struct *\_lv\_anim\_t* \*, *lv\_anim\_value\_t*)

Same as `lv_anim_exec_xcb_t` but receives `lv_anim_t *` as the first parameter. It's more consistent but less convenient. Might be used by binding generator functions.

**typedef** *lv\_anim\_value\_t* (\***lv\_anim\_path\_cb\_t**)(const struct *\_lv\_anim\_t* \*)

Get the current value during an animation

**typedef** void (\***lv\_anim\_ready\_cb\_t**)(struct *\_lv\_anim\_t* \*)

Callback to call when the animation is ready

**typedef** void (\***lv\_anim\_start\_cb\_t**)(struct *\_lv\_anim\_t* \*)

Callback to call when the animation really stars (considering delay)

**typedef** struct *\_lv\_anim\_t* **lv\_anim\_t**

Describes an animation

### Enums

**enum** [anonymous]

Can be used to indicate if animations are enabled or disabled in a case

*Values:*

**LV\_ANIM\_OFF**

**LV\_ANIM\_ON**

## Functions

void **lv\_anim\_core\_init**(void)

Init. the animation module

void **lv\_anim\_init**(*lv\_anim\_t* \*a)

Initialize an animation variable. E.g.: `lv_anim_t a; lv_anim_init(&a); lv_anim_set_...(&a); lv_anim_create(&a);`

### Parameters

- **a**: pointer to an `lv_anim_t` variable to initialize

static void **lv\_anim\_set\_var**(*lv\_anim\_t* \*a, void \*var)

Set a variable to animate

### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **var**: pointer to a variable to animate

static void **lv\_anim\_set\_exec\_cb**(*lv\_anim\_t* \*a, *lv\_anim\_exec\_xcb\_t* exec\_cb)

Set a function to animate **var**

### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **exec\_cb**: a function to execute during animation LittlevGL' s built-in functions can be used. E.g. `lv_obj_set_x`

static void **lv\_anim\_set\_time**(*lv\_anim\_t* \*a, uint32\_t duration)

Set the duration of an animation

### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **duration**: duration of the animation in milliseconds

static void **lv\_anim\_set\_delay**(*lv\_anim\_t* \*a, uint32\_t delay)

Set a delay before starting the animation

### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **delay**: delay before the animation in milliseconds

static void **lv\_anim\_set\_values**(*lv\_anim\_t* \*a, *lv\_anim\_value\_t* start, *lv\_anim\_value\_t* end)

Set the start and end values of an animation

### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **start**: the start value
- **end**: the end value

static void **lv\_anim\_set\_custom\_exec\_cb**(*lv\_anim\_t* \*a, *lv\_anim\_custom\_exec\_cb\_t* exec\_cb)

Similar to `lv_anim_set_exec_cb` but `lv_anim_custom_exec_cb_t` receives `lv_anim_t *` as its first parameter instead of `void *`. This function might be used when LittlevGL is binded to other

languages because it's more consistent to have `lv_anim_t *` as first parameter. The variable to animate can be stored in the animation's `user_sata`

#### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **exec\_cb**: a function to execute.

**static void lv\_anim\_set\_path\_cb**(*lv\_anim\_t \*a, lv\_anim\_path\_cb\_t path\_cb*)

Set the path (curve) of the animation.

#### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **path\_cb**: a function the get the current value of the animation. The built in functions starts with `lv_anim_path_...`

**static void lv\_anim\_set\_start\_cb**(*lv\_anim\_t \*a, lv\_anim\_ready\_cb\_t start\_cb*)

Set a function call when the animation really starts (considering `delay`)

#### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **start\_cb**: a function call when the animation starts

**static void lv\_anim\_set\_ready\_cb**(*lv\_anim\_t \*a, lv\_anim\_ready\_cb\_t ready\_cb*)

Set a function call when the animation is ready

#### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **ready\_cb**: a function call when the animation is ready

**static void lv\_anim\_set\_playback\_time**(*lv\_anim\_t \*a, uint16\_t time*)

Make the animation to play back to when the forward direction is ready

#### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **time**: the duration of the playback animation in in milliseconds. 0: disable playback

**static void lv\_anim\_set\_playback\_delay**(*lv\_anim\_t \*a, uint16\_t delay*)

Make the animation to play back to when the forward direction is ready

#### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **delay**: delay in milliseconds before starting the playback animation.

**static void lv\_anim\_set\_repeat\_count**(*lv\_anim\_t \*a, uint16\_t cnt*)

Make the animation repeat itself.

#### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **cnt**: repeat count or `LV_ANIM_REPEAT_INFINITE` for infinite repetition. 0: to disable repetition.

**static void lv\_anim\_set\_repeat\_delay**(*lv\_anim\_t \*a, uint16\_t delay*)

Set a delay before repeating the animation.

### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable
- **delay**: delay in milliseconds before repeating the animation.

void **lv\_anim\_start**(*lv\_anim\_t* \*a)

Create an animation

### Parameters

- **a**: an initialized ‘anim\_t’ variable. Not required after call.

static int32\_t **lv\_anim\_get\_delay**(*lv\_anim\_t* \*a)

Get a delay before starting the animation

**Return** delay before the animation in milliseconds

### Parameters

- **a**: pointer to an initialized `lv_anim_t` variable

bool **lv\_anim\_del**(void \*var, *lv\_anim\_exec\_xcb\_t* exec\_cb)

Delete an animation of a variable with a given animator function

**Return** true: at least 1 animation is deleted, false: no animation is deleted

### Parameters

- **var**: pointer to variable
- **exec\_cb**: a function pointer which is animating ‘var’, or NULL to ignore it and delete all the animations of ‘var’

*lv\_anim\_t* \***lv\_anim\_get**(void \*var, *lv\_anim\_exec\_xcb\_t* exec\_cb)

Get the animation of a variable and its `exec_cb`.

**Return** pointer to the animation.

### Parameters

- **var**: pointer to variable
- **exec\_cb**: a function pointer which is animating ‘var’, or NULL to delete all the animations of ‘var’

static bool **lv\_anim\_custom\_del**(*lv\_anim\_t* \*a, *lv\_anim\_custom\_exec\_cb\_t* exec\_cb)

Delete an animation by getting the animated variable from **a**. Only animations with `exec_cb` will be deleted. This function exists because it’s logical that all anim. functions receives an `lv_anim_t` as their first parameter. It’s not practical in C but might make the API more consequent and makes easier to generate bindings.

**Return** true: at least 1 animation is deleted, false: no animation is deleted

### Parameters

- **a**: pointer to an animation.
- **exec\_cb**: a function pointer which is animating ‘var’, or NULL to ignore it and delete all the animations of ‘var’

uint16\_t **lv\_anim\_count\_running**(void)

Get the number of currently running animations

**Return** the number of running animations

`uint16_t lv_anim_speed_to_time(uint16_t speed, lv_anim_value_t start, lv_anim_value_t end)`

Calculate the time of an animation with a given speed and the start and end values

**Return** the required time [ms] for the animation with the given parameters

**Parameters**

- **speed**: speed of animation in unit/sec
- **start**: start value of the animation
- **end**: end value of the animation

`void lv_anim_refr_now(void)`

Manually refresh the state of the animations. Useful to make the animations running in a blocking process where `lv_task_handler` can't run for a while. Shouldn't be used directly because it is called in `lv_refr_now()`.

`lv_anim_value_t lv_anim_path_linear(const lv_anim_t *a)`

Calculate the current value of an animation applying linear characteristic

**Return** the current value to set

**Parameters**

- **a**: pointer to an animation

`lv_anim_value_t lv_anim_path_ease_in(const lv_anim_t *a)`

Calculate the current value of an animation slowing down the start phase

**Return** the current value to set

**Parameters**

- **a**: pointer to an animation

`lv_anim_value_t lv_anim_path_ease_out(const lv_anim_t *a)`

Calculate the current value of an animation slowing down the end phase

**Return** the current value to set

**Parameters**

- **a**: pointer to an animation

`lv_anim_value_t lv_anim_path_ease_in_out(const lv_anim_t *a)`

Calculate the current value of an animation applying an "S" characteristic (cosine)

**Return** the current value to set

**Parameters**

- **a**: pointer to an animation

`lv_anim_value_t lv_anim_path_overshoot(const lv_anim_t *a)`

Calculate the current value of an animation with overshoot at the end

**Return** the current value to set

**Parameters**

- **a**: pointer to an animation

`lv_anim_value_t lv_anim_path_bounce(const lv_anim_t *a)`

Calculate the current value of an animation with 3 bounces

**Return** the current value to set

## Parameters

- **a**: pointer to an animation

*lv\_anim\_value\_t* **lv\_anim\_path\_step**(const *lv\_anim\_t* \*a)

Calculate the current value of an animation applying step characteristic. (Set end value on the end of the animation)

**Return** the current value to set

## Parameters

- **a**: pointer to an animation

**struct \_lv\_anim\_t**

*#include <lv\_anim.h>* Describes an animation

## Public Members

void \***var**

Variable to animate

*lv\_anim\_exec\_xcb\_t* **exec\_cb**

Function to execute to animate

*lv\_anim\_path\_cb\_t* **path\_cb**

Function to get the steps of animations

*lv\_anim\_start\_cb\_t* **start\_cb**

Call it when the animation is starts (considering **delay**)

*lv\_anim\_ready\_cb\_t* **ready\_cb**

Call it when the animation is ready

int32\_t **start**

Start value

int32\_t **end**

End value

uint32\_t **time**

Animation time in ms

int32\_t **act\_time**

Current time in animation. Set to negative to make delay.

uint32\_t **playback\_delay**

Wait before play back

uint32\_t **playback\_time**

Duration of playback animation

uint32\_t **repeat\_delay**

Wait before repeat

uint16\_t **repeat\_cnt**

Repeat count for the animation

uint8\_t **early\_apply**

1: Apply start value immediately even is there is **delay**

*lv\_anim\_user\_data\_t* **user\_data**

Custom user data



uint32\_t **time\_orig**  
 uint8\_t **playback\_now**  
 Play back is in progress  
 uint32\_t **has\_run**  
 Indicates the animation has run in this round

## Tasks

LittlevGL has a built-in task system. You can register a function to have it be called periodically. The tasks are handled and called in `lv_task_handler()`, which needs to be called periodically every few milliseconds. See [Porting](#) for more information.

The tasks are non-preemptive, which means a task cannot interrupt another task. Therefore, you can call any LittlevGL related function in a task.

### Create a task

To create a new task, use `lv_task_create(task_cb, period_ms, LV_TASK_PRIO_OFF/LOWEST/LOW/MID/HIGH/HIGHEST, user_data)`. It will create an `lv_task_t *` variable, which can be used later to modify the parameters of the task. `lv_task_create_basic()` can also be used. It allows you to create a new task without specifying any parameters.

A task callback should have `void (*lv_task_cb_t)(lv_task_t *)`; prototype.

For example:

```
void my_task(lv_task_t * task)
{
    /*Use the user_data*/
    uint32_t * user_data = task->user_data;
    printf("my_task called with user data: %d\n", *user_data);

    /*Do something with LittlevGL*/
    if(something_happened) {
        something_happened = false;
        lv_btn_create(lv_scr_act(), NULL);
    }
}

...

static uint32_t user_data = 10;
lv_task_t * task = lv_task_create(my_task, 500, LV_TASK_PRIO_MID, &user_data);
```

### Ready and Reset

`lv_task_ready(task)` makes the task run on the next call of `lv_task_handler()`.

`lv_task_reset(task)` resets the period of a task. It will be called again after the defined period of milliseconds has elapsed.

## Set parameters

You can modify some parameters of the tasks later:

- `lv_task_set_cb(task, new_cb)`
- `lv_task_set_period(task, new_period)`
- `lv_task_set_prio(task, new_priority)`

## One-shot tasks

You can make a task to run only once by calling `lv_task_once(task)`. The task will automatically be deleted after being called for the first time.

## Measure idle time

You can get the idle percentage time `lv_task_handler` with `lv_task_get_idle()`. Note that, it doesn't measure the idle time of the overall system, only `lv_task_handler`. It can be misleading if you use an operating system and call `lv_task_handler` in a task, as it won't actually measure the time the OS spends in an idle thread.

## Asynchronous calls

In some cases, you can't do an action immediately. For example, you can't delete an object right now because something else is still using it or you don't want to block the execution now. For these cases, you can use the `lv_async_call(my_function, data_p)` to make `my_function` be called on the next call of `lv_task_handler`. `data_p` will be passed to function when it's called. Note that, only the pointer of the data is saved so you need to ensure that the variable will be "alive" while the function is called. You can use *static*, global or dynamically allocated data.

For example:

```
void my_screen_cleanup(void * scr)
{
    /*Free some resources related to `scr`*/

    /*Finally delete the screen*/
    lv_obj_del(scr);
}

...

/*Do somethings with the object on the current screen*/

/*Delete screen on next call of `lv_task_handler`. So not now.*/
lv_async_call(my_screen_cleanup, lv_scr_act());

/*The screen is still valid so you can do other things with it*/
```

If you just want to delete an object, and don't need to clean anything up in `my_screen_cleanup`, you could just use `lv_obj_del_async`, which will delete the object on the next call to `lv_task_handler`.

## API

### Typedefs

**typedef** void (\***lv\_task\_cb\_t**)(**struct** *lv\_task\_t* \*)

Tasks execute this type type of functions.

**typedef** uint8\_t **lv\_task\_prio\_t**

**typedef** **struct** *lv\_task\_t* **lv\_task\_t**

Descriptor of a lv\_task

### Enums

**enum** [anonymous]

Possible priorities for lv\_tasks

*Values:*

**LV\_TASK\_PRIO\_OFF** = 0

**LV\_TASK\_PRIO\_LOWEST**

**LV\_TASK\_PRIO\_LOW**

**LV\_TASK\_PRIO\_MID**

**LV\_TASK\_PRIO\_HIGH**

**LV\_TASK\_PRIO\_HIGHEST**

**\_LV\_TASK\_PRIO\_NUM**

### Functions

void **lv\_task\_core\_init**(void)

Init the lv\_task module

*lv\_task\_t* \***lv\_task\_create\_basic**(void)

Create an “empty” task. It needs to initialized with at least **lv\_task\_set\_cb** and **lv\_task\_set\_period**

**Return** pointer to the craeted task

*lv\_task\_t* \***lv\_task\_create**(*lv\_task\_cb\_t* task\_xcb, uint32\_t period, *lv\_task\_prio\_t* prio, void \**user\_data*)

Create a new lv\_task

**Return** pointer to the new task

#### Parameters

- **task\_xcb**: a callback which is the task itself. It will be called periodically. (the ‘x’ in the argument name indicates that its not a fully generic function because it not follows the **func\_name(object, callback, ...)** convention)
- **period**: call period in ms unit
- **prio**: priority of the task (**LV\_TASK\_PRIO\_OFF** means the task is stopped)
- **user\_data**: custom parameter

void **lv\_task\_del**(*lv\_task\_t* \*task)

Delete a lv\_task

**Parameters**

- **task**: pointer to task\_cb created by task

void **lv\_task\_set\_cb**(*lv\_task\_t* \*task, *lv\_task\_cb\_t* task\_cb)

Set the callback the task (the function to call periodically)

**Parameters**

- **task**: pointer to a task
- **task\_cb**: the function to call periodically

void **lv\_task\_set\_prio**(*lv\_task\_t* \*task, *lv\_task\_prio\_t* prio)

Set new priority for a lv\_task

**Parameters**

- **task**: pointer to a lv\_task
- **prio**: the new priority

void **lv\_task\_set\_period**(*lv\_task\_t* \*task, uint32\_t period)

Set new period for a lv\_task

**Parameters**

- **task**: pointer to a lv\_task
- **period**: the new period

void **lv\_task\_ready**(*lv\_task\_t* \*task)

Make a lv\_task ready. It will not wait its period.

**Parameters**

- **task**: pointer to a lv\_task.

void **lv\_task\_once**(*lv\_task\_t* \*task)

Delete the lv\_task after one call

**Parameters**

- **task**: pointer to a lv\_task.

void **lv\_task\_reset**(*lv\_task\_t* \*task)

Reset a lv\_task. It will be called the previously set period milliseconds later.

**Parameters**

- **task**: pointer to a lv\_task.

void **lv\_task\_enable**(bool en)

Enable or disable the whole lv\_task handling

**Parameters**

- **en**: true: lv\_task handling is running, false: lv\_task handling is suspended

uint8\_t **lv\_task\_get\_idle**(void)

Get idle percentage

**Return** the lv\_task idle in percentage

## struct `lv_task_t`

`#include <lv_task.h>` Descriptor of a `lv_task`

### Public Members

`uint32_t` **period**

How often the task should run

`uint32_t` **last\_run**

Last time the task ran

`lv_task_cb_t` **task\_cb**

Task function

`void *`**user\_data**

Custom user data

`uint8_t` **prio**

Task priority

`uint8_t` **once**

1: one shot task

## Drawing

With LittlevGL, you don't need to draw anything manually. Just create objects (like buttons and labels), move and change them and LittlevGL will refresh and redraw what is required.

However, it might be useful to have a basic understanding of how drawing happens in LittlevGL.

The basic concept is to not draw directly to the screen, but draw to an internal buffer first and then copy that buffer to screen when the rendering is ready. It has two main advantages:

1. **Avoids flickering** while layers of the UI are drawn. For example, when drawing a *background + button + text*, each "stage" would be visible for a short time.
2. **It's faster** to modify a buffer in RAM and finally write one pixel once than read/write a display directly on each pixel access. (e.g. via a display controller with SPI interface). Hence, it's suitable for pixels that are redrawn multiple times (e.g. background + button + text).

## Buffering types

As you already might learn in the [Porting](#) section, there are 3 types of buffers:

1. **One buffer** - LittlevGL draws the content of the screen into a buffer and sends it to the display. The buffer can be smaller than the screen. In this case, the larger areas will be redrawn in multiple parts. If only small areas changes (e.g. button press), then only those areas will be refreshed.
2. **Two non-screen-sized buffers** - having two buffers, LittlevGL can draw into one buffer while the content of the other buffer is sent to display in the background. DMA or other hardware should be used to transfer the data to the display to let the CPU draw meanwhile. This way, the rendering and refreshing of the display become parallel. If the buffer is smaller than the area to refresh, LittlevGL will draw the display's content in chunks similar to the *One buffer*.
3. **Two screen-sized buffers** - In contrast to *Two non-screen-sized buffers*, LittlevGL will always provide the whole screen's content, not only chunks. This way, the driver can simply change the address of the frame buffer to the buffer received from LittlevGL. Therefore, this method works best when the MCU has an LCD/TFT interface and the frame buffer is just a location in the RAM.

## Mechanism of screen refreshing

1. Something happens on the GUI which requires redrawing. For example, a button has been pressed, a chart has been changed or an animation happened, etc.
2. LittlevGL saves the changed object's old and new area into a buffer, called an *Invalid area buffer*. For optimization, in some cases, objects are not added to the buffer:
  - Hidden objects are not added.
  - Objects completely out of their parent are not added.
  - Areas out of the parent are cropped to the parent's area.
  - The object on other screens are not added.
3. In every `LV_DISP_DEF_REFR_PERIOD` (set in *lv\_conf.h*):
  - LittlevGL checks the invalid areas and joins the adjacent or intersecting areas.
  - Takes the first joined area, if it's smaller than the *display buffer*, then simply draw the areas' content to the *display buffer*. If the area doesn't fit into the buffer, draw as many lines as possible to the *display buffer*.
  - When the area is drawn, call `flush_cb` from the display driver to refresh the display.
  - If the area was larger than the buffer, redraw the remaining parts too.
  - Do the same with all the joined areas.

While an area is redrawn, the library searches the most top object which covers the area to redraw, and starts to draw from that object. For example, if a button's label has changed, the library will see that it's enough to draw the button under the text, and it's not required to draw the background too.

The difference between buffer types regarding the drawing mechanism is the following:

1. **One buffer** - LittlevGL needs to wait for `lv_disp_flush_ready()` (called at the end of `flush_cb`) before starting to redraw the next part.
2. **Two non-screen-sized buffers** - LittlevGL can immediately draw to the second buffer when the first is sent to `flush_cb` because the flushing should be done by DMA (or similar hardware) in the background.
3. **Two screen-sized buffers** - After calling `flush_cb`, the first buffer, if being displayed as frame buffer. Its content is copied to the second buffer and all the changes are drawn on top of it.

### 3.16.4 Object types (Widgets)

#### Base object (lv\_obj)

##### Overview

The 'Base Object' implements the basic properties of an object on a screen, such as:

- coordinates
- parent object
- children
- main style
- attributes like *Click enable*, *Drag enable*, etc.

In object-oriented thinking, it is the base class which all other objects in LittlevGL inherit from. This, among another things, helps reduce code duplication.


## Coordinates

The object size can be modified on individual axes with `lv_obj_set_width(obj, new_width)` and `lv_obj_set_height(obj, new_height)`, or both axes can be modified at the same time with `lv_obj_set_size(obj, new_width, new_height)`.

You can set the x and y coordinates relative to the parent with `lv_obj_set_x(obj, new_x)` and `lv_obj_set_y(obj, new_y)`, or both at the same time with `lv_obj_set_pos(obj, new_x, new_y)`.

You can align the object to another with `lv_obj_align(obj, obj_ref, LV_ALIGN_..., x_shift, y_shift)`.

- `obj` is the object to align.
- `obj_ref` is a reference object. `obj` will be aligned to it. If `obj_ref = NULL`, then the parent of `obj` will be used.
- The third argument is the *type* of alignment. These are the possible options:

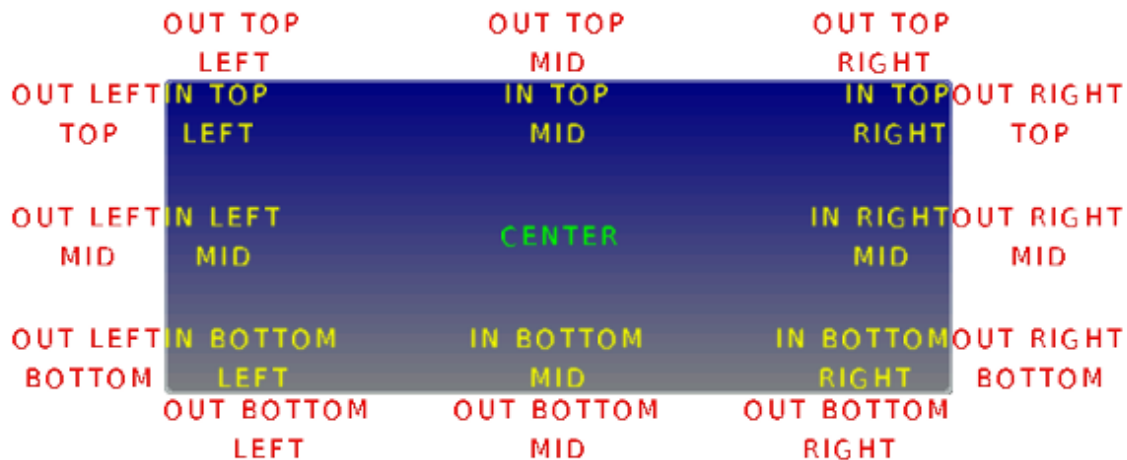

The alignment types build like `LV_ALIGN_OUT_TOP_MID`.

- The last two arguments allow you to shift the object by a specified number of pixels after aligning it.

For example, to align a text below an image: `lv_obj_align(text, image, LV_ALIGN_OUT_BOTTOM_MID, 0, 10)`. Or to align a text in the middle of its parent: `lv_obj_align(text, NULL, LV_ALIGN_CENTER, 0, 0)`.

`lv_obj_align_origo` works similarly to `lv_obj_align` but, it aligns the center of the object rather than the top-left corner.

For example, `lv_obj_align_origo(btn, image, LV_ALIGN_OUT_BOTTOM_MID, 0, 0)` will align the center of the button the bottom of the image.

The parameters of the alignment will be saved in the object if `LV_USE_OBJ_REALIGN` is enabled in `lv_conf.h`. You can then realign the objects simply by calling `lv_obj_realign(obj)`. (It's equivalent to calling `lv_obj_align` again with the same parameters.)

If the alignment happened with `lv_obj_align_origo`, then it will be used when the object is realigned.

If `lv_obj_set_auto_realign(obj, true)` is used the object will be realigned automatically, if its size changes in `lv_obj_set_width/height/size()` functions. It's very useful when size animations are applied to the object and the original position needs to be kept.

**Note that the coordinates of screens can't be changed. Attempting to use these functions on screens will result in undefined behavior.**

## Parents and children

You can set a new parent for an object with `lv_obj_set_parent(obj, new_parent)`. To get the current parent, use `lv_obj_get_parent(obj)`.

To get the children of an object, use `lv_obj_get_child(obj, child_prev)` (from last to first) or `lv_obj_get_child_back(obj, child_prev)` (from first to last). To get the first child, pass `NULL` as the second parameter and use the return value to iterate through the children. The function will return `NULL` if there are no more children. For example:

```
lv_obj_t * child;
child = lv_obj_get_child(parent, NULL);
while(child) {
    /*Do something with "child" */
    child = lv_obj_get_child(parent, child);
}
```

`lv_obj_count_children(obj)` tells the number of children on an object. `lv_obj_count_children_recursive(obj)` also tells the number of children but counts children of children recursively.

## Screens

When you have created a screen like `lv_obj_create(NULL, NULL)`, you can load it with `lv_scr_load(screen1)`. The `lv_scr_act()` function gives you a pointer to the current screen.

If you have more display then it's important to know that these functions operate on the lastly created or the explicitly selected (with `lv_disp_set_default`) display.

To get the screen an object is assigned to, use the `lv_obj_get_screen(obj)` function.

## Layers

There are two automatically generated layers:

- top layer
- system layer

They are independent of the screens and the same layers will be shown on every screen. The *top layer* is above every object on the screen and the *system layer* is above the *top layer* too. You can add any pop-up windows to the *top layer* freely. But, the *system layer* is restricted to system-level things (e.g. mouse cursor will be placed here in `lv_indev_set_cursor()`).

The `lv_layer_top()` and `lv_layer_sys()` functions gives a pointer to the top or system layer.

You can bring an object to the foreground or send it to the background with `lv_obj_move_foreground(obj)` and `lv_obj_move_background(obj)`.



Read the [Layer overview](#) section to learn more about layers.

## Style

The base object stores the [Main style](#) of the object. To set a new style, use `lv_obj_set_style(obj, &new_style)` function. If `NULL` is set as style, then the object will inherit its parent's style.

Note that, you should use `lv_obj_set_style` only for “Base objects”. Every other object type has its own style set function which should be used for them. For example, a button should use `lv_btn_set_style()`.

If you modify a style, which is already used by objects, in order to refresh the affected objects you can use either `lv_obj_refresh_style(obj)` on each object using it or to notify all objects with a given style use `lv_obj_report_style_mod(&style)`. If the parameter of `lv_obj_report_style_mod` is `NULL`, all objects will be notified.

Read the [Style overview](#) to learn more about styles.

## Events

To set an event callback for an object, use `lv_obj_set_event_cb(obj, event_cb)`,

To manually send an event to an object, use `lv_event_send(obj, LV_EVENT_..., data)`

Read the [Event overview](#) to learn more about the events.

## Attributes

There are some attributes which can be enabled/disabled by `lv_obj_set_...(obj, true/false)`:

- **hidden** - Hide the object. It will not be drawn and will be considered by input devices as if it doesn't exist., Its children will be hidden too.
- **click** - Allows you to click the object via input devices. If disabled, then click events are passed to the object behind this one. (E.g. [Labels](#) are not clickable by default)
- **top** - If enabled then when this object or any of its children is clicked then this object comes to the foreground.
- **drag** - Enable dragging (moving by an input device)
- **drag\_dir** - Enable dragging only in specific directions. Can be `LV_DRAG_DIR_HOR/VER/ALL`.
- **drag\_throw** - Enable “throwing” with dragging as if the object would have momentum
- **drag\_parent** - If enabled then the object's parent will be moved during dragging. It will look like as if the parent is dragged. Checked recursively, so can propagate to grandparents too.
- **parent\_event** - Propagate the events to the parents too. Checked recursively, so can propagate to grandparents too.
- **opa\_scale\_enable** - Enable opacity scaling. See the [\[#opa-scale\]\(Opa scale\)](#) section.

## Opa scale

If `lv_obj_set_opa_scale_enable(obj, true)` is set for an object, then the object's and all of its children's opacity can be adjusted with `lv_obj_set_opa_scale(obj, LV_OPA_...)`. The opacities stored in the styles will be scaled down by this factor.

It is very useful to fade in/out an object with some children using an *Animation*.

A little bit of technical background: during the rendering process, the opacity of the object is decided by searching recursively up the object's family tree to find the first object with opacity scaling (Opa scale) enabled.

If an object is found with an enabled *Opa scale*, then that *Opa scale* will be used by the rendered object too.

Therefore, if you want to disable the Opa scaling for an object when the parent has Opa scale, just enable Opa scaling for the object and set its value to `LV_OPA_COVER`. It will overwrite the parent's settings.

## Protect

There are some specific actions which happen automatically in the library. To prevent one or more that kind of actions, you can protect the object against them. The following protections exists:

- **LV\_PROTECT\_NONE** No protection
- **LV\_PROTECT\_POS** Prevent automatic positioning (e.g. Layout in *Containers*)
- **LV\_PROTECT\_FOLLOW** Prevent the object be followed (make a “line break” ) in automatic ordering (e.g. Layout in *Containers*)
- **LV\_PROTECT\_PARENT** Prevent automatic parent change. (e.g. *Page* moves the children created on the background to the scrollable)
- **LV\_PROTECT\_PRESS\_LOST** Prevent losing press when the press is slid out of the objects. (E.g. a *Button* can be released out of it if it was being pressed)
- **LV\_PROTECT\_CLICK\_FOCUS** Prevent automatically focusing the object if it's in a *Group* and click focus is enabled.
- **LV\_PROTECT\_CHILD\_CHG** Disable the child change signal. Used internally by the library

The `lv_obj_set/clear_protect(obj, LV_PROTECT_...)` sets/clears the protection. You can use 'OR'ed values of protection types too.

## Groups

Once, an object is added to *group* with `lv_group_add_obj(group, obj)` the object's current group can be get with `lv_obj_get_group(obj)`.

`lv_obj_is_focused(obj)` tells if the object is currently focused on its group or not. If the object is not added to a group, `false` will be returned.

Read the *Input devices overview* to learn more about the *Groups*.

## Extended click area

By default, the objects can be clicked only on their coordinates, however, this area can be extended with `lv_obj_set_ext_click_area(obj, left, right, top, bottom)`. `left/right/top/bottom` describes how far the clickable area should extend past the default in each direction.

This feature needs to be enabled in `lv_conf.h` with `LV_USE_EXT_CLICK_AREA`. The possible values are:

- **LV\_EXT\_CLICK\_AREA\_FULL** store all 4 coordinates as `lv_coord_t`
- **LV\_EXT\_CLICK\_AREA\_TINY** store only horizontal and vertical coordinates (use the greater value of left/right and top/bottom) as `uint8_t`

- **LV\_EXT\_CLICK\_AREA\_OFF** Disable this feature

## Styles

Use `lv_obj_set_style(obj, &style)` to set a style for a base object.

All `style.body` properties are used. The default style for screens is `lv_style_scr` and `lv_style_plain_color` for normal objects

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Base objects with custom styles

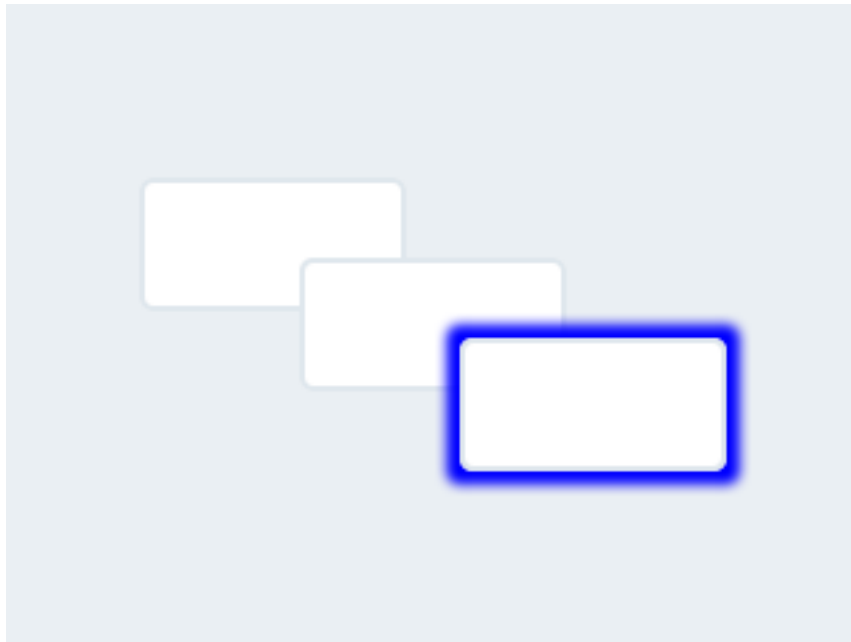

code

```
#include "lvgl/lvgl.h"

void lv_ex_obj_1(void)
{
    lv_obj_t * obj1;
    obj1 = lv_obj_create(lv_scr_act(), NULL);
    lv_obj_set_size(obj1, 100, 50);
    lv_obj_align(obj1, NULL, LV_ALIGN_CENTER, -60, -30);

    /*Copy the previous object and enable drag*/
    lv_obj_t * obj2;
    obj2 = lv_obj_create(lv_scr_act(), obj1);
    lv_obj_align(obj2, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_set_drag(obj2, true);

    static lv_style_t style_shadow;
    lv_style_init(&style_shadow);
    lv_style_set_shadow_width(&style_shadow, LV_STATE_DEFAULT, 10);
    lv_style_set_shadow_spread(&style_shadow, LV_STATE_DEFAULT, 5);
    lv_style_set_shadow_color(&style_shadow, LV_STATE_DEFAULT, LV_COLOR_BLUE);

    /*Copy the previous object (drag is already enabled)*/
    lv_obj_t * obj3;
    obj3 = lv_obj_create(lv_scr_act(), obj2);
    lv_obj_add_style(obj3, LV_OBJ_PART_MAIN, &style_shadow);
    lv_obj_align(obj3, NULL, LV_ALIGN_CENTER, 60, 30);
}
```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_design\_mode\_t**

**typedef** uint8\_t **lv\_design\_res\_t**

**typedef** *lv\_design\_res\_t* (\***lv\_design\_cb\_t**)(**struct** *\_\_lv\_obj\_t* \*obj, **const** *lv\_area\_t* \*clip\_area, *lv\_design\_mode\_t* mode)

The design callback is used to draw the object on the screen. It accepts the object, a mask area, and the mode in which to draw the object.

**typedef** uint8\_t **lv\_event\_t**

Type of event being sent to the object.

**typedef** void (\***lv\_event\_cb\_t**)(**struct** *\_\_lv\_obj\_t* \*obj, *lv\_event\_t* event)

Event callback. Events are used to notify the user of some action being taken on the object. For details, see *lv\_event\_t*.

**typedef** uint8\_t **lv\_signal\_t**

**typedef** *lv\_res\_t* (\***lv\_signal\_cb\_t**)(**struct** *\_\_lv\_obj\_t* \*obj, *lv\_signal\_t* sign, void \*param)

**typedef** uint8\_t **lv\_protect\_t**

```
typedef uint8_t lv_state_t
typedef struct __lv_obj_t lv_obj_t
typedef uint8_t lv_obj_part_t
```

## Enums

**enum** [anonymous]

Design modes

*Values:*

**LV\_DESIGN\_DRAW\_MAIN**

Draw the main portion of the object

**LV\_DESIGN\_DRAW\_POST**

Draw extras on the object

**LV\_DESIGN\_COVER\_CHK**

Check if the object fully covers the ‘mask\_p’ area

**enum** [anonymous]

Design results

*Values:*

**LV\_DESIGN\_RES\_OK**

Draw ready

**LV\_DESIGN\_RES\_COVER**

Returned on LV\_DESIGN\_COVER\_CHK if the areas is fully covered

**LV\_DESIGN\_RES\_NOT\_COVER**

Returned on LV\_DESIGN\_COVER\_CHK if the areas is not covered

**LV\_DESIGN\_RES\_MASKED**

Returned on LV\_DESIGN\_COVER\_CHK if the areas is masked out (children also not cover)

**enum** [anonymous]

*Values:*

**LV\_EVENT\_PRESSED**

The object has been pressed

**LV\_EVENT\_PRESSING**

The object is being pressed (called continuously while pressing)

**LV\_EVENT\_PRESS\_LOST**

User is still pressing but slid cursor/finger off of the object

**LV\_EVENT\_SHORT\_CLICKED**

User pressed object for a short period of time, then released it. Not called if dragged.

**LV\_EVENT\_LONG\_PRESSED**

Object has been pressed for at least LV\_INDEV\_LONG\_PRESS\_TIME. Not called if dragged.

**LV\_EVENT\_LONG\_PRESSED\_REPEAT**

Called after LV\_INDEV\_LONG\_PRESS\_TIME in every LV\_INDEV\_LONG\_PRESS\_REP\_TIME ms.  
Not called if dragged.

**LV\_EVENT\_CLICKED**

Called on release if not dragged (regardless to long press)

**LV\_EVENT\_RELEASED**

Called in every cases when the object has been released

**LV\_EVENT\_DRAG\_BEGIN**

**LV\_EVENT\_DRAG\_END**

**LV\_EVENT\_DRAG\_THROW\_BEGIN**

**LV\_EVENT\_GESTURE**

The object has been getture

**LV\_EVENT\_KEY**

**LV\_EVENT\_FOCUSED**

**LV\_EVENT\_DEFOCUSED**

**LV\_EVENT\_LEAVE**

**LV\_EVENT\_VALUE\_CHANGED**

The object' s value has changed (i.e. slider moved)

**LV\_EVENT\_INSERT**

**LV\_EVENT\_REFRESH**

**LV\_EVENT\_APPLY**

“Ok” , “Apply” or similar specific button has clicked

**LV\_EVENT\_CANCEL**

“Close” , “Cancel” or similar specific button has clicked

**LV\_EVENT\_DELETE**

Object is being deleted

**enum [anonymous]**

Signals are for use by the object itself or to extend the object' s functionality. Applications should use [\*lv\\_obj\\_set\\_event\\_cb\*](#) to be notified of events that occur on the object.

*Values:*

**LV\_SIGNAL\_CLEANUP**

Object is being deleted

**LV\_SIGNAL\_CHILD\_CHG**

Child was removed/added

**LV\_SIGNAL\_COORD\_CHG**

Object coordinates/size have changed

**LV\_SIGNAL\_PARENT\_SIZE\_CHG**

Parent' s size has changed

**LV\_SIGNAL\_STYLE\_CHG**

Object' s style has changed

**LV\_SIGNAL\_BASE\_DIR\_CHG**

The base dir has changed

**LV\_SIGNAL\_REFR\_EXT\_DRAW\_PAD**

Object' s extra padding has changed

**LV\_SIGNAL\_GET\_TYPE**

LittlevGL needs to retrieve the object' s type

#### **LV\_SIGNAL\_GET\_STYLE**

Get the style of an object

#### **LV\_SIGNAL\_GET\_STATE\_DSC**

Get the state of the object

#### **LV\_SIGNAL\_HIT\_TEST**

Advanced hit-testing

#### **LV\_SIGNAL\_PRESSED**

The object has been pressed

#### **LV\_SIGNAL\_PRESSING**

The object is being pressed (called continuously while pressing)

#### **LV\_SIGNAL\_PRESS\_LOST**

User is still pressing but slid cursor/finger off of the object

#### **LV\_SIGNAL\_RELEASED**

User pressed object for a short period of time, then released it. Not called if dragged.

#### **LV\_SIGNAL\_LONG\_PRESS**

Object has been pressed for at least `LV_INDEV_LONG_PRESS_TIME`. Not called if dragged.

#### **LV\_SIGNAL\_LONG\_PRESS\_REP**

Called after `LV_INDEV_LONG_PRESS_TIME` in every `LV_INDEV_LONG_PRESS_REP_TIME` ms.  
Not called if dragged.

#### **LV\_SIGNAL\_DRAG\_BEGIN**

#### **LV\_SIGNAL\_DRAG\_THROW\_BEGIN**

#### **LV\_SIGNAL\_DRAG\_END**

#### **LV\_SIGNAL\_GESTURE**

The object has been gesture

#### **LV\_SIGNAL\_LEAVE**

Another object is clicked or chosen via an input device

#### **LV\_SIGNAL\_FOCUS**

#### **LV\_SIGNAL\_DEFOCUS**

#### **LV\_SIGNAL\_CONTROL**

#### **LV\_SIGNAL\_GET\_EDITABLE**

**enum** [anonymous]

*Values:*

**LV\_PROTECT\_NONE** = 0x00

**LV\_PROTECT\_CHILD\_CHG** = 0x01

Disable the child change signal. Used by the library

**LV\_PROTECT\_PARENT** = 0x02

Prevent automatic parent change (e.g. in `lv_page`)

**LV\_PROTECT\_POS** = 0x04

Prevent automatic positioning (e.g. in `lv_cont` layout)

**LV\_PROTECT\_FOLLOW** = 0x08

Prevent the object be followed in automatic ordering (e.g. in `lv_cont PRETTY` layout)

**LV\_PROTECT\_PRESS\_LOST** = 0x10

If the `indev` was pressing this object but swiped out while pressing do not search other object.

**LV\_PROTECT\_CLICK\_FOCUS** = 0x20

Prevent focusing the object by clicking on it

**enum** [anonymous]

*Values:*

**LV\_STATE\_DEFAULT** = 0x00

**LV\_STATE\_CHECKED** = 0x01

**LV\_STATE\_FOCUSED** = 0x02

**LV\_STATE\_EDITED** = 0x04

**LV\_STATE\_HOVERED** = 0x08

**LV\_STATE\_PRESSED** = 0x10

**LV\_STATE\_DISABLED** = 0x20

**enum** [anonymous]

*Values:*

**LV\_OBJ\_PART\_MAIN**

**\_LV\_OBJ\_PART\_VIRTUAL\_LAST** = 0x01

**\_LV\_OBJ\_PART\_REAL\_LAST** = 0x40

**LV\_OBJ\_PART\_ALL** = 0xFF

## Functions

void **lv\_init**(void)

Init. the 'lv' library.

void **lv\_deinit**(void)

Deinit the 'lv' library Currently only implemented when not using custom allocators, or GC is enabled.

*lv\_obj\_t* \***lv\_obj\_create**(*lv\_obj\_t* \*parent, const *lv\_obj\_t* \*copy)

Create a basic object

**Return** pointer to the new object

**Parameters**

- **parent**: pointer to a parent object. If NULL then a screen will be created
- **copy**: pointer to a base object, if not NULL then the new object will be copied from it

lv\_res\_t **lv\_obj\_del**(*lv\_obj\_t* \*obj)

Delete 'obj' and all of its children

**Return** LV\_RES\_INV because the object is deleted

**Parameters**

- **obj**: pointer to an object to delete

void **lv\_obj\_del\_anim\_ready\_cb**(*lv\_anim\_t* \*a)

A function to be easily used in animation ready callback to delete an object when the animation is ready



#### Parameters

- **a**: pointer to the animation

void **lv\_obj\_del\_async**(struct *lv\_obj\_t* \*obj)

Helper function for asynchronously deleting objects. Useful for cases where you can't delete an object directly in an LV\_EVENT\_DELETE handler (i.e. parent).

See lv\_async\_call

#### Parameters

- **obj**: object to delete

void **lv\_obj\_clean**(*lv\_obj\_t* \*obj)

Delete all children of an object

#### Parameters

- **obj**: pointer to an object

void **lv\_obj\_invalidate\_area**(const *lv\_obj\_t* \*obj, const *lv\_area\_t* \*area)

Mark an area of an object as invalid. This area will be redrawn by 'lv\_refr\_task'

#### Parameters

- **obj**: pointer to an object
- **area**: the area to redraw

void **lv\_obj\_invalidate**(const *lv\_obj\_t* \*obj)

Mark the object as invalid therefore its current position will be redrawn by 'lv\_refr\_task'

#### Parameters

- **obj**: pointer to an object

void **lv\_obj\_set\_parent**(*lv\_obj\_t* \*obj, *lv\_obj\_t* \*parent)

Set a new parent for an object. Its relative position will be the same.

#### Parameters

- **obj**: pointer to an object. Can't be a screen.
- **parent**: pointer to the new parent object. (Can't be NULL)

void **lv\_obj\_move\_foreground**(*lv\_obj\_t* \*obj)

Move and object to the foreground

#### Parameters

- **obj**: pointer to an object

void **lv\_obj\_move\_background**(*lv\_obj\_t* \*obj)

Move and object to the background

#### Parameters

- **obj**: pointer to an object

void **lv\_obj\_set\_pos**(*lv\_obj\_t* \*obj, *lv\_coord\_t* x, *lv\_coord\_t* y)

Set relative the position of an object (relative to the parent)

#### Parameters

- **obj**: pointer to an object
- **x**: new distance from the left side of the parent

- **y**: new distance from the top of the parent

void **lv\_obj\_set\_x**(*lv\_obj\_t* \*obj, lv\_coord\_t x)  
Set the x coordinate of a object

**Parameters**

- **obj**: pointer to an object
- **x**: new distance from the left side from the parent

void **lv\_obj\_set\_y**(*lv\_obj\_t* \*obj, lv\_coord\_t y)  
Set the y coordinate of a object

**Parameters**

- **obj**: pointer to an object
- **y**: new distance from the top of the parent

void **lv\_obj\_set\_size**(*lv\_obj\_t* \*obj, lv\_coord\_t w, lv\_coord\_t h)  
Set the size of an object

**Parameters**

- **obj**: pointer to an object
- **w**: new width
- **h**: new height

void **lv\_obj\_set\_width**(*lv\_obj\_t* \*obj, lv\_coord\_t w)  
Set the width of an object

**Parameters**

- **obj**: pointer to an object
- **w**: new width

void **lv\_obj\_set\_height**(*lv\_obj\_t* \*obj, lv\_coord\_t h)  
Set the height of an object

**Parameters**

- **obj**: pointer to an object
- **h**: new height

void **lv\_obj\_set\_width\_margin**(*lv\_obj\_t* \*obj, lv\_coord\_t w)  
Set the width of an object by taking the left and right margin into account. The object height will be **obj\_w = w - margin\_left - margin\_right**

**Parameters**

- **obj**: pointer to an object
- **w**: new height including margins

void **lv\_obj\_set\_height\_margin**(*lv\_obj\_t* \*obj, lv\_coord\_t h)  
Set the height of an object by taking the top and bottom margin into account. The object height will be **obj\_h = h - margin\_top - margin\_bottom**

**Parameters**

- **obj**: pointer to an object
- **h**: new height including margins

```
void lv_obj_align(lv_obj_t *obj, const lv_obj_t *base, lv_align_t align, lv_coord_t x_mod,
                 lv_coord_t y_mod)
```

Align an object to an other object.

#### Parameters

- **obj**: pointer to an object to align
- **base**: pointer to an object (if NULL the parent is used). ‘obj’ will be aligned to it.
- **align**: type of alignment (see ‘lv\_align\_t’ enum)
- **x\_mod**: x coordinate shift after alignment
- **y\_mod**: y coordinate shift after alignment

```
void lv_obj_align_origo(lv_obj_t *obj, const lv_obj_t *base, lv_align_t align, lv_coord_t
                       x_mod, lv_coord_t y_mod)
```

Align an object to an other object.

#### Parameters

- **obj**: pointer to an object to align
- **base**: pointer to an object (if NULL the parent is used). ‘obj’ will be aligned to it.
- **align**: type of alignment (see ‘lv\_align\_t’ enum)
- **x\_mod**: x coordinate shift after alignment
- **y\_mod**: y coordinate shift after alignment

```
void lv_obj_realign(lv_obj_t *obj)
```

Realign the object based on the last `lv_obj_align` parameters.

#### Parameters

- **obj**: pointer to an object

```
void lv_obj_set_auto_realign(lv_obj_t *obj, bool en)
```

Enable the automatic realign of the object when its size has changed based on the last `lv_obj_align` parameters.

#### Parameters

- **obj**: pointer to an object
- **en**: true: enable auto realign; false: disable auto realign

```
void lv_obj_set_ext_click_area(lv_obj_t *obj, lv_coord_t left, lv_coord_t right, lv_coord_t
                              top, lv_coord_t bottom)
```

Set the size of an extended clickable area

#### Parameters

- **obj**: pointer to an object
- **left**: extended clickable are on the left [px]
- **right**: extended clickable are on the right [px]
- **top**: extended clickable are on the top [px]
- **bottom**: extended clickable are on the bottom [px]

```
void lv_obj_add_style(lv_obj_t *obj, uint8_t part, lv_style_t *style)
```

Add a new styte to the style list of an object.

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be set. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **style**: pointer to a style to add (Only its pointer will be saved)

void **lv\_obj\_clean\_style\_list**(*lv\_obj\_t* \*obj, uint8\_t part)

Reset a style to the default (empty) state. Release all used memories and cancel pending related transitions. Typically used in 'LV\_SIGN\_CLEAN\_UP'.

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style list should be reseted. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB

void **lv\_obj\_reset\_style\_list**(*lv\_obj\_t* \*obj, uint8\_t part)

Reset a style to the default (empty) state. Release all used memories and cancel pending related transitions. Also notifies the object about the style change.

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style list should be reseted. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB

void **lv\_obj\_refresh\_style**(*lv\_obj\_t* \*obj, lv\_style\_property\_t prop)

Notify an object about its style is modified

#### Parameters

- **obj**: pointer to an object

void **lv\_obj\_report\_style\_mod**(lv\_style\_t \*style)

Notify all object if a style is modified

#### Parameters

- **style**: pointer to a style. Only the objects with this style will be notified (NULL to notify all objects)

void **\_lv\_obj\_set\_style\_local\_color**(*lv\_obj\_t* \*obj, uint8\_t type, lv\_style\_property\_t prop, *lv\_color\_t* color)

Set a local style property of a part of an object in a given state.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example:

**lv\_obj\_style\_get\_border\_opa()**

**Note** for performance reasons it's not checked if the property really has color type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be set. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: a style property ORed with a state. E.g. LV\_STYLE\_BORDER\_COLOR | (LV\_STATE\_PRESSED << LV\_STYLE\_STATE\_POS)
- **the**: value to set

```
void _lv_obj_set_style_local_int(lv_obj_t *obj, uint8_t type, lv_style_property_t prop,
                                lv_style_int_t value)
```

Set a local style property of a part of an object in a given state.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example:  
`lv_obj_style_get_border_opa()`

**Note** for performance reasons it's not checked if the property really has integer type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be set. E.g. `LV_OBJ_PART_MAIN`, `LV_BTN_PART_MAIN`, `LV_SLIDER_PART_KNOB`
- **prop**: a style property ORed with a state. E.g. `LV_STYLE_BORDER_WIDTH | (LV_STATE_PRESSED << LV_STYLE_STATE_POS)`
- **the**: value to set

```
void _lv_obj_set_style_local_opa(lv_obj_t *obj, uint8_t type, lv_style_property_t prop,
                                 lv_opa_t opa)
```

Set a local style property of a part of an object in a given state.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example:  
`lv_obj_style_get_border_opa()`

**Note** for performance reasons it's not checked if the property really has opacity type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be set. E.g. `LV_OBJ_PART_MAIN`, `LV_BTN_PART_MAIN`, `LV_SLIDER_PART_KNOB`
- **prop**: a style property ORed with a state. E.g. `LV_STYLE_BORDER_OPA | (LV_STATE_PRESSED << LV_STYLE_STATE_POS)`
- **the**: value to set

```
void _lv_obj_set_style_local_ptr(lv_obj_t *obj, uint8_t type, lv_style_property_t prop,
                                 lv_style_fptr_dptr_t value)
```

Set a local style property of a part of an object in a given state.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example:  
`lv_obj_style_get_border_opa()`

**Note** for performance reasons it's not checked if the property really has pointer type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be set. E.g. `LV_OBJ_PART_MAIN`, `LV_BTN_PART_MAIN`, `LV_SLIDER_PART_KNOB`
- **prop**: a style property ORed with a state. E.g. `LV_STYLE_TEXT_FONT | (LV_STATE_PRESSED << LV_STYLE_STATE_POS)`
- **the**: value to set

```
static void _lv_obj_set_style_local_func_ptr(lv_obj_t *obj, uint8_t type,
                                              lv_style_property_t prop,
                                              lv_style_prop_cb_t value)
```

Set a local style property of a part of an object in a given state.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example:  
`lv_obj_style_get_transition_path()`

**Note** for performance reasons it's not checked if the property really has pointer type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be set. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: a style property ORed with a state. E.g. LV\_STYLE\_TEXT\_FONT | (LV\_STATE\_PRESSED << LV\_STYLE\_STATE\_POS)
- **the**: value to set

```
static void _lv_obj_set_style_local_data_ptr(lv_obj_t *obj, uint8_t type,
                                             lv_style_property_t prop, const void
                                             *value)
```

Set a local style property of a part of an object in a given state.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example:  
`lv_obj_style_get_text_font()`

**Note** for performance reasons it's not checked if the property really has pointer type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be set. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: a style property ORed with a state. E.g. LV\_STYLE\_TEXT\_FONT | (LV\_STATE\_PRESSED << LV\_STYLE\_STATE\_POS)
- **the**: value to set

```
bool _lv_obj_remove_style_local_prop(lv_obj_t *obj, uint8_t part, lv_style_property_t
                                     prop)
```

Remove a local style property from a part of an object with a given state.

**Note** shouldn't be used directly. Use the specific property remove functions instead. For example:  
`lv_obj_style_remove_border_opa()`

**Return** true: the property was found and removed; false: the property was not found

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be removed. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: a style property ORed with a state. E.g. LV\_STYLE\_TEXT\_FONT | (LV\_STATE\_PRESSED << LV\_STYLE\_STATE\_POS)

```
void lv_obj_set_hidden(lv_obj_t *obj, bool en)
```

Hide an object. It won't be visible and clickable.

#### Parameters

- **obj**: pointer to an object
- **en**: true: hide the object

void **lv\_obj\_set\_adv\_hittest**(*lv\_obj\_t* \*obj, bool en)

Set whether advanced hit-testing is enabled on an object

**Parameters**

- **obj**: pointer to an object
- **en**: true: advanced hit-testing is enabled

void **lv\_obj\_set\_click**(*lv\_obj\_t* \*obj, bool en)

Enable or disable the clicking of an object

**Parameters**

- **obj**: pointer to an object
- **en**: true: make the object clickable

void **lv\_obj\_set\_top**(*lv\_obj\_t* \*obj, bool en)

Enable to bring this object to the foreground if it or any of its children is clicked

**Parameters**

- **obj**: pointer to an object
- **en**: true: enable the auto top feature

void **lv\_obj\_set\_drag**(*lv\_obj\_t* \*obj, bool en)

Enable the dragging of an object

**Parameters**

- **obj**: pointer to an object
- **en**: true: make the object draggable

void **lv\_obj\_set\_drag\_dir**(*lv\_obj\_t* \*obj, *lv\_drag\_dir\_t* drag\_dir)

Set the directions an object can be dragged in

**Parameters**

- **obj**: pointer to an object
- **drag\_dir**: bitwise OR of allowed drag directions

void **lv\_obj\_set\_drag\_throw**(*lv\_obj\_t* \*obj, bool en)

Enable the throwing of an object after is is dragged

**Parameters**

- **obj**: pointer to an object
- **en**: true: enable the drag throw

void **lv\_obj\_set\_drag\_parent**(*lv\_obj\_t* \*obj, bool en)

Enable to use parent for drag related operations. If trying to drag the object the parent will be moved instead

**Parameters**

- **obj**: pointer to an object
- **en**: true: enable the ‘drag parent’ for the object

void **lv\_obj\_set\_gesture\_parent**(*lv\_obj\_t* \*obj, bool en)

Enable to use parent for gesture related operations. If trying to gesture the object the parent will be moved instead

#### Parameters

- **obj**: pointer to an object
- **en**: true: enable the ‘gesture parent’ for the object

void **lv\_obj\_set\_parent\_event**(*lv\_obj\_t* \*obj, bool en)

Propagate the events to the parent too

#### Parameters

- **obj**: pointer to an object
- **en**: true: enable the event propagation

void **lv\_obj\_set\_base\_dir**(*lv\_obj\_t* \*obj, lv\_bidi\_dir\_t dir)

Set the base direction of the object

#### Parameters

- **obj**: pointer to an object
- **dir**: the new base direction. LV\_BIDI\_DIR\_LTR/RTL/AUTO/INHERIT

void **lv\_obj\_add\_protect**(*lv\_obj\_t* \*obj, uint8\_t prot)

Set a bit or bits in the protect filed

#### Parameters

- **obj**: pointer to an object
- **prot**: ‘OR’ -ed values from lv\_protect\_t

void **lv\_obj\_clear\_protect**(*lv\_obj\_t* \*obj, uint8\_t prot)

Clear a bit or bits in the protect filed

#### Parameters

- **obj**: pointer to an object
- **prot**: ‘OR’ -ed values from lv\_protect\_t

void **lv\_obj\_set\_state**(*lv\_obj\_t* \*obj, lv\_state\_t state)

Set the state (fully overwrite) of an object. If specified in the styles a transition animation will be started from the previous state to the current

#### Parameters

- **obj**: pointer to an object
- **state**: the new state

void **lv\_obj\_add\_state**(*lv\_obj\_t* \*obj, lv\_state\_t state)

Add a given state or states to the object. The other state bits will remain unchanged. If specified in the styles a transition animation will be started from the previous state to the current

#### Parameters

- **obj**: pointer to an object
- **state**: the state bits to add. E.g LV\_STATE\_PRESSED | LV\_STATE\_FOCUSED

void **lv\_obj\_clear\_state**(*lv\_obj\_t* \*obj, lv\_state\_t state)

Remove a given state or states to the object. The other state bits will remain unchanged. If specified in the styles a transition animation will be started from the previous state to the current

#### Parameters



- **obj**: pointer to an object
- **state**: the state bits to remove. E.g `LV_STATE_PRESSED` | `LV_STATE_FOCUSED`

void **lv\_obj\_finish\_transitions**(*lv\_obj\_t* \*obj, uint8\_t part)

Finish all pending transitions on a part of an object

#### Parameters

- **obj**: pointer to an object
- **part**: part of the object, e.g `LV_BRN_PART_MAIN` or `LV_OBJ_PART_ALL` for all parts

void **lv\_obj\_set\_event\_cb**(*lv\_obj\_t* \*obj, *lv\_event\_cb\_t* event\_cb)

Set a an event handler function for an object. Used by the user to react on event which happens with the object.

#### Parameters

- **obj**: pointer to an object
- **event\_cb**: the new event function

lv\_res\_t **lv\_event\_send**(*lv\_obj\_t* \*obj, *lv\_event\_t* event, const void \*data)

Send an event to the object

**Return** `LV_RES_OK`: **obj** was not deleted in the event; `LV_RES_INV`: **obj** was deleted in the event

#### Parameters

- **obj**: pointer to an object
- **event**: the type of the event from `lv_event_t`.
- **data**: arbitrary data depending on the object type and the event. (Usually `NULL`)

lv\_res\_t **lv\_event\_send\_func**(*lv\_event\_cb\_t* event\_xcb, *lv\_obj\_t* \*obj, *lv\_event\_t* event, const void \*data)

Call an event function with an object, event, and data.

**Return** `LV_RES_OK`: **obj** was not deleted in the event; `LV_RES_INV`: **obj** was deleted in the event

#### Parameters

- **event\_xcb**: an event callback function. If `NULL` `LV_RES_OK` will return without any actions. (the ‘x’ in the argument name indicates that its not a fully generic function because it not follows the `func_name(object, callback, ...)` convention)
- **obj**: pointer to an object to associate with the event (can be `NULL` to simply call the `event_cb`)
- **event**: an event
- **data**: pointer to a custom data

const void \***lv\_event\_get\_data**(void)

Get the **data** parameter of the current event

**Return** the **data** parameter

void **lv\_obj\_set\_signal\_cb**(*lv\_obj\_t* \*obj, *lv\_signal\_cb\_t* signal\_cb)

Set the a signal function of an object. Used internally by the library. Always call the previous signal function in the new.

#### Parameters

- **obj**: pointer to an object
- **signal\_cb**: the new signal function

`lv_res_t lv_signal_send(lv_obj_t *obj, lv_signal_t signal, void *param)`

Send an event to the object

**Return** LV\_RES\_OK or LV\_RES\_INV

**Parameters**

- **obj**: pointer to an object
- **event**: the type of the event from `lv_event_t`.

`void lv_obj_set_design_cb(lv_obj_t *obj, lv_design_cb_t design_cb)`

Set a new design function for an object

**Parameters**

- **obj**: pointer to an object
- **design\_cb**: the new design function

`void *lv_obj_allocate_ext_attr(lv_obj_t *obj, uint16_t ext_size)`

Allocate a new ext. data for an object

**Return** pointer to the allocated ext

**Parameters**

- **obj**: pointer to an object
- **ext\_size**: the size of the new ext. data

`void lv_obj_refresh_ext_draw_pad(lv_obj_t *obj)`

Send a 'LV\_SIGNAL\_REFR\_EXT\_SIZE' signal to the object to refresh the extended draw area. The object needs to be invalidated by `lv_obj_invalidate(obj)` manually after this function.

**Parameters**

- **obj**: pointer to an object

`lv_obj_t *lv_obj_get_screen(const lv_obj_t *obj)`

Return with the screen of an object

**Return** pointer to a screen

**Parameters**

- **obj**: pointer to an object

`lv_disp_t *lv_obj_get_disp(const lv_obj_t *obj)`

Get the display of an object

**Return** pointer the object's display

**Parameters**

- **scr**: pointer to an object

`lv_obj_t *lv_obj_get_parent(const lv_obj_t *obj)`

Returns with the parent of an object

**Return** pointer to the parent of 'obj'

**Parameters**

- **obj**: pointer to an object

*lv\_obj\_t* \***lv\_obj\_get\_child**(const *lv\_obj\_t* \*obj, const *lv\_obj\_t* \*child)

Iterate through the children of an object (start from the “youngest, lastly created” )

**Return** the child after ‘act\_child’ or NULL if no more child

**Parameters**

- **obj**: pointer to an object
- **child**: NULL at first call to get the next children and the previous return value later

*lv\_obj\_t* \***lv\_obj\_get\_child\_back**(const *lv\_obj\_t* \*obj, const *lv\_obj\_t* \*child)

Iterate through the children of an object (start from the “oldest” , firstly created)

**Return** the child after ‘act\_child’ or NULL if no more child

**Parameters**

- **obj**: pointer to an object
- **child**: NULL at first call to get the next children and the previous return value later

uint16\_t **lv\_obj\_count\_children**(const *lv\_obj\_t* \*obj)

Count the children of an object (only children directly on ‘obj’ )

**Return** children number of ‘obj’

**Parameters**

- **obj**: pointer to an object

uint16\_t **lv\_obj\_count\_children\_recursive**(const *lv\_obj\_t* \*obj)

Recursively count the children of an object

**Return** children number of ‘obj’

**Parameters**

- **obj**: pointer to an object

void **lv\_obj\_get\_coords**(const *lv\_obj\_t* \*obj, lv\_area\_t \*coords\_p)

Copy the coordinates of an object to an area

**Parameters**

- **obj**: pointer to an object
- **coords\_p**: pointer to an area to store the coordinates

void **lv\_obj\_get\_inner\_coords**(const *lv\_obj\_t* \*obj, lv\_area\_t \*coords\_p)

Reduce area retried by [lv\\_obj\\_get\\_coords\(\)](#) the get graphically usable area of an object. (Without the size of the border or other extra graphical elements)

**Parameters**

- **coords\_p**: store the result area here

lv\_coord\_t **lv\_obj\_get\_x**(const *lv\_obj\_t* \*obj)

Get the x coordinate of object

**Return** distance of ‘obj’ from the left side of its parent

**Parameters**

- **obj**: pointer to an object

lv\_coord\_t **lv\_obj\_get\_y**(const *lv\_obj\_t* \*obj)

Get the y coordinate of object

**Return** distance of ‘obj’ from the top of its parent

**Parameters**

- **obj**: pointer to an object

`lv_coord_t lv_obj_get_width(const lv_obj_t *obj)`

Get the width of an object

**Return** the width

**Parameters**

- **obj**: pointer to an object

`lv_coord_t lv_obj_get_height(const lv_obj_t *obj)`

Get the height of an object

**Return** the height

**Parameters**

- **obj**: pointer to an object

`lv_coord_t lv_obj_get_width_fit(const lv_obj_t *obj)`

Get that width reduced by the left and right padding.

**Return** the width which still fits into the container

**Parameters**

- **obj**: pointer to an object

`lv_coord_t lv_obj_get_height_fit(const lv_obj_t *obj)`

Get that height reduced by the top and bottom padding.

**Return** the height which still fits into the container

**Parameters**

- **obj**: pointer to an object

`lv_coord_t lv_obj_get_height_margin(lv_obj_t *obj)`

Get the height of an object by taking the top and bottom margin into account. The returned height will be `obj_h + margin_top + margin_bottom`

**Return** the height including three margins

**Parameters**

- **obj**: pointer to an object

`lv_coord_t lv_obj_get_width_margin(lv_obj_t *obj)`

Get the width of an object by taking the left and right margin into account. The returned width will be `obj_w + margin_left + margin_right`

**Return** the height including three margins

**Parameters**

- **obj**: pointer to an object

`lv_coord_t lv_obj_get_width_grid(lv_obj_t *obj, uint8_t div, uint8_t span)`

Divide the width of the object and get the width of a given number of columns. Take paddings into account.

**Return** the width according to the given parameters

#### Parameters

- **obj**: pointer to an object
- **div**: indicates how many columns are assumed. If 1 the width will be set the the parent' s width If 2 only half parent width - inner padding of the parent If 3 only third parent width - 2 \* inner padding of the parent
- **span**: how many columns are combined

lv\_coord\_t **lv\_obj\_get\_height\_grid**(lv\_obj\_t \*obj, uint8\_t div, uint8\_t span)

Divide the height of the object and get the width of a given number of columns. Take paddings into account.

**Return** the height according to the given parameters

#### Parameters

- **obj**: pointer to an object
- **div**: indicates how many rows are assumed. If 1 the height will be set the the parent' s height If 2 only half parent height - inner padding of the parent If 3 only third parent height - 2 \* inner padding of the parent
- **span**: how many rows are combined

bool **lv\_obj\_get\_auto\_realign**(const lv\_obj\_t \*obj)

Get the automatic realign property of the object.

**Return** true: auto realign is enabled; false: auto realign is disabled

#### Parameters

- **obj**: pointer to an object

lv\_coord\_t **lv\_obj\_get\_ext\_click\_pad\_left**(const lv\_obj\_t \*obj)

Get the left padding of extended clickable area

**Return** the extended left padding

#### Parameters

- **obj**: pointer to an object

lv\_coord\_t **lv\_obj\_get\_ext\_click\_pad\_right**(const lv\_obj\_t \*obj)

Get the right padding of extended clickable area

**Return** the extended right padding

#### Parameters

- **obj**: pointer to an object

lv\_coord\_t **lv\_obj\_get\_ext\_click\_pad\_top**(const lv\_obj\_t \*obj)

Get the top padding of extended clickable area

**Return** the extended top padding

#### Parameters

- **obj**: pointer to an object

lv\_coord\_t **lv\_obj\_get\_ext\_click\_pad\_bottom**(const lv\_obj\_t \*obj)

Get the bottom padding of extended clickable area

**Return** the extended bottom padding

#### Parameters

- **obj**: pointer to an object

`lv_coord_t lv_obj_get_ext_draw_pad(const lv_obj_t *obj)`

Get the extended size attribute of an object

**Return** the extended size attribute

#### Parameters

- **obj**: pointer to an object

`lv_style_list_t *lv_obj_get_style_list(const lv_obj_t *obj, uint8_t part)`

Get the style list of an object's part.

**Return** pointer to the style list. (Can be NULL)

#### Parameters

- **obj**: pointer to an object.
- **part**: part the part of the object which style list should be get. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB

`lv_style_int_t lv_obj_get_style_int(const lv_obj_t *obj, uint8_t part, lv_style_property_t prop)`

Get a style property of a part of an object in the object's current state. If there is a running transitions it is taken into account

**Return** the value of the property of the given part in the current state. If the property is not found a default value will be returned.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example: `lv_obj_style_get_border_width()`

**Note** for performance reasons it's not checked if the property really has integer type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be get. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: the property to get. E.g. LV\_STYLE\_BORDER\_WIDTH. The state of the object will be added internally

`lv_color_t lv_obj_get_style_color(const lv_obj_t *obj, uint8_t part, lv_style_property_t prop)`

Get a style property of a part of an object in the object's current state. If there is a running transitions it is taken into account

**Return** the value of the property of the given part in the current state. If the property is not found a default value will be returned.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example: `lv_obj_style_get_border_color()`

**Note** for performance reasons it's not checked if the property really has color type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be get. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB

- **prop**: the property to get. E.g. LV\_STYLE\_BORDER\_COLOR. The state of the object will be added internally

lv\_opa\_t **lv\_obj\_get\_style\_opa**(const lv\_obj\_t \*obj, uint8\_t part, lv\_style\_property\_t prop)

Get a style property of a part of an object in the object's current state. If there is a running transitions it is taken into account

**Return** the value of the property of the given part in the current state. If the property is not found a default value will be returned.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example: lv\_obj\_style\_get\_border\_opa()

**Note** for performance reasons it's not checked if the property really has opacity type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be get. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: the property to get. E.g. LV\_STYLE\_BORDER\_OPA. The state of the object will be added internally

lv\_style\_fptr\_dptr\_t **lv\_obj\_get\_style\_ptr**(const lv\_obj\_t \*obj, uint8\_t part, lv\_style\_property\_t prop)

Get a style property of a part of an object in the object's current state. If there is a running transitions it is taken into account

**Return** the value of the property of the given part in the current state. If the property is not found a default value will be returned.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example: lv\_obj\_style\_get\_border\_opa()

**Note** for performance reasons it's not checked if the property really has pointer type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be get. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: the property to get. E.g. LV\_STYLE\_TEXT\_FONT. The state of the object will be added internally

static lv\_style\_prop\_cb\_t **lv\_obj\_get\_style\_func\_ptr**(const lv\_obj\_t \*obj, uint8\_t part, lv\_style\_property\_t prop)

Get a style property of a part of an object in the object's current state. If there is a running transitions it is taken into account

**Return** the value of the property of the given part in the current state. If the property is not found a default value will be returned.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example: lv\_obj\_style\_get\_transition\_path()

**Note** for performance reasons it's not checked if the property really has pointer type

#### Parameters

- **obj**: pointer to an object

- **part**: the part of the object which style property should be get. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: the property to get. E.g. LV\_STYLE\_TEXT\_FONT. The state of the object will be added internally

**static const** void \*\_lv\_obj\_get\_style\_data\_ptr(const lv\_obj\_t \*obj, uint8\_t part, lv\_style\_property\_t prop)

Get a style property of a part of an object in the object's current state. If there is a running transitions it is taken into account

**Return** the value of the property of the given part in the current state. If the property is not found a default value will be returned.

**Note** shouldn't be used directly. Use the specific property get functions instead. For example: lv\_obj\_style\_get\_text\_font()

**Note** for performance reasons it's not checked if the property really has pointer type

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be get. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB
- **prop**: the property to get. E.g. LV\_STYLE\_TEXT\_FONT. The state of the object will be added internally

lv\_style\_t \*\_lv\_obj\_get\_local\_style(lv\_obj\_t \*obj, uint8\_t part)

Get the local style of a part of an object.

**Return** pointer to the local style if exists else NULL.

#### Parameters

- **obj**: pointer to an object
- **part**: the part of the object which style property should be set. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_PART\_MAIN, LV\_SLIDER\_PART\_KNOB

bool lv\_obj\_get\_hidden(const lv\_obj\_t \*obj)

Get the hidden attribute of an object

**Return** true: the object is hidden

#### Parameters

- **obj**: pointer to an object

bool lv\_obj\_get\_adv\_hittest(const lv\_obj\_t \*obj)

Get whether advanced hit-testing is enabled on an object

**Return** true: advanced hit-testing is enabled

#### Parameters

- **obj**: pointer to an object

bool lv\_obj\_get\_click(const lv\_obj\_t \*obj)

Get the click enable attribute of an object

**Return** true: the object is clickable

#### Parameters

- **obj**: pointer to an object



bool **lv\_obj\_get\_top**(const *lv\_obj\_t* \*obj)

Get the top enable attribute of an object

**Return** true: the auto top feature is enabled

**Parameters**

- obj: pointer to an object

bool **lv\_obj\_get\_drag**(const *lv\_obj\_t* \*obj)

Get the drag enable attribute of an object

**Return** true: the object is draggable

**Parameters**

- obj: pointer to an object

*lv\_drag\_dir\_t* **lv\_obj\_get\_drag\_dir**(const *lv\_obj\_t* \*obj)

Get the directions an object can be dragged

**Return** bitwise OR of allowed directions an object can be dragged in

**Parameters**

- obj: pointer to an object

bool **lv\_obj\_get\_drag\_throw**(const *lv\_obj\_t* \*obj)

Get the drag throw enable attribute of an object

**Return** true: drag throw is enabled

**Parameters**

- obj: pointer to an object

bool **lv\_obj\_get\_drag\_parent**(const *lv\_obj\_t* \*obj)

Get the drag parent attribute of an object

**Return** true: drag parent is enabled

**Parameters**

- obj: pointer to an object

bool **lv\_obj\_get\_parent\_event**(const *lv\_obj\_t* \*obj)

Get the drag parent attribute of an object

**Return** true: drag parent is enabled

**Parameters**

- obj: pointer to an object

bool **lv\_obj\_get\_gesture\_parent**(const *lv\_obj\_t* \*obj)

Get the gesture parent attribute of an object

**Return** true: gesture parent is enabled

**Parameters**

- obj: pointer to an object

*lv\_bidi\_dir\_t* **lv\_obj\_get\_base\_dir**(const *lv\_obj\_t* \*obj)

*lv\_opa\_t* **lv\_obj\_get\_opa\_scale\_enable**(const *lv\_obj\_t* \*obj)

Get the opa scale enable parameter

**Return** true: opa scaling is enabled for this object and all children; false: no opa scaling

#### Parameters

- **obj**: pointer to an object

`lv_opa_t lv_obj_get_opa_scale(const lv_obj_t *obj)`

Get the opa scale parameter of an object

**Return** opa scale [0..255]

#### Parameters

- **obj**: pointer to an object

`uint8_t lv_obj_get_protect(const lv_obj_t *obj)`

Get the protect field of an object

**Return** protect field ( ‘OR’ ed values of `lv_protect_t`)

#### Parameters

- **obj**: pointer to an object

`bool lv_obj_is_protected(const lv_obj_t *obj, uint8_t prot)`

Check at least one bit of a given protect bitfield is set

**Return** false: none of the given bits are set, true: at least one bit is set

#### Parameters

- **obj**: pointer to an object
- **prot**: protect bits to test ( ‘OR’ ed values of `lv_protect_t`)

`lv_state_t lv_obj_get_state(const lv_obj_t *obj, uint8_t part)`

`lv_signal_cb_t lv_obj_get_signal_cb(const lv_obj_t *obj)`

Get the signal function of an object

**Return** the signal function

#### Parameters

- **obj**: pointer to an object

`lv_design_cb_t lv_obj_get_design_cb(const lv_obj_t *obj)`

Get the design function of an object

**Return** the design function

#### Parameters

- **obj**: pointer to an object

`lv_event_cb_t lv_obj_get_event_cb(const lv_obj_t *obj)`

Get the event function of an object

**Return** the event function

#### Parameters

- **obj**: pointer to an object

`bool lv_obj_is_point_on_coords(lv_obj_t *obj, const lv_point_t *point)`

Check if a given screen-space point is on an object’ s coordinates.

This method is intended to be used mainly by advanced hit testing algorithms to check whether the point is even within the object (as an optimization).

#### Parameters

- **obj**: object to check
- **point**: screen-space point

bool **lv\_obj\_hittest**(*lv\_obj\_t* \*obj, *lv\_point\_t* \*point)  
Hit-test an object given a particular point in screen space.

**Return** true if the object is considered under the point

**Parameters**

- **obj**: object to hit-test
- **point**: screen-space point

void \***lv\_obj\_get\_ext\_attr**(const *lv\_obj\_t* \*obj)  
Get the ext pointer

**Return** the ext pointer but not the dynamic version Use it as ext->data1, and NOT da(ext)->data1

**Parameters**

- **obj**: pointer to an object

void **lv\_obj\_get\_type**(const *lv\_obj\_t* \*obj, *lv\_obj\_type\_t* \*buf)  
Get object' s and its ancestors type. Put their name in **type\_buf** starting with the current type.  
E.g. buf.type[0]=" lv\_btn" , buf.type[1]=" lv\_cont" , buf.type[2]=" lv\_obj"

**Parameters**

- **obj**: pointer to an object which type should be get
- **buf**: pointer to an *lv\_obj\_type\_t* buffer to store the types

*lv\_obj\_user\_data\_t* **lv\_obj\_get\_user\_data**(const *lv\_obj\_t* \*obj)  
Get the object' s user data

**Return** user data

**Parameters**

- **obj**: pointer to an object

*lv\_obj\_user\_data\_t* \***lv\_obj\_get\_user\_data\_ptr**(const *lv\_obj\_t* \*obj)  
Get a pointer to the object' s user data

**Return** pointer to the user data

**Parameters**

- **obj**: pointer to an object

void **lv\_obj\_set\_user\_data**(*lv\_obj\_t* \*obj, *lv\_obj\_user\_data\_t* data)  
Set the object' s user data. The data will be copied.

**Parameters**

- **obj**: pointer to an object
- **data**: user data

void \***lv\_obj\_get\_group**(const *lv\_obj\_t* \*obj)  
Get the group of the object

**Return** the pointer to group of the object

**Parameters**

- **obj**: pointer to an object

bool **lv\_obj\_is\_focused**(const *lv\_obj\_t* \*obj)

Tell whether the object is the focused object of a group or not.

**Return** true: the object is focused, false: the object is not focused or not in a group

**Parameters**

- **obj**: pointer to an object

lv\_res\_t **lv\_obj\_handle\_get\_type\_signal**(*lv\_obj\_type\_t* \*buf, const char \*name)

Used in the signal callback to handle LV\_SIGNAL\_GET\_TYPE signal

**Return** LV\_RES\_OK

**Parameters**

- **buf**: pointer to *lv\_obj\_type\_t*. (param in the signal callback)
- **name**: name of the object. E.g. "lv\_btn". (Only the pointer is saved)

void **lv\_obj\_init\_draw\_rect\_dsc**(*lv\_obj\_t* \*obj, uint8\_t type, lv\_draw\_rect\_dsc\_t \*draw\_dsc)

Initialize a rectangle descriptor from an object's styles

**Note** Only the relevant fields will be set. E.g. if **border width == 0** the other border properties won't be evaluated.

**Parameters**

- **obj**: pointer to an object
- **type**: type of style. E.g. LV\_OBJ\_PART\_MAIN, LV\_BTN\_STYLE\_REL or LV\_PAGE\_STYLE\_SCRL
- **draw\_dsc**: the descriptor to initialize

void **lv\_obj\_init\_draw\_label\_dsc**(*lv\_obj\_t* \*obj, uint8\_t type, lv\_draw\_label\_dsc\_t \*draw\_dsc)

void **lv\_obj\_init\_draw\_img\_dsc**(*lv\_obj\_t* \*obj, uint8\_t part, lv\_draw\_img\_dsc\_t \*draw\_dsc)

void **lv\_obj\_init\_draw\_line\_dsc**(*lv\_obj\_t* \*obj, uint8\_t part, lv\_draw\_line\_dsc\_t \*draw\_dsc)

lv\_coord\_t **lv\_obj\_get\_draw\_rect\_ext\_pad\_size**(*lv\_obj\_t* \*obj, uint8\_t part)

Get the required extra size (around the object's part) to draw shadow, outline, value etc.

**Parameters**

- **obj**: pointer to an object
- **part**: part of the object

void **lv\_obj\_fade\_in**(*lv\_obj\_t* \*obj, uint32\_t time, uint32\_t delay)

Fade in (from transparent to fully cover) an object and all its children using an **opa\_scale** animation.

**Parameters**

- **obj**: the object to fade in
- **time**: duration of the animation [ms]
- **delay**: wait before the animation starts [ms]

void **lv\_obj\_fade\_out**(*lv\_obj\_t* \*obj, uint32\_t time, uint32\_t delay)

Fade out (from fully cover to transparent) an object and all its children using an **opa\_scale** animation.

**Parameters**

- **obj**: the object to fade in
- **time**: duration of the animation [ms]
- **delay**: wait before the animation starts [ms]

## struct lv\_realign\_t

### Public Members

**const struct *lv\_obj\_t* \*base**

lv\_coord\_t **xofs**

lv\_coord\_t **yofs**

lv\_align\_t **align**

uint8\_t **auto\_realign**

uint8\_t **origo\_align**

1: the origo (center of the object) was aligned with lv\_obj\_align\_origo

## struct lv\_obj\_t

### Public Members

**struct *lv\_obj\_t* \*parent**

Pointer to the parent object

lv\_ll\_t **child\_ll**

Linked list to store the children objects

lv\_area\_t **coords**

Coordinates of the object (x1, y1, x2, y2)

*lv\_event\_cb\_t* **event\_cb**

Event callback function

*lv\_signal\_cb\_t* **signal\_cb**

Object type specific signal function

*lv\_design\_cb\_t* **design\_cb**

Object type specific design function

void \***ext\_attr**

Object type specific extended data

lv\_style\_list\_t **style\_list**

uint8\_t **ext\_click\_pad\_hor**

Extra click padding in horizontal direction

uint8\_t **ext\_click\_pad\_ver**

Extra click padding in vertical direction

lv\_area\_t **ext\_click\_pad**

Extra click padding area.

lv\_coord\_t **ext\_draw\_pad**

EXTtend the size in every direction for drawing.

`uint8_t` **click**  
 1: Can be pressed by an input device

`uint8_t` **drag**  
 1: Enable the dragging

`uint8_t` **drag\_throw**  
 1: Enable throwing with drag

`uint8_t` **drag\_parent**  
 1: Parent will be dragged instead

`uint8_t` **hidden**  
 1: Object is hidden

`uint8_t` **top**  
 1: If the object or its children is clicked it goes to the foreground

`uint8_t` **parent\_event**  
 1: Send the object' s events to the parent too.

`uint8_t` **adv\_hittest**  
 1: Use advanced hit-testing (slower)

`uint8_t` **gesture\_parent**  
 1: Parent will be gesture instead

`lv_drag_dir_t` **drag\_dir**  
 Which directions the object can be dragged in

`lv_bidi_dir_t` **base\_dir**  
 Base direction of texts related to this object

`void` **\*group\_p**

`uint8_t` **protect**  
 Automatically happening actions can be prevented. ‘OR’ ed values from `lv_protect_t`

`lv_state_t` **state**

`lv_realign_t` **realign**  
 Information about the last call to `lv_obj_align`.

`lv_obj_user_data_t` **user\_data**  
 Custom user data for object.

**struct lv\_obj\_type\_t**  
*#include <lv\_obj.h>* Used by `lv_obj_get_type()`. The object' s and its ancestor types are stored here

### Public Members

**const** char **\*type**[LV\_MAX\_ANCESTOR\_NUM]  
 [0]: the actual type, [1]: ancestor, [2] #1' s ancestor ...[x]: “lv\_obj”

**struct lv\_hit\_test\_info\_t**

### Public Members

`lv_point_t` **\*point**  
**bool** **result**

## struct lv\_get\_style\_info\_t

### Public Members

uint8\_t **part**

lv\_style\_list\_t \***result**

## struct lv\_get\_state\_info\_t

### Public Members

uint8\_t **part**

*lv\_state\_t* **result**

## Arc (lv\_arc)

### Overview

The Arc are consists of a background and a foreground arc. Both can have start and end angles and thickness.

### Parts and Styles

The Arc' s main part is called **LV\_ARC\_PART\_MAIN**. It draws a background using the typical background style properties and an arc using the *line* style properties. The arc' s size and position will respect the *padding* style properties.

**LV\_ARC\_PART\_INDIC** is virtual part and it draws an other arc using the *line* style proeprties. It' s padding values are interpreted relative to the background arc. The radius of the indicator arc will be modified according to the greatest padding value.

### Usage

### Angles

To set the angles of the background, use the `lv_arc_set_bg_angles(arc, start_angle, end_angle)` function or `lv_arc_set_bg_start/end_angle(arc, start_angle)`. Zero degree is at the middle right (3 o' clock) of the object and the degrees are increasing in a clockwise direction. The angles should be in [0;360] range.

Similarly, `lv_arc_set_angles(arc, start_angle, end_angle)` function or `lv_arc_set_start/end_angle(arc, start_angle)` sets the angles of the indicator arc.

### Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about *Keys*.

## Example

### C

#### Simple Arc

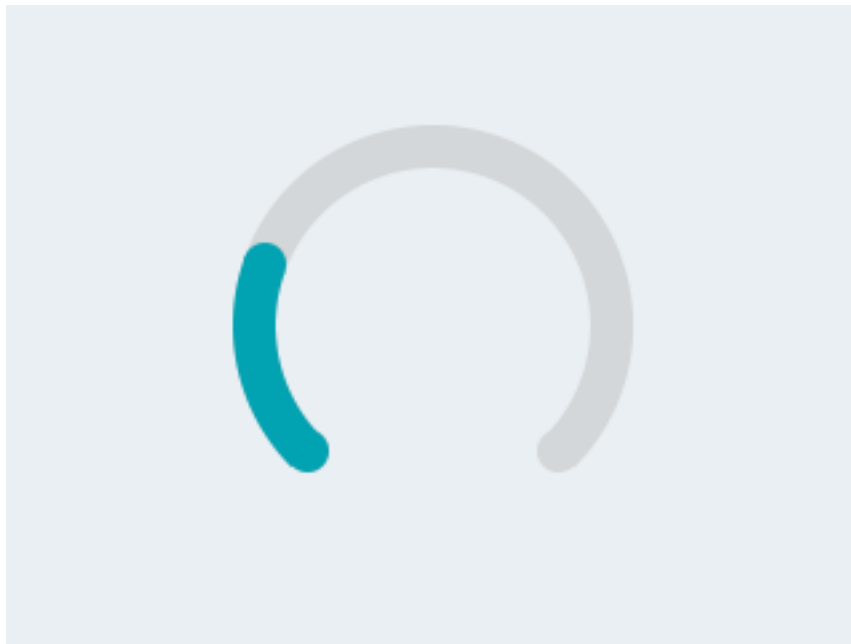

code

```
#include "lvgl/lvgl.h"

#ifdef LV_USE_ARC

void lv_ex_arc_1(void)
{
    /*Create an Arc*/
    lv_obj_t * arc = lv_arc_create(lv_scr_act(), NULL);
    lv_arc_set_end_angle(arc, 200);
    lv_obj_set_size(arc, 150, 150);
    lv_obj_align(arc, NULL, LV_ALIGN_CENTER, 0, 0);
}

#endif
```



## Loader with Arc



code

```
#include "lvgl/lvgl.h"
#if LV_USE_ARC

/**
 * An `lv_task` to call periodically to set the angles of the arc
 * @param t
 */
static void arc_loader(lv_task_t * t)
{
    static int16_t a = 270;

    a+=5;

    lv_arc_set_end_angle(t->user_data, a);

    if(a >= 270 + 360) {
        lv_task_del(t);
        return;
    }
}

/**
 * Create an arc which acts as a loader.
 */
void lv_ex_arc_2(void)
{
    /*Create an Arc*/
    lv_obj_t * arc = lv_arc_create(lv_scr_act(), NULL);
    lv_arc_set_bg_angles(arc, 0, 360);
    lv_arc_set_angles(arc, 270, 270);
    lv_obj_align(arc, NULL, LV_ALIGN_CENTER, 0, 0);
}
```

(continues on next page)

(continued from previous page)

```

/* Create an `lv_task` to update the arc.
 * Store the `arc` in the user data*/
lv_task_create(arc_loader, 20, LV_TASK_PRIO_LOWEST, arc);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_arc\_part\_t**

### Enums

**enum** [anonymous]

*Values:*

```

LV_ARC_PART_BG = LV_OBJ_PART_MAIN
LV_ARC_PART_INDIC
LV_ARC_PART_VIRTUAL_LAST
LV_ARC_PART_REAL_LAST = LV_OBJ_PART_REAL_LAST

```

### Functions

*lv\_obj\_t* \***lv\_arc\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a arc objects

**Return** pointer to the created arc

**Parameters**

- **par**: pointer to an object, it will be the parent of the new arc
- **copy**: pointer to a arc object, if not NULL then the new object will be copied from it

void **lv\_arc\_set\_start\_angle**(*lv\_obj\_t* \*arc, uint16\_t start)

Set the start angle of an arc. 0 deg: right, 90 bottom, etc.

**Parameters**

- **arc**: pointer to an arc object
- **start**: the start angle

void **lv\_arc\_set\_end\_angle**(*lv\_obj\_t* \*arc, uint16\_t end)

Set the start angle of an arc. 0 deg: right, 90 bottom, etc.

#### Parameters

- **arc**: pointer to an arc object
- **end**: the end angle

void **lv\_arc\_set\_angles**(*lv\_obj\_t* \*arc, uint16\_t start, uint16\_t end)

Set the start and end angles

#### Parameters

- **arc**: pointer to an arc object
- **start**: the start angle
- **end**: the end angle

void **lv\_arc\_set\_bg\_start\_angle**(*lv\_obj\_t* \*arc, uint16\_t start)

Set the start angle of an arc background. 0 deg: right, 90 bottom, etc.

#### Parameters

- **arc**: pointer to an arc object
- **start**: the start angle

void **lv\_arc\_set\_bg\_end\_angle**(*lv\_obj\_t* \*arc, uint16\_t end)

Set the start angle of an arc background. 0 deg: right, 90 bottom etc.

#### Parameters

- **arc**: pointer to an arc object
- **end**: the end angle

void **lv\_arc\_set\_bg\_angles**(*lv\_obj\_t* \*arc, uint16\_t start, uint16\_t end)

Set the start and end angles of the arc background

#### Parameters

- **arc**: pointer to an arc object
- **start**: the start angle
- **end**: the end angle

void **lv\_arc\_set\_rotation**(*lv\_obj\_t* \*arc, uint16\_t rotation\_angle)

Set the rotation for the whole arc

#### Parameters

- **arc**: pointer to an arc object
- **rotation\_angle**: rotation angle

uint16\_t **lv\_arc\_get\_angle\_start**(*lv\_obj\_t* \*arc)

Get the start angle of an arc.

**Return** the start angle [0..360]

#### Parameters

- **arc**: pointer to an arc object

uint16\_t **lv\_arc\_get\_angle\_end**(*lv\_obj\_t* \*arc)

Get the end angle of an arc.

**Return** the end angle [0..360]

#### Parameters

- **arc**: pointer to an arc object

uint16\_t **lv\_arc\_get\_bg\_angle\_start**(*lv\_obj\_t* \*arc)

Get the start angle of an arc background.

**Return** the start angle [0..360]

#### Parameters

- **arc**: pointer to an arc object

uint16\_t **lv\_arc\_get\_bg\_angle\_end**(*lv\_obj\_t* \*arc)

Get the end angle of an arc background.

**Return** the end angle [0..360]

#### Parameters

- **arc**: pointer to an arc object

**struct lv\_arc\_ext\_t**

#### Public Members

uint16\_t **rotation\_angle**

uint16\_t **arc\_angle\_start**

uint16\_t **arc\_angle\_end**

uint16\_t **bg\_angle\_start**

uint16\_t **bg\_angle\_end**

lv\_style\_list\_t **style\_arc**

### Bar (lv\_bar)

#### Overview

The bar object has a background and an indicator on it. The width of the indicator is set according to the current value of the bar.

Vertical bars can be created if the width of the object is smaller than its height.

Not only end, but the start value of the bar can be set which changes the start position of the indicator.

#### Parts and Styles

The Bar' s main part is called **LV\_BAR\_PART\_BG** and it uses the typical background style properties.

**LV\_BAR\_PART\_INDIC** is a virtual part which also uses all the typical background properties. By default the indicator maximal size is the same as the background' s size but setting positive padding values in **LV\_BAR\_PART\_BG** will make the indicator smaller. (negative values will make it larger) If the *value* style property is used on the indicator the alignment will be calculated based on the current size of the indicator. For example a center aligned value is always shown in the middle of the indicator regardless it' s current size.

## Usage

### Value and range

A new value can be set by `lv_bar_set_value(bar, new_value, LV_ANIM_ON/OFF)`. The value is interpreted in a range (minimum and maximum values) which can be modified with `lv_bar_set_range(bar, min, max)`. The default range is 1..100.

The new value in `lv_bar_set_value` can be set with or without an animation depending on the last parameter (`LV_ANIM_ON/OFF`). The time of the animation can be adjusted by `lv_bar_set_anim_time(bar, 100)`. The time is in milliseconds unit.

It's also possible to set the start value of the bar using `lv_bar_set_start_value(bar, new_value, LV_ANIM_ON/OFF)`

### Modes

The bar can be drawn symmetrical to zero (drawn from zero, left to right), if it's enabled with `lv_bar_set_type(bar, LV_BAR_TYPE_SYMMETRICAL)`.

### Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

### Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

### Example

## C

## Simple Bar

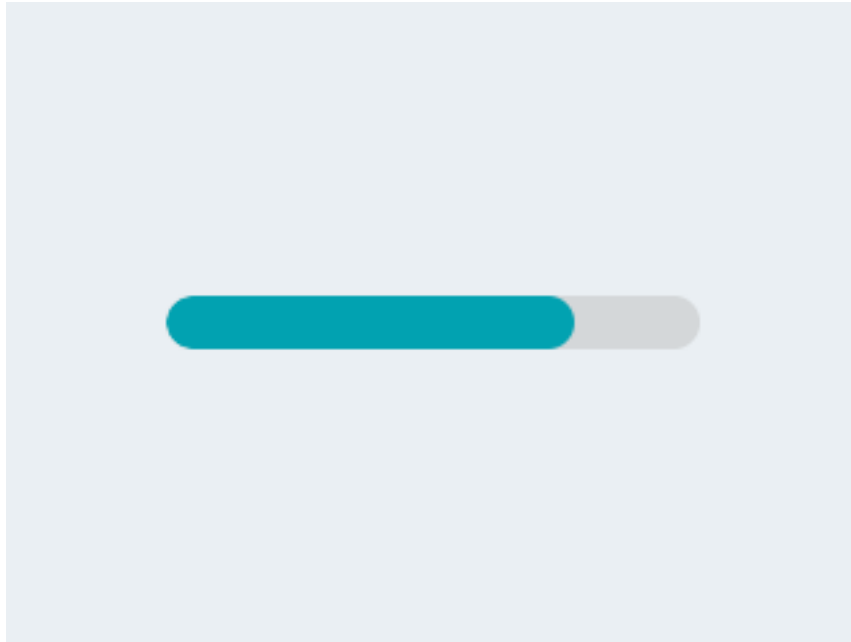

code

```
#include "lvgl/lvgl.h"
#ifdef LV_USE_BAR

void lv_ex_bar_1(void)
{
    lv_obj_t * bar1 = lv_bar_create(lv_scr_act(), NULL);
    lv_obj_set_size(bar1, 200, 20);
    lv_obj_align(bar1, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_bar_set_anim_time(bar1, 2000);
    lv_bar_set_value(bar1, 100, LV_ANIM_ON);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_bar_type_t
typedef uint8_t lv_bar_part_t
```

## Enums

**enum** [anonymous]

*Values:*

**LV\_BAR\_TYPE\_NORMAL**

**LV\_BAR\_TYPE\_SYMMETRICAL**

**LV\_BAR\_TYPE\_CUSTOM**

**enum** [anonymous]

Bar parts

*Values:*

**LV\_BAR\_PART\_BG**

**LV\_BAR\_PART\_INDIC**

Bar background style.

**\_LV\_BAR\_PART\_VIRTUAL\_LAST**

Bar fill area style.

## Functions

*lv\_obj\_t* \***lv\_bar\_create**(*lv\_obj\_t* \**par*, **const** *lv\_obj\_t* \**copy*)

Create a bar objects

**Return** pointer to the created bar

**Parameters**

- **par**: pointer to an object, it will be the parent of the new bar
- **copy**: pointer to a bar object, if not NULL then the new object will be copied from it

void **lv\_bar\_set\_value**(*lv\_obj\_t* \**bar*, int16\_t *value*, *lv\_anim\_enable\_t* *anim*)

Set a new value on the bar

**Parameters**

- **bar**: pointer to a bar object
- **value**: new value
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

void **lv\_bar\_set\_start\_value**(*lv\_obj\_t* \**bar*, int16\_t *start\_value*, *lv\_anim\_enable\_t* *anim*)

Set a new start value on the bar

**Parameters**

- **bar**: pointer to a bar object
- **value**: new start value
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

void **lv\_bar\_set\_range**(*lv\_obj\_t* \**bar*, int16\_t *min*, int16\_t *max*)

Set minimum and the maximum values of a bar

**Parameters**

- **bar**: pointer to the bar object
- **min**: minimum value
- **max**: maximum value

void **lv\_bar\_set\_type**(*lv\_obj\_t* \*bar, *lv\_bar\_type\_t* type)  
Set the type of bar.

**Parameters**

- **bar**: pointer to bar object
- **type**: bar type

void **lv\_bar\_set\_anim\_time**(*lv\_obj\_t* \*bar, uint16\_t anim\_time)  
Set the animation time of the bar

**Parameters**

- **bar**: pointer to a bar object
- **anim\_time**: the animation time in milliseconds.

int16\_t **lv\_bar\_get\_value**(const *lv\_obj\_t* \*bar)  
Get the value of a bar

**Return** the value of the bar

**Parameters**

- **bar**: pointer to a bar object

int16\_t **lv\_bar\_get\_start\_value**(const *lv\_obj\_t* \*bar)  
Get the start value of a bar

**Return** the start value of the bar

**Parameters**

- **bar**: pointer to a bar object

int16\_t **lv\_bar\_get\_min\_value**(const *lv\_obj\_t* \*bar)  
Get the minimum value of a bar

**Return** the minimum value of the bar

**Parameters**

- **bar**: pointer to a bar object

int16\_t **lv\_bar\_get\_max\_value**(const *lv\_obj\_t* \*bar)  
Get the maximum value of a bar

**Return** the maximum value of the bar

**Parameters**

- **bar**: pointer to a bar object

*lv\_bar\_type\_t* **lv\_bar\_get\_type**(*lv\_obj\_t* \*bar)  
Get the type of bar.

**Return** bar type

**Parameters**

- **bar**: pointer to bar object



```
uint16_t lv_bar_get_anim_time(const lv_obj_t *bar)
```

Get the animation time of the bar

**Return** the animation time in milliseconds.

**Parameters**

- **bar**: pointer to a bar object

```
struct lv_bar_anim_t
```

**Public Members**

```
lv_obj_t *bar
```

```
lv_anim_value_t anim_start
```

```
lv_anim_value_t anim_end
```

```
lv_anim_value_t anim_state
```

```
struct lv_bar_ext_t
```

```
#include <lv_bar.h> Data of bar
```

**Public Members**

```
int16_t cur_value
```

```
int16_t min_value
```

```
int16_t max_value
```

```
int16_t start_value
```

```
lv_area_t indic_area
```

```
lv_anim_value_t anim_time
```

```
lv_bar_anim_t cur_value_anim
```

```
lv_bar_anim_t start_value_anim
```

```
uint8_t type
```

```
lv_style_list_t style_indic
```

## Button (lv\_btn)

### Overview

Buttons are simple rectangle-like objects. They are derived from *Containers* so *layout* and *fit* are also available. Besides, it can be enabled to automatically go to checked state on click.

### Parts and Styles

The buttons has only a main style called LV\_BTN\_PART\_MAIN and it can use all the properties from the following groups:

- background

- border
- outline
- shadow
- value
- pattern
- transitions

It also uses the *padding* properties when *layout* or *fit* is enabled.

## Usage

### States

To make buttons usage simpler the button's state can be get with `lv_btn_get_state(btn)`. It returns one of the following values:

- `LV_BTN_STATE_RELEASED`
- `LV_BTN_STATE_PRESSED`
- `LV_BTN_STATE_CHECKED_RELEASED`
- `LV_BTN_STATE_CHECKED_PRESSED`
- `LV_BTN_STATE_DISABLED`

With `lv_btn_get_state(btn, LV_BTN_STATE_...)` the buttons state can be changed manually.

If a more precise description of the state is required (e.g. focused) the general `lv_obj_get_state(btn)` can be used.

### Checkable

You can configure the buttons as *toggle button* with `lv_btn_set_checkable(btn, true)`. In this case, on click, the button goes to `LV_STATE_CHECKED` state automatically, or back when clicked again.

### Layout and Fit

Similarly to *Containers*, buttons also have layout and fit attributes.

- `lv_btn_set_layout(btn, LV_LAYOUT_...)` set a layout. The default is `LV_LAYOUT_CENTER`. So, if you add a label, then it will be automatically aligned to the middle and can't be moved with `lv_obj_set_pos()`. You can disable the layout with `lv_btn_set_layout(btn, LV_LAYOUT_OFF)`.
- `lv_btn_set_fit/fit2/fit4(btn, LV_FIT_...)` enables to set the button width and/or height automatically according to the children, parent, and fit type.

## Events

Besides the [Generic events](#) the following [Special events](#) are sent by the buttons:

- **LV\_EVENT\_VALUE\_CHANGED** - sent when the button is toggled.

Learn more about [Events](#).

## Keys

The following *Keys* are processed by the Buttons:

- **LV\_KEY\_RIGHT/UP** - Go to toggled state if toggling is enabled.
- **LV\_KEY\_LEFT/DOWN** - Go to non-toggled state if toggling is enabled.


Note that, the state of **LV\_KEY\_ENTER** is translated to **LV\_EVENT\_PRESSED/PRESSING/RELEASED** etc.

Learn more about [Keys](#).

## Example

### C

#### Simple Buttons

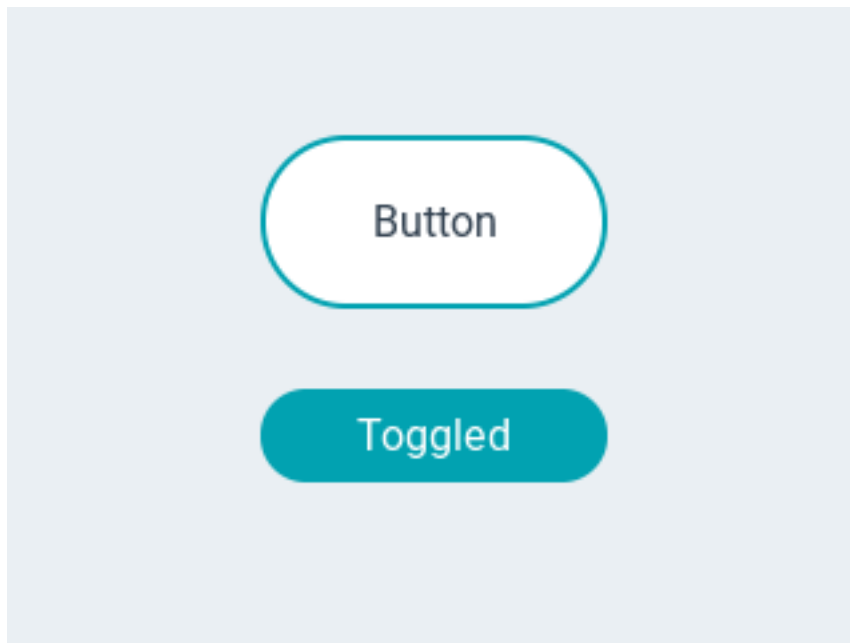

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_BTN

static void event_handler(lv_obj_t * obj, lv_event_t event)
```

(continues on next page)

(continued from previous page)

```
{
    if(event == LV_EVENT_CLICKED) {
        printf("Clicked\n");
    }
    else if(event == LV_EVENT_VALUE_CHANGED) {
        printf("Toggled\n");
    }
}


void lv_ex_btn_1(void)
{
    lv_obj_t * label;

    lv_obj_t * btn1 = lv_btn_create(lv_scr_act(), NULL);
    lv_obj_set_event_cb(btn1, event_handler);
    lv_obj_align(btn1, NULL, LV_ALIGN_CENTER, 0, -40);

    label = lv_label_create(btn1, NULL);
    lv_label_set_text(label, "Button");

    lv_obj_t * btn2 = lv_btn_create(lv_scr_act(), NULL);
    lv_obj_set_event_cb(btn2, event_handler);
    lv_obj_align(btn2, NULL, LV_ALIGN_CENTER, 0, 40);
    lv_btn_set_checkable(btn2, true);
    lv_btn_toggle(btn2);
    lv_btn_set_fit2(btn2, LV_FIT_NONE, LV_FIT_TIGHT);

    label = lv_label_create(btn2, NULL);
    lv_label_set_text(label, "Toggled");
}
#endif
```

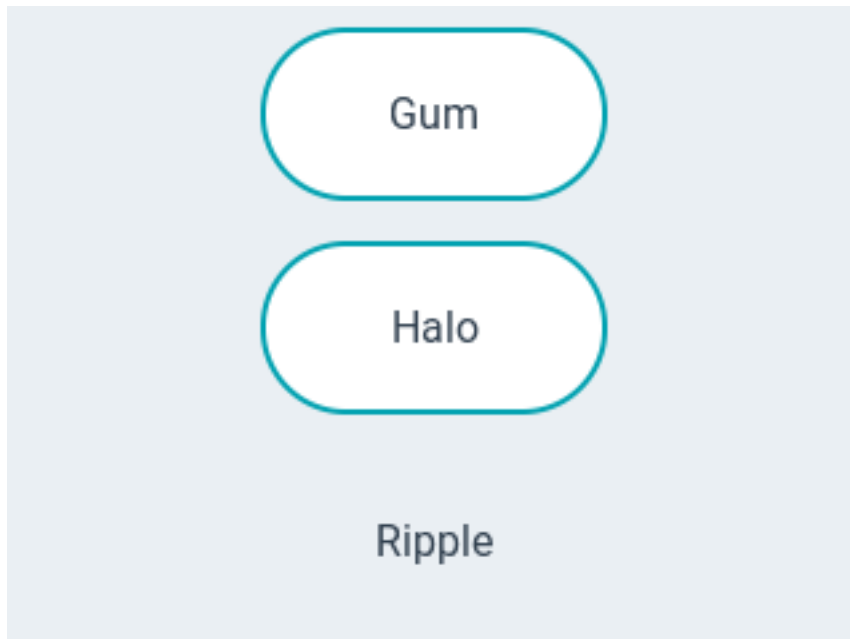

code

```

#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_BTN

/**
 * Advanced button transition examples
 */
void lv_ex_btn_2(void)
{
    /*Gum-like button*/
    static lv_style_t style_gum;
    lv_style_init(&style_gum);
    lv_style_set_transform_width(&style_gum, LV_STATE_PRESSED, 10);
    lv_style_set_transform_height(&style_gum, LV_STATE_PRESSED, -10);
    lv_style_set_value_letter_space(&style_gum, LV_STATE_PRESSED, 5);
    lv_style_set_transition_path(&style_gum, LV_STATE_DEFAULT, lv_anim_path_
↪overshoot);
    lv_style_set_transition_path(&style_gum, LV_STATE_PRESSED, lv_anim_path_ease_in_
↪out);
    lv_style_set_transition_time(&style_gum, LV_STATE_DEFAULT, 250);
    lv_style_set_transition_delay(&style_gum, LV_STATE_DEFAULT, 100);
    lv_style_set_transition_prop_1(&style_gum, LV_STATE_DEFAULT, LV_STYLE_TRANSFORM_
↪WIDTH);
    lv_style_set_transition_prop_2(&style_gum, LV_STATE_DEFAULT, LV_STYLE_TRANSFORM_
↪HEIGHT);
    lv_style_set_transition_prop_3(&style_gum, LV_STATE_DEFAULT, LV_STYLE_VALUE_
↪LETTER_SPACE);

    lv_obj_t * btn1 = lv_btn_create(lv_scr_act(), NULL);
    lv_obj_align(btn1, NULL, LV_ALIGN_CENTER, 0, -80);
    lv_obj_add_style(btn1, LV_BTN_PART_MAIN, &style_gum);

    /*Instead of creating a label add a values string*/
    lv_obj_set_style_local_value_str(btn1, LV_BTN_PART_MAIN, LV_STATE_DEFAULT, "Gum");

    /*Halo on press*/
    static lv_style_t style_halo;
    lv_style_init(&style_halo);
    lv_style_set_transition_time(&style_halo, LV_STATE_PRESSED, 400);
    lv_style_set_transition_time(&style_halo, LV_STATE_DEFAULT, 0);
    lv_style_set_transition_delay(&style_halo, LV_STATE_DEFAULT, 200);
    lv_style_set_outline_width(&style_halo, LV_STATE_DEFAULT, 0);
    lv_style_set_outline_width(&style_halo, LV_STATE_PRESSED, 20);
    lv_style_set_outline_opa(&style_halo, LV_STATE_DEFAULT, LV_OPA_COVER);
    lv_style_set_outline_opa(&style_halo, LV_STATE_FOCUSED, LV_OPA_COVER); /*Just_
↪to be sure, the theme might use it*/
    lv_style_set_outline_opa(&style_halo, LV_STATE_PRESSED, LV_OPA_TRANSP);
    lv_style_set_transition_prop_1(&style_halo, LV_STATE_DEFAULT, LV_STYLE_OUTLINE_
↪OPA);
    lv_style_set_transition_prop_2(&style_halo, LV_STATE_DEFAULT, LV_STYLE_OUTLINE_
↪WIDTH);

    lv_obj_t * btn2 = lv_btn_create(lv_scr_act(), NULL);
    lv_obj_align(btn2, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_add_style(btn2, LV_BTN_PART_MAIN, &style_halo);
    lv_obj_set_style_local_value_str(btn2, LV_BTN_PART_MAIN, LV_STATE_DEFAULT, "Halo
↪");
}

```

(continues on next page)

(continued from previous page)

```

/*Ripple on press*/
static lv_style_t style_ripple;
lv_style_init(&style_ripple);
lv_style_set_transition_time(&style_ripple, LV_STATE_PRESSED, 300);
lv_style_set_transition_time(&style_ripple, LV_STATE_DEFAULT, 0);
lv_style_set_transition_delay(&style_ripple, LV_STATE_DEFAULT, 300);
lv_style_set_bg_opa(&style_ripple, LV_STATE_DEFAULT, 0);
lv_style_set_bg_opa(&style_ripple, LV_STATE_PRESSED, LV_OPA_80);
lv_style_set_border_width(&style_ripple, LV_STATE_DEFAULT, 0);
lv_style_set_outline_width(&style_ripple, LV_STATE_DEFAULT, 0);
lv_style_set_transform_width(&style_ripple, LV_STATE_DEFAULT, -20);
lv_style_set_transform_height(&style_ripple, LV_STATE_DEFAULT, -20);
lv_style_set_transform_width(&style_ripple, LV_STATE_PRESSED, 0);
lv_style_set_transform_height(&style_ripple, LV_STATE_PRESSED, 0);

lv_style_set_transition_path(&style_ripple, LV_STATE_DEFAULT, lv_anim_path_ease_
↪out);
lv_style_set_transition_prop_1(&style_ripple, LV_STATE_DEFAULT, LV_STYLE_BG_OPA);
lv_style_set_transition_prop_2(&style_ripple, LV_STATE_DEFAULT, LV_STYLE_
↪TRANSFORM_WIDTH);
lv_style_set_transition_prop_3(&style_ripple, LV_STATE_DEFAULT, LV_STYLE_
↪TRANSFORM_HEIGHT);

lv_obj_t * btn3 = lv_btn_create(lv_scr_act(), NULL);
lv_obj_align(btn3, NULL, LV_ALIGN_CENTER, 0, 80);
lv_obj_add_style(btn3, LV_BTN_PART_MAIN, &style_ripple);
lv_obj_set_style_local_value_str(btn3, LV_BTN_PART_MAIN, LV_STATE_DEFAULT, "Ripple
↪");
}
#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_btn_state_t
```

```
typedef uint8_t lv_btn_part_t
```

### Enums

```
enum [anonymous]
```

Possible states of a button. It can be used not only by buttons but other button-like objects too

*Values:*

```
LV_BTN_STATE_RELEASED
```

```
LV_BTN_STATE_PRESSED
```

**LV\_BTN\_STATE\_CHECKED\_RELEASED**

**LV\_BTN\_STATE\_CHECKED\_PRESSED**

**LV\_BTN\_STATE\_DISABLED**

**\_LV\_BTN\_STATE\_LAST**

**enum** [anonymous]

Styles

*Values:*

**LV\_BTN\_PART\_MAIN** = *LV\_OBJ\_PART\_MAIN*

**\_LV\_BTN\_PART\_VIRTUAL\_LAST**

**\_LV\_BTN\_PART\_REAL\_LAST** = *\_LV\_OBJ\_PART\_REAL\_LAST*

## Functions

*lv\_obj\_t* \***lv\_btn\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)

Create a button object

**Return** pointer to the created button

**Parameters**

- **par**: pointer to an object, it will be the parent of the new button
- **copy**: pointer to a button object, if not NULL then the new object will be copied from it

void **lv\_btn\_set\_checkable**(*lv\_obj\_t* \*btn, **bool** tgl)

Enable the toggled states. On release the button will change from/to toggled state.

**Parameters**

- **btn**: pointer to a button object
- **tgl**: true: enable toggled states, false: disable

void **lv\_btn\_set\_state**(*lv\_obj\_t* \*btn, *lv\_btn\_state\_t* state)

Set the state of the button

**Parameters**

- **btn**: pointer to a button object
- **state**: the new state of the button (from *lv\_btn\_state\_t* enum)

void **lv\_btn\_toggle**(*lv\_obj\_t* \*btn)

Toggle the state of the button (ON->OFF, OFF->ON)

**Parameters**

- **btn**: pointer to a button object

**static** void **lv\_btn\_set\_layout**(*lv\_obj\_t* \*btn, *lv\_layout\_t* layout)

Set the layout on a button

**Parameters**

- **btn**: pointer to a button object
- **layout**: a layout from 'lv\_cont\_layout\_t'

**static void lv\_btn\_set\_fit4**(*lv\_obj\_t \*btn, lv\_fit\_t left, lv\_fit\_t right, lv\_fit\_t top, lv\_fit\_t bottom*)

Set the fit policy in all 4 directions separately. It tells how to change the button size automatically.

**Parameters**

- **btn**: pointer to a button object
- **left**: left fit policy from `lv_fit_t`
- **right**: right fit policy from `lv_fit_t`
- **top**: top fit policy from `lv_fit_t`
- **bottom**: bottom fit policy from `lv_fit_t`

**static void lv\_btn\_set\_fit2**(*lv\_obj\_t \*btn, lv\_fit\_t hor, lv\_fit\_t ver*)

Set the fit policy horizontally and vertically separately. It tells how to change the button size automatically.

**Parameters**

- **btn**: pointer to a button object
- **hor**: horizontal fit policy from `lv_fit_t`
- **ver**: vertical fit policy from `lv_fit_t`

**static void lv\_btn\_set\_fit**(*lv\_obj\_t \*btn, lv\_fit\_t fit*)

Set the fit policy in all 4 direction at once. It tells how to change the button size automatically.

**Parameters**

- **btn**: pointer to a button object
- **fit**: fit policy from `lv_fit_t`

*lv\_btn\_state\_t* **lv\_btn\_get\_state**(*const lv\_obj\_t \*btn*)

Get the current state of the button

**Return** the state of the button (from `lv_btn_state_t` enum)

**Parameters**

- **btn**: pointer to a button object

bool **lv\_btn\_get\_checkable**(*const lv\_obj\_t \*btn*)

Get the toggle enable attribute of the button

**Return** true: checkable enabled, false: disabled

**Parameters**

- **btn**: pointer to a button object

*lv\_layout\_t* **lv\_btn\_get\_layout**(*const lv\_obj\_t \*btn*)

Get the layout of a button

**Return** the layout from 'lv\_cont\_layout\_t'

**Parameters**

- **btn**: pointer to button object

*lv\_fit\_t* **lv\_btn\_get\_fit\_left**(*const lv\_obj\_t \*btn*)

Get the left fit mode

**Return** an element of `lv_fit_t`



#### Parameters

- **btn**: pointer to a button object

**static** *lv\_fit\_t* **lv\_btn\_get\_fit\_right**(const *lv\_obj\_t* \*btn)

Get the right fit mode

**Return** an element of *lv\_fit\_t*

#### Parameters

- **btn**: pointer to a button object

**static** *lv\_fit\_t* **lv\_btn\_get\_fit\_top**(const *lv\_obj\_t* \*btn)

Get the top fit mode

**Return** an element of *lv\_fit\_t*

#### Parameters

- **btn**: pointer to a button object

**static** *lv\_fit\_t* **lv\_btn\_get\_fit\_bottom**(const *lv\_obj\_t* \*btn)

Get the bottom fit mode

**Return** an element of *lv\_fit\_t*

#### Parameters

- **btn**: pointer to a button object

**struct** *lv\_btn\_ext\_t*

*#include <lv\_btn.h>* Extended data of button

#### Public Members

*lv\_cont\_ext\_t* **cont**

Ext. of ancestor

uint8\_t **checkable**

1: Toggle enabled

### Button matrix (*lv\_btnmatrix*)

#### Overview

The Button Matrix objects can display **multiple buttons** in rows and columns.

The main reasons for wanting to use a button matrix instead of a container and individual button objects are:

- The button matrix is simpler to use for grid-based button layouts.
- The button matrix consumes a lot less memory per button.

#### Parts and Styles

The Button matrix's main part is called **LV\_BTNMATRIX\_PART\_BG**. It draws a background using the typical background style properties.

**LV\_BTNMATRIX\_PART\_BTN** is virtual part and it refers to the buttons on the button matrix. It also uses all the typical background properties.

The top/bottom/left/right padding values from the background are used to keep some space on the sides. Inner padding is applied between the buttons.

## Usage

### Button' s text

There is a text on each button. To specify them a descriptor string array, called *map*, needs to be used. The map can be set with `lv_btnmatrix_set_map(btnm, my_map)`. The declaration of a map should look like `const char * map[] = {"btn1", "btn2", "btn3", ""}`. Note that **the last element has to be an empty string!**

Use `"\n"` in the map to make **line break**. E.g. `{"btn1", "btn2", "\n", "btn3", ""}`. Each line' s buttons have their width calculated automatically.

### Control buttons

The **buttons width** can be set relative to the other button in the same line with `lv_btnmatrix_set_btn_width(btnm, btn_id, width)` E.g. in a line with two buttons: *btnA*, *width = 1* and *btnB*, *width = 2*, *btnA* will have 33 % width and *btnB* will have 66 % width. It' s similar to how the **flex-grow** property works in CSS.

In addition to width, each button can be customized with the following parameters:

- **LV\_BTNMATRIX\_CTRL\_HIDDEN** - make a button hidden (hidden buttons still take up space in the layout, they are just not visible or clickable)
- **LV\_BTNMATRIX\_CTRL\_NO\_REPEAT** - disable repeating when the button is long pressed
- **LV\_BTNMATRIX\_CTRL\_DISABLED** - make a button disabled
- **LV\_BTNMATRIX\_CTRL\_CHECKABLE** - enable toggling of a button
- **LV\_BTNMATRIX\_CTRL\_CHECK\_STATE** - set the toggle state
- **LV\_BTNMATRIX\_CTRL\_CLICK\_TRIG** - if 0, the button will react on press, if 1, will react on release

The set or clear a button' s control attribute, use `lv_btnmatrix_set_btn_ctrl(btnm, btn_id, LV_BTNM_CTRL_...)` and `lv_btnmatrix_clear_btn_ctrl(btnm, btn_id, LV_BTNM_CTRL_...)` respectively. More **LV\_BTNM\_CTRL\_...** values can be *Ored*

The set/clear the same control attribute for all buttons of a button matrix, use `lv_btnmatrix_set_btn_ctrl_all(btnm, btn_id, LV_BTNM_CTRL_...)` and `lv_btnmatrix_clear_btn_ctrl_all(btnm, btn_id, LV_BTNM_CTRL_...)`.

The set a control map for a button matrix (similarly to the map for the text), use `lv_btnmatrix_set_ctrl_map(btnm, ctrl_map)`. An element of *ctrl\_map* should look like `ctrl_map[0] = width | LV_BTNM_CTRL_NO_REPEAT | LV_BTNM_CTRL_TGL_ENABLE`. The number of elements should be equal to the number of buttons (excluding newlines characters).

## One check

The “One check” feature can be enabled with `lv_btnmatrix_set_one_check(btnm, true)` to allow only one button to be checked (toggled) at once.

## Recolor

The **texts** on the button can be **recolor**ed similarly to the recolor feature for [Label](#) object. To enable it, use `lv_btnmatrix_set_recolor(btnm, true)`. After that a button with `#FF0000 Red#` text will be red.

## Notes

The Button matrix object is very light weighted because the buttons are not created just virtually drawn on the fly. This way, 1 button use only 8 extra bytes instead of the ~100-150 byte size of a normal [Button](#) object (plus the size of its container and a label for each button).

The disadvantage of this setup is that the ability to style individual buttons to be different from others is limited (aside from the toggling feature). If you require that ability, using individual buttons is very likely to be a better approach.

## Events

Besides the [Generic events](#), the following [Special events](#) are sent by the button matrices:

- **LV\_EVENT\_VALUE\_CHANGED** - sent when the button is pressed/released or repeated after long press. The event data is set to the ID of the pressed/released button.

Learn more about [Events](#).

## Keys

The following *Keys* are processed by the Buttons:

- **LV\_KEY\_RIGHT/UP/LEFT/RIGHT** - To navigate among the buttons to select one
- **LV\_KEY\_ENTER** - To press/release the selected button

Learn more about [Keys](#).

## Example

### C

## Simple Button matrix



code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_BTNMATRIX

static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        const char * txt = lv_btnmatrix_get_active_btn_text(obj);

        printf("%s was pressed\n", txt);
    }
}

static const char * btnm_map[] = {"1", "2", "3", "4", "5", "\n",
                                   "6", "7", "8", "9", "0", "\n",
                                   "Action1", "Action2", ""};

void lv_ex_btnmatrix_1(void)
{
    lv_obj_t * btnm1 = lv_btnmatrix_create(lv_scr_act(), NULL);
    lv_btnmatrix_set_map(btnm1, btnm_map);
    lv_btnmatrix_set_btn_width(btnm1, 10, 2);           /*Make "Action1" twice as wide_
↪as "Action2"*/
    lv_btnmatrix_set_btn_ctrl(btnm1, 10, LV_BTNMATRIX_CTRL_CHECKABLE);
    lv_btnmatrix_set_btn_ctrl(btnm1, 11, LV_BTNMATRIX_CTRL_CHECK_STATE);
    lv_obj_align(btnm1, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_set_event_cb(btnm1, event_handler);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint16_t lv_btnmatrix_ctrl_t
```

```
typedef uint8_t lv_btnmatrix_part_t
```

### Enums

```
enum [anonymous]
```

Type to store button control bits (disabled, hidden etc.) The first 3 bits are used to store the width

*Values:*

```
LV_BTNMATRIX_CTRL_HIDDEN = 0x0008
```

Button hidden

```
LV_BTNMATRIX_CTRL_NO_REPEAT = 0x0010
```

Do not repeat press this button.

```
LV_BTNMATRIX_CTRL_DISABLED = 0x0020
```

Disable this button.

```
LV_BTNMATRIX_CTRL_CHECKABLE = 0x0040
```

Button *can* be toggled.

```
LV_BTNMATRIX_CTRL_CHECK_STATE = 0x0080
```

Button is currently toggled (e.g. checked).

```
LV_BTNMATRIX_CTRL_CLICK_TRIG = 0x0100
```

1: Send LV\_EVENT\_SELECTED on CLICK, 0: Send LV\_EVENT\_SELECTED on PRESS

```
enum [anonymous]
```

*Values:*

```
LV_BTNMATRIX_PART_BG
```

```
LV_BTNMATRIX_PART_BTN
```

### Functions

```
LV_EXPORT_CONST_INT(LV_BTNMATRIX_BTN_NONE)
```

```
lv_obj_t *lv_btnmatrix_create(lv_obj_t *par, const lv_obj_t *copy)
```

Create a button matrix objects

**Return** pointer to the created button matrix

**Parameters**

- **par**: pointer to an object, it will be the parent of the new button matrix
- **copy**: pointer to a button matrix object, if not NULL then the new object will be copied from it

void **lv\_btnmatrix\_set\_map**(*lv\_obj\_t* \*btnm, const char \*map[])

Set a new map. Buttons will be created/deleted according to the map. The button matrix keeps a reference to the map and so the string array must not be deallocated during the life of the matrix.

#### Parameters

- **btnm**: pointer to a button matrix object
- **map**: pointer a string array. The last string has to be: "" . Use "\n" to make a line break.

void **lv\_btnmatrix\_set\_ctrl\_map**(*lv\_obj\_t* \*btnm, const *lv\_btnmatrix\_ctrl\_t* ctrl\_map[])

Set the button control map (hidden, disabled etc.) for a button matrix. The control map array will be copied and so may be deallocated after this function returns.

#### Parameters

- **btnm**: pointer to a button matrix object
- **ctrl\_map**: pointer to an array of *lv\_btn\_ctrl\_t* control bytes. The length of the array and position of the elements must match the number and order of the individual buttons (i.e. excludes newline entries). An element of the map should look like e.g.: `ctrl_map[0] = width | LV_BTNMATRIX_CTRL_NO_REPEAT | LV_BTNMATRIX_CTRL_TGL_ENABLE`

void **lv\_btnmatrix\_set\_focused\_btn**(*lv\_obj\_t* \*btnm, uint16\_t id)

Set the focused button i.e. visually highlight it.

#### Parameters

- **btnm**: pointer to button matrix object
- **id**: index of the button to focus(LV\_BTNMATRIX\_BTN\_NONE to remove focus)

void **lv\_btnmatrix\_set\_style**(*lv\_obj\_t* \*btnm, *lv\_btnmatrix\_part\_t* type, const *lv\_style\_t* \*style)

Set a style of a button matrix

#### Parameters

- **btnm**: pointer to a button matrix object
- **type**: which style should be set
- **style**: pointer to a style

void **lv\_btnmatrix\_set\_recolor**(const *lv\_obj\_t* \*btnm, bool en)

Enable recoloring of button' s texts

#### Parameters

- **btnm**: pointer to button matrix object
- **en**: true: enable recoloring; false: disable

void **lv\_btnmatrix\_set\_btn\_ctrl**(const *lv\_obj\_t* \*btnm, uint16\_t btn\_id, *lv\_btnmatrix\_ctrl\_t* ctrl)

Set the attributes of a button of the button matrix

#### Parameters

- **btnm**: pointer to button matrix object
- **btn\_id**: 0 based index of the button to modify. (Not counting new lines)

void **lv\_btnmatrix\_clear\_btn\_ctrl**(const *lv\_obj\_t* \*btnm, uint16\_t btn\_id, *lv\_btnmatrix\_ctrl\_t* ctrl)

Clear the attributes of a button of the button matrix

#### Parameters

- **btnm**: pointer to button matrix object
- **btn\_id**: 0 based index of the button to modify. (Not counting new lines)

void **lv\_btnmatrix\_set\_btn\_ctrl\_all**(*lv\_obj\_t* \***btnm**, *lv\_btnmatrix\_ctrl\_t* **ctrl**)

Set the attributes of all buttons of a button matrix

#### Parameters

- **btnm**: pointer to a button matrix object
- **ctrl**: attribute(s) to set from **lv\_btnmatrix\_ctrl\_t**. Values can be ORed.

void **lv\_btnmatrix\_clear\_btn\_ctrl\_all**(*lv\_obj\_t* \***btnm**, *lv\_btnmatrix\_ctrl\_t* **ctrl**)

Clear the attributes of all buttons of a button matrix

#### Parameters

- **btnm**: pointer to a button matrix object
- **ctrl**: attribute(s) to set from **lv\_btnmatrix\_ctrl\_t**. Values can be ORed.
- **en**: true: set the attributes; false: clear the attributes

void **lv\_btnmatrix\_set\_btn\_width**(*lv\_obj\_t* \***btnm**, *uint16\_t* **btn\_id**, *uint8\_t* **width**)

Set a single buttons relative width. This method will cause the matrix be regenerated and is a relatively expensive operation. It is recommended that initial width be specified using **lv\_btnmatrix\_set\_ctrl\_map** and this method only be used for dynamic changes.

#### Parameters

- **btnm**: pointer to button matrix object
- **btn\_id**: 0 based index of the button to modify.
- **width**: Relative width compared to the buttons in the same row. [1..7]

void **lv\_btnmatrix\_set\_one\_check**(*lv\_obj\_t* \***btnm**, bool **one\_chk**)

Make the button matrix like a selector widget (only one button may be toggled at a time). **Checkable** must be enabled on the buttons you want to be selected with **lv\_btnmatrix\_set\_ctrl** or **lv\_btnmatrix\_set\_btn\_ctrl\_all**.

#### Parameters

- **btnm**: Button matrix object
- **one\_chk**: Whether “one check” mode is enabled

const char \*\***lv\_btnmatrix\_get\_map\_array**(const *lv\_obj\_t* \***btnm**)

Get the current map of a button matrix

**Return** the current map

#### Parameters

- **btnm**: pointer to a button matrix object

bool **lv\_btnmatrix\_get\_recolor**(const *lv\_obj\_t* \***btnm**)

Check whether the button’ s text can use recolor or not

**Return** true: text recolor enable; false: disabled

#### Parameters

- **btnm**: pointer to button matrix object

uint16\_t **lv\_btnmatrix\_get\_active\_btn**(const lv\_obj\_t \*btnm)

Get the index of the lastly “activated” button by the user (pressed, released etc) Useful in the the event\_cb to get the text of the button, check if hidden etc.

**Return** index of the last released button (LV\_BTNMATRIX\_BTN\_NONE: if unset)

**Parameters**

- btnm: pointer to button matrix object

const char \***lv\_btnmatrix\_get\_active\_btn\_text**(const lv\_obj\_t \*btnm)

Get the text of the lastly “activated” button by the user (pressed, released etc) Useful in the the event\_cb

**Return** text of the last released button (NULL: if unset)

**Parameters**

- btnm: pointer to button matrix object

uint16\_t **lv\_btnmatrix\_get\_focused\_btn**(const lv\_obj\_t \*btnm)

Get the focused button’ s index.

**Return** index of the focused button (LV\_BTNMATRIX\_BTN\_NONE: if unset)

**Parameters**

- btnm: pointer to button matrix object

const char \***lv\_btnmatrix\_get\_btn\_text**(const lv\_obj\_t \*btnm, uint16\_t btn\_id)

Get the button’ s text

**Return** text of btn\_index’ button

**Parameters**

- btnm: pointer to button matrix object
- btn\_id: the index a button not counting new line characters. (The return value of lv\_btnmatrix\_get\_pressed/released)

bool **lv\_btnmatrix\_get\_btn\_ctrl**(lv\_obj\_t \*btnm, uint16\_t btn\_id, lv\_btnmatrix\_ctrl\_t ctrl)

Get the whether a control value is enabled or disabled for button of a button matrix

**Return** true: long press repeat is disabled; false: long press repeat enabled

**Parameters**

- btnm: pointer to a button matrix object
- btn\_id: the index a button not counting new line characters. (E.g. the return value of lv\_btnmatrix\_get\_pressed/released)
- ctrl: control values to check (ORed value can be used)

bool **lv\_btnmatrix\_get\_one\_check**(const lv\_obj\_t \*btnm)

Find whether “one toggle” mode is enabled.

**Return** whether “one toggle” mode is enabled

**Parameters**

- btnm: Button matrix object

**struct lv\_btnmatrix\_ext\_t**



## Public Members

```

const char **map_p
lv_area_t *button_areas
lv_btnmatrix_ctrl_t *ctrl_bits
lv_style_list_t style_btn
uint16_t btn_cnt
uint16_t btn_id_pr
uint16_t btn_id_focused
uint16_t btn_id_act
uint8_t recolor
uint8_t one_check

```

## Calendar (lv\_calendar)

### Overview

The Calendar object is a classic calendar which can:

- highlight the current day
- highlight any user-defined dates
- display the name of the days
- go the next/previous month by button click
- highlight the clicked day

### Parts and Styles

The calendar's main part is called `LV_CALENDAR_PART_BG`. It draws a background using the typical background style properties.

Besides the following virtual parts exist:

- `LV_CALENDAR_PART_HEADER` The upper area where the current year and month's name is shown. It also has buttons to move the next/previous month. It uses typical background properties and padding to keep some distance from the background (top, left, right) and the day names (bottom).
- `LV_CALENDAR_PART_DAY_NAMES` Shows the name of the days below the header. It uses the *text* style properties padding to keep some distance from the background (left, right), header (top) and dates (bottom).
- `LV_CALENDAR_PART_DATES` Show the date numbers from 1..28/29/30/31 (depending on current month). Different "state" of the states are drawn according to the states defined in this part:
  - normal dates: drawn with `LV_STATE_DEFAULT` style
  - pressed date: drawn with `LV_STATE_PRESSED` style
  - today: drawn with `LV_STATE_FOCUSED` style
  - highlighted dates: drawn with `LV_STATE_CHECKED` style

## Usage

### Overview

To set and get dates in the calendar, the `lv_calendar_date_t` type is used which is a structure with `year`, `month` and `day` fields.

### Current date

To set the current date (today), use the `lv_calendar_set_today_date(calendar, &today_date)` function.

### Shown date

To set the shown date, use `lv_calendar_set_shown_date(calendar, &shown_date);`

### Highlighted days

The list of highlighted dates should be stored in a `lv_calendar_date_t` array loaded by `lv_calendar_set_highlighted_dates(calendar, &highlighted_dates)`. Only the array's pointer will be saved so the array should be a static or global variable.

### Name of the days

The name of the days can be adjusted with `lv_calendar_set_day_names(calendar, day_names)` where `day_names` looks like `const char * day_names[7] = {"Su", "Mo", ...};`

### Name of the months

Similarly to `day_names`, the name of the month can be set with `lv_calendar_set_month_names(calendar, month_names_array)`.

### Events

Besides the [Generic events](#), the following [Special events](#) are sent by the calendars: **LV\_EVENT\_VALUE\_CHANGED** is sent when the current month has changed.

In *Input device related* events, `lv_calendar_get_pressed_date(calendar)` tells which day is currently being pressed or return `NULL` if no date is pressed.

### Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Calendar with day select

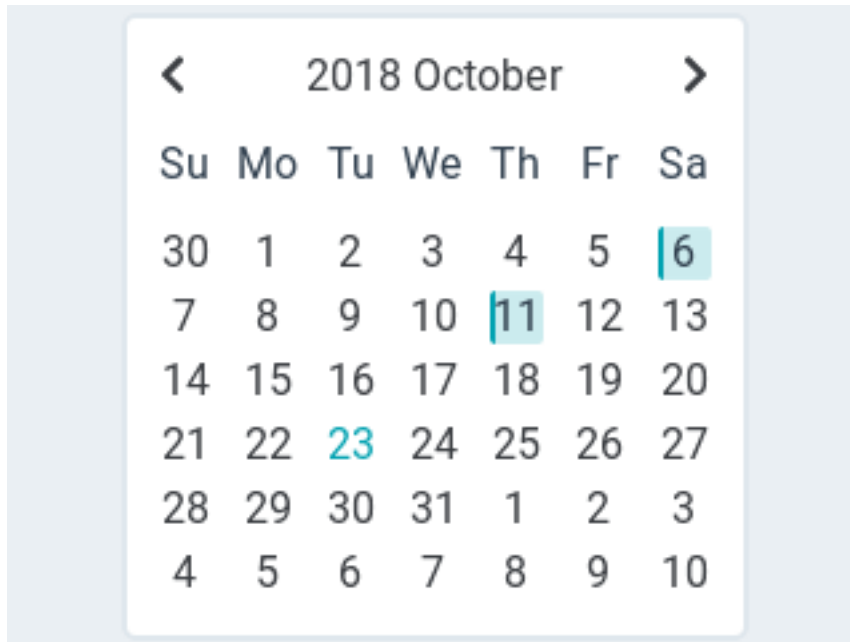

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>

#if LV_USE_CALEDNDAR

static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        lv_calendar_date_t * date = lv_calendar_get_pressed_date(obj);
        if(date) {
            printf("Clicked date: %02d.%02d.%d\n", date->day, date->month, date->
↪year);
        }
    }
}

void lv_ex_calendar_1(void)
{
    lv_obj_t * calendar = lv_calendar_create(lv_scr_act(), NULL);
    lv_obj_set_size(calendar, 235, 235);
    lv_obj_align(calendar, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_set_event_cb(calendar, event_handler);

    /*Set the today*/
    lv_calendar_date_t today;
```

(continues on next page)

(continued from previous page)

```

today.year = 2018;
today.month = 10;
today.day = 23;

lv_calendar_set_today_date(calendar, &today);
lv_calendar_set_showed_date(calendar, &today);

/*Highlight some days*/
static lv_calendar_date_t highlighted_days[3];          /*Only it's pointer will be saved so should be static*/
highlighted_days[0].year = 2018;
highlighted_days[0].month = 10;
highlighted_days[0].day = 6;

highlighted_days[1].year = 2018;
highlighted_days[1].month = 10;
highlighted_days[1].day = 11;

highlighted_days[2].year = 2018;
highlighted_days[2].month = 11;
highlighted_days[2].day = 22;

lv_calendar_set_highlighted_dates(calendar, highlighted_days, 3);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_calendar\_part\_t**

### Enums

**enum** [anonymous]  
Calendar parts

*Values:*

**LV\_CALENDAR\_PART\_BG**  
Background and “normal” date numbers style

**LV\_CALENDAR\_PART\_HEADER**

**LV\_CALENDAR\_PART\_DAY\_NAMES**  
Calendar header style

**LV\_CALENDAR\_PART\_DATE**  
Day name style

## Functions

*lv\_obj\_t* \***lv\_calendar\_create**(*lv\_obj\_t* \**par*, **const** *lv\_obj\_t* \**copy*)

Create a calendar objects

**Return** pointer to the created calendar

### Parameters

- **par**: pointer to an object, it will be the parent of the new calendar
- **copy**: pointer to a calendar object, if not NULL then the new object will be copied from it

void **lv\_calendar\_set\_today\_date**(*lv\_obj\_t* \**calendar*, *lv\_calendar\_date\_t* \**today*)

Set the today's date

### Parameters

- **calendar**: pointer to a calendar object
- **today**: pointer to an *lv\_calendar\_date\_t* variable containing the date of today. The value will be saved it can be local variable too.

void **lv\_calendar\_set\_showed\_date**(*lv\_obj\_t* \**calendar*, *lv\_calendar\_date\_t* \**showed*)

Set the currently showed

### Parameters

- **calendar**: pointer to a calendar object
- **showed**: pointer to an *lv\_calendar\_date\_t* variable containing the date to show. The value will be saved it can be local variable too.

void **lv\_calendar\_set\_highlighted\_dates**(*lv\_obj\_t* \**calendar*, *lv\_calendar\_date\_t* *highlighted*[], *uint16\_t* *date\_num*)

Set the the highlighted dates

### Parameters

- **calendar**: pointer to a calendar object
- **highlighted**: pointer to an *lv\_calendar\_date\_t* array containing the dates. ONLY A POINTER WILL BE SAVED! CAN' T BE LOCAL ARRAY.
- **date\_num**: number of dates in the array

void **lv\_calendar\_set\_day\_names**(*lv\_obj\_t* \**calendar*, **const** char \*\**day\_names*)

Set the name of the days

### Parameters

- **calendar**: pointer to a calendar object
- **day\_names**: pointer to an array with the names. E.g. **const** char \* *days*[7] = {"Sun", "Mon", ...} Only the pointer will be saved so this variable can' t be local which will be destroyed later.

void **lv\_calendar\_set\_month\_names**(*lv\_obj\_t* \**calendar*, **const** char \*\**month\_names*)

Set the name of the month

### Parameters

- **calendar**: pointer to a calendar object

- **month\_names**: pointer to an array with the names. E.g. `const char * days[12] = {"Jan", "Feb", ...}` Only the pointer will be saved so this variable can't be local which will be destroyed later.

*lv\_calendar\_date\_t* \***lv\_calendar\_get\_today\_date**(const *lv\_obj\_t* \*calendar)

Get the today's date

**Return** return pointer to an *lv\_calendar\_date\_t* variable containing the date of today.

**Parameters**

- **calendar**: pointer to a calendar object

*lv\_calendar\_date\_t* \***lv\_calendar\_get\_showed\_date**(const *lv\_obj\_t* \*calendar)

Get the currently showed

**Return** pointer to an *lv\_calendar\_date\_t* variable containing the date is being shown.

**Parameters**

- **calendar**: pointer to a calendar object

*lv\_calendar\_date\_t* \***lv\_calendar\_get\_pressed\_date**(const *lv\_obj\_t* \*calendar)

Get the the pressed date.

**Return** pointer to an *lv\_calendar\_date\_t* variable containing the pressed date. **NULL** if not date pressed (e.g. the header)

**Parameters**

- **calendar**: pointer to a calendar object

*lv\_calendar\_date\_t* \***lv\_calendar\_get\_highlighted\_dates**(const *lv\_obj\_t* \*calendar)

Get the the highlighted dates

**Return** pointer to an *lv\_calendar\_date\_t* array containing the dates.

**Parameters**

- **calendar**: pointer to a calendar object

uint16\_t **lv\_calendar\_get\_highlighted\_dates\_num**(const *lv\_obj\_t* \*calendar)

Get the number of the highlighted dates

**Return** number of highlighted days

**Parameters**

- **calendar**: pointer to a calendar object

const char \*\***lv\_calendar\_get\_day\_names**(const *lv\_obj\_t* \*calendar)

Get the name of the days

**Return** pointer to the array of day names

**Parameters**

- **calendar**: pointer to a calendar object

const char \*\***lv\_calendar\_get\_month\_names**(const *lv\_obj\_t* \*calendar)

Get the name of the month

**Return** pointer to the array of month names

**Parameters**

- **calendar**: pointer to a calendar object

## struct lv\_calendar\_date\_t

*#include <lv\_calendar.h>* Represents a date on the calendar object (platform-agnostic).

### Public Members

uint16\_t **year**

int8\_t **month**

int8\_t **day**

## struct lv\_calendar\_ext\_t

### Public Members

*lv\_calendar\_date\_t* **today**

*lv\_calendar\_date\_t* **showed\_date**

*lv\_calendar\_date\_t* \***highlighted\_dates**

int8\_t **btn\_pressing**

uint16\_t **highlighted\_dates\_num**

*lv\_calendar\_date\_t* **pressed\_date**

**const** char \*\***day\_names**

**const** char \*\***month\_names**

lv\_style\_list\_t **style\_header**

lv\_style\_list\_t **style\_day\_names**

lv\_style\_list\_t **style\_date\_nums**

## Canvas (lv\_canvas)

### Overview

A Canvas is like an *Image* where the user can draw anything. Rectangles, texts, images, lines arcs can be drawn here using lvgl's drawing engine. Besides some “effects” can be applied as well like rotation, zoom and blur.

### Parts and Styles

The Canvas has on one main part called LV\_CANVAS\_PART\_MAIN and only the *image\_recolor* property is used to give a color to LV\_IMG\_CF\_ALPHA\_1/2/4/8BIT images.

### Usage

### Buffer

The Canvas needs a buffer which stores the drawn image. To assign a buffer to a Canvas, use `lv_canvas_set_buffer(canvas, buffer, width, height, LV_IMG_CF_...)`. Where

`buffer` is a static buffer (not just a local variable) to hold the image of the canvas. For example, `static lv_color_t buffer[LV_CANVAS_BUF_SIZE_TRUE_COLOR(width, height)]`. `LV_CANVAS_BUF_SIZE_...` macros help to determine the size of the buffer with different color formats.

The canvas supports all the built-in color formats like `LV_IMG_CF_TRUE_COLOR` or `LV_IMG_CF_INDEXED_2BIT`. See the full list in the [Color formats](#) section.

## Palette

For `LV_IMG_CF_INDEXED_...` color formats, a palette needs to be initialized with `lv_canvas_set_palette(canvas, 3, LV_COLOR_RED)`. It sets pixels with *index*=3 to red.

## Drawing

To set a pixel on the canvas, use `lv_canvas_set_px(canvas, x, y, LV_COLOR_RED)`. With `LV_IMG_CF_INDEXED_...` or `LV_IMG_CF_ALPHA_...`, the index of the color or the alpha value needs to be passed as color. E.g. `lv_color_t c; c.full = 3;`

`lv_canvas_fill_bg(canvas, LV_COLOR_BLUE, LV_OPA_50)` fills the whole canvas to blue with 50% opacity. Note that, if the current color format doesn't support colors (e.g. `LV_IMG_CF_ALPHA_2BIT`) the color will be ignored. Similarly, if opacity is not supported (e.g. `LV_IMG_CF_TRUE_COLOR`) it will be ignored.

An array of pixels can be copied to the canvas with `lv_canvas_copy_buf(canvas, buffer_to_copy, x, y, width, height)`. The color format of the buffer and the canvas need to match.

To draw something to the canvas use

- `lv_canvas_draw_rect(canvas, x, y, width, height, &draw_dsc)`
- `lv_canvas_draw_text(canvas, x, y, max_width, &draw_dsc, txt, LV_LABEL_ALIGN_LEFT/CENTER/RIGHT)`
- `lv_canvas_draw_img(canvas, x, y, &img_src, &draw_dsc)`
- `lv_canvas_draw_line(canvas, point_array, point_cnt, &draw_dsc)`
- `lv_canvas_draw_polygon(canvas, points_array, point_cnt, &draw_dsc)`
- `lv_canvas_draw_arc(canvas, x, y, radius, start_angle, end_angle, &draw_dsc)`

`draw_dsc` is an `lv_draw_rect/label/img/line_dsc_t` variable which should be first initialized with `lv_draw_rect/label/img/line_dsc_init()` function and then its fields should be modified with the desired colors and other values.

The draw function can draw to any color format. For example, it's possible to draw a text to an `LV_IMG_CF_ALPHA_8BIT` canvas and use the result image as a mask in *lv\_objmask* later.

## Transformations

`lv_canvas_transform()` can be used to rotate and/or scale the image of an image and store the result on the canvas. The function needs the following parameters:

- **canvas** pointer to a canvas object to store the result of the transformation.
- **img pointer** to an image descriptor to transform. Can be the image descriptor of another canvas too (`lv_canvas_get_img()`).



- **angle** the angle of rotation (0..3600), 0.1 deg resolution
- **zoom** zoom factor (256 no zoom, 512 double size, 128 half size);
- **offset\_x** offset X to tell where to put the result data on destination canvas
- **offset\_y** offset Y to tell where to put the result data on destination canvas
- **pivot\_x** pivot X of rotation. Relative to the source canvas. Set to **source width / 2** to rotate around the center
- **pivot\_y** pivot Y of rotation. Relative to the source canvas. Set to **source height / 2** to rotate around the center
- **antialias** true: apply anti-aliasing during the transformation. Looks better but slower.

Note that a canvas can't be rotated on itself. You need a source and destination canvas or image.

## Blur

A given area of the canvas can be blurred horizontall with `lv_canvas_blur_hor(canvas, &area, r)` or vertically with `lv_canvas_blur_ver(canvas, &area, r)`. `r` is the radius of the blur (greater value means more intensive burring). `area` is the area where the blur should be applied (interpreted relative to the canvas)

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

## Drawing on the Canvas and rotate

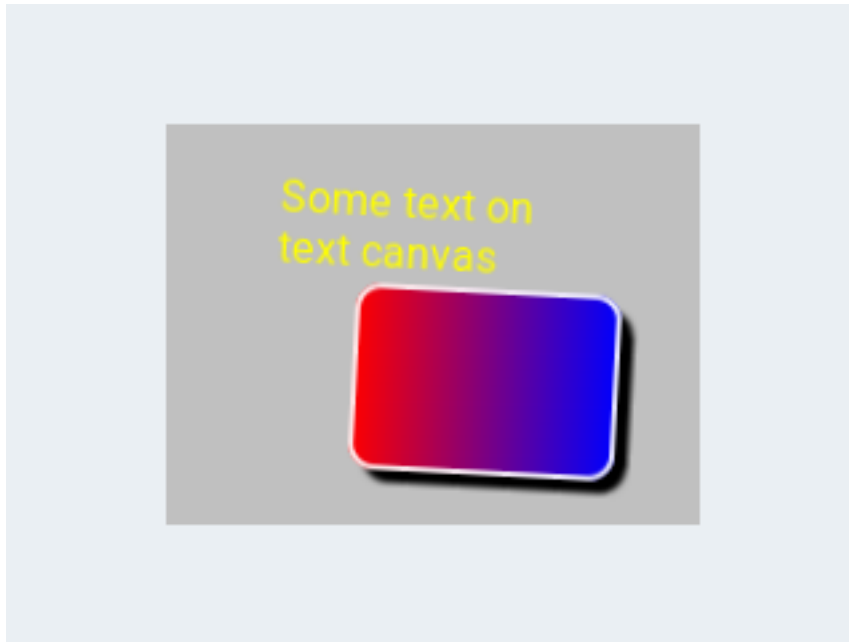

code

```
#include "lvgl/lvgl.h"
#if LV_USE_CANVAS

#define CANVAS_WIDTH 200
#define CANVAS_HEIGHT 150

void lv_ex_canvas_1(void)
{
    lv_draw_rect_dsc_t rect_dsc;
    lv_draw_rect_dsc_init(&rect_dsc);
    rect_dsc.radius = 10;
    rect_dsc.bg_opa = LV_OPA_COVER;
    rect_dsc.bg_grad_dir = LV_GRAD_DIR_HOR;
    rect_dsc.bg_color = LV_COLOR_RED;
    rect_dsc.bg_grad_color = LV_COLOR_BLUE;
    rect_dsc.border_width = 2;
    rect_dsc.border_opa = LV_OPA_90;
    rect_dsc.border_color = LV_COLOR_WHITE;
    rect_dsc.shadow_width = 5;
    rect_dsc.shadow_ofs_x = 5;
    rect_dsc.shadow_ofs_y = 5;

    lv_draw_label_dsc_t label_dsc;
    lv_draw_label_dsc_init(&label_dsc);
    label_dsc.color = LV_COLOR_YELLOW;

    static lv_color_t cbuf[LV_CANVAS_BUF_SIZE_TRUE_COLOR(CANVAS_WIDTH, CANVAS_
    ↪HEIGHT)];

    lv_obj_t * canvas = lv_canvas_create(lv_scr_act(), NULL);
```

(continues on next page)

(continued from previous page)

```

    lv_canvas_set_buffer(canvas, cbuf, CANVAS_WIDTH, CANVAS_HEIGHT, LV_IMG_CF_TRUE_
↪COLOR);
    lv_obj_align(canvas, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_canvas_fill_bg(canvas, LV_COLOR_SILVER, LV_OPA_COVER);

    lv_canvas_draw_rect(canvas, 70, 60, 100, 70, &rect_dsc);


    lv_canvas_draw_text(canvas, 40, 20, 100, &label_dsc, "Some text on text canvas",
↪LV_LABEL_ALIGN_LEFT);

    /* Test the rotation. It requires an other buffer where the original image is
↪stored.
    * So copy the current image to buffer and rotate it to the canvas */
    lv_color_t cbuf_tmp[CANVAS_WIDTH * CANVAS_HEIGHT];
    memcpy(cbuf_tmp, cbuf, sizeof(cbuf_tmp));
    lv_img_dsc_t img;
    img.data = (void *)cbuf_tmp;
    img.header.cf = LV_IMG_CF_TRUE_COLOR;
    img.header.w = CANVAS_WIDTH;
    img.header.h = CANVAS_HEIGHT;

    lv_canvas_fill_bg(canvas, LV_COLOR_SILVER, LV_OPA_COVER);
    lv_canvas_transform(canvas, &img, 30, LV_IMG_ZOOM_NONE, 0, 0, CANVAS_WIDTH / 2,
↪CANVAS_HEIGHT / 2, true);
}
#endif

```

### Transparent Canvas with chroma keying

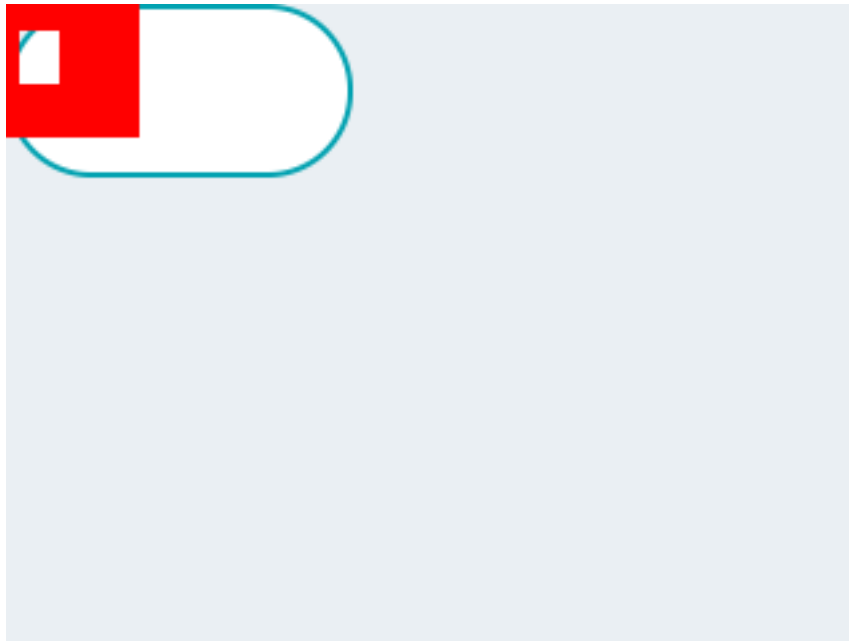

code

```
#include "lvgl/lvgl.h"
#if LV_USE_CANVAS

#define CANVAS_WIDTH 50
#define CANVAS_HEIGHT 50

/**
 * Create a transparent canvas with Chroma keying and indexed color format (palette).
 */
void lv_ex_canvas_2(void)
{
    /*Create a button to better see the transparency*/
    lv_btn_create(lv_scr_act(), NULL);

    /*Create a buffer for the canvas*/
    static lv_color_t cbuf[LV_CANVAS_BUF_SIZE_INDEXED_1BIT(CANVAS_WIDTH, CANVAS_
↪HEIGHT)];

    /*Create a canvas and initialize its the palette*/
    lv_obj_t * canvas = lv_canvas_create(lv_scr_act(), NULL);
    lv_canvas_set_buffer(canvas, cbuf, CANVAS_WIDTH, CANVAS_HEIGHT, LV_IMG_CF_INDEXED_
↪1BIT);
    lv_canvas_set_palette(canvas, 0, LV_COLOR_TRANSP);
    lv_canvas_set_palette(canvas, 1, LV_COLOR_RED);

    /*Create colors with the indices of the palette*/
    lv_color_t c0;
    lv_color_t c1;

    c0.full = 0;
    c1.full = 1;

    /*Transparent background*/
    lv_canvas_fill_bg(canvas, c1, LV_OPA_TRANSP);

    /*Create hole on the canvas*/
    uint32_t x;
    uint32_t y;
    for( y = 10; y < 30; y++) {
        for( x = 5; x < 20; x++) {
            lv_canvas_set_px(canvas, x, y, c0);
        }
    }
}
#endif
```

## MicroPython

No examples yet.

## API

## Typedefs

**typedef** uint8\_t **lv\_canvas\_part\_t**

## Enums

**enum** [anonymous]

*Values:*

**LV\_CANVAS\_PART\_MAIN**

## Functions

*lv\_obj\_t* \***lv\_canvas\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a canvas object

**Return** pointer to the created canvas

### Parameters

- **par**: pointer to an object, it will be the parent of the new canvas
- **copy**: pointer to a canvas object, if not NULL then the new object will be copied from it

void **lv\_canvas\_set\_buffer**(*lv\_obj\_t* \*canvas, void \*buf, lv\_coord\_t w, lv\_coord\_t h, lv\_img\_cf\_t cf)

Set a buffer for the canvas.

### Parameters

- **buf**: a buffer where the content of the canvas will be. The required size is (lv\_img\_color\_format\_get\_px\_size(cf) \* w \* h) / 8) It can be allocated with **lv\_mem\_alloc()** or it can be statically allocated array (e.g. static lv\_color\_t buf[100\*50]) or it can be an address in RAM or external SRAM
- **canvas**: pointer to a canvas object
- **w**: width of the canvas
- **h**: height of the canvas
- **cf**: color format. LV\_IMG\_CF\_...

void **lv\_canvas\_set\_px**(*lv\_obj\_t* \*canvas, lv\_coord\_t x, lv\_coord\_t y, *lv\_color\_t* c)

Set the color of a pixel on the canvas

### Parameters

- **canvas**:
- **x**: x coordinate of the point to set
- **y**: x coordinate of the point to set
- **c**: color of the point

void **lv\_canvas\_set\_palette**(*lv\_obj\_t* \*canvas, uint8\_t id, *lv\_color\_t* c)

Set the palette color of a canvas with index format. Valid only for LV\_IMG\_CF\_INDEXED1/2/4/8

### Parameters

- **canvas**: pointer to canvas object
- **id**: the palette color to set:

- for LV\_IMG\_CF\_INDEXED1: 0..1
- for LV\_IMG\_CF\_INDEXED2: 0..3
- for LV\_IMG\_CF\_INDEXED4: 0..15
- for LV\_IMG\_CF\_INDEXED8: 0..255

- **c**: the color to set

*lv\_color\_t* **lv\_canvas\_get\_px**(*lv\_obj\_t* \**canvas*, lv\_coord\_t *x*, lv\_coord\_t *y*)

Get the color of a pixel on the canvas

**Return** color of the point

**Parameters**

- **canvas**:
- **x**: x coordinate of the point to set
- **y**: y coordinate of the point to set

lv\_img\_dsc\_t \***lv\_canvas\_get\_img**(*lv\_obj\_t* \**canvas*)

Get the image of the canvas as a pointer to an *lv\_img\_dsc\_t* variable.

**Return** pointer to the image descriptor.

**Parameters**

- **canvas**: pointer to a canvas object

void **lv\_canvas\_copy\_buf**(*lv\_obj\_t* \**canvas*, **const** void \**to\_copy*, lv\_coord\_t *x*, lv\_coord\_t *y*,  
lv\_coord\_t *w*, lv\_coord\_t *h*)

Copy a buffer to the canvas

**Parameters**

- **canvas**: pointer to a canvas object
- **to\_copy**: buffer to copy. The color format has to match with the canvas' s buffer color format
- **x**: left side of the destination position
- **y**: top side of the destination position
- **w**: width of the buffer to copy
- **h**: height of the buffer to copy

void **lv\_canvas\_transform**(*lv\_obj\_t* \**canvas*, lv\_img\_dsc\_t \**img*, int16\_t *angle*, uint16\_t *zoom*,  
lv\_coord\_t *offset\_x*, lv\_coord\_t *offset\_y*, int32\_t *pivot\_x*, int32\_t  
*pivot\_y*, bool *antialias*)

Transform and image and store the result on a canvas.

**Parameters**

- **canvas**: pointer to a canvas object to store the result of the transformation.
- **img**: pointer to an image descriptor to transform. Can be the image descriptor of an other canvas too (*lv\_canvas\_get\_img()*).
- **angle**: the angle of rotation (0..3600), 0.1 deg resolution
- **zoom**: zoom factor (256 no zoom);
- **offset\_x**: offset X to tell where to put the result data on destination canvas

- **offset\_y**: offset Y to tell where to put the result data on destination canvas
- **pivot\_x**: pivot X of rotation. Relative to the source canvas Set to **source width / 2** to rotate around the center
- **pivot\_y**: pivot Y of rotation. Relative to the source canvas Set to **source height / 2** to rotate around the center
- **antialias**: apply anti-aliasing during the transformation. Looks better but slower.

void **lv\_canvas\_blur\_hor**(*lv\_obj\_t* \**canvas*, **const** *lv\_area\_t* \**area*, *uint16\_t* *r*)  
 Apply horizontal blur on the canvas

#### Parameters

- **canvas**: pointer to a canvas object
- **r**: radius of the blur

void **lv\_canvas\_blur\_ver**(*lv\_obj\_t* \**canvas*, **const** *lv\_area\_t* \**area*, *uint16\_t* *r*)  
 Apply vertical blur on the canvas

#### Parameters

- **canvas**: pointer to a canvas object
- **area**: the area to blur. If **NULL** the whole canvas will be blurred.
- **r**: radius of the blur

void **lv\_canvas\_fill\_bg**(*lv\_obj\_t* \**canvas*, *lv\_color\_t* *color*, *lv\_opa\_t* *opa*)  
 Fill the canvas with color

#### Parameters

- **canvas**: pointer to a canvas
- **color**: the background color

void **lv\_canvas\_draw\_rect**(*lv\_obj\_t* \**canvas*, *lv\_coord\_t* *x*, *lv\_coord\_t* *y*, *lv\_coord\_t* *w*,  
*lv\_coord\_t* *h*, *lv\_draw\_rect\_dsc\_t* \**rect\_dsc*)  
 Draw a rectangle on the canvas

#### Parameters

- **canvas**: pointer to a canvas object
- **x**: left coordinate of the rectangle
- **y**: top coordinate of the rectangle
- **w**: width of the rectangle
- **h**: height of the rectangle
- **style**: style of the rectangle (**body** properties are used except **padding**)

void **lv\_canvas\_draw\_text**(*lv\_obj\_t* \**canvas*, *lv\_coord\_t* *x*, *lv\_coord\_t* *y*, *lv\_coord\_t*  
*max\_w*, *lv\_draw\_label\_dsc\_t* \**label\_draw\_dsc*, **const** *char* \**txt*,  
*lv\_label\_align\_t* *align*)

Draw a text on the canvas.

#### Parameters

- **canvas**: pointer to a canvas object
- **x**: left coordinate of the text
- **y**: top coordinate of the text

- **max\_w**: max width of the text. The text will be wrapped to fit into this size
- **style**: style of the text (**text** properties are used)
- **txt**: text to display
- **align**: align of the text (**LV\_LABEL\_ALIGN\_LEFT**/**RIGHT**/**CENTER**)

```
void lv_canvas_draw_img(lv_obj_t *canvas, lv_coord_t x, lv_coord_t y, const void *src,
                       lv_draw_img_dsc_t *img_draw_dsc)
```

Draw an image on the canvas

#### Parameters

- **canvas**: pointer to a canvas object
- **src**: image source. Can be a pointer an **lv\_img\_dsc\_t** variable or a path an image.
- **style**: style of the image (**image** properties are used)

```
void lv_canvas_draw_line(lv_obj_t *canvas, const lv_point_t *points, uint32_t point_cnt,
                        lv_draw_line_dsc_t *line_draw_dsc)
```

Draw a line on the canvas

#### Parameters

- **canvas**: pointer to a canvas object
- **points**: point of the line
- **point\_cnt**: number of points
- **style**: style of the line (**line** properties are used)

```
void lv_canvas_draw_polygon(lv_obj_t *canvas, const lv_point_t *points, uint32_t
                           point_cnt, lv_draw_rect_dsc_t *poly_draw_dsc)
```

Draw a polygon on the canvas

#### Parameters

- **canvas**: pointer to a canvas object
- **points**: point of the polygon
- **point\_cnt**: number of points
- **style**: style of the polygon (**body.main\_color** and **body.opa** is used)

```
void lv_canvas_draw_arc(lv_obj_t *canvas, lv_coord_t x, lv_coord_t y, lv_coord_t
                       r, int32_t start_angle, int32_t end_angle, lv_draw_line_dsc_t
                       *arc_draw_dsc)
```

Draw an arc on the canvas

#### Parameters

- **canvas**: pointer to a canvas object
- **x**: origo x of the arc
- **y**: origo y of the arc
- **r**: radius of the arc
- **start\_angle**: start angle in degrees
- **end\_angle**: end angle in degrees
- **style**: style of the polygon (**body.main\_color** and **body.opa** is used)

```
struct lv_canvas_ext_t
```



## Public Members

`lv_img_ext_t` **img**

`lv_img_dsc_t` **dsc**

## Checkbox (lv\_cb)

### Overview

The Checkbox objects are built from a *Button* background which contains an also Button *bullet* and a *Label* to realize a classical checkbox.

### Parts and Styles

The Check box' s main part is called `LV_CHECKBOX_PART_BG`. It' s a container for a “bullet” and a text next to it. The background uses all the typical background style properties.

The bullet is real *lv\_obj* object and can be referred with `LV_CHACKBOX_PART_BULLET`. The bullet automatically inherits the state of the background. So the background is pressed the bullet goes to pressed state as well. The bullet also uses all the typical background style properties.

There is not dedicated part for the label. Its styles can be set in the background' s styles because the *text* styles properties are always inherited.

### Usage

#### Text

The text can be modified by the `lv_checkbox_set_text(cb, "New text")` function. It will dynamically allocate the text.

To set a static text, use `lv_checkbox_set_static_text(cb, txt)`. This way, only a pointer of `txt` will be stored and it shouldn' t be deallocated while the checkbox exists.

#### Check/Uncheck

You can manually check / un-check the Checkbox via `lv_checkbox_set_checked(cb, true/false)`. Setting `true` will check the checkbox and `false` will un-check the checkbox.

#### Disabled

To make the Checkbox disabled, use `lv_checkbox_set_disabled(cb, true)`.

#### Events

Besides the *Generic events* the following *Special events* are sent by the Checkboxes:

- `LV_EVENT_VALUE_CHANGED` - sent when the checkbox is toggled.

Note that, the generic input device-related events (like `LV_EVENT_PRESSED`) are sent in the inactive state too. You need to check the state with `lv_cb_is_inactive(cb)` to ignore the events from inactive Checkboxes.

Learn more about [Events](#).

## Keys

The following *Keys* are processed by the ‘Buttons’ :

- `LV_KEY_RIGHT/UP` - Go to toggled state if toggling is enabled
- `LV_KEY_LEFT/DOWN` - Go to non-toggled state if toggling is enabled


Note that, as usual, the state of `LV_KEY_ENTER` is translated to `LV_EVENT_PRESSED/PRESSING/RELEASED` etc.

Learn more about [Keys](#).

## Example

### C

#### Simple Checkbox

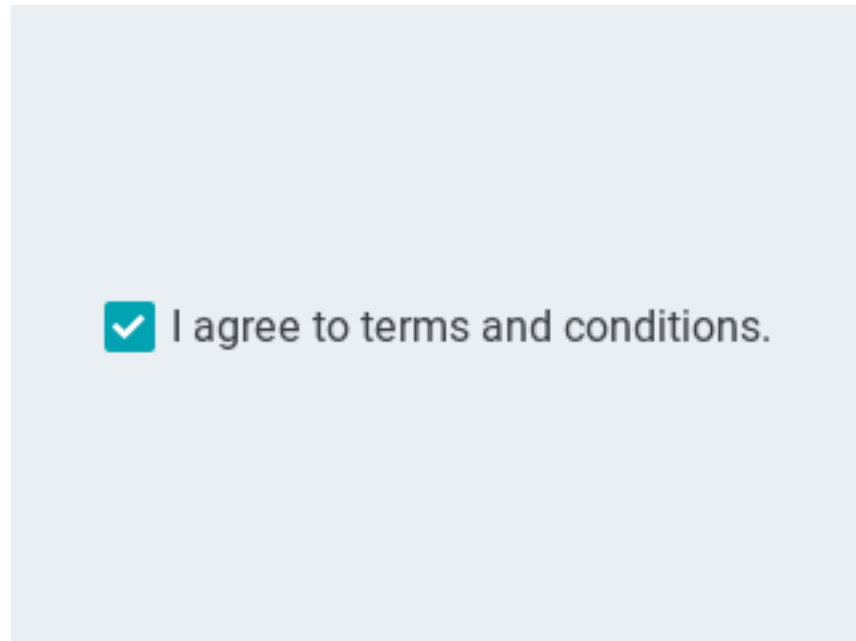

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_CHECKBOX

static void event_handler(lv_obj_t * obj, lv_event_t event)
{
```

(continues on next page)

(continued from previous page)

```

    if(event == LV_EVENT_VALUE_CHANGED) {
        printf("State: %s\n", lv_checkbox_is_checked(obj) ? "Checked" : "Unchecked");
    }
}

void lv_ex_checkbox_1(void)
{
    lv_obj_t * cb = lv_checkbox_create(lv_scr_act(), NULL);
    lv_checkbox_set_text(cb, "I agree to terms and conditions.");
    lv_obj_align(cb, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_set_event_cb(cb, event_handler);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_checkbox\_style\_t**

### Enums

**enum** [anonymous]  
Checkbox styles.

*Values:*

**LV\_CHECKBOX\_PART\_BG** = *LV\_BTN\_PART\_MAIN*  
Style of object background.

**\_LV\_CHECKBOX\_PART\_VIRTUAL\_LAST**

**LV\_CHECKBOX\_PART\_BULLET** = *\_LV\_BTN\_PART\_REAL\_LAST*  
Style of box (released).

**\_LV\_CHECKBOX\_PART\_REAL\_LAST**

### Functions

*lv\_obj\_t* \***lv\_checkbox\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)  
Create a check box objects

**Return** pointer to the created check box

**Parameters**

- **par**: pointer to an object, it will be the parent of the new check box
- **copy**: pointer to a check box object, if not NULL then the new object will be copied from it

void **lv\_checkbox\_set\_text**(*lv\_obj\_t* \*cb, **const** char \*txt)

Set the text of a check box. **txt** will be copied and may be deallocated after this function returns.

**Parameters**

- **cb**: pointer to a check box
- **txt**: the text of the check box. NULL to refresh with the current text.

void **lv\_checkbox\_set\_static\_text**(*lv\_obj\_t* \*cb, **const** char \*txt)

Set the text of a check box. **txt** must not be deallocated during the life of this checkbox.

**Parameters**

- **cb**: pointer to a check box
- **txt**: the text of the check box. NULL to refresh with the current text.

**static** void **lv\_checkbox\_set\_checked**(*lv\_obj\_t* \*cb, bool checked)

Set the state of the check box

**Parameters**

- **cb**: pointer to a check box object
- **checked**: true: make the check box checked; false: make it unchecked

**static** void **lv\_checkbox\_set\_disabled**(*lv\_obj\_t* \*cb)

Make the check box inactive (disabled)

**Parameters**

- **cb**: pointer to a check box object

void **lv\_checkbox\_set\_style**(*lv\_obj\_t* \*cb, *lv\_checkbox\_style\_t* type, **const** *lv\_style\_t* \*style)

Set a style of a check box

**Parameters**

- **cb**: pointer to check box object
- **type**: which style should be set
- **style**: pointer to a style

**const** char \***lv\_checkbox\_get\_text**(**const** *lv\_obj\_t* \*cb)

Get the text of a check box

**Return** pointer to the text of the check box

**Parameters**

- **cb**: pointer to check box object

**static** bool **lv\_checkbox\_is\_checked**(**const** *lv\_obj\_t* \*cb)

Get the current state of the check box

**Return** true: checked; false: not checked

**Parameters**

- **cb**: pointer to a check box object

**static** bool **lv\_checkbox\_is\_inactive**(**const** *lv\_obj\_t* \*cb)

Get whether the check box is inactive or not.

**Return** true: inactive; false: not inactive

**Parameters**

- **cb**: pointer to a check box object

**struct lv\_checkbox\_ext\_t**

#### Public Members

*lv\_btn\_ext\_t* **bg\_btn**

*lv\_obj\_t* \***bullet**

*lv\_obj\_t* \***label**

## Chart (lv\_chart)

### Overview

Charts consist of the following:

- A background
- Horizontal and vertical division lines
- Data series, which can be represented with points, lines, columns, or filled areas.

### Data series

You can add any number of series to the charts by `lv_chart_add_series(chart, color)`. It allocates data for a `lv_chart_series_t` structure which contains the chosen `color` and an array for the data points.

### Series' type

The following **data display types** exist:

- **LV\_CHART\_TYPE\_NONE** - Do not display any data. It can be used to hide a series.
- **LV\_CHART\_TYPE\_LINE** - Draw lines between the points.
- **LV\_CHART\_TYPE\_COL** - Draw columns.
- **LV\_CHART\_TYPE\_POINT** - Draw points.
- **LV\_CHART\_TYPE\_AREA** - Draw areas (fill the area below the lines).
- **LV\_CHART\_TYPE\_VERTICAL\_LINE** - Draw only vertical lines to connect the points. Useful if the chart width is equal to the number of points, because it can redraw much faster than the **LV\_CHART\_TYPE\_AREA**.

You can specify the display type with `lv_chart_set_type(chart, LV_CHART_TYPE_...)`. The types can be 'OR'ed (like `LV_CHART_TYPE_LINE | LV_CHART_TYPE_POINT`).

## Modify the data

You have several options to set the data of series:

1. Set the values manually in the array like `ser1->points[3] = 7` and refresh the chart with `lv_chart_refresh(chart)`.
2. Use the `lv_chart_set_next(chart, ser, value)`.
3. Initialize all points to a given value with: `lv_chart_init_points(chart, ser, value)`.
4. Set all points from an array with: `lv_chart_set_points(chart, ser, value_array)`.

Use `LV_CHART_POINT_DEF` as value to make the library skip drawing that point, column, or line segment.

## Update modes

`lv_chart_set_next` can behave in two ways depending on *update mode*:

- `LV_CHART_UPDATE_MODE_SHIFT` - Shift old data to the left and add the new one on the right.
- `LV_CHART_UPDATE_MODE_CIRCULAR` - Circularly add the new data (Like an ECG diagram).

The update mode can be changed with `lv_chart_set_update_mode(chart, LV_CHART_UPDATE_MODE_...)`.

## Number of points

The number of points in the series can be modified by `lv_chart_set_point_count(chart, point_num)`. The default value is 10.

## Vertical range

You can specify the minimum and maximum values in y-direction with `lv_chart_set_range(chart, y_min, y_max)`. The value of the points will be scaled proportionally. The default range is: 0..100.

## Division lines

The number of horizontal and vertical division lines can be modified by `lv_chart_set_div_line_count(chart, hdiv_num, vdiv_num)`. The default settings are 3 horizontal and 5 vertical division lines.

## Series' appearance

To set the **line width** and **point radius** of the series, use the `lv_chart_set_series_width(chart, size)` function. The default value is 2.

The **opacity of the data lines** can be specified by `lv_chart_set_series_opa(chart, opa)`. The default value is `LV_OPA_COVER`.

You can apply a **dark color fade** on the bottom of columns and points by `lv_chart_set_series_darking(chart, effect)` function. The default dark level is `LV_OPA_50`.

## Tick marks and labels

Ticks and labels beside them can be added.

**lv\_chart\_set\_margin(chart, 20)** needs to be used to add some extra space around the chart for the ticks and texts. Otherwise, you will not see them at all. You may need to adjust the number 20 depending on your requirements.

**lv\_chart\_set\_x\_tick\_text(chart, list\_of\_values, num\_tick\_marks, LV\_CHART\_AXIS\_...)** set the ticks and texts on x axis. **list\_of\_values** is a string with '\n' terminated text (expect the last) with text for the ticks. E.g. `const char * list_of_values = "first\nseco\nthird"`. **list\_of\_values** can be `NULL`. If **list\_of\_values** is set then **num\_tick\_marks** tells the number of ticks between two labels. If **list\_of\_values** is `NULL` then it specifies the total number of ticks.

*Major tick lines* are drawn where text is placed, and *minor tick lines* are drawn elsewhere. **lv\_chart\_set\_x\_tick\_length(chart, major\_tick\_len, minor\_tick\_len)** sets the length of tick lines on the x-axis.

The same functions exists for the y axis too: **lv\_chart\_set\_y\_tick\_text** and **lv\_chart\_set\_y\_tick\_length**.

## Styles

You can set the styles with **lv\_chart\_set\_style(btn, LV\_CHART\_STYLE\_MAIN, &style)**.

- **style.body** - properties set the background's appearance.
- **style.line** - properties set the division lines' appearance.
- **style.text** - properties set the axis labels' appearance.

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

## C

## Line Chart

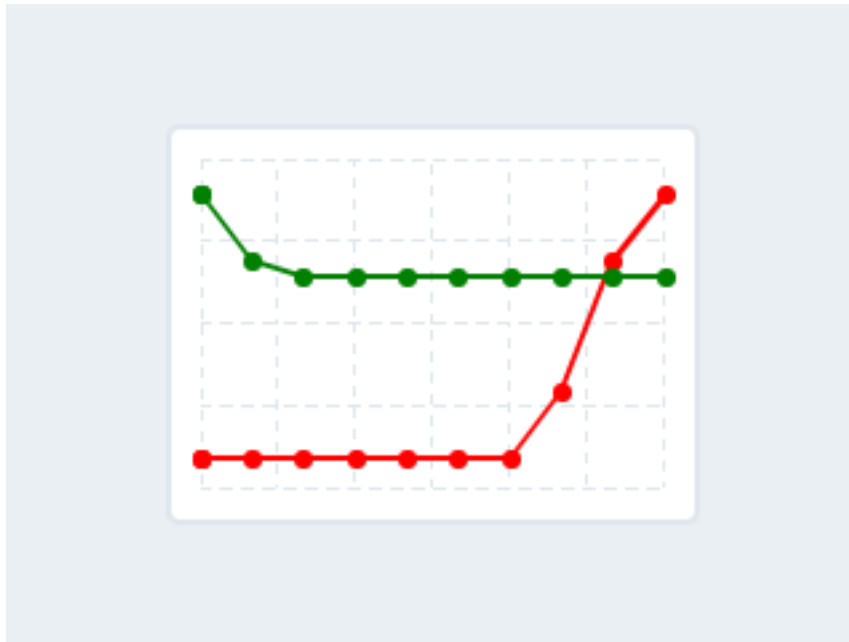

code

```
#include "lvgl/lvgl.h"
#if LV_USE_CHART

void lv_ex_chart_1(void)
{
    /*Create a chart*/
    lv_obj_t * chart;
    chart = lv_chart_create(lv_scr_act(), NULL);
    lv_obj_set_size(chart, 200, 150);
    lv_obj_align(chart, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_chart_set_type(chart, LV_CHART_TYPE_LINE);    /*Show lines and points too*/

    /*Add two data series*/
    lv_chart_series_t * ser1 = lv_chart_add_series(chart, LV_COLOR_RED);
    lv_chart_series_t * ser2 = lv_chart_add_series(chart, LV_COLOR_GREEN);

    /*Set the next points on 'ser1'*/
    lv_chart_set_next(chart, ser1, 10);
    lv_chart_set_next(chart, ser1, 10);
    lv_chart_set_next(chart, ser1, 10);
    lv_chart_set_next(chart, ser1, 10);
    lv_chart_set_next(chart, ser1, 10);
    lv_chart_set_next(chart, ser1, 10);
    lv_chart_set_next(chart, ser1, 10);
    lv_chart_set_next(chart, ser1, 30);
    lv_chart_set_next(chart, ser1, 70);
    lv_chart_set_next(chart, ser1, 90);

    /*Directly set points on 'ser2'*/
    ser2->points[0] = 90;
    ser2->points[1] = 70;
}
```

(continues on next page)



(continued from previous page)

```

    ser2->points[2] = 65;
    ser2->points[3] = 65;
    ser2->points[4] = 65;
    ser2->points[5] = 65;
    ser2->points[6] = 65;
    ser2->points[7] = 65;
    ser2->points[8] = 65;
    ser2->points[9] = 65;

    lv_chart_refresh(chart); /*Required after direct set*/
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```

typedef uint8_t lv_chart_type_t
typedef uint8_t lv_chart_update_mode_t
typedef uint8_t lv_chart_axis_options_t

```

### Enums

```

enum [anonymous]
    Chart types

    Values:

    LV_CHART_TYPE_NONE = 0x00
        Don't draw the series

    LV_CHART_TYPE_LINE = 0x01
        Connect the points with lines

    LV_CHART_TYPE_COLUMN = 0x02
        Draw columns

enum [anonymous]
    Chart update mode for lv_chart_set_next

    Values:

    LV_CHART_UPDATE_MODE_SHIFT
        Shift old data to the left and add the new one o the right

    LV_CHART_UPDATE_MODE_CIRCULAR
        Add the new data in a circular way

```

**enum** [anonymous]

Data of axis

*Values:*

**LV\_CHART\_AXIS\_SKIP\_LAST\_TICK** = 0x00

don't draw the last tick

**LV\_CHART\_AXIS\_DRAW\_LAST\_TICK** = 0x01

draw the last tick

**LV\_CHART\_AXIS\_INVERSE\_LABELS\_ORDER** = 0x02

draw tick labels in an inversed order

**enum** [anonymous]

*Values:*

**LV\_CHART\_PART\_BG** = *LV\_OBJ\_PART\_MAIN*

**LV\_CHART\_PART\_SERIES\_BG** = *\_LV\_OBJ\_PART\_VIRTUAL\_LAST*

**LV\_CHART\_PART\_SERIES**

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_CHART\_POINT\_DEF)

**LV\_EXPORT\_CONST\_INT**(LV\_CHART\_TICK\_LENGTH\_AUTO)

*lv\_obj\_t* \***lv\_chart\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)

Create a chart background objects

**Return** pointer to the created chart background

**Parameters**

- **par**: pointer to an object, it will be the parent of the new chart background
- **copy**: pointer to a chart background object, if not NULL then the new object will be copied from it

*lv\_chart\_series\_t* \***lv\_chart\_add\_series**(*lv\_obj\_t* \*chart, *lv\_color\_t* color)

Allocate and add a data series to the chart

**Return** pointer to the allocated data series

**Parameters**

- **chart**: pointer to a chart object
- **color**: color of the data series

**void** **lv\_chart\_clear\_serie**(*lv\_obj\_t* \*chart, *lv\_chart\_series\_t* \*serie)

Clear the point of a serie

**Parameters**

- **chart**: pointer to a chart object
- **serie**: pointer to the chart's serie to clear

**void** **lv\_chart\_set\_div\_line\_count**(*lv\_obj\_t* \*chart, uint8\_t hdiv, uint8\_t vdiv)

Set the number of horizontal and vertical division lines

**Parameters**

- **chart**: pointer to a graph background object
- **hdiv**: number of horizontal division lines
- **vdiv**: number of vertical division lines

void **lv\_chart\_set\_range**(*lv\_obj\_t* \*chart, *lv\_coord\_t* ymin, *lv\_coord\_t* ymax)  
Set the minimal and maximal y values

**Parameters**

- **chart**: pointer to a graph background object
- **ymin**: y minimum value
- **ymax**: y maximum value

void **lv\_chart\_set\_type**(*lv\_obj\_t* \*chart, *lv\_chart\_type\_t* type)  
Set a new type for a chart

**Parameters**

- **chart**: pointer to a chart object
- **type**: new type of the chart (from ‘*lv\_chart\_type\_t*’ enum)

void **lv\_chart\_set\_point\_count**(*lv\_obj\_t* \*chart, *uint16\_t* point\_cnt)  
Set the number of points on a data line on a chart

**Parameters**

- **chart**: pointer r to chart object
- **point\_cnt**: new number of points on the data lines

void **lv\_chart\_init\_points**(*lv\_obj\_t* \*chart, *lv\_chart\_series\_t* \*ser, *lv\_coord\_t* y)  
Initialize all data points with a value

**Parameters**

- **chart**: pointer to chart object
- **ser**: pointer to a data series on ‘chart’
- **y**: the new value for all points

void **lv\_chart\_set\_points**(*lv\_obj\_t* \*chart, *lv\_chart\_series\_t* \*ser, *lv\_coord\_t* y\_array[])  
Set the value of points from an array

**Parameters**

- **chart**: pointer to chart object
- **ser**: pointer to a data series on ‘chart’
- **y\_array**: array of ‘*lv\_coord\_t*’ points (with ‘points count’ elements )

void **lv\_chart\_set\_next**(*lv\_obj\_t* \*chart, *lv\_chart\_series\_t* \*ser, *lv\_coord\_t* y)  
Shift all data right and set the most right data on a data line

**Parameters**

- **chart**: pointer to chart object
- **ser**: pointer to a data series on ‘chart’
- **y**: the new value of the most right data

void **lv\_chart\_set\_update\_mode**(*lv\_obj\_t* \*chart, *lv\_chart\_update\_mode\_t* update\_mode)  
 Set update mode of the chart object.

**Parameters**

- **chart**: pointer to a chart object
- **update**: mode

void **lv\_chart\_set\_x\_tick\_length**(*lv\_obj\_t* \*chart, uint8\_t major\_tick\_len, uint8\_t minor\_tick\_len)  
 Set the length of the tick marks on the x axis

**Parameters**

- **chart**: pointer to the chart
- **major\_tick\_len**: the length of the major tick or LV\_CHART\_TICK\_LENGTH\_AUTO to set automatically (where labels are added)
- **minor\_tick\_len**: the length of the minor tick, LV\_CHART\_TICK\_LENGTH\_AUTO to set automatically (where no labels are added)

void **lv\_chart\_set\_y\_tick\_length**(*lv\_obj\_t* \*chart, uint8\_t major\_tick\_len, uint8\_t minor\_tick\_len)  
 Set the length of the tick marks on the y axis

**Parameters**

- **chart**: pointer to the chart
- **major\_tick\_len**: the length of the major tick or LV\_CHART\_TICK\_LENGTH\_AUTO to set automatically (where labels are added)
- **minor\_tick\_len**: the length of the minor tick, LV\_CHART\_TICK\_LENGTH\_AUTO to set automatically (where no labels are added)

void **lv\_chart\_set\_secondary\_y\_tick\_length**(*lv\_obj\_t* \*chart, uint8\_t major\_tick\_len, uint8\_t minor\_tick\_len)  
 Set the length of the tick marks on the secondary y axis

**Parameters**

- **chart**: pointer to the chart
- **major\_tick\_len**: the length of the major tick or LV\_CHART\_TICK\_LENGTH\_AUTO to set automatically (where labels are added)
- **minor\_tick\_len**: the length of the minor tick, LV\_CHART\_TICK\_LENGTH\_AUTO to set automatically (where no labels are added)

void **lv\_chart\_set\_x\_tick\_texts**(*lv\_obj\_t* \*chart, const char \*list\_of\_values, uint8\_t num\_tick\_marks, *lv\_chart\_axis\_options\_t* options)  
 Set the x-axis tick count and labels of a chart

**Parameters**

- **chart**: pointer to a chart object
- **list\_of\_values**: list of string values, terminated with \0, except the last
- **num\_tick\_marks**: if list\_of\_values is NULL: total number of ticks per axis else number of ticks between two value labels
- **options**: extra options

```
void lv_chart_set_secondary_y_tick_texts(lv_obj_t *chart, const char
                                         *list_of_values, uint8_t num_tick_marks,
                                         lv_chart_axis_options_t options)
```

Set the secondary y-axis tick count and labels of a chart

#### Parameters

- **chart**: pointer to a chart object
- **list\_of\_values**: list of string values, terminated with `,` except the last
- **num\_tick\_marks**: if **list\_of\_values** is NULL: total number of ticks per axis else number of ticks between two value labels
- **options**: extra options

```
void lv_chart_set_y_tick_texts(lv_obj_t *chart, const char *list_of_values, uint8_t
                              num_tick_marks, lv_chart_axis_options_t options)
```

Set the y-axis tick count and labels of a chart

#### Parameters

- **chart**: pointer to a chart object
- **list\_of\_values**: list of string values, terminated with `,` except the last
- **num\_tick\_marks**: if **list\_of\_values** is NULL: total number of ticks per axis else number of ticks between two value labels
- **options**: extra options

```
lv_chart_type_t lv_chart_get_type(const lv_obj_t *chart)
```

Get the type of a chart

**Return** type of the chart (from `'lv_chart_t'` enum)

#### Parameters

- **chart**: pointer to chart object

```
uint16_t lv_chart_get_point_count(const lv_obj_t *chart)
```

Get the data point number per data line on chart

**Return** point number on each data line

#### Parameters

- **chart**: pointer to chart object

```
void lv_chart_refresh(lv_obj_t *chart)
```

Refresh a chart if its data line has changed

#### Parameters

- **chart**: pointer to chart object

```
struct lv_chart_series_t
```

#### Public Members

*lv\_coord\_t* \***points**

*lv\_color\_t* **color**

uint16\_t **start\_point**

```
struct lv_chart_axis_cfg_t
```

### Public Members

```

const char *list_of_values
lv_chart_axis_options_t options
uint8_t num_tick_marks
uint8_t major_tick_len
uint8_t minor_tick_len
struct lv_chart_ext_t

```

### Public Members

```

lv_ll_t series_ll
lv_coord_t ymin
lv_coord_t ymax
uint8_t hdiv_cnt
uint8_t vdiv_cnt
uint16_t point_cnt
lv_style_list_t style_series_bg
lv_style_list_t style_series
lv_chart_type_t type
lv_chart_axis_cfg_t y_axis
lv_chart_axis_cfg_t x_axis
lv_chart_axis_cfg_t secondary_y_axis
uint8_t update_mode

```

## Container (lv\_cont)

### Overview

The containers are essentially a **basic object** with some special features.

### Layout

You can apply a layout on the containers to automatically order their children. The layout spacing comes from **style.body.padding**. ... properties. The possible layout options:

- **LV\_LAYOUT\_OFF** - Do not align the children.
- **LV\_LAYOUT\_CENTER** - Align children to the center in column and keep **padding.inner** space between them.
- **LV\_LAYOUT\_COL** - Align children in a left-justified column. Keep **padding.left** space on the left, **pad.top** space on the top and **padding.inner** space between the children.

- **LV\_LAYOUT\_COL\_M** - Align children in centered column. Keep **padding.top** space on the top and **padding.inner** space between the children.
- **LV\_LAYOUT\_COL\_R** - Align children in a right-justified column. Keep **padding.right** space on the right, **padding.top** space on the top and **padding.inner** space between the children.
- **LV\_LAYOUT\_ROW\_T** - Align children in a top justified row. Keep **padding.left** space on the left, **padding.top** space on the top and **padding.inner** space between the children.
- **LV\_LAYOUT\_ROW\_M** - Align children in centered row. Keep **padding.left** space on the left and **padding.inner** space between the children.
- **LV\_LAYOUT\_ROW\_B** - Align children in a bottom justified row. Keep **padding.left** space on the left, **padding.bottom** space on the bottom and **padding.inner** space between the children.
- **LV\_LAYOUT\_PRETTY** - Put as many objects as possible in a row (with at least **padding.inner** space and **padding.left/right** space on the sides). Divide the space in each line equally between the children. Keep **padding.top** space on the top and **padding.inner** space between the lines.
- **LV\_LAYOUT\_GRID** - Similar to **LV\_LAYOUT\_PRETTY** but not divide horizontal space equally just let **padding.left/right** on the edges and **padding.inner** space between the elements.

## Autofit

Container have an autofit feature which can automatically change the size of the container according to its children and/or parent. The following options exist:

- **LV\_FIT\_NONE** - Do not change the size automatically.
- **LV\_FIT\_TIGHT** - Shrink-wrap the container around all of its children, while keeping **padding.top/bottom/left/right** space on the edges.
- **LV\_FIT\_FLOOD** - Set the size to the parent's size minus **padding.top/bottom/left/right** (from the parent's style) space.
- **LV\_FIT\_FILL** - Use **LV\_FIT\_FLOOD** while smaller than the parent and **LV\_FIT\_TIGHT** when larger. It will ensure that the container is, at minimum, the size of its parent.

To set the auto fit mode for all directions, use `lv_cont_set_fit(cont, LV_FIT_...)`. To use different auto fit horizontally and vertically, use `lv_cont_set_fit2(cont, hor_fit_type, ver_fit_type)`. To use different auto fit in all 4 directions, use `lv_cont_set_fit4(cont, left_fit_type, right_fit_type, top_fit_type, bottom_fit_type)`.

## Styles

You can set the styles with `lv_cont_set_style(btn, LV_CONT_STYLE_MAIN, &style)`.

- **style.body** properties are used.

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about *Keys*.

## Example

### C

#### Container with auto-fit

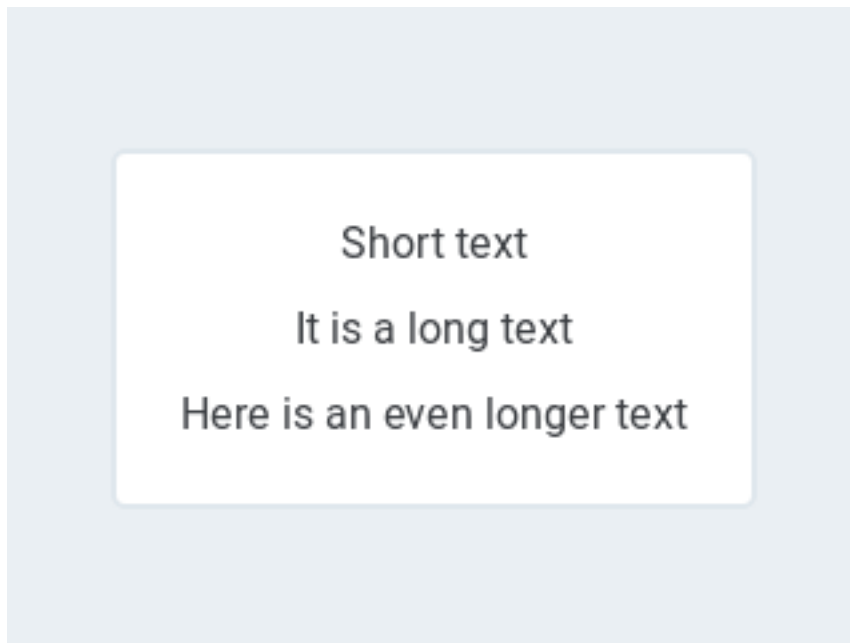

code

```
#include "lvgl/lvgl.h"
#if LV_USE_CONT

void lv_ex_cont_1(void)
{
    lv_obj_t * cont;

    cont = lv_cont_create(lv_scr_act(), NULL);
    lv_obj_set_auto_realign(cont, true);           /*Auto realign when the
↪size changes*/
    lv_obj_align_origo(cont, NULL, LV_ALIGN_CENTER, 0, 0); /*This parametrs will be
↪sued when realigned*/
    lv_cont_set_fit(cont, LV_FIT_TIGHT);
    lv_cont_set_layout(cont, LV_LAYOUT_COLUMN_MID);

    lv_obj_t * label;
    label = lv_label_create(cont, NULL);
    lv_label_set_text(label, "Short text");
}
```

(continues on next page)



(continued from previous page)

```

    /*Refresh and pause here for a while to see how `fit` works*/
    uint32_t t;
    lv_refr_now(NULL);
    t = lv_tick_get();
    while(lv_tick_elaps(t) < 500);

    label = lv_label_create(cont, NULL);
    lv_label_set_text(label, "It is a long text");

    /*Wait here too*/
    lv_refr_now(NULL);
    t = lv_tick_get();
    while(lv_tick_elaps(t) < 500);

    label = lv_label_create(cont, NULL);
    lv_label_set_text(label, "Here is an even longer text");
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_layout_t
```

```
typedef uint8_t lv_fit_t
```

### Enums

```
enum [anonymous]
```

Container layout options

*Values:*

```
LV_LAYOUT_OFF = 0
```

No layout

```
LV_LAYOUT_CENTER
```

Center objects

```
LV_LAYOUT_COLUMN_LEFT
```

COULMN:

- Place the object below each other
- Keep `pad_top` space on the top
- Keep `pad_inner` space between the objectsColumn left align

#### **LV\_LAYOUT\_COLUMN\_MID**

Column middle align

#### **LV\_LAYOUT\_COLUMN\_RIGHT**

Column right align

#### **LV\_LAYOUT\_ROW\_TOP**

ROW:

- Place the object next to each other
- Keep `pad_left` space on the left
- Keep `pad_inner` space between the objects
- If the object which applies the layout has `base_dir == LV_BIDI_DIR_RTL` the row will start from the right applying `pad.right` spaceRow top align

#### **LV\_LAYOUT\_ROW\_MID**

Row middle align

#### **LV\_LAYOUT\_ROW\_BOTTOM**

Row bottom align

#### **LV\_LAYOUT\_PRETTY\_TOP**

PRETTY:

- Place the object next to each other
- If there is no more space start a new row
- Respect `pad_left` and `pad_right` when determining the available space in a row
- Keep `pad_inner` space between the objects in the same row
- Keep `pad_inner` space between the objects in rows
- Divide the remaining horizontal space equallyRow top align

#### **LV\_LAYOUT\_PRETTY\_MID**

Row middle align

#### **LV\_LAYOUT\_PRETTY\_BOTTOM**

Row bottom align

#### **LV\_LAYOUT\_GRID**

GRID

- Place the object next to each other
- If there is no more space start a new row
- Respect `pad_left` and `pad_right` when determining the available space in a row
- Keep `pad_inner` space between the objects in the same row
- Keep `pad_inner` space between the objects in rows
- Unlike PRETTY, GRID always keep `pad_inner` space horizontally between objects so it doesn't divide the remaining horizontal space equallyAlign same-sized object into a grid

#### **\_LV\_LAYOUT\_LAST**

**enum** [anonymous]

How to resize the container around the children.

*Values:*

#### **LV\_FIT\_NONE**

Do not change the size automatically

#### **LV\_FIT\_TIGHT**

Shrink wrap around the children

#### **LV\_FIT\_PARENT**

Align the size to the parent' s edge

#### **LV\_FIT\_MAX**

Align the size to the parent' s edge first but if there is an object out of it then get larger

#### **\_LV\_FIT\_LAST**

**enum** [anonymous]

*Values:*

**LV\_CONT\_PART\_MAIN** = *LV\_OBJ\_PART\_MAIN*

**\_LV\_CONT\_PART\_VIRTUAL\_LAST** = *\_LV\_OBJ\_PART\_VIRTUAL\_LAST*

**\_LV\_CONT\_PART\_REAL\_LAST** = *\_LV\_OBJ\_PART\_REAL\_LAST*

### Functions

*lv\_obj\_t* \***lv\_cont\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a container objects

**Return** pointer to the created container

#### Parameters

- **par**: pointer to an object, it will be the parent of the new container
- **copy**: pointer to a container object, if not NULL then the new object will be copied from it

void **lv\_cont\_set\_layout**(*lv\_obj\_t* \*cont, *lv\_layout\_t* layout)

Set a layout on a container

#### Parameters

- **cont**: pointer to a container object
- **layout**: a layout from 'lv\_cont\_layout\_t'

void **lv\_cont\_set\_fit4**(*lv\_obj\_t* \*cont, *lv\_fit\_t* left, *lv\_fit\_t* right, *lv\_fit\_t* top, *lv\_fit\_t* bottom)

Set the fit policy in all 4 directions separately. It tell how to change the container' s size automatically.

#### Parameters

- **cont**: pointer to a container object
- **left**: left fit policy from *lv\_fit\_t*
- **right**: right fit policy from *lv\_fit\_t*
- **top**: top fit policy from *lv\_fit\_t*
- **bottom**: bottom fit policy from *lv\_fit\_t*

**static** void **lv\_cont\_set\_fit2**(*lv\_obj\_t* \*cont, *lv\_fit\_t* hor, *lv\_fit\_t* ver)

Set the fit policy horizontally and vertically separately. It tells how to change the container' s size automatically.

#### Parameters

- **cont**: pointer to a container object
- **hor**: horizontal fit policy from `lv_fit_t`
- **ver**: vertical fit policy from `lv_fit_t`

**static void lv\_cont\_set\_fit**(*lv\_obj\_t* \*cont, *lv\_fit\_t* fit)

Set the fit policy in all 4 direction at once. It tells how to change the container' s size automatically.

**Parameters**

- **cont**: pointer to a container object
- **fit**: fit policy from `lv_fit_t`

*lv\_layout\_t* **lv\_cont\_get\_layout**(const *lv\_obj\_t* \*cont)

Get the layout of a container

**Return** the layout from 'lv\_cont\_layout\_t'

**Parameters**

- **cont**: pointer to container object

*lv\_fit\_t* **lv\_cont\_get\_fit\_left**(const *lv\_obj\_t* \*cont)

Get left fit mode of a container

**Return** an element of `lv_fit_t`

**Parameters**

- **cont**: pointer to a container object

*lv\_fit\_t* **lv\_cont\_get\_fit\_right**(const *lv\_obj\_t* \*cont)

Get right fit mode of a container

**Return** an element of `lv_fit_t`

**Parameters**

- **cont**: pointer to a container object

*lv\_fit\_t* **lv\_cont\_get\_fit\_top**(const *lv\_obj\_t* \*cont)

Get top fit mode of a container

**Return** an element of `lv_fit_t`

**Parameters**

- **cont**: pointer to a container object

*lv\_fit\_t* **lv\_cont\_get\_fit\_bottom**(const *lv\_obj\_t* \*cont)

Get bottom fit mode of a container

**Return** an element of `lv_fit_t`

**Parameters**

- **cont**: pointer to a container object

**struct lv\_cont\_ext\_t**

**Public Members**

*lv\_layout\_t* **layout**

*lv\_fit\_t* **fit\_left**

```
lv_fit_t fit_right
lv_fit_t fit_top
lv_fit_t fit_bottom
```

## color picker (lv\_cpicker)

### Overview

As its name implies *Color picker* allows to select color. The Hue, Saturation and Value of the color can be selected after each other.

The widget has two forms: circle (disc) and rectangle.

In both forms, by long pressing the object, the color picker will change to the next parameter of the color (hue, saturation or value). Besides, double click will reset the current parameter.

### Parts and Styles

The Color picker's main part is called **LV\_CPICKER\_PART\_BG**. In circular form it uses *scale\_width* to set the width of the circle and *pad\_inner* for padding between the circle and the inner preview circle. In rectangle mode *radius* can be used to apply a radius on the rectangle.

The object has virtual part called **LV\_CPICKER\_PART\_KNOB** which is rectangle (or circle) drawn on the current value. It uses all the rectangle like style properties and padding to make it larger than the width of the circle or rectangle background.

### Usage

#### Type

The type of the Color picker can be changed with `lv_cpicker_set_type(cpicker, LV_CPICKER_TYPE_RECT/DISC)`

#### Set color

The color can be set manually with `lv_cpicker_set_hue/saturation/value(cpicker, x)` or all at once with `lv_cpicker_set_hsv(cpicker, hsv)` or `lv_cpicker_set_color(cpicker, rgb)`

#### Color mode

The current color mode can be manually selected with `lv_cpicker_set_color_mode(cpicker, LV_CPICKER_COLOR_MODE_HUE/SATURATION/VALUE)`.

The color mode can be fixed (do not change with long press) using `lv_cpicker_set_color_mode_fixed(cpicker, true)`

## Knob color

`lv_cpicker_set_knob_colored(cpicker, true)` make the knob to automatically show the selected color as background color.

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys

- **LV\_KEY\_UP, LV\_KEY\_RIGHT** Increment the current parameter' s value by 1
- **LV\_KEY\_DOWN, LV\_KEY\_LEFT** Decrement the current parameter' s by 1
- **LV\_KEY\_ENTER** By long press the next mode will be shown. By double click the current parameter will be reset.

Learn more about [Keys](#).

## Example

### C

#### Disc color picker



code

```
#include "lvgl/lvgl.h"
#if LV_USE_CPICKER

void lv_ex_cpicker_1(void)
{
    lv_obj_t * cpicker;

    cpicker = lv_cpicker_create(lv_scr_act(), NULL);
    lv_obj_set_size(cpicker, 200, 200);
    lv_obj_align(cpicker, NULL, LV_ALIGN_CENTER, 0, 0);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_cpicker_type_t
typedef uint8_t lv_cpicker_color_mode_t
```

### Enums

```
enum [anonymous]
```

*Values:*

```
LV_CPICKER_TYPE_RECT
LV_CPICKER_TYPE_DISC
```

```
enum [anonymous]
```

*Values:*

```
LV_CPICKER_COLOR_MODE_HUE
LV_CPICKER_COLOR_MODE_SATURATION
LV_CPICKER_COLOR_MODE_VALUE
```

```
enum [anonymous]
```

*Values:*

```
LV_CPICKER_PART_MAIN = LV_OBJ_PART_MAIN
LV_CPICKER_PART_INDIC = _LV_OBJ_PART_VIRTUAL_LAST
LV_CPICKER_PART_VIRTUAL_LAST
LV_CPICKER_PART_REAL_LAST = _LV_OBJ_PART_REAL_LAST
```

## Functions

*lv\_obj\_t* \***lv\_cpicker\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a colorpicker objects

**Return** pointer to the created colorpicker

### Parameters

- **par**: pointer to an object, it will be the parent of the new colorpicker
- **copy**: pointer to a colorpicker object, if not NULL then the new object will be copied from it

void **lv\_cpicker\_set\_type**(*lv\_obj\_t* \*cpicker, *lv\_cpicker\_type\_t* type)

Set a new type for a colorpicker

### Parameters

- **cpicker**: pointer to a colorpicker object
- **type**: new type of the colorpicker (from 'lv\_cpicker\_type\_t' enum)

bool **lv\_cpicker\_set\_hue**(*lv\_obj\_t* \*cpicker, uint16\_t hue)

Set the current hue of a colorpicker.

**Return** true if changed, otherwise false

### Parameters

- **cpicker**: pointer to colorpicker object
- **hue**: current selected hue [0..360]

bool **lv\_cpicker\_set\_saturation**(*lv\_obj\_t* \*cpicker, uint8\_t saturation)

Set the current saturation of a colorpicker.

**Return** true if changed, otherwise false

### Parameters

- **cpicker**: pointer to colorpicker object
- **saturation**: current selected saturation [0..100]

bool **lv\_cpicker\_set\_value**(*lv\_obj\_t* \*cpicker, uint8\_t val)

Set the current value of a colorpicker.

**Return** true if changed, otherwise false

### Parameters

- **cpicker**: pointer to colorpicker object
- **val**: current selected value [0..100]

bool **lv\_cpicker\_set\_hsv**(*lv\_obj\_t* \*cpicker, *lv\_color\_hsv\_t* hsv)

Set the current hsv of a colorpicker.

**Return** true if changed, otherwise false

### Parameters

- **cpicker**: pointer to colorpicker object
- **hsv**: current selected hsv



bool **lv\_cpicker\_set\_color**(*lv\_obj\_t \*cpicker*, *lv\_color\_t color*)

Set the current color of a colorpicker.

**Return** true if changed, otherwise false

**Parameters**

- **cpicker**: pointer to colorpicker object
- **color**: current selected color

void **lv\_cpicker\_set\_color\_mode**(*lv\_obj\_t \*cpicker*, *lv\_cpicker\_color\_mode\_t mode*)

Set the current color mode.

**Parameters**

- **cpicker**: pointer to colorpicker object
- **mode**: color mode (hue/sat/val)

void **lv\_cpicker\_set\_color\_mode\_fixed**(*lv\_obj\_t \*cpicker*, bool *fixed*)

Set if the color mode is changed on long press on center

**Parameters**

- **cpicker**: pointer to colorpicker object
- **fixed**: color mode cannot be changed on long press

void **lv\_cpicker\_set\_indic\_colored**(*lv\_obj\_t \*cpicker*, bool *en*)

Make the indicator to be colored to the current color

**Parameters**

- **cpicker**: pointer to colorpicker object
- **en**: true: color the indicator; false: not color the indicator

*lv\_cpicker\_color\_mode\_t* **lv\_cpicker\_get\_color\_mode**(*lv\_obj\_t \*cpicker*)

Get the current color mode.

**Return** color mode (hue/sat/val)

**Parameters**

- **cpicker**: pointer to colorpicker object

bool **lv\_cpicker\_get\_color\_mode\_fixed**(*lv\_obj\_t \*cpicker*)

Get if the color mode is changed on long press on center

**Return** mode cannot be changed on long press

**Parameters**

- **cpicker**: pointer to colorpicker object

uint16\_t **lv\_cpicker\_get\_hue**(*lv\_obj\_t \*cpicker*)

Get the current hue of a colorpicker.

**Return** current selected hue

**Parameters**

- **cpicker**: pointer to colorpicker object

uint8\_t **lv\_cpicker\_get\_saturation**(*lv\_obj\_t \*cpicker*)

Get the current saturation of a colorpicker.

**Return** current selected saturation

#### Parameters

- `cpicker`: pointer to colorpicker object

`uint8_t lv_cpicker_get_value(lv_obj_t *cpicker)`

Get the current hue of a colorpicker.

**Return** current selected value

#### Parameters

- `cpicker`: pointer to colorpicker object

`lv_color_hsv_t lv_cpicker_get_hsv(lv_obj_t *cpicker)`

Get the current selected hsv of a colorpicker.

**Return** current selected hsv

#### Parameters

- `cpicker`: pointer to colorpicker object

`lv_color_t lv_cpicker_get_color(lv_obj_t *cpicker)`

Get the current selected color of a colorpicker.

**Return** current selected color

#### Parameters

- `cpicker`: pointer to colorpicker object

`bool lv_cpicker_get_indic_colored(lv_obj_t *cpicker)`

Whether the indicator is colored to the current color or not

**Return** true: color the indicator; false: not color the indicator

#### Parameters

- `cpicker`: pointer to colorpicker object

`bool lv_cpicker_get_preview(lv_obj_t *cpicker)`

Whether the preview is enabled or not

**Return** en true: preview is enabled; false: preview is disabled

#### Parameters

- `cpicker`: pointer to colorpicker object

**struct lv\_cpicker\_ext\_t**

#### Public Members

`lv_color_hsv_t` **hsv**

`lv_style_list_t` **style\_list**

`lv_point_t` **pos**

`uint8_t` **colored**

**struct** `lv_cpicker_ext_t::[anonymous]` **indic**

`uint32_t` **last\_click\_time**

`uint32_t` **last\_change\_time**

`lv_point_t` **last\_press\_point**

```
lv_cpicker_color_mode_t color_mode
uint8_t color_mode_fixed
lv_cpicker_type_t type
```

## Drop-down list (lv\_dropdown)

### Overview

The drop-down list allows the user to select one value from a list.

The drop-down list is closed by default and displays a single value or a predefined text. When activated (by click on the drop-down list), a list is created from which the user may select one option. When the user selects a new value, the list is deleted.

### Parts and Styles

The drop-down list's main part is called **LV\_DROPDOWN\_PART\_MAIN** which is a simple *lv\_obj* object. It uses all the typical background properties. *Pressed*, *Focused*, *Edited* etc. styles are also applied as usual.

The list, which is created when the main object is clicked, is an *Page*. Its background part can be referenced with **LV\_DROPDOWN\_PART\_LIST** and uses all the typical background properties for the rectangle itself and text properties for the options. To adjust the space between the options use the *text\_line\_space* style property. Padding values can be used to make some space on the edges.

The scrollable part of the page is hidden and its styles are always empty (so transparent with no padding).

The scrollbar can be referenced with **LV\_DROPDOWN\_PART\_SCRLBAR** and uses all the typical background properties.

The selected option can be referenced with **LV\_DROPDOWN\_PART\_SELECTED** and uses all the typical background properties. It will be used in its default state to draw a rectangle on the selected option, and in pressed state to draw a rectangle on the being pressed option.

### Usage

#### Overview

#### Set options

The options are passed to the drop-down list as a string with **lv\_dropdown\_set\_options(dropdown, options)**. The options should be separated by `\n`. For example: "First\nSecond\nThird". The string will be saved in the drop-down list, so it can be in a local variable too.

The **lv\_dropdown\_add\_option(dropdown, "New option", pos)** function inserts a new option to **pos** index.

To save memory the options can be set from a static(constant) string too with **lv\_dropdown\_set\_static\_options(dropdown, options)**. In this case the options string should be alive while the drop-down list exists and **lv\_dropdown\_add\_option** can't be used.

You can select an option manually with **lv\_dropdown\_set\_selected(dropdown, id)**, where *id* is the index of an option.

### Get selected option

The get the currently selected option, use `lv_dropdown_get_selected(dropdown)`. It will return the *index* of the selected option.

`lv_dropdown_get_selected_str(dropdown, buf, buf_size)` copies the name of the selected option to a `buf`.

### Direction

The list can be created on any side. The default `LV_DROPDOWN_DOWN` can be modified by `lv_dropdown_set_dir(dropdown, LV_DROPDOWN_DIR_LEFT/RIGHT/UP/DOWN)` function.

If the list would be vertically out of the screen, it will aligned to the edge.

### Symbol

A symbol (typically an arrow) can be added to the drop down list with `lv_dropdown_set_symbol(dropdown, LV_SYMBOL_...)`

If the direction of the drop-down list is `LV_DROPDOWN_DIR_LEFT` the symbol will be shown on the left, else on the right.

### Maximum height

The maximum height of drop-down list can be set via `lv_dropdown_set_max_height(dropdown, height)`. By default it's set to 3/4 vertical resolution.

### Show selected

The main part can either show the selected option or a static text. It can controlled with `lv_dropdown_set_show_selected(dropdown, true/false)`.

The static text can be set with `lv_dropdown_set_text(dropdown, "Text")`. Only the pointer of the text is saved.

### Animation time

The drop-down list's open/close animation time is adjusted by `lv_dropdown_set_anim_time(ddlist, anim_time)`. Zero animation time means no animation.

### Manually open/close

To manually open or close the drop-down list the `lv_dropdown_open/close(dropdown, LV_ANIM_ON/OFF)` function can be used.

## Events

Besides the [Generic events](#), the following [Special events](#) are sent by the drop-down list:

- **LV\_EVENT\_VALUE\_CHANGED** - Sent when the new option is selected.

Learn more about [Events](#).

## Keys


The following *Keys* are processed by the Buttons:

- **LV\_KEY\_RIGHT/DOWN** - Select the next option.
- **LV\_KEY\_LEFT/UP** - Select the previous option.
- **LV\_KEY\_ENTER** - Apply the selected option (Send **LV\_EVENT\_VALUE\_CHANGED** event and close the drop-down list).

## Example

### C

#### Simple Drop down list

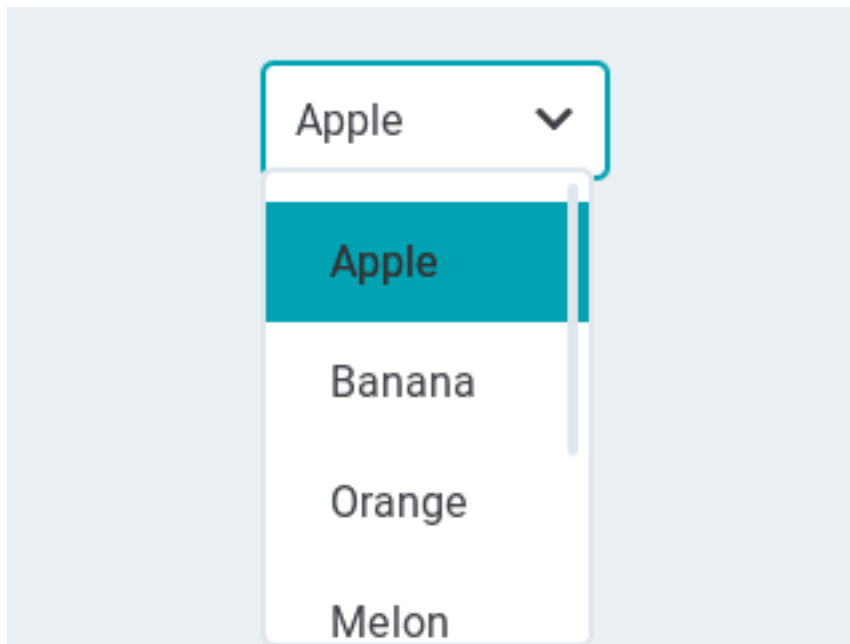

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_DROPDOWN
```

(continues on next page)

(continued from previous page)


```
static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        char buf[32];
        lv_dropdown_get_selected_str(obj, buf, sizeof(buf));
        printf("Option: %s\n", buf);
    }
}

void lv_ex_dropdown_1(void)
{
    /*Create a normal drop down list*/
    lv_obj_t * ddlist = lv_dropdown_create(lv_scr_act(), NULL);
    lv_dropdown_set_options(ddlist, "Apple\n"
        "Banana\n"
        "Orange\n"
        "Melon\n"
        "Grape\n"
        "Raspberry");

    lv_obj_align(ddlist, NULL, LV_ALIGN_IN_TOP_MID, 0, 20);
    lv_obj_set_event_cb(ddlist, event_handler);
}

#endif
```

### Drop “up” list

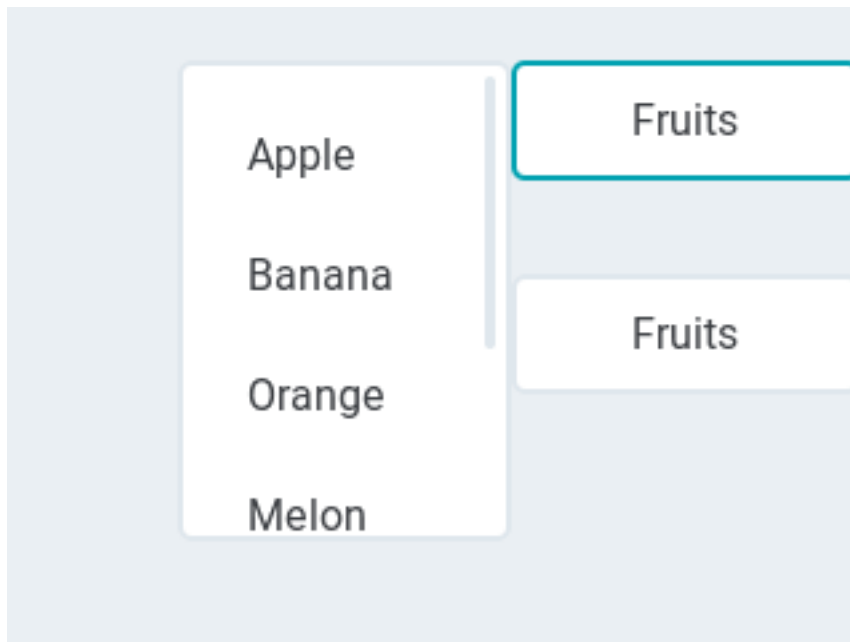

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_DROPDOWN

/**
 * Create a drop LEFT menu
 */
void lv_ex_dropdown_2(void)
{
    /*Create a drop down list*/
    lv_obj_t * ddlist = lv_dropdown_create(lv_scr_act(), NULL);
    lv_dropdown_set_options(ddlist, "Apple\n"
        "Banana\n"
        "Orange\n"
        "Melon\n"
        "Grape\n"
        "Raspberry");

    lv_dropdown_set_dir(ddlist, LV_DROPDOWN_DIR_LEFT);
    lv_dropdown_set_symbol(ddlist, NULL);
    lv_dropdown_set_show_selected(ddlist, false);
    lv_dropdown_set_text(ddlist, "Fruits");
    /*It will be called automatically when the size changes*/
    lv_obj_align(ddlist, NULL, LV_ALIGN_IN_TOP_RIGHT, 0, 20);

    /*Copy the drop LEFT list*/
    ddlist = lv_dropdown_create(lv_scr_act(), ddlist);
    lv_obj_align(ddlist, NULL, LV_ALIGN_IN_TOP_RIGHT, 0, 100);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_dropdown_dir_t
typedef uint8_t lv_dropdown_part_t
```

### Enums

```
enum [anonymous]
    Values:
        LV_DROPDOWN_DIR_DOWN
        LV_DROPDOWN_DIR_UP
        LV_DROPDOWN_DIR_LEFT
```

## LV\_DROPDOWN\_DIR\_RIGHT

**enum** [anonymous]

*Values:*

**LV\_DROPDOWN\_PART\_MAIN** = *LV\_OBJ\_PART\_MAIN*

**LV\_DROPDOWN\_PART\_LIST** = *\_LV\_OBJ\_PART\_REAL\_LAST*

**LV\_DROPDOWN\_PART\_SCROLLBAR**

**LV\_DROPDOWN\_PART\_SELECTED**

## Functions

*lv\_obj\_t* \***lv\_dropdown\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)

Create a drop down list objects

**Return** pointer to the created drop down list

### Parameters

- **par**: pointer to an object, it will be the parent of the new drop down list
- **copy**: pointer to a drop down list object, if not NULL then the new object will be copied from it

**void** **lv\_dropdown\_set\_text**(*lv\_obj\_t* \*ddlist, **const** char \*txt)

Set text of the ddlist (Displayed on the button if **show\_selected** = **false**)

### Parameters

- **ddlist**: pointer to a drop down list object
- **txt**: the text as a string (Only it's pointer is saved)

**void** **lv\_dropdown\_clear\_options**(*lv\_obj\_t* \*ddlist)

Clear any options in a drop down list. Static or dynamic.

### Parameters

- **ddlist**: pointer to drop down list object

**void** **lv\_dropdown\_set\_options**(*lv\_obj\_t* \*ddlist, **const** char \*options)

Set the options in a drop down list from a string

### Parameters

- **ddlist**: pointer to drop down list object
- **options**: a string with " separated options. E.g. "One\nTwo\nThree" The options string can be destroyed after calling this function

**void** **lv\_dropdown\_set\_static\_options**(*lv\_obj\_t* \*ddlist, **const** char \*options)

Set the options in a drop down list from a string

### Parameters

- **ddlist**: pointer to drop down list object
- **options**: a static string with " separated options. E.g. "One\nTwo\nThree"

**void** **lv\_dropdown\_add\_option**(*lv\_obj\_t* \*ddlist, **const** char \*option, uint16\_t pos)

Add an options to a drop down list from a string. Only works for dynamic options.

### Parameters



- **ddlist**: pointer to drop down list object
- **option**: a string without " . E.g. "Four"
- **pos**: the insert position, indexed from 0, LV\_DROPDOWN\_POS\_LAST = end of string

void **lv\_dropdown\_set\_selected**(*lv\_obj\_t* \*ddlist, uint16\_t sel\_opt)

Set the selected option

#### Parameters

- **ddlist**: pointer to drop down list object
- **sel\_opt**: id of the selected option (0 ...number of option - 1);

void **lv\_dropdown\_set\_dir**(*lv\_obj\_t* \*ddlist, *lv\_dropdown\_dir\_t* dir)

Set the direction of the a drop down list

#### Parameters

- **ddlist**: pointer to a drop down list object
- **dir**: LV\_DROPDOWN\_DIR\_LEF/RIGHT/TOP/BOTTOM

void **lv\_dropdown\_set\_max\_height**(*lv\_obj\_t* \*ddlist, lv\_coord\_t h)

Set the maximal height for the drop down list

#### Parameters

- **ddlist**: pointer to a drop down list
- **h**: the maximal height

void **lv\_dropdown\_set\_symbol**(*lv\_obj\_t* \*ddlist, const char \*symbol)

Set an arrow or other symbol to display when the drop-down list is closed.

#### Parameters

- **ddlist**: pointer to drop down list object
- **symbol**: a text like LV\_SYMBOL\_DOWN or NULL to not draw icon

void **lv\_dropdown\_set\_show\_selected**(*lv\_obj\_t* \*ddlist, bool show)

Set whether the ddlist highlight the last selected option and display its text or not

#### Parameters

- **ddlist**: pointer to a drop down list object
- **show**: true/false

const char \***lv\_dropdown\_get\_text**(*lv\_obj\_t* \*ddlist)

Get text of the ddlist (Displayed on the button if show\_selected = false)

**Return** the text string

#### Parameters

- **ddlist**: pointer to a drop down list object

const char \***lv\_dropdown\_get\_options**(const *lv\_obj\_t* \*ddlist)

Get the options of a drop down list

**Return** the options separated by " -s (E.g. "Option1\nOption2\nOption3" )

#### Parameters

- **ddlist**: pointer to drop down list object

uint16\_t **lv\_dropdown\_get\_selected**(const lv\_obj\_t \*ddlist)

Get the selected option

**Return** id of the selected option (0 ...number of option - 1);

**Parameters**

- ddlist: pointer to drop down list object

uint16\_t **lv\_dropdown\_get\_option\_cnt**(const lv\_obj\_t \*ddlist)

Get the total number of options

**Return** the total number of options in the list

**Parameters**

- ddlist: pointer to drop down list object

void **lv\_dropdown\_get\_selected\_str**(const lv\_obj\_t \*ddlist, char \*buf, uint16\_t buf\_size)

Get the current selected option as a string

**Parameters**

- ddlist: pointer to ddlist object
- buf: pointer to an array to store the string
- buf\_size: size of buf in bytes. 0: to ignore it.

lv\_coord\_t **lv\_dropdown\_get\_max\_height**(const lv\_obj\_t \*ddlist)

Get the fix height value.

**Return** the height if the ddlist is opened (0: auto size)

**Parameters**

- ddlist: pointer to a drop down list object

const char \***lv\_dropdown\_get\_symbol**(lv\_obj\_t \*ddlist)

Get the symbol to draw when the drop-down list is closed

**Return** the symbol or NULL if not enabled

**Parameters**

- ddlist: pointer to drop down list object

lv\_dropdown\_dir\_t **lv\_dropdown\_get\_dir**(const lv\_obj\_t \*ddlist)

Get the symbol to draw when the drop-down list is closed

**Return** the symbol or NULL if not enabled

**Parameters**

- ddlist: pointer to drop down list object

bool **lv\_dropdown\_get\_show\_selected**(lv\_obj\_t \*ddlist)

Get whether the ddlist highlight the last selected option and display its text or not

**Return** true/false

**Parameters**

- ddlist: pointer to a drop down list object

void **lv\_dropdown\_open**(lv\_obj\_t \*ddlist)

Open the drop down list with or without animation

**Parameters**

- **ddlist**: pointer to drop down list object

void **lv\_dropdown\_close**(*lv\_obj\_t* \*ddlist)  
Close (Collapse) the drop down list

#### Parameters

- **ddlist**: pointer to drop down list object
- **anim\_en**: LV\_ANIM\_ON: use animation; LV\_ANOM\_OFF: not use animations

**struct lv\_dropdown\_ext\_t**

#### Public Members

*lv\_obj\_t* \***page**  
**const** char \***text**  
**const** char \***symbol**  
char \***options**  
*lv\_style\_list\_t* **style\_selected**  
*lv\_style\_list\_t* **style\_page**  
*lv\_style\_list\_t* **style\_scrlbar**  
*lv\_coord\_t* **max\_height**  
*uint16\_t* **option\_cnt**  
*uint16\_t* **sel\_opt\_id**  
*uint16\_t* **sel\_opt\_id\_orig**  
*uint16\_t* **pr\_opt\_id**  
*lv\_dropdown\_dir\_t* **dir**  
*uint8\_t* **show\_selected**  
*uint8\_t* **static\_txt**

### Gauge (lv\_gauge)

#### Overview

The gauge is a meter with scale labels and one or more needles.

#### Parts and Styles

The Gauge’ s main part is called **LV\_GAUGE\_PART\_MAIN**. It draws a background using the typical background style properties and “minor” scale lines using the *line* and *scale* style properties. It also uses the *text* properties to set the style of the scale labels. *pad\_inner* is used to set space between the scale lines and the scale labels.

**LV\_GAUGE\_PART\_MAJOR** is a virtual part which describes the major scale lines (where labels are added) using the *line* and *scale* style properties.

**LV\_GAUGE\_PART\_NEEDLE** is also virtual part and it describes the needle(s) via the *line* style properties. *size* and the typical background properties are used to describe a rectangle (or circle) in the picot point of the needle(s). *pad\_inner* is used to make the needle(s) smaller than the outer radius of the scale lines.

## Usage

### Set value and needles

The gauge can show more than one needle. Use the `lv_gauge_set_needle_count(gauge, needle_num, color_array)` function to set the number of needles and an array with colors for each needle. The array must be static or global variable because only its pointer is stored.

You can use `lv_gauge_set_value(gauge, needle_id, value)` to set the value of a needle.

### Scale

You can use the `lv_gauge_set_scale(gauge, angle, line_num, label_cnt)` function to adjust the scale angle and the number of the scale lines and labels. The default settings are 220 degrees, 6 scale labels, and 21 lines.

The scale of the Gauge can have offset. It can be adjusted with `lv_gauge_set_angle_offset(gauge, angle)`.

### Range

The range of the gauge can be specified by `lv_gauge_set_range(gauge, min, max)`. The default range is 0..100.

### Critical value

To set a critical value, use `lv_gauge_set_critical_value(gauge, value)`. The scale color will be changed to *scale\_end\_color* after this value. The default critical value is 80.

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Simple Gauge

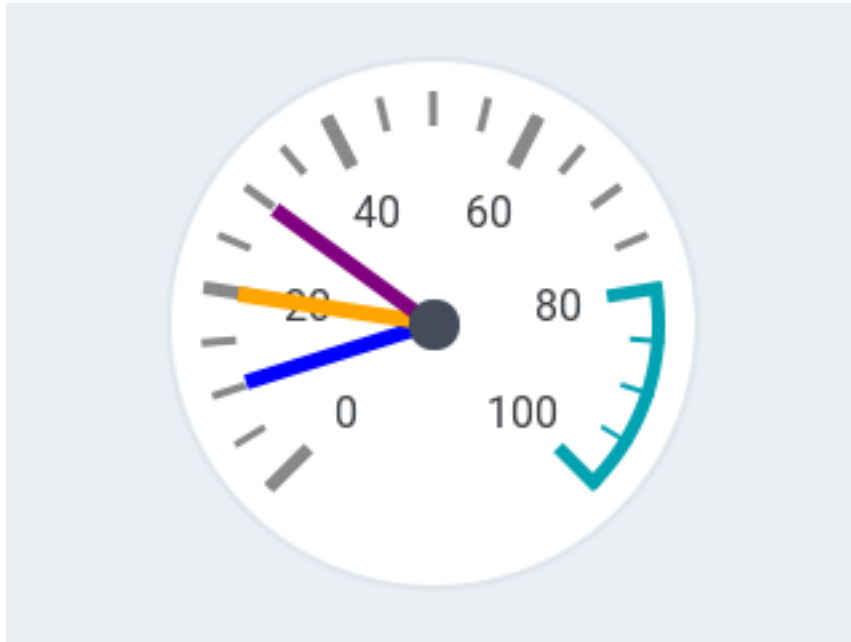

code

```
#include "lvgl/lvgl.h"
#if LV_USE_GAUGE

void lv_ex_gauge_1(void)
{
    /*Describe the color for the needles*/
    static lv_color_t needle_colors[3];
    needle_colors[0] = LV_COLOR_BLUE;
    needle_colors[1] = LV_COLOR_ORANGE;
    needle_colors[2] = LV_COLOR_PURPLE;

    LV_ASSERT_MEM_INTEGRITY();

    /*Create a gauge*/
    lv_obj_t * gauge1 = lv_gauge_create(lv_scr_act(), NULL);
    lv_gauge_set_needle_count(gauge1, 3, needle_colors);
    lv_obj_set_size(gauge1, 200, 200);
    lv_obj_align(gauge1, NULL, LV_ALIGN_CENTER, 0, 0);

    /*Set the values*/
    lv_gauge_set_value(gauge1, 0, 10);
    LV_ASSERT_MEM_INTEGRITY();
    lv_gauge_set_value(gauge1, 1, 20);
    LV_ASSERT_MEM_INTEGRITY();
}
```

(continues on next page)

(continued from previous page)

```
lv_gauge_set_value(gauge1, 2, 30);
LV_ASSERT_MEM_INTEGRITY();
}
#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef void (*lv_gauge_format_cb_t)(lv_obj_t *gauge, char buf[], int bufsize, int32_t value)
typedef uint8_t lv_gauge_style_t
```

### Enums

**enum** [anonymous]

*Values:*

```
LV_GAUGE_PART_MAIN = LV_LINEMETER_PART_MAIN
LV_GAUGE_PART_MAJOR = _LV_LINEMETER_PART_VIRTUAL_LAST
LV_GAUGE_PART_NEEDLE
_LV_GAUGE_PART_VIRTUAL_LAST = _LV_LINEMETER_PART_VIRTUAL_LAST
_LV_GAUGE_PART_REAL_LAST = _LV_LINEMETER_PART_REAL_LAST
```

### Functions

*lv\_obj\_t* \***lv\_gauge\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)

Create a gauge objects

**Return** pointer to the created gauge

#### Parameters

- **par**: pointer to an object, it will be the parent of the new gauge
- **copy**: pointer to a gauge object, if not NULL then the new object will be copied from it

**void** **lv\_gauge\_set\_needle\_count**(*lv\_obj\_t* \*gauge, uint8\_t needle\_cnt, **const** *lv\_color\_t* colors[])

Set the number of needles

#### Parameters

- **gauge**: pointer to gauge object
- **needle\_cnt**: new count of needles

- **colors**: an array of colors for needles (with ‘num’ elements)

void **lv\_gauge\_set\_value**(*lv\_obj\_t* \**gauge*, uint8\_t *needle\_id*, int32\_t *value*)  
 Set the value of a needle

#### Parameters

- **gauge**: pointer to a gauge
- **needle\_id**: the id of the needle
- **value**: the new value

static void **lv\_gauge\_set\_range**(*lv\_obj\_t* \**gauge*, int32\_t *min*, int32\_t *max*)  
 Set minimum and the maximum values of a gauge

#### Parameters

- **gauge**: pointer to the gauge object
- **min**: minimum value
- **max**: maximum value

static void **lv\_gauge\_set\_critical\_value**(*lv\_obj\_t* \**gauge*, int32\_t *value*)  
 Set a critical value on the scale. After this value ‘line.color’ scale lines will be drawn

#### Parameters

- **gauge**: pointer to a gauge object
- **value**: the critical value

void **lv\_gauge\_set\_scale**(*lv\_obj\_t* \**gauge*, uint16\_t *angle*, uint8\_t *line\_cnt*, uint8\_t *label\_cnt*)  
 Set the scale settings of a gauge

#### Parameters

- **gauge**: pointer to a gauge object
- **angle**: angle of the scale (0..360)
- **line\_cnt**: count of scale lines. To get a given “subdivision” lines between labels: **line\_cnt** = (sub\_div + 1) \* (label\_cnt - 1) + 1
- **label\_cnt**: count of scale labels.

static void **lv\_gauge\_set\_angle\_offset**(*lv\_obj\_t* \**gauge*, uint16\_t *angle*)  
 Set the set an offset for the gauge’s angles to rotate it.

#### Parameters

- **gauge**: pointer to a line meter object
- **angle**: angle offset (0..360), rotates clockwise

void **lv\_gauge\_set\_needle\_img**(*lv\_obj\_t* \**gauge*, const void \**img*, lv\_coord\_t *pivot\_x*, lv\_coord\_t *pivot\_y*)  
 Set an image to display as needle(s). The needle image should be horizontal and pointing to the right (--->).

#### Parameters

- **gauge**: pointer to a gauge object
- **img\_src**: pointer to an **lv\_img\_dsc\_t** variable or a path to an image (not an **lv\_img** object)

- **pivot\_x**: the X coordinate of rotation center of the image
- **pivot\_y**: the Y coordinate of rotation center of the image

void **lv\_gauge\_set\_formatter\_cb**(*lv\_obj\_t* \**gauge*, *lv\_gauge\_format\_cb\_t* *format\_cb*)  
Assign a function to format gauge values

**Parameters**

- **gauge**: pointer to a gauge object
- **format\_cb**: pointer to function of *lv\_gauge\_format\_cb\_t*

int32\_t **lv\_gauge\_get\_value**(const *lv\_obj\_t* \**gauge*, uint8\_t *needle*)  
Get the value of a needle

**Return** the value of the needle [min,max]

**Parameters**

- **gauge**: pointer to gauge object
- **needle**: the id of the needle

uint8\_t **lv\_gauge\_get\_needle\_count**(const *lv\_obj\_t* \**gauge*)  
Get the count of needles on a gauge

**Return** count of needles

**Parameters**

- **gauge**: pointer to gauge

static int32\_t **lv\_gauge\_get\_min\_value**(const *lv\_obj\_t* \**lmeter*)  
Get the minimum value of a gauge

**Return** the minimum value of the gauge

**Parameters**

- **gauge**: pointer to a gauge object

static int32\_t **lv\_gauge\_get\_max\_value**(const *lv\_obj\_t* \**lmeter*)  
Get the maximum value of a gauge

**Return** the maximum value of the gauge

**Parameters**

- **gauge**: pointer to a gauge object

static int32\_t **lv\_gauge\_get\_critical\_value**(const *lv\_obj\_t* \**gauge*)  
Get a critical value on the scale.

**Return** the critical value

**Parameters**

- **gauge**: pointer to a gauge object

uint8\_t **lv\_gauge\_get\_label\_count**(const *lv\_obj\_t* \**gauge*)  
Set the number of labels (and the thicker lines too)

**Return** count of labels

**Parameters**

- **gauge**: pointer to a gauge object



**static** uint16\_t **lv\_gauge\_get\_line\_count**(const lv\_obj\_t \*gauge)

Get the scale number of a gauge

**Return** number of the scale units

**Parameters**

- gauge: pointer to a gauge object

**static** uint16\_t **lv\_gauge\_get\_scale\_angle**(const lv\_obj\_t \*gauge)

Get the scale angle of a gauge

**Return** angle of the scale

**Parameters**

- gauge: pointer to a gauge object

**static** uint16\_t **lv\_gauge\_get\_angle\_offset**(lv\_obj\_t \*gauge)

Get the offset for the gauge.

**Return** angle offset (0..360)

**Parameters**

- gauge: pointer to a gauge object

**const** void \***lv\_gauge\_get\_needle\_img**(lv\_obj\_t \*gauge, **const** void \*img, lv\_coord\_t pivot\_x, lv\_coord\_t pivot\_y)

Get an image to display as needle(s).

**Return** pointer to an lv\_img\_dsc\_t variable or a path to an image (not an lv\_img object). NULL if not used.

**Parameters**

- gauge: pointer to a gauge object

lv\_coord\_t **lv\_gauge\_get\_needle\_img\_pivot\_x**(lv\_obj\_t \*gauge)

Get the X coordinate of the rotation center of the needle image

**Return** the X coordinate of rotation center of the image

**Parameters**

- gauge: pointer to a gauge object

lv\_coord\_t **lv\_gauge\_get\_needle\_img\_pivot\_y**(lv\_obj\_t \*gauge)

Get the Y coordinate of the rotation center of the needle image

**Return** the X coordinate of rotation center of the image

**Parameters**

- gauge: pointer to a gauge object

**struct** lv\_gauge\_ext\_t

**Public Members**

lv\_linemeter\_ext\_t lmeter

int32\_t \*values

**const** lv\_color\_t \*needle\_colors

**const** void \*needle\_img

```
lv_point_t needle_img_pivot
lv_style_list_t style_needle
lv_style_list_t style_strong
uint8_t needle_count
uint8_t label_count
lv_gauge_format_cb_t format_cb
```

## Image (lv\_img)

### Overview

*Images* are the basic object to display from the flash (as arrays) or externally as files. Images can display symbols (`LV_SYMBOL_...`) too.

Using the [Image decoder interface](#) custom image formats can be supported as well.

### Parts and Styles

The images has only a main part called `LV_IMG_PART_MAIN` which uses the typical background style properties to draw a background rectangle and the *image* properties. The padding values are used to make the background virtually larger. (It won't change the image's real size but the size modification is applied only during drawing)

### Usage

#### Image source

To provide maximum flexibility, the source of the image can be:

- a variable in the code (a C array with the pixels).
- a file stored externally (like on an SD card).
- a text with *Symbols*.

To set the source of an image, use `lv_img_set_src(img, src)`.

To generate a **pixel array** from a PNG, JPG or BMP image, use the [Online image converter tool](#) and set the converted image with its pointer: `lv_img_set_src(img1, &converted_img_var)`; To make the variable visible in the C file, you need to declare it with `LV_IMG_DECLARE(converted_img_var)`.

To use **external files**, you also need to convert the image files using the online converter tool but now you should select the binary Output format. You also need to use LittlevGL's file system module and register a driver with some functions for the basic file operation. Got to the [File system](#) to learn more. To set an image sourced from a file, use `lv_img_set_src(img, "S:folder1/my_img.bin")`.

You can set a **symbol** similarly to *Labels*. In this case, the image will be rendered as text according to the *font* specified in the style. It enables to use of light-weighted mono-color "letters" instead of real images. You can set symbol like `lv_img_set_src(img1, LV_SYMBOL_OK)`.

## Label as an image

Images and labels are sometimes used to convey the same thing. For example, to describe what a button does. Therefore, images and labels are somewhat interchangeable. To handle these images can even display texts by using `LV_SYMBOL_DUMMY` as the prefix of the text. For example, `lv_img_set_src(img, LV_SYMBOL_DUMMY "Some text")`.

## Transparency

The internal (variable) and external images support 2 transparency handling methods:

- **Chrome keying** - Pixels with `LV_COLOR_TRANSP` (*lv\_conf.h*) color will be transparent.
- **Alpha byte** - An alpha byte is added to every pixel.

## Palette and Alpha index

Besides *True color* (RGB) color format, the following formats are also supported:

- **Indexed** - Image has a palette.
- **Alpha indexed** - Only alpha values are stored.

These options can be selected in the font converter. To learn more about the color formats, read the *Images* section.

## Recolor

The images can be re-colored in run-time to any color according to the brightness of the pixels. It is very useful to show different states (selected, inactive, pressed, etc.) of an image without storing more versions of the same image. This feature can be enabled in the style by setting `img.intense` between `LV_OPA_TRANSP` (no recolor, value: 0) and `LV_OPA_COVER` (full recolor, value: 255). The default value is `LV_OPA_TRANSP` so this feature is disabled.

## Auto-size

It is possible to automatically set the size of the image object to the image source's width and height if enabled by the `lv_img_set_auto_size(image, true)` function. If *auto-size* is enabled, then when a new file is set, the object size is automatically changed. Later, you can modify the size manually. The *auto-size* is enabled by default if the image is not a screen.

## Mosaic

If the object size is greater than the image size in any directions, then the image will be repeated like a mosaic. It's a very useful feature to create a large image from only a very narrow source. For example, you can have a *300 x 1* image with a special gradient and set it as a wallpaper using the mosaic feature.

## Offset

With `lv_img_set_offset_x(img, x_ofs)` and `lv_img_set_offset_y(img, y_ofs)`, you can add some offset to the displayed image. It is useful if the object size is smaller than the image source size. Using the offset parameter a [Texture atlas](#) or a “running image” effect can be created by [Animating](#) the x or y offset.

## Transformations

Using the `lv_img_set_zoom(img, factor)` the images will be zoomed. Set `factor` to `256` or `LV_IMG_ZOOM_NONE` to disable zooming. A larger value enlarges the images (e.g. `512` double size), a smaller value shrinks it (e.g. `128` half size). Fractional scale works as well. E.g. `281` for 10% enlargement.

To rotate the image use `lv_img_set_angle(img, angle)`. Angle has 0.1 degree precision, so for 45.8° set 458.

By default, the pivot point of the rotation is the center of the image. It can be changed with `lv_img_set_pivot(img, pivot_x, pivot_y)`. `0;0` is the top left corner.

The quality of the transformation can be adjusted with `lv_img_set_antialias(img, true/false)`. With enabled anti-aliasing the transformations has a higher quality but they are slower.

The transformations require the whole image to be available. Therefore indexed images (`LV_IMG_CF_INDEXED...`), alpha only images (`LV_IMG_CF_ALPHA...`) or images from files can be transformed. In other words transformations work only on true color images stored as C array, or if a custom [Image decoder](#) returns the whole image.

Note that, the real coordinates of image object won't change during transformation. That is `lv_obj_get_width/height/x/y()` will returned the original, non-zoomed coordinates.

## Rotate

The images can be rotated with

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

## Image from variable and symbol

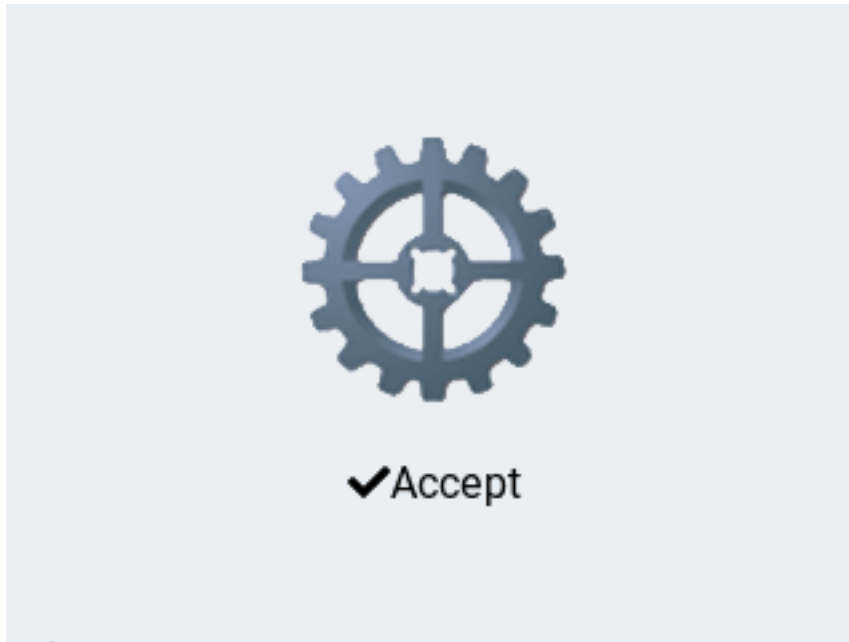

code

```
#include "lvgl/lvgl.h"
#if LV_USE_IMG


LV_IMG_DECLARE(img_cogwheel_argb);

void lv_ex_img_1(void)
{
    lv_obj_t * img1 = lv_img_create(lv_scr_act(), NULL);
    lv_img_set_src(img1, &img_cogwheel_argb);
    lv_obj_align(img1, NULL, LV_ALIGN_CENTER, 0, -20);

    lv_obj_t * img2 = lv_img_create(lv_scr_act(), NULL);
    lv_img_set_src(img2, LV_SYMBOL_OK "Accept");
    lv_obj_align(img2, img1, LV_ALIGN_OUT_BOTTOM_MID, 0, 20);
}

#endif
```

## Image recoloring

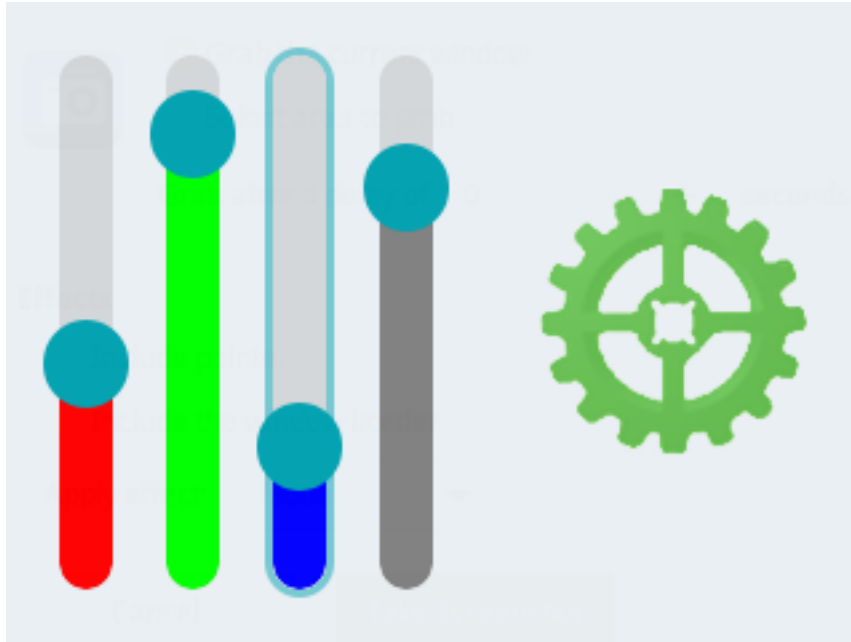

code

```
#include "lvgl/lvgl.h"
#if LV_USE_IMG

#define SLIDER_WIDTH 20

static void create_sliders(void);
static void slider_event_cb(lv_obj_t * slider, lv_event_t event);

static lv_obj_t * red_slider, * green_slider, * blue_slider, * intense_slider;
static lv_obj_t * img1;
LV_IMG_DECLARE(img_cogwheel_argb);

void lv_ex_img_2(void)
{
    /*Create 4 sliders to adjust RGB color and re-color intensity*/
    create_sliders();

    /* Now create the actual image */
    img1 = lv_img_create(lv_scr_act(), NULL);
    lv_img_set_src(img1, &img_cogwheel_argb);
    lv_obj_align(img1, NULL, LV_ALIGN_IN_RIGHT_MID, -20, 0);
}

static void slider_event_cb(lv_obj_t * slider, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        /* Recolor the image based on the sliders' values */
        lv_color_t color = lv_color_make(lv_slider_get_value(red_slider), lv_slider_
        ↪ get_value(green_slider), lv_slider_get_value(blue_slider));
        lv_opa_t intense = lv_slider_get_value(intense_slider);
        lv_obj_set_style_local_image_recolor_opa(img1, LV_IMG_PART_MAIN, LV_STATE_
        ↪ DEFAULT, intense);
    }
}
```

(continues on next page)

(continued from previous page)

```

        lv_obj_set_style_local_image_recolor(img1, LV_IMG_PART_MAIN, LV_STATE_DEFAULT,
↪ color);
    }
}

static void create_sliders(void)
{
    /* Create a set of RGB sliders */
    /* Use the red one as a base for all the settings */
    red_slider = lv_slider_create(lv_scr_act(), NULL);
    lv_slider_set_range(red_slider, 0, 255);
    lv_obj_set_size(red_slider, SLIDER_WIDTH, 200); /* Be sure it's a vertical slider ↵
↪ */
    lv_obj_set_style_local_bg_color(red_slider, LV_SLIDER_PART_INDIC, LV_STATE_
↪ DEFAULT, LV_COLOR_RED);
    lv_obj_set_event_cb(red_slider, slider_event_cb);

    /* Copy it for the other three sliders */
    green_slider = lv_slider_create(lv_scr_act(), red_slider);
    lv_obj_set_style_local_bg_color(green_slider, LV_SLIDER_PART_INDIC, LV_STATE_
↪ DEFAULT, LV_COLOR_LIME);

    blue_slider = lv_slider_create(lv_scr_act(), red_slider);
    lv_obj_set_style_local_bg_color(blue_slider, LV_SLIDER_PART_INDIC, LV_STATE_
↪ DEFAULT, LV_COLOR_BLUE);

    intense_slider = lv_slider_create(lv_scr_act(), red_slider);
    lv_obj_set_style_local_bg_color(intense_slider, LV_SLIDER_PART_INDIC, LV_STATE_
↪ DEFAULT, LV_COLOR_GRAY);
    lv_slider_set_value(intense_slider, 255, LV_ANIM_OFF);

    lv_obj_align(red_slider, NULL, LV_ALIGN_IN_LEFT_MID, 20, 0);
    lv_obj_align(green_slider, red_slider, LV_ALIGN_OUT_RIGHT_MID, 20, 0);
    lv_obj_align(blue_slider, green_slider, LV_ALIGN_OUT_RIGHT_MID, 20, 0);
    lv_obj_align(intense_slider, blue_slider, LV_ALIGN_OUT_RIGHT_MID, 20, 0);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_img\_part\_t**

### Enums

**enum** [anonymous]  
*Values:*

## LV\_IMG\_PART\_MAIN

### Functions

*lv\_obj\_t* \***lv\_img\_create**(*lv\_obj\_t* \**par*, **const** *lv\_obj\_t* \**copy*)

Create an image objects

**Return** pointer to the created image

#### Parameters

- **par**: pointer to an object, it will be the parent of the new button
- **copy**: pointer to a image object, if not NULL then the new object will be copied from it

void **lv\_img\_set\_src**(*lv\_obj\_t* \**img*, **const** void \**src\_img*)

Set the pixel map to display by the image

#### Parameters

- **img**: pointer to an image object
- **data**: the image data

void **lv\_img\_set\_auto\_size**(*lv\_obj\_t* \**img*, bool *autosize\_en*)

Enable the auto size feature. If enabled the object size will be same as the picture size.

#### Parameters

- **img**: pointer to an image
- **en**: true: auto size enable, false: auto size disable

void **lv\_img\_set\_offset\_x**(*lv\_obj\_t* \**img*, lv\_coord\_t *x*)

Set an offset for the source of an image. so the image will be displayed from the new origin.

#### Parameters

- **img**: pointer to an image
- **x**: the new offset along x axis.

void **lv\_img\_set\_offset\_y**(*lv\_obj\_t* \**img*, lv\_coord\_t *y*)

Set an offset for the source of an image. so the image will be displayed from the new origin.

#### Parameters

- **img**: pointer to an image
- **y**: the new offset along y axis.

void **lv\_img\_set\_pivot**(*lv\_obj\_t* \**img*, lv\_coord\_t *pivot\_x*, lv\_coord\_t *pivot\_y*)

Set the rotation center of the image. The image will be rotated around this point

#### Parameters

- **img**: pointer to an image object
- **pivot\_x**: rotation center x of the image
- **pivot\_y**: rotation center y of the image

void **lv\_img\_set\_angle**(*lv\_obj\_t* \**img*, int16\_t *angle*)

Set the rotation angle of the image. The image will be rotated around the set pivot set by [lv\\_img\\_set\\_pivot\(\)](#)

#### Parameters



- **img**: pointer to an image object
- **angle**: rotation angle in degree with 0.1 degree resolution (0..3600: clock wise)

void **lv\_img\_set\_zoom**(*lv\_obj\_t* \*img, uint16\_t zoom)

Set the zoom factor of the image.

#### Parameters

- **img**: pointer to an image object
- **zoom**: the zoom factor.
  - 256 or LV\_ZOOM\_IMG\_NONE for no zoom
  - <256: scale down
  - >256 scale up
  - 128 half size
  - 512 double size

void **lv\_img\_set\_antialias**(*lv\_obj\_t* \*img, bool antialias)

Enable/disable anti-aliasing for the transformations (rotate, zoom) or not

#### Parameters

- **img**: pointer to an image object
- **antialias**: true: anti-aliased; false: not anti-aliased

const void \***lv\_img\_get\_src**(*lv\_obj\_t* \*img)

Get the source of the image

**Return** the image source (symbol, file name or C array)

#### Parameters

- **img**: pointer to an image object

const char \***lv\_img\_get\_file\_name**(const *lv\_obj\_t* \*img)

Get the name of the file set for an image

**Return** file name

#### Parameters

- **img**: pointer to an image

bool **lv\_img\_get\_auto\_size**(const *lv\_obj\_t* \*img)

Get the auto size enable attribute

**Return** true: auto size is enabled, false: auto size is disabled

#### Parameters

- **img**: pointer to an image

lv\_coord\_t **lv\_img\_get\_offset\_x**(*lv\_obj\_t* \*img)

Get the offset.x attribute of the img object.

**Return** offset.x value.

#### Parameters

- **img**: pointer to an image

`lv_coord_t lv_img_get_offset_y(lv_obj_t *img)`

Get the offset.y attribute of the img object.

**Return** offset.y value.

**Parameters**

- **img**: pointer to an image

`uint16_t lv_img_get_angle(lv_obj_t *img)`

Get the rotation angle of the image.

**Return** rotation angle in degree (0..359)

**Parameters**

- **img**: pointer to an image object

`void lv_img_get_pivot(lv_obj_t *img, lv_point_t *center)`

Get the rotation center of the image.

**Parameters**

- **img**: pointer to an image object
- **center**: rotation center of the image

`uint16_t lv_img_get_zoom(lv_obj_t *img)`

Get the zoom factor of the image.

**Return** zoom factor (256: no zoom)

**Parameters**

- **img**: pointer to an image object

`bool lv_img_get_antialias(lv_obj_t *img)`

Get whether the transformations (rotate, zoom) are anti-aliased or not

**Return** true: anti-aliased; false: not anti-aliased

**Parameters**

- **img**: pointer to an image object

**struct lv\_img\_ext\_t**

**Public Members**

**const void \*src**

**lv\_point\_t offset**

**lv\_coord\_t w**

**lv\_coord\_t h**

**uint16\_t angle**

**lv\_point\_t pivot**

**uint16\_t zoom**

**uint8\_t src\_type**

**uint8\_t auto\_size**

**uint8\_t cf**

uint8\_t **antialias**

## Image button (lv\_imgbtn)

### Overview

The Image button is very similar to the simple ‘Button’ object. The only difference is that, it displays user-defined images in each state instead of drawing a rectangle. Before reading this section, please read the [Button](#) section for better understanding.

### Parts and Styles

The Image button object has only a main part called `LV_IMG_BTN_PART_MAIN` from where all *image* style properties are used. It’s possible to recolor the image in each state with *image\_recolor* and *image\_recolor\_opa* properties. For example, to make the image darker if it is pressed.

### Usage

#### Image sources

To set the image in a state, use the `lv_imgbtn_set_src(imgbtn, LV_BTN_STATE_..., &img_src)`. The image sources works the same as described in the *Image object* except that, “Symbols” are not supported by the Image button.

If `LV_IMGBTN_TILED` is enabled in *lv\_conf.h*, then `lv_imgbtn_set_src_tiled(imgbtn, LV_BTN_STATE_..., &img_src_left, &img_src_mid, &img_src_right)` becomes available. Using the tiled feature the *middle* image will be repeated to fill the width of the object. Therefore with `LV_IMGBTN_TILED`, you can set the width of the Image button using `lv_obj_set_width()`. However, without this option, the width will be always the same as the image source’s width.

#### Button features

Similarly to normal Buttons `lv_imgbtn_set_checkable(imgbtn, true/false)`, `lv_imgbtn_toggle(imgbtn)` and `lv_imgbtn_set_state(imgbtn, LV_BTN_STATE_...)` also works.

### Events

Beside the [Generic events](#), the following [Special events](#) are sent by the buttons:

- **LV\_EVENT\_VALUE\_CHANGED** - Sent when the button is toggled.

Note that, the generic input device related events (like `LV_EVENT_PRESSED`) are sent in the inactive state too. You need to check the state with `lv_btn_get_state(btn)` to ignore the events from inactive buttons.

Learn more about [Events](#).

## Keys

The following *Keys* are processed by the Buttons:

- **LV\_KEY\_RIGHT/UP** - Go to toggled state if toggling is enabled.
- **LV\_KEY\_LEFT/DOWN** - Go to non-toggled state if toggling is enabled.


Note that, as usual, the state of **LV\_KEY\_ENTER** is translated to **LV\_EVENT\_PRESSED/PRESSING/RELEASED** etc.

Learn more about *Keys*.

## Example

### C

#### Simple Image button

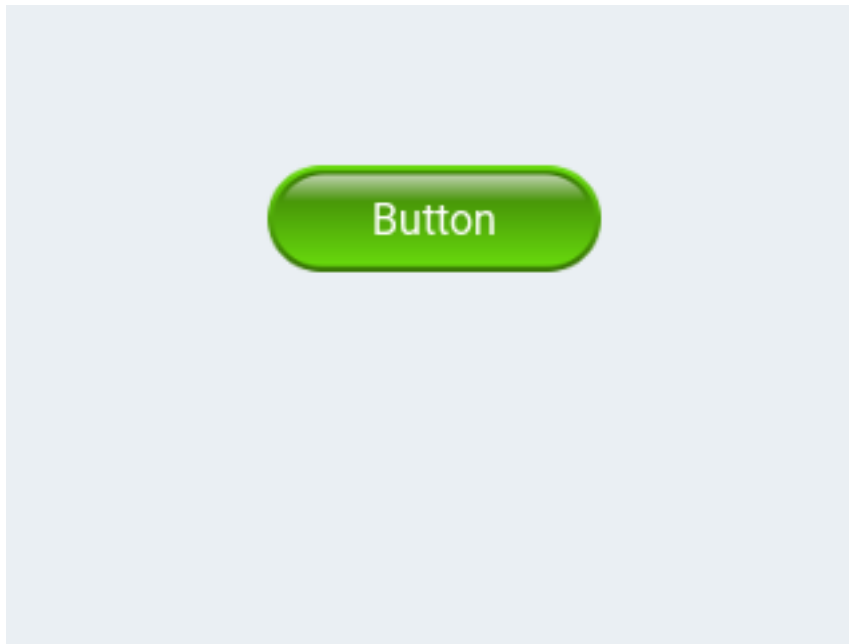

code

```
#include "lvgl/lvgl.h"
#if LV_USE_IMGBTN

void lv_ex_imgbtn_1(void)
{
    LV_IMG_DECLARE(imgbtn_green);
    LV_IMG_DECLARE(imgbtn_blue);

    /*Darken the button when pressed*/
    static lv_style_t style;
    lv_style_init(&style);
    lv_style_set_image_recolor_opa(&style, LV_STATE_PRESSED, LV_OPA_30);
}
```

(continues on next page)

(continued from previous page)

```

lv_style_set_image_recolor(&style, LV_STATE_PRESSED, LV_COLOR_BLACK);
lv_style_set_text_color(&style, LV_STATE_DEFAULT, LV_COLOR_WHITE);

/*Create an Image button*/
lv_obj_t * imgbtn1 = lv_imgbtn_create(lv_scr_act(), NULL);
lv_imgbtn_set_src(imgbtn1, LV_BTN_STATE_RELEASED, &imgbtn_green);
lv_imgbtn_set_src(imgbtn1, LV_BTN_STATE_PRESSED, &imgbtn_green);
lv_imgbtn_set_src(imgbtn1, LV_BTN_STATE_CHECKED_RELEASED, &imgbtn_blue);
lv_imgbtn_set_src(imgbtn1, LV_BTN_STATE_CHECKED_PRESSED, &imgbtn_blue);
lv_imgbtn_set_checkable(imgbtn1, true);
lv_obj_add_style(imgbtn1, LV_IMGBTN_PART_MAIN, &style);
lv_obj_align(imgbtn1, NULL, LV_ALIGN_CENTER, 0, -40);

/*Create a label on the Image button*/
lv_obj_t * label = lv_label_create(imgbtn1, NULL);
lv_label_set_text(label, "Button");
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_imgbtn_part_t
```

### Enums

```
enum [anonymous]
```

Values:

```
LV_IMGBTN_PART_MAIN = LV_BTN_PART_MAIN
```

### Functions

```
lv_obj_t *lv_imgbtn_create(lv_obj_t *par, const lv_obj_t *copy)
```

Create a image button objects

**Return** pointer to the created image button

**Parameters**

- **par**: pointer to an object, it will be the parent of the new image button
- **copy**: pointer to a image button object, if not NULL then the new object will be copied from it

```
void lv_imgbtn_set_src(lv_obj_t *imgbtn, lv_btn_state_t state, const void *src)
```

Set images for a state of the image button

#### Parameters

- **imgbtn**: pointer to an image button object
- **state**: for which state set the new image (from `lv_btn_state_t`) ‘
- **src**: pointer to an image source (a C array or path to a file)

void **lv\_imgbtn\_set\_src\_tiled**(*lv\_obj\_t* \*imgbtn, *lv\_btn\_state\_t* state, **const** void \*src\_left, **const** void \*src\_mid, **const** void \*src\_right)

Set images for a state of the image button

#### Parameters

- **imgbtn**: pointer to an image button object
- **state**: for which state set the new image (from `lv_btn_state_t`) ‘
- **src\_left**: pointer to an image source for the left side of the button (a C array or path to a file)
- **src\_mid**: pointer to an image source for the middle of the button (ideally 1px wide) (a C array or path to a file)
- **src\_right**: pointer to an image source for the right side of the button (a C array or path to a file)

**static** void **lv\_imgbtn\_set\_checkable**(*lv\_obj\_t* \*imgbtn, bool tgl)

Enable the toggled states. On release the button will change from/to toggled state.

#### Parameters

- **imgbtn**: pointer to an image button object
- **tgl**: true: enable toggled states, false: disable

**static** void **lv\_imgbtn\_set\_state**(*lv\_obj\_t* \*imgbtn, *lv\_btn\_state\_t* state)

Set the state of the image button

#### Parameters

- **imgbtn**: pointer to an image button object
- **state**: the new state of the button (from `lv_btn_state_t` enum)

**static** void **lv\_imgbtn\_toggle**(*lv\_obj\_t* \*imgbtn)

Toggle the state of the image button (ON->OFF, OFF->ON)

#### Parameters

- **imgbtn**: pointer to a image button object

**const** void \***lv\_imgbtn\_get\_src**(*lv\_obj\_t* \*imgbtn, *lv\_btn\_state\_t* state)

Get the images in a given state

**Return** pointer to an image source (a C array or path to a file)

#### Parameters

- **imgbtn**: pointer to an image button object
- **state**: the state where to get the image (from `lv_btn_state_t`) ‘

**const** void \***lv\_imgbtn\_get\_src\_left**(*lv\_obj\_t* \*imgbtn, *lv\_btn\_state\_t* state)

Get the left image in a given state

**Return** pointer to the left image source (a C array or path to a file)

#### Parameters

- `imgbtn`: pointer to an image button object
- `state`: the state where to get the image (from `lv_btn_state_t`) ‘

**const** void \***lv\_imgbtn\_get\_src\_middle**(*lv\_obj\_t* \*imgbtn, *lv\_btn\_state\_t* state)

Get the middle image in a given state

**Return** pointer to the middle image source (a C array or path to a file)

**Parameters**

- `imgbtn`: pointer to an image button object
- `state`: the state where to get the image (from `lv_btn_state_t`) ‘

**const** void \***lv\_imgbtn\_get\_src\_right**(*lv\_obj\_t* \*imgbtn, *lv\_btn\_state\_t* state)

Get the right image in a given state

**Return** pointer to the left image source (a C array or path to a file)

**Parameters**

- `imgbtn`: pointer to an image button object
- `state`: the state where to get the image (from `lv_btn_state_t`) ‘

**static** *lv\_btn\_state\_t* **lv\_imgbtn\_get\_state**(**const** *lv\_obj\_t* \*imgbtn)

Get the current state of the image button

**Return** the state of the button (from `lv_btn_state_t` enum)

**Parameters**

- `imgbtn`: pointer to a image button object

**static** bool **lv\_imgbtn\_get\_checkable**(**const** *lv\_obj\_t* \*imgbtn)

Get the toggle enable attribute of the image button

**Return** ture: toggle enabled, false: disabled

**Parameters**

- `imgbtn`: pointer to a image button object

**struct** **lv\_imgbtn\_ext\_t**

**Public Members**

*lv\_btn\_ext\_t* **btn**

**const** void \***img\_src\_mid**[\_LV\_BTN\_STATE\_LAST]

**const** void \***img\_src\_left**[\_LV\_BTN\_STATE\_LAST]

**const** void \***img\_src\_right**[\_LV\_BTN\_STATE\_LAST]

*lv\_img\_cf\_t* **act\_cf**

uint8\_t **tiled**

## Keyboard (lv\_keyboard)

### Overview

The Keyboard object is a special *Button matrix* with predefined keymaps and other features to realize a virtual keyboard to write text.

### Parts and Styles

Similarly to Button matrices Keyboards consist of 2 part:

- **LV\_KEYBOARD\_PART\_BG** which is the main part and uses all the typical background properties
- **LV\_KEYBOARD\_PART\_BTN** which is virtual part for the buttons. It also uses all typical background properties and the *text* properties.

### Usage

#### Modes

The Keyboards have the following modes:

- **LV\_KEYBOARD\_MODE\_TEXT\_LOWER** - Display lower case letters
- **LV\_KEYBOARD\_MODE\_TEXT\_UPPER** - Display upper case letters
- **LV\_KEYBOARD\_MODE\_TEXT\_SPECIAL** - Display special characters
- **LV\_KEYBOARD\_MODE\_NUM** - Display numbers, +/- sign, and decimal dot.

The TEXT modes' layout contains buttons to change mode.

To set the mode manually, use `lv_keyboard_set_mode(kb, mode)`. The default mode is **LV\_KEYBOARD\_MODE\_TEXT\_UPPER**.

#### Assign Text area

You can assign a *Text area* to the Keyboard to automatically put the clicked characters there. To assign the text area, use `lv_keyboard_set_textarea(kb, ta)`.

The assigned text area's **cursor can be managed** by the keyboard: when the keyboard is assigned, the previous text area's cursor will be hidden and the new one will be shown. When the keyboard is closed by the *Ok* or *Close* buttons, the cursor also will be hidden. The cursor manager feature is enabled by `lv_keyboard_set_cursor_manage(kb, true)`. The default is not managed.

#### New Keymap

You can specify a new map (layout) for the keyboard with `lv_keyboard_set_map(kb, map)` and `lv_keyboard_set_ctrl_map(kb, ctrl_map)`. Learn more about the *Button matrix* object. Keep in mind that, using following keywords will have the same effect as with the original map:

- **LV\_SYMBOL\_OK** - Apply.
- **LV\_SYMBOL\_CLOSE** - Close.



- `LV_SYMBOL_BACKSPACE` - Delete on the left.
- `LV_SYMBOL_LEFT` - Move the cursor left.
- `LV_SYMBOL_RIGHT` - Move the cursor right.
- “`ABC`” - Load the uppercase map.
- “`abc`” - Load the lower case map.
- “`Enter`” - New line.

## Events

Besides the [Generic events](#), the following [Special events](#) are sent by the keyboards:

- **`LV_EVENT_VALUE_CHANGED`** - Sent when the button is pressed/released or repeated after long press. The event data is set to the ID of the pressed/released button.
- **`LV_EVENT_APPLY`** - The *Ok* button is clicked.
- **`LV_EVENT_CANCEL`** - The *Close* button is clicked.

The keyboard has a **default event handler** callback called `lv_keyboard_def_event_cb`. It handles the button pressing, map changing, the assigned text area, etc. You can completely replace it with your custom event handler however, you can call `lv_keyboard_def_event_cb` at the beginning of your event handler to handle the same things as before.

Learn more about [Events](#).

## Keys

The following *Keys* are processed by the buttons:


- **`LV_KEY_RIGHT/UP/LEFT/RIGHT`** - To navigate among the buttons and select one.
- **`LV_KEY_ENTER`** - To press/release the selected button.

Learn more about [Keys](#).

## Examples

### C

## Keyboard with text area

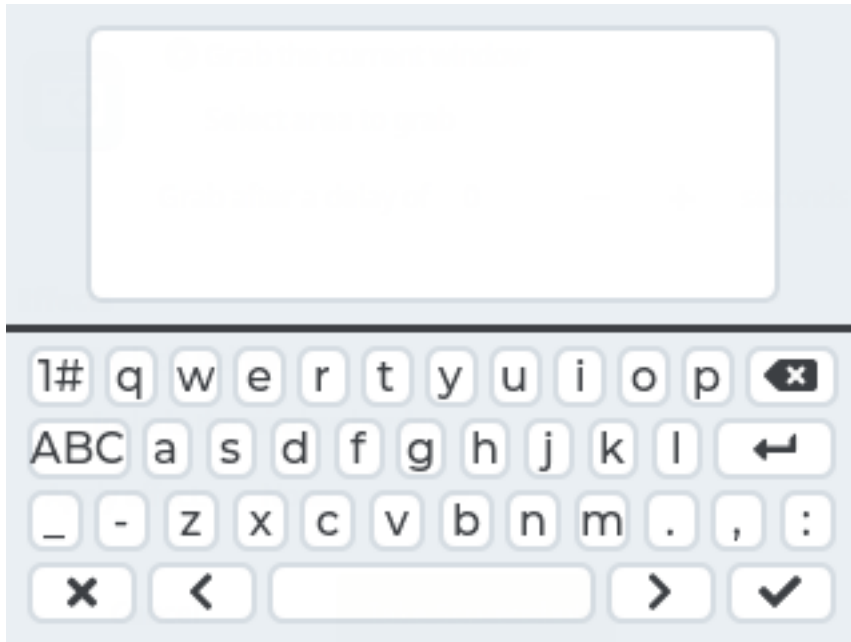

code

```
#include "lvgl/lvgl.h"
#if LV_USE_KEYBOARD

void lv_ex_keyboard_1(void)
{
    /*Create a keyboard and apply the styles*/
    lv_obj_t *kb = lv_keyboard_create(lv_scr_act(), NULL);
    lv_keyboard_set_cursor_manage(kb, true);

    /*Create a text area. The keyboard will write here*/
    lv_obj_t *ta = lv_textarea_create(lv_scr_act(), NULL);
    lv_obj_align(ta, NULL, LV_ALIGN_IN_TOP_MID, 0, LV_DPI / 16);
    lv_textarea_set_text(ta, "");
    lv_coord_t max_h = LV_VER_RES / 2 - LV_DPI / 8;
    if(lv_obj_get_height(ta) > max_h) lv_obj_set_height(ta, max_h);

    /*Assign the text area to the keyboard*/
    lv_keyboard_set_textarea(kb, ta);
}
#endif
```

## MicroPython

### Keyboard with text area

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_keyboard_mode_t
typedef uint8_t lv_keyboard_style_t
```

### Enums

```
enum [anonymous]
    Current keyboard mode.
    Values:
    LV_KEYBOARD_MODE_TEXT_LOWER
    LV_KEYBOARD_MODE_TEXT_UPPER
    LV_KEYBOARD_MODE_SPECIAL
    LV_KEYBOARD_MODE_NUM
enum [anonymous]
    Values:
    LV_KEYBOARD_PART_BG
    LV_KEYBOARD_PART_BTN
```

### Functions

```
lv_obj_t *lv_keyboard_create(lv_obj_t *par, const lv_obj_t *copy)
    Create a keyboard objects
```

**Return** pointer to the created keyboard

#### Parameters

- **par**: pointer to an object, it will be the parent of the new keyboard
- **copy**: pointer to a keyboard object, if not NULL then the new object will be copied from it

```
void lv_keyboard_set_textarea(lv_obj_t *kb, lv_obj_t *ta)
    Assign a Text Area to the Keyboard. The pressed characters will be put there.
```

#### Parameters

- **kb**: pointer to a Keyboard object
- **ta**: pointer to a Text Area object to write there

```
void lv_keyboard_set_mode(lv_obj_t *kb, lv_keyboard_mode_t mode)
    Set a new a mode (text or number map)
```

#### Parameters

- **kb**: pointer to a Keyboard object
- **mode**: the mode from 'lv\_keyboard\_mode\_t'

```
void lv_keyboard_set_cursor_manage(lv_obj_t *kb, bool en)
    Automatically hide or show the cursor of the current Text Area
```

### Parameters

- **kb**: pointer to a Keyboard object
- **en**: true: show cursor on the current text area, false: hide cursor

void **lv\_keyboard\_set\_map**(*lv\_obj\_t* \*kb, *lv\_keyboard\_mode\_t* mode, **const** char \*map[])

Set a new map for the keyboard

### Parameters

- **kb**: pointer to a Keyboard object
- **mode**: keyboard map to alter 'lv\_keyboard\_mode\_t'
- **map**: pointer to a string array to describe the map. See 'lv\_btnmatrix\_set\_map()' for more info.

void **lv\_keyboard\_set\_ctrl\_map**(*lv\_obj\_t* \*kb, *lv\_keyboard\_mode\_t* mode, **const** *lv\_btnmatrix\_ctrl\_t* ctrl\_map[])

Set the button control map (hidden, disabled etc.) for the keyboard. The control map array will be copied and so may be deallocated after this function returns.

### Parameters

- **kb**: pointer to a keyboard object
- **mode**: keyboard ctrl map to alter 'lv\_keyboard\_mode\_t'
- **ctrl\_map**: pointer to an array of *lv\_btn\_ctrl\_t* control bytes. See: *lv\_btnmatrix\_set\_ctrl\_map* for more details.

*lv\_obj\_t* \***lv\_keyboard\_get\_textarea**(**const** *lv\_obj\_t* \*kb)

Assign a Text Area to the Keyboard. The pressed characters will be put there.

**Return** pointer to the assigned Text Area object

### Parameters

- **kb**: pointer to a Keyboard object

*lv\_keyboard\_mode\_t* **lv\_keyboard\_get\_mode**(**const** *lv\_obj\_t* \*kb)

Set a new a mode (text or number map)

**Return** the current mode from 'lv\_keyboard\_mode\_t'

### Parameters

- **kb**: pointer to a Keyboard object

bool **lv\_keyboard\_get\_cursor\_manage**(**const** *lv\_obj\_t* \*kb)

Get the current cursor manage mode.

**Return** true: show cursor on the current text area, false: hide cursor

### Parameters

- **kb**: pointer to a Keyboard object

**static const** char \*\***lv\_keyboard\_get\_map\_array**(**const** *lv\_obj\_t* \*kb)

Get the current map of a keyboard

**Return** the current map

### Parameters

- **kb**: pointer to a keyboard object

void **lv\_keyboard\_def\_event\_cb**(*lv\_obj\_t \*kb, lv\_event\_t event*)

Default keyboard event to add characters to the Text area and change the map. If a custom **event\_cb** is added to the keyboard this function be called from it to handle the button clicks

#### Parameters

- **kb**: pointer to a keyboard
- **event**: the triggering event

**struct lv\_keyboard\_ext\_t**

#### Public Members

*lv\_btnmatrix\_ext\_t* **btnm**

*lv\_obj\_t \****ta**

*lv\_keyboard\_mode\_t* **mode**

uint8\_t **cursor\_mng**

## Label (**lv\_label**)

### Overview

A label is the basic object type that is used to display text.

### Parts and Styles

The label has only a main part, called **LV\_LABEL\_PART\_MAIN**. It uses all the typical background properties and the *text* properties. The padding values can be used to make the area for the text small in the related direction.

### Usage

#### Set text

You can set the text on a label at runtime with **lv\_label\_set\_text(label, "New text")**. It will allocate a buffer dynamically, and the provided string will be copied into that buffer. Therefore, you don't need to keep the text you pass to **lv\_label\_set\_text** in scope after that function returns.

With **lv\_label\_set\_text\_fmt(label, "Value: %d", 15)** **printf formatting** can be used to set the text.

Labels are able to show text from a **static character buffer** which is **\0**-terminated. To do so, use **lv\_label\_set\_static\_text(label, "Text")**. In this case, the text is not stored in the dynamic memory and the given buffer is used directly instead. This means that the array can't be a local variable which goes out of scope when the function exits. Constant strings are safe to use with **lv\_label\_set\_static\_text** (except when used with **LV\_LABEL\_LONG\_DOTS**, as it modifies the buffer in-place), as they are stored in ROM memory, which is always accessible.

You can also use a **raw array** as label text. The array doesn't have to be **\0** terminated. In this case, the text will be saved to the dynamic memory like with **lv\_label\_set\_text**. To set a raw character array, use the **lv\_label\_set\_array\_text(label, char\_array, size)** function.

## Line break

Line breaks are handled automatically by the label object. You can use `\n` to make a line break. For example: `"line1\nline2\n\nline4"`

## Long modes

By default, the width of the label object automatically expands to the text size. Otherwise, the text can be manipulated according to several long mode policies:

- **LV\_LABEL\_LONG\_EXPAND** - Expand the object size to the text size (Default)
- **LV\_LABEL\_LONG\_BREAK** - Keep the object width, break (wrap) the too long lines and expand the object height
- **LV\_LABEL\_LONG\_DOTS** - Keep the object size, break the text and write dots in the last line (not supported when using **lv\_label\_set\_static\_text**)
- **LV\_LABEL\_LONG\_SCROLL** - Keep the size and scroll the label back and forth
- **LV\_LABEL\_LONG\_SCROLL\_CIRC** - Keep the size and scroll the label circularly
- **LV\_LABEL\_LONG\_CROP** - Keep the size and crop the text out of it

You can specify the long mode with `lv_label_set_long_mode(label, LV_LABEL_LONG_...)`

It's important to note that, when a label is created and its text is set, the label's size already expanded to the text size. In addition with the default **LV\_LABEL\_LONG\_EXPAND**, *long mode* `lv_obj_set_width/height/size()` has no effect.

So you need to change the *long mode* first set the new *long mode* and then set the size with `lv_obj_set_width/height/size()`.

Another important note is that **LV\_LABEL\_LONG\_DOTS** manipulates the text buffer in-place in order to add/remove the dots. When `lv_label_set_text` or `lv_label_set_array_text` are used, a separate buffer is allocated and this implementation detail is unnoticed. This is not the case with `lv_label_set_static_text`! The buffer you pass to **lv\_label\_set\_static\_text** must be writable if you plan to use **LV\_LABEL\_LONG\_DOTS**.

## Text align

The lines of the text can be aligned to the left, right or center with `lv_label_set_align(label, LV_LABEL_ALIGN_LEFT/RIGHT/CENTER)`. Note that, it will align only the lines, not the label object itself.

Vertical alignment is not supported by the label itself; you should place the label inside a larger container and align the whole label object instead.

## Text recolor

In the text, you can use commands to recolor parts of the text. For example: `"Write a #ff0000 red# word"`. This feature can be enabled individually for each label by `lv_label_set_recolor()` function.

Note that, recoloring work only in a single line. Therefore, `\n` should not use in a recolored text or it should be wrapped by **LV\_LABEL\_LONG\_BREAK** else, the text in the new line won't be recolored.

## Very long texts

Lvgl can efficiently handle very long (> 40k characters) by saving some extra data (~12 bytes) to speed up drawing. To enable this feature, set `LV_LABEL_LONG_TXT_HINT 1` in *lv\_conf.h*.

## Symbols

The labels can display symbols alongside letters (or on their own). Read the [Font](#) section to learn more about the symbols.

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys

No [Keys](#) are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Label recoloring and scrolling



code

```
#include "lvgl/lvgl.h"
#if LV_USE_LABEL

void lv_ex_label_1(void)
{
    lv_obj_t * label1 = lv_label_create(lv_scr_act(), NULL);
    lv_label_set_long_mode(label1, LV_LABEL_LONG_BREAK);      /*Break the long lines*/
    lv_label_set_recolor(label1, true);                       /*Enable re-coloring by
↳ commands in the text*/
    lv_label_set_align(label1, LV_LABEL_ALIGN_CENTER);        /*Center aligned lines*/
    lv_label_set_text(label1, "#0000ff Re-color# #ff00ff words# #ff0000 of a# label "
                             "and wrap long text automatically.");
    lv_obj_set_width(label1, 150);
    lv_obj_align(label1, NULL, LV_ALIGN_CENTER, 0, -30);

    lv_obj_t * label2 = lv_label_create(lv_scr_act(), NULL);
    lv_label_set_long_mode(label2, LV_LABEL_LONG_SCROLL_CIRC); /*Circular scroll*/
    lv_obj_set_width(label2, 150);
    lv_label_set_text(label2, "It is a circularly scrolling text. ");
    lv_obj_align(label2, NULL, LV_ALIGN_CENTER, 0, 30);
}

#endif
```

## Text shadow



code

```
#include "lvgl/lvgl.h"
#if LV_USE_LABEL

void lv_ex_label_2(void)
{
```

(continues on next page)



(continued from previous page)

```

/* Create a style for the shadow*/
static lv_style_t label_shadow_style;
lv_style_init(&label_shadow_style);
lv_style_set_text_opa(&label_shadow_style, LV_STATE_DEFAULT, LV_OPA_50);
lv_style_set_text_color(&label_shadow_style, LV_STATE_DEFAULT, LV_COLOR_RED);

/*Create a label for the shadow first (it's in the background) */
lv_obj_t * shadow_label = lv_label_create(lv_scr_act(), NULL);
lv_obj_add_style(shadow_label, LV_LABEL_PART_MAIN, &label_shadow_style);

/* Create the main label */
lv_obj_t * main_label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(main_label, "A simple method to create\n"
                                "shadows on text\n"
                                "It even works with\n\n"
                                "newlines      and spaces.");

/*Set the same text for the shadow label*/
lv_label_set_text(shadow_label, lv_label_get_text(main_label));


/* Position the main label */
lv_obj_align(main_label, NULL, LV_ALIGN_CENTER, 0, 0);

/* Shift the second label down and to the right by 2 pixel */
lv_obj_align(shadow_label, main_label, LV_ALIGN_IN_TOP_LEFT, 1, 1);
}

#endif

```

## Align labels

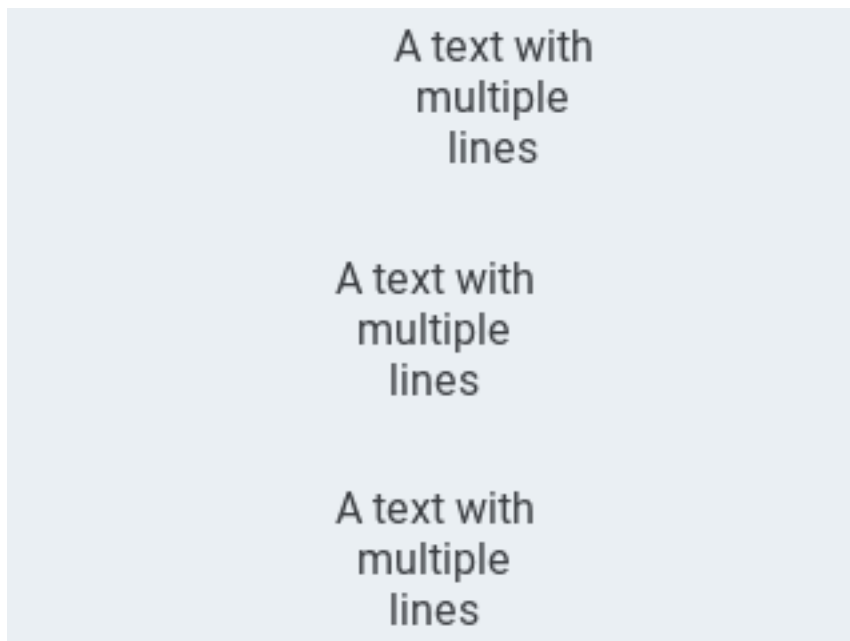

code

```

#include "lvgl/lvgl.h"
#if LV_USE_LABEL

static void text_changer(lv_task_t * t);

lv_obj_t * labels[3];

/**
 * Create three labels to demonstrate the alignments.
 */
void lv_ex_label_3(void)
{
    /*`lv_label_set_align` is not required to align the object itself.
     * It's used only when the text has multiple lines*/

    /* Create a label on the top.
     * No additional alignment so it will be the reference*/
    labels[0] = lv_label_create(lv_scr_act(), NULL);
    lv_obj_align(labels[0], NULL, LV_ALIGN_IN_TOP_MID, 0, 5);
    lv_label_set_align(labels[0], LV_LABEL_ALIGN_CENTER);

    /* Create a label in the middle.
     * `lv_obj_align` will be called every time the text changes
     * to keep the middle position */
    labels[1] = lv_label_create(lv_scr_act(), NULL);
    lv_obj_align(labels[1], NULL, LV_ALIGN_CENTER, 0, 0);
    lv_label_set_align(labels[1], LV_LABEL_ALIGN_CENTER);

    /* Create a label in the bottom.
     * Enable auto realign. */
    labels[2] = lv_label_create(lv_scr_act(), NULL);
    lv_obj_set_auto_realign(labels[2], true);
    lv_obj_align(labels[2], NULL, LV_ALIGN_IN_BOTTOM_MID, 0, -5);
    lv_label_set_align(labels[2], LV_LABEL_ALIGN_CENTER);

    lv_task_t * t = lv_task_create(text_changer, 1000, LV_TASK_PRIO_MID, NULL);
    lv_task_ready(t);
}

static void text_changer(lv_task_t * t)
{
    const char * texts[] = {"Text", "A very long text", "A text with\nmultiple\nlines", NULL};
    static uint8_t i = 0;

    lv_label_set_text(labels[0], texts[i]);
    lv_label_set_text(labels[1], texts[i]);
    lv_label_set_text(labels[2], texts[i]);

    /*Manually realign `labels[1]`*/
    lv_obj_align(labels[1], NULL, LV_ALIGN_CENTER, 0, 0);

    i++;
    if(texts[i] == NULL) i = 0;
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_label_long_mode_t
typedef uint8_t lv_label_align_t
typedef uint8_t lv_label_part_t
```

### Enums

```
enum [anonymous]
    Long mode behaviors. Used in 'lv_label_ext_t'

    Values:

    LV_LABEL_LONG_EXPAND
        Expand the object size to the text size

    LV_LABEL_LONG_BREAK
        Keep the object width, break the too long lines and expand the object height

    LV_LABEL_LONG_DOT
        Keep the size and write dots at the end if the text is too long

    LV_LABEL_LONG_SCROLL
        Keep the size and roll the text back and forth

    LV_LABEL_LONG_SCROLL_CIRC
        Keep the size and roll the text circularly

    LV_LABEL_LONG_CROP
        Keep the size and crop the text out of it

enum [anonymous]
    Label align policy

    Values:

    LV_LABEL_ALIGN_LEFT
        Align text to left

    LV_LABEL_ALIGN_CENTER
        Align text to center

    LV_LABEL_ALIGN_RIGHT
        Align text to right

    LV_LABEL_ALIGN_AUTO
        Use LEFT or RIGHT depending on the direction of the text (LTR/RTL)

enum [anonymous]
    Label styles

    Values:
```

## LV\_LABEL\_PART\_MAIN

### Functions

**LV\_EXPORT\_CONST\_INT**(LV\_LABEL\_DOT\_NUM)

**LV\_EXPORT\_CONST\_INT**(LV\_LABEL\_POS\_LAST)

**LV\_EXPORT\_CONST\_INT**(LV\_LABEL\_TEXT\_SEL\_OFF)

*lv\_obj\_t* \***lv\_label\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)

Create a label objects

**Return** pointer to the created button

#### Parameters

- **par**: pointer to an object, it will be the parent of the new label
- **copy**: pointer to a button object, if not NULL then the new object will be copied from it

void **lv\_label\_set\_text**(*lv\_obj\_t* \*label, **const** char \*text)

Set a new text for a label. Memory will be allocated to store the text by the label.

#### Parameters

- **label**: pointer to a label object
- **text**: ‘\0’ terminated character string. NULL to refresh with the current text.

void **lv\_label\_set\_text\_fmt**(*lv\_obj\_t* \*label, **const** char \*fmt, ...)

Set a new formatted text for a label. Memory will be allocated to store the text by the label.

#### Parameters

- **label**: pointer to a label object
- **fmt**: printf-like format

void **lv\_label\_set\_array\_text**(*lv\_obj\_t* \*label, **const** char \*array, uint16\_t size)

Set a new text for a label from a character array. The array don't has to be ‘\0’ terminated. Memory will be allocated to store the array by the label.

#### Parameters

- **label**: pointer to a label object
- **array**: array of characters or NULL to refresh the label
- **size**: the size of ‘array’ in bytes

void **lv\_label\_set\_static\_text**(*lv\_obj\_t* \*label, **const** char \*text)

Set a static text. It will not be saved by the label so the ‘text’ variable has to be ‘alive’ while the label exist.

#### Parameters

- **label**: pointer to a label object
- **text**: pointer to a text. NULL to refresh with the current text.

void **lv\_label\_set\_long\_mode**(*lv\_obj\_t* \*label, *lv\_label\_long\_mode\_t* long\_mode)

Set the behavior of the label with longer text then the object size

#### Parameters

- **label**: pointer to a label object

- **long\_mode:** the new mode from ‘lv\_label\_long\_mode’ enum. In LV\_LONG\_BREAK/LONG/ROLL the size of the label should be set AFTER this function

void **lv\_label\_set\_align**(*lv\_obj\_t* \*label, *lv\_label\_align\_t* align)  
Set the align of the label (left or center)

**Parameters**

- **label:** pointer to a label object
- **align:** ‘LV\_LABEL\_ALIGN\_LEFT’ or ‘LV\_LABEL\_ALIGN\_RIGHT’

void **lv\_label\_set\_recolor**(*lv\_obj\_t* \*label, bool en)  
Enable the recoloring by in-line commands

**Parameters**

- **label:** pointer to a label object
- **en:** true: enable recoloring, false: disable

void **lv\_label\_set\_anim\_speed**(*lv\_obj\_t* \*label, uint16\_t anim\_speed)  
Set the label’s animation speed in LV\_LABEL\_LONG\_SCROLL/SCROLL\_CIRC modes

**Parameters**

- **label:** pointer to a label object
- **anim\_speed:** speed of animation in px/sec unit

void **lv\_label\_set\_text\_sel\_start**(*lv\_obj\_t* \*label, uint16\_t index)  
Set the selection start index.

**Parameters**

- **label:** pointer to a label object.
- **index:** index to set. LV\_LABEL\_TXT\_SEL\_OFF to select nothing.

void **lv\_label\_set\_text\_sel\_end**(*lv\_obj\_t* \*label, uint16\_t index)  
Set the selection end index.

**Parameters**

- **label:** pointer to a label object.
- **index:** index to set. LV\_LABEL\_TXT\_SEL\_OFF to select nothing.

char \***lv\_label\_get\_text**(const *lv\_obj\_t* \*label)  
Get the text of a label

**Return** the text of the label

**Parameters**

- **label:** pointer to a label object

*lv\_label\_long\_mode\_t* **lv\_label\_get\_long\_mode**(const *lv\_obj\_t* \*label)  
Get the long mode of a label

**Return** the long mode

**Parameters**

- **label:** pointer to a label object

*lv\_label\_align\_t* **lv\_label\_get\_align**(const *lv\_obj\_t* \*label)

Get the align attribute

**Return** LV\_LABEL\_ALIGN\_LEFT or LV\_LABEL\_ALIGN\_CENTER

**Parameters**

- **label**: pointer to a label object

bool **lv\_label\_get\_recolor**(const *lv\_obj\_t* \*label)

Get the recoloring attribute

**Return** true: recoloring is enabled, false: disable

**Parameters**

- **label**: pointer to a label object

uint16\_t **lv\_label\_get\_anim\_speed**(const *lv\_obj\_t* \*label)

Get the label's animation speed in LV\_LABEL\_LONG\_ROLL and SCROLL modes

**Return** speed of animation in px/sec unit

**Parameters**

- **label**: pointer to a label object

void **lv\_label\_get\_letter\_pos**(const *lv\_obj\_t* \*label, uint16\_t index, lv\_point\_t \*pos)

Get the relative x and y coordinates of a letter

**Parameters**

- **label**: pointer to a label object
- **index**: index of the letter [0 ...text length]. Expressed in character index, not byte index (different in UTF-8)
- **pos**: store the result here (E.g. index = 0 gives 0;0 coordinates)

uint16\_t **lv\_label\_get\_letter\_on**(const *lv\_obj\_t* \*label, lv\_point\_t \*pos)

Get the index of letter on a relative point of a label

**Return** the index of the letter on the 'pos\_p' point (E.g. on 0;0 is the 0. letter) Expressed in character index and not byte index (different in UTF-8)

**Parameters**

- **label**: pointer to label object
- **pos**: pointer to point with coordinates on a the label

bool **lv\_label\_is\_char\_under\_pos**(const *lv\_obj\_t* \*label, lv\_point\_t \*pos)

Check if a character is drawn under a point.

**Return** whether a character is drawn under the point

**Parameters**

- **label**: Label object
- **pos**: Point to check for characte under

uint16\_t **lv\_label\_get\_text\_sel\_start**(const *lv\_obj\_t* \*label)

Get the selection start index.

**Return** selection start index. LV\_LABEL\_TXT\_SEL\_OFF if nothing is selected.

**Parameters**

- **label**: pointer to a label object.

uint16\_t **lv\_label\_get\_text\_sel\_end**(const lv\_obj\_t \*label)

Get the selection end index.

**Return** selection end index. LV\_LABEL\_TXT\_SEL\_OFF if nothing is selected.

#### Parameters

- **label**: pointer to a label object.

lv\_style\_list\_t \***lv\_label\_get\_style**(lv\_obj\_t \*label, uint8\_t type)

void **lv\_label\_ins\_text**(lv\_obj\_t \*label, uint32\_t pos, const char \*txt)

Insert a text to the label. The label text can not be static.

#### Parameters

- **label**: pointer to a label object
- **pos**: character index to insert. Expressed in character index and not byte index (Different in UTF-8) 0: before first char. LV\_LABEL\_POS\_LAST: after last char.
- **txt**: pointer to the text to insert

void **lv\_label\_cut\_text**(lv\_obj\_t \*label, uint32\_t pos, uint32\_t cnt)

Delete characters from a label. The label text can not be static.

#### Parameters

- **label**: pointer to a label object
- **pos**: character index to insert. Expressed in character index and not byte index (Different in UTF-8) 0: before first char.
- **cnt**: number of characters to cut

**struct lv\_label\_ext\_t**

#include <lv\_label.h> Data of label

#### Public Members

char \***text**

char \***tmp\_ptr**

char **tmp**[LV\_LABEL\_DOT\_NUM + 1]

**union** lv\_label\_ext\_t::[anonymous] **dot**

uint16\_t **dot\_end**

uint16\_t **anim\_speed**

lv\_point\_t **offset**

lv\_draw\_label\_hint\_t **hint**

uint16\_t **sel\_start**

uint16\_t **sel\_end**

lv\_label\_long\_mode\_t **long\_mode**

uint8\_t **static\_txt**

```
uint8_t align
uint8_t recolor
uint8_t expand
uint8_t dot_tmp_alloc
```

## LED (lv\_led)

### Overview

The LEDs are rectangle-like (or circle) object. It's brightness can be adjusted. With lower brightness the colors of the LED become darker.

### Parts and Styles

The LEDs have only one main part, called `LV_LED_PART_MAIN` and it uses all the typical background style properties.

### Usage

#### Brightness

You can set their brightness with `lv_led_set_bright(led, bright)`. The brightness should be between 0 (darkest) and 255 (lightest).

#### Toggle

Use `lv_led_on(led)` and `lv_led_off(led)` to set the brightness to a predefined ON or OFF value. The `lv_led_toggle(led)` toggles between the ON and OFF state.

### Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

### Keys

No *Keys* are processed by the object type.

Learn more about [Keys](#).



## Example

### C

#### LED with custom style



code

```
#include "lvgl/lvgl.h"
#if LV_USE_LED

void lv_ex_led_1(void)
{
    /*Create a LED and switch it OFF*/
    lv_obj_t * led1 = lv_led_create(lv_scr_act(), NULL);
    lv_obj_align(led1, NULL, LV_ALIGN_CENTER, -80, 0);
    lv_led_off(led1);

    /*Copy the previous LED and set a brightness*/
    lv_obj_t * led2 = lv_led_create(lv_scr_act(), led1);
    lv_obj_align(led2, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_led_set_bright(led2, 190);

    /*Copy the previous LED and switch it ON*/
    lv_obj_t * led3 = lv_led_create(lv_scr_act(), led1);
    lv_obj_align(led3, NULL, LV_ALIGN_CENTER, 80, 0);
    lv_led_on(led3);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_led_part_t
```

### Enums

**enum** [anonymous]

*Values:*

```
LV_LED_PART_MAIN = LV_OBJ_PART_MAIN
```

### Functions

```
lv_obj_t *lv_led_create(lv_obj_t *par, const lv_obj_t *copy)
```

Create a led objects

**Return** pointer to the created led

#### Parameters

- **par**: pointer to an object, it will be the parent of the new led
- **copy**: pointer to a led object, if not NULL then the new object will be copied from it

```
void lv_led_set_bright(lv_obj_t *led, uint8_t bright)
```

Set the brightness of a LED object

#### Parameters

- **led**: pointer to a LED object
- **bright**: LV\_LED\_BRIGHT\_MIN (max. dark) ... LV\_LED\_BRIGHT\_MAX (max. light)

```
void lv_led_on(lv_obj_t *led)
```

Light on a LED

#### Parameters

- **led**: pointer to a LED object

```
void lv_led_off(lv_obj_t *led)
```

Light off a LED

#### Parameters

- **led**: pointer to a LED object

```
void lv_led_toggle(lv_obj_t *led)
```

Toggle the state of a LED

#### Parameters

- **led**: pointer to a LED object

```
uint8_t lv_led_get_bright(const lv_obj_t *led)
```

Get the brightness of a LEd object

**Return** bright 0 (max. dark) ...255 (max. light)

**Parameters**

- led: pointer to LED object

```
struct lv_led_ext_t
```

**Public Members**

```
uint8_t bright
```

## Line (lv\_line)

### Overview

The Line object is capable of drawing straight lines between a set of points.

### Parts and Styles

The Line has only a main part, called `LV_LABEL_PART_MAIN`. It uses all the *line* style properties.

### Usage

#### Set points

The points has to be stored in an `lv_point_t` array and passed to the object by the `lv_line_set_points(lines, point_array, point_cnt)` function.

#### Auto-size

It is possible to automatically set the size of the line object according to its points. It can be enable with the `lv_line_set_auto_size(line, true)` function. If enabled then when the points are set the object's width and height will be changed according to the maximal x and y coordinates among the points. The *auto size* is enabled by default.

#### Invert y

By default, the  $y == 0$  point is in the top of the object. It might be counter-intuitive in some cases so the y coordinates can be inverted with `lv_line_set_y_invert(line, true)`. In this case,  $y == 0$  will be the bottom of the object. The *y invert* is disabled by default.

### Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys

No *Keys* are processed by the object type.

Learn more about *Keys*.

## Example

### C

#### Simple Line



code

```
#include "lvgl/lvgl.h"
#if LV_USE_LINE

void lv_ex_line_1(void)
{
    /*Create an array for the points of the line*/
    static lv_point_t line_points[] = { {5, 5}, {70, 70}, {120, 10}, {180, 60}, {240, 10} };

    /*Create style*/
    static lv_style_t style_line;
    lv_style_init(&style_line);
    lv_style_set_line_width(&style_line, LV_STATE_DEFAULT, 8);
    lv_style_set_line_color(&style_line, LV_STATE_DEFAULT, LV_COLOR_BLUE);
    lv_style_set_line_rounded(&style_line, LV_STATE_DEFAULT, true);

    /*Create a line and apply the new style*/
    lv_obj_t * line1;
```

(continues on next page)

(continued from previous page)

```

line1 = lv_line_create(lv_scr_act(), NULL);
lv_line_set_points(line1, line_points, 5);      /*Set the points*/
lv_obj_add_style(line1, LV_LINE_PART_MAIN, &style_line);    /*Set the points*/
lv_obj_align(line1, NULL, LV_ALIGN_CENTER, 0, 0);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_line\_style\_t**

### Enums

**enum** [anonymous]

*Values:*

**LV\_LINE\_PART\_MAIN**

### Functions

*lv\_obj\_t* \***lv\_line\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a line objects

**Return** pointer to the created line

#### Parameters

- **par**: pointer to an object, it will be the parent of the new line

void **lv\_line\_set\_points**(*lv\_obj\_t* \*line, const *lv\_point\_t* point\_a[], uint16\_t point\_num)

Set an array of points. The line object will connect these points.

#### Parameters

- **line**: pointer to a line object
- **point\_a**: an array of points. Only the address is saved, so the array can NOT be a local variable which will be destroyed
- **point\_num**: number of points in 'point\_a'

void **lv\_line\_set\_auto\_size**(*lv\_obj\_t* \*line, bool en)

Enable (or disable) the auto-size option. The size of the object will fit to its points. (set width to x max and height to y max)

#### Parameters

- **line**: pointer to a line object

- **en**: true: auto size is enabled, false: auto size is disabled

void **lv\_line\_set\_y\_invert**(*lv\_obj\_t* \*line, bool en)

Enable (or disable) the y coordinate inversion. If enabled then y will be subtracted from the height of the object, therefore the y=0 coordinate will be on the bottom.

#### Parameters

- **line**: pointer to a line object
- **en**: true: enable the y inversion, false:disable the y inversion

bool **lv\_line\_get\_auto\_size**(const *lv\_obj\_t* \*line)

Get the auto size attribute

**Return** true: auto size is enabled, false: disabled

#### Parameters

- **line**: pointer to a line object

bool **lv\_line\_get\_y\_invert**(const *lv\_obj\_t* \*line)

Get the y inversion attribute

**Return** true: y inversion is enabled, false: disabled

#### Parameters

- **line**: pointer to a line object

**struct lv\_line\_ext\_t**

#### Public Members

const lv\_point\_t \***point\_array**

uint16\_t **point\_num**

uint8\_t **auto\_size**

uint8\_t **y\_inv**

#### List (lv\_list)

#### Overview

The Lists are built from a background *Page* and *Buttons* on it. The Buttons contain an optional icon-like *Image* (which can be a symbol too) and a *Label*. When the list becomes long enough it can be scrolled.

#### Parts and Styles

The List has the same parts as the *Page*

- LV\_LIST\_PART\_BG
- LV\_LIST\_PART\_SCRL
- LV\_LIST\_PART\_SCRLBAR
- LV\_LIST\_PART\_EDGE\_FLASH

Refer to the [Page](#) documentation for details.

The buttons on the list are treated as normal buttons and they only have a main part called `LV_BTN_PART_MAIN`.

## Usage

### Add buttons

You can add new list elements (button) with `lv_list_add_btn(list, &icon_img, "Text")` or with symbol `lv_list_add_btn(list, SYMBOL_EDIT, "Edit text")`. If you do not want to add image use `NULL` as image source. The function returns with a pointer to the created button to allow further configurations.

The width of the buttons is set to maximum according to the object width. The height of the buttons are adjusted automatically according to the content. (*content height + padding\_top + padding\_bottom*).

The labels are created with `LV_LABEL_LONG_SCROLL_CIRC` long mode to automatically scroll the long labels circularly.

`lv_list_get_btn_label(list_btn)` and `lv_list_get_btn_img(list_btn)` can be used to get the label and the image of a list button. The text can be set directly with `lv_list_get_btn_text(list_btn)`.

### Delete buttons

To delete a list element just use `lv_obj_del(btn)` on the return value of `lv_list_add_btn()`.

To clean the list (remove all buttons) use `lv_list_clean(list)`

### Manual navigation

You can navigate manually in the list with `lv_list_up(list)` and `lv_list_down(list)`.

You can focus on a button directly using `lv_list_focus(btn, LV_ANIM_ON/OFF)`.

The **animation time** of up/down/focus movements can be set via: `lv_list_set_anim_time(list, anim_time)`. Zero animation time means not animations.

### Layout

By default the list is vertical. To get a horizontal list use `lv_list_set_layout(list, LV_LAYOUT_ROW_MID)`.

### Edge flash

A circle-like effect can be shown when the list reaches the most top or bottom position. `lv_list_set_edge_flash(list, true)` enables this feature.

## Scroll propagation

If the list is created on an other scrollable element (like a *Page*) and the list can't be scrolled further the scrolling can be propagated to the parent. This way the scroll will be continued on the parent. It can be enabled with `lv_list_set_scroll_propagation(list, true)`

## Events

Only the *Generic events* are sent by the object type.

Learn more about *Events*.

## Keys

The following *Keys* are processed by the Lists:

- **LV\_KEY\_RIGHT/DOWN** Select the next button
- **LV\_KEY\_LEFT/UP** Select the previous button

Note that, as usual, the state of **LV\_KEY\_ENTER** is translated to **LV\_EVENT\_PRESSED/PRESSING/RELEASED** etc.

The Selected buttons are in **LV\_BTN\_STATE\_PR/TG\_PR** state.

To manually select a button use `lv_list_set_btn_selected(list, btn)`. When the list is defocused and focused again it will restore the last selected button.


Learn more about *Keys*.

## Example

### C



## Simple List

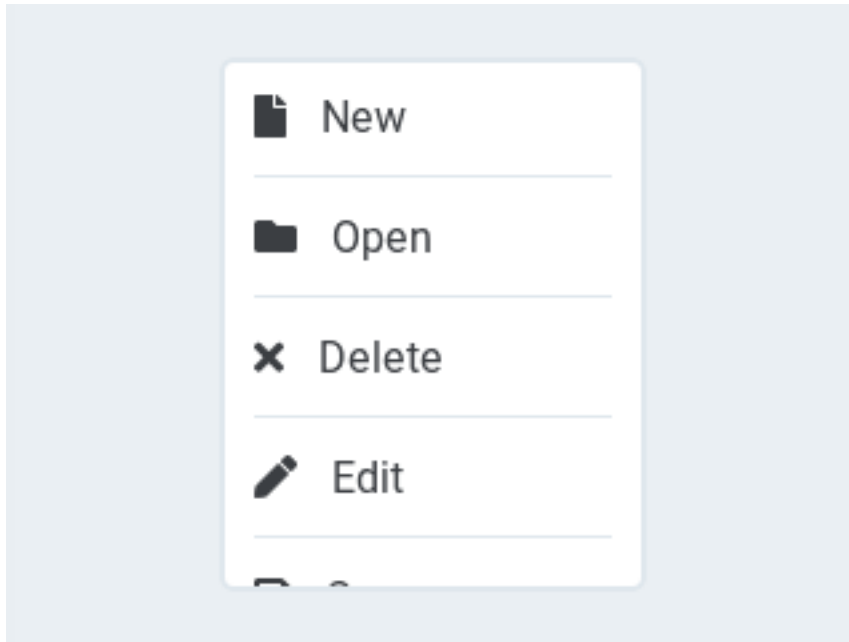

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_LIST

static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_CLICKED) {
        printf("Clicked: %s\n", lv_list_get_btn_text(obj));
    }
}

void lv_ex_list_1(void)
{
    /*Create a list*/
    lv_obj_t * list1 = lv_list_create(lv_scr_act(), NULL);
    lv_obj_set_size(list1, 160, 200);
    lv_obj_align(list1, NULL, LV_ALIGN_CENTER, 0, 0);

    /*Add buttons to the list*/
    lv_obj_t * list_btn;

    list_btn = lv_list_add_btn(list1, LV_SYMBOL_FILE, "New");
    lv_obj_set_event_cb(list_btn, event_handler);

    list_btn = lv_list_add_btn(list1, LV_SYMBOL_DIRECTORY, "Open");
    lv_obj_set_event_cb(list_btn, event_handler);

    list_btn = lv_list_add_btn(list1, LV_SYMBOL_CLOSE, "Delete");
    lv_obj_set_event_cb(list_btn, event_handler);

    list_btn = lv_list_add_btn(list1, LV_SYMBOL_EDIT, "Edit");
}
```

(continues on next page)

(continued from previous page)

```
lv_obj_set_event_cb(list_btn, event_handler);

list_btn = lv_list_add_btn(list1, LV_SYMBOL_SAVE, "Save");
lv_obj_set_event_cb(list_btn, event_handler);

list_btn = lv_list_add_btn(list1, LV_SYMBOL_BELL, "Notify");
lv_obj_set_event_cb(list_btn, event_handler);

list_btn = lv_list_add_btn(list1, LV_SYMBOL_BATTERY_FULL, "Battery");
lv_obj_set_event_cb(list_btn, event_handler);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_list\_style\_t**

### Enums

**enum** [anonymous]

List styles.

*Values:*

**LV\_LIST\_PART\_BG** = *LV\_PAGE\_PART\_BG*

List background style

**LV\_LIST\_PART\_SCROLLBAR** = *LV\_PAGE\_PART\_SCROLLBAR*

List scrollbar style.

**LV\_LIST\_PART\_EDGE\_FLASH** = *LV\_PAGE\_PART\_EDGE\_FLASH*

List edge flash style.

**\_LV\_LIST\_PART\_VIRTUAL\_LAST** = *\_LV\_PAGE\_PART\_VIRTUAL\_LAST*

**LV\_LIST\_PART\_SCROLL** = *LV\_PAGE\_PART\_SCROLL*

List scrollable area style.

**\_LV\_LIST\_PART\_REAL\_LAST** = *\_LV\_PAGE\_PART\_REAL\_LAST*

### Functions

*lv\_obj\_t* \***lv\_list\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a list objects

**Return** pointer to the created list

#### Parameters

- **par**: pointer to an object, it will be the parent of the new list
- **copy**: pointer to a list object, if not NULL then the new object will be copied from it

void **lv\_list\_clean**(*lv\_obj\_t* \*list)

Delete all children of the scr1 object, without deleting scr1 child.

#### Parameters

- **list**: pointer to an object

*lv\_obj\_t* \***lv\_list\_add\_btn**(*lv\_obj\_t* \*list, **const** void \*img\_src, **const** char \*txt)

Add a list element to the list

**Return** pointer to the new list element which can be customized (a button)

#### Parameters

- **list**: pointer to list object
- **img\_fn**: file name of an image before the text (NULL if unused)
- **txt**: text of the list element (NULL if unused)

bool **lv\_list\_remove**(**const** *lv\_obj\_t* \*list, uint16\_t index)

Remove the index of the button in the list

**Return** true: successfully deleted

#### Parameters

- **list**: pointer to a list object
- **index**: pointer to a the button' s index in the list, index must be  $0 \leq \text{index} < \text{lv\_list\_ext\_t.size}$

void **lv\_list\_focus\_btn**(*lv\_obj\_t* \*list, *lv\_obj\_t* \*btn)

Make a button selected

#### Parameters

- **list**: pointer to a list object
- **btn**: pointer to a button to select NULL to not select any buttons

**static** void **lv\_list\_set\_sb\_mode**(*lv\_obj\_t* \*list, *lv\_scrollbar\_mode\_t* mode)

Set the scroll bar mode of a list

#### Parameters

- **list**: pointer to a list object
- **sb\_mode**: the new mode from 'lv\_page\_sb\_mode\_t' enum

**static** void **lv\_list\_set\_scroll\_propagation**(*lv\_obj\_t* \*list, bool en)

Enable the scroll propagation feature. If enabled then the List will move its parent if there is no more space to scroll.

#### Parameters

- **list**: pointer to a List
- **en**: true or false to enable/disable scroll propagation

**static** void **lv\_list\_set\_edge\_flash**(*lv\_obj\_t* \*list, bool en)

Enable the edge flash effect. (Show an arc when the an edge is reached)

#### Parameters

- **list**: pointer to a List
- **en**: true or false to enable/disable end flash

**static void lv\_list\_set\_anim\_time**(*lv\_obj\_t* \*list, uint16\_t anim\_time)  
Set scroll animation duration on 'list\_up()' 'list\_down()' 'list\_focus()'

#### Parameters

- **list**: pointer to a list object
- **anim\_time**: duration of animation [ms]

**void lv\_list\_set\_layout**(*lv\_obj\_t* \*list, *lv\_layout\_t* layout)  
Set layout of a list

#### Parameters

- **list**: pointer to a list object
- **layout**: which layout should be used

**const char \*lv\_list\_get\_btn\_text**(const *lv\_obj\_t* \*btn)  
Get the text of a list element

**Return** pointer to the text

#### Parameters

- **btn**: pointer to list element

*lv\_obj\_t* \***lv\_list\_get\_btn\_label**(const *lv\_obj\_t* \*btn)  
Get the label object from a list element

**Return** pointer to the label from the list element or NULL if not found

#### Parameters

- **btn**: pointer to a list element (button)

*lv\_obj\_t* \***lv\_list\_get\_btn\_img**(const *lv\_obj\_t* \*btn)  
Get the image object from a list element

**Return** pointer to the image from the list element or NULL if not found

#### Parameters

- **btn**: pointer to a list element (button)

*lv\_obj\_t* \***lv\_list\_get\_prev\_btn**(const *lv\_obj\_t* \*list, *lv\_obj\_t* \*prev\_btn)  
Get the next button from list. (Starts from the bottom button)

**Return** pointer to the next button or NULL when no more buttons

#### Parameters

- **list**: pointer to a list object
- **prev\_btn**: pointer to button. Search the next after it.

*lv\_obj\_t* \***lv\_list\_get\_next\_btn**(const *lv\_obj\_t* \*list, *lv\_obj\_t* \*prev\_btn)  
Get the previous button from list. (Starts from the top button)

**Return** pointer to the previous button or NULL when no more buttons

#### Parameters

- **list**: pointer to a list object
- **prev\_btn**: pointer to button. Search the previous before it.

`int32_t lv_list_get_btn_index(const lv_obj_t *list, const lv_obj_t *btn)`

Get the index of the button in the list

**Return** the index of the button in the list, or -1 of the button not in this list

**Parameters**

- **list**: pointer to a list object. If NULL, assumes btn is part of a list.
- **btn**: pointer to a list element (button)

`uint16_t lv_list_get_size(const lv_obj_t *list)`

Get the number of buttons in the list

**Return** the number of buttons in the list

**Parameters**

- **list**: pointer to a list object

`lv_obj_t *lv_list_get_btn_selected(const lv_obj_t *list)`

Get the currently selected button. Can be used while navigating in the list with a keypad.

**Return** pointer to the selected button

**Parameters**

- **list**: pointer to a list object

`lv_layout_t lv_list_get_layout(lv_obj_t *list)`

Get layout of a list

**Return** layout of the list object

**Parameters**

- **list**: pointer to a list object

`static lv_scrollbar_mode_t lv_list_get_sb_mode(const lv_obj_t *list)`

Get the scroll bar mode of a list

**Return** scrollbar mode from 'lv\_page\_sb\_mode\_t' enum

**Parameters**

- **list**: pointer to a list object

`static bool lv_list_get_scroll_propagation(lv_obj_t *list)`

Get the scroll propagation property

**Return** true or false

**Parameters**

- **list**: pointer to a List

`static bool lv_list_get_edge_flash(lv_obj_t *list)`

Get the scroll propagation property

**Return** true or false

**Parameters**

- **list**: pointer to a List

**static** uint16\_t **lv\_list\_get\_anim\_time**(const *lv\_obj\_t* \*list)

Get scroll animation duration

**Return** duration of animation [ms]

**Parameters**

- **list**: pointer to a list object

void **lv\_list\_up**(const *lv\_obj\_t* \*list)

Move the list elements up by one

**Parameters**

- **list**: pointer a to list object

void **lv\_list\_down**(const *lv\_obj\_t* \*list)

Move the list elements down by one

**Parameters**

- **list**: pointer to a list object

void **lv\_list\_focus**(const *lv\_obj\_t* \*btn, *lv\_anim\_enable\_t* anim)

Focus on a list button. It ensures that the button will be visible on the list.

**Parameters**

- **btn**: pointer to a list button to focus
- **anim**: LV\_ANOM\_ON: scroll with animation, LV\_ANIM\_OFF: without animation

**struct lv\_list\_ext\_t**

**Public Members**

*lv\_page\_ext\_t* **page**

*lv\_obj\_t* \***last\_sel\_btn**

*lv\_obj\_t* \***act\_sel\_btn**

**Line meter (lv\_lmeter)**

**Overview**

The Line meter object consists of some radial lines which draw a scale. Setting a value for the Line meter will change the color of the scale lines proportionally.

**Parts and Styles**

The Line meter has only a main part, called **LV\_LINEMETER\_PART\_MAIN**. It uses all the typical background properties the draw a rectangle-like or circle background and the *line* and *scale* properties to draw the scale lines. The active lines (which are related to smaller values the the current value) are colored from *line\_color* to *scale\_grad\_color*. The lines in the end (after the current value) are set to *scale\_end\_color* color.

## Usage

### Set value

When setting a new value with `lv_linemeter_set_value(linemeter, new_value)` the proportional part of the scale will be recolored.

### Range and Angles

The `lv_linemeter_set_range(linemeter, min, max)` function sets the range of the line meter.

You can set the angle of the scale and the number of the lines by: `lv_linemeter_set_scale(linemeter, angle, line_num)`. The default angle is 240 and the default line number is 31.

### Angle offset

By default the scale angle is interpreted symmetrically to the y axis. It results in “standing” line meter. With `lv_linemeter_set_angle_offset` an offset can be added the scale angle. It can be used e.g. to put a quarter line meter into a corner or a half line meter to the right or left side.

### Mirror

By default the Line meter’s lines are activated clock-wise. It can be changed using `lv_linemeter_set_mirror(linemeter, true/false)`.

### Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

### Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

### Example

## C

## Simple Line meter

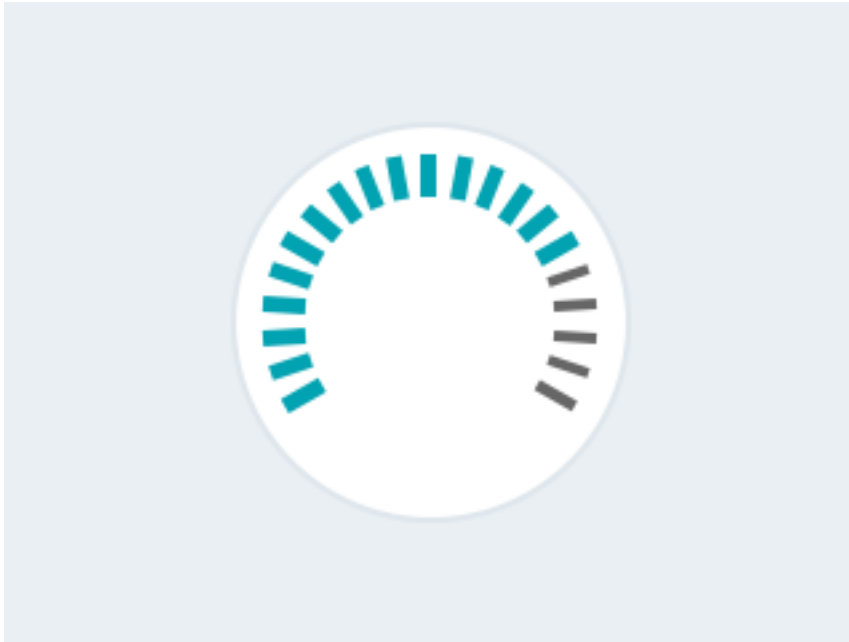

code

```
#include "lvgl/lvgl.h"
#if LV_USE_LINEMETER

void lv_ex_linemeter_1(void)
{
    /*Create a line meter */
    lv_obj_t * lmeter;
    lmeter = lv_linemeter_create(lv_scr_act(), NULL);
    lv_linemeter_set_range(lmeter, 0, 100);           /*Set the range*/
    lv_linemeter_set_value(lmeter, 80);              /*Set the current_u
↪value*/
    lv_linemeter_set_scale(lmeter, 240, 21);         /*Set the angle and_u
↪number of lines*/
    lv_obj_set_size(lmeter, 150, 150);
    lv_obj_align(lmeter, NULL, LV_ALIGN_CENTER, 0, 0);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_linemeter\_part\_t**



## Enums

**enum** [anonymous]

*Values:*

**LV\_LINEMETER\_PART\_MAIN**

**\_LV\_LINEMETER\_PART\_VIRTUAL\_LAST**

**\_LV\_LINEMETER\_PART\_REAL\_LAST** = *\_LV\_OBJ\_PART\_REAL\_LAST*

## Functions

*lv\_obj\_t* \***lv\_linemeter\_create**(*lv\_obj\_t* \**par*, **const** *lv\_obj\_t* \**copy*)

Create a line meter objects

**Return** pointer to the created line meter

**Parameters**

- **par**: pointer to an object, it will be the parent of the new line meter
- **copy**: pointer to a line meter object, if not NULL then the new object will be copied from it

void **lv\_linemeter\_set\_value**(*lv\_obj\_t* \**lmeter*, int32\_t *value*)

Set a new value on the line meter

**Parameters**

- **lmeter**: pointer to a line meter object
- **value**: new value

void **lv\_linemeter\_set\_range**(*lv\_obj\_t* \**lmeter*, int32\_t *min*, int32\_t *max*)

Set minimum and the maximum values of a line meter

**Parameters**

- **lmeter**: pointer to the line meter object
- **min**: minimum value
- **max**: maximum value

void **lv\_linemeter\_set\_scale**(*lv\_obj\_t* \**lmeter*, uint16\_t *angle*, uint16\_t *line\_cnt*)

Set the scale settings of a line meter

**Parameters**

- **lmeter**: pointer to a line meter object
- **angle**: angle of the scale (0..360)
- **line\_cnt**: number of lines

void **lv\_linemeter\_set\_angle\_offset**(*lv\_obj\_t* \**lmeter*, uint16\_t *angle*)

Set the set an offset for the line meter's angles to rotate it.

**Parameters**

- **lmeter**: pointer to a line meter object
- **angle**: angle offset (0..360), rotates clockwise

void **lv\_linemeter\_set\_mirror**(*lv\_obj\_t* \**lmeter*, bool *mirror*)

Set the orientation of the meter growth, clockwise or counterclockwise (mirrored)

#### Parameters

- `lmeter`: pointer to a line meter object
- `mirror`: mirror setting

`int32_t lv_linemeter_get_value(const lv_obj_t *lmeter)`

Get the value of a line meter

**Return** the value of the line meter

#### Parameters

- `lmeter`: pointer to a line meter object

`int32_t lv_linemeter_get_min_value(const lv_obj_t *lmeter)`

Get the minimum value of a line meter

**Return** the minimum value of the line meter

#### Parameters

- `lmeter`: pointer to a line meter object

`int32_t lv_linemeter_get_max_value(const lv_obj_t *lmeter)`

Get the maximum value of a line meter

**Return** the maximum value of the line meter

#### Parameters

- `lmeter`: pointer to a line meter object

`uint16_t lv_linemeter_get_line_count(const lv_obj_t *lmeter)`

Get the scale number of a line meter

**Return** number of the scale units

#### Parameters

- `lmeter`: pointer to a line meter object

`uint16_t lv_linemeter_get_scale_angle(const lv_obj_t *lmeter)`

Get the scale angle of a line meter

**Return** angle of the scale

#### Parameters

- `lmeter`: pointer to a line meter object

`uint16_t lv_linemeter_get_angle_offset(lv_obj_t *lmeter)`

Get the offset for the line meter.

**Return** angle offset (0..360)

#### Parameters

- `lmeter`: pointer to a line meter object

`void lv_linemeter_draw_scale(lv_obj_t *lmeter, const lv_area_t *clip_area, uint8_t part)`

`bool lv_linemeter_get_mirror(lv_obj_t *lmeter)`

get the mirror setting for the line meter

**Return** mirror (true or false)

#### Parameters

- `lmeter`: pointer to a line meter object

**struct lv\_linemeter\_ext\_t**

#### Public Members

```
uint16_t scale_angle
uint16_t angle_ofs
uint16_t line_cnt
int32_t cur_value
int32_t min_value
int32_t max_value
uint8_t mirrored
```

### Message box (`lv_msgbox`)

#### Overview

The Message boxes act as pop-ups. They are built from a background *Container*, a *Label* and a *Button matrix* for buttons.

The text will be broken into multiple lines automatically (has `LV_LABEL_LONG_MODE_BREAK`) and the height will be set automatically to involve the text and the buttons (`LV_FIT_TIGHT` fit vertically)-

#### Parts and Styles

The Message box' s main part is called `LV_MSGBOX_PART_MAIN` and it uses all the typical background style properties. Using padding will add space on the sides. *pad\_inner* will add space between the text and the buttons. The *label* style properties affect the style of text.

The buttons parts are the same as in case of *Button matrix*:

- `LV_MSGBOX_PART_BTN_BG` the background of the buttons
- `LV_MSGBOX_PART_BTN` the buttons

#### Usage

##### Set text

To set the text use the `lv_msgbox_set_text(msgbox, "My text")` function. Not only the pointer of the text will be saved, so the the text can be in a local variable too.

##### Add buttons

To add buttons use the `lv_msgbox_add_btns(msgbox, btn_str)` function. The button' s text needs to be specified like `const char * btn_str[] = {"Apply", "Close", ""}`. For more information visit the *Button matrix* documentation.

The button matrix will be created only when `lv_msgbox_add_btns()` is called for the first time.

### Auto-close

With `lv_msgbox_start_auto_close(mbox, delay)` the message box can be closed automatically after `delay` milliseconds with an animation. The `lv_mbox_stop_auto_close(mbox)` function stops a started auto close.

The duration of the close animation can be set by `lv_mbox_set_anim_time(mbox, anim_time)`.

### Events

Besides the [Generic events](#) the following [Special events](#) are sent by the Message boxes:

- **LV\_EVENT\_VALUE\_CHANGED** sent when the button is clicked. The event data is set to ID of the clicked button.

The Message box has a default event callback which closes itself when a button is clicked.

Learn more about [Events](#).

### ##Keys

The following *Keys* are processed by the Buttons:


- **LV\_KEY\_RIGHT/DOWN** Select the next button
- **LV\_KEY\_LEFT/TOP** Select the previous button
- **LV\_KEY\_ENTER** Clicks the selected button

Learn more about [Keys](#).

### Example

## C

## Simple Message box

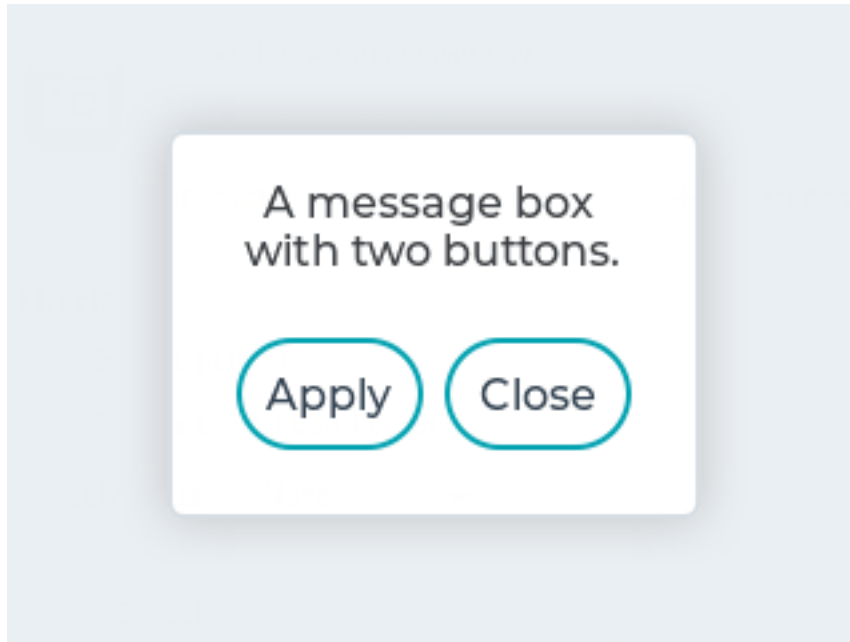

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_MSGBOX


static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        printf("Button: %s\n", lv_msgbox_get_active_btn_text(obj));
    }
}

void lv_ex_msgbox_1(void)
{
    static const char * btns[] ={"Apply", "Close", ""};

    lv_obj_t * mbox1 = lv_msgbox_create(lv_scr_act(), NULL);
    lv_msgbox_set_text(mbox1, "A message box with two buttons.");
    lv_msgbox_add_btns(mbox1, btns);
    lv_obj_set_width(mbox1, 200);
    lv_obj_set_event_cb(mbox1, event_handler);
    lv_obj_align(mbox1, NULL, LV_ALIGN_CENTER, 0, 0); /*Align to the corner*/
}

#endif
```

## Modal

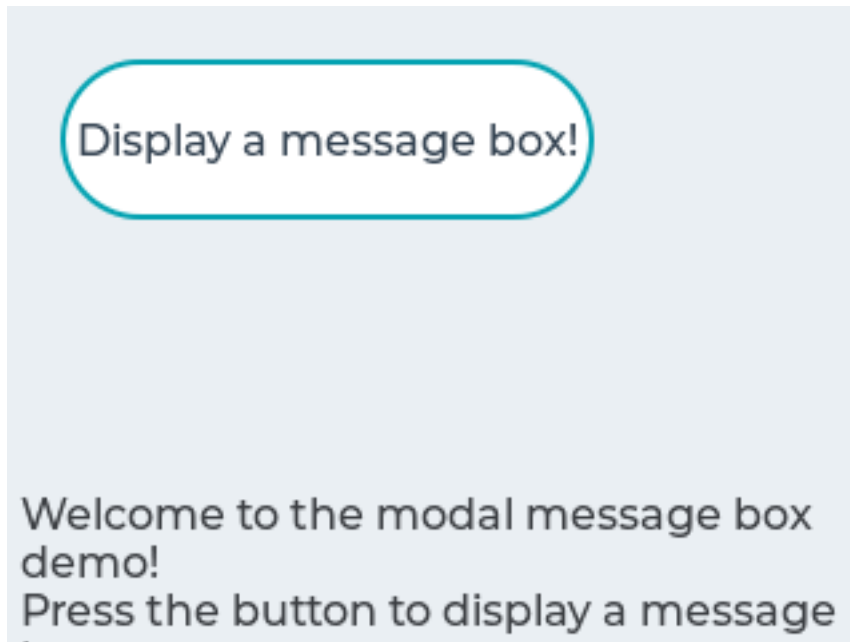

code

```
#include "lvgl/lvgl.h"
#if LV_USE_MSGBOX

static void mbox_event_cb(lv_obj_t *obj, lv_event_t evt);
static void btn_event_cb(lv_obj_t *btn, lv_event_t evt);
static void opa_anim(void * bg, lv_anim_value_t v);

static lv_obj_t *mbox, *info;
static lv_style_t style_modal;

static const char welcome_info[] = "Welcome to the modal message box demo!\n"
    "Press the button to display a message box.";

static const char in_msg_info[] = "Notice that you cannot touch "
    "the button again while the message box is open.";

void lv_ex_msgbox_2(void)
{
    lv_style_init(&style_modal);
    lv_style_set_bg_color(&style_modal, LV_STATE_DEFAULT, LV_COLOR_BLACK);

    /* Create a button, then set its position and event callback */
    lv_obj_t *btn = lv_btn_create(lv_scr_act(), NULL);
    lv_obj_set_size(btn, 200, 60);
    lv_obj_set_event_cb(btn, btn_event_cb);
    lv_obj_align(btn, NULL, LV_ALIGN_IN_TOP_LEFT, 20, 20);

    /* Create a label on the button */
    lv_obj_t *label = lv_label_create(btn, NULL);
    lv_label_set_text(label, "Display a message box!");
}
```

(continues on next page)

(continued from previous page)

```

    /* Create an informative label on the screen */
    info = lv_label_create(lv_scr_act(), NULL);
    lv_label_set_text(info, welcome_info);
    lv_label_set_long_mode(info, LV_LABEL_LONG_BREAK); /* Make sure text will wrap */
    lv_obj_set_width(info, LV_HOR_RES - 10);
    lv_obj_align(info, NULL, LV_ALIGN_IN_BOTTOM_LEFT, 5, -5);
}

static void mbox_event_cb(lv_obj_t *obj, lv_event_t evt)
{
    if(evt == LV_EVENT_DELETE && obj == mbox) {
        /* Delete the parent modal background */
        lv_obj_del_async(lv_obj_get_parent(mbox));
        mbox = NULL; /* happens before object is actually deleted! */
        lv_label_set_text(info, welcome_info);
    } else if(evt == LV_EVENT_VALUE_CHANGED) {
        /* A button was clicked */
        lv_msgbox_start_auto_close(mbox, 0);
    }
}

static void btn_event_cb(lv_obj_t *btn, lv_event_t evt)
{
    if(evt == LV_EVENT_CLICKED) {
        /* Create a full-screen background */

        /* Create a base object for the modal background */
        lv_obj_t *obj = lv_obj_create(lv_scr_act(), NULL);
        lv_obj_reset_style_list(obj, LV_OBJ_PART_MAIN);
        lv_obj_add_style(obj, LV_OBJ_PART_MAIN, &style_modal);
        lv_obj_set_pos(obj, 0, 0);
        lv_obj_set_size(obj, LV_HOR_RES, LV_VER_RES);

        static const char * btns2[] = {"Ok", "Cancel", ""};

        /* Create the message box as a child of the modal background */
        mbox = lv_msgbox_create(obj, NULL);
        lv_msgbox_add_btns(mbox, btns2);
        lv_msgbox_set_text(mbox, "Hello world!");
        lv_obj_align(mbox, NULL, LV_ALIGN_CENTER, 0, 0);
        lv_obj_set_event_cb(mbox, mbox_event_cb);

        /* Fade the message box in with an animation */
        lv_anim_t a;
        lv_anim_init(&a);
        lv_anim_set_var(&a, obj);
        lv_anim_set_time(&a, 500);
        lv_anim_set_values(&a, LV_OPA_TRANSP, LV_OPA_50);
        lv_anim_set_exec_cb(&a, (lv_anim_exec_xcb_t)opa_anim);
        lv_anim_start(&a);

        lv_label_set_text(info, in_msg_info);
        lv_obj_align(info, NULL, LV_ALIGN_IN_BOTTOM_LEFT, 5, -5);
    }
}

```

(continues on next page)

(continued from previous page)

```
static void opa_anim(void * bg, lv_anim_value_t v)
{
    lv_obj_set_style_local_bg_opa(bg, LV_OBJ_PART_MAIN, LV_STATE_DEFAULT, v);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_msgbox\_style\_t**

### Enums

**enum** [anonymous]  
Message box styles.

*Values:*

**LV\_MSGBOX\_PART\_BG** = *LV\_CONT\_PART\_MAIN*

**LV\_MSGBOX\_PART\_BTN\_BG** = *\_LV\_CONT\_PART\_REAL\_LAST*

**LV\_MSGBOX\_PART\_BTN**

### Functions

*lv\_obj\_t* \***lv\_msgbox\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)

Create a message box objects

**Return** pointer to the created message box

#### Parameters

- **par**: pointer to an object, it will be the parent of the new message box
- **copy**: pointer to a message box object, if not NULL then the new object will be copied from it

**void** **lv\_msgbox\_add\_btns**(*lv\_obj\_t* \*mbox, **const** char \*btn\_mapaction[])

Add button to the message box

#### Parameters

- **mbox**: pointer to message box object
- **btn\_map**: button descriptor (button matrix map). E.g. a const char \*txt[] = { “ok” , “close” , “” } (Can not be local variable)



void **lv\_msgbox\_set\_text**(*lv\_obj\_t* \*mbox, const char \*txt)  
Set the text of the message box

**Parameters**

- **mbox**: pointer to a message box
- **txt**: a ‘\0’ terminated character string which will be the message box text

void **lv\_msgbox\_set\_anim\_time**(*lv\_obj\_t* \*mbox, uint16\_t anim\_time)  
Set animation duration

**Parameters**

- **mbox**: pointer to a message box object
- **anim\_time**: animation length in milliseconds (0: no animation)

void **lv\_msgbox\_start\_auto\_close**(*lv\_obj\_t* \*mbox, uint16\_t delay)  
Automatically delete the message box after a given time

**Parameters**

- **mbox**: pointer to a message box object
- **delay**: a time (in milliseconds) to wait before delete the message box

void **lv\_msgbox\_stop\_auto\_close**(*lv\_obj\_t* \*mbox)  
Stop the auto. closing of message box

**Parameters**

- **mbox**: pointer to a message box object

void **lv\_msgbox\_set\_style**(*lv\_obj\_t* \*mbox, *lv\_msgbox\_style\_t* type, const *lv\_style\_t* \*style)  
Set a style of a message box

**Parameters**

- **mbox**: pointer to a message box object
- **type**: which style should be set
- **style**: pointer to a style

void **lv\_msgbox\_set\_recolor**(*lv\_obj\_t* \*mbox, bool en)  
Set whether recoloring is enabled. Must be called after **lv\_msgbox\_add\_btns**.

**Parameters**

- **btnm**: pointer to button matrix object
- **en**: whether recoloring is enabled

const char \***lv\_msgbox\_get\_text**(const *lv\_obj\_t* \*mbox)  
Get the text of the message box

**Return** pointer to the text of the message box

**Parameters**

- **mbox**: pointer to a message box object

uint16\_t **lv\_msgbox\_get\_active\_btn**(*lv\_obj\_t* \*mbox)  
Get the index of the lastly “activated” button by the user (pressed, released etc) Useful in the the **event\_cb**.

**Return** index of the last released button (LV\_BTNMATRIX\_BTN\_NONE: if unset)

#### Parameters

- **btnm**: pointer to button matrix object

**const** char \***lv\_msgbox\_get\_active\_btn\_text**(*lv\_obj\_t* \*mbox)

Get the text of the lastly “activated” button by the user (pressed, released etc) Useful in the the event\_cb.

**Return** text of the last released button (NULL: if unset)

#### Parameters

- **btnm**: pointer to button matrix object

uint16\_t **lv\_msgbox\_get\_anim\_time**(**const** *lv\_obj\_t* \*mbox)

Get the animation duration (close animation time)

**Return** animation length in milliseconds (0: no animation)

#### Parameters

- **mbox**: pointer to a message box object

bool **lv\_msgbox\_get\_recolor**(**const** *lv\_obj\_t* \*mbox)

Get whether recoloring is enabled

**Return** whether recoloring is enabled

#### Parameters

- **mbox**: pointer to a message box object

*lv\_obj\_t* \***lv\_msgbox\_get\_btnmatrix**(*lv\_obj\_t* \*mbox)

Get message box button matrix

**Return** pointer to button matrix object

**Remark** return value will be NULL unless **lv\_msgbox\_add\_btns** has been already called

#### Parameters

- **mbox**: pointer to a message box object

**struct lv\_msgbox\_ext\_t**

#### Public Members

*lv\_cont\_ext\_t* **bg**

*lv\_obj\_t* \***text**

*lv\_obj\_t* \***btnm**

uint16\_t **anim\_time**

#### Object mask (lv\_objmask)

#### Overview

The *Object mask* is capable of add some mask to drawings when its children is drawn.

## Parts and Styles

The Object mask has only a main part called `LV_OBJMASK_PART_BG` and it uses the typical background style properties.

## Usage

### Adding mask

Before adding a mask to the *Object mask* the mask should be initialized:

```
lv_draw_mask_<type>_param_t mask_param;
lv_draw_mask_<type>_init(&mask_param, ...);
lv_objmask_mask_t * mask_p = lv_objmask_add_mask(objmask, &mask_param);
```

Lvgl supports the following mask types:

- **line** clip the pixels on the top/bottom left/right of a line. Can be initialized from two points or a point and an angle:
- **angle** keep the pixels only between a given start and end angle
- **radius** keep the pixel only inside a rectangle which can have radius (can for a circle too). Can be inverted to keep the pixel outside of the rectangle.
- **fade** fade vertically (change the pixels opacity according to their y position)
- **map** use an alpha mask (a byte array) to describe the pixels opacity.

The coordinates in the mask are relative to the Object. That is if the object moves the masks move with it.

For the details of the mask *init* function see the [API](#) documentation below.

### Update mask

AN existing mask can be updated with `lv_objmask_update_mask(objmask, mask_p, new_param)`, where `mask_p` is return value of `lv_objmask_add_mask`.

### Remove mask

A mask can be removed with `lv_objmask_remove_mask(objmask, mask_p)`

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Several object masks

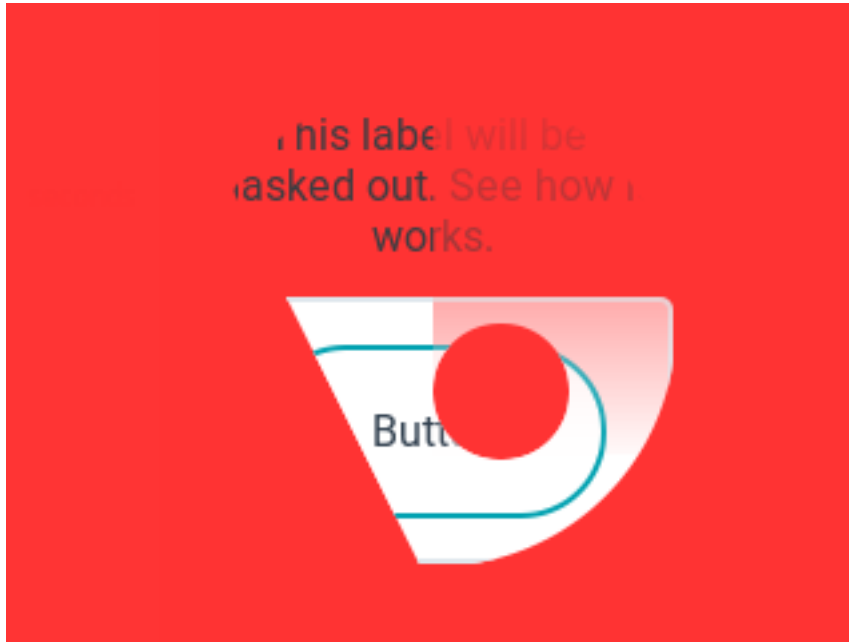

code

```
#include "lvgl/lvgl.h"
#if LV_USE_OBJMASK

void lv_ex_objmask_1(void)
{
    /*Set a very visible color for the screen to clearly see what happens*/
    lv_obj_set_style_local_bg_color(lv_scr_act(), LV_OBJ_PART_MAIN, LV_STATE_DEFAULT,
    ↪lv_color_hex3(0xf33));

    lv_obj_t * om = lv_objmask_create(lv_scr_act(), NULL);
    lv_obj_set_size(om, 200, 200);
    lv_obj_align(om, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_t * label = lv_label_create(om, NULL);
    lv_label_set_long_mode(label, LV_LABEL_LONG_BREAK);
    lv_label_set_align(label, LV_LABEL_ALIGN_CENTER);
    lv_obj_set_width(label, 180);
    lv_label_set_text(label, "This label will be masked out. See how it works.");
    lv_obj_align(label, NULL, LV_ALIGN_IN_TOP_MID, 0, 20);

    lv_obj_t * cont = lv_cont_create(om, NULL);
    lv_obj_set_size(cont, 180, 100);
    lv_obj_set_drag(cont, true);
    lv_obj_align(cont, NULL, LV_ALIGN_IN_BOTTOM_MID, 0, -10);
}
```

(continues on next page)

(continued from previous page)

```

lv_obj_t * btn = lv_btn_create(cont, NULL);
lv_obj_align(btn, NULL, LV_ALIGN_CENTER, 0, 0);
lv_obj_set_style_local_value_str(btn, LV_BTN_PART_MAIN, LV_STATE_DEFAULT, "Button
↪");
uint32_t t;

lv_refr_now(NULL);
t = lv_tick_get();
while(lv_tick_elaps(t) < 1000);

lv_area_t a;
lv_draw_mask_radius_param_t r1;

a.x1 = 10;
a.y1 = 10;
a.x2 = 190;
a.y2 = 190;
lv_draw_mask_radius_init(&r1, &a, LV_RADIUS_CIRCLE, false);
lv_objmask_add_mask(om, &r1);

lv_refr_now(NULL);
t = lv_tick_get();
while(lv_tick_elaps(t) < 1000);

a.x1 = 100;
a.y1 = 100;
a.x2 = 150;
a.y2 = 150;
lv_draw_mask_radius_init(&r1, &a, LV_RADIUS_CIRCLE, true);
lv_objmask_add_mask(om, &r1);

lv_refr_now(NULL);
t = lv_tick_get();
while(lv_tick_elaps(t) < 1000);

lv_draw_mask_line_param_t l1;
lv_draw_mask_line_points_init(&l1, 0, 0, 100, 200, LV_DRAW_MASK_LINE_SIDE_TOP);
lv_objmask_add_mask(om, &l1);


lv_refr_now(NULL);
t = lv_tick_get();
while(lv_tick_elaps(t) < 1000);

lv_draw_mask_fade_param_t f1;
a.x1 = 100;
a.y1 = 0;
a.x2 = 200;
a.y2 = 200;
lv_draw_mask_fade_init(&f1, &a, LV_OPA_TRANSP, 0, LV_OPA_COVER, 150);
lv_objmask_add_mask(om, &f1);
}

#endif

```

## Text mask

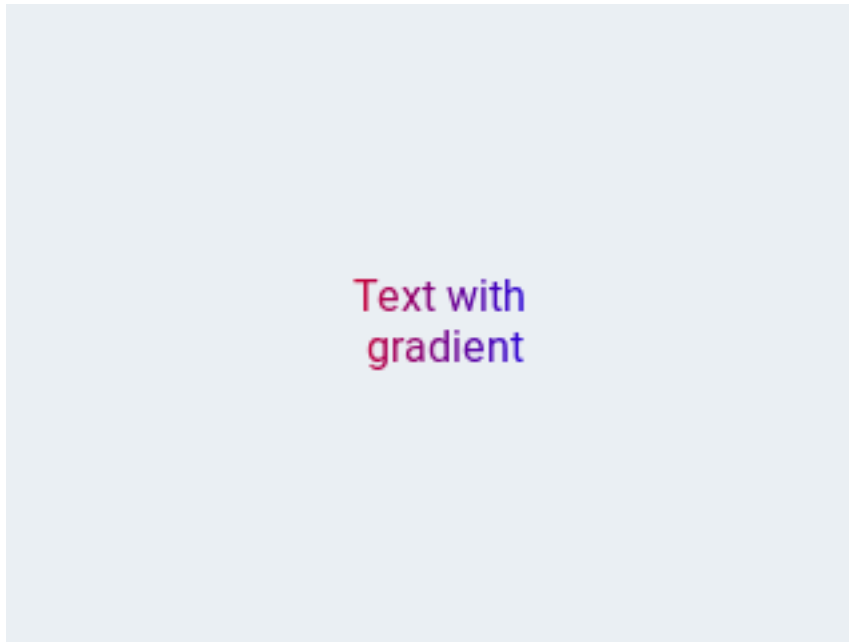

code

```
#include "lvgl/lvgl.h"
#if LV_USE_OBJMASK

#define MASK_WIDTH 100
#define MASK_HEIGHT 50

void lv_ex_objmask_2(void)
{
    /* Create the mask of a text by drawing it to a canvas*/
    static lv_opa_t mask_map[MASK_WIDTH * MASK_HEIGHT];

    /*Create a "8 bit alpha" canvas and clear it*/
    lv_obj_t * canvas = lv_canvas_create(lv_scr_act(), NULL);
    lv_canvas_set_buffer(canvas, mask_map, MASK_WIDTH, MASK_HEIGHT, LV_IMG_CF_ALPHA_
↪8BIT);
    lv_canvas_fill_bg(canvas, LV_COLOR_BLACK, LV_OPA_TRANSP);

    /*Draw a label to the canvas. The result "image" will be used as mask*/
    lv_draw_label_dsc_t label_dsc;
    lv_draw_label_dsc_init(&label_dsc);
    label_dsc.color = LV_COLOR_WHITE;
    lv_canvas_draw_text(canvas, 5, 5, MASK_WIDTH, &label_dsc, "Text with gradient",
↪LV_LABEL_ALIGN_CENTER);

    /*The mask is reads the canvas is not required anymore*/
    lv_obj_del(canvas);

    /*Create an object mask which will use the created mask*/
    lv_obj_t * om = lv_objmask_create(lv_scr_act(), NULL);
    lv_obj_set_size(om, MASK_WIDTH, MASK_HEIGHT);
}
```

(continues on next page)

(continued from previous page)

```
lv_obj_align(om, NULL, LV_ALIGN_CENTER, 0, 0);

/*Add the created mask map to the object mask*/
lv_draw_mask_map_param_t m;
lv_area_t a;
a.x1 = 0;
a.y1 = 0;
a.x2 = MASK_WIDTH - 1;
a.y2 = MASK_HEIGHT - 1;
lv_draw_mask_map_init(&m, &a, mask_map);
lv_objmask_add_mask(om, &m);

/*Create a style with gradient*/
static lv_style_t style_bg;
lv_style_init(&style_bg);
lv_style_set_bg_opa(&style_bg, LV_STATE_DEFAULT, LV_OPA_COVER);
lv_style_set_bg_color(&style_bg, LV_STATE_DEFAULT, LV_COLOR_RED);
lv_style_set_bg_grad_color(&style_bg, LV_STATE_DEFAULT, LV_COLOR_BLUE);
lv_style_set_bg_grad_dir(&style_bg, LV_STATE_DEFAULT, LV_GRAD_DIR_HOR);

/* Create and object with the gradient style on the object mask.
 * The text will be masked from the gradient*/
lv_obj_t * bg = lv_obj_create(om, NULL);
lv_obj_reset_style_list(bg, LV_OBJ_PART_MAIN);
lv_obj_add_style(bg, LV_OBJ_PART_MAIN, &style_bg);
lv_obj_set_size(bg, MASK_WIDTH, MASK_HEIGHT);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_objmask_part_t
```

### Enums

```
enum [anonymous]
```

Values:

```
LV_OBJMASK_PART_MAIN
```

### Functions

```
lv_obj_t *lv_objmask_create(lv_obj_t *par, const lv_obj_t *copy)
```

Create a object mask objects

**Return** pointer to the created object mask

#### Parameters

- **par**: pointer to an object, it will be the parent of the new object mask
- **copy**: pointer to a object mask object, if not NULL then the new object will be copied from it

```
lv_objmask_mask_t *lv_objmask_add_mask(lv_obj_t *objmask, void *param)
```

Add a mask

**Return** pointer to the added mask

#### Parameters

- **objmask**: pointer to an Object mask object
- **param**: an initialized mask parameter

```
void lv_objmask_update_mask(lv_obj_t *objmask, lv_objmask_mask_t *mask, void *param)
```

Update an already created mask

#### Parameters

- **objmask**: pointer to an Object mask object
- **mask**: pointer to created mask (returned by `lv_objmask_add_mask`)
- **param**: an initialized mask parameter (initialized by `lv_draw_mask_line/angle/.../_init`)

```
void lv_objmask_remove_mask(lv_obj_t *objmask, lv_objmask_mask_t *mask)
```

Remove a mask

#### Parameters

- **objmask**: pointer to an Object mask object
- **mask**: pointer to created mask (returned by `lv_objmask_add_mask`) If NULL passed all masks will be deleted.

```
struct lv_objmask_mask_t
```

#### Public Members

```
void *param
```

```
struct lv_objmask_ext_t
```

#### Public Members

```
lv_cont_ext_t cont
```

```
lv_ll_t mask_ll
```

#### Typedefs

```
typedef uint8_t lv_draw_mask_res_t
```

```
typedef uint8_t lv_draw_mask_type_t
```



```
typedef lv_draw_mask_res_t (*lv_draw_mask_cb_t)(lv_opa_t *mask_buf, lv_coord_t
abs_x, lv_coord_t abs_y, lv_coord_t
len, void *p)
```

```
typedef uint8_t lv_draw_mask_line_side_t
```

```
typedef struct _lv_draw_mask_map_param_t lv_draw_mask_map_param_t
```

## Enums

```
enum [anonymous]
```

*Values:*

```
LV_DRAW_MASK_RES_FULL TRANSP
```

```
LV_DRAW_MASK_RES_FULL COVER
```

```
LV_DRAW_MASK_RES_CHANGED
```

```
LV_DRAW_MASK_RES_UNKNOWN
```

```
enum [anonymous]
```

*Values:*

```
LV_DRAW_MASK_TYPE LINE
```

```
LV_DRAW_MASK_TYPE ANGLE
```

```
LV_DRAW_MASK_TYPE RADIUS
```

```
LV_DRAW_MASK_TYPE FADE
```

```
LV_DRAW_MASK_TYPE MAP
```

```
enum [anonymous]
```

*Values:*

```
LV_DRAW_MASK_LINE_SIDE_LEFT = 0
```

```
LV_DRAW_MASK_LINE_SIDE_RIGHT
```

```
LV_DRAW_MASK_LINE_SIDE_TOP
```

```
LV_DRAW_MASK_LINE_SIDE_BOTTOM
```

## Functions

```
int16_t lv_draw_mask_add(void *param, void *custom_id)
```

Add a draw mask. Everything drawn after it (until removing the mask) will be affected by the mask.

**Return** the an integer, the ID of the mask. Can be used in `lv_draw_mask_remove_id`.

### Parameters

- **param**: an initialized mask parameter. Only the pointer is saved.
- **custom\_id**: a custom pointer to identify the mask. Used in `lv_draw_mask_remove_custom`.

```
lv_draw_mask_res_t lv_draw_mask_apply(lv_opa_t *mask_buf, lv_coord_t abs_x,
lv_coord_t abs_y, lv_coord_t len)
```

Apply the added buffers on a line. Used internally by the library's drawing routines.

**Return** Oneof these values:

- **LV\_DRAW\_MASK\_RES\_FULL\_TRANSP**: the whole line is transparent. **mask\_buf** is not set to zero
- **LV\_DRAW\_MASK\_RES\_FULL\_COVER**: the whole line is fully visible. **mask\_buf** is unchanged
- **LV\_DRAW\_MASK\_RES\_CHANGED**: **mask\_buf** has changed, it shows the desired opacity of each pixel in the given line

#### Parameters

- **mask\_buf**: store the result mask here. Has to be **len** byte long. Should be initialized with **0xFF**.
- **abs\_x**: absolute X coordinate where the line to calculate start
- **abs\_y**: absolute Y coordinate where the line to calculate start
- **len**: length of the line to calculate (in pixel count)

void **\*lv\_draw\_mask\_remove\_id**(int16\_t *id*)

Remove a mask with a given ID

**Return** the parameter of the removed mask. If more masks have **custom\_id** ID then the last mask's parameter will be returned

#### Parameters

- **id**: the ID of the mask. Returned by **lv\_draw\_mask\_add**

void **\*lv\_draw\_mask\_remove\_custom**(void \**custom\_id*)

Remove all mask with a given custom ID

**Return** return the parameter of the removed mask. If more masks have **custom\_id** ID then the last mask's parameter will be returned

#### Parameters

- **custom\_id**: a pointer used in **lv\_draw\_mask\_add**

uint8\_t **lv\_draw\_mask\_get\_cnt**(void)

Count the currently added masks

**Return** number of active masks

void **lv\_draw\_mask\_line\_points\_init**(*lv\_draw\_mask\_line\_param\_t* \**param*, *lv\_coord\_t* *p1x*, *lv\_coord\_t* *p1y*, *lv\_coord\_t* *p2x*, *lv\_coord\_t* *p2y*, *lv\_draw\_mask\_line\_side\_t* *side*)

Initialize a line mask from two points.

#### Parameters

- **param**: pointer to a **lv\_draw\_mask\_param\_t** to initialize
- **p1x**: X coordinate of the first point of the line
- **p1y**: Y coordinate of the first point of the line
- **p2x**: X coordinate of the second point of the line
- **p2y**: y coordinate of the second point of the line
- **side**: and element of **lv\_draw\_mask\_line\_side\_t** to describe which side to keep. With **LV\_DRAW\_MASK\_LINE\_SIDE\_LEFT/RIGHT** and horizontal line all pixels are kept With **LV\_DRAW\_MASK\_LINE\_SIDE\_TOP/BOTTOM** and vertical line all pixels are kept

```
void lv_draw_mask_line_angle_init(lv_draw_mask_line_param_t *param,
                                lv_coord_t px, lv_coord_t py, int16_t angle,
                                lv_draw_mask_line_side_t side)
```

Initialize a line mask from a point and an angle.

#### Parameters

- **param**: pointer to a `lv_draw_mask_param_t` to initialize
- **px**: X coordiante of a point of the line
- **py**: X coordiante of a point of the line
- **angle**: right 0 deg, bottom: 90
- **side**: and element of `lv_draw_mask_line_side_t` to describe which side to keep. With `LV_DRAW_MASK_LINE_SIDE_LEFT/RIGHT` and horizontal line all pixels are kept With `LV_DRAW_MASK_LINE_SIDE_TOP/BOTTOM` and vertical line all pixels are kept

```
void lv_draw_mask_angle_init(lv_draw_mask_angle_param_t *param, lv_coord_t vertex_x,
                             lv_coord_t vertex_y, lv_coord_t start_angle, lv_coord_t
                             end_angle)
```

Initialize an angle mask.

#### Parameters

- **param**: pointer to a `lv_draw_mask_param_t` to initialize
- **vertex\_x**: X coordinate of the angle vertex (absolute coordinates)
- **vertex\_y**: Y coordinate of the angle vertex (absolute coordinates)
- **start\_angle**: start angle in degrees. 0 deg on the right, 90 deg, on the bottom
- **end\_angle**: end angle

```
void lv_draw_mask_radius_init(lv_draw_mask_radius_param_t *param, const lv_area_t
                              *rect, lv_coord_t radius, bool inv)
```

Initialize a fade mask.

#### Parameters

- **param**: param pointer to a `lv_draw_mask_param_t` to initialize
- **rect**: coordinates of the rectangle to affect (absolute coordinates)
- **radius**: radius of the rectangle
- **inv**: true: keep the pixels inside teh rectangle; keep teh pixels outside of the rectangle

```
void lv_draw_mask_fade_init(lv_draw_mask_fade_param_t *param, const lv_area_t
                             *coords, lv_opa_t opa_top, lv_coord_t y_top, lv_opa_t
                             opa_bottom, lv_coord_t y_bottom)
```

Initialize a fade mask.

#### Parameters

- **param**: pointer to a `lv_draw_mask_param_t` to initialize
- **coords**: coordinates of the area to affect (absolute coordinates)
- **opa\_top**: opacity on the top
- **y\_top**: at which coordinate start to change to opacity to **opa\_bottom**
- **opa\_bottom**: opacity at the bottom
- **y\_bottom**: at which coordinate reach **opa\_bottom**.

```
void lv_draw_mask_map_init(lv_draw_mask_map_param_t *param, const lv_area_t *coords,
                          const lv_opa_t *map)
```

Initialize a map mask.

#### Parameters

- **param**: pointer to a `lv_draw_mask_param_t` to initialize
- **coords**: coordinates of the map (absolute coordinates)
- **map**: array of bytes with the mask values

```
struct lv_draw_mask_common_dsc_t
```

#### Public Members

*lv\_draw\_mask\_cb\_t* **cb**

*lv\_draw\_mask\_type\_t* **type**

```
struct lv_draw_mask_line_param_t
```

#### Public Members

*lv\_draw\_mask\_common\_dsc\_t* **dsc**

*lv\_point\_t* **p1**

*lv\_point\_t* **p2**

*lv\_draw\_mask\_line\_side\_t* **side**

**struct** *lv\_draw\_mask\_line\_param\_t*::[anonymous] **cfg**

*lv\_point\_t* **origo**

*int32\_t* **xy\_steep**

*int32\_t* **yx\_steep**

*int32\_t* **steep**

*int32\_t* **spx**

*uint8\_t* **flat**

*uint8\_t* **inv**

```
struct lv_draw_mask_angle_param_t
```

#### Public Members

*lv\_draw\_mask\_common\_dsc\_t* **dsc**

*lv\_point\_t* **vertex\_p**

*lv\_coord\_t* **start\_angle**

*lv\_coord\_t* **end\_angle**

**struct** *lv\_draw\_mask\_angle\_param\_t*::[anonymous] **cfg**

*lv\_draw\_mask\_line\_param\_t* **start\_line**

```

    lv_draw_mask_line_param_t end_line
    uint16_t delta_deg
struct lv_draw_mask_radius_param_t

    Public Members

    lv_draw_mask_common_dsc_t dsc
    lv_area_t rect
    lv_coord_t radius
    uint8_t outer
    struct lv_draw_mask_radius_param_t::[anonymous] cfg
    int32_t y_prev
    lv_sqrt_res_t y_prev_x
struct lv_draw_mask_fade_param_t

```

```

    Public Members

    lv_draw_mask_common_dsc_t dsc
    lv_area_t coords
    lv_coord_t y_top
    lv_coord_t y_bottom
    lv_opa_t opa_top
    lv_opa_t opa_bottom
    struct lv_draw_mask_fade_param_t::[anonymous] cfg
struct _lv_draw_mask_map_param_t

```

```

    Public Members

    lv_draw_mask_common_dsc_t dsc
    lv_area_t coords
    const lv_opa_t *map
    struct _lv_draw_mask_map_param_t::[anonymous] cfg

```

## Page (lv\_page)

### Overview

The Page consist of two *Containers* on each other:

- a **background**
- a top which is **scrollable**.

## Parts and Styles

The Page’ s main part is called `LV_PAGE_PART_BG` which is the background of the Page. It uses all the typical background style properties. Using padding will add space on the sides.

The scrollable object can be referenced via the `LV_PAGE_PART_SCRL` part. It also uses all the typical background style properties and padding to add space on the sides.

`LV_LIST_PART_SCROLLBAR` is a virtual part of the background to draw the scroll bars. Uses all the typical background style properties, *size* to set the width of the scroll bars, and *pad\_right* and *pad\_bottom* to set the spacing.

`LV_LIST_PART_EDGE_FLASH` is also a virtual part of the background to draw a semicircle on the sides when the list can not be scrolled in that direction further. Uses all the typical background properties.

## Usage

The background object can be referenced as the page itself like. E.g. to set the page’ s width: `lv_obj_set_width(page, 100)`.

If a child is created on the page it will be automatically moved to the scrollable container. If the scrollable container becomes larger then the background it can be scrolled by dragging (like the lists on smartphones).

By default, the scrollable’ s has `LV_FIT_MAX` fit in all directions. It means the scrollable size will be the same as the background’ s size (minus the padding) while the children are in the background. But when an object is positioned out of the background the scrollable size will be increased to involve it.

## Scrollbars

Scrollbars can be shown according to four policies:

- `LV_SCROLLBAR_MODE_OFF` Never show scroll bars
- `LV_SCROLLBAR_MODE_ON` Always show scroll bars
- `LV_SCROLLBAR_MODE_DRAG` Show scroll bars when the page is being dragged
- `LV_SCROLLBAR_MODE_AUTO` Show scroll bars when the scrollable container is large enough to be scrolled
- `LV_SCROLLBAR_MODE_HIDE` Hide the scroll bar temporally
- `LV_SCROLLBAR_MODE_UNHIDE` Unhide the previously hidden scrollbar. Recover the original mode too

The scroll bar show policy can be changed by: `lv_page_set_scrollbar_mode(page, SB_MODE)`. The default value is `LV_SCROLLBAR_MODE_AUTO`.

## Glue object

A children can be “glued” to the page. In this case, if the page can be scrolled by dragging that object. It can be enabled by the `lv_page_glue_obj(child, true)`.

## Focus object

An object on a page can be focused with `lv_page_focus(page, child, LV_ANIM_ON/OFF)`. It will move the scrollable container to show a child. The time of the animation can be set by

`lv_page_set_anim_time(page, anim_time)` in milliseconds. `child` doesn't have to be a direct child of the page. This is it works if the scrollable object is the grandparent of the object too.

### Manual navigation

You can move the scrollable object manually using `lv_page_scroll_hor(page, dist)` and `lv_page_scroll_ver(page, dist)`

### Edge flash

A circle-like effect can be shown if the list reached the most top/bottom/left/right position. `lv_page_set_edge_flash(list, en)` enables this feature.

### Scroll propagation

If the list is created on an other scrollable element (like an other page) and the Page can't be scrolled further the scrolling can be propagated to the parent to continue the scrolling on the parent. It can be enabled with `lv_page_set_scroll_propagation(list, true)`

### Clean the page

All the object created on the page can be clean with `lv_page_clean(page)`. Note that `lv_obj_clean(page)` doesn't work here because it would delete the scrollable object too.

### Scrollable API

There are functions to directly set/get the scrollable's attributes:

- `lv_page_get_scr1()`
- `lv_page_set_scr1_fit/fint2/fit4()`
- `lv_page_set_scr1_width()`
- `lv_page_set_scr1_height()`
- `lv_page_set_scr1_fit_width()`
- `lv_page_set_scr1_fit_height()`
- `lv_page_set_scr1_layout()`

### Events

Only the [Generic events](#) are sent by the object type.

The scrollable object has a default event callback which propagates the following events to the background object: `LV_EVENT_PRESSED`, `LV_EVENT_PRESSING`, `LV_EVENT_PRESS_LOST`, `LV_EVENT_RELEASED`, `LV_EVENT_SHORT_CLICKED`, `LV_EVENT_CLICKED`, `LV_EVENT_LONG_PRESSED`, `LV_EVENT_LONG_PRESSED_REPEAT`

Learn more about [Events](#).

## ##Keys

The following *Keys* are processed by the Page:


- **LV\_KEY\_RIGHT/LEFT/UP/DOWN** Scroll the page

Learn more about *Keys*.

## Example

### C

#### Page with scrollbar

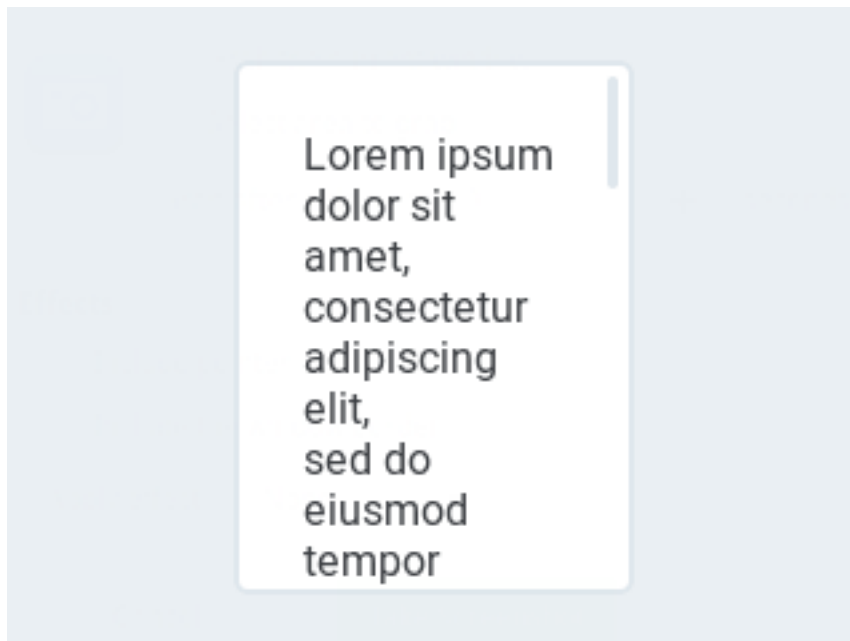

code

```
#include "lvgl/lvgl.h"
#if LV_USE_PAGE

void lv_ex_page_1(void)
{
    /*Create a page*/
    lv_obj_t * page = lv_page_create(lv_scr_act(), NULL);
    lv_obj_set_size(page, 150, 200);
    lv_obj_align(page, NULL, LV_ALIGN_CENTER, 0, 0);

    /*Create a label on the page*/
    lv_obj_t * label = lv_label_create(page, NULL);
    lv_label_set_long_mode(label, LV_LABEL_LONG_BREAK);           /*Automatically
↪break long lines*/
    lv_obj_set_width(label, lv_page_get_width_fit(page));        /*Set the label
↪width to max value to not show hor. scroll bars*/
    lv_label_set_text(label, "Lorem ipsum dolor sit amet, consectetur adipiscing elit,
↪\n"
```

(continues on next page)



(continued from previous page)

```
↪magna aliqua.\n"        "sed do eiusmod tempor incididunt ut labore et dolore.
↪ullamco\n"              "Ut enim ad minim veniam, quis nostrud exercitation.
↪aute irure\n"           "laboris nisi ut aliquip ex ea commodo consequat. Duis.
↪dolore\n"               "dolor in reprehenderit in voluptate velit esse cillum.
                           "eu fugiat nulla pariat.\n"
↪culpa\n"               "Excepteur sint occaecat cupidatat non proident, sunt in.
                           "qui officia deserunt mollit anim id est laborum.");
}
#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_scr_lbar_mode_t
typedef uint8_t lv_page_edge_t
typedef uint8_t lv_part_style_t
```

### Enums

**enum** [anonymous]

Scrollbar modes: shows when should the scrollbars be visible

*Values:*

**LV\_SCROLLBAR\_MODE\_OFF** = 0x0

Never show scroll bars

**LV\_SCROLLBAR\_MODE\_ON** = 0x1

Always show scroll bars

**LV\_SCROLLBAR\_MODE\_DRAG** = 0x2

Show scroll bars when page is being dragged

**LV\_SCROLLBAR\_MODE\_AUTO** = 0x3

Show scroll bars when the scrollable container is large enough to be scrolled

**LV\_SCROLLBAR\_MODE\_HIDE** = 0x4

Hide the scroll bar temporarily

**LV\_SCROLLBAR\_MODE\_UNHIDE** = 0x5

Unhide the previously hidden scroll bar. Recover original mode too

**enum** [anonymous]

Edges: describes the four edges of the page

*Values:*

**LV\_PAGE\_EDGE\_LEFT** = 0x1

**LV\_PAGE\_EDGE\_TOP** = 0x2

**LV\_PAGE\_EDGE\_RIGHT** = 0x4

**LV\_PAGE\_EDGE\_BOTTOM** = 0x8

**enum** [anonymous]

*Values:*

**LV\_PAGE\_PART\_BG** = *LV\_CONT\_PART\_MAIN*

**LV\_PAGE\_PART\_SCROLLBAR** = *\_LV\_OBJ\_PART\_VIRTUAL\_LAST*

**LV\_PAGE\_PART\_EDGE\_FLASH**

**\_LV\_PAGE\_PART\_VIRTUAL\_LAST**

**LV\_PAGE\_PART\_SCROLL** = *\_LV\_OBJ\_PART\_REAL\_LAST*

**\_LV\_PAGE\_PART\_REAL\_LAST**

## Functions

*lv\_obj\_t* \***lv\_page\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a page objects

**Return** pointer to the created page

**Parameters**

- **par**: pointer to an object, it will be the parent of the new page
- **copy**: pointer to a page object, if not NULL then the new object will be copied from it

void **lv\_page\_clean**(*lv\_obj\_t* \*page)

Delete all children of the scrl object, without deleting scrl child.

**Parameters**

- **page**: pointer to an object

*lv\_obj\_t* \***lv\_page\_get\_scrl**(const *lv\_obj\_t* \*page)

Get the scrollable object of a page

**Return** pointer to a container which is the scrollable part of the page

**Parameters**

- **page**: pointer to a page object

uint16\_t **lv\_page\_get\_anim\_time**(const *lv\_obj\_t* \*page)

Get the animation time

**Return** the animation time in milliseconds

**Parameters**

- **page**: pointer to a page object

void **lv\_page\_set\_scrollbar\_mode**(*lv\_obj\_t \*page, lv\_scrollbar\_mode\_t sb\_mode*)  
Set the scroll bar mode on a page

**Parameters**

- **page**: pointer to a page object
- **sb\_mode**: the new mode from 'lv\_page\_sb.mode\_t' enum

void **lv\_page\_set\_anim\_time**(*lv\_obj\_t \*page, uint16\_t anim\_time*)  
Set the animation time for the page

**Parameters**

- **page**: pointer to a page object
- **anim\_time**: animation time in milliseconds

void **lv\_page\_set\_scroll\_propagation**(*lv\_obj\_t \*page, bool en*)  
Enable the scroll propagation feature. If enabled then the page will move its parent if there is no more space to scroll. The page needs to have a page-like parent (e.g. lv\_page, lv\_tabview tab, lv\_win content area etc) If enabled drag direction will be changed LV\_DRAG\_DIR\_ONE automatically to allow scrolling only in one direction at one time.

**Parameters**

- **page**: pointer to a Page
- **en**: true or false to enable/disable scroll propagation

void **lv\_page\_set\_edge\_flash**(*lv\_obj\_t \*page, bool en*)  
Enable the edge flash effect. (Show an arc when the an edge is reached)

**Parameters**

- **page**: pointer to a Page
- **en**: true or false to enable/disable end flash

**static** void **lv\_page\_set\_srl\_fit4**(*lv\_obj\_t \*page, lv\_fit\_t left, lv\_fit\_t right, lv\_fit\_t top, lv\_fit\_t bottom*)

Set the fit policy in all 4 directions separately. It tell how to change the page size automatically.

**Parameters**

- **page**: pointer to a page object
- **left**: left fit policy from lv\_fit\_t
- **right**: right fit policy from lv\_fit\_t
- **top**: bottom fit policy from lv\_fit\_t
- **bottom**: bottom fit policy from lv\_fit\_t

**static** void **lv\_page\_set\_srl\_fit2**(*lv\_obj\_t \*page, lv\_fit\_t hor, lv\_fit\_t ver*)

Set the fit policy horizontally and vertically separately. It tell how to change the page size automatically.

**Parameters**

- **page**: pointer to a page object
- **hor**: horizontal fit policy from lv\_fit\_t
- **ver**: vertical fit policy from lv\_fit\_t

**static** void **lv\_page\_set\_srl\_fit**(*lv\_obj\_t \*page, lv\_fit\_t fit*)

Set the fit policy in all 4 direction at once. It tell how to change the page size automatically.

#### Parameters

- **page**: pointer to a button object
- **fit**: fit policy from `lv_fit_t`

**static void lv\_page\_set\_scrl\_width**(*lv\_obj\_t* \*page, lv\_coord\_t w)

Set width of the scrollable part of a page

#### Parameters

- **page**: pointer to a page object
- **w**: the new width of the scrollable (it has no effect if horizontal fit is enabled)

**static void lv\_page\_set\_scrl\_height**(*lv\_obj\_t* \*page, lv\_coord\_t h)

Set height of the scrollable part of a page

#### Parameters

- **page**: pointer to a page object
- **h**: the new height of the scrollable (it has no effect if vertical fit is enabled)

**static void lv\_page\_set\_scrl\_layout**(*lv\_obj\_t* \*page, *lv\_layout\_t* layout)

Set the layout of the scrollable part of the page

#### Parameters

- **page**: pointer to a page object
- **layout**: a layout from `'lv_cont_layout_t'`

*lv\_scrollbar\_mode\_t* **lv\_page\_get\_sb\_mode**(const *lv\_obj\_t* \*page)

Set the scroll bar mode on a page

**Return** the mode from `'lv_page_sb.mode_t'` enum

#### Parameters

- **page**: pointer to a page object

bool **lv\_page\_get\_scroll\_propagation**(*lv\_obj\_t* \*page)

Get the scroll propagation property

**Return** true or false

#### Parameters

- **page**: pointer to a Page

bool **lv\_page\_get\_edge\_flash**(*lv\_obj\_t* \*page)

Get the edge flash effect property.

#### Parameters

- **page**: pointer to a Page return true or false

lv\_coord\_t **lv\_page\_get\_width\_fit**(*lv\_obj\_t* \*page)

Get that width which can be set to the children to still not cause overflow (show scrollbars)

**Return** the width which still fits into the page

#### Parameters

- **page**: pointer to a page object

lv\_coord\_t **lv\_page\_get\_height\_fit**(*lv\_obj\_t* \*page)

Get that height which can be set to the children to still not cause overflow (show scrollbars)

**Return** the height which still fits into the page

**Parameters**

- **page**: pointer to a page object

`lv_coord_t lv_page_get_width_grid(lv_obj_t *page, uint8_t div, uint8_t span)`

Divide the width of the object and get the width of a given number of columns. Take into account the paddings of the background and scrollbar too.

**Return** the width according to the given parameters

**Parameters**

- **page**: pointer to an object
- **div**: indicates how many columns are assumed. If 1 the width will be set the the parent' s width If 2 only half parent width - inner padding of the parent If 3 only third parent width - 2 \* inner padding of the parent
- **span**: how many columns are combined

`lv_coord_t lv_page_get_height_grid(lv_obj_t *page, uint8_t div, uint8_t span)`

Divide the height of the object and get the width of a given number of columns. Take into account the paddings of the background and scrollbar too.

**Return** the height according to the given parameters

**Parameters**

- **page**: pointer to an object
- **div**: indicates how many rows are assumed. If 1 the height will be set the the parent' s height If 2 only half parent height - inner padding of the parent If 3 only third parent height - 2 \* inner padding of the parent
- **span**: how many rows are combined

**static** `lv_coord_t lv_page_get_scrl_width(const lv_obj_t *page)`

Get width of the scrollable part of a page

**Return** the width of the scrollable

**Parameters**

- **page**: pointer to a page object

**static** `lv_coord_t lv_page_get_scrl_height(const lv_obj_t *page)`

Get height of the scrollable part of a page

**Return** the height of the scrollable

**Parameters**

- **page**: pointer to a page object

**static** `lv_layout_t lv_page_get_scrl_layout(const lv_obj_t *page)`

Get the layout of the scrollable part of a page

**Return** the layout from 'lv\_cont\_layout\_t'

**Parameters**

- **page**: pointer to page object

**static** `lv_fit_t lv_page_get_scrl_fit_left(const lv_obj_t *page)`

Get the left fit mode

**Return** an element of `lv_fit_t`

**Parameters**

- `page`: pointer to a page object

**static** `lv_fit_t lv_page_get_scr_fit_right(const lv_obj_t *page)`

Get the right fit mode

**Return** an element of `lv_fit_t`

**Parameters**

- `page`: pointer to a page object

**static** `lv_fit_t lv_page_get_scr_fit_top(const lv_obj_t *page)`

Get the top fit mode

**Return** an element of `lv_fit_t`

**Parameters**

- `page`: pointer to a page object

**static** `lv_fit_t lv_page_get_scr_fit_bottom(const lv_obj_t *page)`

Get the bottom fit mode

**Return** an element of `lv_fit_t`

**Parameters**

- `page`: pointer to a page object

**bool** `lv_page_on_edge(lv_obj_t *page, lv_page_edge_t edge)`

Find whether the page has been scrolled to a certain edge.

**Return** true if the page is on the specified edge

**Parameters**

- `page`: Page object
- `edge`: Edge to check

**void** `lv_page_glue_obj(lv_obj_t *obj, bool glue)`

Glue the object to the page. After it the page can be moved (dragged) with this object too.

**Parameters**

- `obj`: pointer to an object on a page
- `glue`: true: enable glue, false: disable glue

**void** `lv_page_focus(lv_obj_t *page, const lv_obj_t *obj, lv_anim_enable_t anim_en)`

Focus on an object. It ensures that the object will be visible on the page.

**Parameters**

- `page`: pointer to a page object
- `obj`: pointer to an object to focus (must be on the page)
- `anim_en`: LV\_ANIM\_ON to focus with animation; LV\_ANIM\_OFF to focus without animation

**void** `lv_page_scroll_hor(lv_obj_t *page, lv_coord_t dist)`

Scroll the page horizontally

**Parameters**

- **page**: pointer to a page object
- **dist**: the distance to scroll (< 0: scroll left; > 0 scroll right)

void **lv\_page\_scroll\_ver**(*lv\_obj\_t* \*page, *lv\_coord\_t* dist)

Scroll the page vertically

#### Parameters

- **page**: pointer to a page object
- **dist**: the distance to scroll (< 0: scroll down; > 0 scroll up)

void **lv\_page\_start\_edge\_flash**(*lv\_obj\_t* \*page, *lv\_page\_edge\_t* edge)

Not intended to use directly by the user but by other object types internally. Start an edge flash animation.

#### Parameters

- **page**:
- **edge**: the edge to flash. Can be LV\_PAGE\_EDGE\_LEFT/RIGHT/TOP/BOTTOM

**struct lv\_page\_ext\_t**

#### Public Members

*lv\_cont\_ext\_t* **bg**

*lv\_obj\_t* \***scrl**

*lv\_style\_list\_t* **style**

*lv\_area\_t* **hor\_area**

*lv\_area\_t* **ver\_area**

uint8\_t **hor\_draw**

uint8\_t **ver\_draw**

*lv\_sclbar\_mode\_t* **mode**

**struct** *lv\_page\_ext\_t::*[anonymous] **sclbar**

*lv\_anim\_value\_t* **state**

uint8\_t **enabled**

uint8\_t **top\_ip**

uint8\_t **bottom\_ip**

uint8\_t **right\_ip**

uint8\_t **left\_ip**

**struct** *lv\_page\_ext\_t::*[anonymous] **edge\_flash**

uint16\_t **anim\_time**

*lv\_obj\_t* \***scroll\_prop\_obj**

uint8\_t **scroll\_prop**

## Roller (lv\_roller)

### Overview

Roller allows you to simply select one option from more with scrolling.

### Parts and Styles

The Roller's main part is called `LV_ROLLER_PART_BG`. It's a rectangle and uses all the typical background properties. The style of the Roller's label is inherited from the *text* style properties of the background. To adjust the space between the options use the *text\_line\_space* style property. The *padding* style properties set the space on the sides.

The selected option in the middle can be referenced with `LV_ROLLER_PART_SELECTED` virtual part. It also uses all the typical background properties and *text\_color* property to change the color of the options in the selected area.

### Usage

#### Set options

The options are passed to the Roller as a string with `lv_roller_set_options(roller, options, LV_ROLLER_MODE_NORMAL/INFINITE)`. The options should be separated by `\n`. For example: `"First\nSecond\nThird"`.

`LV_ROLLER_MODE_INIFINITE` make the roller circular.

You can select an option manually with `lv_roller_set_selected(roller, id, LV_ANIM_ON/OFF)`, where *id* is the index of an option.

#### Get selected option

To get the currently selected option use `lv_roller_get_selected(roller)` it will return the *index* of the selected option.

`lv_roller_get_selected_str(roller, buf, buf_size)` copy the name of the selected option to *buf*.

#### Align the options

To align the label horizontally use `lv_roller_set_align(roller, LV_LABEL_ALIGN_LEFT/CENTER/RIGHT)`.

#### Visible rows

The number of visible rows can be adjusted with `lv_roller_set_visible_row_count(roller, num)`



## Animation time

When the Roller is scrolled and doesn't stop exactly on an option it will scroll to the nearest valid option automatically. The time of this scroll animation can be changed by `lv_roller_set_anim_time(roller, anim_time)`. Zero animation time means no animation.

## Events

Besides, the [Generic events](#) the following [Special events](#) are sent by the Drop down lists:

- **LV\_EVENT\_VALUE\_CHANGED** sent when a new option is selected

Learn more about [Events](#).

## Keys


The following *Keys* are processed by the Buttons:

- **LV\_KEY\_RIGHT/DOWN** Select the next option
- **LV\_KEY\_LEFT/UP** Select the previous option
- **LV\_KEY\_ENTER** Apply the selected option (Send **LV\_EVENT\_VALUE\_CHANGED** event)

## Example

### C

#### Simple Roller

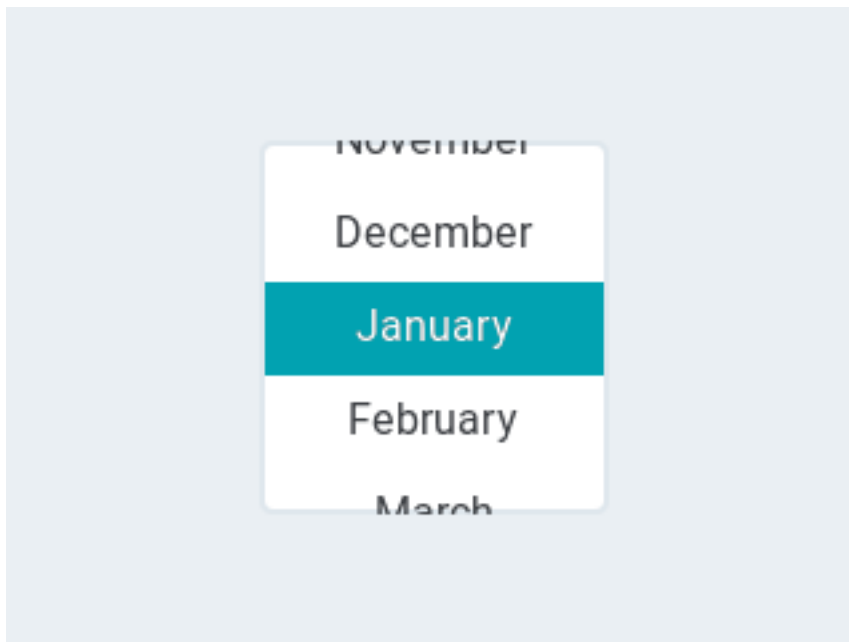

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_ROLLER

static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        char buf[32];
        lv_roller_get_selected_str(obj, buf, sizeof(buf));
        printf("Selected month: %s\n", buf);
    }
}

void lv_ex_roller_1(void)
{
    lv_obj_t *roller1 = lv_roller_create(lv_scr_act(), NULL);
    lv_roller_set_options(roller1,
        "January\n"
        "February\n"
        "March\n"
        "April\n"
        "May\n"
        "June\n"
        "July\n"
        "August\n"
        "September\n"
        "October\n"
        "November\n"
        "December",
        LV_ROLLER_MODE_INFINITE);

    lv_roller_set_visible_row_count(roller1, 4);
    lv_obj_align(roller1, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_set_event_cb(roller1, event_handler);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_roller\_mode\_t**

**typedef** uint8\_t **lv\_roller\_part\_t**

## Enums

**enum** [anonymous]  
Roller mode.

*Values:*

**LV\_ROLLER\_MODE\_NORMAL**

Normal mode (roller ends at the end of the options).

**LV\_ROLLER\_MODE\_INFINITE**

Infinite mode (roller can be scrolled forever).

**enum** [anonymous]  
*Values:*

**LV\_ROLLER\_PART\_BG** = *LV\_PAGE\_PART\_BG*

**LV\_ROLLER\_PART\_SELECTED** = *\_LV\_PAGE\_PART\_VIRTUAL\_LAST*

**\_LV\_ROLLER\_PART\_VIRTUAL\_LAST**

## Functions

*lv\_obj\_t* \***lv\_roller\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)

Create a roller object

**Return** pointer to the created roller

**Parameters**

- **par**: pointer to an object, it will be the parent of the new roller
- **copy**: pointer to a roller object, if not NULL then the new object will be copied from it

void **lv\_roller\_set\_options**(*lv\_obj\_t* \*roller, **const** char \*options, *lv\_roller\_mode\_t* mode)

Set the options on a roller

**Parameters**

- **roller**: pointer to roller object
- **options**: a string with " separated options. E.g. "One\nTwo\nThree"
- **mode**: LV\_ROLLER\_MODE\_NORMAL or LV\_ROLLER\_MODE\_INFINITE

void **lv\_roller\_set\_align**(*lv\_obj\_t* \*roller, *lv\_label\_align\_t* align)

Set the align of the roller's options (left, right or center[default])

**Parameters**

- **roller**: - pointer to a roller object
- **align**: - one of *lv\_label\_align\_t* values (left, right, center)

void **lv\_roller\_set\_selected**(*lv\_obj\_t* \*roller, uint16\_t sel\_opt, *lv\_anim\_enable\_t* anim)

Set the selected option

**Parameters**

- **roller**: pointer to a roller object
- **sel\_opt**: id of the selected option (0 ...number of option - 1);
- **anim**: LV\_ANOM\_ON: set with animation; LV\_ANIM\_OFF set immediately

void **lv\_roller\_set\_visible\_row\_count**(*lv\_obj\_t* \*roller, uint8\_t row\_cnt)  
Set the height to show the given number of rows (options)

**Parameters**

- roller: pointer to a roller object
- row\_cnt: number of desired visible rows

void **lv\_roller\_set\_auto\_fit**(*lv\_obj\_t* \*roller, bool auto\_fit)  
Allow automatically setting the width of roller according to it' s content.

**Parameters**

- roller: pointer to a roller object
- auto\_fit: true: enable auto fit

static void **lv\_roller\_set\_anim\_time**(*lv\_obj\_t* \*roller, uint16\_t anim\_time)  
Set the open/close animation time.

**Parameters**

- roller: pointer to a roller object
- anim\_time: open/close animation time [ms]

uint16\_t **lv\_roller\_get\_selected**(const *lv\_obj\_t* \*roller)  
Get the id of the selected option

**Return** id of the selected option (0 ...number of option - 1);

**Parameters**

- roller: pointer to a roller object

uint16\_t **lv\_roller\_get\_option\_cnt**(const *lv\_obj\_t* \*roller)  
Get the total number of options

**Return** the total number of options in the list

**Parameters**

- roller: pointer to a roller object

void **lv\_roller\_get\_selected\_str**(const *lv\_obj\_t* \*roller, char \*buf, uint16\_t buf\_size)  
Get the current selected option as a string

**Parameters**

- roller: pointer to roller object
- buf: pointer to an array to store the string
- buf\_size: size of buf in bytes. 0: to ignore it.

*lv\_label\_align\_t* **lv\_roller\_get\_align**(const *lv\_obj\_t* \*roller)  
Get the align attribute. Default alignment after \_create is LV\_LABEL\_ALIGN\_CENTER

**Return** LV\_LABEL\_ALIGN\_LEFT, LV\_LABEL\_ALIGN\_RIGHT or  
LV\_LABEL\_ALIGN\_CENTER

**Parameters**

- roller: pointer to a roller object

bool **lv\_roller\_get\_auto\_fit**(*lv\_obj\_t* \*roller)  
Get whether the auto fit option is enabled or not.

**Return** true: auto fit is enabled

#### Parameters

- **roller**: pointer to a roller object

**const** char \***lv\_roller\_get\_options**(**const** lv\_obj\_t \*roller)

Get the options of a roller

**Return** the options separated by " -s (E.g. "Option1\nOption2\nOption3" )

#### Parameters

- **roller**: pointer to roller object

**static** uint16\_t **lv\_roller\_get\_anim\_time**(**const** lv\_obj\_t \*roller)

Get the open/close animation time.

**Return** open/close animation time [ms]

#### Parameters

- **roller**: pointer to a roller

**struct** lv\_roller\_ext\_t

#### Public Members

lv\_page\_ext\_t **page**

lv\_style\_list\_t **style\_sel**

uint16\_t **option\_cnt**

uint16\_t **sel\_opt\_id**

uint16\_t **sel\_opt\_id\_ori**

lv\_roller\_mode\_t **mode**

uint8\_t **auto\_fit**

### Slider (lv\_slider)

#### Overview

The Slider object looks like a [Bar](#) supplemented with a knob. The knob can be dragged to set a value. The Slider also can be vertical or horizontal.

#### Parts and Styles

The Slider' s main part is called LV\_SLIDER\_PART\_BG and it uses the typical background style properties.

LV\_SLIDER\_PART\_INDIC is a virtual part which also uses all the typical background properties. By default, the indicator maximal size is the same as the background' s size but setting positive padding values in LV\_SLIDER\_PART\_BG will make the indicator smaller. (negative values will make it larger) If the *value* style property is used on the indicator the alignment will be calculated based on the current size of the indicator. For example a center aligned value is always shown in the middle of the indicator regardless it' s current size.

**LV\_SLIDER\_PART\_KNOB** is a virtual part using all the typical background properties to describe the knob(s). Similarly to the *indicator* the *value* text is also aligned to the current position and size of the knob. By default the knob is square (with a radius) with side length equal to the smaller side of the slider. The knob can be made larger with the *padding* values. Padding values can be asymmetric too.

## Usage

### Value and range

To set an initial value use `lv_slider_set_value(slider, new_value, LV_ANIM_ON/OFF)`. `lv_slider_set_anim_time(slider, anim_time)` sets the animation time in milliseconds.

To specify the range (min, max values) the `lv_slider_set_range(slider, min , max)` can be used.

### Symmetrical and Range

Besides the normal type the Slider can be configured in two additional types:

- **LV\_SLIDER\_TYPE\_NORMAL** normal type
- **LV\_SLIDER\_TYPE\_SYMMETRICAL** draw the indicator symmetrical to zero (drawn from zero, left to right)
- **LV\_SLIDER\_TYPE\_RANGE** allow the use of an additional knob for the left (start) value. (Can be used with `lv_slider_set/get_left_value()`)

The type can be changed with `lv_slider_set_type(slider, LV_SLIDER_TYPE_...)`

## Events

Besides the [Generic events](#) the following [Special events](#) are sent by the Slider:

- **LV\_EVENT\_VALUE\_CHANGED** Sent while the slider is being dragged or changed with keys. The event is sent continuously while the slider is dragged and only when it is released. Use `lv_slider_is_dragged` to decide whether is slider is being dragged or just released.

## Keys


- **LV\_KEY\_UP, LV\_KEY\_RIGHT** Increment the slider' s value by 1
- **LV\_KEY\_DOWN, LV\_KEY\_LEFT** Decrement the slider' s value by 1

Learn more about [Keys](#).

## Example

### C

## Slider with custo mstyle

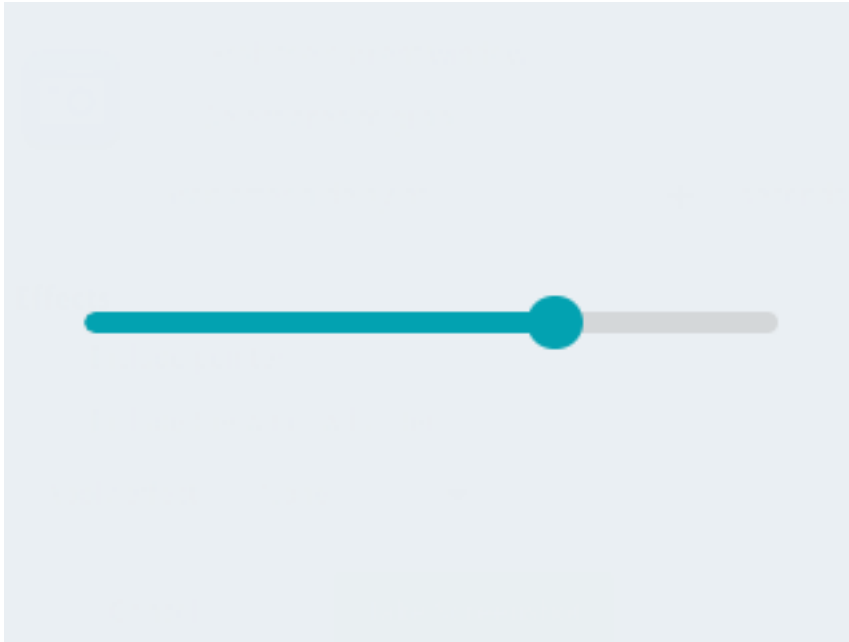

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_SLIDER


static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        printf("Value: %d\n", lv_slider_get_value(obj));
    }
}

void lv_ex_slider_1(void)
{
    /*Create a slider*/
    lv_obj_t * slider = lv_slider_create(lv_scr_act(), NULL);
    lv_obj_align(slider, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_set_event_cb(slider, event_handler);
}

#endif
```

## Set value with slider

Welcome to the slider+label demo!  
Move the slider and see that the label  
updates to match it.



code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_SLIDER

static void slider_event_cb(lv_obj_t * slider, lv_event_t event);
static lv_obj_t * slider_label;

void lv_ex_slider_2(void)
{
    /* Create a slider in the center of the display */
    lv_obj_t * slider = lv_slider_create(lv_scr_act(), NULL);
    lv_obj_set_width(slider, LV_DPI * 2);
    lv_obj_align(slider, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_obj_set_event_cb(slider, slider_event_cb);
    lv_slider_set_range(slider, 0, 100);

    /* Create a label below the slider */
    slider_label = lv_label_create(lv_scr_act(), NULL);
    lv_label_set_text(slider_label, "0");
    lv_obj_set_auto_realign(slider_label, true);
    lv_obj_align(slider_label, slider, LV_ALIGN_OUT_BOTTOM_MID, 0, 10);

    /* Create an informative label */
    lv_obj_t * info = lv_label_create(lv_scr_act(), NULL);
    lv_label_set_text(info, "Welcome to the slider+label demo!\n"
                            "Move the slider and see that the label\n"
                            "updates to match it.");
    lv_obj_align(info, NULL, LV_ALIGN_IN_TOP_LEFT, 10, 10);
}

static void slider_event_cb(lv_obj_t * slider, lv_event_t event)
```

(continues on next page)



(continued from previous page)

```
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        static char buf[4]; /* max 3 bytes for number plus 1 null terminating byte */
        snprintf(buf, 4, "%u", lv_slider_get_value(slider));
        lv_label_set_text(slider_label, buf);
    }
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_slider\_type\_t**

### Enums

**enum** [anonymous]

*Values:*

**LV\_SLIDER\_TYPE\_NORMAL**

**LV\_SLIDER\_TYPE\_SYMMETRICAL**

**LV\_SLIDER\_TYPE\_RANGE**

**enum** [anonymous]

Built-in styles of slider

*Values:*

**LV\_SLIDER\_PART\_BG**

**LV\_SLIDER\_PART\_INDIC**

Slider background style.

**LV\_SLIDER\_PART\_KNOB**

Slider indicator (filled area) style.

### Functions

*lv\_obj\_t* \***lv\_slider\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a slider objects

**Return** pointer to the created slider

**Parameters**

- **par**: pointer to an object, it will be the parent of the new slider

- **copy**: pointer to a slider object, if not NULL then the new object will be copied from it

**static void lv\_slider\_set\_value**(*lv\_obj\_t* \*slider, int16\_t value, *lv\_anim\_enable\_t* anim)

Set a new value on the slider

#### Parameters

- **slider**: pointer to a slider object
- **value**: new value
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

**static void lv\_slider\_set\_left\_value**(*lv\_obj\_t* \*slider, int16\_t left\_value, *lv\_anim\_enable\_t* anim)

Set a new value for the left knob of a slider

#### Parameters

- **slider**: pointer to a slider object
- **left\_value**: new value
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

**static void lv\_slider\_set\_range**(*lv\_obj\_t* \*slider, int16\_t min, int16\_t max)

Set minimum and the maximum values of a bar

#### Parameters

- **slider**: pointer to the slider object
- **min**: minimum value
- **max**: maximum value

**static void lv\_slider\_set\_anim\_time**(*lv\_obj\_t* \*slider, uint16\_t anim\_time)

Make the slider symmetric to zero. The indicator will grow from zero instead of the minimum position.

#### Parameters

- **slider**: pointer to a slider object
- **en**: true: enable disable symmetric behavior; false: disable

**static void lv\_slider\_set\_type**(*lv\_obj\_t* \*slider, *lv\_slider\_type\_t* type)

Set the animation time of the slider

#### Parameters

- **slider**: pointer to a bar object
- **anim\_time**: the animation time in milliseconds.

int16\_t **lv\_slider\_get\_value**(const *lv\_obj\_t* \*slider)

Get the value of the main knob of a slider

**Return** the value of the main knob of the slider

#### Parameters

- **slider**: pointer to a slider object

**static int16\_t lv\_slider\_get\_left\_value**(const *lv\_obj\_t* \*slider)

Get the value of the left knob of a slider

**Return** the value of the left knob of the slider

#### Parameters

- `slider`: pointer to a slider object

**static** int16\_t **lv\_slider\_get\_min\_value**(const lv\_obj\_t \*slider)

Get the minimum value of a slider

**Return** the minimum value of the slider

#### Parameters

- `slider`: pointer to a slider object

**static** int16\_t **lv\_slider\_get\_max\_value**(const lv\_obj\_t \*slider)

Get the maximum value of a slider

**Return** the maximum value of the slider

#### Parameters

- `slider`: pointer to a slider object

bool **lv\_slider\_is\_dragged**(const lv\_obj\_t \*slider)

Give the slider is being dragged or not

**Return** true: drag in progress false: not dragged

#### Parameters

- `slider`: pointer to a slider object

**static** uint16\_t **lv\_slider\_get\_anim\_time**(lv\_obj\_t \*slider)

Get the animation time of the slider

**Return** the animation time in milliseconds.

#### Parameters

- `slider`: pointer to a slider object

**static** lv\_slider\_type\_t **lv\_slider\_get\_type**(lv\_obj\_t \*slider)

Get whether the slider is symmetric or not.

**Return** true: symmetric is enabled; false: disable

#### Parameters

- `slider`: pointer to a bar object

**struct** lv\_slider\_ext\_t

#### Public Members

lv\_bar\_ext\_t **bar**

lv\_style\_list\_t **style\_knob**

lv\_area\_t **left\_knob\_area**

lv\_area\_t **right\_knob\_area**

int16\_t \***value\_to\_set**

uint8\_t **dragging**

## Spinbox (lv\_spinbox)

### Overview

The Spinbox contains a number as text which can be increased or decreased by *Keys* or API functions. Under the hood the Spinbox is a modified *Text area*.

### Parts and Styles

The Spinbox' s main part is called `LV_SPINBOX_PART_BG` which is a rectangle-like background using all the typical background style properties. It also describes the style of the label with its *text* style properties.

`LV_SPINBOX_PART_CURSOR` is a virtual part describing the cursor. Read the *Text area* documentation for a detailed description.

### Set format

`lv_spinbox_set_digit_format(spinbox, digit_count, separator_position)` set the format of the number. `digit_count` sets the number of digits. Leading zeros are added to fill the space on the left. `separator_position` sets the number of digit before the decimal point. `0` means no decimal point.

`lv_spinbox_set_padding_left(spinbox, cnt)` add `cnt` "space" characters between the sign and the most left digit.

### Value and ranges

`lv_spinbox_set_range(spinbox, min, max)` sets the range of the Spinbox.

`lv_spinbox_set_value(spinbox, num)` sets the Spinbox' s value manually.

`lv_spinbox_increment(spinbox)` and `lv_spinbox_decrement(spinbox)` increments/decrements the value of the Spinbox.

`lv_spinbox_set_step(spinbox, step)` sets the amount to increment/decrement.

### Events

Besides the *Generic events* the following *Special events* are sent by the Drop down lists:

- `LV_EVENT_VALUE_CHANGED` sent when the value has changed. (the value is set as event data as `int32_t`)
- `LV_EVENT_INSERT` sent by the ancestor Text area but shouldn' t be used.

Learn more about *Events*.

### Keys

The following *Keys* are processed by the Buttons:


- `LV_KEY_LEFT/RIGHT` With *Keypad* move the cursor left/right. With *Encoder* decrement/increment the selected digit.

- **LV\_KEY\_ENTER** Apply the selected option (Send `LV_EVENT_VALUE_CHANGED` event and close the Drop down list)
- **LV\_KEY\_ENTER** With *Encoder* got the net digit. Jump to the first after the last.

### Example

#### C

#### Simple Spinbox

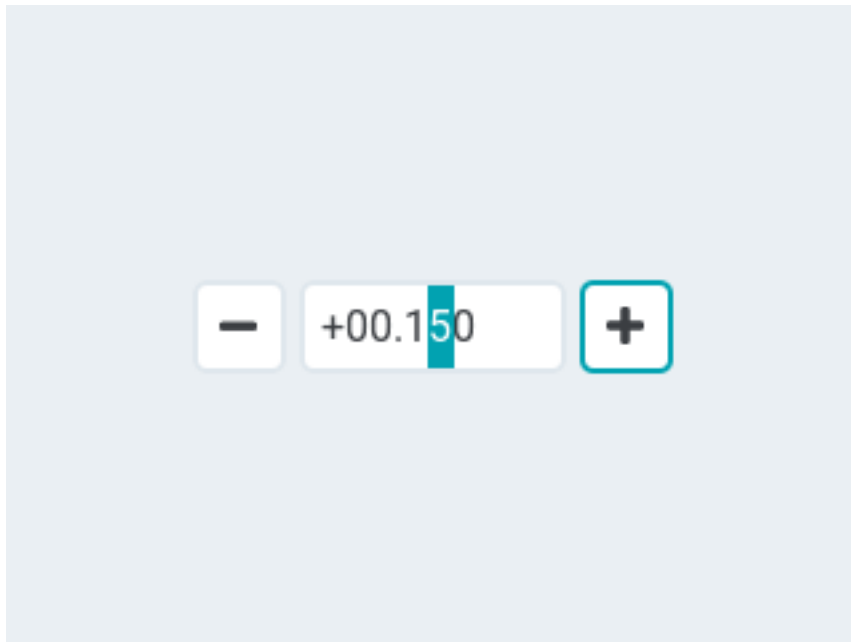

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_SPINBOX

static lv_obj_t * spinbox;

static void lv_spinbox_increment_event_cb(lv_obj_t * btn, lv_event_t e)
{
    if(e == LV_EVENT_SHORT_CLICKED || e == LV_EVENT_LONG_PRESSED_REPEAT) {
        lv_spinbox_increment(spinbox);
    }
}

static void lv_spinbox_decrement_event_cb(lv_obj_t * btn, lv_event_t e)
{
    if(e == LV_EVENT_SHORT_CLICKED || e == LV_EVENT_LONG_PRESSED_REPEAT) {
        lv_spinbox_decrement(spinbox);
    }
}

}
```

(continues on next page)

(continued from previous page)

```

void lv_ex_spinbox_1(void)
{
    spinbox = lv_spinbox_create(lv_scr_act(), NULL);
    lv_spinbox_set_range(spinbox, -1000, 90000);
    lv_spinbox_set_digit_format(spinbox, 5, 2);
    lv_spinbox_step_prev(spinbox);
    lv_obj_set_width(spinbox, 100);
    lv_obj_align(spinbox, NULL, LV_ALIGN_CENTER, 0, 0);

    lv_coord_t h = lv_obj_get_height(spinbox);
    lv_obj_t * btn = lv_btn_create(lv_scr_act(), NULL);
    lv_obj_set_size(btn, h, h);
    lv_obj_align(btn, spinbox, LV_ALIGN_OUT_RIGHT_MID, 5, 0);
    lv_theme_apply(btn, LV_THEME_SPINBOX_BTN);
    lv_obj_set_style_local_value_str(btn, LV_BTN_PART_MAIN, LV_STATE_DEFAULT, LV_
↪SYMBOL_PLUS);
    lv_obj_set_event_cb(btn, lv_spinbox_increment_event_cb);

    btn = lv_btn_create(lv_scr_act(), btn);
    lv_obj_align(btn, spinbox, LV_ALIGN_OUT_LEFT_MID, -5, 0);
    lv_obj_set_event_cb(btn, lv_spinbox_decrement_event_cb);
    lv_obj_set_style_local_value_str(btn, LV_BTN_PART_MAIN, LV_STATE_DEFAULT, LV_
↪SYMBOL_MINUS);
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_spinbox\_part\_t**

### Enums

**enum** [anonymous]

*Values:*

**LV\_SPINBOX\_PART\_BG** = *LV\_TEXTAREA\_PART\_BG*

**LV\_SPINBOX\_PART\_CURSOR** = *LV\_TEXTAREA\_PART\_CURSOR*

**\_LV\_SPINBOX\_PART\_VIRTUAL\_LAST** = *\_LV\_TEXTAREA\_PART\_VIRTUAL\_LAST*

**\_LV\_SPINBOX\_PART\_REAL\_LAST** = *\_LV\_TEXTAREA\_PART\_REAL\_LAST*

## Functions

*lv\_obj\_t* \***lv\_spinbox\_create**(*lv\_obj\_t* \**par*, **const** *lv\_obj\_t* \**copy*)

Create a spinbox objects

**Return** pointer to the created spinbox

### Parameters

- **par**: pointer to an object, it will be the parent of the new spinbox
- **copy**: pointer to a spinbox object, if not NULL then the new object will be copied from it

void **lv\_spinbox\_set\_rollover**(*lv\_obj\_t* \**spinbox*, **bool** *b*)

Set spinbox rollover function

### Parameters

- **spinbox**: pointer to spinbox
- **b**: true or false to enable or disable (default)

void **lv\_spinbox\_set\_value**(*lv\_obj\_t* \**spinbox*, **int32\_t** *i*)

Set spinbox value

### Parameters

- **spinbox**: pointer to spinbox
- **i**: value to be set

void **lv\_spinbox\_set\_digit\_format**(*lv\_obj\_t* \**spinbox*, **uint8\_t** *digit\_count*, **uint8\_t** *separator\_position*)

Set spinbox digit format (digit count and decimal format)

### Parameters

- **spinbox**: pointer to spinbox
- **digit\_count**: number of digit excluding the decimal separator and the sign
- **separator\_position**: number of digit before the decimal point. If 0, decimal point is not shown

void **lv\_spinbox\_set\_step**(*lv\_obj\_t* \**spinbox*, **uint32\_t** *step*)

Set spinbox step

### Parameters

- **spinbox**: pointer to spinbox
- **step**: steps on increment/decrement

void **lv\_spinbox\_set\_range**(*lv\_obj\_t* \**spinbox*, **int32\_t** *range\_min*, **int32\_t** *range\_max*)

Set spinbox value range

### Parameters

- **spinbox**: pointer to spinbox
- **range\_min**: maximum value, inclusive
- **range\_max**: minimum value, inclusive

void **lv\_spinbox\_set\_padding\_left**(*lv\_obj\_t* \**spinbox*, **uint8\_t** *padding*)

Set spinbox left padding in digits count (added between sign and first digit)

### Parameters

- **spinbox**: pointer to spinbox
- **cb**: Callback function called on value change event

bool **lv\_spinbox\_get\_rollover**(*lv\_obj\_t* \*spinbox)

Get spinbox rollover function status

**Parameters**

- **spinbox**: pointer to spinbox

int32\_t **lv\_spinbox\_get\_value**(*lv\_obj\_t* \*spinbox)

Get the spinbox numeral value (user has to convert to float according to its digit format)

**Return** value integer value of the spinbox

**Parameters**

- **spinbox**: pointer to spinbox

void **lv\_spinbox\_step\_next**(*lv\_obj\_t* \*spinbox)

Select next lower digit for edition by dividing the step by 10

**Parameters**

- **spinbox**: pointer to spinbox

void **lv\_spinbox\_step\_prev**(*lv\_obj\_t* \*spinbox)

Select next higher digit for edition by multiplying the step by 10

**Parameters**

- **spinbox**: pointer to spinbox

void **lv\_spinbox\_increment**(*lv\_obj\_t* \*spinbox)

Increment spinbox value by one step

**Parameters**

- **spinbox**: pointer to spinbox

void **lv\_spinbox\_decrement**(*lv\_obj\_t* \*spinbox)

Decrement spinbox value by one step

**Parameters**

- **spinbox**: pointer to spinbox

**struct lv\_spinbox\_ext\_t**

**Public Members**

*lv\_textarea\_ext\_t* **ta**

int32\_t **value**

int32\_t **range\_max**

int32\_t **range\_min**

int32\_t **step**

uint8\_t **rollover**

uint16\_t **digit\_count**

uint16\_t **dec\_point\_pos**



```
uint16_t digit_padding_left
```

## Example

### Spinner (lv\_spinner)

#### Overview

The Spinner object is a spinning arc over a border.

#### Parts and Styles

The Spinner uses the the following parts:

- **LV\_SPINNER\_PART\_BG**: main part
- **LV\_SPINNER\_PART\_INDIC**: the spinning arc (virtual part)

The parts and style works the same as in case of [Arc](#). Read its documentation for a details description.

#### Usage

##### Arc length

The length of the arc can be adjusted by `lv_spinner_set_arc_length(spinner, deg)`.

##### Spinning speed

The speed of the spinning can be adjusted by `lv_spinner_set_spin_time(preload, time_ms)`.

##### Spin types

You can choose from more spin types:

- **LV\_SPINNER\_TYPE\_SPINNING\_ARC** spin the arc, slow down on the top
- **LV\_SPINNER\_TYPE\_FILLSPIN\_ARC** spin the arc, slow down on the top but also stretch the arc
- **LV\_SPINNER\_TYPE\_CONSTANT\_ARC** spin the arc at a constant speed

To apply one if them use `lv_spinner_set_type(preload, LV_SPINNER_TYPE...)`

##### Spin direction

The direction of spinning can be changed with `lv_spinner_set_dir(preload, LV_SPINNER_DIR_FORWARD/BACKWARD)`.

## Events

Only the [Generic events](#) are sent by the object type.

## Keys


No *Keys* are processed by the object type.

Learn more about *Keys*.

## Example

### C

#### Simple spinner

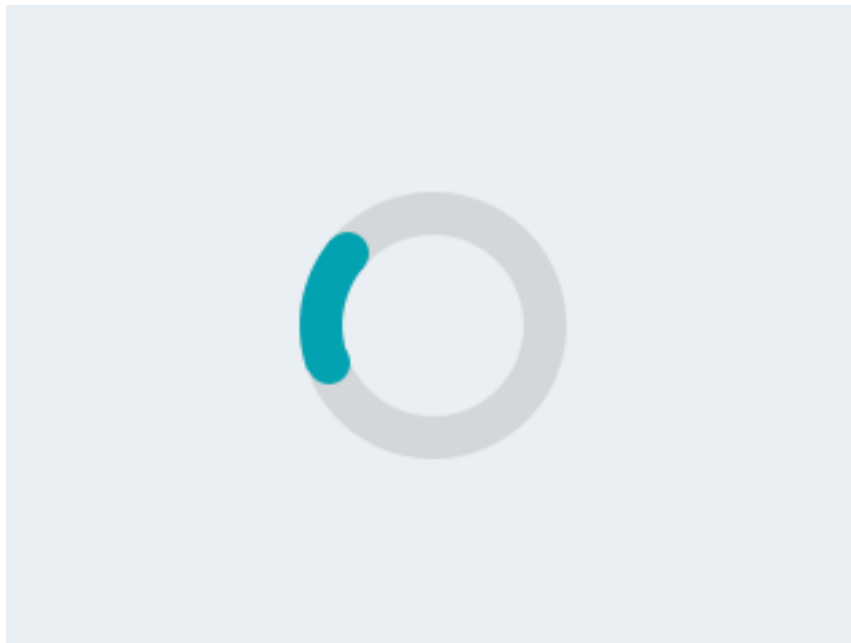

code

```
#include "lvgl/lvgl.h"
#if LV_USE_SPINNER

void lv_ex_spinner_1(void)
{
    /*Create a Preloader object*/
    lv_obj_t * preload = lv_spinner_create(lv_scr_act(), NULL);
    lv_obj_set_size(preload, 100, 100);
    lv_obj_align(preload, NULL, LV_ALIGN_CENTER, 0, 0);
}

#endif
```

## MicroPython

### MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_spinner_type_t
typedef uint8_t lv_spinner_dir_t
typedef uint8_t lv_spinner_style_t
```

### Enums

**enum** [anonymous]  
Type of spinner.

*Values:*

```
LV_SPINNER_TYPE_SPINNING_ARC
LV_SPINNER_TYPE_FILLSPIN_ARC
LV_SPINNER_TYPE_CONSTANT_ARC
```

**enum** [anonymous]  
Direction the spinner should spin.

*Values:*

```
LV_SPINNER_DIR_FORWARD
LV_SPINNER_DIR_BACKWARD
```

**enum** [anonymous]  
*Values:*

```
LV_SPINNER_PART_BG = LV_ARC_PART_BG
LV_SPINNER_PART_INDIC = LV_ARC_PART_INDIC
LV_SPINNER_PART_VIRTUAL_LAST
LV_SPINNER_PART_REAL_LAST = LV_ARC_PART_REAL_LAST
```

### Functions

*lv\_obj\_t* \***lv\_spinner\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)  
Create a pre loader objects

**Return** pointer to the created pre loader

**Parameters**

- **par**: pointer to an object, it will be the parent of the new pre loader

- **copy**: pointer to a pre loader object, if not NULL then the new object will be copied from it

void **lv\_spinner\_set\_arc\_length**(*lv\_obj\_t \*preload*, *lv\_anim\_value\_t deg*)  
 Set the length of the spinning arc in degrees

**Parameters**

- **preload**: pointer to a preload object
- **deg**: length of the arc

void **lv\_spinner\_set\_spin\_time**(*lv\_obj\_t \*preload*, *uint16\_t time*)  
 Set the spin time of the arc

**Parameters**

- **preload**: pointer to a preload object
- **time**: time of one round in milliseconds

void **lv\_spinner\_set\_style**(*lv\_obj\_t \*preload*, *lv\_spinner\_style\_t type*, **const** *lv\_style\_t \*style*)  
 Set a style of a pre loader.

**Parameters**

- **preload**: pointer to pre loader object
- **type**: which style should be set
- **style**: pointer to a style

void **lv\_spinner\_set\_type**(*lv\_obj\_t \*preload*, *lv\_spinner\_type\_t type*)  
 Set the animation type of a spinner.

**Parameters**

- **preload**: pointer to pre loader object
- **type**: animation type of the preload

void **lv\_spinner\_set\_dir**(*lv\_obj\_t \*preload*, *lv\_spinner\_dir\_t dir*)  
 Set the animation direction of a spinner

**Parameters**

- **preload**: pointer to pre loader object
- **direction**: animation direction of the preload

*lv\_anim\_value\_t* **lv\_spinner\_get\_arc\_length**(**const** *lv\_obj\_t \*preload*)  
 Get the arc length [degree] of the a pre loader

**Parameters**

- **preload**: pointer to a pre loader object

*uint16\_t* **lv\_spinner\_get\_spin\_time**(**const** *lv\_obj\_t \*preload*)  
 Get the spin time of the arc

**Parameters**

- **preload**: pointer to a pre loader object [milliseconds]

**const** *lv\_style\_t \****lv\_spinner\_get\_style**(**const** *lv\_obj\_t \*preload*, *lv\_spinner\_style\_t type*)  
 Get style of a pre loader.

**Return** style pointer to the style

#### Parameters

- **preload**: pointer to pre loader object
- **type**: which style should be get

*lv\_spinner\_type\_t* **lv\_spinner\_get\_type**(*lv\_obj\_t* \*preload)

Get the animation type of a spinner.

**Return** animation type

#### Parameters

- **preload**: pointer to pre loader object

*lv\_spinner\_dir\_t* **lv\_spinner\_get\_dir**(*lv\_obj\_t* \*preload)

Get the animation direction of a spinner

**Return** animation direction

#### Parameters

- **preload**: pointer to pre loader object

void **lv\_spinner\_anim\_cb**(void \*ptr, *lv\_anim\_value\_t* val)

Animator function (exec\_cb) to rotate the arc of spinner.

#### Parameters

- **ptr**: pointer to spinner
- **val**: the current desired value [0..360]

**struct lv\_spinner\_ext\_t**

#### Public Members

*lv\_arc\_ext\_t* **arc**

*lv\_anim\_value\_t* **arc\_length**

uint16\_t **time**

*lv\_spinner\_type\_t* **anim\_type**

*lv\_spinner\_dir\_t* **anim\_dir**

### Switch (lv\_switch)

#### Overview

The Switch can be used to turn on/off something. It looks like a little slider.

#### Parts and Styles

The Switch uses the the following parts:

- **LV\_SWITCH\_PART\_BG**: main part
- **LV\_SWITCH\_PART\_INDIC**: the indicator (virtual part)
- **LV\_SWITCH\_PART\_KNOB**: the knob (virtual part)

The parts and style works the same as in case of *Slider*. Read its documentation for a details description.

##Usage

### Change state

The state of the Switch can be changed by clicking on it or by `lv_switch_on(switch, LV_ANIM_ON/OFF)`, `lv_switch_off(switch, LV_ANIM_ON/OFF)` or `lv_switch_toggle(switch, LV_ANIM_ON/OFF)` functions

### Animation time

The time of animations, when the switch changes state, can be adjusted with `lv_switch_set_anim_time(switch, anim_time)`.

### Events

Besides the [Generic events](#) the following [Special events](#) are sent by the Switch:

- **LV\_EVENT\_VALUE\_CHANGED** Sent when the switch changes state.

### Keys


- **LV\_KEY\_UP, LV\_KEY\_RIGHT** Turn on the slider
- **LV\_KEY\_DOWN, LV\_KEY\_LEFT** Turn off the slider

Learn more about [Keys](#).

### Example

C

## Simple Switch

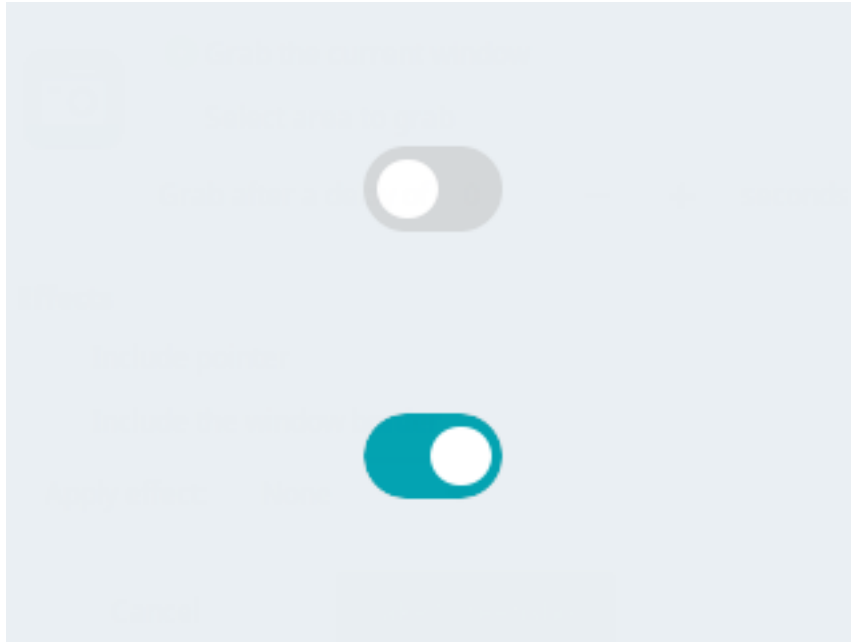

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_SWITCH

static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        printf("State: %s\n", lv_switch_get_state(obj) ? "On" : "Off");
    }
}

void lv_ex_switch_1(void)
{
    /*Create a switch and apply the styles*/
    lv_obj_t *sw1 = lv_switch_create(lv_scr_act(), NULL);
    lv_obj_align(sw1, NULL, LV_ALIGN_CENTER, 0, -50);
    lv_obj_set_event_cb(sw1, event_handler);

    /*Copy the first switch and turn it ON*/
    lv_obj_t *sw2 = lv_switch_create(lv_scr_act(), sw1);
    lv_switch_on(sw2, LV_ANIM_ON);
    lv_obj_align(sw2, NULL, LV_ALIGN_CENTER, 0, 50);
}

#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_switch\_part\_t**

### Enums

**enum** [anonymous]

Switch parts.

*Values:*

**LV\_SWITCH\_PART\_BG** = *LV\_BAR\_PART\_BG*

Switch background.

**LV\_SWITCH\_PART\_INDIC** = *LV\_BAR\_PART\_INDIC*

Switch fill area.

**LV\_SWITCH\_PART\_KNOB** = *\_LV\_BAR\_PART\_VIRTUAL\_LAST*

Switch knob.

**\_LV\_SWITCH\_PART\_VIRTUAL\_LAST**

### Functions

*lv\_obj\_t* \***lv\_switch\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a switch objects

**Return** pointer to the created switch

#### Parameters

- **par**: pointer to an object, it will be the parent of the new switch
- **copy**: pointer to a switch object, if not NULL then the new object will be copied from it

void **lv\_switch\_on**(*lv\_obj\_t* \*sw, *lv\_anim\_enable\_t* anim)

Turn ON the switch

#### Parameters

- **sw**: pointer to a switch object
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

void **lv\_switch\_off**(*lv\_obj\_t* \*sw, *lv\_anim\_enable\_t* anim)

Turn OFF the switch

#### Parameters

- **sw**: pointer to a switch object
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

bool **lv\_switch\_toggle**(*lv\_obj\_t* \*sw, *lv\_anim\_enable\_t* anim)

Toggle the position of the switch

**Return** resulting state of the switch.



#### Parameters

- **sw**: pointer to a switch object
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

void **lv\_switch\_set\_knob\_img**(*lv\_obj\_t* \*sw, const void \*img\_src)

Set an image to display on the knob of the switch.

#### Parameters

- **sw**: pointer to a switch object
- **img\_src**: pointer to an *lv\_img\_dsc\_t* variable or a path to an image (not an *lv\_img* object)

void **lv\_switch\_set\_knob\_on\_img**(*lv\_obj\_t* \*sw, const void \*img\_src)

Set an image to display on the knob of the switch when it's in ON state

#### Parameters

- **sw**: pointer to a switch object
- **img\_src**: pointer to an *lv\_img\_dsc\_t* variable or a path to an image (not an *lv\_img* object)

static void **lv\_switch\_set\_anim\_time**(*lv\_obj\_t* \*sw, uint16\_t anim\_time)

Set the animation time of the switch

**Return** style pointer to a style

#### Parameters

- **sw**: pointer to a switch object
- **anim\_time**: animation time

static bool **lv\_switch\_get\_state**(const *lv\_obj\_t* \*sw)

Get the state of a switch

**Return** false: OFF; true: ON

#### Parameters

- **sw**: pointer to a switch object

const void \***lv\_slider\_get\_knob\_off\_img**(*lv\_obj\_t* \*sw, const void \*img\_src)

Get an image to display on the knob of the switch when it's in OFF state

**Return** the image source: pointer to an *lv\_img\_dsc\_t* variable or a path to an image (not an *lv\_img* object)

#### Parameters

- **sw**: pointer to a switch object

const void \***lv\_slider\_get\_knob\_on\_img**(*lv\_obj\_t* \*sw, const void \*img\_src)

Get an image to display on the knob of the switch when it's in ON state

**Return** the image source: pointer to an *lv\_img\_dsc\_t* variable or a path to an image (not an *lv\_img* object)

#### Parameters

- **sw**: pointer to a switch object

**static** uint16\_t **lv\_switch\_get\_anim\_time**(const lv\_obj\_t \*sw)

Get the animation time of the switch

**Return** style pointer to a style

**Parameters**

- **SW**: pointer to a switch object

**struct lv\_switch\_ext\_t**

**Public Members**

lv\_bar\_ext\_t **bar**

lv\_style\_list\_t **style\_knob**

uint8\_t **state**

## Table (lv\_table)

### Overview

Tables, as usual, are built from rows, columns, and cells containing texts.

The Table object is very light weighted because only the texts are stored. No real objects are created for cells but they are just drawn on the fly.

### Parts and Styles

The main part of the Table is called **LV\_TABLE\_PART\_BG**. It's a rectangle like background and uses all the typical background style properties.

For the cells there are 4 virtual parts. Every cell has type (1, 2, 3 or 4) which tells which part's styles to apply on them. The cell parts are:

- **LV\_TABLE\_PART\_CELL1**
- **LV\_TABLE\_PART\_CELL2**
- **LV\_TABLE\_PART\_CELL3**
- **LV\_TABLE\_PART\_CELL4**

The cells also use all the typical background style properties. If there is a line break (**\n**) in a cell's content then a horizontal division line will drawn after the line break using the *line* style properties.

The style of texts in the cells are inherited from the cell parts or the background part.

### Usage

#### Rows and Columns

To set number of rows and columns use **lv\_table\_set\_row\_cnt(table, row\_cnt)** and **lv\_table\_set\_col\_cnt(table, col\_cnt)**

## Width and Height

The width of the columns can be set with `lv_table_set_col_width(table, col_id, width)`. The overall width of the Table object will be set to the sum of columns widths.

The height is calculated automatically from the cell styles (font, padding etc) and the number of rows.

## Set cell value

The cells can store only texts so numbers needs to be converted to text before displaying them in a table.

`lv_table_set_cell_value(table, row, col, "Content")`. The text is saved by the table so it can be even a local variable.

Line break can be used in the text like `"Value\n60.3"`.

## Align

The text alignment in cells can be adjusted individually with `lv_table_set_cell_align(table, row, col, LV_LABEL_ALIGN_LEFT/CENTER/RIGHT)`.

## Cell type

You can use 4 different cell types. Each has its own style.

Cell types can be used to add different style for example to:

- table header
- first column
- highlight a cell
- etc

The type can be selected with `lv_table_set_cell_type(table, row, col, type)` type can be 1, 2, 3 or 4.

## Merge cells

Cells can be merged horizontally with `lv_table_set_cell_merge_right(table, col, row, true)`. To merge more adjacent cells apply this function for each cell.

## Crop text

By default, the texts are word-wrapped to fit into the width of the cell and the height of the cell is set automatically. To disable this and keep the text as it is enable `lv_table_set_cell_crop(table, row, col, true)`.

## Scroll

To make the Table scrollable place it on a *Page*

## Events

Only the [Generic events](#) are sent by the object type.

Learn more about [Events](#).

## Keys


No *Keys* are processed by the object type.

Learn more about [Keys](#).

## Example

### C

#### Simple table

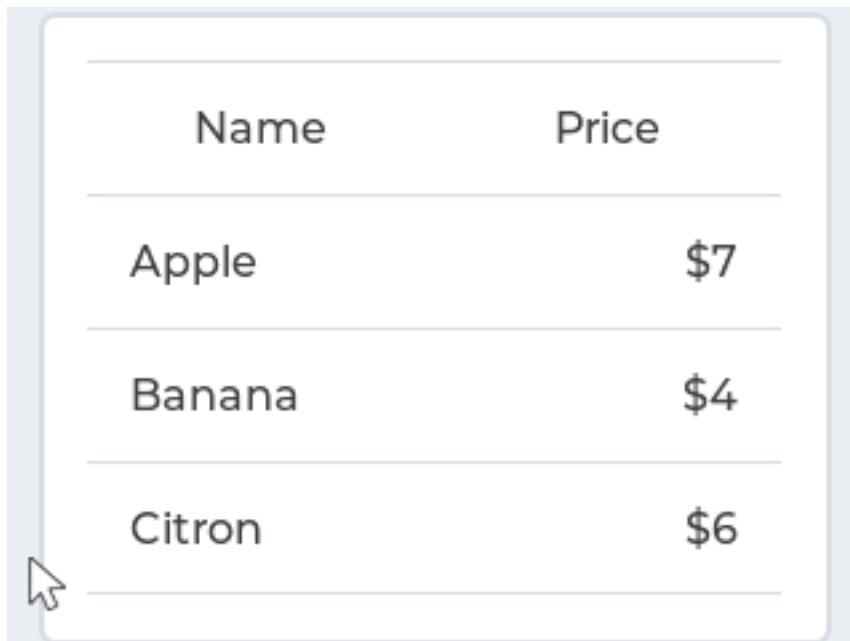

Name	Price
Apple	\$7
Banana	\$4
Citron	\$6

code

```
#include "lvgl/lvgl.h"
#if LV_USE_TABLE

void lv_ex_table_1(void)
{
    lv_obj_t * table = lv_table_create(lv_scr_act(), NULL);
    lv_table_set_col_cnt(table, 2);
    lv_table_set_row_cnt(table, 4);
    lv_obj_align(table, NULL, LV_ALIGN_CENTER, 0, 0);

    /*Make the cells of the first row center aligned */
}
```

(continues on next page)

(continued from previous page)

```
lv_table_set_cell_align(table, 0, 0, LV_LABEL_ALIGN_CENTER);
lv_table_set_cell_align(table, 0, 1, LV_LABEL_ALIGN_CENTER);

/*Align the price values to the right in the 2nd column*/
lv_table_set_cell_align(table, 1, 1, LV_LABEL_ALIGN_RIGHT);
lv_table_set_cell_align(table, 2, 1, LV_LABEL_ALIGN_RIGHT);
lv_table_set_cell_align(table, 3, 1, LV_LABEL_ALIGN_RIGHT);

lv_table_set_cell_type(table, 0, 0, 2);
lv_table_set_cell_type(table, 0, 1, 2);

/*Fill the first column*/
lv_table_set_cell_value(table, 0, 0, "Name");
lv_table_set_cell_value(table, 1, 0, "Apple");
lv_table_set_cell_value(table, 2, 0, "Banana");
lv_table_set_cell_value(table, 3, 0, "Citron");

/*Fill the second column*/
lv_table_set_cell_value(table, 0, 1, "Price");
lv_table_set_cell_value(table, 1, 1, "$7");
lv_table_set_cell_value(table, 2, 1, "$4");
lv_table_set_cell_value(table, 3, 1, "$6");
}

#endif
```

## MicroPython

No examples yet.

## MicroPython

No examples yet.

## API

### Enums

**enum** [anonymous]

Values:

```
LV_TABLE_PART_BG
LV_TABLE_PART_CELL1
LV_TABLE_PART_CELL2
LV_TABLE_PART_CELL3
LV_TABLE_PART_CELL4
```

## Functions

*lv\_obj\_t* \***lv\_table\_create**(*lv\_obj\_t* \**par*, **const** *lv\_obj\_t* \**copy*)

Create a table object

**Return** pointer to the created table

### Parameters

- **par**: pointer to an object, it will be the parent of the new table
- **copy**: pointer to a table object, if not NULL then the new object will be copied from it

void **lv\_table\_set\_cell\_value**(*lv\_obj\_t* \**table*, uint16\_t *row*, uint16\_t *col*, **const** char \**txt*)

Set the value of a cell.

### Parameters

- **table**: pointer to a Table object
- **row**: id of the row [0 .. row\_cnt -1]
- **col**: id of the column [0 .. col\_cnt -1]
- **txt**: text to display in the cell. It will be copied and saved so this variable is not required after this function call.

void **lv\_table\_set\_row\_cnt**(*lv\_obj\_t* \**table*, uint16\_t *row\_cnt*)

Set the number of rows

### Parameters

- **table**: table pointer to a Table object
- **row\_cnt**: number of rows

void **lv\_table\_set\_col\_cnt**(*lv\_obj\_t* \**table*, uint16\_t *col\_cnt*)

Set the number of columns

### Parameters

- **table**: table pointer to a Table object
- **col\_cnt**: number of columns. Must be < LV\_TABLE\_COL\_MAX

void **lv\_table\_set\_col\_width**(*lv\_obj\_t* \**table*, uint16\_t *col\_id*, lv\_coord\_t *w*)

Set the width of a column

### Parameters

- **table**: table pointer to a Table object
- **col\_id**: id of the column [0 .. LV\_TABLE\_COL\_MAX -1]
- **w**: width of the column

void **lv\_table\_set\_cell\_align**(*lv\_obj\_t* \**table*, uint16\_t *row*, uint16\_t *col*, *lv\_label\_align\_t* *align*)

Set the text align in a cell

### Parameters

- **table**: pointer to a Table object
- **row**: id of the row [0 .. row\_cnt -1]
- **col**: id of the column [0 .. col\_cnt -1]

- **align:** LV\_LABEL\_ALIGN\_LEFT or LV\_LABEL\_ALIGN\_CENTER or LV\_LABEL\_ALIGN\_RIGHT

void **lv\_table\_set\_cell\_type**(*lv\_obj\_t* \*table, uint16\_t row, uint16\_t col, uint8\_t type)  
Set the type of a cell.

**Parameters**

- **table:** pointer to a Table object
- **row:** id of the row [0 .. row\_cnt -1]
- **col:** id of the column [0 .. col\_cnt -1]
- **type:** 1,2,3 or 4. The cell style will be chosen accordingly.

void **lv\_table\_set\_cell\_crop**(*lv\_obj\_t* \*table, uint16\_t row, uint16\_t col, bool crop)  
Set the cell crop. (Don't adjust the height of the cell according to its content)

**Parameters**

- **table:** pointer to a Table object
- **row:** id of the row [0 .. row\_cnt -1]
- **col:** id of the column [0 .. col\_cnt -1]
- **crop:** true: crop the cell content; false: set the cell height to the content.

void **lv\_table\_set\_cell\_merge\_right**(*lv\_obj\_t* \*table, uint16\_t row, uint16\_t col, bool en)  
Merge a cell with the right neighbor. The value of the cell to the right won't be displayed.

**Parameters**

- **table:** table pointer to a Table object
- **row:** id of the row [0 .. row\_cnt -1]
- **col:** id of the column [0 .. col\_cnt -1]
- **en:** true: merge right; false: don't merge right

const char \***lv\_table\_get\_cell\_value**(*lv\_obj\_t* \*table, uint16\_t row, uint16\_t col)  
Get the value of a cell.

**Return** text in the cell

**Parameters**

- **table:** pointer to a Table object
- **row:** id of the row [0 .. row\_cnt -1]
- **col:** id of the column [0 .. col\_cnt -1]

uint16\_t **lv\_table\_get\_row\_cnt**(*lv\_obj\_t* \*table)  
Get the number of rows.

**Return** number of rows.

**Parameters**

- **table:** table pointer to a Table object

uint16\_t **lv\_table\_get\_col\_cnt**(*lv\_obj\_t* \*table)  
Get the number of columns.

**Return** number of columns.

#### Parameters

- **table**: table pointer to a Table object

`lv_coord_t lv_table_get_col_width(lv_obj_t *table, uint16_t col_id)`

Get the width of a column

**Return** width of the column

#### Parameters

- **table**: table pointer to a Table object
- **col\_id**: id of the column [0 .. LV\_TABLE\_COL\_MAX -1]

`lv_label_align_t lv_table_get_cell_align(lv_obj_t *table, uint16_t row, uint16_t col)`

Get the text align of a cell

**Return** LV\_LABEL\_ALIGN\_LEFT (default in case of error) or LV\_LABEL\_ALIGN\_CENTER or LV\_LABEL\_ALIGN\_RIGHT

#### Parameters

- **table**: pointer to a Table object
- **row**: id of the row [0 .. row\_cnt -1]
- **col**: id of the column [0 .. col\_cnt -1]

`lv_label_align_t lv_table_get_cell_type(lv_obj_t *table, uint16_t row, uint16_t col)`

Get the type of a cell

**Return** 1,2,3 or 4

#### Parameters

- **table**: pointer to a Table object
- **row**: id of the row [0 .. row\_cnt -1]
- **col**: id of the column [0 .. col\_cnt -1]

`lv_label_align_t lv_table_get_cell_crop(lv_obj_t *table, uint16_t row, uint16_t col)`

Get the crop property of a cell

**Return** true: text crop enabled; false: disabled

#### Parameters

- **table**: pointer to a Table object
- **row**: id of the row [0 .. row\_cnt -1]
- **col**: id of the column [0 .. col\_cnt -1]

`bool lv_table_get_cell_merge_right(lv_obj_t *table, uint16_t row, uint16_t col)`

Get the cell merge attribute.

**Return** true: merge right; false: don't merge right

#### Parameters

- **table**: table pointer to a Table object
- **row**: id of the row [0 .. row\_cnt -1]
- **col**: id of the column [0 .. col\_cnt -1]



`lv_res_t lv_table_get_pressed_cell(lv_obj_t *table, uint16_t *row, uint16_t *col)`

Get the last pressed or being pressed cell

**Return** LV\_RES\_OK: a valid pressed cell was found, LV\_RES\_INV: no valid cell is pressed

#### Parameters

- **table**: pointer to a table object
- **row**: pointer to variable to store the pressed row
- **col**: pointer to variable to store the pressed column

**union lv\_table\_cell\_format\_t**

*#include <lv\_table.h>* Internal table cell format structure.

Use the `lv_table` APIs instead.

#### Public Members

`uint8_t align`

`uint8_t right_merge`

`uint8_t type`

`uint8_t crop`

**struct** *lv\_table\_cell\_format\_t*::[anonymous] **s**

`uint8_t format_byte`

**struct lv\_table\_ext\_t**

#### Public Members

`uint16_t col_cnt`

`uint16_t row_cnt`

`char **cell_data`

`lv_style_list_t cell_style[LV_TABLE_CELL_STYLE_CNT]`

`lv_coord_t col_w[LV_TABLE_COL_MAX]`

`uint8_t cell_types`

### Tabview (`lv_tabview`)

#### Overview

The Tab view object can be used to organize content in tabs.

#### Parts and Styles

The Tab view object has several parts. The main is `LV_TABVIEW_PART_BG`. It a rectangle-like container which holds the other parts of the Tab view.

On the background 2 important real parts are created:

- `LV_TABVIEW_PART_BG_SCRL`: it's the scrollable part of *Page*. It holds the content of the tabs next to each other. The background of the Page is always transparent and can't be accessed externally.
- `LV_TABVIEW_PART_TAB_BG`: The tab buttons which is a *Button matrix*. Clicking on a button will scroll `LV_TABVIEW_PART_BG_SCRL` to the related tab's content. The tab buttons can be accessed via `LV_TABVIEW_PART_TAB_BTN`. The height of the tab's button matrix is calculated from the font height plus padding of the background's and the button's style.

All the listed parts supports the typical background style properties and padding.

`LV_TABVIEW_PART_TAB_BG` has an additional real part, an indicator, called `LV_TABVIEW_PART_INDIC`. It's a thin rectangle-like object under the currently selected tab. When the tab view is animated to an other tab the indicator will be animated too. It can be styles using the typical background style properties. The *size* style property will set the its thickness.

When a new tab is added a *Page* is create for them on `LV_TABVIEW_PART_BG_SCRL` and a new button is added to `LV_TABVIEW_PART_TAB_BG` Button matrix. The created Pages can be used as normal Pages and they have the usual Page parts.

## Usage

### Adding tab

New tabs can be added with `lv_tabview_add_tab(tabview, "Tab name")`. It will return with a pointer to a *Page* object where the tab's content can be created.

### Change tab

To select a new tab you can:

- Click on it on the Button matrix part
- Slide
- Use `lv_tabview_set_tab_act(tabview, id, LV_ANIM_ON/OFF)` function

### Tab button's position

By default, the tab selector buttons are placed on the top of the Tab view. It can be changed with `lv_tabview_set_btns_pos(tabview, LV_TABVIEW_TAB_POS_TOP/BOTTOM/LEFT/RIGHT/NONE)`

`LV_TABVIEW_TAB_POS_NONE` will hide the tabs.

Note that, you can't change the tab position from top or bottom to left or right when tabs are already added.

### Animation time

The animation time is adjusted by `lv_tabview_set_anim_time(tabview, anim_time_ms)`. It is used when the new tab is loaded.

## Scroll propagation

As the tabs' content object is a Page it can receive scroll propagation from an other Page-like object. For example, if a text area is created on the tab's content and that Text area is scrolled but it reached the end the scroll can be propagated to the content Page. It can be enabled with `lv_page/textarea_set_scroll_propagation(obj, true)`.

By default the tab's content Pages have enabled scroll propagation, therefore when they are scrolled horizontally the scroll is propagated to `LV_TABVIEW_PART_BG_SCRL` and this way the Pages will be scrolled.

The manual sliding can be disabled with `lv_page_set_scroll_propagation(tab_page, false)`.

## Events

Besides the [Generic events](#) the following [Special events](#) are sent by the Slider:

- **LV\_EVENT\_VALUE\_CHANGED** Sent when a new tab is selected by sliding or clicking the tab button

Learn more about [Events](#).

## Keys

The following *Keys* are processed by the Tabview:


- **LV\_KEY\_RIGHT/LEFT** Select a tab
- **LV\_KEY\_ENTER** Change to the selected tab

Learn more about [Keys](#).

## Example

### C

## Simple Tabview

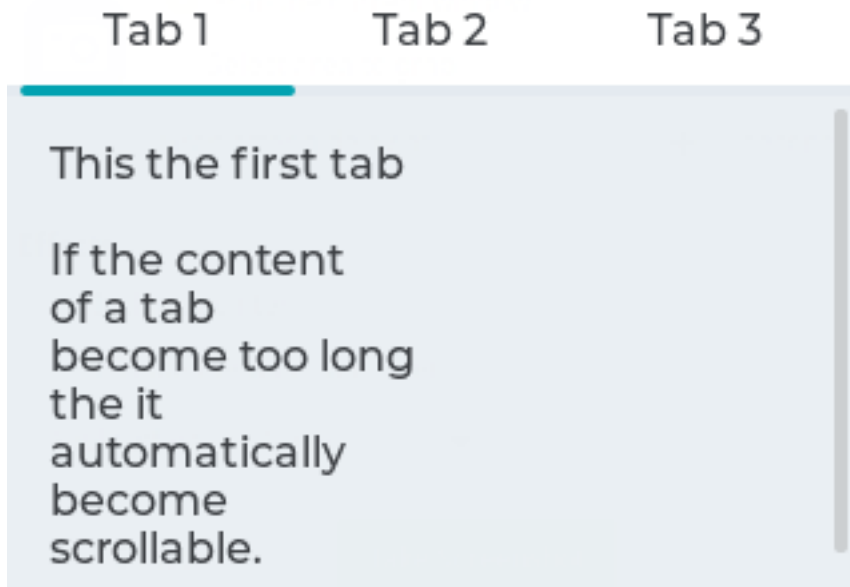

code

```
#include "lvgl/lvgl.h"
#if LV_USE_TABVIEW

void lv_ex_tabview_1(void)
{
    /*Create a Tab view object*/
    lv_obj_t *tabview;
    tabview = lv_tabview_create(lv_scr_act(), NULL);

    /*Add 3 tabs (the tabs are page (lv_page) and can be scrolled*/
    lv_obj_t *tab1 = lv_tabview_add_tab(tabview, "Tab 1");
    lv_obj_t *tab2 = lv_tabview_add_tab(tabview, "Tab 2");
    lv_obj_t *tab3 = lv_tabview_add_tab(tabview, "Tab 3");

    /*Add content to the tabs*/
    lv_obj_t *label = lv_label_create(tab1, NULL);
    lv_label_set_text(label, "This the first tab\n\n"
        "If the content\n"
        "of a tab\n"
        "become too long\n"
        "the it \n"
        "automatically\n"
        "become\n"
        "scrollable.");

    label = lv_label_create(tab2, NULL);
    lv_label_set_text(label, "Second tab");

    label = lv_label_create(tab3, NULL);
    lv_label_set_text(label, "Third tab");
}
```

(continues on next page)

(continued from previous page)

```
}
#endif
```

## MicroPython

No examples yet.

## API

### Typedefs

```
typedef uint8_t lv_tabview_btns_pos_t
typedef uint8_t lv_tabview_part_t
```

### Enums

```
enum [anonymous]
    Position of tabview buttons.
```

*Values:*

```
LV_TABVIEW_TAB_POS_NONE
LV_TABVIEW_TAB_POS_TOP
LV_TABVIEW_TAB_POS_BOTTOM
LV_TABVIEW_TAB_POS_LEFT
LV_TABVIEW_TAB_POS_RIGHT
```

```
enum [anonymous]
    Values:
```

```
LV_TABVIEW_PART_BG = LV_OBJ_PART_MAIN
LV_TABVIEW_PART_VIRTUAL_LAST = LV_OBJ_PART_VIRTUAL_LAST
LV_TABVIEW_PART_BG_SCRL = LV_OBJ_PART_REAL_LAST
LV_TABVIEW_PART_TAB_BG
LV_TABVIEW_PART_TAB_BTN
LV_TABVIEW_PART_INDIC
LV_TABVIEW_PART_REAL_LAST
```

### Functions

```
lv_obj_t *lv_tabview_create(lv_obj_t *par, const lv_obj_t *copy)
    Create a Tab view object
```

**Return** pointer to the created tab

**Parameters**

- **par**: pointer to an object, it will be the parent of the new tab
- **copy**: pointer to a tab object, if not NULL then the new object will be copied from it

void **lv\_tabview\_clean**(*lv\_obj\_t* \*tabview)

Delete all children of the scr1 object, without deleting scr1 child.

#### Parameters

- **tabview**: pointer to an object

*lv\_obj\_t* \***lv\_tabview\_add\_tab**(*lv\_obj\_t* \*tabview, **const** char \*name)

Add a new tab with the given name

**Return** pointer to the created page object (lv\_page). You can create your content here

#### Parameters

- **tabview**: pointer to Tab view object where to ass the new tab
- **name**: the text on the tab button

void **lv\_tabview\_set\_tab\_act**(*lv\_obj\_t* \*tabview, uint16\_t id, *lv\_anim\_enable\_t* anim)

Set a new tab

#### Parameters

- **tabview**: pointer to Tab view object
- **id**: index of a tab to load
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

void **lv\_tabview\_set\_anim\_time**(*lv\_obj\_t* \*tabview, uint16\_t anim\_time)

Set the animation time of tab view when a new tab is loaded

#### Parameters

- **tabview**: pointer to Tab view object
- **anim\_time**: time of animation in milliseconds

void **lv\_tabview\_set\_btns\_pos**(*lv\_obj\_t* \*tabview, *lv\_tabview\_btns\_pos\_t* btns\_pos)

Set the position of tab select buttons

#### Parameters

- **tabview**: pointer to a tab view object
- **btns\_pos**: which button position

uint16\_t **lv\_tabview\_get\_tab\_act**(**const** *lv\_obj\_t* \*tabview)

Get the index of the currently active tab

**Return** the active tab index

#### Parameters

- **tabview**: pointer to Tab view object

uint16\_t **lv\_tabview\_get\_tab\_count**(**const** *lv\_obj\_t* \*tabview)

Get the number of tabs

**Return** tab count

#### Parameters

- **tabview**: pointer to Tab view object

*lv\_obj\_t* \***lv\_tabview\_get\_tab**(const *lv\_obj\_t* \*tabview, uint16\_t id)

Get the page (content area) of a tab

**Return** pointer to page (lv\_page) object

**Parameters**

- tabview: pointer to Tab view object
- id: index of the tab (>= 0)

uint16\_t **lv\_tabview\_get\_anim\_time**(const *lv\_obj\_t* \*tabview)

Get the animation time of tab view when a new tab is loaded

**Return** time of animation in milliseconds

**Parameters**

- tabview: pointer to Tab view object

*lv\_tabview\_btns\_pos\_t* **lv\_tabview\_get\_btns\_pos**(const *lv\_obj\_t* \*tabview)

Get position of tab select buttons

**Parameters**

- tabview: pointer to a ab view object

**struct lv\_tabview\_ext\_t**

**Public Members**

*lv\_obj\_t* \***btns**

*lv\_obj\_t* \***indic**

*lv\_obj\_t* \***content**

const char \*\***tab\_name\_ptr**

lv\_point\_t **point\_last**

uint16\_t **tab\_cur**

uint16\_t **tab\_cnt**

uint16\_t **anim\_time**

*lv\_tabview\_btns\_pos\_t* **btns\_pos**

**Text area (lv\_textarea)**

**Overview**

The Text Area is a *Page* with a *Label* and a cursor on it. Texts or characters can be added to it. Long lines are wrapped and when the text becomes long enough the Text area can be scrolled.

**Parts and Styles**

The Text area has the same parts as *Page*. Expect LV\_PAGE\_PART\_SCRL because it can't be referenced and it's always transparent. Refer the Page's documentation of details.

Besides the Page parts the virtual `LV_TEXTAREA_PART_CURSOR` part exists to draw the cursor. The cursor's area is always the bounding box of the current character. A block cursor can be created by adding a background color and background opa to `LV_TEXTAREA_PART_CURSOR`'s style. To create line cursor let the cursor transparent and set the `border_side` property.

## Usage

### Add text

You can insert text or characters to the current cursor's position with:

- `lv_textarea_add_char(textarea, 'c')`
- `lv_textarea_add_text(textarea, "insert this text")`

To add wide characters like 'á', 'ß' or CJK characters use `lv_textarea_add_text(ta, "á")`.

`lv_textarea_set_text(ta, "New text")` changes the whole text.

### Placeholder

A placeholder text can be specified - which is displayed when the Text area is empty - with `lv_textarea_set_placeholder_text(ta, "Placeholder text")`

### Delete character

To delete a character from the left of the current cursor position use `lv_textarea_del_char(textarea)`. To delete from the right use `lv_textarea_del_char_forward(textarea)`

### Move the cursor

The cursor position can be modified directly with `lv_textarea_set_cursor_pos(textarea, 10)`. The 0 position means “before the first characters”, `LV_TA_CURSOR_LAST` means “after the last character”

You can step the cursor with

- `lv_textarea_cursor_right(textarea)`
- `lv_textarea_cursor_left(textarea)`
- `lv_textarea_cursor_up(textarea)`
- `lv_textarea_cursor_down(textarea)`

If `lv_textarea_set_cursor_click_pos(textarea, true)` is called the cursor will jump to the position where the Text area was clicked.

### Hide the cursor

The cursor can be hidden with `lv_textarea_set_cursor_hidden(textarea, true)`.



### Cursor blink time

The blink time of the cursor can be adjusted with `lv_textarea_set_cursor_blink_time(textarea, time_ms)`.

### One line mode

The Text area can be configured to be one lined with `lv_ta_set_one_line(ta, true)`. In this mode the height is set automatically to show only one line, line break character are ignored, and word wrap is disabled.

### Password mode

The text area supports password mode which can be enabled with `lv_textarea_set_pwd_mode(textarea, true)`.

If the • (Bullet, U+2022) character exists in the font, the entered characters are converted to it after some time or when a new character is entered. If • not exists, \* will be used.

In password mode `lv_textarea_get_text(textarea)` gives the real text, not the bullet characters.

The visibility time can be adjusted with `lv_textarea_set_pwd_show_time(textarea, time_ms)`.

### Text align

The text can be aligned to the left, center or right with `lv_textarea_set_text_align(textarea, LV_LABEL_ALIGN_LEFT/CENTER/RIGHT)`.

In one line mode, the text can be scrolled horizontally only if the text is left aligned.

### Accepted characters

You can set a list of accepted characters with `lv_textarea_set_accepted_chars(ta, "0123456789.+ -")`. Other characters will be ignored.

### Max text length

The maximum number of characters can be limited with `lv_textarea_set_max_length(textarea, max_char_num)`

### Very long texts

If there is a very long text in the Text area (e. g. > 20k characters) its scrolling and drawing might be slow. However, by enabling `LV_LABEL_LONG_TXT_HINT 1` in `lv_conf.h` it can be hugely improved. It will save some info about the label to speed up its drawing. Using `LV_LABEL_LONG_TXT_HINT` the scrolling and drawing will be as fast as with “normal” short texts.

## Select text

A part of text can be selected if enabled with `lv_textarea_set_text_sel(textarea, true)`. It works like when you select a text on your PC with your mouse.

## Scrollbars

The scrollbars can shown according to different policies set by `lv_textarea_set_sb_mode(textarea, LV_SCROLLBAR_MODE_...)`. Learn more at the [Page](#) object.

## Scroll propagation

When the Text area is scrolled on an other scrollable object (like a Page) and the scrolling has reached the edge of the Text area, the scrolling can be propagated to the parent. In other words, when the Text area can be scrolled further, the parent will be scrolled instead.

It can be enabled with `lv_ta_set_scroll_propagation(ta, true)`.

Learn more at the [Page](#) object.

## Edge flash

When the Text area is scrolled to edge a circle like flash animation can be shown if it is enabled with `lv_ta_set_edge_flash(ta, true)`

## Events

Besides the [Generic events](#) the following [Special events](#) are sent by the Slider:

- **LV\_EVENT\_INSERT** Sent when a character before a character is inserted. The event data is the text planned to insert. `lv_ta_set_insert_replace(ta, "New text")` replaces the text to insert. The new text can't be in a local variable which is destroyed when the event callback exists. "" means do not insert anything.
- **LV\_EVENT\_VALUE\_CHANGED** When the content of the text area has been changed.

## Keys


- **LV\_KEY\_UP/DOWN/LEFT/RIGHT** Move the cursor
- **Any character** Add the character to the current cursor position

Learn more about [Keys](#).

## Example

C

## Simple Text area

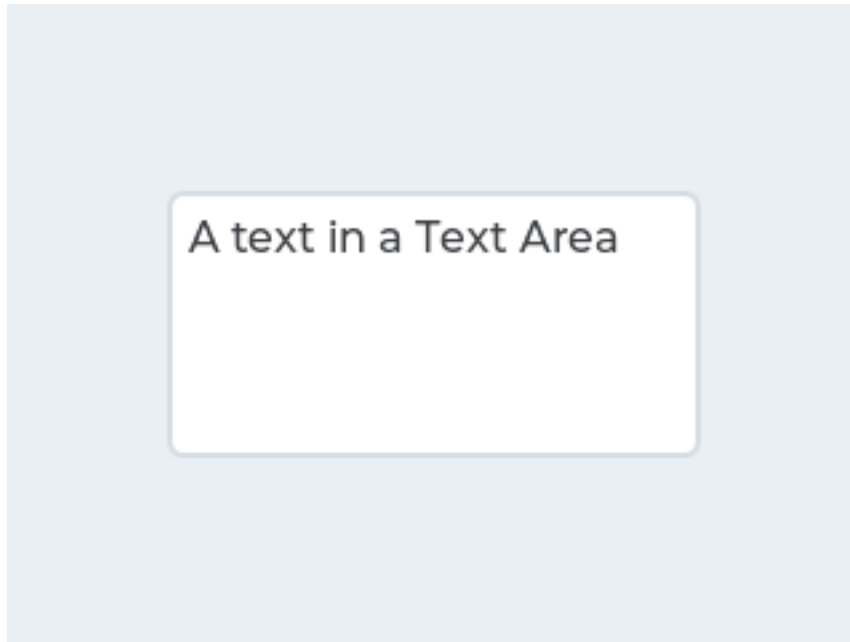

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_TEXTAREA

lv_obj_t * ta1;

static void event_handler(lv_obj_t * obj, lv_event_t event)
{
    if(event == LV_EVENT_VALUE_CHANGED) {
        printf("Value: %s\n", lv_textarea_get_text(obj));
    }
    else if(event == LV_EVENT_LONG_PRESSED_REPEAT) {
        /*For simple test: Long press the Text are to add the text below*/
        const char * txt = "\n\nYou can scroll it if the text is long enough.\n";
        static uint16_t i = 0;
        if(txt[i] != '\0') {
            lv_textarea_add_char(ta1, txt[i]);
            i++;
        }
    }
}


void lv_ex_textarea_1(void)
{
    ta1 = lv_textarea_create(lv_scr_act(), NULL);
    lv_obj_set_size(ta1, 200, 100);
    lv_obj_align(ta1, NULL, LV_ALIGN_CENTER, 0, 0);
    lv_textarea_set_text(ta1, "A text in a Text Area"); /*Set an initial text*/
    lv_obj_set_event_cb(ta1, event_handler);
}
```

(continues on next page)

(continued from previous page)

```
#endif
```

Text are with password field

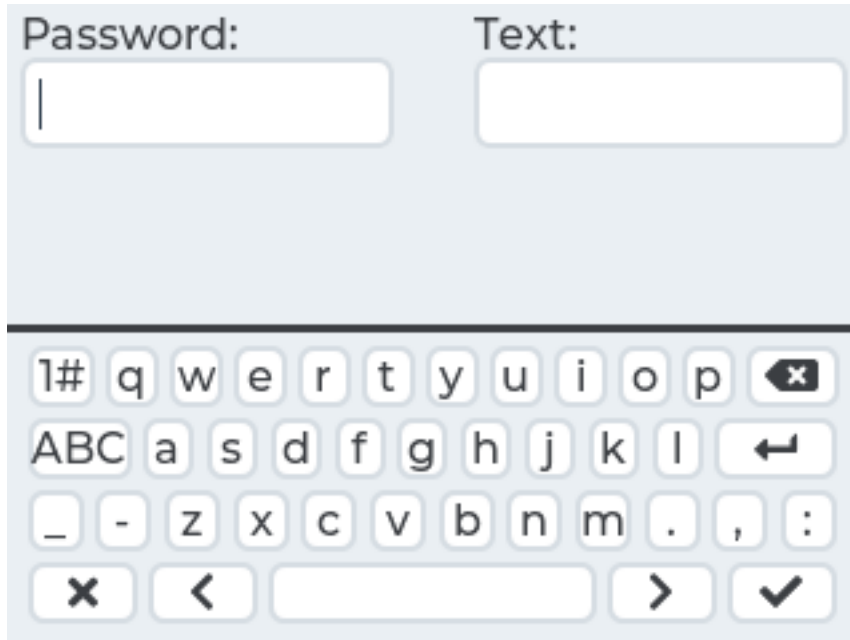

code

```
#include "lvgl/lvgl.h"
#include <stdio.h>
#if LV_USE_TEXTAREA && LV_USE_KEYBOARD

static void kb_event_cb(lv_obj_t * event_kb, lv_event_t event);
static void ta_event_cb(lv_obj_t * ta, lv_event_t event);

static lv_obj_t * kb;

void lv_ex_textarea_2(void)
{
    /* Create the password box */
    lv_obj_t * pwd_ta = lv_textarea_create(lv_scr_act(), NULL);
    lv_textarea_set_text(pwd_ta, "");
    lv_textarea_set_pwd_mode(pwd_ta, true);
    lv_textarea_set_one_line(pwd_ta, true);
    lv_obj_set_width(pwd_ta, LV_HOR_RES / 2 - 20);
    lv_obj_set_pos(pwd_ta, 5, 20);
    lv_obj_set_event_cb(pwd_ta, ta_event_cb);

    /* Create a label and position it above the text box */
    lv_obj_t * pwd_label = lv_label_create(lv_scr_act(), NULL);
    lv_label_set_text(pwd_label, "Password:");
    lv_obj_align(pwd_label, pwd_ta, LV_ALIGN_OUT_TOP_LEFT, 0, 0);

    /* Create the one-line mode text area */

```

(continues on next page)

(continued from previous page)

```

lv_obj_t * oneline_ta = lv_textarea_create(lv_scr_act(), pwd_ta);
lv_textarea_set_pwd_mode(oneline_ta, false);
lv_obj_align(oneline_ta, NULL, LV_ALIGN_IN_TOP_RIGHT, -5, 20);

/* Create a label and position it above the text box */
lv_obj_t * oneline_label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(oneline_label, "Text:");
lv_obj_align(oneline_label, oneline_ta, LV_ALIGN_OUT_TOP_LEFT, 0, 0);

/* Create a keyboard and make it fill the width of the above text areas */
kb = lv_keyboard_create(lv_scr_act(), NULL);
lv_obj_set_event_cb(kb, kb_event_cb); /* Setting a custom event handler stops the
↳keyboard from closing automatically */
lv_obj_set_size(kb, LV_HOR_RES, LV_VER_RES / 2);

lv_keyboard_set_textarea(kb, pwd_ta); /* Focus it on one of the text areas to
↳start */
lv_keyboard_set_cursor_manage(kb, true); /* Automatically show/hide cursors on
↳text areas */
}

static void kb_event_cb(lv_obj_t * event_kb, lv_event_t event)
{
    /* Just call the regular event handler */
    lv_keyboard_def_event_cb(event_kb, event);
}

static void ta_event_cb(lv_obj_t * ta, lv_event_t event)
{
    if(event == LV_EVENT_CLICKED) {
        /* Focus on the clicked text area */
        if(kb != NULL)
            lv_keyboard_set_textarea(kb, ta);
    }

    else if(event == LV_EVENT_INSERT) {
        const char * str = lv_event_get_data();
        if(str[0] == '\n') {
            printf("Ready\n");
        }
    }
}

#endif

```

## MicroPython

No examples yet.

## API

### Typedefs

**typedef** uint8\_t **lv\_textarea\_style\_t**

## Enums

### enum [anonymous]

Possible text areas tyles.

*Values:*

**LV\_TEXTAREA\_PART\_BG** = *LV\_PAGE\_PART\_BG*

Text area background style

**LV\_TEXTAREA\_PART\_SCRLBAR** = *LV\_PAGE\_PART\_SCRLBAR*

Scrollbar style

**LV\_TEXTAREA\_PART\_EDGE\_FLASH** = *LV\_PAGE\_PART\_EDGE\_FLASH*

Edge flash style

**LV\_TEXTAREA\_PART\_CURSOR** = *\_LV\_PAGE\_PART\_VIRTUAL\_LAST*

Cursor style

**LV\_TEXTAREA\_PART\_PLACEHOLDER**

Placeholder style

**\_LV\_TEXTAREA\_PART\_VIRTUAL\_LAST**

**\_LV\_TEXTAREA\_PART\_REAL\_LAST** = *\_LV\_PAGE\_PART\_REAL\_LAST*

## Functions

**LV\_EXPORT\_CONST\_INT**(LV\_TEXTAREA\_CURSOR\_LAST)

*lv\_obj\_t* \***lv\_textarea\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a text area objects

**Return** pointer to the created text area

**Parameters**

- **par**: pointer to an object, it will be the parent of the new text area
- **copy**: pointer to a text area object, if not NULL then the new object will be copied from it

void **lv\_textarea\_add\_char**(*lv\_obj\_t* \*ta, uint32\_t c)

Insert a character to the current cursor position. To add a wide char, e.g. 'Á' use 'lv\_txt\_encoded\_conv\_wc( 'Á' )'

**Parameters**

- **ta**: pointer to a text area object
- **c**: a character (e.g. 'a' )

void **lv\_textarea\_add\_text**(*lv\_obj\_t* \*ta, const char \*txt)

Insert a text to the current cursor position

**Parameters**

- **ta**: pointer to a text area object
- **txt**: a '\0' terminated string to insert

void **lv\_textarea\_del\_char**(*lv\_obj\_t* \*ta)

Delete a the left character from the current cursor position

**Parameters**

- **ta**: pointer to a text area object

void **lv\_textarea\_del\_char\_forward**(*lv\_obj\_t* \*ta)  
Delete the right character from the current cursor position

**Parameters**

- **ta**: pointer to a text area object

void **lv\_textarea\_set\_text**(*lv\_obj\_t* \*ta, const char \*txt)  
Set the text of a text area

**Parameters**

- **ta**: pointer to a text area
- **txt**: pointer to the text

void **lv\_textarea\_set\_placeholder\_text**(*lv\_obj\_t* \*ta, const char \*txt)  
Set the placeholder text of a text area

**Parameters**

- **ta**: pointer to a text area
- **txt**: pointer to the text

void **lv\_textarea\_set\_cursor\_pos**(*lv\_obj\_t* \*ta, int16\_t pos)  
Set the cursor position

**Parameters**

- **obj**: pointer to a text area object
- **pos**: the new cursor position in character index < 0 : index from the end of the text  
LV\_TEXTAREA\_CURSOR\_LAST: go after the last character

void **lv\_textarea\_set\_cursor\_hidden**(*lv\_obj\_t* \*ta, bool hide)  
Hide/Unhide the cursor.

**Parameters**

- **ta**: pointer to a text area object
- **hide**: true: hide the cursor

void **lv\_textarea\_set\_cursor\_click\_pos**(*lv\_obj\_t* \*ta, bool en)  
Enable/Disable the positioning of the the cursor by clicking the text on the text area.

**Parameters**

- **ta**: pointer to a text area object
- **en**: true: enable click positions; false: disable

void **lv\_textarea\_set\_pwd\_mode**(*lv\_obj\_t* \*ta, bool en)  
Enable/Disable password mode

**Parameters**

- **ta**: pointer to a text area object
- **en**: true: enable, false: disable

void **lv\_textarea\_set\_one\_line**(*lv\_obj\_t* \*ta, bool en)  
Configure the text area to one line or back to normal

**Parameters**

- **ta**: pointer to a Text area object
- **en**: true: one line, false: normal

void **lv\_textarea\_set\_text\_align**(*lv\_obj\_t* \*ta, *lv\_label\_align\_t* align)

Set the alignment of the text area. In one line mode the text can be scrolled only with LV\_LABEL\_ALIGN\_LEFT. This function should be called if the size of text area changes.

#### Parameters

- **ta**: pointer to a text are object
- **align**: the desired alignment from *lv\_label\_align\_t*. (LV\_LABEL\_ALIGN\_LEFT/CENTER/RIGHT)

void **lv\_textarea\_set\_accepted\_chars**(*lv\_obj\_t* \*ta, const char \*list)

Set a list of characters. Only these characters will be accepted by the text area

#### Parameters

- **ta**: pointer to Text Area
- **list**: list of characters. Only the pointer is saved. E.g. “+-.0123456789”

void **lv\_textarea\_set\_max\_length**(*lv\_obj\_t* \*ta, uint16\_t num)

Set max length of a Text Area.

#### Parameters

- **ta**: pointer to Text Area
- **num**: the maximal number of characters can be added (*lv\_textarea\_set\_text* ignores it)

void **lv\_textarea\_set\_insert\_replace**(*lv\_obj\_t* \*ta, const char \*txt)

In LV\_EVENT\_INSERT the text which planned to be inserted can be replaced by an other text. It can be used to add automatic formatting to the text area.

#### Parameters

- **ta**: pointer to a text area.
- **txt**: pointer to a new string to insert. If "" no text will be added. The variable must be live after the *event\_cb* exists. (Should be *global* or *static*)

static void **lv\_textarea\_set\_sb\_mode**(*lv\_obj\_t* \*ta, *lv\_scrollbar\_mode\_t* mode)

Set the scroll bar mode of a text area

#### Parameters

- **ta**: pointer to a text area object
- **sb\_mode**: the new mode from ‘*lv\_page\_sb\_mode\_t*’ enum

static void **lv\_textarea\_set\_scroll\_propagation**(*lv\_obj\_t* \*ta, bool en)

Enable the scroll propagation feature. If enabled then the Text area will move its parent if there is no more space to scroll.

#### Parameters

- **ta**: pointer to a Text area
- **en**: true or false to enable/disable scroll propagation

static void **lv\_textarea\_set\_edge\_flash**(*lv\_obj\_t* \*ta, bool en)

Enable the edge flash effect. (Show an arc when the an edge is reached)



#### Parameters

- **page**: pointer to a Text Area
- **en**: true or false to enable/disable end flash

void **lv\_textarea\_set\_text\_sel**(*lv\_obj\_t* \*ta, bool en)  
Enable/disable selection mode.

#### Parameters

- **ta**: pointer to a text area object
- **en**: true or false to enable/disable selection mode

void **lv\_textarea\_set\_pwd\_show\_time**(*lv\_obj\_t* \*ta, uint16\_t time)  
Set how long show the password before changing it to '\*'

#### Parameters

- **ta**: pointer to Text area
- **time**: show time in milliseconds. 0: hide immediately.

void **lv\_textarea\_set\_cursor\_blink\_time**(*lv\_obj\_t* \*ta, uint16\_t time)  
Set cursor blink animation time

#### Parameters

- **ta**: pointer to Text area
- **time**: blink period. 0: disable blinking

const char \***lv\_textarea\_get\_text**(const *lv\_obj\_t* \*ta)  
Get the text of a text area. In password mode it gives the real text (not '\*' s).

**Return** pointer to the text

#### Parameters

- **ta**: pointer to a text area object

const char \***lv\_textarea\_get\_placeholder\_text**(*lv\_obj\_t* \*ta)  
Get the placeholder text of a text area

**Return** pointer to the text

#### Parameters

- **ta**: pointer to a text area object

*lv\_obj\_t* \***lv\_textarea\_get\_label**(const *lv\_obj\_t* \*ta)  
Get the label of a text area

**Return** pointer to the label object

#### Parameters

- **ta**: pointer to a text area object

uint16\_t **lv\_textarea\_get\_cursor\_pos**(const *lv\_obj\_t* \*ta)  
Get the current cursor position in character index

**Return** the cursor position

#### Parameters

- **ta**: pointer to a text area object

bool **lv\_textarea\_get\_cursor\_hidden**(const lv\_obj\_t \*ta)  
 Get whether the cursor is hidden or not  
**Return** true: the cursor is hidden  
**Parameters**

- ta: pointer to a text area object

bool **lv\_textarea\_get\_cursor\_click\_pos**(lv\_obj\_t \*ta)  
 Get whether the cursor click positioning is enabled or not.  
**Return** true: enable click positions; false: disable  
**Parameters**

- ta: pointer to a text area object

bool **lv\_textarea\_get\_pwd\_mode**(const lv\_obj\_t \*ta)  
 Get the password mode attribute  
**Return** true: password mode is enabled, false: disabled  
**Parameters**

- ta: pointer to a text area object

bool **lv\_textarea\_get\_one\_line**(const lv\_obj\_t \*ta)  
 Get the one line configuration attribute  
**Return** true: one line configuration is enabled, false: disabled  
**Parameters**

- ta: pointer to a text area object

const char \***lv\_textarea\_get\_accepted\_chars**(lv\_obj\_t \*ta)  
 Get a list of accepted characters.  
**Return** list of accented characters.  
**Parameters**

- ta: pointer to Text Area

uint16\_t **lv\_textarea\_get\_max\_length**(lv\_obj\_t \*ta)  
 Set max length of a Text Area.  
**Return** the maximal number of characters to be add  
**Parameters**

- ta: pointer to Text Area

static lv\_scrollbar\_mode\_t **lv\_textarea\_get\_sb\_mode**(const lv\_obj\_t \*ta)  
 Get the scroll bar mode of a text area  
**Return** scrollbar mode from 'lv\_page\_sb\_mode\_t' enum  
**Parameters**

- ta: pointer to a text area object

static bool **lv\_textarea\_get\_scroll\_propagation**(lv\_obj\_t \*ta)  
 Get the scroll propagation property  
**Return** true or false  
**Parameters**

- **ta**: pointer to a Text area

**static** bool **lv\_textarea\_get\_edge\_flash**(*lv\_obj\_t \*ta*)

Get the scroll propagation property

**Return** true or false

**Parameters**

- **ta**: pointer to a Text area

bool **lv\_textarea\_text\_is\_selected**(const *lv\_obj\_t \*ta*)

Find whether text is selected or not.

**Return** whether text is selected or not

**Parameters**

- **ta**: Text area object

bool **lv\_textarea\_get\_text\_sel\_en**(*lv\_obj\_t \*ta*)

Find whether selection mode is enabled.

**Return** true: selection mode is enabled, false: disabled

**Parameters**

- **ta**: pointer to a text area object

uint16\_t **lv\_textarea\_get\_pwd\_show\_time**(*lv\_obj\_t \*ta*)

Set how long show the password before changing it to ‘\*’

**Return** show time in milliseconds. 0: hide immediately.

**Parameters**

- **ta**: pointer to Text area

uint16\_t **lv\_textarea\_get\_cursor\_blink\_time**(*lv\_obj\_t \*ta*)

Set cursor blink animation time

**Return** time blink period. 0: disable blinking

**Parameters**

- **ta**: pointer to Text area

void **lv\_textarea\_clear\_selection**(*lv\_obj\_t \*ta*)

Clear the selection on the text area.

**Parameters**

- **ta**: Text area object

void **lv\_textarea\_cursor\_right**(*lv\_obj\_t \*ta*)

Move the cursor one character right

**Parameters**

- **ta**: pointer to a text area object

void **lv\_textarea\_cursor\_left**(*lv\_obj\_t \*ta*)

Move the cursor one character left

**Parameters**

- **ta**: pointer to a text area object

void **lv\_textarea\_cursor\_down**(*lv\_obj\_t* \*ta)  
Move the cursor one line down

**Parameters**

- ta: pointer to a text area object

void **lv\_textarea\_cursor\_up**(*lv\_obj\_t* \*ta)  
Move the cursor one line up

**Parameters**

- ta: pointer to a text area object

**struct lv\_textarea\_ext\_t**

**Public Members**

*lv\_page\_ext\_t* **page**  
*lv\_obj\_t* \***label**  
char \***placeholder\_txt**  
*lv\_style\_list\_t* **style\_placeholder**  
char \***pwd\_tmp**  
**const** char \***accapted\_chars**  
*uint16\_t* **max\_length**  
*uint16\_t* **pwd\_show\_time**  
*lv\_style\_list\_t* **style**  
*lv\_coord\_t* **valid\_x**  
*uint16\_t* **pos**  
*uint16\_t* **blink\_time**  
*lv\_area\_t* **area**  
*uint16\_t* **txt\_byte\_pos**  
*uint8\_t* **state**  
*uint8\_t* **hidden**  
*uint8\_t* **click\_pos**  
**struct** *lv\_textarea\_ext\_t*::[anonymous] **cursor**  
*uint16\_t* **sel\_start**  
*uint16\_t* **sel\_end**  
*uint8\_t* **text\_sel\_in\_prog**  
*uint8\_t* **text\_sel\_en**  
*uint8\_t* **pwd\_mode**  
*uint8\_t* **one\_line**

## Tile view (lv\_tileview)

### Overview

The Tileview is a container object where its elements (called *tiles*) can be arranged in a grid form. By swiping the user can navigate between the tiles.

If the Tileview is screen sized it gives a user interface you might have seen on the smartwatches.

### Parts and Styles

The Tileview has the same parts as *Page*. Expect `LV_PAGE_PART_SCROLL` because it can't be referenced and it's always transparent. Refer the Page's documentation of details.

### Usage

#### Valid positions

The tiles don't have to form a full grid where every element exists. There can be holes in the grid but it has to be continuous, i.e. there can't be an empty rows or columns.

With `lv_tileview_set_valid_positions(tileview, valid_pos_array, array_len)` the valid positions can be set. Scrolling will be possible only to this positions. The `0,0` index means the top left tile. E.g. `lv_point_t valid_pos_array[] = {{0,0}, {0,1}, {1,1}, {LV_COORD_MIN, LV_COORD_MIN}}` gives a Tile view with "L" shape. It indicates that there is no tile in `{1,1}` therefore the user can't scroll there.

In other words, the `valid_pos_array` tells where the tiles are. It can be changed on the fly to disable some positions on specific tiles. For example, there can be a 2x2 grid where all tiles are added but the first row ( $y = 0$ ) as a "main row" and the second row ( $y = 1$ ) contains options for the tile above it. Let's say horizontal scrolling is possible only in the main row and not possible between the options in the second row. In this case the `valid_pos_array` needs to be changed when a new main tile is selected:

- for the first main tile: `{0,0}, {0,1}, {1,0}` to disable the `{1,1}` option tile
- for the second main tile `{0,0}, {1,0}, {1,1}` to disable the `{0,1}` option tile

#### Set tile

To set the currently visible tile use `lv_tileview_set_tile_act(tileview, x_id, y_id, LV_ANIM_ON/OFF)`.

#### Add element

To add elements just create an object on the Tileview and position it manually to the desired position.

`lv_tileview_add_element(tileview, element)` should be used to make possible to scroll (drag) the Tileview by one its element. For example, if there is a button on a tile, the button needs to be explicitly added to the Tileview to enable the user to scroll the Tileview with the button too.

## Scroll propagation

The scroll propagation feature of page-like objects (like [List](#)) can be used very well here. For example, there can be a full-sized List and when it reaches the top or bottom most position the user will scroll the tile view instead.

## Animation time

The animation time of the Tileview can be adjusted with `lv_tileview_set_anim_time(tileview, anim_time)`.

Animations are applied when

- a new tile is selected with `lv_tileview_set_tile_act`
- the current tile is scrolled a little and then released (revert the original title)
- the current tile is scrolled more than half size and then released (move to the next tile)

## Edge flash

An “edge flash” effect can be added when the tile view reached hits an invalid position or the end of tile view when scrolled.

Use `lv_tileview_set_edge_flash(tileview, true)` to enable this feature.

## Events

Besides the [Generic events](#) the following [Special events](#) are sent by the Slider:

- **LV\_EVENT\_VALUE\_CHANGED** Sent when a new tile loaded either with scrolling or `lv_tileview_set_act`. The event data is set to the index of the new tile in `valid_pos_array` (It's type is `uint32_t *`)

## Keys

- **LV\_KEY\_UP, LV\_KEY\_RIGHT** Increment the slider's value by 1
- **LV\_KEY\_DOWN, LV\_KEY\_LEFT** Decrement the slider's value by 1

Learn more about [Keys](#).

## Example

C

## Tileview with content



code

```
#include "lvgl/lvgl.h"
#if LV_USE_TILEVIEW

void lv_ex_tileview_1(void)
{
    static lv_point_t valid_pos[] = {{0,0}, {0, 1}, {1,1}};
    lv_obj_t *tileview;
    tileview = lv_tileview_create(lv_scr_act(), NULL);
    lv_tileview_set_valid_positions(tileview, valid_pos, 3);
    lv_tileview_set_edge_flash(tileview, true);

    lv_obj_t * tile1 = lv_obj_create(tileview, NULL);
    lv_obj_set_size(tile1, LV_HOR_RES, LV_VER_RES);
    lv_tileview_add_element(tileview, tile1);

    /*Tile1: just a label*/
    lv_obj_t * label = lv_label_create(tile1, NULL);
    lv_label_set_text(label, "Scroll down");
    lv_obj_align(label, NULL, LV_ALIGN_CENTER, 0, 0);

    /*Tile2: a list*/
    lv_obj_t * list = lv_list_create(tileview, NULL);
    lv_obj_set_size(list, LV_HOR_RES, LV_VER_RES);
    lv_obj_set_pos(list, 0, LV_VER_RES);
    lv_list_set_scroll_propagation(list, true);
    lv_list_set_sb_mode(list, LV_SCROLLBAR_MODE_OFF);

    lv_list_add_btn(list, NULL, "One");
    lv_list_add_btn(list, NULL, "Two");
    lv_list_add_btn(list, NULL, "Three");
    lv_list_add_btn(list, NULL, "Four");
}
```

(continues on next page)

(continued from previous page)

```
lv_list_add_btn(list, NULL, "Five");
lv_list_add_btn(list, NULL, "Six");
lv_list_add_btn(list, NULL, "Seven");
lv_list_add_btn(list, NULL, "Eight");

/*Tile3: a button*/
lv_obj_t * tile3 = lv_obj_create(tileview, tile1);
lv_obj_set_pos(tile3, LV_HOR_RES, LV_VER_RES);
lv_tileview_add_element(tileview, tile3);

lv_obj_t * btn = lv_btn_create(tile3, NULL);
lv_obj_align(btn, NULL, LV_ALIGN_CENTER, 0, 0);
lv_tileview_add_element(tileview, btn);
label = lv_label_create(btn, NULL);
lv_label_set_text(label, "No scroll up");
}

#endif
```

## MicroPython

No examples yet.

## API

### Enums

**enum** [anonymous]

*Values:*

```
LV_TILEVIEW_PART_BG = LV_PAGE_PART_BG
LV_TILEVIEW_PART_SCRLBAR = LV_PAGE_PART_SCRLBAR
LV_TILEVIEW_PART_EDGE_FLASH = LV_PAGE_PART_EDGE_FLASH
LV_TILEVIEW_PART_VIRTUAL_LAST = LV_PAGE_PART_VIRTUAL_LAST
LV_TILEVIEW_PART_REAL_LAST = LV_PAGE_PART_REAL_LAST
```

### Functions

*lv\_obj\_t* \***lv\_tileview\_create**(*lv\_obj\_t* \*par, const *lv\_obj\_t* \*copy)

Create a tileview objects

**Return** pointer to the created tileview

**Parameters**

- **par**: pointer to an object, it will be the parent of the new tileview
- **copy**: pointer to a tileview object, if not NULL then the new object will be copied from it

void **lv\_tileview\_add\_element**(*lv\_obj\_t* \*tileview, *lv\_obj\_t* \*element)

Register an object on the tileview. The register object will able to slide the tileview



#### Parameters

- **tileview**: pointer to a Tileview object
- **element**: pointer to an object

void **lv\_tileview\_set\_valid\_positions**(*lv\_obj\_t \*tileview*, **const** lv\_point\_t *valid\_pos*[],  
uint16\_t *valid\_pos\_cnt*)

Set the valid position' s indices. The scrolling will be possible only to these positions.

#### Parameters

- **tileview**: pointer to a Tileview object
- **valid\_pos**: array with the indices. E.g. lv\_point\_t p[] = {{0,0}, {1,0}, {1,1}}. Only the pointer is saved so can' t be a local variable.
- **valid\_pos\_cnt**: number of elements in **valid\_pos** array

void **lv\_tileview\_set\_tile\_act**(*lv\_obj\_t \*tileview*, lv\_coord\_t *x*, lv\_coord\_t *y*,  
*lv\_anim\_enable\_t anim*)

Set the tile to be shown

#### Parameters

- **tileview**: pointer to a tileview object
- **x**: column id (0, 1, 2...)
- **y**: line id (0, 1, 2...)
- **anim**: LV\_ANIM\_ON: set the value with an animation; LV\_ANIM\_OFF: change the value immediately

**static** void **lv\_tileview\_set\_edge\_flash**(*lv\_obj\_t \*tileview*, bool *en*)

Enable the edge flash effect. (Show an arc when the an edge is reached)

#### Parameters

- **tileview**: pointer to a Tileview
- **en**: true or false to enable/disable end flash

**static** void **lv\_tileview\_set\_anim\_time**(*lv\_obj\_t \*tileview*, uint16\_t *anim\_time*)

Set the animation time for the Tile view

#### Parameters

- **tileview**: pointer to a page object
- **anim\_time**: animation time in milliseconds

void **lv\_tileview\_get\_tile\_act**(*lv\_obj\_t \*tileview*, lv\_coord\_t \**x*, lv\_coord\_t \**y*)

Get the tile to be shown

#### Parameters

- **tileview**: pointer to a tileview object
- **x**: column id (0, 1, 2...)
- **y**: line id (0, 1, 2...)

**static** bool **lv\_tileview\_get\_edge\_flash**(*lv\_obj\_t \*tileview*)

Get the scroll propagation property

**Return** true or false

#### Parameters

- `tileview`: pointer to a Tileview

**static** uint16\_t **lv\_tileview\_get\_anim\_time**(lv\_obj\_t \*tileview)

Get the animation time for the Tile view

**Return** animation time in milliseconds

**Parameters**

- `tileview`: pointer to a page object

**struct lv\_tileview\_ext\_t**

### Public Members

lv\_page\_ext\_t **page**

const lv\_point\_t \***valid\_pos**

uint16\_t **valid\_pos\_cnt**

uint16\_t **anim\_time**

lv\_point\_t **act\_id**

uint8\_t **drag\_top\_en**

uint8\_t **drag\_bottom\_en**

uint8\_t **drag\_left\_en**

uint8\_t **drag\_right\_en**

## Window (lv\_win)

### Overview

The Window is container-like objects built from a header with title and button and a content area.

### Parts and Styles

The main part is `LV_WIN_PART_BG` which holds the two other real parts:

1. `LV_WIN_PART_HEADER`: a header *Container* on the top with a title and control buttons
2. `LV_WIN_PART_CONTENT_SCRL` the scrollable part of a *Page* for the content below the header.

Besides these, `LV_WIN_PART_CONTENT_SCRL` has a scrollbar part called `LV_WIN_PART_CONTENT_SCRL`. Read the documentation of *Page* for more details on the scrollbars.

All parts supports the typical background properties. The title uses the *Text* properties of the header part.

The height of the control buttons is: *header height - header padding\_top - header padding\_bottom*.

### Title

On the header, there is a title which can be modified by: `lv_win_set_title(win, "New title")`.

## Control buttons

Control buttons can be added to the right side of the header with: `lv_win_add_btn(win, LV_SYMBOL_CLOSE)`. The second parameter is an *Image* source so it can be a symbol, a pointer to an `lv_img_dsc_t` variable or a path to file.

The width of the buttons can be set with `lv_win_set_btn_width(win, w)`. If `w == 0` the buttons will be square-shaped.

`lv_win_close_event_cb` can be used as an event callback to close the Window.

## Scrollbars

The scrollbar behavior can be set by `lv_win_set_scrollbar_mode(win, LV_SCROLLBAR_MODE...)`. See *Page* for details.

## Manual scroll and focus

To scroll the Window directly you can use `lv_win_scroll_hor(win, dist_px)` or `lv_win_scroll_ver(win, dist_px)`.

To make the Window show an object on it use `lv_win_focus(win, child, LV_ANIM_ON/OFF)`.

The time of scroll and focus animations can be adjusted with `lv_win_set_anim_time(win, anim_time_ms)`

## Layout

To set a layout for the content use `lv_win_set_layout(win, LV_LAYOUT...)`. See *Container* for details.

## Events

Only the *Generic events* are sent by the object type.

Learn more about *Events*.

## Keys

The following *Keys* are processed by the Page:

- `LV_KEY_RIGHT/LEFT/UP/DOWN` Scroll the page


Learn more about *Keys*.

## Example

### C

## Simple window

### Window title

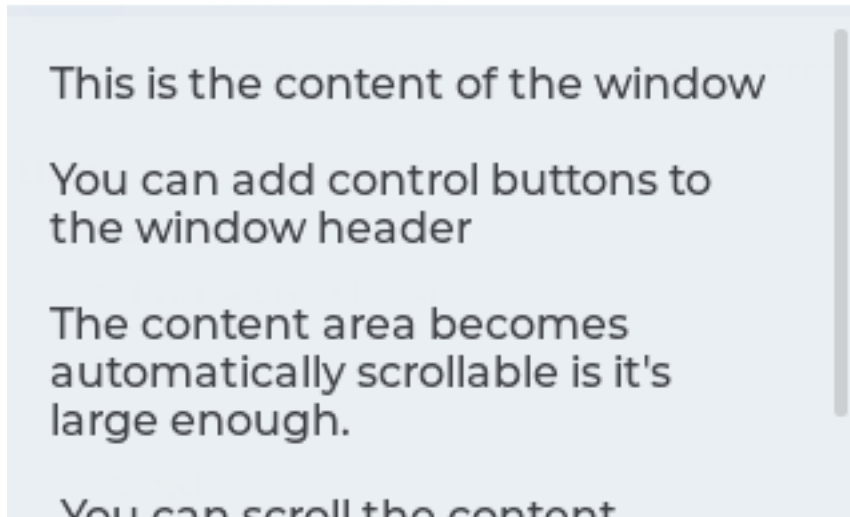

code

```
#include "lvgl/lvgl.h"
#if LV_USE_WIN

void lv_ex_win_1(void)
{
    /*Create a window*/
    lv_obj_t * win = lv_win_create(lv_scr_act(), NULL);
    lv_win_set_title(win, "Window title"); /*Set the title*/

    /*Add control button to the header*/
    lv_obj_t * close_btn = lv_win_add_btn(win, LV_SYMBOL_CLOSE); /*Add
↪close button and use built-in close action*/
    lv_obj_set_event_cb(close_btn, lv_win_close_event_cb);
    lv_win_add_btn(win, LV_SYMBOL_SETTINGS); /*Add a setup button*/

    /*Add some dummy content*/
    lv_obj_t * txt = lv_label_create(win, NULL);
    lv_label_set_text(txt, "This is the content of the window\n\n"
        "You can add control buttons to\n"
        "the window header\n\n"
        "The content area becomes\n"
        "automatically scrollable is it's \n"
        "large enough.\n\n"
        " You can scroll the content\n"
        "See the scroll bar on the right!");
}

#endif
```

## MicroPython

No examples yet.

## API

### Enums

**enum** [anonymous]

Window parts.

*Values:*

**LV\_WIN\_PART\_BG** = *LV\_OBJ\_PART\_MAIN*

Window object background style.

**\_LV\_WIN\_PART\_VIRTUAL\_LAST**

**LV\_WIN\_PART\_HEADER** = *\_LV\_OBJ\_PART\_REAL\_LAST*

Window titlebar background style.

**LV\_WIN\_PART\_CONTENT\_SCRL**

Window content style.

**LV\_WIN\_PART\_SCRLBAR**

Window scrollbar style.

**\_LV\_WIN\_PART\_REAL\_LAST**

### Functions

*lv\_obj\_t* \***lv\_win\_create**(*lv\_obj\_t* \*par, **const** *lv\_obj\_t* \*copy)

Create a window objects

**Return** pointer to the created window

**Parameters**

- **par**: pointer to an object, it will be the parent of the new window
- **copy**: pointer to a window object, if not NULL then the new object will be copied from it

void **lv\_win\_clean**(*lv\_obj\_t* \*win)

Delete all children of the scrl object, without deleting scrl child.

**Parameters**

- **win**: pointer to an object

*lv\_obj\_t* \***lv\_win\_add\_btn**(*lv\_obj\_t* \*win, **const** void \*img\_src)

Add control button to the header of the window

**Return** pointer to the created button object

**Parameters**

- **win**: pointer to a window object
- **img\_src**: an image source ( 'lv\_img\_t' variable, path to file or a symbol)

void **lv\_win\_close\_event\_cb**(*lv\_obj\_t* \*btn, *lv\_event\_t* event)

Can be assigned to a window control button to close the window

#### Parameters

- **btn**: pointer to the control button on teh widows header
- **evet**: the event type

void **lv\_win\_set\_title**(*lv\_obj\_t \*win*, **const** char \**title*)  
Set the title of a window

#### Parameters

- **win**: pointer to a window object
- **title**: string of the new title

void **lv\_win\_set\_header\_height**(*lv\_obj\_t \*win*, lv\_coord\_t *size*)  
Set the control button size of a window

**Return** control button size

#### Parameters

- **win**: pointer to a window object

void **lv\_win\_set\_btn\_width**(*lv\_obj\_t \*win*, lv\_coord\_t *width*)  
Set the width of the control buttons on the header

#### Parameters

- **win**: pointer to a window object
- **width**: width of the control button. 0: to make them square automatically.

void **lv\_win\_set\_content\_size**(*lv\_obj\_t \*win*, lv\_coord\_t *w*, lv\_coord\_t *h*)  
Set the size of the content area.

#### Parameters

- **win**: pointer to a window object
- **w**: width
- **h**: height (the window will be higher with the height of the header)

void **lv\_win\_set\_layout**(*lv\_obj\_t \*win*, *lv\_layout\_t layout*)  
Set the layout of the window

#### Parameters

- **win**: pointer to a window object
- **layout**: the layout from 'lv\_layout\_t'

void **lv\_win\_set\_scrllbar\_mode**(*lv\_obj\_t \*win*, *lv\_scrllbar\_mode\_t sb\_mode*)  
Set the scroll bar mode of a window

#### Parameters

- **win**: pointer to a window object
- **sb\_mode**: the new scroll bar mode from 'lv\_sb\_mode\_t'

void **lv\_win\_set\_anim\_time**(*lv\_obj\_t \*win*, uint16\_t *anim\_time*)  
Set focus animation duration on *lv\_win\_focus()*

#### Parameters

- **win**: pointer to a window object

- **anim\_time**: duration of animation [ms]

void **lv\_win\_set\_drag**(*lv\_obj\_t* \*win, bool en)

Set drag status of a window. If set to ‘true’ window can be dragged like on a PC.

**Parameters**

- **win**: pointer to a window object
- **en**: whether dragging is enabled

const char \***lv\_win\_get\_title**(const *lv\_obj\_t* \*win)

Get the title of a window

**Return** title string of the window

**Parameters**

- **win**: pointer to a window object

*lv\_obj\_t* \***lv\_win\_get\_content**(const *lv\_obj\_t* \*win)

Get the content holder object of window (**lv\_page**) to allow additional customization

**Return** the Page object where the window’s content is

**Parameters**

- **win**: pointer to a window object

*lv\_coord\_t* **lv\_win\_get\_btn\_size**(const *lv\_obj\_t* \*win)

Get the control button size of a window

**Return** control button size

**Parameters**

- **win**: pointer to a window object

*lv\_coord\_t* **lv\_win\_get\_header\_height**(const *lv\_obj\_t* \*win)

Get the header height

**Return** header height

**Parameters**

- **win**: pointer to a window object

*lv\_coord\_t* **lv\_win\_get\_btn\_width**(*lv\_obj\_t* \*win)

Get the width of the control buttons on the header

**Return** width of the control button. 0: square.

**Parameters**

- **win**: pointer to a window object

*lv\_obj\_t* \***lv\_win\_get\_from\_btn**(const *lv\_obj\_t* \*ctrl\_btn)

Get the pointer of a widow from one of its control button. It is useful in the action of the control buttons where only button is known.

**Return** pointer to the window of ‘ctrl\_btn’

**Parameters**

- **ctrl\_btn**: pointer to a control button of a window

*lv\_layout\_t* **lv\_win\_get\_layout**(*lv\_obj\_t* \*win)

Get the layout of a window

**Return** the layout of the window (from ‘lv\_layout\_t’ )

**Parameters**

- **win**: pointer to a window object

*lv\_scrollbar\_mode\_t* **lv\_win\_get\_sb\_mode**(*lv\_obj\_t* \*win)

Get the scroll bar mode of a window

**Return** the scroll bar mode of the window (from ‘lv\_sb\_mode\_t’ )

**Parameters**

- **win**: pointer to a window object

uint16\_t **lv\_win\_get\_anim\_time**(const *lv\_obj\_t* \*win)

Get focus animation duration

**Return** duration of animation [ms]

**Parameters**

- **win**: pointer to a window object

*lv\_coord\_t* **lv\_win\_get\_width**(*lv\_obj\_t* \*win)

Get width of the content area (page scrollable) of the window

**Return** the width of the content area

**Parameters**

- **win**: pointer to a window object

static bool **lv\_win\_get\_drag**(const *lv\_obj\_t* \*win)

Get drag status of a window. If set to ‘true’ window can be dragged like on a PC.

**Return** whether window is draggable

**Parameters**

- **win**: pointer to a window object

void **lv\_win\_focus**(*lv\_obj\_t* \*win, *lv\_obj\_t* \*obj, *lv\_anim\_enable\_t* anim\_en)

Focus on an object. It ensures that the object will be visible in the window.

**Parameters**

- **win**: pointer to a window object
- **obj**: pointer to an object to focus (must be in the window)
- **anim\_en**: LV\_ANIM\_ON focus with an animation; LV\_ANIM\_OFF focus without animation

static void **lv\_win\_scroll\_hor**(*lv\_obj\_t* \*win, *lv\_coord\_t* dist)

Scroll the window horizontally

**Parameters**

- **win**: pointer to a window object
- **dist**: the distance to scroll (< 0: scroll right; > 0 scroll left)

static void **lv\_win\_scroll\_ver**(*lv\_obj\_t* \*win, *lv\_coord\_t* dist)

Scroll the window vertically

**Parameters**

- **win**: pointer to a window object



- **dist**: the distance to scroll (< 0: scroll down; > 0 scroll up)

**struct lv\_win\_ext\_t**

#### Public Members

*lv\_obj\_t* \***page**

*lv\_obj\_t* \***header**

char \***title\_txt**

lv\_coord\_t **btn\_w**