

LittlevGL documentation (Español)

Table of contents

Inicio	
Porting	
Simulator de PC	
Objetos	
Estilos	
Dispositivos de entrada	
Colores	
Fuentes	
Dibujando	
Animaciones	
Guia de estilo de codigo	
Tipos de objetos	
Arco (lv_arc)	
Barra (lv_bar)	
Objeto base (lv_obj)	
Boton (lv_btn)	
Matriz de botones (lv_btnm)	
Calendario (lv_calendar)	
Grafica (lv_chart)	
Check box (lv_cb)	
Container (lv_cont)	
Drop down list (lv_ddlist)	
Gauge (lv_gauge)	
Imagen (lv_img)	
Boton con imagen (lv_imgbtn)	
Teclado (lv_kb)	
Lista (lv_list)	
LED (lv_led)	
Linea (lv_line)	
Line meter (lv_lmeter)	
Etiqueta (lv_label)	
Caja con mensaje (lv_mbox)	
Pagina (lv_page)	
Preloader (lv_preload)	
Roller (lv_roller)	
Slider (lv_slider)	
Spinbox (lv_spinbox)	
Switch (lv_sw)	
Tab view (lv_tabview)	
Area de texto (lv_ta)	
Ventana (lv_window)	

Inicio

Porting

Written for v5.2

System architecture



Application

Your application which creates the GUI and handles the specific tasks.

LittlevGL

The graphics library itself. Your application can communicate with the library to create a GUI. It contains a HAL (Hardware Abstraction Layer) interface to register your display and input device drivers.

Driver

Besides your specific drivers, it contains functions to drive your display, optionally to a GPU and to read the touchpad or buttons.

There are **two typical hardware set-ups** depending on the MCU has an LCD/TFT driver periphery or not. In both cases, a frame buffer will be required to store the current image of the screen.

MCU with TFT/LCD driver

If your MCU has a TFT/LCD driver periphery then you can connect a display directly via RGB interface. In this case, the frame buffer can be in the internal RAM (if the MCU has enough RAM) or in the external RAM (if the MCU has a memory interface).

External display controller

If the MCU doesn't have TFT/LCD driver then an external display controller (E.g. SSD1963, SSD1306, ILI9341) has to be used. In this case, the MCU can communicate with the display controller via Parallel port, SPI or sometimes I2C. The frame buffer is usually located in the display controller which saves a lot of RAM for the MCU.

Requirements

- **16, 32 or 64 bit** microcontroller or processor
- **16 MHz** clock speed
- **8 kB RAM** for static data and **>2 kB RAM** for dynamic data (graphical objects)
- **64 kB program memory** (flash)
- **Optionally ~1/10 screen sized memory** for internal buffering (at 240×320 , 16 bit colors it means 15 kB)

The LittlevGL is designed to be highly portable and to not use any **external resources**:

- No external RAM required (but supported)
- No float numbers are used
- No GPU needed (but supported)
- Only a single frame buffer is required located in:
 - Internal RAM or

- External RAM or
- External display controller's memory

If you would like to **reduce** the required **hardware resources** you can:

- Disable the unused object types to save RAM and ROM
- Change the size of the graphical buffer to save RAM
- Use simpler styles to reduce the rendering time

Project set-up

Get the library

The Littlev Graphics Library is available on GitHub: <https://github.com/littlevgl/lvgl>. You can clone or download the latest version of the library from here or you can use the [Download](#) page as well.

The graphics library is the **lvgl** directory which should be copied into your project.

Config file

There is a configuration header file for LittlevGL: **lv_conf.h**. It sets the library's basic behavior in compile time, disable unused modules and features and adjust the size of memory buffers etc.

Copy `_lvgl/lv_conf_template.h` next to the `lvgl` directory and rename it to `_lv_conf.h`. Open the file and delete the first `#if` and the last `#endif` to enable the content. In the config file comments explain the meaning of the options. Check at least these three config options and modify them according to your hardware:

1. **LV_HOR_RES** Your display's horizontal resolution
2. **LV_VER_RES** Your display's vertical resolution
3. **LV_COLOR_PETH** 8 for (RG332), 16 for (RGB565) or 32 for (RGB888 and ARGB8888).

Initialization

In order to use the graphics library you have to initialize it and the other components too. To order of the initialization is:

1. Call `_lv_init()`
2. Initialize your drivers
3. Register the display and input devices drivers in LittlevGL. (see below)

Porting the library

To adopt LittlevGL into your project firstly you have to provide some functions and register them in the graphics library.

Display interface

To set up a display an **lv_disp_drv_t** variable has to be initialized:

```
lv_disp_drv_t disp_drv;
lv_disp_drv_init(&disp_drv); /*Basic initialization*/
disp_drv. ....=...; /*Initialize the fields here. See below.*/
disp_drv_register(&disp_drv); /*Register the driver in LittlevGL*/
```

You can configure the driver for different operation modes. To learn more about the drawing modes visit [Drawing and rendering](#).

Internal buffering (VDB)

The graphics library works with an internal buffering mechanism to create advances graphics features with only one frame buffer. The internal buffer is called VDB (Virtual Display Buffer) and its size can be adjusted in `lv_conf.h` with `_LV_VDB_SIZE_`. When `_LV_VDB_SIZE_ > 0` then the

internal buffering is used and you have to provide a function which flushes the buffer's content to your display:

```
disp_drv.disp_flush = my_disp_flush;
...
void my_disp_flush(int32_t x1, int32_t y1, int32_t x2, int32_t y2, const lv_color_t* color_p)
{
    /*TODO Copy 'color_p' to the specified area*/
    /*Call 'lv_fluh_ready()' when ready*/lv_flush_ready();
}
```

In the flush function, you can use DMA or any hardware to do the flushing in the background, but when the flushing is ready you have to call

```
lv_flush_ready();
```

Hardware acceleration (GPU)

First of all using GPU is totally optional. But if your MCU supports graphical acceleration then you can use it. The `_mem_blend_` and `_mem_fill_` fields of the display driver is used to interface with a GPU. The GPU related functions can be used only if internal buffering (VDB) is enabled.

```
disp_drv.mem_blend = my_mem_blend;    /*Blends two color arrays using opacity*/
disp_drv.mem_fill = my_mem_fill;      /*Fills an array with a color*/
...
void my_mem_blend(lv_color_t* dest, constlv_color_t* src, uint32_t length, lv_opa_t opa)
{
    /*TODO Copy 'src' to 'dest' but blend it with 'opa' alpha */
}

void my_mem_fill(lv_color_t* dest, uint32_t length, lv_color_t color)
{
    /*TODO Fill 'length' pixels in 'dest' with 'color'*/
}
```

Unbuffered drawing

It is possible to draw directly to a frame buffer when the internal buffering is disabled (`LV_VDB_SIZE = 0`).

```
disp_drv.disp_fill = my_disp_fill; /*Fill an area in the frame buffer*/
disp_drv.disp_map = my_disp_map; /*Copy a color_map (e.g. image) into the frame buffer*/
...
void my_disp_map(int32_t x1,int32_t y1,int32_t x2,int32_t y2,constlv_color_t* color_p)
{
    /*TODO Copy 'color_p' to the specified area*/
}

voidmy_disp_fill(int32_t x1,int32_t y1,int32_t x2,int32_t y2,lv_color_t color)
{
    /*TODO Fill the specified area with 'color'*/
}
```

Keep in mind this way during refresh some artifacts can be visible because the layers are drawn after each other. And some high-level graphics features like anti-aliasing, opacity or shadows aren't available in this configuration.

If you use an external display controller which supports accelerated filling (e.g. RA8876) then you can use this feature in `_disp_fill()`

Input device interface

To set up an input device an `lv_indev_drv_t` variable has to be initialized:

```
lv_indev_drv_t indev_drv;lv_indev_drv_init(&indev_drv); /*Basic initialization*/
indev_drv.type =.../*See below.*/
indev_drv.read =.../*See below.*/
lv_indev_drv_register(&indev_drv); /*Register the driver in LittlevGL*/
```

type can be

- `LV_INDEV_TYPE_POINTER`: touchpad or mouse
- `LV_INDEV_TYPE_KEYPAD`: keyboard
- `LV_INDEV_TYPE_ENCODER`: left, right, push
- `LV_INDEV_TYPE_BUTTON`: external buttons pressing the screen

read is a function pointer which will be called periodically to report the current state of an input device. It can also buffer data and return *false* when no more data to be read or *true* when the buffer is not empty.

To learn more about input devices visit [Input devices](#).

Touchpad, mouse or any pointer

```
indev_drv.type = LV_INDEV_TYPE_POINTER;
indev_drv.read = my_input_read;
```

The read function should look like this:

```
bool my_input_read(lv_indev_data_t*data)
{
    data->point.x = touchpad_x;
    data->point.y = touchpad_y;
    data->state = LV_INDEV_STATE_PR or LV_INDEV_STATE_REL;
    return false; /*No buffering so no more data read*/
}
```

IMPORTANT NOTE: Touchpad drivers must return the last X/Y coordinates even when the state is `LV_INDEV_STATE_REL`.

Keypad or keyboard

```
indev_drv.type = LV_INDEV_TYPE_KEYPAD;
indev_drv.read = my_input_read;
```

The read function should look like this:

```
bool keyboard_read(lv_indev_data_t*data) {
    data->key = last_key();          /*Set the last pressed or released key*/
    if(key_pressed()){
        data->state = LV_INDEV_STATE_PR;
    }
    else{
        data->state = LV_INDEV_STATE_REL;
    }
    return false; /*No buffering so no more data read*/
}
```

To use a keyboard:

- Register a *read* function (like above) with `_LV_INDEV_TYPE_KEYPAD_` type.
- `_USE_LV_GROUP_` has to be enabled in `_lv_conf.h`
- An object group has to be created: `_lv_group_create()` and objects have to be added: `_lv_group_add_obj()`
- The created group has to be assigned to an input device: `_lv_indev_set_group(my_indev, group1);`
- Use `_LV_GROUP_KEY_...` to navigate among the objects in the group

Visit [Touchpad-less navigation](#) to learn more.

Encoder

With an encoder you can do 4 things:

1. press its button
2. long press its button
3. turn left
4. turn right

By turning the encoder you can focus on the next/previous object. When you press the encoder on a simple object (like a button), it will be clicked. If you press the encoder on a complex object (like a list, message box etc.) the object will go to edit mode where by turning the encoder you can navigate inside the object. To leave edit mode press long the button.

```

indev_drv.type = LV_INDEV_TYPE_ENCODER;
indev_drv.read = my_input_read;

```

The read function should look like this:

```

bool encoder_read(lv_indev_data_t*data) {
    data->enc_diff = enc_get_new_moves();
    if(enc_pressed()) {
        data->state = LV_INDEV_STATE_PR;
    }
    else {
        data->state = LV_INDEV_STATE_REL;
    }

    return false; /*No buffering so no more data read*/
}

```

- To use an `ENCODER`, similarly to the `KEYPAD`, the objects should be added to groups

Button

```

indev_drv.type = LV_INDEV_TYPE_BUTTON;
indev_drv.read = my_input_read;

```

The read function should look like this:

```

bool button_read(lv_indev_data_t*data) {
    static uint32_t last_btn = 0; /*Store the last pressed button*/
    int btn_pr = my_btn_read(); /*Get the ID (0,1,2,...) of the pressed button*/
    if(btn_pr >= 0) { /*Is there a button press?*/
        last_btn = btn_pr; /*Save the ID of the pressed button*/
        data->state = LV_INDEV_STATE_PR; /*Set the pressed state*/
    } else {
        data->state = LV_INDEV_STATE_REL; /*Set the released state*/
    }

    data->btn = last_btn; /*Set the last button*/

    return false; /*No buffering so no more data read*/
}

```

- The buttons need to be assigned to pixels on the screen using `lv_indev_set_button_points(indev, points_array)`. Where `_points_array_` look like `const lv_point_t points_array[] = { {12,30},{60,90}, ... }`

Tick interface

The LittlevGL uses a system tick. Call the `lv_tick_inc(tick_period)` function periodically and tell the call period in milliseconds. For example if called in every milliseconds: `lv_tick_inc(1)`.

Task handling

To handle the tasks of LittlevGL you need to call `lv_task_handler()` periodically in one of the following:

- `while(1)` of `main()` function
- timer interrupt periodically
- an OS task periodically

The timing is not critical but it should be about 5 milliseconds to keep the system responsive.

Example:

```

while(1) {
    lv_task_handler();
    my_delay_ms(5);
}

```

The MCU can go to **sleep** when no user input happens. In this case the main `while(1)` should look like this:


```

while(1) {
    /*Normal operation in 1 sec*/
    if(lv_indev_get_inactive_time(NULL) < 1000) {
        lv_task_handler();
    }
    /*Sleep after 1 sec inactivity*/
    else {
        timer_stop();           /*Stop the timer where lv_tick_inc() is called*/
        sleep();               /*Sleep the MCU*/
    }
    my_delay_ms(5);
}

```

You should also add these lines to your input device read function if a press happens:

```

/*Force task execution on wake-up*/
lv_tick_inc(LV_REFR_PERIOD);
timer_start();           /*Restart the timer where lv_tick_inc() is called*/
lv_task_handler();

```

In addition to `lv_indev_get_inactive_time()` you can check `lv_anim_count_running()` to see if every animations are finished.

Using with an operating system

LittlevGL is **not thread-safe**. Despite it, it's quite simple to use LittlevGL inside an operating system.

The **simple scenario** is to don't use the operating system's tasks but use `lv_task` s. An `_lv_task_` is a function called periodically in `lv_task_handler` . In the `_lv_task_` you can get the state of the sensors, buffers etc and call LittlevGL functions to refresh the GUI. To create an `_lv_task_` use: `lv_task_create(my_func, period_ms, LV_TASK_PRIO_LOWEST/LOW/MID/HIGH/HIGHEST, custom_ptr)`

If you need to **use other task or threads** you need one mutex which should be taken before calling `lv_task_handler` and released after it. In addition, you have to use to that mutex in other tasks and threads around every LittlevGL (`lv_...`) related code. This way you can use LittlevGL in a real multitasking environment. Just use a mutex to avoid concurrent calling of LittlevGL functions.

Porting example

Here you will find an example porting code: [Porting tutorial](#).

Simulator de PC

Written for v5.1

You can try out the Littlev Graphics Library **using only your PC** without any development board. Write a code, run it on the PC and see the result on the monitor. It is cross-platform: Windows, Linux and OSX are supported!

- Needs only few minutes setup
- Costs \$0. No PCB cost and no pay for any software
- A TFT display is simulated and shown on the monitor of your PC
- The touch pad is replaced by your mouse
- The written code is portable, you can simply copy it when using an embedded hardware

Install Eclipse CDT

Eclipse CDT is C/C++ IDE. You can use other IDEs as well but in this tutorial the configuration for Eclipse CDT is shown.

Eclipse is a Java based software therefore be sure **Java Runtime Environment** is installed on your system.

On Debian-based distros (e.g. Ubuntu): `sudo apt-get install default-jre`

You can download Eclipse's CDT from: <https://eclipse.org/cdt/>. Start the installer and choose *Eclipse CDT* from the list.

Install SDL 2

The PC simulator uses the [SDL 2](#) cross platform library to simulate a TFT display and a touch pad.

Linux

On **Linux** you can easily install SDL2 using a terminal:

1. Find the current version of SDL2: `apt-cache search libsdl2 (e.g. libsdl2-2.0-0)`
2. Install SDL2: `sudo apt-get install libsdl2-2.0-0` (replace with the found version)
3. Install SDL2 development package: `sudo apt-get install libsdl2-dev`
4. If build essentials are not installed yet: `sudo apt-get install build-essential`

Windows

If you are using **Windows** firstly you need to install MinGW ([64 bit version](#)). After it do the following steps to add SDL2:

1. Download the development libraries of SDL.
Go to <https://www.libsdl.org/download-2.0.php> and download *Development Libraries: SDL2-devel-2.0.5-mingw.tar.gz*
2. Uncompress the file and go to `_x86_64-w64-mingw32_` directory (for 64 bit MinGW) or to `i686-w64-mingw32` (for 32 bit MinGW)
3. Copy `...mingw32/include/SDL2` folder to `_C:/MinGW/.../x86_64-w64-mingw32/include_`
4. Copy `...mingw32/lib/` content to `_C:/MinGW/.../x86_64-w64-mingw32/lib_`
5. Copy `...mingw32/bin/SDL2.dll` to `[_eclipse_worksapce]/pc_simulator/Debug/_`. Do it later when Eclipse is installed.

Note: If you will use **Microsoft Visual Studio** instead of Eclipse then you don't have to install MinGW.

OSX

On **OSX** you can easily install SDL2 with brew: `brew install sdl2`

If something is not working I suggest [this tutorial](#) to get started with SDL.

Pre-configured project

A pre-configured graphics library project (based on the latest release) is always available in PC simulator project. You can find it on [GitHub](#) or on the [Download](#) page. The project is configured for Eclipse CDT.

Add the pre-configured project to Eclipse CDT

Run Eclipse CDT. It will show a dialogue about the **workspace path**. Before accepting it check that path and copy (and unzip) the downloaded pre-configured project there. Now you can accept the workspace path. Of course you can modify this path but in that case copy the project to that location.

Close the start up window and go to **File->Import** and choose **General->Existing project into Workspace**. **Browse the root directory** of the project and click **Finish**

On **Windows** you have to do two additional things:

- Copy the **SDL2.dll** into the project's Debug folder
- Right click on the project -> Project properties -> C/C++ Build -> Settings -> Libraries -> Add ... and add *mingw32* above SDLmain and SDL. (The order is important: mingw32, SDLmain, SDL)

Compile and Run

Now you are ready to run the Littlev Graphics Library on your PC. Click on the Hammer Icon on the top menu bar to Build the project. If you have done everything right you will not get any errors. Note that on some systems additional steps might be required to "see" SDL 2 from Eclipse but in most of cases the configurations in the downloaded project is enough.

After a success build click on the Play button on the top menu bar to run the project. Now a window should appear in the middle of your screen.

Now everything is ready to use the Littlev Graphics Library in the practice or begin the development on your PC.

Next step

To create your first LittlevGL GUI you should read the pages below [Porting](#) in the sidebar.

Objetos

Written for v5.1

In the Littlev Graphics Library the **basic building blocks** of a user interface are the objects. For example:

- [Button](#)
- [Label](#)
- [Image](#)
- [List](#)
- [Chart](#)
- [Text area](#)

Click to check all the existing [Object types](#)

Object attributes

Basic attributes

The objects have basic attributes which are common independently from their type:

- Position
- Size
- Parent
- Drag enable
- Click enable etc.

You can set/get this attributes with `lv_obj_set_...` and `lv_obj_get_...` functions. For example:

```
/*Set basic object attributes*/
lv_obj_set_size(btn1, 100, 50);           /*Button size*/
lv_obj_set_pos(btn1, 20, 30);             /*Button position*/
```

To see all the available functions visit the Base object's [documentation](#).

Specific attributes

The object types have special attributes. For example a slider have:

- Min. max. values
- Current value
- Callback function for new value set
- Styles

For these attributes every object type have unique API functions. For example for a slider:

```
/*Set slider specific attributes*/
lv_slider_set_range(slider1, 0, 100);      /*Set min. and max. values*/
lv_slider_set_value(slider1, 40);          /*Set the current value (position)*/
lv_slider_set_action(slider1, my_action);  /*Set a callback function*/
```

Object's working mechanisms

Parent-child structure

A parent can be considered as the container of its children. Every object has exactly one parent object (except screens) but a parent can have unlimited number of children. There is no limitation for the type of the parent but there typically parent (e.g. button) and typical child (e.g. label)

objects.


Screen – the most basic parent

The screen is a special object which has no parent object. Always there is an active screen. By default, the library creates and loads one. To get the currently active screen use the `lv_scr_act()` function.

A screen can be created with any object type, for example, a basic object or an image to make a wallpaper.

Moving together

If the position of the parent is changed the children will move with the parent. Therefore all positions are relative to the parent. So the (0;0) coordinates mean the objects will remain in the top left-hand corner of the parent independently from the position of the parent.



```
lv_obj_t * par = lv_obj_create(lv_scr_act(), NULL);    /*Create a parent object on the current screen*/
lv_obj_set_size(par, 100, 80);                        /*Set the size of the parent*/

lv_obj_t * obj1 = lv_obj_create(par, NULL);           /*Create an object on the previously created parent object*/
lv_obj_set_pos(obj1, 10, 10);                        /*Set the position of the new object*/
```

Modify the position of the parent:



```
lv_obj_set_pos(par, 50, 50);                          /*Move the parent. The child will move with it.*/
```

Visibility only on parent

If a child partially or totally out of its parent then the parts outside will not be visible.



```
lv_obj_set_x(obj1, -30);      /*Move the child a little bit of the parent*/
```

Create - delete objects

In the graphics library objects can be created and deleted dynamically in run-time. It means only the currently created objects consume RAM. For example, if you need a chart you can create it only when it is required and delete after it is used.

Every objects type has its own **create** function with an unified prototype. It needs two parameters: a pointer the parent object and optionally a pointer to an other object with the same type. If the second parameter is not *NULL* then this objects will be copied to the new one. To create a screen give *NULL* as parent. The return value of the create function is a pointer to the created object. Independently from the object type a common variable type **lv_obj_t** is used. This pointer can be used later to set or get the attributes of the object. The create functions look like this:

```
lv_obj_t * lv_type_create(lv_obj_t * parent, lv_obj_t * copy);
```

There is a common **delete** function for all object types. It deletes the object and all of its children.

```
void lv_obj_del(lv_obj_t * obj);
```


You can delete only the children of an object but leave the object itself "alive":

```
void lv_obj_clean(lv_obj_t * obj);
```

Layers

The earlier created object (and its children) will be drawn earlier (nearer to the background). In other words, the lastly created object will be on the top among its siblings. It is very important, the order is calculated among the objects on the same level ("siblings").

Layers can be added easily by creating 2 objects (which can be transparent) firstly 'A' and secondly 'B'. 'A' and every object on it will be in the background and can be covered by 'B' and its children.

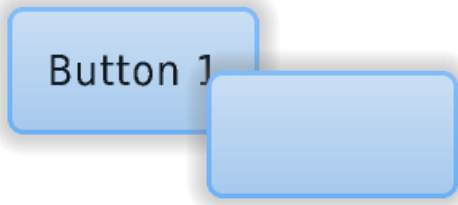

```
/*Create a screen*/
lv_obj_t * scr = lv_obj_create(NULL, NULL);
lv_scr_load(scr);                                /*Load the screen*/

/*Create 2 buttons*/
lv_obj_t * btn1 = lv_btn_create(scr, NULL);      /*Create a button on the screen*/
lv_btn_set_fit(btn1, true, true);                /*Enable to automatically set the size according to the content*/
lv_obj_set_pos(btn1, 60, 40);                    /*Set the position of the button*/

lv_obj_t * btn2 = lv_btn_create(scr, btn1);      /*Copy the first button*/
lv_obj_set_pos(btn2, 180, 80);                   /*Set the position of the button*/

/*Add labels to the buttons*/
lv_obj_t * label1 = lv_label_create(btn1, NULL); /*Create a label on the first button*/
lv_label_set_text(label1, "Button 1");           /*Set the text of the label*/

lv_obj_t * label2 = lv_label_create(btn2, NULL); /*Create a label on the second button*/
lv_label_set_text(label2, "Button 2");           /*Set the text of the label*/

/*Delete the second label*/
lv_obj_del(label2);
```

Estilos

Written for v5.1

To set the appearance of the objects styles can be used. A style is a structure variable with attributes like colors, paddings, visibility, and others. There is common style type: **lv_style_t**.

By setting the fields of an **lv_style_t** structure you can influence the appearance of the objects using that style.

The objects store only a pointer to a style so the style cannot be a local variable which is destroyed after the function exists. **You should use static, global or dynamically allocated variables.**

```
lv_style_t style_1;           /*OK! Global variables for styles are fine*/
static lv_style_t style_2;    /*OK! Static variables outside the functions are fine*/
void my_screen_create(void)
{
    static lv_style_t style_3; /*OK! Static variables in the functions are fine*/
    lv_style_t style_1;       /*WRONG! Styles can't be local variables*/

    ...
}
```

Style properties

A style has 5 main parts: common, body, text, image and line. An object will use that fields which are relevant for it. For example, Lines don't care about the letter_space. To see which fields are used by an object type see their documentation.

The fields of a style structure are the followings:

- **Common properties**
 - **glass 1:** Do not inherit this style (see below)
- **Body style properties** Used by the rectangle-like objects
 - **body.empty** Do not fill the rectangle (just draw border and/or shadow)
 - **body.main_color** Main color (top color)
 - **body.grad_color** Gradient color (bottom color)
 - **body.radius** Corner radius. (set to LV_RADIUS_CIRCLE to draw circle)
 - **body.opa** Opacity (0..255 or LV_OPA_TRANSP, LV_OPA_10, LV_OPA_20 ... LV_OPA_COVER)
 - **body.border.color** Border color
 - **body.border.width** Border width
 - **body.border.part** Border parts (LV_BORDER_LEFT/RIGHT/TOP/BOTTOM/FULL or 'OR'ed values)
 - **body.border.opa** Border opacity
 - **body.shadow.color** Shadow color
 - **body.shadow.width** Shadow width
 - **body.shadow.type** Shadow type (LV_SHADOW_BOTTOM or LV_SHADOW_FULL)
 - **body.padding.hor** Horizontal padding
 - **body.padding.ver** Vertical padding
 - **body.padding.inner** Inner padding
- **Text style properties** Used by the objects which show texts
 - **text.color** Text color
 - **text.font** Pointer to a font

- **text.opa** Text opacity (0..255 or LV_OPA_TRANSP, LV_OPA_10, LV_OPA_20 ... LV_OPA_COVER)
- **text.letter_space** Letter space
- **text.line_space** Line space
- **Image style properties** Used by image-like objects or icons on objects
 - **image.color** Color for image re-coloring based on the pixels brightness
 - **image.intense** Re-color intensity (0..255 or LV_OPA_TRANSP, LV_OPA_10, LV_OPA_20 ... LV_OPA_COVER)
 - **image.opa** Image opacity (0..255 or LV_OPA_TRANSP, LV_OPA_10, LV_OPA_20 ... LV_OPA_COVER)
- **Line style properties** Used by objects containing lines or line-like elements
 - **line.color** Line color
 - **line.width** Line width
 - **line.opa** Line opacity (0..255 or LV_OPA_TRANSP, LV_OPA_10, LV_OPA_20 ... LV_OPA_COVER)

Using styles

Every object type has a unique function to set its style or styles.

If the object has only one style - like a label - the `lv_label_set_style(label1, &style)` function can be used to set a new style.

If the object has more styles (like a button have 5 styles for each state) `lv_btn_set_style(obj, LV_BTN_STYLE_..., &rel_style)` function can be used to set a new style.

The styles and the style properties used by an object type are described in their documentation.

If you **modify a style which is used** by one or more objects then the objects have to be notified about the style is changed. You have two options to do that:

```
void lv_obj_refresh_style(lv_obj_t * obj);      /*Notify an object about its style is modified*/
void lv_obj_report_style_mod(void * style);    /*Notify all object if a style is modified.(NULL to notify all objects)*/
```

If the **style of an object is NULL** then its style will be inherited from its parent's style. It makes easier to create a consistent design. Don't forget a style describes a lot of properties at the same time. So for example, if you set a button's style and create a label on it with NULL style then the label will be rendered according to the buttons styles. In other words, the button makes sure its children will look well on it.

Setting the `//glass` style property will prevent inheriting that style. You should use it if the style is transparent so that its children use colors and others from its parent.

Built-in styles

There are several built-in styles in the library:



As you can see there is a style for screens, for buttons, plain and pretty styles and transparent styles as well. The `lv_style_transp`, `lv_style_transp_fit` and `lv_style_transp_tight` differ only in paddings: for `lv_style_transp_tight` all padings are zero, for `lv_style_transp_fit` only hor and ver paddings are zero.

The built in styles are global `lv_style_t` variables so you can use them like: `lv_btn_set_style(obj, LV_BTN_STYLE_REL, &lv_style_btn_rel)`

You can modify the built-in styles or you can create new styles. When creating new styles it is recommended to first copy a built-in style to be sure all fields are initialized with a proper value. The `lv_style_copy(&dest_style, &src_style)` can be used to copy styles.

Style animations

You can animate styles using `lv_style_anim_create(&anim)`. Before calling this function you have to initialize an `lv_style_anim_t` variable. The animation will fade a `style_1` to `style_2`.

```
lv_style_anim_t a;    /*Will be copied, can be local variable*/
a.style_anim = & style_to_anim;    /*Pointer to style to animate*/
a.style_start = & style_1;    /*Pointer to the initial style (only pointer saved) */
a.style_end = & style_2;    /*Pointer to the target style (only pointer saved) */
a.act_time = 0;    /*Set negative to make a delay*/
a.time = 1000;    /*Time of animation in milliseconds*/
a.playback = 0;    /*1: play the animation backward too*/
a.playback_pause = 0;    /*Wait before playback [ms]*/
a.repeat = 0;    /*1: repeat the animation*/
a.repeat_pause = 0;    /*Wait before repeat [ms]*/
a.end_cb = NULL;    /*Call this function when the animation ready*/
```

Style example

The example below demonstrates the above-described style usage



```
/*Create a style*/
static lv_style_t style1;
lv_style_copy(&style1, &lv_style_plain);    /*Copy a built-in style to initialize the new style*/
style1.body.main_color = LV_COLOR_WHITE;
style1.body.grad_color = LV_COLOR_BLUE;
style1.body.radius = 10;
style1.body.border.color = LV_COLOR_GRAY;
style1.body.border.width = 2;
style1.body.border.opa = LV_OPA_50;
style1.body.padding.hor = 5;    /*Horizontal padding, used by the bar indicator below*/
style1.body.padding.ver = 5;    /*Vertical padding, used by the bar indicator below*/
style1.text.color = LV_COLOR_RED;

/*Create a simple object*/
lv_obj_t *obj1 = lv_obj_create(lv_scr_act(), NULL);
lv_obj_set_style(obj1, &style1);    /*Apply the created style*/
lv_obj_set_pos(obj1, 20, 20);    /*Set the position*/

/*Create a label on the object. The label's style is NULL by default*/
lv_obj_t *label = lv_label_create(obj1, NULL);
lv_obj_align(label, NULL, LV_ALIGN_CENTER, 0, 0);    /*Align the label to the middle*/

/*Create a bar*/
lv_obj_t *bar1 = lv_bar_create(lv_scr_act(), NULL);
lv_bar_set_style(bar1, LV_BAR_STYLE_INDIC, &style1);    /*Modify the indicator's style*/
lv_bar_set_value(bar1, 70);    /*Set the bar's value*/
```

Themes

To create styles for your GUI is challenging because you need a deeper understanding of the library and you need to have some design skills. In addition, it takes a lot of time to create so many styles.

To speed up the design part themes are introduced. A theme is a style collection which contains the required styles for every object type. For example 5 styles for buttons to describe their 5 possible states. Check the [Existing themes](#).

To be more specific a theme is a structure variable which contains a lot of `lv_style_t` fields. For buttons:

```
theme.btn.rel      /*Released button style*/
theme.btn.pr       /*Pressed button style*/
theme.btn.tgl_rel  /*Toggled released button style*/
theme.btn.tgl_pr   /*Toggled pressed button style*/
theme.btn.ina      /*Inactive button style*/
```

A theme can be initialized by: `lv_theme_xxx_init(hue, font)`. Where `xxx` is the name of the theme, `hue` is a Hue value from HSV color space (0..360) and `font` is the font applied in the theme (`NULL` to use the `LV_FONT_DEFAULT` default font)

When a theme is initialized its styles can be used like this:



```
/*Create a default slider*/
lv_obj_t *slider = lv_slider_create(lv_scr_act(), NULL);
lv_slider_set_value(slider, 70);
lv_obj_set_pos(slider, 10, 10);

/*Initialize the alien theme with a redish hue*/
lv_theme_t *th = lv_theme_alien_init(10, NULL);

/*Create a new slider and apply the themes styles*/
slider = lv_slider_create(lv_scr_act(), NULL);
lv_slider_set_value(slider, 70);
lv_obj_set_pos(slider, 10, 50);
lv_slider_set_style(slider, LV_SLIDER_STYLE_BG, th->slider.bg);
lv_slider_set_style(slider, LV_SLIDER_STYLE_INDIC, th->slider.indic);
lv_slider_set_style(slider, LV_SLIDER_STYLE_KNOB, th->slider.knob);
```

You can ask the library to apply the styles from a theme when you create new objects. To do this use `lv_theme_set_current(th)` ;

Dispositivos de entrada

Written for v5.1

To interact with the created object *Input devices* are required. For example Touchpad, Mouse, Keyboard or even an Encoder. To learn how to add an input device, read the [Porting guide](#).

When you register an input device driver the library adds some extra information to it to describe the state of the input device in more detail. When a user action (e.g. a button press) happens and an action (callback) function is triggered always there is an input device which triggered that action. You can get this input device with

```
lv_indev_t *indev = lv_indev_get_act();
```

It might be important when you need to know some special information about the input device like the currently pressed point, or dragging an object or not etc.

The input devices have a very simple API:

```
/*Get the last point on a display input*/
void lv_indev_get_point(lv_indev_t * indev, point_t * point);

/*Check if there is dragging on input device or not */
bool lv_indev_is_dragging(lv_indev_t * indev);

/*Get the vector of dragging on a input device*/
void lv_indev_get_vect(lv_indev_t * indev, point_t * point);

/*Do nothing until the next release*/
void lv_indev_wait_release(lv_indev_t * indev);

/*Do nothing until the next release*/
void lv_indev_wait_release(lv_indev_t * indev);

/*Reset one or all (use NULL) input devices*/
void lv_indev_reset(lv_indev_t * indev);

/*Reset the long pressed state of an input device*/
void lv_indev_reset_lpr(lv_indev_t * indev);

/*Set a cursor for a pointer input device*/
void lv_indev_set_cursor(lv_indev_t * indev, lv_obj_t * cur_obj);

/*Set a destination group for a keypad input device*/
void lv_indev_set_group(lv_indev_t * indev, lv_group_t * group);
```

Touchpad-less navigation

The objects can be grouped in order to easily **control** them **without touchpad or mouse**. It allows you to use

- Keyboard or keypad
- Hardware buttons
- Encoder

to navigate among objects.

Firstly you have to **create an object group** with `lv_group_t *group = lv_group_create()` and add objects to it with `lv_group_add_obj(group, obj)`. In a group always there is a *focused* object. All the button press will be "sent" to the currently focused object.

To navigate among the objects in a group (change the focused object) and interact with them an `_LV_INDEV_TYPE_KEYPAD_` typed input device is required. In its *read* function you can tell the library which key is pressed or released. To learn how to add an input device, read the [Porting guide](#).

Besides you have to **assign the group to the input device** with

```
lv_indev_set_group(indev, group)
```

There are some special **control characters** which can be used in the *read* function:

- **LV_GROUP_KEY_NEXT** Focus on the next object
- **LV_GROUP_KEY_PREV** Focus on the previous object
- **LV_GROUP_KEY_UP** Increment the value, move up or click the focused object (move up means e.g. select an upper list element)
- **LV_GROUP_KEY_DOWN** Decrement the value or move down on the focused object (move down means e.g. select a lower list element)
- **LV_GROUP_KEY_RIGHT** Increment the value or click the focused object
- **LV_GROUP_KEY_LEFT** Decrement the value of the focused object
- **LV_GROUP_KEY_ENTER** Click the focused object or a selected element (e.g. list element)
- **LV_GROUP_KEY_ESC** Close the object (e.g. drop-down list)

In some cases (e.g. when a pop-up window appears) it is useful to freeze the focus on an object. It means the `_LV_GROUP_KEY_NEXT/PREV_` will be ignored. You can do it with `lv_group_focus_freeze(group, true)`.

The **style of the object in focus** is modified by a function. By default, it makes the object's colors orangish but you can also specify your own style updater function in each group with

```
void lv_group_set_style_mod_cb(group, style_mod_cb).
```

The `_style_mod_cb_` needs an `lv_style_t *` parameter which is a copy of the focused object's style. In the callback, you can mix some colors to the current ones, and modify parameters but **it is not permitted to set attributes which modify the size** (like `_letter_space_`, `padding` etc.)

Colores

Written for v5.1

The color module handles all color related functions like changing color depth, creating colors from hex code, converting between color depths, mixing colors etc.

The following variable types are defined by the color module:

- **lv_color1_t** Store monochrome color. For compatibility it also has R,G,B fields but they are always the same (1 byte)
- **lv_color8_t** A structure to store R (3 bit),G (3 bit),B (2 bit) components for 8 bit colors (1 byte)
- **lv_color16_t** A structure to store R (5 bit),G (6 bit),B (5 bit) components for 16 bit colors (2 byte)
- **lv_color24_t** A structure to store R (8 bit),G (8 bit), B (8 bit) components for 24 bit colors (4 byte)
- **lv_color_t** Equal to color1/8/16/24_t according to color depth settings
- **lv_color_int_t** uint8_t, uint16_t or uint32_t according to color depth setting. Used to build color arrays from plain numbers.
- **lv_opa_t** A simple uint8_t type to describe opacity.

The `_lv_color_t`, `_lv_color1_t`, `_lv_color8_t`, `_lv_color16_t` and `_lv_color24_t` types have got four fields:

- **red** red channel
- **green** green channel
- **blue** blue channel
- **full** red + green + blue as one number

You can set the **current color depth** in `_lv_conf.h` by setting the `_LV_COLOR_DEPTH` define to 1 (monochrome), 8, 16 or 24.

You can **convert a color from the current color depth** to an other. The converter functions return with a number so you have to use the *full* field:

```
lv_color_t c;  
c.red   = 0x38;  
c.green = 0x70;  
c.blue  = 0xCC;  
  
lv_color1_t c1;  
c1.full = lv_color_to1(c);      /*Return 1 for light colors, 0 for dark colors*/  
  
lv_color8_t c8;  
c8.full = lv_color_to8(c);      /*Give a 8 bit number with the converted color*/  
  
lv_color16_t c16;  
c16.full = lv_color_to16(c);    /*Give a 16 bit number with the converted color*/  
  
lv_color24_t c24;  
c24.full = lv_color_to24(c);    /*Give a 32 bit number with the converted color*/
```

You can **create a color** with the current color depth using the **LV_COLOR_MAKE** macro. It takes 3 arguments (red, green, blue) as 8 bit numbers. For example to create light red color: `my_color = COLOR_MAKE(0xFF,0x80,0x80)` . Colors can be created from **HEX codes** too: `my_color = LV_COLOR_HEX(0xFF8080)` or `my_color = LV_COLOR_HEX3(0xF88)` .

Mixing two colors is possible with `mixed_color = lv_color_mix(color1, color2, ratio)` . Ration can be 0..255. 0 results fully color2, 255 result fully color1.


To describe **opacity** the `_lv_opa_t` type is created as wrapper to `_uint8_t`. Some defines are also introduced:

- **LV_OPA_TRANSP** Value: 0, means the opacity makes the color fully transparent
- **LV_OPA_10** Value: 25, means the color covers only a little
- **LV_OPA_20 ... OPA_80** come logically
- **LV_OPA_90** Value: 229, means the color near fully covers

- **LV_OPA_COVER** Value: 255, means the color fully covers

You can also use the `_LV_OPA_*` defines in `_lv_color_mix()` as ratio.

The color module defines the **most basic colors**:

-  `LV_COLOR_BLACK`
-  `LV_COLOR_GRAY`
-  `LV_COLOR_SILVER`
-  `LV_COLOR_RED`
-  `LV_COLOR_MARRON`
-  `LV_COLOR_LIME`
-  `LV_COLOR_GREEN`
-  `LV_COLOR_OLIVE`
-  `LV_COLOR_BLUE`
-  `LV_COLOR_NAVY`
-  `LV_COLOR_TAIL`
-  `LV_COLOR_CYAN`
-  `LV_COLOR_AQUA`
-  `LV_COLOR_PURPLE`
-  `LV_COLOR_MAGENTA`
-  `LV_COLOR_ORANGE`
-  `LV_COLOR_YELLOW`

as well as `LV_COLOR_WHITE`.

Fuentes

Written for v5.1

In LittlevGL fonts are bitmaps and other descriptors to store the images of the letters (glyph) and some additional information. A font is stored in a `lv_font_t` variable and can be set it in style's `text.font` field.

The fonts have a **bpp (Bit-Per-Pixel)** property. It shows how much bit is used to describe a pixel in the font. The value stored for a pixel determines the pixel's opacity. This way the image of the letters (especially on the edges) can be smooth and even. The possible bpp values are 1, 2, 4 and 8 (higher value means better quality). The bpp also affects the required memory size to store the font. E.g. bpp = 4 makes the font's memory size 4 times greater compared to bpp = 1.

Built-in fonts

There are several built-in fonts which can be enabled in `lv_conf.h` by `_USE_LV_FONT_...` defines. There are built-in fonts in **different sizes**:

- 10 px
- 20 px
- 30 px
- 40 px

You can enable the fonts with 1, 2, 4 or 8 values to set its bpp (e.g. `#define USE_LV_FONT_DEJAVU_20 4` in `lv_conf.h`).

The built-in fonts exist with **multiply character-sets** in each size:

- ASCII (Unicode 32..126)
- Latin supplement (Unicode 160..255)
- Cyrillic (Unicode 1024..1279)

The built-in fonts use the *Dejavu* font.

The built-in fonts are **global variables** with names like:

- `lv_font_dejavu_20` (20 px ASCII font)
- `lv_font_dejavu_20_latin_sup` (20 px Latin supplement font)
- `lv_font_dejavu_20_cyrillic` (20 px Cyrillic font)

Unicode support

The LittlevGL supports Unicode letter from **UTF-8** coded characters. You need to configure your editor to save your code/text as UTF-8 (usually this the default) and enable `_LV_TXT_UTF8_` in `lv_conf.h`. Without enabled `_LV_TXT_UTF8_` only ASCII fonts and symbols can be used (see the symbols below)

After it the texts will be decoded to determine the Unicode values. To display the letters your font needs to contain the image (glyph) of the characters.

You can assign more fonts to create a **larger character-set**. To do this choose a base font (typically the ASCII font) and add the extensions to it: `lv_font_add(child, parent)`. Only fonts with the same height can be assigned.

The built-in fonts are already added to the same sized ASCII font. For example if `_USE_LV_FONT_DEJAVU_20_` and `_USE_LV_FONT_DEJAVU_20_LATIN_SUP_` are enabled in `lv_conf.h` then the "abcÄÖÜ" text can be rendered when using `_lv_font_dejavu_20_`.

















































Symbol fonts

The symbol fonts are special fonts which contain symbols instead of letters. There are **built-in symbol fonts** as well and they are also assigned to the ASCII font with the same size. In a text, a symbol can be referenced like `_SYMBOL_LEFT_`, `_SYMBOL_RIGHT_` etc. You can mix these symbol names with strings:

```
lv_label_set_text(label1, "Right "SYMBOL_RIGHT);
```

The symbols can be used without UTF-8 support as well. (`_LV_TXT_UTF8 0`)

The list above shows the existing symbols:

	<code>SYMBOL_AUDIO</code>		<code>SYMBOL_PLUS</code>
	<code>SYMBOL_VIDEO</code>		<code>SYMBOL_MINUS</code>
	<code>SYMBOL_LIST</code>		<code>SYMBOL_WARNING</code>
	<code>SYMBOL_OK</code>		<code>SYMBOL_SHUFFLE</code>
	<code>SYMBOL_CLOSE</code>		<code>SYMBOL_UP</code>
	<code>SYMBOL_POWER</code>		<code>SYMBOL_DOWN</code>
	<code>SYMBOL_SETTINGS</code>		<code>SYMBOL_LOOP</code>
	<code>SYMBOL_TRASH</code>		<code>SYMBOL_DIRECTORY</code>
	<code>SYMBOL_HOME</code>		<code>SYMBOL_UPLOAD</code>
	<code>SYMBOL_DOWNLOAD</code>		<code>SYMBOL_CALL</code>
	<code>SYMBOL_DRIVE</code>		<code>SYMBOL_CUT</code>
	<code>SYMBOL_REFRESH</code>		<code>SYMBOL_COPY</code>
	<code>SYMBOL_MUTE</code>		<code>SYMBOL_SAVE</code>
	<code>SYMBOL_VOLUME_MID</code>		<code>SYMBOL_CHARGE</code>
	<code>SYMBOL_VOLUME_MAX</code>		<code>SYMBOL_BELL</code>
	<code>SYMBOL_IMAGE</code>		<code>SYMBOL_KEYBOARD</code>
	<code>SYMBOL_EDIT</code>		<code>SYMBOL_GPS</code>
	<code>SYMBOL_PREV</code>		<code>SYMBOL_FILE</code>
	<code>SYMBOL_PLAY</code>		<code>SYMBOL_WIFI</code>
	<code>SYMBOL_PAUSE</code>		<code>SYMBOL_BATTERY_FULL</code>
	<code>SYMBOL_STOP</code>		<code>SYMBOL_BATTERY_3</code>
	<code>SYMBOL_NEXT</code>		<code>SYMBOL_BATTERY_2</code>
	<code>SYMBOL_EJECT</code>		<code>SYMBOL_BATTERY_1</code>
	<code>SYMBOL_LEFT</code>		<code>SYMBOL_BATTERY_EMPTY</code>
	<code>SYMBOL_RIGHT</code>		<code>SYMBOL_BLUETOOTH</code>

Add new font

If you want to **add new fonts to the library** you can use the [Online Font Converter Tool](#). It can create a C array from a TTF file which can be copied copy to your project. You can specify the height, the range of characters and the bpp. Optionally you can enumerate the characters to include only them into the final font. To use the generated font declare it with `_LV_FONT_DECLARE(my_font_name)_`. After that, the font can be used as the built-in fonts.

Font example

aeuois
âéüöíß

Right ➤


```

/*Create a new style for the label*/
static lv_style_t style;
lv_style_copy(&style, &lv_style_plain);
style.text.color = LV_COLOR_BLUE;
style.text.font = &lv_font_dejavu_40; /*Unicode and symbol fonts already assigned by the library*/

lv_obj_t *label;

/*Use ASCII and Unicode letters*/
label = lv_label_create(lv_scr_act(), NULL);
lv_obj_set_pos(label, 20, 20);
lv_label_set_style(label, &style);
lv_label_set_text(label, "aeuoiis\n"
                        "ăéüöïß");

/*Mix text and symbols*/
label = lv_label_create(lv_scr_act(), NULL);
lv_obj_set_pos(label, 20, 100);
lv_label_set_style(label, &style);
lv_label_set_text(label, "Right "SYMBOL_RIGHT);

```

Dibujando

Written for v5.1

In *LittlevGL* you can think in graphical objects and don't care about how the drawing happens. You can set the size, position or any attribute of the object an the library will refresh the old (invalid) areas and redraw the new ones. However, you should know the basic drawing methods to know which one you should choose.

Buffered and unbuffered drawing

Unbuffered drawing

The unbuffered drawing puts the pixels directly to the display (frame buffer). Therefore during the drawing process, some flickering might be visible because firstly the background has to be drawn and then the objects on it. For this reason, this type is not suitable when scrolling, dragging and animations are used. On the other hand, it has the smallest memory footprint because no extra graphics buffer is required.

To use unbuffered drawing set `_LV_VDB_SIZE_` to 0 in `_lv_conf.h_` and register the `_disp_map_` and `_disp_fill_` functions. Here you can learn more about [Porting](#).

Buffered drawing

The buffered drawing is similar to double buffering when two screen sized buffers are used (one for rendering and an other to display the last ready frame). However, LittlevGL's buffered drawing algorithm uses only one frame buffer and a small graphical buffer called Virtual Display Buffer (VDB). For VDB size $\sim 1/10$ screen size is typically enough. For a 320×240 screen with 16-bit colors, it means only 15 kB extra RAM.

With buffered drawing there is no flickering because the image is created firstly in the memory (VDB), therefore scrolling, dragging and animations can be used. In addition, it enables the use of other graphical effects like anti-aliasing, transparency (opacity) and shadows.

To use buffered drawing set `_LV_VDB_SIZE_` to $> LV_HOR_RES$ in `_lv_conf.h_` and register a `_disp_flush_` function.

In buffered mode, you can use **double VDB** to parallely execute rendering into one VDB and copying pixels to your frame buffer from an other. The copy should use DMA or other hardware acceleration to work in the background to let the CPU to do other things. In `_lv_conf.h_` the `_LV_VDB_DOUBLE 1_` enables this feature.

Buffered vs Unbuffered drawing

Keep in mind it's not sure that the unbuffered drawing is faster. During the rendering process, a pixel is overwritten multiple times (e.g. background, button, text are above each other). This way in unbuffered mode the library needs to access the external memory or display controller several times which is slower than writing/reading the internal RAM.

The following table summarizes the differences between the two drawing methods:

	Unbuffered drawing	Buffered drawing
Memory usage	No extra	$> \sim 1/10$ screen
Quality	Flickering	Flawless
Antialiasing	Not supported	Supported
Transparency	Not supported	Supported
Shadows	Not supported	Supported

Anti-aliasing

In `lv_conf.h` you can enable the anti-aliasing with `_LV_ANTIALIAS 1_`. The anti-aliasing is supported only in buffered mode (`LV_VDB_SIZE > LV_HOR_RES`).

The anti-aliasing algorithm puts some translucent pixels (pixels with opacity) to make lines and curves (including corners with radius) smooth and even. Because it only puts some extra pixels anti-aliasing requires only a few extra computational power($\sim 1,1x$ extra time compared to not anti-aliased configuration)

As described in [Font section](#) the fonts can be anti-aliased by using a different font with higher bpp (Bit-Per-Pixel). This way the pixels of a font can be not only 0 or 1 but can be translucent. The supported bpp-s are 1, 2, 4 and 8. Keep in mind a font with higher bpp requires more ROM.

Animaciones

Escrito para v5.1

Puedes cambiar automaticamente el valor (animate) de una variable entre el inicio y el valor final usando una **funcion de animacion** con prototipo `void func(void* var,int32_t value)` . La animacion sucedera llamando periodicamente a la funcion de animacion con el parametro correspondiente.

Para **crear una animacion** debes de inicializar una variable `_lv_anim_t` (hay un template en [lv_anim.h](#)):

```
lv_anim_t a;
a.var = button1;           /*Variable a animar*/
a.start = 100;             /*Valor inicial*/
a.end = 300;               /*Valor final*/
a.fp = (lv_anim_fp_t)lv_obj_set_height; /*Funcion utilizada para la animacion*/
a.path = lv_anim_path_linear; /*Path a la animacion*/
a.end_cb = NULL;           /*Callback cuando la animacion esta lista*/
a.act_time = 0;            /*Asigna < 0 para hacer un delay [ms]*/
a.time = 200;              /*Longitud de la animacion [ms]*/
a.playback = 0;            /*1: tambien anima en direccion inversa cuando la normal esta lista*/
a.playback_pause = 0;      /*Espera antes del playback [ms]*/
a.repeat = 0;              /*1: Repite la animacion (con o sin playback)*/
a.repeat_pause = 0;        /*Espera antes de repetir [ms]*/

lv_anim_create(&a);         /*Inicia la animacion*/
```

`anim_create(&a)` registrara la animacion e inmediatamente **aplica el valor start** independientemente del delay configurado.

Puedes determinar el **path of animation**. En el caso ma simple es lineal, lo cual significa que el valor actual entre *start* y *end* cambia linealmente. Un path es una funcion la cual calcula el siguiente valor a establecer basado en el estado actual de la animacion. Actualmente estan disponibles dos paths:

- **lv_anim_path_linear** animacion lineal
- **lv_anim_path_step** cambia en un paso al final

Por defecto puedes establecer el tiempo de animacion. Pero en algunos casos, la **animation speed** es mas practico. La funcion `lv_anim_speed_to_time(speed, start, end)` calcula el tiempo requerido en misisegundos para alcanzar el valor final desde el valor inicial con la velocidad especificada. La velocidad es interpretada en *unit/sec*. Por ejemplo `lv_anim_speed_to_time(20,0,100)` da como resultado 5000 milisegundos.

Puedes aplicar **multiples animaciones diferentes** en la misma variable al mismo tiempo .(Por ejemplo animar las coordenadas x y y con `_lv_obj_set_x` y `_lv_obj_set_y`). Pero solamente una animacion puede existir con una variable y una funcion dados. Por lo tanto, la funcion `_lv_anim_create()` borrará las animaciones variable-funcion ya existentes.

Puedes **borrar una animacion** con `lv_anim_del(var, func)` proporcionando la variable animada y su funcion de animacion.

Guia de estilo de codigo

Revision 2

File format

Use [lv_misc/lv_tmpl.c](#) and [lv_misc/lv_tmpl.h](#)

Naming conventions

- Words are separated by '_'
- In variable and function names use only lower case letters (e.g. *height_tmp*)
- In enums and defines use only upper case letters (e.g. *MAX_LINE_NUM*)
- Global names (API):
 - starts with *lv*
 - followed by module name: *btn*, *label*, *style* etc.
 - followed by the action (for functions): *set*, *get*, *refr* etc.
 - closed with the subject: *name*, *size*, *state* etc.
- Typedefs
 - prefer `typedef struct` and `typedef enum` instead of `struct name` and `enum name`
 - always end `typedef struct` and `typedef enum` type names with `_t`
- Abbreviations:
 - Use abbreviations on public names only if they become longer than 32 characters
 - Use only very straightforward (e.g. pos: position) or well-established (e.g. pr: press) abbreviations

Coding guide

- Functions:
 - Try to write function shorter than is 50 lines
 - Always shorter than 100 lines (except very straightforward)
- Variables:
 - One line, one declaration (BAD: `char x, y;`)
 - Use `<stdint.h>` (`uint8_t`, `int32_t` etc)
 - Declare variables when needed (not all at function start)
 - Use the smallest required scope
 - Variables in a file (outside functions) are always *static*
 - Do not use global variables (use functions to set/get static variables)

Comments

Before every function have a comment like this:

```
/**
 * Return with the screen of an object
 * @param obj pointer to an object
 * @return pointer to a screen
 */
lv_obj_t * lv_obj_get_scr(lv_obj_t * obj);
```

Always use `/* Something */` format and NOT `//Something`

Write readable code to avoid descriptive comments like: `x++; /* Add 1 to x */`. The code should show clearly what you are doing.

You should write **why** have you done this: `x++; /*Because of closing '\0' of the string */`

Short "code summaries" of a few lines are accepted. E.g. `/*Calculate the new coordinates*/`

In comments use `` when referring to a variable. E.g. `/*Update the value of `x_act`*/`

Formatting

Here is example to show bracket placing and using of white spaces:

```
/**
 * Set a new text for a label. Memory will be allocated to store the text by the label.
 * @param label pointer to a label object
 * @param text '\0' terminated character string. NULL to refresh with the current text.
 */
void lv_label_set_text(lv_obj_t * label, const char * text)
{
    /* Main brackets of functions in new line*/

    if(label == NULL) return; /*No bracket only if the command is inline with the if statement*/

    lv_obj_inval(label);

    lv_label_ext_t * ext = lv_obj_get_ext(label);

    /*Comment before a section */
    if(text == ext->txt || text == NULL) { /*Bracket of statements start inline*/
        lv_label_refr_text(label);
        return;
    }

    ...
}
```

Use 4 spaces indentation instead of tab.

You can use **astyle** to format the code. The required config files are: `docs/astyle_c` and `docs/astyle_h`. To format the source files: `$ find . -type f -name "*.c" | xargs astyle --options=docs/astyle_c`

To format the header files: `$ find . -type f -name "*.h" | xargs astyle --options=docs/astyle_h`

Append `-n` to the end to skip creation of backup file OR use `$ find . -type f -name "*.bak" -delete` (for source file's backups) and `find . -type f -name "*.orig" -delete` (for header file's backups)

Tipos de objetos

Written for v5.1

The following pages contain detailed documentation for each of the objects in the Littlev Graphics Library.

- [Base object \(lv_obj\)](#)
- [Label \(lv_label\)](#)
- [Image \(lv_img\)](#)
- [Line \(lv_line\)](#)
- [Arc \(lv_arc\)](#)
- [Container \(lv_cont\)](#)
- [Page \(lv_page\)](#)
- [Window \(lv_window\)](#)
- [Tab view \(lv_tabview\)](#)
- [Bar \(lv_bar\)](#)
- [Line meter \(lv_lmeter\)](#)
- [Gauge \(lv_gauge\)](#)
- [Chart \(lv_chart\)](#)
- [LED \(lv_led\)](#)
- [Preloader \(lv_preload\)](#)
- [Message box \(lv_mbox\)](#)
- [Text area \(lv_ta\)](#)
- [Calendar \(lv_calendar\)](#)
- [Button \(lv_btn\)](#)
- [Image button \(lv_imgbtn\)](#)
- [Button matrix \(lv_btm\)](#)
- [Keyboard \(lv_kb\)](#)
- [List \(lv_list\)](#)
- [Drop down list \(lv_ddlist\)](#)
- [Roller \(lv_roller\)](#)
- [Check box \(lv_cb\)](#)
- [Switch \(lv_sw\)](#)
- [Slider \(lv_slider\)](#)

Arco (lv_arc)

Escrito para v5.2

Visión general

El objeto Arco **dibuja un arco** dentro de **los ángulos de inicio y fin** y con un **grosor** dado.

Para establecer los ángulos usa la función `lv_arc_set_angles(arc, start_angle, end_angle)`. El grado cero esta en la parte inferior del objeto y los ángulos incrementan en el sentido contrario de las manecillas del reloj. Los ángulos deben estar en el rango [0;360].

Para **configurar e estilo** de un objeto Arco usa `lv_arc_set_style(arc, LV_ARC_STYLE_MAIN, &style)`

Uso de estilos

- **line.rounded** redondea los puntos finales (la opacidad no funciona correctamente se se configura a 1).
- **line.width** el espesor del arco.
- **line.color** el color del arco.

Notas

- El **ancho y alto** del arco deben ser el **mismo**.
- Actualmente, el objeto arco **no soporta anti-aliasing (suavizado)**.

Ejemplo



```
/*Crea un estilo para el arco*/
lv_style_t style;
lv_style_copy(&style, &lv_style_plain);
style.line.color = LV_COLOR_BLUE;           /*Color del arco*/
style.line.width = 8;                       /*Ancho del arco*/

/*Crea un arco*/
lv_obj_t * arc = lv_arc_create(lv_scr_act(), NULL);
lv_arc_set_style(arc, LV_ARC_STYLE_MAIN, &style);           /*Usa el nuevo estilo*/
lv_arc_set_angles(arc, 90, 60);
lv_obj_set_size(arc, 150, 150);
lv_obj_align(arc, NULL, LV_ALIGN_CENTER, 0, 0);

/*Copia el arco previo y establece un ángulos y tamaño diferentes*/
arc = lv_arc_create(lv_scr_act(), arc);
lv_arc_set_angles(arc, 90, 20);
lv_obj_set_size(arc, 125, 125);
lv_obj_align(arc, NULL, LV_ALIGN_CENTER, 0, 0);

/*Copia el arco previo y establece un ángulos y tamaño diferentes*/
arc = lv_arc_create(lv_scr_act(), arc);
lv_arc_set_angles(arc, 90, 310);
lv_obj_set_size(arc, 100, 100);
lv_obj_align(arc, NULL, LV_ALIGN_CENTER, 0, 0);
```

Barra (lv_bar)

Escrito para v5.1

Visión general

Los objetos barra tienen dos partes principales: un **fondo** que es el objeto en sí mismo y un **indicador** cuya forma es similar a la del fondo pero su anchura/altura puede ser ajustada.

La orientación de la barra puede ser **vertical u horizontal** de acuerdo con la relación ancho/alto. Lógicamente en barras horizontales el ancho del indicador y en barras verticales el alto del indicador pueden ser cambiados.

Un **nuevo valor** se puede ajustar con: `lv_bar_set_value(bar, new_value)`. El valor es interpretado en **rango** (valores mínimo y máximo) que pueden ser modificados con: `lv_bar_set_range(bar, min, max)`. El rango por defecto es: 1..100.

La configuración de un nuevo valor puede ocurrir con una **animación** desde el valor actual hasta el valor deseado. En este caso usa `lv_bar_set_value_anim(bar, new_value, anim_time)`.

Uso de estilos

- **fondo** es un [Base object](#) por lo tanto utiliza los elementos de su estilo. Su estilo por defecto es: `LV_STYLE_PRETTY`.
- **indicador** es similar al fondo. Su estilo puede ser configurado con: `lv_bar_set_style_indic(bar, &style_indic)`. Utiliza los elementos de estilo `hpad` y `vpad` para mantener el espacio con el fondo. Su estilo por defecto es: `LV_STYLE_PRETTY_COLOR`.

Notas

- El indicador no es un objeto real, solo es dibujado por la barra.

Ejemplo

Default



Modified




```

/*Crea una barra por defecto*/
lv_obj_t * bar1 = lv_bar_create(lv_scr_act(), NULL);
lv_obj_set_size(bar1, 200, 30);
lv_obj_align(bar1, NULL, LV_ALIGN_IN_TOP_RIGHT, -20, 30);
lv_bar_set_value(bar1, 70);

/*Crea una etiqueta a la derecha de la barra*/
lv_obj_t * bar1_label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(bar1_label, "Default");
lv_obj_align(bar1_label, bar1, LV_ALIGN_OUT_LEFT_MID, -10, 0);

/*Crea estilos para la barra y para el indicador*/
static lv_style_t style_bar;
static lv_style_t style_indic;

lv_style_copy(&style_bar, &lv_style_pretty);
style_bar.body.main_color = LV_COLOR_BLACK;
style_bar.body.grad_color = LV_COLOR_GRAY;
style_bar.body.radius = LV_RADIUS_CIRCLE;
style_bar.body.border.color = LV_COLOR_WHITE;

lv_style_copy(&style_indic, &lv_style_pretty);
style_indic.body.grad_color = LV_COLOR_GREEN;
style_indic.body.main_color = LV_COLOR_LIME;
style_indic.body.radius = LV_RADIUS_CIRCLE;
style_indic.body.shadow.width = 10;
style_indic.body.shadow.color = LV_COLOR_LIME;
style_indic.body.padding.hor = 3; /*Hace al indicador un poco mas chico*/
style_indic.body.padding.ver = 3;

/*Create a second bar*/
lv_obj_t * bar2 = lv_bar_create(lv_scr_act(), bar1);
lv_bar_set_style(bar2, LV_BAR_STYLE_BG, &style_bar);
lv_bar_set_style(bar2, LV_BAR_STYLE_INDIC, &style_indic);
lv_obj_align(bar2, bar1, LV_ALIGN_OUT_BOTTOM_MID, 0, 30); /*Alinea abajo de 'bar1'*/

/*Crea una segunda etiqueta*/
lv_obj_t * bar2_label = lv_label_create(lv_scr_act(), bar1_label);
lv_label_set_text(bar2_label, "Modified");
lv_obj_align(bar2_label, bar2, LV_ALIGN_OUT_LEFT_MID, -10, 0);

```

Objeto base (lv_obj)

Written for v5.1

Overview

The Base Object contains the **most basic attributes** of the objects:


- Coordinates
- Parent object
- Children
- Style
- Attributes like Click enable, Drag enable etc.

You can set the **x and y coordinates** relative to the parent with `lv_obj_set_x(obj, new_x)` and `lv_obj_set_y(obj, new_y)` or in one function with `lv_obj_set_pos(obj, new_x, new_y)`.

The **object size** can be modified with `lv_obj_set_width(obj, new_width)` and `lv_obj_set_height(obj, new_height)` or in one function with `lv_obj_set_size(obj, new_width, new_height)`.

You can **align** the object to an other with `lv_obj_align(obj1, obj2, LV_ALIGN_TYPE, x_shift, y_shift)`. The last two argument means an x and y shift after the alignment. The second argument is another object on which to align the first (`NULL` means: align to the parent). The third

argument is the type of alignment:

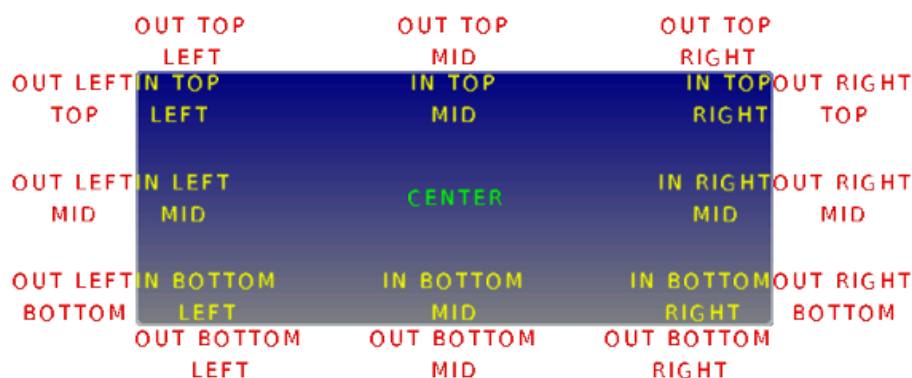

The alignment types build like: `LV_ALIGN_OUT_TOP_MID`. For example to align a text below an image: `lv_obj_align(text, image, LV_ALIGN_OUT_BOTTOM_MID, 0, 10)`. Or to align a text in the middle of its parent: `lv_obj_align(text, NULL, LV_ALIGN_CENTER, 0, 0)`.

You can set a **new parent** for an object with `lv_obj_set_parent(obj, new_parent)`.

To get the children of an object use `lv_obj_get_child(obj, child_prev)` (from last to first) or `lv_obj_get_child_back(obj, child_prev)` (from first to last). To get the first child pass `NULL` as the second parameter and then the previous child (return value). The function will return with `NULL` when there are no more children.

When you have created a **screen** like `lv_obj_create(NULL, NULL)` you can **load** it with `lv_scr_load(screen1)`. The `lv_scr_act()` function gives you a pointer to the **current screen**.

There are **two layers** automatically generated layers:

- top layer
- system layer

They are independent of the screens so objects created an that layers will be shown on every screen. The *top layer* is above every object on the screen and *system layer* is above top layer too. You can add any pop-up windows *top layer* freely. But the *system layer* restricted to system level things (e.g. mouse cursor will be moved here). The `lv_layer_top()` and `lv_layer_sys()` functions gives a pointer to the top or system layer.

You can set a **new style** for an object with the `lv_obj_set_style(obj, &new_style)` function. If `NULL` is set as style then the object will inherit its parent's style. If you **modify a style** you have to **notify the objects** who are using the modified styled. You can use either `lv_obj_refresh_style(obj)` or to notify all object with a given style `lv_obj_report_style_mod(&style)`. Set `_lv_obj_report_style_mod_'s`

parameter to `NULL` to notify all objects.

There are some attributes which can be enabled/disabled by `lv_obj_set_... (obj, true/false)` :

- **hidden** Hide the object. It will not be drawn and won't occupy space, Its children will be hidden too.
- **click** Enabled to click the object via an input device (e.g. touch pad). If disabled then object behind this one will be checked during the input device click handling (useful with typically not clickable objects like Labels)
- **top** If enabled then when this object or any of its children is clicked then this object comes to the foreground.
- **drag** Enable dragging (moving by an input device)
- **drag_throw** Enable "throwing" with dragging like the object would have momentum
- **drag_parent** If enabled then the object's parent will be moved during dragging.

There are some specific actions which happen automatically in the library. To prevent one or more that kind of actions you can **protect the object** against them. The following protections exists:

- **LV_PROTECT_NONE** No protection
- **LV_PROTECT_POS** Prevent automatic positioning (e.g. Layout in [lv_cont](#))
- **LV_PROTECT_FOLLOW** Prevent the object be followed in automatic ordering (e.g. Layout in [lv_cont](#))
- **LV_PROTECT_PARENT** Prevent automatic parent change
- **LV_PROTECT_CHILD_CHG** Disable the child change signal. Used by the library

The `lv_obj_set/clear_protect (obj, LV_PROTECT_...)` sets/clears the protection. You can use 'OR'ed values of protection types too.

There are **built-in animations** for the objects. The following animation types exist:

- **LV_ANIM_FLOAT_TOP** Float from/to the top
- **LV_ANIM_FLOAT_LEFT** Float from/to the left
- **LV_ANIM_FLOAT_BOTTOM** Float from/to the bottom
- **LV_ANIM_FLOAT_RIGHT** Float from/to the right
- **LV_ANIM_GROW_H** Grow/shrink horizontally
- **LV_ANIM_GROW_V** Grow/shrink vertically

The `lv_obj_animate (obj, anim_type, time, delay, callback)` applies an animation on *obj*. To determinate the direction of the animation `_OR_` `_ANIM_IN_` or `_ANIM_OUT_` with the animation type. The default is `_ANIM_IN_` if not specified. You can learn more about the [animations](#).

Style usage

All *style.body* properties are used. Default for screens `_lv_style_plain_` and `_lv_style_plain_color_` for normal objects

Example



```

/*Create a simple base object*/
lv_obj_t * obj1;
obj1 = lv_obj_create(lv_scr_act(), NULL);
lv_obj_set_size(obj1, 150, 40);
lv_obj_set_style(obj1, &lv_style_plain_color);
lv_obj_align(obj1, NULL, LV_ALIGN_IN_TOP_MID, 0, 40);

/*Copy the previous object and enable drag*/
lv_obj_t * obj2;
obj2 = lv_obj_create(lv_scr_act(), obj1);
lv_obj_set_style(obj2, &lv_style_pretty_color);
lv_obj_set_drag(obj2, true);
lv_obj_align(obj2, NULL, LV_ALIGN_CENTER, 0, 0);

static lv_style_t style_shadow;
lv_style_copy(&style_shadow, &lv_style_pretty);
style_shadow.body.shadow.width = 6;
style_shadow.body.radius = LV_RADIUS_CIRCLE;

/*Copy the previous object (drag is already enabled)*/
lv_obj_t * obj3;
obj3 = lv_obj_create(lv_scr_act(), obj2);
lv_obj_set_style(obj3, &style_shadow);
lv_obj_align(obj3, NULL, LV_ALIGN_IN_BOTTOM_MID, 0, -40);

```

Boton (lv_btn)

Escrito para v5.1, revision 2

Visión general

Los botones pueden reaccionar a **presion**, **liberación** o **presiones largas** del usuario via funciones de callback (`lv_action_t` punteros a funciones). Puedes establecer las funciones de callback con: `lv_btn_set_action(btn, ACTION_TYPE, callback_func)` . Los tipos de acciones posibles son:

- `LV_BTN_ACTION_CLICK`: El botón es liberado después de ser presionado (click) o, cuando usando keypad, después de que la tecla `LV_GROUP_KEY_ENTER` es liberada.
- `LV_BTN_ACTION_PR`: El botón es presionado.
- `LV_BTN_ACTION_LONG_PR`: El botón tiene una presion larga.
- `LV_BTN_ACTION_LONG_PR_REPEAT`: El botón tuvo una presión larga y esta acción es llamada periodicamente.

Los botones pueden tener uno de los **cinco posibles estados**:

- `LV_BTN_STATE_REL` Estado sin presionar
- `LV_BTN_STATE_PR` Estado presionado
- `LV_BTN_STATE_TGL_REL` Estado toggleado sin presionar (Estado On)
- `LV_BTN_STATE_TGL_PR` Estado toggleado presionado (Estado presionado On)
- `LV_BTN_STATE_INA` Estado inactivo

Los botones pueden ser configurados como **botón toggleado** con `lv_btn_set_toggle(btn, true)` . En este caso cuando se libera, el botón va al estado toggleado sin presionar.

Puedes establecer el estado del botón manualmente con: `lv_btn_set_state(btn, LV_BTN_STATE_TGL_REL)` .

El botón puede ir a **estado inactivo** solo manualmente (con `_lv_btn_set_state()`). En el estado inactivo, ninguna de las acciones sera llamada.

Similar a [Contenedores](#) los botones también pueden tener **layout** y **auto fit**:

- `lv_btn_set_layout(btn, LV_LAYOUT_...)` establece un layout. El layout por defecto es `LV_LAYOUT_CENTER`. Por lo tanto si agregas una etiqueta sera automaticamente alineada a la mitad.
- `lv_btn_set_fit(btn, hor_en, ver_en)` habilita el poder establecer el ancho y/o el alto automaticamente de acuerdo al hijo.

Uso de estilos

Un botón puede tener 5 estilos independiente para sus 5 estados. Puedes establecerlos via: `lv_btn_set_style(btn, LV_BTN_STYLE_..., &style)` . Los estilos usan las propiedades `style.body`.


- `LV_BTN_STYLE_REL` Estilo del estado sin presionar. Default: `_lv_style_btn_rel_`
- `LV_BTN_STYLE_PR` Estilo del estado presionado. Default: `_lv_style_btn_pr_`
- `LV_BTN_STYLE_TGL_REL` Estilo del estado toggleado sin presionar. Default: `_lv_style_btn_tgl_rel_`
- `LV_BTN_STYLE_TGL_PR` Estilo del estado toggleado presionado. Default: `_lv_style_btn_tgl_pr_`
- `LV_BTN_STYLE_INA` Estilo del estado inactivo. Default: `_lv_style_btn_ina_`

Notas

- Si un botón se arrastra, sus acciones de click y presion larga no serán llamadas.
- Si un botón fue presionado por largo tiempo y su acción de presion larga fue establecida entonces su acción de click no será llamada.

Ejemplo

Default buttons

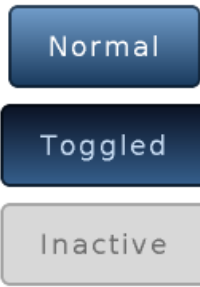

```
static lv_res_t btn_click_action(lv_obj_t * btn)
{
    uint8_t id = lv_obj_get_free_num(btn);

    printf("Button %d is released\n", id);

    /* Se soltó el botón.
     * Haz algo aquí */

    return LV_RES_OK; /*Retorna OK si el botón no se borro*/
}

/*Crea una etiqueta de título*/
lv_obj_t * label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label, "Default buttons");
lv_obj_align(label, NULL, LV_ALIGN_IN_TOP_MID, 0, 5);

/*Crea un botón normal*/
lv_obj_t * btn1 = lv_btn_create(lv_scr_act(), NULL);
lv_cont_set_fit(btn1, true, true); /*Habilita el redimensionamiento horizontal y vertical*/
lv_obj_align(btn1, label, LV_ALIGN_OUT_BOTTOM_MID, 0, 10);
lv_obj_set_free_num(btn1, 1); /*Establece un número unico para el botón*/
lv_btn_set_action(btn1, LV_BTN_ACTION_CLICK, btn_click_action);

/*Agrega una etiqueta al botón*/
label = lv_label_create(btn1, NULL);
lv_label_set_text(label, "Normal");

/*Copia el botón y establece el estado toggle. (La acción de release también es copiada)*/
lv_obj_t * btn2 = lv_btn_create(lv_scr_act(), btn1);
lv_obj_align(btn2, btn1, LV_ALIGN_OUT_BOTTOM_MID, 0, 10);
lv_btn_set_state(btn2, LV_BTN_STATE_TGL_REL); /*Establece el estado toggleado*/
lv_obj_set_free_num(btn2, 2); /*Establece un número unico para el botón*/

/*Agrega una etiqueta al botón toggleado*/
label = lv_label_create(btn2, NULL);
lv_label_set_text(label, "Toggled");

/*Copia el botón y establece el estado inactivo.*/
lv_obj_t * btn3 = lv_btn_create(lv_scr_act(), btn1);
lv_obj_align(btn3, btn2, LV_ALIGN_OUT_BOTTOM_MID, 0, 10);
lv_btn_set_state(btn3, LV_BTN_STATE_INA); /*Establece el estado inactivo*/
lv_obj_set_free_num(btn3, 3); /*Establece un número unico para el botón*/

/*Agrega una etiqueta al botón inactivo*/
label = lv_label_create(btn3, NULL);
lv_label_set_text(label, "Inactive");
```

Matriz de botones (lv_btnm)

Escrito para v5.1

Visión general

Los objetos Matriz de botones pueden mostrar **múltiples botones** acorde a un arreglo de cadenas descriptor, llamado *map*. Puedes especificar el map con `lv_btnm_set_map(btnm, my_map)`.

La **declaración de un map** se ve como `const char * map[] = {"btn1", "btn2", "btn3", ""}`. Notar que el **último elemento tiene que ser una cadena vacía**!

El primer carácter de una cadena puede ser un **carácter de control** para especificar algunos atributos:

- **bit 7..6** Siempre *0b10* para diferenciar el byte de control de los caracteres de texto.
- **bit 5** Botón inactivo.
- **bit 4** Botón oculto.
- **bit 3** Botón sin presion larga.
- **bit 2..0** Anchura relativa comparada con los botones de la misma fila. [1..7]

Es recomendado especificar el **byte de control como un numero octal**. Por ejemplo `"\213button"`. El número octal siempre inicia con `_2_` (bit 7..6) la parte de en medio son los atributos (bit 5..3) y la última parte es el ancho (bit 2..0). Por lo tanto el ejemplo describe un botón de 3 unidades de ancho y oculto.

Usa `"\n"` en el mapa para hacer un **salto de línea**: `{"btn1", "btn2", "\n", "btn3", ""}`. El ancho de los botones es re calculado en cada línea.

La función `lv_btnm_set_action(btnm, btnm_action)` especifica una acción a llamar cuando se deja de presionar un botón.

Puedes habilitar el **botón para que togglee** cuando son presionados. Solo puede haber un boton toggleado al mismo tiempo. La función `lv_btnm_set_toggle(btnm, true, id)` habilita el toggleo y especifica el `_id_` th botón al estado toggleado.

Uso de estilos

La matriz de botones trabaja con 6 estilos: un fondo y 5 estilos de botones para cada uno de sus estados. Puedes establecer los estilos con `lv_btnm_set_style(btn, LV_BTNM_STYLE_..., &style)`. El fondo y los botones usan las propiedades *style.body*. Las etiquetas usan las propiedades *style.text* de los estilos de los botones.

- **LV_BTNM_STYLE_BG** Estilo del fondo. Usa todas las propiedades de *style.body* incluyendo *padding* Default: `_lv_style_pretty_`
- **LV_BTNM_STYLE_BTN_REL** Estilo de los botones sin presionar. Default: `_lv_style_btn_rel_`
- **LV_BTNM_STYLE_BTN_PR** Estilo de los botones presionados. Default: `_lv_style_btn_pr_`
- **LV_BTNM_STYLE_BTN_TGL_REL** Estilo de los botones toggleados sin presionar. Default: `_lv_style_btn_tgl_rel_`
- **LV_BTNM_STYLE_BTN_TGL_PR** Estilo de los botones toggleados presionados. Default: `_lv_style_btn_tgl_pr_`
- **LV_BTNM_STYLE_BTN_INA** Estilo de los botones inactivos. Default: `_lv_style_btn_ina_`

Notas

- La matriz de botones es **muy ligero**. Crea solo un objeto base de fondo y dibuja los botones en el en lugar de crear muchos botones reales.

Ejemplo



```

/*Llamada cuando se deja de presionar un botón o cuando tiene una presion larga*/
static lv_res_t btnm_action(lv_obj_t * btnm, const char *txt)
{
    printf("Button: %s released\n", txt);

    return LV_RES_OK; /*Retorna OK porque la matriz de botones no se borro*/
}

.
.
.

/*Crea un arreglo de cadenas que describen la matriz*/
static const char * btnm_map[] = {"1", "2", "3", "4", "5", "\n",
                                   "6", "7", "8", "9", "0", "\n",
                                   "\202Action1", "Action2", ""};

/*Crea una matriz de botones por default*/
lv_obj_t * btnm1 = lv_btnm_create(lv_scr_act(), NULL);
lv_btnm_set_map(btnm1, btnm_map);
lv_btnm_set_action(btnm1, btnm_action);
lv_obj_set_size(btnm1, LV_HOR_RES, LV_VER_RES / 2);

/*Crea un nuevo estilo para el fondo de la matriz de botones*/
static lv_style_t style_bg;
lv_style_copy(&style_bg, &lv_style_plain);
style_bg.body.main_color = LV_COLOR_SILVER;
style_bg.body.grad_color = LV_COLOR_SILVER;
style_bg.body.padding.hor = 0;
style_bg.body.padding.ver = 0;
style_bg.body.padding.inner = 0;

/*Crea 2 estilos de botones*/
static lv_style_t style_btn_rel;
static lv_style_t style_btn_pr;
lv_style_copy(&style_btn_rel, &lv_style_btn_rel);
style_btn_rel.body.main_color = LV_COLOR_MAKE(0x30, 0x30, 0x30);
style_btn_rel.body.grad_color = LV_COLOR_BLACK;
style_btn_rel.body.border.color = LV_COLOR_SILVER;
style_btn_rel.body.border.width = 1;
style_btn_rel.body.border.opa = LV_OPA_50;
style_btn_rel.body.radius = 0;

lv_style_copy(&style_btn_pr, &style_btn_rel);
style_btn_pr.body.main_color = LV_COLOR_MAKE(0x55, 0x96, 0xd8);
style_btn_pr.body.grad_color = LV_COLOR_MAKE(0x37, 0x62, 0x90);
style_btn_pr.text.color = LV_COLOR_MAKE(0xbb, 0xd5, 0xf1);

/*Crea una segunda matriz de botones con los nuevos estilos*/
lv_obj_t * btnm2 = lv_btnm_create(lv_scr_act(), btnm1);
lv_btnm_set_style(btnm2, LV_BTNM_STYLE_BG, &style_bg);
lv_btnm_set_style(btnm2, LV_BTNM_STYLE_BTN_REL, &style_btn_rel);
lv_btnm_set_style(btnm2, LV_BTNM_STYLE_BTN_PR, &style_btn_pr);
lv_obj_align(btnm2, btnm1, LV_ALIGN_OUT_BOTTOM_MID, 0, 0);

```


Calendario (lv_calendar)

Written for v5.2

Overview

The Calendar object is a classic calendar which can:

- highlight the current day and week
- highlight any user-defined dates
- display the name of the days
- go the next/previous month by button click

The set and get dates in the calendar the `lv_calendar_date_t` type is used which is a structure with `year`, `month` and `day` fields.

To set the **current date** use the `lv_calendar_set_today_date(calendar, &today_date)` function.

To set the **shown date** use `lv_calendar_set_shown_date(calendar, &shown_date);`

The list of **highlighted dates** should be stired in a `lv_calendar_date_t` array and passed this array can be passed to `lv_calendar_set_hoghlighted_dates(calendar, &highlighted_dates)`.

Only the arrays pointer will be saved so the array should be a static or global variable.

The **name of the days** can be adjusted with `lv_calendar_set_day_names(calendar, day_names)` where `day_names` looks like `const char * day_names[7] = {"Su", "Mo", ...};`

Aaction to select a date will be supported in `v5.3` and now available in the `dev-5.3` branch for experimental usage.

Style usage

- **LV_CALENDAR_STYLE_BG** Style of the background using the `body` properties and the style of the data numbers using the `text` properties.
- **LV_CALENDAR_STYLE_HEADER** Style of the header where the current year and month is displayed. `body` and `text` properties are used.
- **LV_CALENDAR_STYLE_HEADER_PR** Pressed header style, used when the next/prev. month button is being pressed. `text` properties are used by the arrows.
- **LV_CALENDAR_STYLE_DAY_NAMES** Style of the day names. `text` properties are used by the day texts and `body.padding.ver` determines the space above the day names.
- **LV_CALENDAR_STYLE_HIGHLIGHTED_DAYS** `text` properties are used to adjust the style of the highlights days
- **LV_CALENDAR_STYLE_INACTIVE_DAYS** `text` properties are used to adjust the style of the visible days of previous/next month.
- **LV_CALENDAR_STYLE_WEEK_BOX** `body` properties are used to set the style of the week box
- **LV_CALENDAR_STYLE_TODAY_BOX** `body` and `text` properties are used to set the style of the today box

Example



```

/*Create a Calendar object*/
lv_obj_t * calendar = lv_calendar_create(lv_scr_act(), NULL);
lv_obj_set_size(calendar, 240, 220);
lv_obj_align(calendar, NULL, LV_ALIGN_CENTER, 0, 0);

/*Create a style for the current week*/
static lv_style_t style_week_box;
lv_style_copy(&style_week_box, &lv_style_plain);
style_week_box.body.border.width = 1;
style_week_box.body.border.color = LV_COLOR_HEX3(0x333);
style_week_box.body.empty = 1;
style_week_box.body.radius = LV_RADIUS_CIRCLE;
style_week_box.body.padding.ver = 3;
style_week_box.body.padding.hor = 3;

/*Create a style for today*/
static lv_style_t style_today_box;
lv_style_copy(&style_today_box, &lv_style_plain);
style_today_box.body.border.width = 2;
style_today_box.body.border.color = LV_COLOR_NAVY;
style_today_box.body.empty = 1;
style_today_box.body.radius = LV_RADIUS_CIRCLE;
style_today_box.body.padding.ver = 3;
style_today_box.body.padding.hor = 3;
style_today_box.text.color= LV_COLOR_BLUE;

/*Create a style for the highlighted days*/
static lv_style_t style_highlighted_day;
lv_style_copy(&style_highlighted_day, &lv_style_plain);
style_highlighted_day.body.border.width = 2;
style_highlighted_day.body.border.color = LV_COLOR_NAVY;
style_highlighted_day.body.empty = 1;
style_highlighted_day.body.radius = LV_RADIUS_CIRCLE;
style_highlighted_day.body.padding.ver = 3;
style_highlighted_day.body.padding.hor = 3;
style_highlighted_day.text.color= LV_COLOR_BLUE;

/*Apply the styles*/
lv_calendar_set_style(calendar, LV_CALENDAR_STYLE_WEEK_BOX, &style_week_box);
lv_calendar_set_style(calendar, LV_CALENDAR_STYLE_TODAY_BOX, &style_today_box);
lv_calendar_set_style(calendar, LV_CALENDAR_STYLE_HIGHLIGHTED_DAYS, &style_highlighted_day);

/*Set the today*/
lv_calendar_date_t today;
today.year = 2018;
today.month = 10;
today.day = 23;

lv_calendar_set_today_date(calendar, &today);
lv_calendar_set_showed_date(calendar, &today);

/*Highlight some days*/
static lv_calendar_date_t highlihted_days[3];          /*Only it's pointer will be saved so should be static*/
highlihted_days[0].year = 2018;
highlihted_days[0].month = 10;
highlihted_days[0].day = 6;

highlihted_days[1].year = 2018;
highlihted_days[1].month = 10;
highlihted_days[1].day = 11;

highlihted_days[2].year = 2018;
highlihted_days[2].month = 11;
highlihted_days[2].day = 22;

lv_calendar_set_highlighted_dates(calendar, highlihted_days, 3);

```

Grafica (lv_chart)

Written for v5.1

Overview

Charts have a rectangle-like background with horizontal and vertical division lines. You can add any number of **series** to the charts by `lv_chart_add_series(chart, color)`. It allocates data for a `lv_chart_series_t` structure which contains the chosen *color* and an array for the data.

You have several options to set the data of series:

1. Set the values manually in the array like `ser1->points[3] = 7` and refresh the chart with `lv_chart_refresh(chart)`.
2. Use the `lv_chart_set_next(chart, ser, value)` function to shift all data to left and set a new data on the most right position.
3. Initialize all points to a given value with: `lv_chart_init_points(chart, ser, value)`.
4. Set all points from an array with: `lv_chart_set_points(chart, ser, value_array)`.

There are four **data display types**:

- LV_CHART_TYPE_NONE: do not display the points. It can be used if you would like to add your own draw method.
- LV_CHART_TYPE_LINE: draw lines between the points
- LV_CHART_TYPE_COL: Draw columns
- LV_CHART_TYPE_POINT: Draw points

You can specify the display type with `lv_chart_set_type(chart, TYPE)`. The `LV_CHART_TYPE_LINE | LV_CHART_TYPE_POINT` type is also valid to draw both lines and points.

You can specify a the **min. and max. values in y** directions with `lv_chart_set_range(chart, y_min, y_max)`. The value of the points will be scaled proportionally. The default range is: 0..100.

The **number of points** in the data lines can be modified by `lv_chart_set_point_count(chart, point_num)`. The default value is 10.

The **number of horizontal and vertical division lines** can be modified by `lv_chart_set_div_line_count(chart, hdiv_num, vdiv_num)`. The default settings are 3 horizontal and 5 vertical division lines.

To set the **line width** and **point radius** use the `lv_chart_set_series_width(chart, size)` function. The default value is: 2.

The **opacity of the data lines* can be specified by `lv_chart_set_series_opa(chart, opa)`. The default value is: OPA_COVER.


You can apply a **dark color fade** on the bottom of columns and points by `lv_chart_set_series_darking(chart, effect)` function. The default dark level is OPA_50.

Style usage

- **style.body** properties set the background's appearance
- **style.line** properties set the division lines' appearance

The series related parameters can be set directly for each chart with `lv_chart_set_series_width()`, `lv_chart_set_series_opa()` and `lv_chart_set_series_dark()`.

Example



```

/*Create a style for the chart*/
static lv_style_t style;
lv_style_copy(&style, &lv_style_pretty);
style.body.shadow.width = 6;
style.body.shadow.color = LV_COLOR_GRAY;
style.line.color = LV_COLOR_GRAY;

/*Create a chart*/
lv_obj_t * chart;
chart = lv_chart_create(lv_scr_act(), NULL);
lv_obj_set_size(chart, 200, 150);
lv_obj_set_style(chart, &style);
lv_obj_align(chart, NULL, LV_ALIGN_CENTER, 0, 0);
lv_chart_set_type(chart, LV_CHART_TYPE_POINT | LV_CHART_TYPE_LINE); /*Show lines and points too*/
lv_chart_set_series_opa(chart, LV_OPA_70); /*Opacity of the data series*/
lv_chart_set_series_width(chart, 4); /*Line width and point radius*/

lv_chart_set_range(chart, 0, 100);

/*Add two data series*/
lv_chart_series_t * ser1 = lv_chart_add_series(chart, LV_COLOR_RED);
lv_chart_series_t * ser2 = lv_chart_add_series(chart, LV_COLOR_GREEN);

/*Set the next points on 'dl1'*/
lv_chart_set_next(chart, ser1, 10);
lv_chart_set_next(chart, ser1, 50);
lv_chart_set_next(chart, ser1, 70);
lv_chart_set_next(chart, ser1, 90);

/*Directly set points on 'dl2'*/
ser2->points[0] = 90;
ser2->points[1] = 70;
ser2->points[2] = 65;
ser2->points[3] = 65;
ser2->points[4] = 65;
ser2->points[5] = 65;

lv_chart_refresh(chart); /*Required after direct set*/

```

Check box (lv_cb)

Overview

The Check Box objects are built from a Button **background** which contains an also Button **bullet** and a **label** to realize a classical check box. The **text** can be modified by the `lv_cb_set_text(cb, "New text")` function.

An **action** can assigned by `lv_cb_set_action(cb, action)`.

You can manually **check** / **un-check** the Check box via `lv_cb_set_checked(cb, state)`.

Style usage

The Check box styles can be modified with `lv_cb_set_style(cb, LV_CB_STYLE_..., &style)`.

- **LV_CB_STYLE_BG** Background style. Uses all *style.body* properties. The label's style comes from *style.text*. Default: `_lv_style_transp_`
- **LV_CB_STYLE_BOX_REL** Style of the released box. Uses the *style.body* properties. Default: `_lv_style_btn_rel_`
- **LV_CB_STYLE_BOX_PR** Style of the pressed box. Uses the *style.body* properties. Default: `_lv_style_btn_pr_`
- **LV_CB_STYLE_BOX_TGL_REL** Style of the checked released box. Uses the *style.body* properties. Default: `_lv_style_btn_tgl_rel_`
- **LV_CB_STYLE_BOX_TGL_PR** Style of the checked released box. Uses the *style.body* properties. Default: `_lv_style_btn_tgl_pr_`

Example



```

static lv_res_t cb_release_action(lv_obj_t * cb)
{
    /*A check box is clicked*/
    printf("%s state: %d\n", lv_cb_get_text(cb), lv_cb_is_checked(cb));

    return LV_RES_OK;
}

.
.
.

/*****
 * Create a container for the check boxes
 *****/

/*Create border style*/
static lv_style_t style_border;
lv_style_copy(&style_border, &lv_style_pretty_color);
style_border.glass = 1;
style_border.body.empty = 1;

/*Create a container*/
lv_obj_t * cont;
cont = lv_cont_create(lv_scr_act(), NULL);
lv_cont_set_layout(cont, LV_LAYOUT_COL_L);          /*Arrange the children in a column*/
lv_cont_set_fit(cont, true, true);                  /*Fit the size to the content*/
lv_obj_set_style(cont, &style_border);

/*****
 * Create check boxes
 *****/

/*Create check box*/
lv_obj_t * cb;
cb = lv_cb_create(cont, NULL);
lv_cb_set_text(cb, "Potato");
lv_cb_set_action(cb, cb_release_action);

/*Copy the previous check box*/
cb = lv_cb_create(cont, cb);
lv_cb_set_text(cb, "Onion");

/*Copy the previous check box*/
cb = lv_cb_create(cont, cb);
lv_cb_set_text(cb, "Carrot");

/*Copy the previous check box*/
cb = lv_cb_create(cont, cb);
lv_cb_set_text(cb, "Salad");

/*Align the container to the middle*/
lv_obj_align(cont, NULL, LV_ALIGN_CENTER, 0, 0);

```

Container (lv_cont)

Written for v5.1

Overview

The containers are **rectangle-like object** with some special features.

You can apply a **layout** on the containers to automatically order their children. The layout spacing comes from `style.body.padding.hor/ver/inner` properties. The possible layout options:

- `LV_LAYOUT_OFF`: Do not align the children
- `LV_LAYOUT_CENTER`: Align children to the center in column and keep *pad.inner* space between them
- `LV_LAYOUT_COL_L`: Align children in a left justified column. Keep *pad.hor* space on the left, *pad.ver* space on the top and *pad.inner* space between the children.
- `LV_LAYOUT_COL_M`: Align children in centered column. Keep *pad.ver* space on the top and *pad.inner* space between the children.
- `LV_LAYOUT_COL_R`: Align children in a right justified column. Keep *pad.hor* space on the right, *pad.ver* space on the top and *pad.inner* space between the children.
- `LV_LAYOUT_ROW_T`: Align children in a top justified row. Keep *pad.hor* space on the left, *pad.ver* space on the top and *pad.inner* space between the children.
- `LV_LAYOUT_ROW_M`: Align children in centered row. Keep *pad.hor* space on the left and *pad.inner* space between the children.
- `LV_LAYOUT_ROW_B`: Align children in a bottom justified row. Keep *pad.hor* space on the left, *pad.ver* space on the bottom and *pad.inner* space between the children.
- `LV_LAYOUT_PRETTY`: Put as may objects as possible in a row (with at least *pad.inner* space and *pad.hor* space on the sides) and begin a new row. Divide the space in each line equally between the children. Keep *pad.ver* space on the top and *pad.inner* space between the lines.
- `LV_LAYOUT_GRID`: Similar to PRETTY LAYOUT but not divide horizontal space equally just let *pad.hor* space

You can enable an **auto fit** feature which automatically set the container size to include all children. It will keep *pad.hor* space on the left and right and *pad.ver* space on the top and bottom. The auto fit can be enable horizontally, vertically or in both direction with `lv_cont_set_fit(cont, true, true)` function. The second parameter is the horizontal, the third parameter is the vertical fit enable.


Style usage

- `style.body` properties are used.

Notes

- You **can't set the child position with hor/ver fit enabled**. Let's imagine what happens. If you change the position of the only child when fit is enabled the the container will move/fit "around" the new position. If you have more objects on a container then you can align them relative to each other. As a workaround you can create a small transparent object on the container. It will fix the container to not "follow" the children.

Example

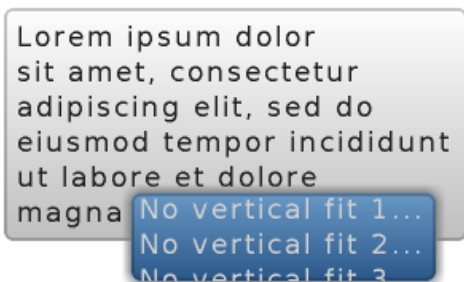

```

lv_obj_t * box1;
box1 = lv_cont_create(lv_scr_act(), NULL);
lv_obj_set_style(box1, &lv_style_pretty);
lv_cont_set_fit(box1, true, true);

/*Add a text to the container*/
lv_obj_t * txt = lv_label_create(box1, NULL);
lv_label_set_text(txt, "Lorem ipsum dolor\n"
    "sit amet, consectetur\n"
    "adipiscing elit, sed do\n"
    "eiusmod tempor incididunt\n"
    "ut labore et dolore\n"
    "magna aliqua.");

lv_obj_align(box1, NULL, LV_ALIGN_IN_TOP_LEFT, 10, 10);    /*Align the container*/

/*Create a style*/
static lv_style_t style;
lv_style_copy(&style, &lv_style_pretty_color);
style.body.shadow.width = 6;
style.body.padding.hor = 5;                                /*Set a great horizontal padding*/

/*Create an other container*/
lv_obj_t * box2;
box2 = lv_cont_create(lv_scr_act(), NULL);
lv_obj_set_style(box2, &style);    /*Set the new style*/
lv_cont_set_fit(box2, true, false); /*Do not enable the vertical fit */
lv_obj_set_height(box2, 55);        /*Set a fix height*/

/*Add a text to the new container*/
lv_obj_t * txt2 = lv_label_create(box2, NULL);
lv_label_set_text(txt2, "No vertical fit 1...\n"
    "No vertical fit 2...\n"
    "No vertical fit 3...\n"
    "No vertical fit 4...");

/*Align the container to the bottom of the previous*/
lv_obj_align(box2, box1, LV_ALIGN_OUT_BOTTOM_MID, 30, -30);

```


Drop down list (lv_ddlist)

Written for v5.3, revision 2

Overview

Drop Down Lists allow you to simply **select one option from more**. The Drop Down List is closed by default and show the currently selected text. If you click on it the this list opens and all the options are shown.

The **options** are passed to the Drop Down List as a **string** with `lv_ddlist_set_options(ddlist, options)`. The options should be separated by `\n`. For example: `"First\nSecond\nThird"`.

You can **select an option manually** with `lv_ddlist_set_selected(ddlist, id)`, where `_id_` is the index of an option.

A **callback function** can be specified with `lv_ddlist_set_action(ddlist, my_action)` to call when a new option is selected.

By default the list's **height** is adjusted automatically to show all options. The `lv_ddlist_set_fix_height(ddlist, h)` sets a fixed height for the opened list.

The **width** is also adjusted automatically. To prevent this apply `lv_ddlist_set_hor_fit(ddlist, false)` and set the width manually by `lv_obj_set_width(ddlist, width)`.

Similarly to [Page](#) with fix height the Drop Down List supports various **scrollbar display modes**. It can be set by `lv_ddlist_set_sb_mode(ddlist, LV_SB_MODE_...)`.

The Drop Down List open/close animation time is adjusted by `lv_ddlist_set_anim_time(ddlist, anim_time)`. Zero animation time means no animation.

New in v5.3 is the ability to enable an arrow on the side of the drop down list. To use this feature you can call `lv_ddlist_set_draw_arrow(ddlist, true)`.

Style usage

The `lv_ddlist_set_style(ddlist, LV_DDLIST_STYLE_..., &style)` set the styles of a Drop Down List.

- **LV_DDLIST_STYLE_BG** Style of the background. All *style.body* properties are used. It is used for the label's style from *style.text*. Default: `_lv_style_pretty_`
- **LV_DDLIST_STYLE_SEL** Style of the selected option. The *style.body* properties are used. The selected option will be recolored with *text.color*. Default: `_lv_style_plain_color_`
- **LV_DDLIST_STYLE_SB** Style of the scrollbar. The *style.body* properties are used. Default: `_lv_style_plain_color_`

Example



```

static lv_res_t ddlist_action(lv_obj_t * ddlist)
{
    uint8_t id = lv_obj_get_free_num(ddlist);

    char sel_str[32];
    lv_ddlist_get_selected_str(ddlist, sel_str);
    printf("Ddlist %d new option: %s \n", id, sel_str);

    return LV_RES_OK; /*Return OK if the drop down list is not deleted*/
}

.
.
.

/*Create a drop down list*/
lv_obj_t * ddl1 = lv_ddlist_create(lv_scr_act(), NULL);
lv_ddlist_set_options(ddl1, "Apple\n"
                             "Banana\n"
                             "Orange\n"
                             "Melon\n"
                             "Grape\n"
                             "Raspberry");
lv_obj_align(ddl1, NULL, LV_ALIGN_IN_TOP_LEFT, 30, 10);
lv_obj_set_free_num(ddl1, 1); /*Set a unique ID*/
lv_ddlist_set_action(ddl1, ddlist_action); /*Set a function to call when anew option is chosen*/

/*Create a style*/
static lv_style_t style_bg;
lv_style_copy(&style_bg, &lv_style_pretty);
style_bg.body.shadow.width = 4; /*Enable the shadow*/
style_bg.text.color = LV_COLOR_MAKE(0x10, 0x20, 0x50);

/*Copy the drop down list and set the new style_bg*/
lv_obj_t * ddl2 = lv_ddlist_create(lv_scr_act(), ddl1);
lv_obj_align(ddl2, NULL, LV_ALIGN_IN_TOP_RIGHT, -30, 10);
lv_obj_set_free_num(ddl2, 2); /*Set a unique ID*/
lv_obj_set_style(ddl2, &style_bg);

```

Gauge (lv_gauge)

Escrito para v5.1

Visión general

El indicador es un metro con **etiquetas de escala** y **agujas**. Puedes usar la función `lv_gauge_set_scale(gauge, angle, line_num, label_cnt)` para ajustar el ángulo de la escala y el número de líneas de escala y etiquetas. Los ajustes por defecto son: 220 grados, 6 etiquetas de escala y 21 líneas.

El indicador puede mostrar **mas de una aguja**. Usa la función `lv_gauge_set_needle_count(gauge, needle_num, color_array)` para establecer el número de agujas y un arreglo con los colores de cada aguja (El arreglo debe de ser una variable estática o global).

Puedes usar `lv_gauge_set_value(gauge, needle_id, value)` para **establecer el valor de una aguja**.

Para establecer un **valor critico** usa `lv_gauge_set_critical_value(gauge, value)`. El color de la escala será cambiado a `line.color` después de este valor. (default: 80)


El **rango** de un indicador puede ser especificado con `lv_gauge_set_range(gauge, min, max)`.

Uso de estilos

El indicador usa un estilo el cual puede ser establecido con `lv_gauge_set_style(gauge, &style)`. Las propiedades del indicador son derivadas de los siguientes atributos de estilo:

- **body.main_color** Color de la línea al inicio de la escala.
- **body.grad_color** Color de la línea al final de la escala (gradiente con el color principal).
- **body.padding.hor** Longitud de la línea.
- **body.padding.inner** Distancia de la etiqueta con las líneas de escala.
- **line.width** Grosor de la línea.
- **line.color** Color de la línea despues del valor critico.
- **text.font/color/letter_space** Atributos de la etiqueta.

Ejemplo

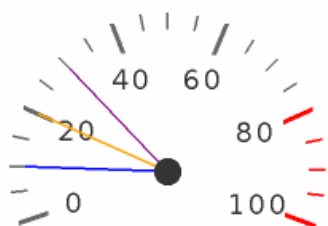

```

/*Crea un estilo*/
static lv_style_t style;
lv_style_copy(&style, &lv_style_pretty_color);
style.body.main_color = LV_COLOR_HEX3(0x666);      /*Color de la linea al inicio*/
style.body.grad_color = LV_COLOR_HEX3(0x666);      /*Color de la linea al final*/
style.body.padding.hor = 10;                        /*Escala la longitud de la linea*/
style.body.padding.inner = 8 ;                     /*Padding de la escala*/
style.body.border.color = LV_COLOR_HEX3(0x333);    /*Color del circulo central de la aguja*/
style.line.width = 3;
style.text.color = LV_COLOR_HEX3(0x333);
style.line.color = LV_COLOR_RED;                    /*Color de la linea despues del valor critico*/

/*Describe el color de las agujas*/
static lv_color_t needle_colors[] = {LV_COLOR_BLUE, LV_COLOR_ORANGE, LV_COLOR_PURPLE};

/*Crea un indicador (gauge)*/
lv_obj_t * gauge1 = lv_gauge_create(lv_scr_act(), NULL);
lv_gauge_set_style(gauge1, &style);
lv_gauge_set_needle_count(gauge1, 3, needle_colors);
lv_obj_align(gauge1, NULL, LV_ALIGN_CENTER, 0, 20);

/*Establece los valores*/
lv_gauge_set_value(gauge1, 0, 10);
lv_gauge_set_value(gauge1, 1, 20);
lv_gauge_set_value(gauge1, 2, 30);

```

Imagen (lv_img)

Written for v5.1

Overview

The Images are the basic object to **display images**. To provide maximum flexibility the **source of the image** can be:

- a variable in the code (a C array with the pixels)
- a file stored externally (like on an SD card)
- a text with [Symbols](#)

To set the source of an image the `lv_img_set_src` function can be used.

To generate a pixel array **from a PNG, JPG or BMP** image use the [Online image converter tool](#) and set the converted image with its pointer:

```
lv_img_set_src(img1, &converted_img_var);
```

To use **external files** you also need to convert the image files using the online converter tool but now you should select the binary Output format. To see how to handle external image files from LittlevGL check the [Tutorial](#).

You can set a **symbol** from `lv_symbol_def.h` too. In this case, the image will be rendered as text according to the **font** specified in the style. It enables to use light weighted mono-color "letters" instead of real images. You can set symbol like this:

```
lv_img_set_src(img1, SYMBOL_OK);
```

The internal (variable) and external images support 2 **transparency handling** methods:

- **Chrome keying** `LV_COLOR_TRANSP` (`lv_conf.h`) will be transparent
- **Alpha byte** Add an alpha byte to every pixel

These options can be selected in the online font converter.

The images can be **re-colored in run-time** to any color according to the brightness of the pixels. It is very useful to show different states (selected, inactive, pressed etc) of an image without storing more versions of the same image. This feature can be enabled in the style by setting `img.intense` between `LV_OPA_TRANSP` (no recolor, value: 0) and `LV_OPA_COVER` (full recolor, value: 255). The default value is `LV_OPA_TRANSP` so this feature is disabled.

It is possible to **automatically set the size** of the image object to the image source's width and height if enabled by the `lv_img_set_auto_size(image, true)` function. If *auto size* is enabled then when a new file is set the object size is automatically changed. Later you can modify the size manually. If the object size is greater then the image size in any directions then the image will be repeated like a mosaic. The auto size is enabled by default if the image is not a screen.

The images' default style is NULL so they **inherit the parent's style**.

Style usage

- For images **style.img**
- For symbols **style.text**

Notes

- Symbols names (like `SYMBOL_EDIT`) are short strings, therefore, you can concatenate them to show more symbols.

Example

Re-color the images in run time



Use symbols from fonts as images



```
/*Declare a cogwheel image variable*/
LV_IMG_DECLARE(img_cw);

[...]

/*****
 * Create three images and re-color them
 *****/

/*Create the first image without re-color*/
lv_obj_t * img1 = lv_img_create(lv_scr_act(), NULL);
lv_img_set_src(img1, &img_cw);
lv_obj_align(img1, NULL, LV_ALIGN_IN_TOP_LEFT, 20, 40);

/*Create style to re-color with light blue*/
static lv_style_t style_img2;
lv_style_copy(&style_img2, &lv_style_plain);
style_img2.image.color = LV_COLOR_HEX(0x003b75);
style_img2.image.intense = LV_OPA_50;

/*Create an image with the light blue style*/
lv_obj_t * img2 = lv_img_create(lv_scr_act(), img1);
lv_obj_set_style(img2, &style_img2);
lv_obj_align(img2, NULL, LV_ALIGN_IN_TOP_MID, 0, 40);

/*Create style to re-color with dark blue*/
static lv_style_t style_img3;
lv_style_copy(&style_img3, &lv_style_plain);
style_img3.image.color = LV_COLOR_HEX(0x003b75);
style_img3.image.intense = LV_OPA_90;

/*Create an image with the dark blue style*/
lv_obj_t * img3 = lv_img_create(lv_scr_act(), img2);
lv_obj_set_style(img3, &style_img3);
lv_obj_align(img3, NULL, LV_ALIGN_IN_TOP_RIGHT, -20, 40);

/*****
 * Create an image with symbols
 *****/

/*Create a string from symbols*/
char buf[32];
sprintf(buf, "%s%s%s%s%s%s",
        SYMBOL_DRIVE, SYMBOL_FILE, SYMBOL_DIRECTORY, SYMBOL_SETTINGS,
        SYMBOL_POWER, SYMBOL_GPS, SYMBOL_BLUETOOTH);

/*Create style with a symbol font*/
static lv_style_t style_sym;
lv_style_copy(&style_sym, &lv_style_plain);
// The built-in fonts are extended with symbols
style_sym.text.font = &lv_font_dejavu_60;
style_sym.text.letter_space = 10;

/*Create an image and use the string as source*/
lv_obj_t * img_sym = lv_img_create(lv_scr_act(), NULL);
lv_img_set_src(img_sym, buf);
lv_img_set_style(img_sym, &style_sym);
lv_obj_align(img_sym, NULL, LV_ALIGN_IN_BOTTOM_MID, 0, -30);

/*Create description labels*/
lv_obj_t * label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label, "Re-color the images in run time");
lv_obj_align(label, NULL, LV_ALIGN_IN_TOP_MID, 0, 15);

label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label, "Use symbols from fonts as images");
lv_obj_align(label, NULL, LV_ALIGN_IN_BOTTOM_MID, 0, -80);
```

Boton con imagen (lv_imgbtn)

Written for v5.2

Overview

The Image button is very similar to the simple Button object. The only difference is it displays user-defined images in each state instead of drawing a button. Before reading this please learn how the Buttons work in LittelvGL: [link to the button](#)

To set the image in a state the `lv_imgbtn_set_src(imgbtn, LV_BTN_STATE_..., &img_src)` The image sources works the same as described in the Image object. [TODO link](#)

Similarly to the Button object **actions (callbacks) can be assigned** by `lv_imgbtn_set_action(imgbtn, LV_BTN_ACTION_..., my_action)`.

The **states** also work like with Button object. It can be set with `lv_imgbtn_set_state(imgbtn, LV_BTN_STATE_...)`.

The **toggle** feature can be enabled with `lv_imgbtn_set_toggle(imgbtn, true)`

Style usage

The Image buttons can have unique styles for each state. All the `style.image` properties used by the Image button:

- **image.color** Recolor the image to this color according to `intense`
- **image.intense** The extent of recoloring (0..255 or `LV_OPA_0/10/20..100`)
- **image.opa** The opacity of the object (0..255 or `LV_OPA_0/10/20..100`)

Notes

Example



```

/*Create style to make the button darker when pressed*/
lv_style_t style_pr;
lv_style_copy(&style_pr, &lv_style_plain);
style_pr.image.color = LV_COLOR_BLACK;
style_pr.image.intense = LV_OPA_50;
style_pr.text.color = LV_COLOR_HEX3(0xaaa);

LV_IMG_DECLARE(imgbtn_green);
LV_IMG_DECLARE(imgbtn_blue);

/*Create an Image button*/
lv_obj_t * imgbtn1 = lv_imgbtn_create(lv_scr_act(), NULL);
lv_imgbtn_set_src(imgbtn1, LV_BTN_STATE_REL, &imgbtn_green);
lv_imgbtn_set_src(imgbtn1, LV_BTN_STATE_PR, &imgbtn_green);
lv_imgbtn_set_src(imgbtn1, LV_BTN_STATE_TGL_REL, &imgbtn_blue);
lv_imgbtn_set_src(imgbtn1, LV_BTN_STATE_TGL_PR, &imgbtn_blue);
lv_imgbtn_set_style(imgbtn1, LV_BTN_STATE_PR, &style_pr); /*Use the darker style in the pressed state*/
lv_imgbtn_set_style(imgbtn1, LV_BTN_STATE_TGL_PR, &style_pr);
lv_imgbtn_set_toggle(imgbtn1, true);
lv_obj_align(imgbtn1, NULL, LV_ALIGN_CENTER, 0, -40);

/*Create a label on the Image button*/
lv_obj_t * label = lv_label_create(imgbtn1, NULL);
lv_label_set_text(label, "Button");

/*Copy the fist image button and set Toggled state*/
lv_obj_t * imgbtn2 = lv_imgbtn_create(lv_scr_act(), imgbtn1);
lv_btn_set_state(imgbtn2, LV_BTN_STATE_TGL_REL);
lv_obj_align(imgbtn2, imgbtn1, LV_ALIGN_OUT_BOTTOM_MID, 0, 20);

/*Create a label on the Image button*/
label = lv_label_create(imgbtn2, NULL);
lv_label_set_text(label, "Button");

```


Teclado (lv_kb)

Written for v5.1

Overview

As its name shows the **Keyboard** object provides a keyboard to **write text**. You can assign a [Text area](#) to the Keyboard to put the clicked characters there. To assign the Text area use `lv_kb_set_ta(kb, ta)`.

The keyboard contains an `_Ok_` and a `Hide` button. An ok and a hide action can be specified by `lv_kb_set_ok_action(kb, action)` and `lv_kb_set_hide_action(kb, action)` to add callbacks to Ok/Hide clicks. If no action is specified then the buttons will delete the Keyboard.

The assigned Text area's **cursor** can be **managed** by the keyboard: when the keyboard is assigned the previous Text area's cursor will be hidden and the new's will be shown. Clicking on `_Ok_` or `Hide` will also hide the cursor. The cursor manager feature is enabled by `lv_kb_set_cursor_manage(kb, true)`. The default is not manage.

The Keyboards have two **modes**:

- `LV_KB_MODE_TEXT`: display letters, number and special characters
- `LV_KB_MODE_NUM`: display numbers, +/- sign and dot

To set the mode use `lv_kb_set_mode(kb, mode)`. The default is `_LV_KB_MODE_TEXT_`.

You can specify a **new map** (layout) for the keyboard with `lv_kb_set_map(kb, map)`. It works like a the [Button matrix](#) so control character can be added to the layout the set button width and other attributes. Keep in mind using following keywords will have the same effect as with the original map: `_SYMBOL_OK_`, `_SYMBOL_CLOSE_`, `_SYMBOL_LEFT_`, `_SYMBOL_RIGHT_`, `ABC`, `abc`, `Enter`, `Del`, `_#1_`, `+/-`.

Style usage

The Keyboard works with 6 styles: a background and 5 button styles for each states. You can set the styles with `lv_kb_set_style(btn, LV_KB_STYLE_..., &style)`. The background and the buttons use the *style.body* properties. The labels use the *style.text* properties of the button styles.

- `LV_KB_STYLE_BG` Background style. Uses all *style.body* properties including *padding* Default: `_lv_style_pretty_`
- `LV_KB_STYLE_BTN_REL` style of the released buttons. Default: `_lv_style_btn_rel_`
- `LV_KB_STYLE_BTN_PR` style of the pressed buttons. Default: `_lv_style_btn_pr_`
- `LV_KB_STYLE_BTN_TGL_REL` style of the toggled released buttons. Default: `_lv_style_btn_tgl_rel_`
- `LV_KB_STYLE_BTN_TGL_PR` style of the toggled pressed buttons. Default: `_lv_style_btn_tgl_pr_`
- `LV_KB_STYLE_BTN_INA` style of the inactive buttons. Default: `_lv_style_btn_ina_`

Example



```

/*Create styles for the keyboard*/
static lv_style_t rel_style, pr_style;

lv_style_copy(&rel_style, &lv_style_btn_rel);
rel_style.body.radius = 0;

lv_style_copy(&pr_style, &lv_style_btn_pr);
pr_style.body.radius = 0;

/*Create a keyboard and apply the styles*/
lv_obj_t *kb = lv_kb_create(lv_scr_act(), NULL);
lv_kb_set_cursor_manage(kb, true);
lv_kb_set_style(kb, LV_KB_STYLE_BG, &lv_style_transp_tight);
lv_kb_set_style(kb, LV_KB_STYLE_BTN_REL, &rel_style);
lv_kb_set_style(kb, LV_KB_STYLE_BTN_PR, &pr_style);

/*Create a text area. The keyboard will write here*/
lv_obj_t *ta = lv_ta_create(lv_scr_act(), NULL);
lv_obj_align(ta, NULL, LV_ALIGN_IN_TOP_MID, 0, 10);
lv_ta_set_text(ta, "");

/*Assign the text area to the keyboard*/
lv_kb_set_ta(kb, ta);

```

Lista (lv_list)

Written for v5.1

Overview

The Lists are built from a background **Page** and **Buttons** on it. The Buttons contain an optional icon-like Image (which can be a symbol too) and a Label. When the list become long enough it can be scrolled. The **width of the buttons** is set to maximum according to the object width. The **height** of the buttons are adjusted automatically according to the content (content height + style.body.padding.ver).

You can **add new list element** with `lv_list_add(list, "U:/img", "Text", rel_action)` or with symbol icon `lv_list_add(list, SYMBOL_EDIT, "Edit text")`. If you do not want to add image use `""` as file name. The function returns with a pointer to the created button to allow further configurations.

You can use `lv_list_get_btn_label(list_btn)` and `lv_list_get_btn_img(list_btn)` to **get the label and the image** of a list button.

In the release action of a button you can get the **button's text** with `lv_list_get_btn_text(button)`. It helps to identify the released list element.

To **delete a list element** just use `lv_obj_del()` on the return value of `lv_list_add()`.

You can **navigate manually** in the list with `lv_list_up(list)` and `lv_list_down(list)`.

You can focus on a button directly using `lv_list_focus(btn, anim_en)`.

The **animation time** of up/down/focus movements can be set via: `lv_list_set_anim_time(list, anim_time)`. Zero animation time means no animations.

Style usage

The `lv_list_set_style(list, LV_LIST_STYLE_..., &style)` function sets the style of a list. For details explanation of `_BG_`, `SCRL` and `_SB_` see [Page](#)


- `LV_LIST_STYLE_BG` list background style. Default: `_lv_style_transp_fit_`
- `LV_LIST_STYLE_SCRL` scrollable parts's style. Default: `_lv_style_pretty_`
- `LV_LIST_STYLE_SB` scrollbars' style. Default: `_lv_style_pretty_color_`
- `LV_LIST_STYLE_BTN_REL` button released style. Default: `_lv_style_btn_rel_`
- `LV_LIST_STYLE_BTN_PR` button pressed style. Default: `_lv_style_btn_pr_`
- `LV_LIST_STYLE_BTN_TGL_REL` button toggled released style. Default: `_lv_style_btn_tgl_rel_`
- `LV_LIST_STYLE_BTN_TGL_PR` button toggled pressed style. Default: `_lv_style_btn_tgl_pr_`
- `LV_LIST_STYLE_BTN_INA` button inactive style. Default: `_lv_style_btn_ina_`

Notes


- You can set a transparent background for the list. In this case if you have only a few list buttons the list will look shorter but become scrollable when more list elements are added.
- The button labels default long mode is `LV_LABEL_LONG_ROLL`. You can modify it manually. Use `lv_list_get_btn_label()` to get buttons's label.
- To **modify the height of the buttons** adjust the `body.padding.ver` field of the corresponding style (`LV_LIST_STYLE_BTN_REL`, `LV_LIST_STYLE_BTN_PR` etc.)

Example

Default

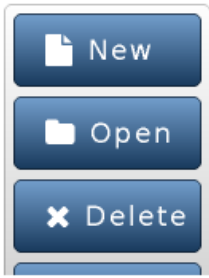

Modified

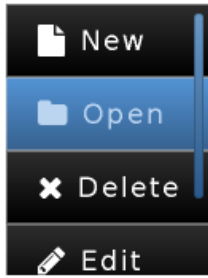

```

/*Will be called on click of a button of a list*/
static lv_res_t list_release_action(lv_obj_t * list_btn)
{
    printf("List element click:%s\n", lv_list_get_btn_text(list_btn));

    return LV_RES_OK; /*Return OK because the list is not deleted*/
}

.
.
.

/*****
 * Create a default list
 *****/

/*Crate the list*/
lv_obj_t * list1 = lv_list_create(lv_scr_act(), NULL);
lv_obj_set_size(list1, 130, 170);
lv_obj_align(list1, NULL, LV_ALIGN_IN_TOP_LEFT, 20, 40);

/*Add list elements*/
lv_list_add(list1, SYMBOL_FILE, "New", list_release_action);
lv_list_add(list1, SYMBOL_DIRECTORY, "Open", list_release_action);
lv_list_add(list1, SYMBOL_CLOSE, "Delete", list_release_action);
lv_list_add(list1, SYMBOL_EDIT, "Edit", list_release_action);
lv_list_add(list1, SYMBOL_SAVE, "Save", list_release_action);

/*Create a label above the list*/
lv_obj_t * label;
label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label, "Default");
lv_obj_align(label, list1, LV_ALIGN_OUT_TOP_MID, 0, -10);

/*****
 * Create new styles
 *****/
/*Create a scroll bar style*/
static lv_style_t style_sb;
lv_style_copy(&style_sb, &lv_style_plain);
style_sb.body.main_color = LV_COLOR_BLACK;
style_sb.body.grad_color = LV_COLOR_BLACK;
style_sb.body.border.color = LV_COLOR_WHITE;
style_sb.body.border.width = 1;
style_sb.body.border.opa = LV_OPA_70;
style_sb.body.radius = LV_RADIUS_CIRCLE;
style_sb.body.opa = LV_OPA_60;

/*Create styles for the buttons*/
static lv_style_t style_btn_rel;
static lv_style_t style_btn_pr;
lv_style_copy(&style_btn_rel, &lv_style_btn_rel);
style_btn_rel.body.main_color = LV_COLOR_MAKE(0x30, 0x30, 0x30);
style_btn_rel.body.grad_color = LV_COLOR_BLACK;
style_btn_rel.body.border.color = LV_COLOR_SILVER;
style_btn_rel.body.border.width = 1;
style_btn_rel.body.border.opa = LV_OPA_50;
style_btn_rel.body.radius = 0;

lv_style_copy(&style_btn_pr, &style_btn_rel);
style_btn_pr.body.main_color = LV_COLOR_MAKE(0x55, 0x96, 0xd8);
style_btn_pr.body.grad_color = LV_COLOR_MAKE(0x37, 0x62, 0x90);
style_btn_pr.text.color = LV_COLOR_MAKE(0xbb, 0xd5, 0xf1);

/*****
 * Create a list with modified styles
 *****/

/*Copy the previous list*/
lv_obj_t * list2 = lv_list_create(lv_scr_act(), list1);
lv_obj_align(list2, NULL, LV_ALIGN_IN_TOP_RIGHT, -20, 40);
lv_list_set_sb_mode(list2, LV_SB_MODE_AUTO);
lv_list_set_style(list2, LV_LIST_STYLE_BG, &lv_style_transp_tight);
lv_list_set_style(list2, LV_LIST_STYLE_SCRL, &lv_style_transp_tight);
lv_list_set_style(list2, LV_LIST_STYLE_BTN_REL, &style_btn_rel); /*Set the new button styles*/
lv_list_set_style(list2, LV_LIST_STYLE_BTN_PR, &style_btn_pr);

/*Create a label above the list*/
label = lv_label_create(lv_scr_act(), label); /*Copy the previous label*/
lv_label_set_text(label, "Modified");
lv_obj_align(label, list2, LV_ALIGN_OUT_TOP_MID, 0, -10);

```

LED (lv_led)

Escrito para v5.1

Visión general

Los LEDs son objetos rectangulares (o circulares). Puedes establecer su **brillo** con `lv_led_set_bright(led, bright)`. El brillo debe de estar entre 0 (el más oscuro) y 255 (el más brillante).

Usa `lv_led_on(led)` y `lv_led_off(led)` para establecer el brillo a un valor ON o OFF predefinido. La función `lv_led_toggle(led)` togglea entre los estados ON y OFF.

Uso de estilos

El LED usa un estilo que se puede establecer con `lv_led_set_style(led, &style)`. Para determinar la apariencia las propiedades `style.body` son usadas. Los colores se oscurecen y el ancho de la sombra se reduce al brillo más bajo y gana su valor original en el brillo 255 para mostrar un efecto de iluminación. El estilo por defecto es: `lv_style_pretty_color`.

Notas

- Normalmente, el estilo predeterminado no es adecuado, por lo que debes de crear tu propio estilo. Ve los ejemplos.

Ejemplo

LED On



LED half



LED Off



```

/*Crea un estilo para el LED*/
static lv_style_t style_led;
lv_style_copy(&style_led, &lv_style_pretty_color);
style_led.body.radius = LV_RADIUS_CIRCLE;
style_led.body.main_color = LV_COLOR_MAKE(0xb5, 0x0f, 0x04);
style_led.body.grad_color = LV_COLOR_MAKE(0x50, 0x07, 0x02);
style_led.body.border.color = LV_COLOR_MAKE(0xfa, 0x0f, 0x00);
style_led.body.border.width = 3;
style_led.body.border.opa = LV_OPA_30;
style_led.body.shadow.color = LV_COLOR_MAKE(0xb5, 0x0f, 0x04);
style_led.body.shadow.width = 10;

/*Crea un LED y enciéndelo*/
lv_obj_t * led1 = lv_led_create(lv_scr_act(), NULL);
lv_obj_set_style(led1, &style_led);
lv_obj_align(led1, NULL, LV_ALIGN_IN_TOP_MID, 40, 40);
lv_led_on(led1);

/*Copia el LED previo y establece un brillo*/
lv_obj_t * led2 = lv_led_create(lv_scr_act(), led1);
lv_obj_align(led2, led1, LV_ALIGN_OUT_BOTTOM_MID, 0, 40);
lv_led_set_bright(led2, 190);

/*Copia el LED previo y apágalo*/
lv_obj_t * led3 = lv_led_create(lv_scr_act(), led1);
lv_obj_align(led3, led2, LV_ALIGN_OUT_BOTTOM_MID, 0, 40);
lv_led_off(led3);

/*Crea 3 etiquetas junto a los LEDs*/
lv_obj_t * label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label, "LED On");
lv_obj_align(label, led1, LV_ALIGN_OUT_LEFT_MID, -40, 0);

label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label, "LED half");
lv_obj_align(label, led2, LV_ALIGN_OUT_LEFT_MID, -40, 0);

label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(label, "LED Off");
lv_obj_align(label, led3, LV_ALIGN_OUT_LEFT_MID, -40, 0);

```

Linea (lv_line)

Written for v5.1

Overview

The line object is capable of **drawing straight lines** between a set of points. The points has to be stored in an `lv_point_t` array and passed to the object by the `lv_line_set_points(lines, point_array, point_num)` function.

It is possible to **automatically set the size** of the line object according to its points. You can enable it with the `lv_line_set_auto_size(line, true)` function. If enabled then when the points are set then the object width and height will be changed according to the max. x and max. y coordinates among the points. The *auto size* is enabled by default.


Basically the $y == 0$ point is in the top of the object but you can **invert the y coordinates** with `lv_line_set_y_invert(line, true)`. After it the y coordinates will be subtracted from object's height.

Style usage

- `style.line` properties are used

Notes

Example

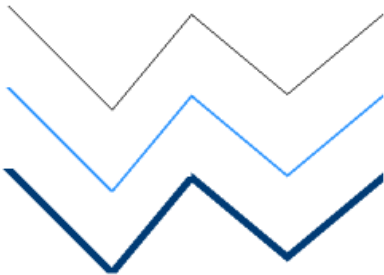

```
/*Create an array for the points of the line*/
static lv_point_t line_points[] = { {5, 5}, {70, 70}, {120, 10}, {180, 60}, {240, 10} };

/*Create line with default style*/
lv_obj_t * line1;
line1 = lv_line_create(lv_scr_act(), NULL);
lv_line_set_points(line1, line_points, 5); /*Set the points*/
lv_obj_align(line1, NULL, LV_ALIGN_IN_TOP_MID, 0, 20);

/*Create new style (thin light blue)*/
static lv_style_t style_line2;
lv_style_copy(&style_line2, &lv_style_plain);
style_line2.line.color = LV_COLOR_MAKE(0x2e, 0x96, 0xff);
style_line2.line.width = 2;

/*Copy the previous line and apply the new style*/
lv_obj_t * line2 = lv_line_create(lv_scr_act(), line1);
lv_line_set_style(line2, &style_line2);
lv_obj_align(line2, line1, LV_ALIGN_OUT_BOTTOM_MID, 0, -20);

/*Create new style (thick dark blue)*/
static lv_style_t style_line3;
lv_style_copy(&style_line3, &lv_style_plain);
style_line3.line.color = LV_COLOR_MAKE(0x00, 0x3b, 0x75);
style_line3.line.width = 5;

/*Copy the previous line and apply the new style*/
lv_obj_t * line3 = lv_line_create(lv_scr_act(), line1);
lv_line_set_style(line3, &style_line3);
lv_obj_align(line3, line2, LV_ALIGN_OUT_BOTTOM_MID, 0, -20);
```


Line meter (lv_lmeter)

Written for v5.1

Overview

The Line Meter object consists of some **radial lines** which draw a scale. When setting a new value with `lv_lmeter_set_value(lmeter, new_value)` the proportional part of the scale will be recolored.

The `lv_lmeter_set_range(lmeter, min, max)` function sets the **range** of the line meter.

You can set the **angle** of the scale and the **number of the lines** by: `lv_lmeter_set_scale(lmeter, angle, line_num)`. The default angle is 240 and the default line number is 31.

Style usage

The line meter uses one style which can be set by `lv_lmeter_set_style(lmeter, &style)`. The line meter's properties are derived from the following style attributes:

- **line.color** "inactive line's" color which are greater then the current value
- **body.main_color** "active line's" color at the beginning of the scale
- **body.grad_color** "active line's" color at the end of the scale (gradient with main color)
- **body.padding.hor** line length
- **line.width** line width

The default style is `_lv_style_pretty_color_`.

Notes

- The line meter has no background.
- It is recommended to use **antialiasing** on smaller dpi displays to show smooth lines
- Odd number of scale lines look better
- It looks better if the scale angle is: $(\text{line number} - 1) * N$, where N is an integer

Example



```

/*****
 * Create 3 similar line meter
 *****/

/*Create a simple style with ticker line width*/
static lv_style_t style_lmeter1;
lv_style_copy(&style_lmeter1, &lv_style_pretty_color);
style_lmeter1.line.width = 2;
style_lmeter1.line.color = LV_COLOR_SILVER;
style_lmeter1.body.main_color = LV_COLOR_HEX(0x91bfed);          /*Light blue*/
style_lmeter1.body.grad_color = LV_COLOR_HEX(0x04386c);          /*Dark blue*/

/*Create the first line meter */
lv_obj_t * lmeter;
lmeter = lv_lmeter_create(lv_scr_act(), NULL);
lv_lmeter_set_range(lmeter, 0, 100);          /*Set the range*/
lv_lmeter_set_value(lmeter, 30);              /*Set the current value*/
lv_lmeter_set_style(lmeter, &style_lmeter1);  /*Apply the new style*/
lv_obj_set_size(lmeter, 80, 80);
lv_obj_align(lmeter, NULL, LV_ALIGN_IN_BOTTOM_LEFT, 20, -20);

/*Add a label to show the current value*/
lv_obj_t * label;
label = lv_label_create(lmeter, NULL);
lv_label_set_text(label, "30%");
lv_label_set_style(label, &lv_style_pretty);
lv_obj_align(label, NULL, LV_ALIGN_CENTER, 0, 0);

/*Create the second line meter and label*/
lmeter = lv_lmeter_create(lv_scr_act(), lmeter);
lv_lmeter_set_value(lmeter, 60);
lv_obj_align(lmeter, NULL, LV_ALIGN_IN_BOTTOM_MID, 0, -20);

label = lv_label_create(lmeter, label);
lv_label_set_text(label, "60%");
lv_obj_align(label, NULL, LV_ALIGN_CENTER, 0, 0);

/*Create the third line meter and label*/
lmeter = lv_lmeter_create(lv_scr_act(), lmeter);
lv_lmeter_set_value(lmeter, 90);
lv_obj_align(lmeter, NULL, LV_ALIGN_IN_BOTTOM_RIGHT, -20, -20);

label = lv_label_create(lmeter, label);
lv_label_set_text(label, "90%");
lv_obj_align(label, NULL, LV_ALIGN_CENTER, 0, 0);

/*****
 * Create a greater line meter
 *****/

/*Create a new style*/
static lv_style_t style_lmeter2;
lv_style_copy(&style_lmeter2, &lv_style_pretty_color);
style_lmeter2.line.width = 2;
style_lmeter2.line.color = LV_COLOR_SILVER;
style_lmeter2.body.padding.hor = 16;          /*Line length*/
style_lmeter2.body.main_color = LV_COLOR_LIME;
style_lmeter2.body.grad_color = LV_COLOR_ORANGE;

/*Create the line meter*/
lmeter = lv_lmeter_create(lv_scr_act(), lmeter);
lv_obj_set_style(lmeter, &style_lmeter2);
lv_obj_set_size(lmeter, 120, 120);
lv_obj_align(lmeter, NULL, LV_ALIGN_IN_TOP_MID, 0, 20);
lv_lmeter_set_scale(lmeter, 240, 31);
lv_lmeter_set_value(lmeter, 90);

/*Create a label style with greater font*/
static lv_style_t style_label;
lv_style_copy(&style_label, &lv_style_pretty);
style_label.text.font = &lv_font_dejavu_60;
style_label.text.color = LV_COLOR_GRAY;

/*Add a label to show the current value*/
label = lv_label_create(lmeter, label);
lv_label_set_text(label, "90%");
lv_obj_set_style(label, &style_label);
lv_obj_align(label, NULL, LV_ALIGN_CENTER, 0, 0);

```

Etiqueta (lv_label)

Written for v5.1

Overview

The Labels are the basic objects to **display text**. There is no limitation in the text size because it's stored dynamically. You can modify the text in runtime at any time with `lv_label_set_text()`.

You can use `\n` to make line break. For example: `"line1\nline2\n\nline4"`

The size of the label object can be automatically expanded to the text size or the text can be manipulated according to several **long mode policies**:

- `LV_LABEL_LONG_EXPAND`: Expand the object size to the text size
- `LV_LABEL_LONG_BREAK`: Keep the object width, break (wrap) the too long lines and expand the object height
- `LV_LABEL_LONG_DOTS`: Keep the object size, break the text and write dots in the last line
- `LV_LABEL_LONG_SCROLL`: Expand the object size and scroll the text on the parent (move the label object)
- `LV_LABEL_LONG_ROLL`: Keep the size and roll just the text (not the object)

You can specify the long mode with: `lv_label_set_long_mode(label, long_mode)`

Labels are able to show text from a **static array**. Use: `lv_label_set_static_text(label, char_array)`. In this case, the text is not stored in the dynamic memory but the given array is used instead. Keep in my the array can't be a local variable which destroys when the function exits.

You can also use a **raw character array** as label text. The array doesn't have to be `\0` terminated. In this case, the text will be saved to the dynamic memory. To set a raw character array use the `lv_label_set_array_text(label, char_array)` function.

The label's **text can be aligned** to the left, right or middle with `lv_label_set_align(label, LV_LABEL_ALIGN_LEFT/RIGHT/CENTER)`

You can enable to **draw a background** for the label with `lv_label_set_body_draw(label, draw)`

In the text, you can use commands to **re-color parts of the text**. For example: `"Write a #ff0000 red# word"`. This feature can be enabled individually for each label by `lv_label_set_recolor()` function.

The labels can display symbols besides letters. Learn more about symbols [here](#).

The labels' **default style** is `NULL` so they inherit the parent's style.

Style usage

- Use all properties from `style.text`
- For background drawing `style.body properties` are used

Notes

The label's **click enable attribute is disabled** by default. You can enable clicking with `lv_obj_set_click(label, true)`

Example

Title Label

Align lines to the middle

Re-color words of the text

If a line become too long it
can be automatically broken
into multiple lines

```
/*Create label on the screen. By default it will inherit the style of the screen*/
lv_obj_t * title = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(title, "Title Label");
lv_obj_align(title, NULL, LV_ALIGN_IN_TOP_MID, 0, 20); /*Align to the top*/

/*Create anew style*/
static lv_style_t style_txt;
lv_style_copy(&style_txt, &lv_style_plain);
style_txt.text.font = &lv_font_dejavu_40;
style_txt.text.letter_space = 2;
style_txt.text.line_space = 1;
style_txt.text.color = LV_COLOR_HEX(0x606060);

/*Create a new label*/
lv_obj_t * txt = lv_label_create(lv_scr_act(), NULL);
lv_obj_set_style(txt, &style_txt); /*Set the created style*/
lv_label_set_long_mode(txt, LV_LABEL_LONG_BREAK); /*Break the long lines*/
lv_label_set_recolor(txt, true); /*Enable re-coloring by commands in the text*/
lv_label_set_align(txt, LV_LABEL_ALIGN_CENTER); /*Center aligned lines*/
lv_label_set_text(txt, "Align lines to the middle\n\n"
    "#000080 Re-color# 0000ff words of# 6666ff the text#\n\n"
    "If a line become too long it can be automatically broken into multiple lines");
lv_obj_set_width(txt, 300); /*Set a width*/
lv_obj_align(txt, NULL, LV_ALIGN_CENTER, 0, 20); /*Align to center*/
```

Caja con mensaje (lv_mbox)

Written for v5.1

Overview

The message boxes act as **pop-ups**. They are built from a **background**, a **text** and **buttons**. The background is a [Container](#) object with enabled vertical fit to ensure that the text and the buttons are always visible.

To **set the text** use the `lv_mbox_set_text(mbox, "My text")` function.

The buttons are a Button matrix. To **add buttons** use the `lv_mbox_add_btns(mbox, btn_str, action)` function. In this you can specify the button text e.g (`const char * btn_str[] = {"btn1", "btn2", ""}`) and add a callback which is called when a button is released. For more information visit the [Button matrix](#)'s documentation.

With `lv_mbox_start_auto_close(mbox, delay)` the message box can be **closed automatically** after *delay* milliseconds with a long animation. The `lv_mbox_stop_auto_close(mbox)` function will stop a started auto close .

The close animation time can be adjusted by `lv_mbox_set_anim_time(mbox, anim_time)` .

Style usage

Use `lv_mbox_set_style(mbox, LV_MBOX_STYLE_..., &style)` to set a new style for an element of the message box:

- **LV_MBOX_STYLE_BG** specifies the background container's style. *style.body* for background and *style.label* for the text appearance. Default: lv_style_pretty
- **LV_MBOX_STYLE_BTN_BG** style of the buttons (button matrix) background. Default: lv_style_transp
- **LV_MBOX_STYLE_BTN_REL** style of the released buttons. Default: lv_style_btn_rel
- **LV_MBOX_STYLE_BTN_PR** style of the pressed buttons. Default: lv_style_btn_pr
- **LV_MBOX_STYLE_BTN_TGL_REL** style of the toggled released buttons. Default: lv_style_btn_tgl_rel
- **LV_MBOX_STYLE_BTN_TGL_PR** style of the toggled pressed buttons. Default: lv_style_btn_tgl_pr
- **LV_MBOX_STYLE_BTN_INA** style of the inactive buttons. Default: lv_style_btn_ina

Notes

- The **height of the buttons** comes from the *font height* + $2 \times \textit{body.vpad}$ of `_LV_MBOX_STYLE_BTN_REL_`

Example



```

/*Called when a button is clicked*/
static lv_res_t mbox_apply_action(lv_obj_t * mbox, const char * txt)
{
    printf("Mbox button: %s\n", txt);

    return LV_RES_OK; /*Return OK if the message box is not deleted*/
}

.
.
.
.

/*****
 * Create a default message box
 *****/

lv_obj_t * mbox1 = lv_mbox_create(lv_scr_act(), NULL);
lv_mbox_set_text(mbox1, "Default message box\n"
                      "with buttons"); /*Set the text*/

/*Add two buttons*/
static const char * btns[] ={"\221Apply", "\221Close", ""}; /*Button description. '\221' lv_btnm like control char*/
lv_mbox_add_btns(mbox1, btns, NULL);
lv_obj_set_width(mbox1, 250);
lv_obj_align(mbox1, NULL, LV_ALIGN_IN_TOP_LEFT, 10, 10); /*Align to the corner*/

/*****
 * Create a message box with new styles
 *****/

/*Create a new background style*/
static lv_style_t style_bg;
lv_style_copy(&style_bg, &lv_style_pretty);
style_bg.body.main_color = LV_COLOR_MAKE(0xf5, 0x45, 0x2e);
style_bg.body.grad_color = LV_COLOR_MAKE(0xb9, 0x1d, 0x09);
style_bg.body.border.color = LV_COLOR_MAKE(0x3f, 0x0a, 0x03);
style_bg.text.color = LV_COLOR_WHITE;
style_bg.body.padding.hor = 12;
style_bg.body.padding.ver = 8;
style_bg.body.shadow.width = 8;

/*Create released and pressed button styles*/
static lv_style_t style_btn_rel;
static lv_style_t style_btn_pr;
lv_style_copy(&style_btn_rel, &lv_style_btn_rel);
style_btn_rel.body.empty = 1; /*Draw only the border*/
style_btn_rel.body.border.color = LV_COLOR_WHITE;
style_btn_rel.body.border.width = 2;
style_btn_rel.body.border.opa = LV_OPA_70;
style_btn_rel.body.padding.hor = 12;
style_btn_rel.body.padding.ver = 8;

lv_style_copy(&style_btn_pr, &style_btn_rel);
style_btn_pr.body.empty = 0;
style_btn_pr.body.main_color = LV_COLOR_MAKE(0x5d, 0x0f, 0x04);
style_btn_pr.body.grad_color = LV_COLOR_MAKE(0x5d, 0x0f, 0x04);

/*Copy the message box (The buttons will be copied too)*/
lv_obj_t * mbox2 = lv_mbox_create(lv_scr_act(), mbox1);
lv_mbox_set_text(mbox2, "Message box with\n"
                      "with modified styles");
lv_mbox_set_style(mbox2, LV_MBOX_STYLE_BG, &style_bg);
lv_mbox_set_style(mbox2, LV_MBOX_STYLE_BTN_REL, &style_btn_rel);
lv_mbox_set_style(mbox2, LV_MBOX_STYLE_BTN_PR, &style_btn_pr);
lv_obj_align(mbox2, mbox1, LV_ALIGN_OUT_BOTTOM_LEFT, 50, -20); /*Align according to the previous message box */

```

Pagina (lv_page)

Written for v5.1

Overview

The Page consist of two containers on each other: the bottom is the **background** (or base) and the top is the **scrollable**. If you create a child on the page it will be automatically moved to the scrollable container. If the scrollable container become greater then the background it **can be scrolled by dragging** (like the lists on smart phones).

By default the scrollable's *auto fit* attribute is enabled vertically so its height will increased to include all its children. The width of the scrollable is automatically adjusted to the background width (minus the background's horizontal padding).

The background object can be referenced as the page itself like: `lv_obj_set_width(page, 100)`.

The scrollbar object can be retrieved with: `lv_page_get_scr1(page)`.

Scrollbars can be shown according to four policies:

- LV_SB_MODE_OFF: Never show scrollbars
- LV_SB_MODE_ON: Always show scrollbars
- LV_SB_MODE_DRAG: Show scrollbars when page is being dragged
- LV_SB_MODE_AUTO: Show scrollbars when the scrollable container is large enough to be scrolled

You can set scroll bar show policy by: `lv_page_set_sb_mode(page, SB_MODE)`. The default value is `_LV_PAGE_SB_MODE_ON`;

You can **glue a children** to the page. In this case you can scroll the page with dragging the child object. It can be enabled by the `lv_page_glue_obj(child, true)`.

You can **focus to an object** on a page with: `lv_page_focus(page, child, anim_time)`.

It will moves the scrollable container to show a child. If the last parameter is not zero then the page will move with an animation.

A **release and a press action** can be assigned to the Page with `lv_page_set_rel_action(page, my_rel_action)` and `lv_page_set_pr_action(page, my_pr_action)`. The action can be triggered from the Background and the Scrollable object too.

There are functions to directly **set/get the scrollable's attributes**:

- `lv_page_set_scr1_fit()`
- `lv_page_set_scr1_width()`
- `lv_page_set_scr1_height()`
- `lv_page_set_scr1_layout()`

Style usage

Use `lv_page_set_style(page, LV_PAGE_STYLE_..., &style)` to set a new style for an element of the page:

- **LV_PAGE_STYLE_BG** background's style which uses all *style.body* properties (default: `lv_style_pretty_color`)
- **LV_PAGE_STYLE_SCRL** scrollable's style which uses all *style.body* properties (default: `lv_style_pretty`)
- **LV_PAGE_STYLE_SB** scroll bar's style which uses all *style.body* properties. *hor/ver** padding sets the scrollbars' padding respectively and the inner padding sets the scrollbar's width. (default: `lv_style_pretty_color`)

Notes

- **Setting the position of children** is not possible in x or y direction if the corresponding *hor* or *ver* fit is enabled. It's because if the *_y_* coordinate is modified (with *ver fit* enabled) the scrollable object will resized to be directly above and below the child. But a scrollable part can't be in the middle so it will be moved back to the top. To avoid this use `lv_obj_align()` to place object relative to each other (one has to be in to top/left) or disable fit with `lv_page_set_scr1_fit(page, false, false);` and set it's size `lv_page_set_scr1_width/height(page, 100)`.

- The background draws its border when the scrollable is drawn. It ensures that the page always will have closed shape even if the scrollable has the same color as the page's parent.

Example

□

```
/*Create a scroll bar style*/
static lv_style_t style_sb;
lv_style_copy(&style_sb, &lv_style_plain);
style_sb.body.main_color = LV_COLOR_BLACK;
style_sb.body.grad_color = LV_COLOR_BLACK;
style_sb.body.border.color = LV_COLOR_WHITE;
style_sb.body.border.width = 1;
style_sb.body.border.opa = LV_OPA_70;
style_sb.body.radius = LV_RADIUS_CIRCLE;
style_sb.body.opa = LV_OPA_60;
style_sb.body.padding.hor = 3;           /*Horizontal padding on the right*/
style_sb.body.padding.inner = 8;        /*Scrollbar width*/

/*Create a page*/
lv_obj_t * page = lv_page_create(lv_scr_act(), NULL);
lv_obj_set_size(page, 150, 200);
lv_obj_align(page, NULL, LV_ALIGN_CENTER, 0, 0);
lv_page_set_style(page, LV_PAGE_STYLE_SB, &style_sb);           /*Set the scrollbar style*/
lv_page_set_sb_mode(page, LV_SB_MODE_AUTO);                     /*Show scroll bars is scrolling is possible*/

/*Create a label on the page*/
lv_obj_t * label = lv_label_create(page, NULL);
lv_label_set_long_mode(label, LV_LABEL_LONG_BREAK);             /*Automatically break long lines*/
lv_obj_set_width(label, lv_page_get_scrl_width(page));          /*Set the width. Lines will break here*/
lv_label_set_text(label, "Lorem ipsum dolor sit amet, consectetur adipiscing elit,\n"
    "sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.\n"
    "Ut enim ad minim veniam, quis nostrud exercitation ullamco\n"
    "laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure\n"
    "dolor in reprehenderit in voluptate velit esse cillum dolore\n"
    "eu fugiat nulla pariatur.\n"
    "Excepteur sint occaecat cupidatat non proident, sunt in culpa\n"
    "qui officia deserunt mollit anim id est laborum.");
```


Preloader (lv_preload)

Written for v5.2

Overview

The preloader object is a **spinning arc over a border**.

The **length of the arc** can be adjusted by `lv_preload_set_arc_length(preload, deg)`.

The **speed of the spinning** can be adjusted by `lv_preload_set_spin_time(preload, time_ms)`.

Style usage

The `LV_PRELOAD_STYLE_MAIN` style describes both the arc and the border style:

- **arc** is described by the `line` properties
- **border** is described by the `body.border` properties including `body.padding.hor/ver` (smaller is used) to give a smaller radius for the border.

Example



```
/*Create a style for the Preloader*/
static lv_style_t style;
lv_style_copy(&style, &lv_style_plain);
style.line.width = 10; /*10 px thick arc*/
style.line.color = LV_COLOR_HEX3(0x258); /*Blueish arc color*/

style.body.border.color = LV_COLOR_HEX3(0xBBB); /*Gray background color*/
style.body.border.width = 10;
style.body.padding.hor = 0;

/*Create a Preloader object*/
lv_obj_t * preload = lv_preload_create(lv_scr_act(), NULL);
lv_obj_set_size(preload, 100, 100);
lv_obj_align(preload, NULL, LV_ALIGN_CENTER, 0, 0);
lv_preload_set_style(preload, LV_PRELOAD_STYLE_MAIN, &style);
```

Roller (lv_roller)

Written for v5.1 Updated to v5.2

Overview

Roller allow you to simply **select one option from more** with scrolling. Its functionalities are similar to [Drop down list](#).

The **options** are passed to the Roller as a **string** with `lv_roller_set_options(roller, options)`. The options should be separated by `\n`. For example: `"First\nSecond\nThird"`.

You can **select an option manually** with `lv_roller_set_selected(roller, id)`, where `_id_` is the index of an option.

A **callback function** can be specified with `lv_roller_set_action(roller, my_action)` to call when a new option is selected.

The roller's **height** can be adjusted with `lv_roller_set_visible_row_count(roller, row_cnt)` to set number of visible options.

The **width** is adjusted automatically. To prevent this apply `lv_roller_set_hor_fit(roller, false)` and set the width manually by `lv_obj_set_width(roller, width)`. You should use `lv_roller_set_hor_fit(roller, false)` instead of `lv_cont_set_fit(lv_page_get_scrl(roller), false, false);`, otherwise you'll get an LV_LABEL_ALIGN_LEFT style of the list label text.

The Roller's open/close **animation** time is adjusted by `lv_roller_set_anim_time(roller, anim_time)`. Zero animation time means no animation. This feature is implemented within lv_ddlist.c in v5.2: `lv_ddlist_set_anim_time(roller, anim_time);` should be used for animation.

Style usage

The `lv_roller_set_style(roller, LV_ROLLER_STYLE_..., &style)` set the styles of a roller.

- **LV_ROLLER_STYLE_BG** Style of the background. All *style.body* properties are used. It is used for the label's style from *style.text*. Gradient is applied on the top and bottom as well. Default: `_lv_style_pretty_`
- **LV_DDLIST_STYLE_SEL** Style of the selected option. The *style.body* properties are used. The selected option will be recolored with *text.color*. Default: `_lv_style_plain_color_`

Example



```

/*Create a default roller*/
lv_obj_t *roller1 = lv_roller_create(lv_scr_act(), NULL);
lv_roller_set_options(roller1, "Apple\n"
                                "Broccoli\n"
                                "Cabbage\n"
                                "Dewberry\n"
                                "Eggplant\n"
                                "Fig\n"
                                "Grapefruit");
lv_obj_set_pos(roller1, 50, 80);

/*Create styles*/
static lv_style_t bg_style;
lv_style_copy(&bg_style, &lv_style_pretty);
bg_style.body.main_color = LV_COLOR_WHITE;
bg_style.body.grad_color = LV_COLOR_HEX3(0xdddd);
bg_style.body.border.width = 0;
bg_style.text.line_space = 20;
bg_style.text.opa = LV_OPA_40;

static lv_style_t sel_style;
lv_style_copy(&sel_style, &lv_style_pretty);
sel_style.body.empty = 1;
sel_style.body.radius = LV_RADIUS_CIRCLE;
sel_style.text.color = LV_COLOR_BLUE;

/*Create a roller and apply the new styles*/
lv_obj_t *roller2 = lv_roller_create(lv_scr_act(), NULL);
lv_roller_set_options(roller2, "0\n"
                                "1\n"
                                "2\n"
                                "3\n"
                                "4\n"
                                "5\n"
                                "6\n"
                                "7\n"
                                "8\n"
                                "9");
lv_roller_set_style(roller2, LV_ROLLER_STYLE_BG, &bg_style);
lv_roller_set_selected(roller2, 3, false);
lv_roller_set_style(roller2, LV_ROLLER_STYLE_SEL, &sel_style);
lv_roller_set_visible_row_count(roller2, 3);
lv_roller_set_hor_fit(roller2, false);
lv_obj_set_width(roller2, 40);
lv_obj_set_pos(roller2, 220, 50);

```

Slider (lv_slider)

Written for v5.1

Overview

The Slider object looks like a **Bar** supplemented **with a Knob**. The Knob can be **dragged to set a value**. The Slider also can be vertical or horizontal.

To set an **initial value** use `lv_slider_set_value(slidebar, new_value)` function or `lv_slider_set_value_anim(slidebar, new_value, anim_time)` to set the value with an animation.

To specify the **range** (min, max values) the `lv_slider_set_range(slidebar, min , max)` can be used.

A **callback function** can be assigned to call when a new value is set by the user: `lv_slider_set_action(slidebar, my_action)`.

The **knob can be placed** two ways:

- inside the background on min/max values
- on the edges on min/max values

Use the `lv_slider_set_knob_in(slidebar, true/false)` to choose between the modes. (*knob_in == false* is the default)

Style usage

You can modify the slider's styles with `lv_slider_set_style(slidebar, LV_SLIDER_STYLE_..., &style)`.

- **LV_SLIDER_STYLE_BG** Style of the background. All *style.body* properties are used. The *padding* values make the slider smaller then the knob. (negative value makes is larger)
- **LV_SLIDER_STYLE_INDIC** Style of the indicator. All *style.body* properties are used. The *padding* values make the indicator smaller then the background.
- **LV_SLIDER_STYLE_KNOB** Style of the knob. The *style.body* properties are used except padding

Notes

- The Knob is not a real object it is only drawn above the Bar

Example

Default



Modified



```

/*Called when a new value id set on the slider*/
static lv_res_t slider_action(lv_obj_t * slider)
{
    printf("New slider value: %d\n", lv_slider_get_value(slider));

    return LV_RES_OK;
}

.
.
.

/*Create a default slider*/
lv_obj_t * slider1 = lv_slider_create(lv_scr_act(), NULL);
lv_obj_set_size(slider1, 160, 30);
lv_obj_align(slider1, NULL, LV_ALIGN_IN_TOP_RIGHT, -30, 30);
lv_slider_set_action(slider1, slider_action);
lv_bar_set_value(slider1, 70);

/*Create a label right to the slider*/
lv_obj_t * slider1_label = lv_label_create(lv_scr_act(), NULL);
lv_label_set_text(slider1_label, "Default");
lv_obj_align(slider1_label, slider1, LV_ALIGN_OUT_LEFT_MID, -20, 0);

/*Create a bar, an indicator and a knob style*/
static lv_style_t style_bg;
static lv_style_t style_indic;
static lv_style_t style_knob;

lv_style_copy(&style_bg, &lv_style_pretty);
style_bg.body.main_color = LV_COLOR_BLACK;
style_bg.body.grad_color = LV_COLOR_GRAY;
style_bg.body.radius = LV_RADIUS_CIRCLE;
style_bg.body.border.color = LV_COLOR_WHITE;

lv_style_copy(&style_indic, &lv_style_pretty);
style_indic.body.grad_color = LV_COLOR_GREEN;
style_indic.body.main_color = LV_COLOR_LIME;
style_indic.body.radius = LV_RADIUS_CIRCLE;
style_indic.body.shadow.width = 10;
style_indic.body.shadow.color = LV_COLOR_LIME;
style_indic.body.padding.hor = 3;
style_indic.body.padding.ver = 3;

lv_style_copy(&style_knob, &lv_style_pretty);
style_knob.body.radius = LV_RADIUS_CIRCLE;
style_knob.body.opa = LV_OPA_70;
style_knob.body.padding.ver = 10 ;

/*Create a second slider*/
lv_obj_t * slider2 = lv_slider_create(lv_scr_act(), slider1);
lv_slider_set_style(slider2, LV_SLIDER_STYLE_BG, &style_bg);
lv_slider_set_style(slider2, LV_SLIDER_STYLE_INDIC, &style_indic);
lv_slider_set_style(slider2, LV_SLIDER_STYLE_KNOB, &style_knob);
lv_obj_align(slider2, slider1, LV_ALIGN_OUT_BOTTOM_MID, 0, 30); /*Align below 'bar1'*/

/*Create a second label*/
lv_obj_t * slider2_label = lv_label_create(lv_scr_act(), slider1_label);
lv_label_set_text(slider2_label, "Modified");
lv_obj_align(slider2_label, slider2, LV_ALIGN_OUT_LEFT_MID, -30, 0);

```

Spinbox (lv_spinbox)

Escrito para v5.3

- Esto es un trabajo en progreso


Visión general

Uso de estilos

Notas

- nota

Ejemplo

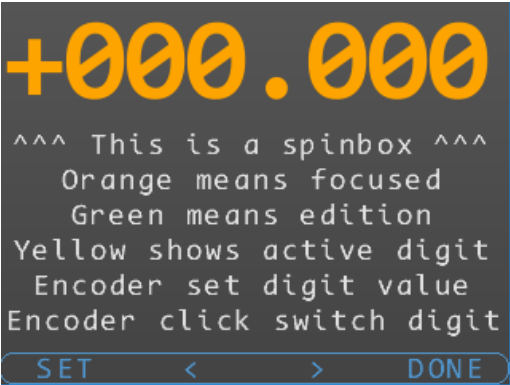

```
static void spinbox_value_changed(lv_obj_t * spinbox)
{

}

.
.
.

spinbox = lv_spinbox_create(lv_scr_act(), NULL);
lv_spinbox_set_style(spinbox, LV_SPINBOX_STYLE_BG, &spinBoxStyle);
lv_spinbox_set_style(spinbox, LV_SPINBOX_STYLE_CURSOR, &spinBoxCursorStyle);
lv_obj_set_size(spinbox, LV_HOR_RES, 80);
lv_obj_align(spinbox, NULL, LV_ALIGN_IN_TOP_LEFT, 4, 0);
```

Switch (lv_sw)

Escrito para v5.1, revision 2

Visión general

El Switch puede ser usado para **encender/apagar** algo. Se ven como un slider pequeño. El estado del switch puede ser cambiado con:

- Click en el.
- Sliding en el.
- Usando las funciones `lv_sw_on(sw)` y `lv_sw_off(sw)`.

Puedes asignar una **función de callback** para que sea llamada cuando el usuario usa el switch: `lv_sw_set_action(sw, my_action)`.

Nuevo en v5.3: Los Switched pueden ser animados llamando `lv_sw_set_anim_time(sw, anim_ms)`.

Uso de estilos

Puedes modificar el estilo del Switch con `lv_sw_set_style(sw, LV_SW_STYLE_..., &style)`.

- **LV_SW_STYLE_BG** Estilo del fondo. All *style.body* properties are used. Los valores *padding* hacen al Switch más pequeño que la perilla (los valores negativos lo hacen más grande).
- **LV_SW_STYLE_INDIC** Estilo del indicador. Todas las propiedades *style.body* son usadas. Los valores *padding* hacen al indicador más pequeño que el fondo.
- **LV_SW_STYLE_KNOB_OFF** Estilo de la perilla cuando el switch esta apagado. Las propiedades *style.body* son usadas excepto padding.
- **LV_SW_STYLE_KNOB_ON** Estilo de la perilla cuando el switch esta encendido. Las propiedades *style.body* son usadas excepto padding.

Notas

- La perilla no es un objeto real, solo es dibujado sobre la barra.

Ejemplo



```

/*Crea estilos para el switch*/
static lv_style_t bg_style;
static lv_style_t indic_style;
static lv_style_t knob_on_style;
static lv_style_t knob_off_style;
lv_style_copy(&bg_style, &lv_style_pretty);
bg_style.body.radius = LV_RADIUS_CIRCLE;

lv_style_copy(&indic_style, &lv_style_pretty_color);
indic_style.body.radius = LV_RADIUS_CIRCLE;
indic_style.body.main_color = LV_COLOR_HEX(0x9fc8ef);
indic_style.body.grad_color = LV_COLOR_HEX(0x9fc8ef);
indic_style.body.padding.hor = 0;
indic_style.body.padding.ver = 0;

lv_style_copy(&knob_off_style, &lv_style_pretty);
knob_off_style.body.radius = LV_RADIUS_CIRCLE;
knob_off_style.body.shadow.width = 4;
knob_off_style.body.shadow.type = LV_SHADOW_BOTTOM;

lv_style_copy(&knob_on_style, &lv_style_pretty_color);
knob_on_style.body.radius = LV_RADIUS_CIRCLE;
knob_on_style.body.shadow.width = 4;
knob_on_style.body.shadow.type = LV_SHADOW_BOTTOM;

/*Crea un switch y aplica los estilos*/
lv_obj_t *sw1 = lv_sw_create(lv_scr_act(), NULL);
lv_sw_set_style(sw1, LV_SW_STYLE_BG, &bg_style);
lv_sw_set_style(sw1, LV_SW_STYLE_INDIC, &indic_style);
lv_sw_set_style(sw1, LV_SW_STYLE_KNOB_ON, &knob_on_style);
lv_sw_set_style(sw1, LV_SW_STYLE_KNOB_OFF, &knob_off_style);
lv_obj_align(sw1, NULL, LV_ALIGN_CENTER, 0, -50);

/*Copia el primer switch y lo enciende*/
lv_obj_t *sw2 = lv_sw_create(lv_scr_act(), sw1);
lv_sw_set_on(sw2);
lv_obj_align(sw2, NULL, LV_ALIGN_CENTER, 0, 50);

```


Tab view (lv_tabview)

Written for v5.1

Overview

The Tab view object can be used to **organize content in tabs**. You can **add a new tab** with `lv_tabview_add_tab(tabview, "Tab name")`. It will return with a pointer to a [Page](#) object where you can add the tab's content.

To **select a tab** you can:

- Click on it on the header part
- Slide horizontally
- Use `lv_tabview_set_tab_act(tabview, id, anim_en)` function

The **manual sliding** can be disabled with `lv_tabview_set_sliding(tabview, false)`.

The **animation time** is adjusted by `lv_tabview_set_anim_time(tabview, anim_time)`.

A **callback function** can be assigned to **tab load** event with `lv_tabview_set_tab_load_action(tabview, action)`. The callback function need to have the following prototype:

```
void callback(lv_obj_t * tabview, uint16_t act_id);
```

Where `_act_id_` means tab which will be loaded. In the action `lv_tabview_get_tab_act(tabview)` will give the id of the old tab.

Style usage

Use `lv_tabview_set_style(tabview, LV_TABVIEW_STYLE_..., &style)` to set a new style for an element of the tab view:

- **LV_TABVIEW_STYLE_BG** main background which uses all *style.body* properties (default: `lv_style_plain`)
- **LV_TABVIEW_STYLE_INDIC** a thin rectangle on the top to indicate the current tab. Uses all *style.body* properties. It height comes from *body.padding.inner* (default: `_lv_style_plain_color_`)
- **LV_TABVIEW_STYLE_BTN_BG** style of the tab buttons' background. Uses all *style.body* properties. The header height will be set automatically considering *body.padding.ver* (default: `_lv_style_transp_`)
- **LV_TABVIEW_STYLE_BTN_REL** style of released tab buttons. Uses all *style.body* properties. (default: `_lv_style_tbn_rel_`)
- **LV_TABVIEW_STYLE_BTN_PR** style of released tab buttons. Uses all *style.body* properties. (default: `_lv_style_tbn_rel_`)
- **LV_TABVIEW_STYLE_BTN_TGL_REL** style of toggled released tab buttons. Uses all *style.body* properties. (default: `_lv_style_tbn_rel_`)
- **LV_TABVIEW_STYLE_BTN_TGL_PR** style of toggled pressed tab buttons. Uses all *style.body* properties. (default: `_lv_style_btn_tgl_pr_`)

Notes

Example



This the first tab

If the content
become too long
the tab become
scrollable

```
/*Create a Tab view object*/
lv_obj_t *tabview;
tabview = lv_tabview_create(lv_scr_act(), NULL);

/*Add 3 tabs (the tabs are page (lv_page) and can be scrolled*/
lv_obj_t *tab1 = lv_tabview_add_tab(tabview, "Tab 1");
lv_obj_t *tab2 = lv_tabview_add_tab(tabview, "Tab 2");
lv_obj_t *tab3 = lv_tabview_add_tab(tabview, "Tab 3");

/*Add content to the tabs*/
lv_obj_t * label = lv_label_create(tab1, NULL);
lv_label_set_text(label, "This the first tab\n\n"
                        "If the content\n"
                        "become too long\n"
                        "the tab become\n"
                        "scrollable\n\n");

label = lv_label_create(tab2, NULL);
lv_label_set_text(label, "Second tab");

label = lv_label_create(tab3, NULL);
lv_label_set_text(label, "Third tab");
```

Area de texto (lv_ta)

Written for v5.1

Overview

The Text Area is a **page** with a **label** and a **cursor** on it. You can **insert text or characters** to the current cursor position with:

- `lv_ta_add_char(ta, 'c')`
- `lv_ta_add_text(ta, "insert this text")`

The `lv_ta_set_text(ta, "New text")` **changes the whole text**.

To **delete a character** from the left of the current cursor position use `lv_ta_del()`.

The cursor position can be modified directly like `lv_ta_set_cursor_pos(ta, 10)` or by stepping it:

- `lv_ta_cursor_right(ta)`
- `lv_ta_cursor_left(ta)`
- `lv_ta_cursor_up(ta)`
- `lv_ta_cursor_down(ta)`

There are several cursor types. You can set one of them with: `lv_ta_set_cursor_type(ta, LV_CURSOR_...)`

- LV_CURSOR_NONE
- LV_CURSOR_LINE
- LV_CURSOR_BLOCK
- LV_CURSOR_OUTLINE
- LV_CURSOR_UNDERLINE

You can 'OR' LV_CURSOR_HIDDEN_ to any type to hide the cursor.

The Text area can be configured to be one lined with `lv_ta_set_one_line(ta, true)`.

The text area supports **password mode**. It can be enabled with `lv_ta_set_pwd_mode(ta, true)`.

Style usage

Use `lv_ta_set_style(page, LV_TA_STYLE_..., &style)` to set a new style for an element of the text area:

- **LV_TA_STYLE_BG** background's style which uses all *style.body* properties. The label also uses this *style.label* from this style. (default: `lv_style_pretty`)
- **LV_TA_STYLE_SB** scrollbar's style which uses all *style.body* properties (default: `lv_style_transp`)
- **LV_TA_STYLE_CURSOR** cursor style. If NULL then the library sets us a style automatically according to the label color and font
 - LV_CURSOR_LINE: a *style.line.width* wide line but drawn as a rectangle as *style.body*. Hor. and ver. padding makes an offset on the cursor
 - LV_CURSOR_BLOCK: a rectangle as *style.body* Hor. and ver. padding makes the rectangle larger
 - LV_CURSOR_OUTLINE: an empty rectangle (just a border) as *style.body* Hor. and ver. padding makes the rectangle larger
 - LV_CURSOR_UNDERLINE: a *style.line.width* wide line but drawn as a rectangle as *style.body*. Hor. and ver. padding makes an offset on the cursor

Notes

- In password mode `lv_ta_get_text(ta)` gives the real text and not the asterisk characters

Example

A long text in a
Text Area
You can scroll it
if the text is long

*****|

```
/*Create a scroll bar style*/
static lv_style_t style_sb;
lv_style_copy(&style_sb, &lv_style_plain);
style_sb.body.main_color = LV_COLOR_BLACK;
style_sb.body.grad_color = LV_COLOR_BLACK;
style_sb.body.border.color = LV_COLOR_WHITE;
style_sb.body.border.width = 1;
style_sb.body.border.opa = LV_OPA_70;
style_sb.body.radius = LV_RADIUS_CIRCLE;
style_sb.body.opa = LV_OPA_60;

/*Create a normal Text area*/
lv_obj_t * ta1 = lv_ta_create(lv_scr_act(), NULL);
lv_obj_set_size(ta1, 200, 100);
lv_obj_align(ta1, NULL, LV_ALIGN_CENTER, 0, - LV_DPI / 2);
lv_ta_set_style(ta1, LV_TA_STYLE_SB, &style_sb);
lv_ta_set_cursor_type(ta1, LV_CURSOR_BLOCK);
lv_ta_set_text(ta1, "A text in a Text Area\n"
                  "You can scroll it if the text is long enough.");
lv_ta_set_cursor_pos(ta1, 2);
lv_ta_add_text(ta1, "long ");

/*Apply the scroll bar style*/
/*Set an initial text*/
/*Set the cursor position*/
/*Insert a word at the current cursor position*/

static lv_style_t style_bg;
lv_style_copy(&style_bg, &lv_style_pretty);
style_bg.body.shadow.width = 8;
style_bg.text.color = LV_COLOR_MAKE(0x30, 0x60, 0xd0);

/*Blue label*/

/*Create a one lined test are with password mode*/
lv_obj_t * ta2 = lv_ta_create(lv_scr_act(), ta1);
lv_obj_align(ta2, ta1, LV_ALIGN_OUT_BOTTOM_MID, 0, 50);
lv_ta_set_style(ta2, LV_TA_STYLE_BG, &style_bg);
lv_ta_set_one_line(ta2, true);
lv_ta_set_cursor_type(ta2, LV_CURSOR_LINE);
lv_ta_set_pwd_mode(ta2, true);
lv_ta_set_text(ta2, "Password");

/*Apply the background style*/
```

Ventana (lv_window)

Written for v5.1

Overview

The windows are one of the **most complex** container-like objects. They are built from two main parts: a **header** [Container](#) on the top and a [Page](#) for the **content** below the header.

On the header there is **title** which can be modified by: `lv_win_set_title(win, "New title")`. The title always inherits the style of the header.

You can add **control buttons** to the right side of the header with: `lv_win_add_btn(win, "U:/close", my_close_action)`. The second parameter is an image file path, the third parameter is a function to call when the button is released. You can use **symbols** as images as well like:

```
lv_win_add_btn(win, SYMBOL_CLOSE, my_close_action).
```

You can modify the **size of the control buttons** with the `lv_win_set_btn_size(win, new_size)` function.

The scrollbar behavior can be set by `lv_win_set_sb_mode(win, LV_SB_MODE_...)`.

To set a layout for the content use `lv_win_set_layout(win, LV_LAYOUT_...)`.


Style usage

Use `lv_win_set_style(win, LV_WIN_STYLE_..., &style)` to set a new style for an element of the window:

- **LV_WIN_STYLE_BG** main background which uses all *style.body* properties (header and content page are placed on it) (default: lv_style_plain)
- **LV_WIN_STYLE_CONTENT_BG** content page's background which uses all *style.body* properties (default: lv_style_transp)
- **LV_WIN_STYLE_CONTENT_SCRL** content page's scrollable part which uses all *style.body* properties (default: lv_style_transp)
- **LV_WIN_STYLE_SB** scroll bar's style which uses all *style.body* properties. hor/ver* padding sets the scrollbars' padding respectively and the inner padding sets the scrollbar's width. (default: lv_style_pretty_color)
- **LV_WIN_STYLE_HEADER** header's style which uses all *style.body* properties (default: lv_style_plain_color)
- **LV_WIN_STYLE_BTN_REL** released button's style (on header) which uses all *style.body* properties (default: lv_style_btn_rel)
- **LV_WIN_STYLE_BTN_PR** released button's style (on header) which uses all *style.body* properties (default: lv_style_btn_pr)

Notes

Example

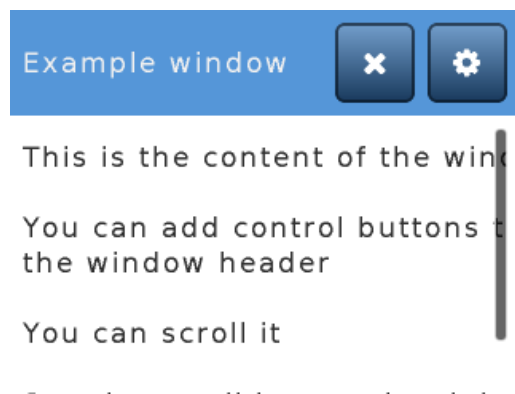

```

/*Create a scroll bar style*/
static lv_style_t style_sb;
lv_style_copy(&style_sb, &lv_style_plain);
style_sb.body.main_color = LV_COLOR_BLACK;
style_sb.body.grad_color = LV_COLOR_BLACK;
style_sb.body.border.color = LV_COLOR_WHITE;
style_sb.body.border.width = 1;
style_sb.body.border.opa = LV_OPA_70;
style_sb.body.radius = LV_RADIUS_CIRCLE;
style_sb.body.opa = LV_OPA_60;

/*Create a window*/
lv_obj_t * win = lv_win_create(lv_scr_act(), NULL);
lv_win_set_title(win, "Example window");
lv_win_set_style(win, LV_WIN_STYLE_SB, &style_sb);

/*Set the title*/
/*Set the scroll bar style*/

/*Add control button to the header*/
lv_win_add_btn(win, SYMBOL_SETTINGS, my_setup_action);
lv_win_add_btn(win, SYMBOL_CLOSE, lv_win_close_action);

/*Add a setup button*/
/*Add close button and use built-in close action*/

/*Add some dummy content*/
lv_obj_t * txt = lv_label_create(win, NULL);
lv_label_set_text(txt, "This is the content of the window\n\n"
    "You can add control buttons to\nthe window header\n\n"
    "You can scroll it\n\n"
    "See the scroll bar on the right!");

```