Cucumber Report

Start : Oct 13, 9:21:59.453 am	End : Oct 13, 9:24:15.009 am	Duration : 2 m 15.556 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 3 FAILED - 1 SKIPPED - 0

Features: 1

Scenarios: 1

Steps: 4

Pass %: 0 %

Pass %: 0 %

Pass %: 75 %

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Login Functionality	2 m 15.556 s	1	0	1	0	4	3	1	0

#	Feature Name	Scenario Name
1	*Login Functionality*	*Successful login with valid credentials*

TAG	Scenario				Feature			
Name	**T**	**P**	**F**	**S**	**T**	**P**	**F**	**S**
@SOLO	*1*	*0*	*1*	*0*	*1*	*0*	*1*	*0*

#	Feature Name	T	P	F	S	Duration
1	Login Functionality	1	0	1	0	2 m 15.556 s
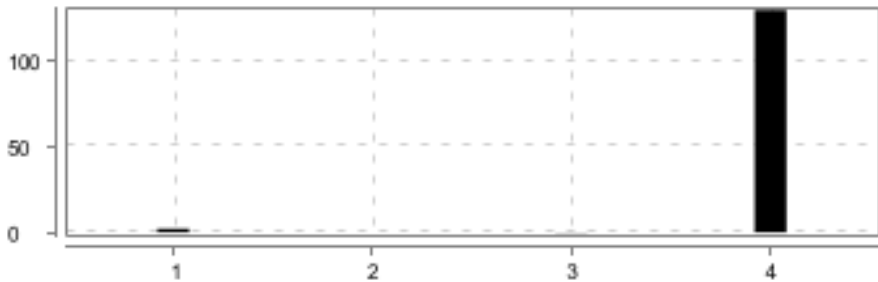
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login Functionality	Successful login with valid credentials	4	3	1	0	2 m 15.552 s

Login Functionality

FAILED	DURATION - 2 m 15.556 s	Scenarios		Steps	
		Total - 1		Total - 4	
/ 9:21:59.453 am // 9:24:15.009 am /		Pass - 0		Pass - 3	
		Fail - 1	1	Fail - 1	4
		Skip - 0		Skip - 0	

Successful login with valid credentials

FAILED	DURATION - 2 m 15.552 s		Steps	
/ 9:21:59.456 am // 9:24:15.008 am /			Total - 4	
			Pass - 3	
Login Functionality			Fail - 1	4
@SOLO			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given the user is on the login page	PASSED	2.079 s
2	When the user enters valid username "test02@yopmail.com"	PASSED	0.099 s
3	And the user enters valid password "pass123456"	PASSED	0.125 s
4	And the user clicks the login button	FAILED	2 m 9.421 s

	org.openqa.selenium.WebDriverException: unknown error: cannot determine loading status from disconnected: unable to send message to renderer (Session info: MicrosoftEdge=117.0.2045.60) Build info: version: '4.9.0', revision: 'd7057100a6' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [2dfbebbc7e2d0ca20c6b882b785f0ad0, clickElement {id=B7FB5591DE177C7B96D2249334BD9156_element_33}] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 117.0.2045.60, fedcm:accounts: true, ms:edgeOptions: {debuggerAddress: localhost:58574}, msedge: {msedgedriverVersion: 117.0.2045.60 (a31cef5dc4c1..., userDataDir: C:\Users\ANGELI~1\AppData\L...}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:58574/devtoo..., se:cdpVersion: 117.0.2045.60, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Element: [[EdgeDriver: msedge on WINDOWS (2dfbebbc7e2d0ca20c6b882b785f0ad0)] -> xpath: //button[normalize-space()='Login']] Session ID: 2dfbebbc7e2d0ca20c6b882b785f0ad0
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:257) at org.openqa.selenium.remote.RemoteWebElement.click(RemoteWebElement.java:78) at Pages.login.clickOnLogin(login.java:44) at stepsdefinitions.LoginSteps.theUserClicksTheLoginButton(LoginSteps.java:45) at ?.the user clicks the login button(file:///C:/Users/AngelicaEstanol/SeleniumCucumber/src/test/resources/AppFeatures/login.feature:26) * Not displayable characters are replaced by '?'.		
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.008 s
	org.openqa.selenium.WebDriverException: disconnected: not connected to DevTools (failed to check if window was closed: disconnected: not connected to DevTools) (Session info: MicrosoftEdge=117.0.2045.60) Build info: version: '4.9.0', revision: 'd7057100a6' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [2dfbebbc7e2d0ca20c6b882b785f0ad0, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 117.0.2045.60, fedcm:accounts: true, ms:edgeOptions: {debuggerAddress: localhost:58574}, msedge: {msedgedriverVersion: 117.0.2045.60 (a31cef5dc4c1..., userDataDir: C:\Users\ANGELI~1\AppData\L...}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:58574/devtoo..., se:cdpVersion: 117.0.2045.60, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 2dfbebbc7e2d0ca20c6b882b785f0ad0 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at AppHooks.ApplicationHooks.tearDown(ApplicationHooks.java:48)		