




SetUp

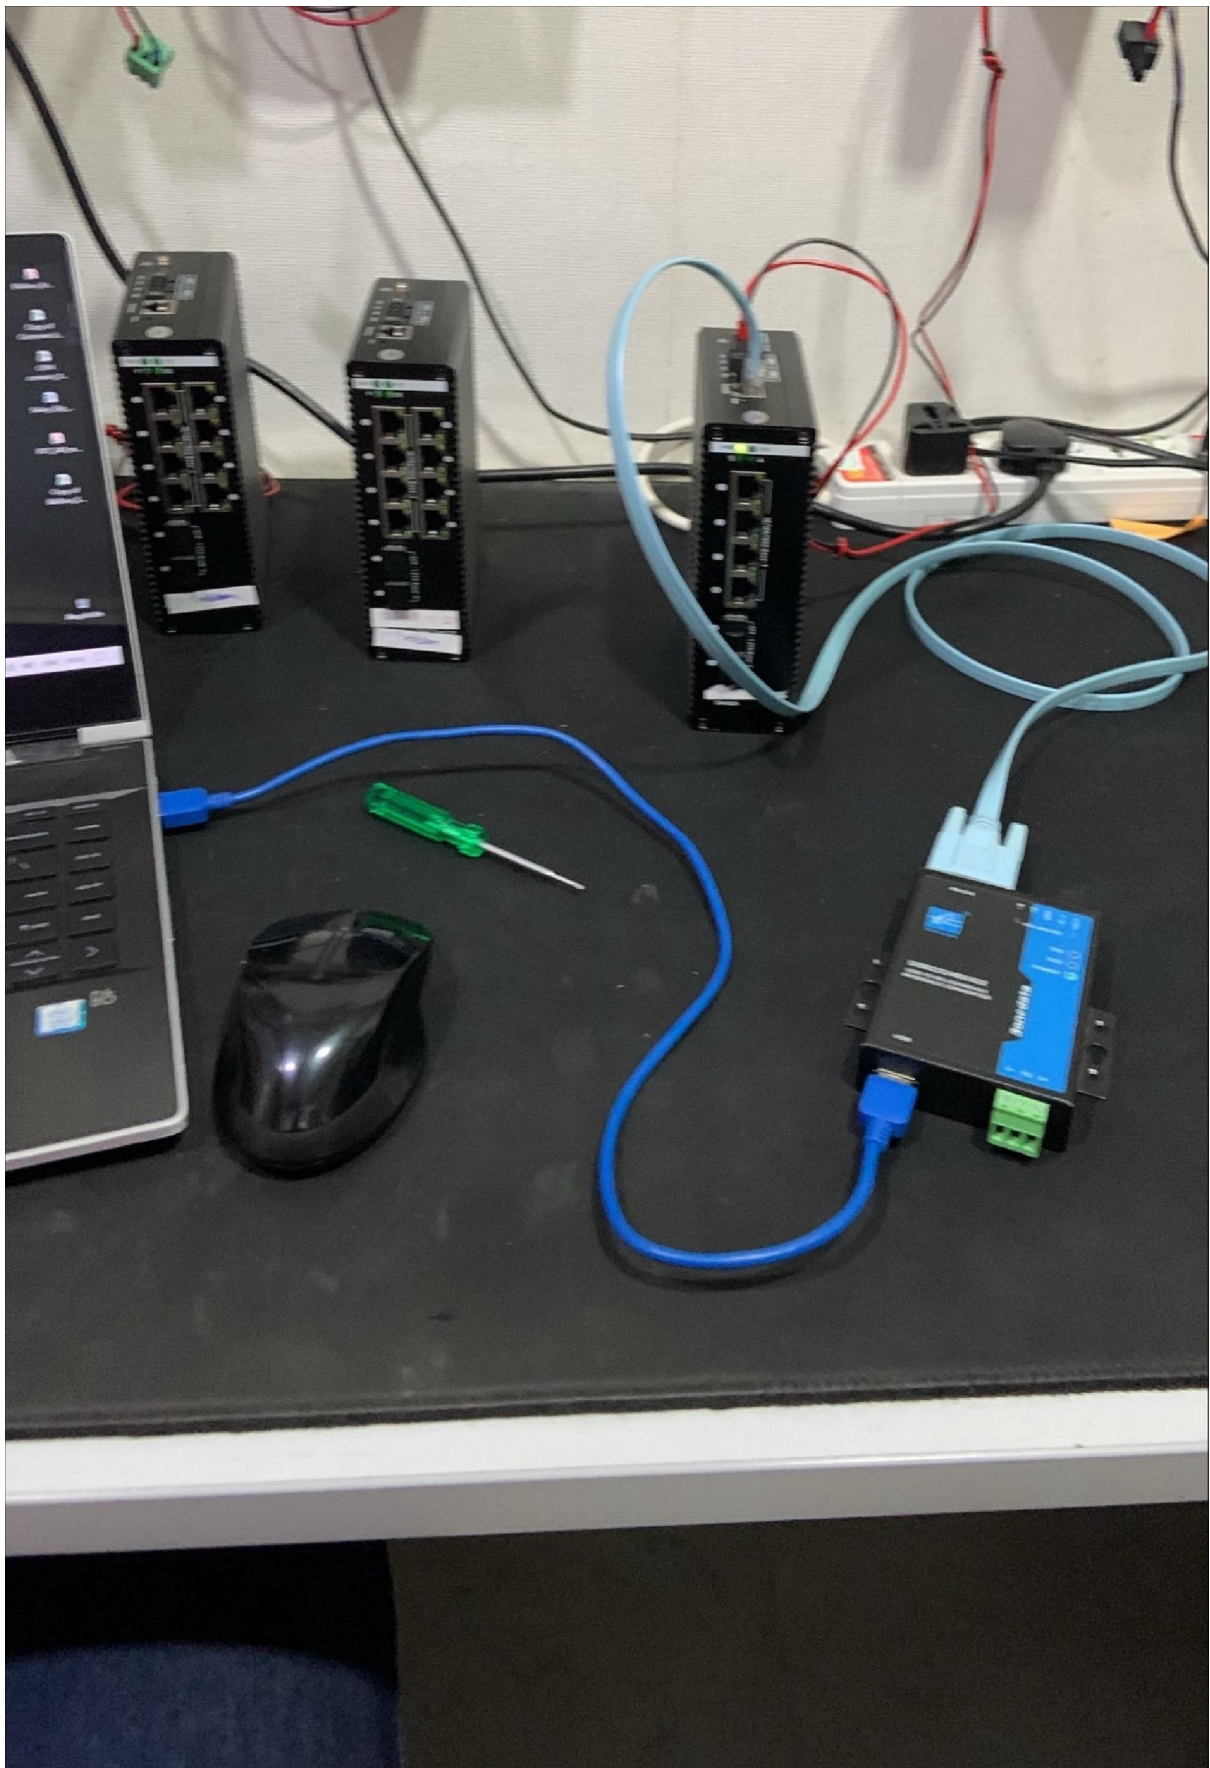

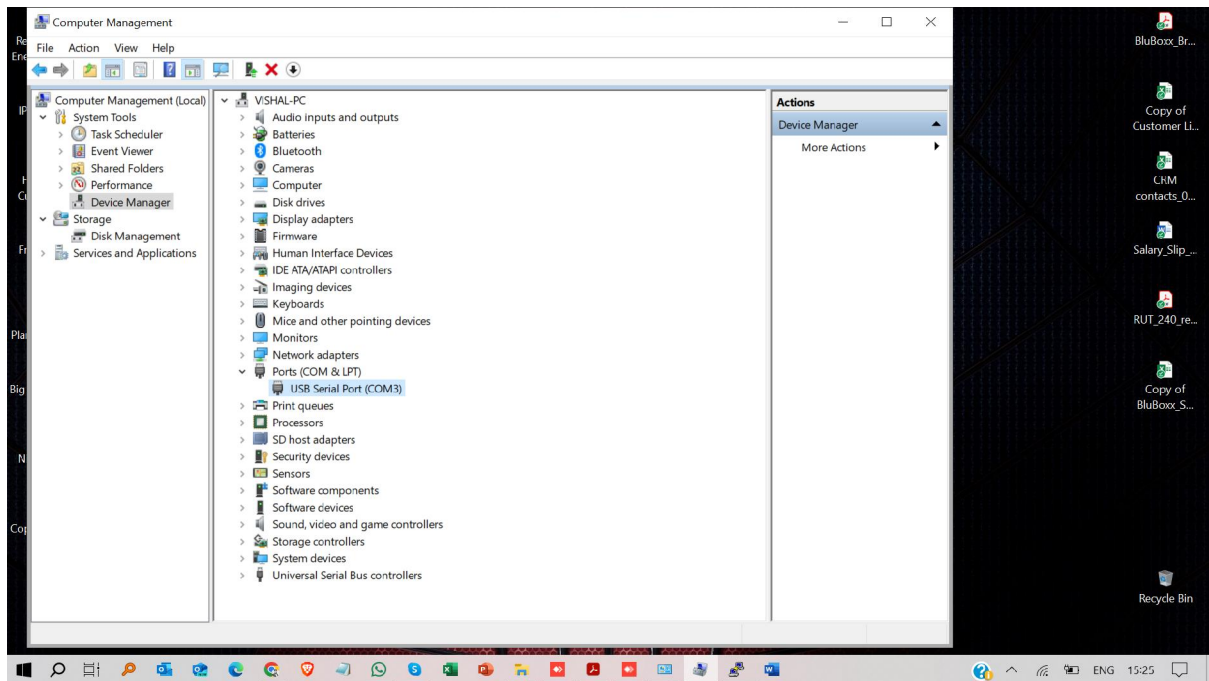


Connect USB to Serial converter to PC check the COM port assigned,

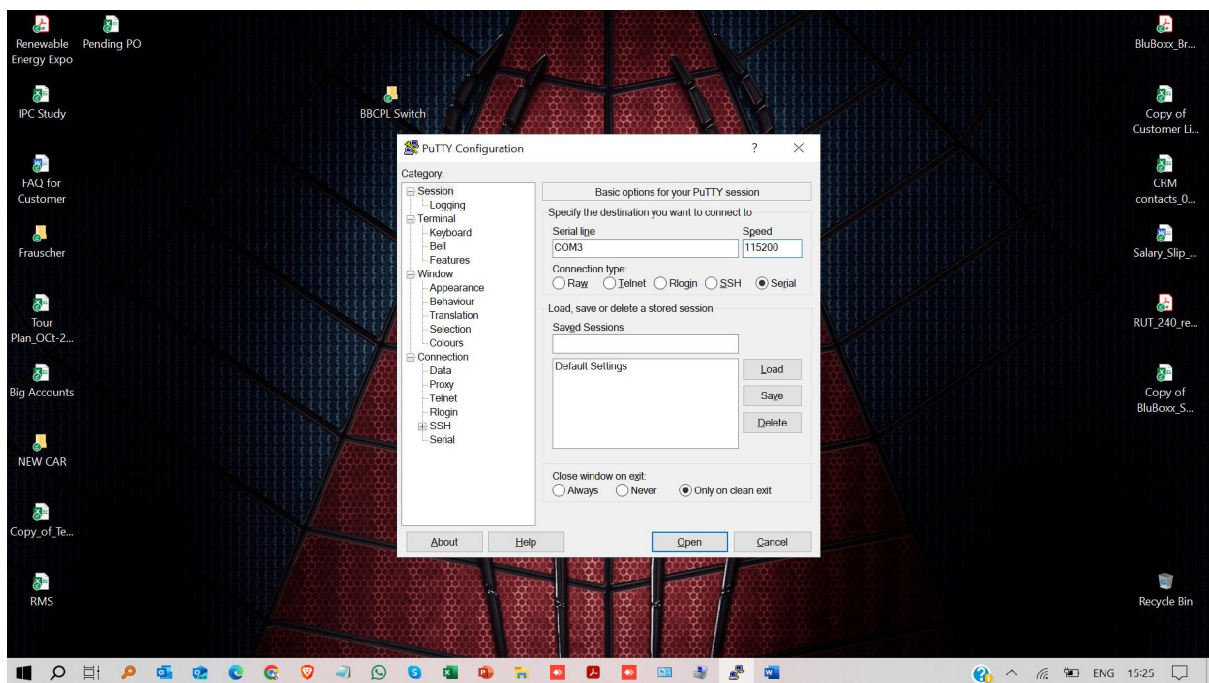


OPEN Putty and select serial and the assigned COM port and speed. Speed for BluBoxx sw is 115200.


Click open,

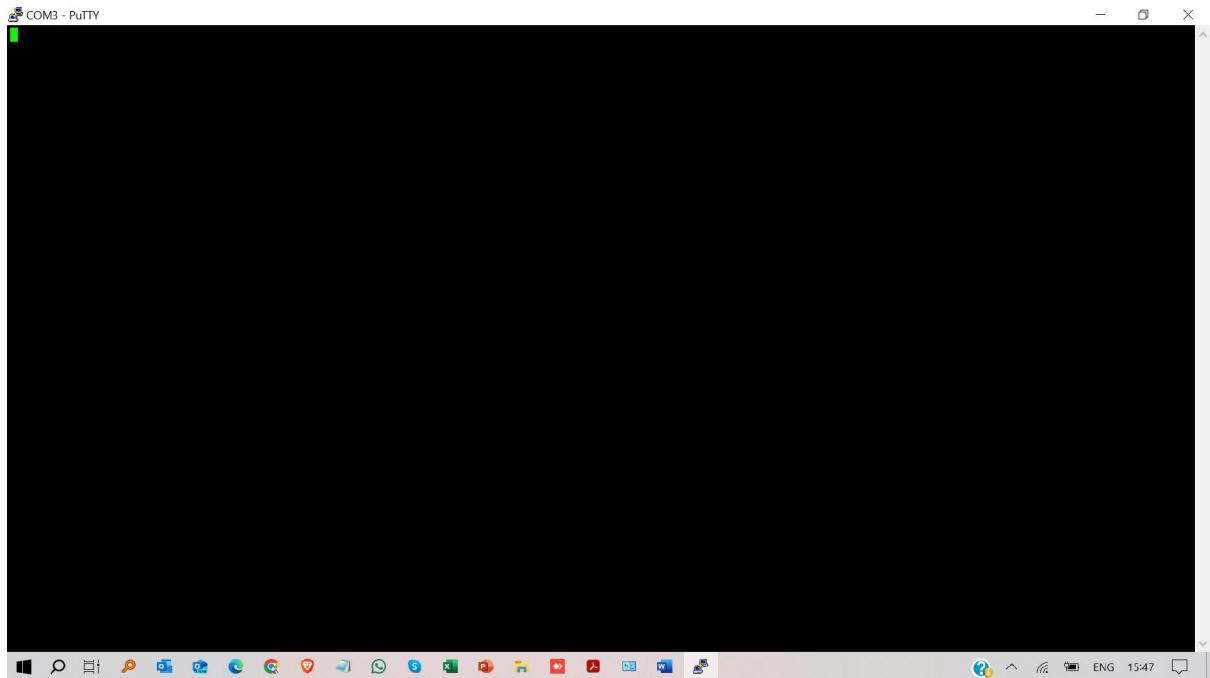

Hit Enter

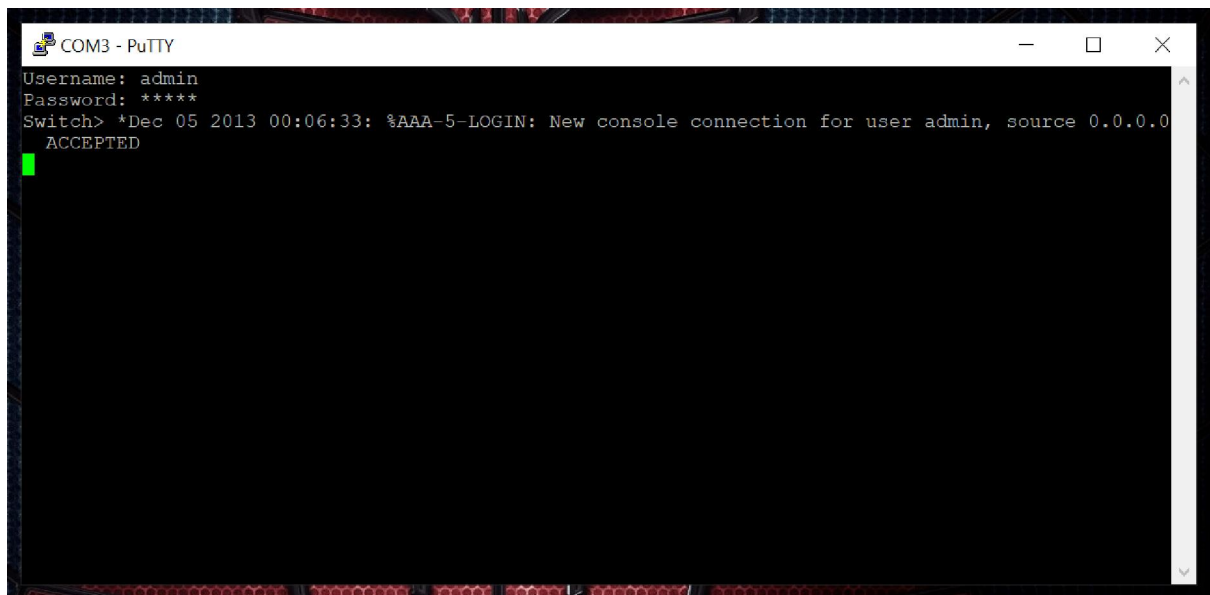


Username: admin Password: admin Hit Enter again

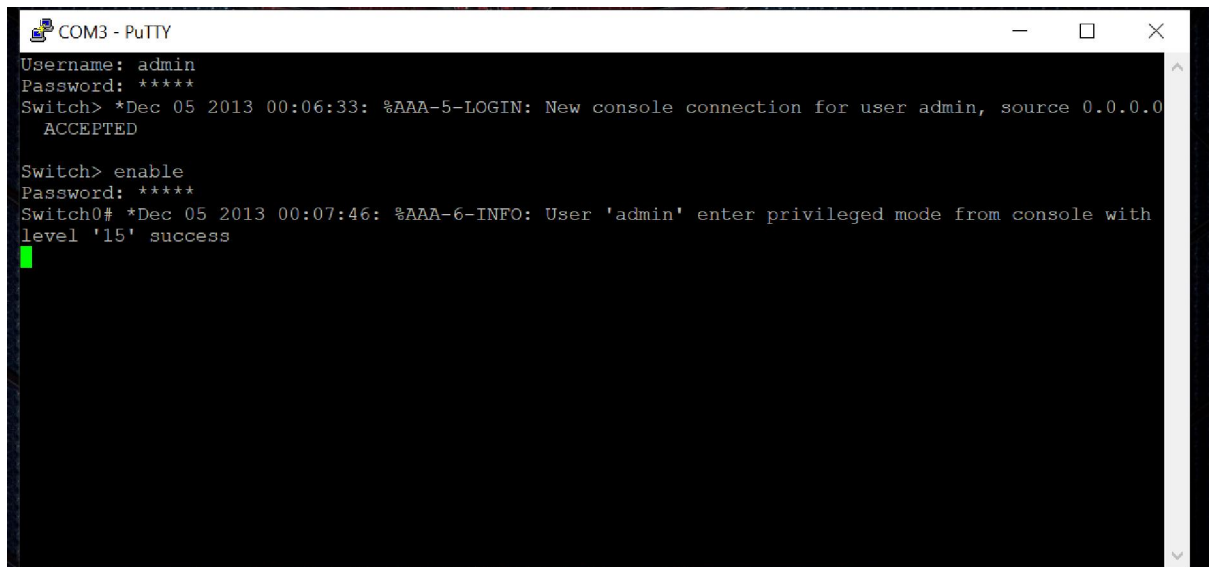

```
COM3 - PuTTY
Username: admin
Password: *****
Switch> *Dec 05 2013 00:06:33: %AAA-5-LOGIN: New console connection for user admin, source 0.0.0.0
ACCEPTED

Switch> enable
Password: *****
Switch0# *Dec 05 2013 00:07:46: %AAA-6-INFO: User 'admin' enter privileged mode from console with
level '15' success
█
```

It will ask for password. Password: admin, hit Enter

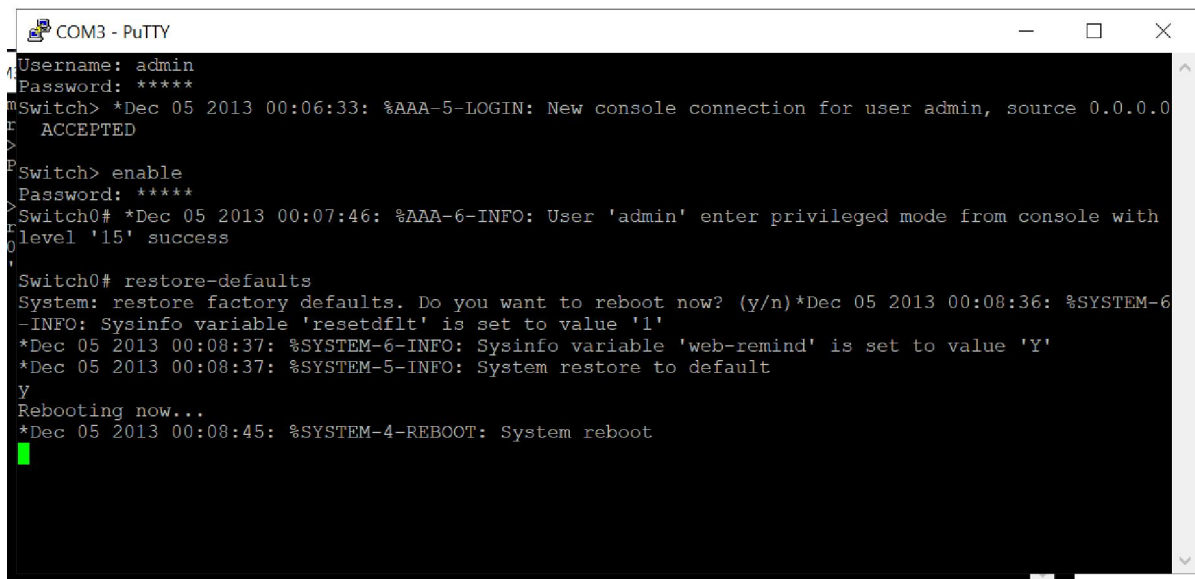

```
COM3 - PuTTY
Username: admin
Password: *****
Switch> *Dec 05 2013 00:06:33: %AAA-5-LOGIN: New console connection for user admin, source 0.0.0.0
ACCEPTED

Switch> enable
Password: *****
Switch0# *Dec 05 2013 00:07:46: %AAA-6-INFO: User 'admin' enter privileged mode from console with
level '15' success

Switch0# restore-defaults
System: restore factory defaults. Do you want to reboot now? (y/n)*Dec 05 2013 00:08:36: %SYSTEM-6-
-INFO: Sysinfo variable 'resetdflt' is set to value '1'
*Dec 05 2013 00:08:37: %SYSTEM-6-INFO: Sysinfo variable 'web-remind' is set to value 'Y'
*Dec 05 2013 00:08:37: %SYSTEM-5-INFO: System restore to default
y
Rebooting now...
*Dec 05 2013 00:08:45: %SYSTEM-4-REBOOT: System reboot
█
```

Give command **restore-defaults** then hit enter

Then type y it will reboot.

```
COM3 - PuTTY
Init Istack Factory Default....OK
===== Factory Defaults Initial [Done] =====

===== Generating Startup Config File [Start] =====
static route aging success
static route ping success
System Post Initial....OK
Port Post Initial....OK
Init Local User Default Entry....OK
Init VLAN Default Entry....OK
Init Voice VLAN OUI Default Entry....OK
Init Surveillance VLAN OUI Default Entry....OK
Generating file "startup-config.cfg"....OK
===== Generating Startup Config File [Done] =====

===== Backup Config File Synchronize [Start] =====
===== Backup Config File Synchronize [end] =====
*Dec 05 2013 00:00:32: %SYSTEM-5-INFO: Logging is enabled
*Dec 05 2013 00:00:32: %SYSTEM-5-RESTART: System restarted - Warm Start
*Dec 05 2013 00:00:33: %SYSTEM-6-INFO: Sysinfo variable 'resetdefault' is set to value '0'
webs: Listening for HTTP requests at address 127.0.0.1
SSL: Initializing SSL
Press any key to continue
█
```

Switch has been factory reset press any key to continue

```
COM3 - PuTTY
static route aging success
static route ping success
System Post Initial....OK
Port Post Initial....OK
Init Local User Default Entry....OK
Init VLAN Default Entry....OK
Init Voice VLAN OUI Default Entry....OK
Init Surveillance VLAN OUI Default Entry....OK
Generating file "startup-config.cfg"....OK
===== Generating Startup Config File [Done] =====

===== Backup Config File Synchronize [Start] =====
===== Backup Config File Synchronize [end] =====
*Dec 05 2013 00:00:32: %SYSTEM-5-INFO: Logging is enabled
*Dec 05 2013 00:00:32: %SYSTEM-5-RESTART: System restarted - Warm Start
*Dec 05 2013 00:00:33: %SYSTEM-6-INFO: Sysinfo variable 'resetdefault' is set to value '0'
webs: Listening for HTTP requests at address 127.0.0.1
SSL: Initializing SSL
Press any key to continue
Username: admin
Password: *****
Switch> *Dec 05 2013 00:01:38: %AAA-5-LOGIN: New console connection for user admin, source 0.0.0.0
ACCEPTED
█
```