

POINTERS

POINTERS

Types


manual pointers

1. manually defined requiring explicit memory management
2. easy to make mistakes, difficult to troubleshoot
3. legacy approach for implementing dynamic memory
4. requisite background knowledge for a C++ developer
5. requires a thorough understanding of memory management

smart pointers

1. automatic memory management
2. easy to implement
3. modern method of implementing dynamic memory in C++
4. requires a wide variety of C++ knowledge to properly appreciate their use including template programming, STL, move semantics, R-value references etc.
5. not covered in ET580, recommended for future study

REVIEW: REFERENCES

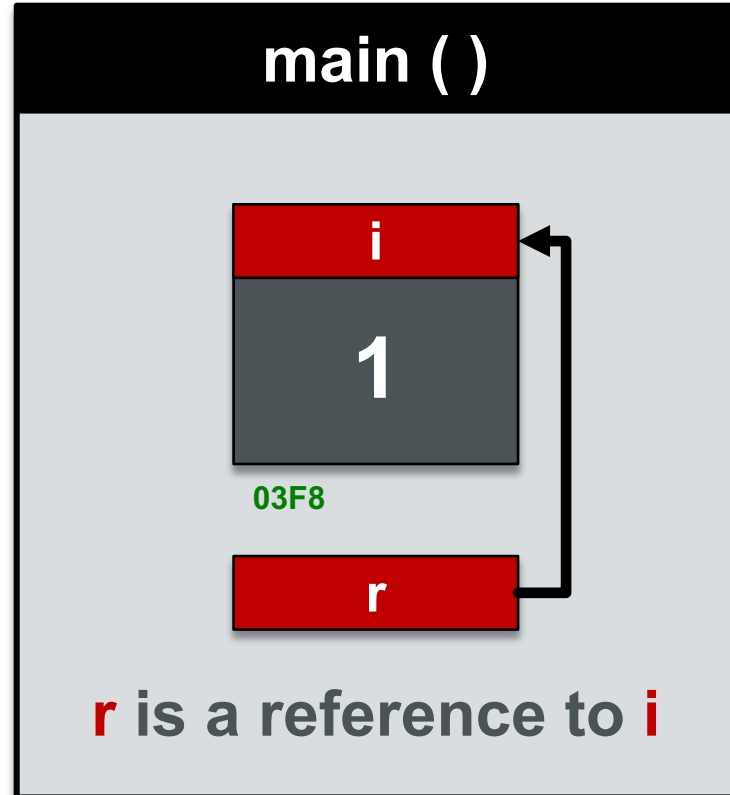


```
cout << &i;    prints address 0x03F8
cout << &r;    prints address 0x03F8
cout << i;     prints 1
cout << r;     prints 1
```

Variables `i` and `r` have the same memory address because they are different **aliases** or **names** for the same memory location

Therefore, they have the same value `1`

REVIEW: POINTERS

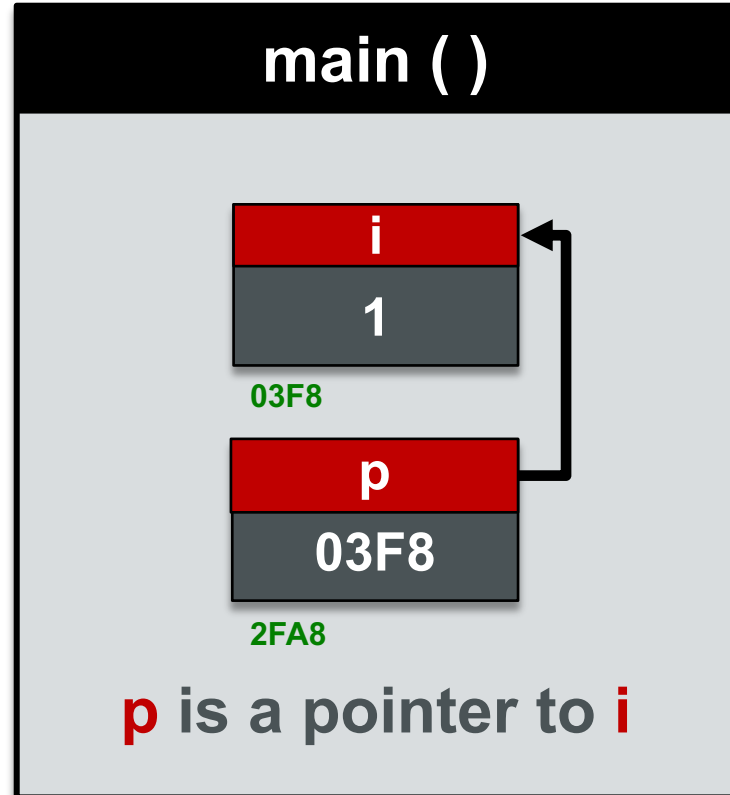

```
cout << &i;    prints address 0x03F8
cout << &p;    prints address 0x2FA8
cout << i;     prints 1
cout << p;     prints 0x03F8
```

The pointer **p** stores the memory address of **i**. Variables **i** and **p** have the different memory address because they are different variables.

REFERENCES VS. POINTERS

Reference

an additional name (alias) for an existing variable

Pointer

a variable that stores the memory address of another variable

Example

```
int i=5;
```

initialize integer variable **i** with the value **5**

```
int &r = i;
```

initialize a second name **r** for the variable **i**

```
int *p = &i;
```

initialize integer pointer variable **p**

with its value set to the memory address of **i**

i and **r** are different names for the same variable

i and **p** are different variables

DEREFERENCE OPERATOR: *

Concept

the dereference operator * returns the variable that a pointer points to

Example

```
int i=5;  
int *p = &i;
```

initialize integer **i** and with the value **5**
initialize integer pointer **p**
and set its value to the memory address of **i**

```
cout << i;  
cout << *p;
```

print the value of **i** which is **5**
dereference **p** (return **i**) and print its value **5**

```
*p = 10;  
cout << i;
```

dereference **p** (return **i**) and assign it a new value **10**
print the updated value of **i** which is **10**

NULLPTR

Purpose

a safe value for a pointer variable

Example

```
int *p=nullptr;  
int *p;
```

initialize integer pointer **p** with the value **nullptr**
declare integer pointer **p** with a garbage value

```
if(p == nullptr) {  
    run some code  
}
```

can test if **p** points to nothing

legacy versions of C++ use **null** instead of **nullptr**

POINTER SYNTAX

Example

```
int i=5;  
int *p = nullptr;  
p = &i;  
*p = 10;
```

initialize integer **i** with the value **5**
initialize the integer pointer **p**
assign **p** to the memory address of **i**
dereference **p** to access and modify the value of **i**

```
double *a, b;  
double c, *d;  
double *e, *f;
```

declare a double pointer **a** and a double **b**
declare a double **c** and a double pointer **d**
declare two double pointers **e** and **f**

POINTER EQUIVALENCE

Example

```
double d=3.14;  
double *p = &d;  
double *q = &d;
```

initialize integer **d** with the value 3.14

initialize the double pointer **p**

initialize the double pointer **q**

```
if(&p == &q) {}
```

test if **p** and **q** are the same variable

```
if(p == q) {}
```

test if **p** and **q** point to the same variable

```
if(*p == *q) {}
```

test if **p** and **q** point to variables with the same value

POINTERS AND CONSTANTS

const pointer

pointer to a const variable

const pointer to a const variable

the pointer cannot be modified

the variable pointed to cannot be modified

both variables cannot be modified

Examples

`int a = 5;`

`const int b = 5;`

non-constant variable

constant variable

`int *const p = &a;`

`const int *p = &b;`

`const int *const p = &a;`

the pointer cannot be modified

the variable pointed to cannot be modified


both variables cannot be modified

Note

`const int *p;` or `const int *const p;` can point to constants or non-constants, regardless of what it points to, `*p` cannot be modified

MEMORY

Stack	memory space for automatic variables memory managed by the compiler
Heap	memory space for dynamic variables memory managed by the programmer requires the use of pointers requires the use of new and delete operators
Static	memory space for global variables

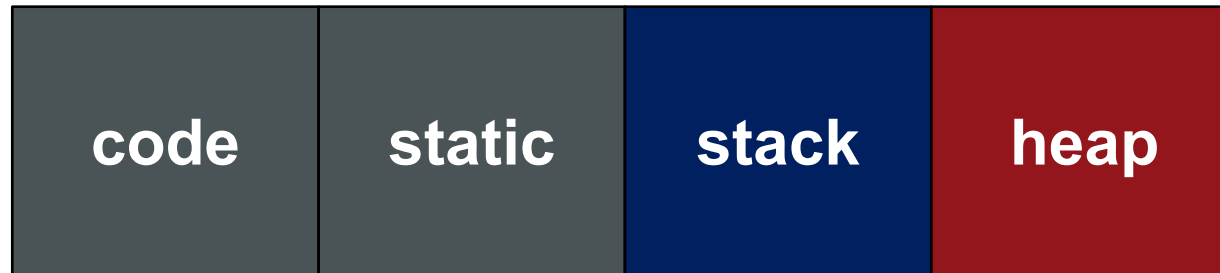

HEAP

Pointers	required to access memory locations on the heap	
New operator	used to allocate memory on the heap	
Delete operator	used to deallocate memory on the heap	
Example	<pre>int *p = new int(5); cout << *p; *p = 10; delete p;</pre>	<p>allocate a dynamic variable on the heap which is accessed by a pointer p on the stack access the dynamic variable modify the dynamic variable deallocate the variable pointed to by p does not deallocate the pointer p</p>

NEW OPERATOR

Example

```
int *p = new int(5);
```


allocate a dynamic variable on the heap

Note

p is an automatic variable on the stack

we access the dynamic variable using ***p**

***p** represents the dynamic variable allocated on the heap

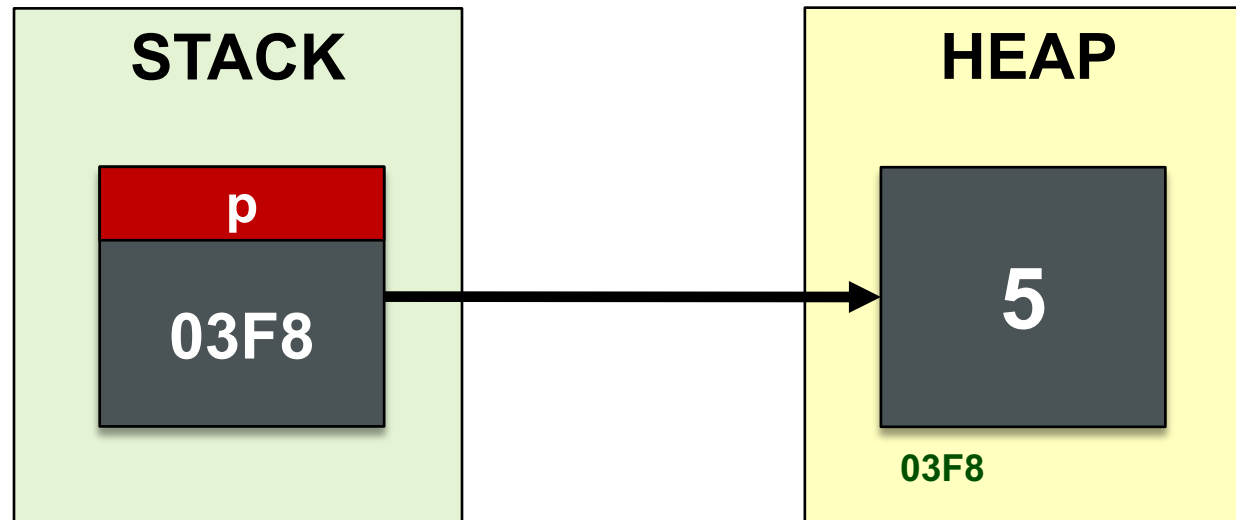

DELETE OPERATOR


Example

```
int *p = new int(5);  
delete p;
```

allocate a dynamic variable on the heap
deallocate the dynamic variable on the heap

Note


p remains on the stack while ***p** is recycled

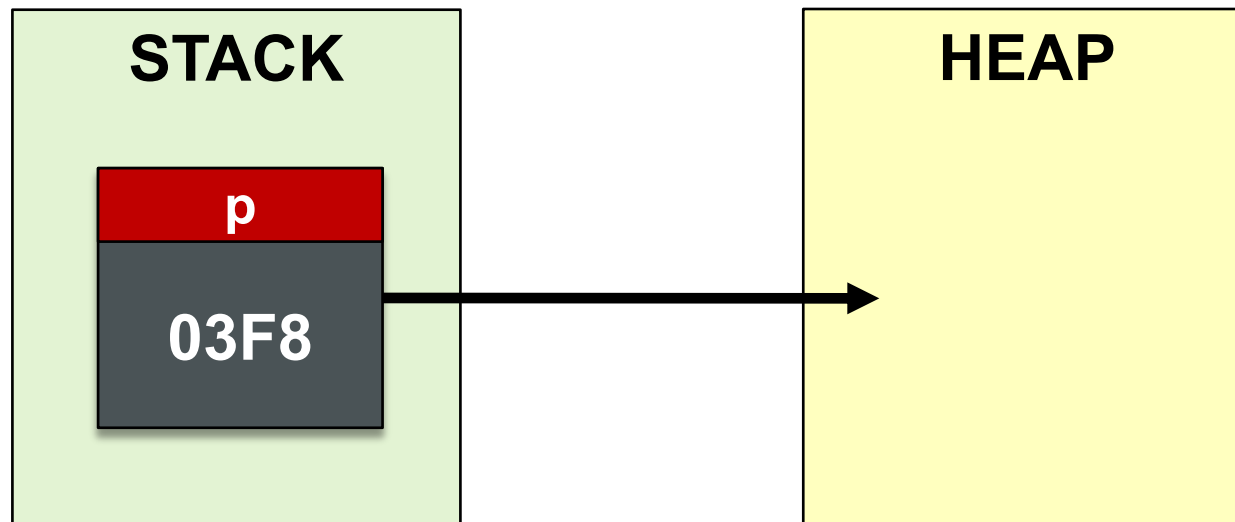

BASIC IDEA: DANGLING POINTER

Concept

a pointer which points to an address that no longer exists

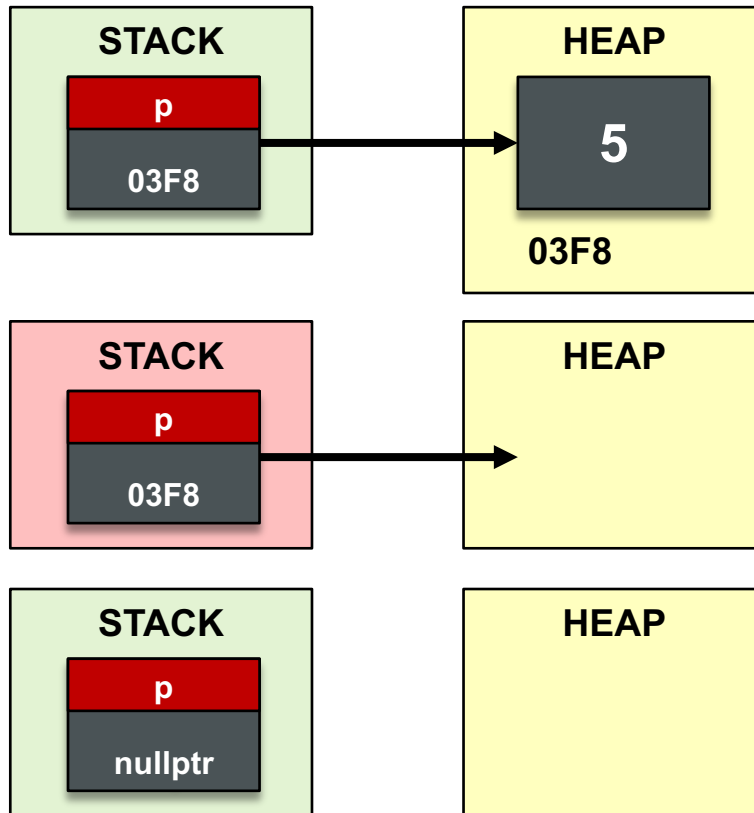

```
int *p = new int(5);
```


```
delete p;    // dangling pointer
```

```
p = nullptr; // safe pointer
```

BASIC IDEA: MEMORY LEAK

Concept

allocated dynamic memory which can no longer be accessed

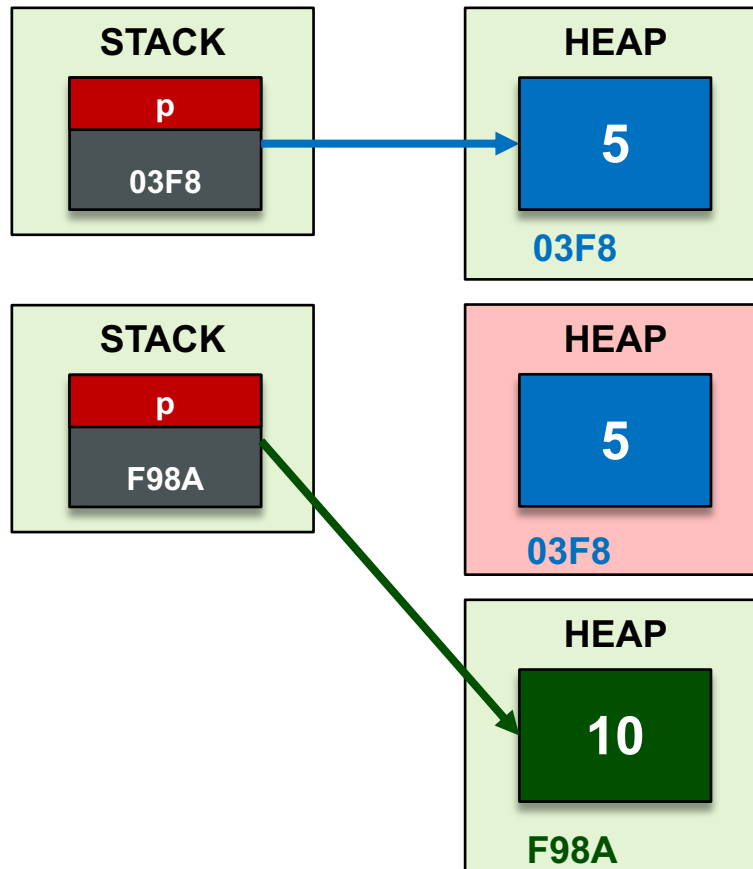

```
int *p = new int(5);
```

```
p = new int(10); // memory leak
```

03F8 is no longer accessible

03F8 will not be recycled within program lifetime
if enough leaks occur, program may crash

STACK FUNCTION RETURN

Return by value **always return local stack variables by value (returns a copy)**

```
int f( ) {  
    int i = 100;  
    return i;           // i goes out of scope, is recycled  
}
```

Return by reference **never return a local stack variable by reference (returns garbage)**

```
int& f( ) {  
    int i = 100;  
    return i;           // i goes out of scope, is recycled  
}
```

FUNCTIONS AND POINTERS

Pass by value

pass the pointer value (memory address of pointed to variable)

```
void f(int *p) { }
```

Return by value

return the pointer value (memory address of pointed to variable)

```
int* f( ) { }
```

Pass by reference

pass the pointer


```
void f(int *&p) { }
```

Return by reference

return the pointer

```
int *& void f( ) { }
```

FUNCTIONS AND POINTERS

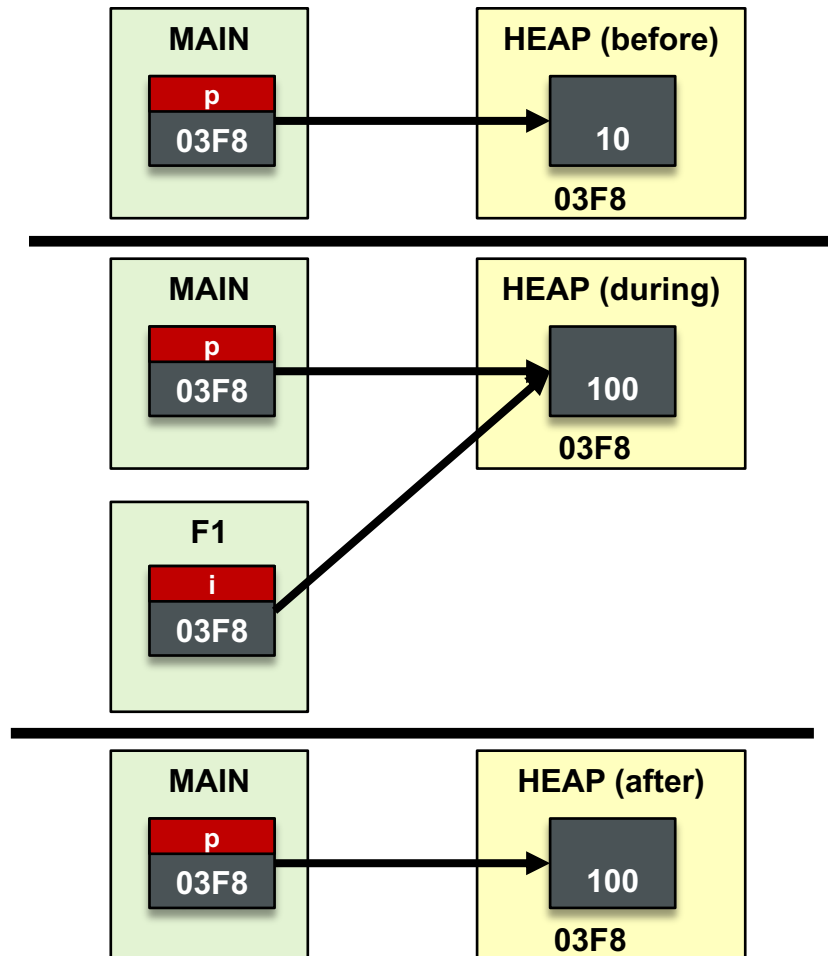


```
void f1(int *i) {  
    *i = 100;  
}
```

```
int main( ) {  
    int *p = new int{10};  
    f1(p);  
    cout << *p << "\n";  
}
```

// prints 100

FUNCTIONS AND POINTERS

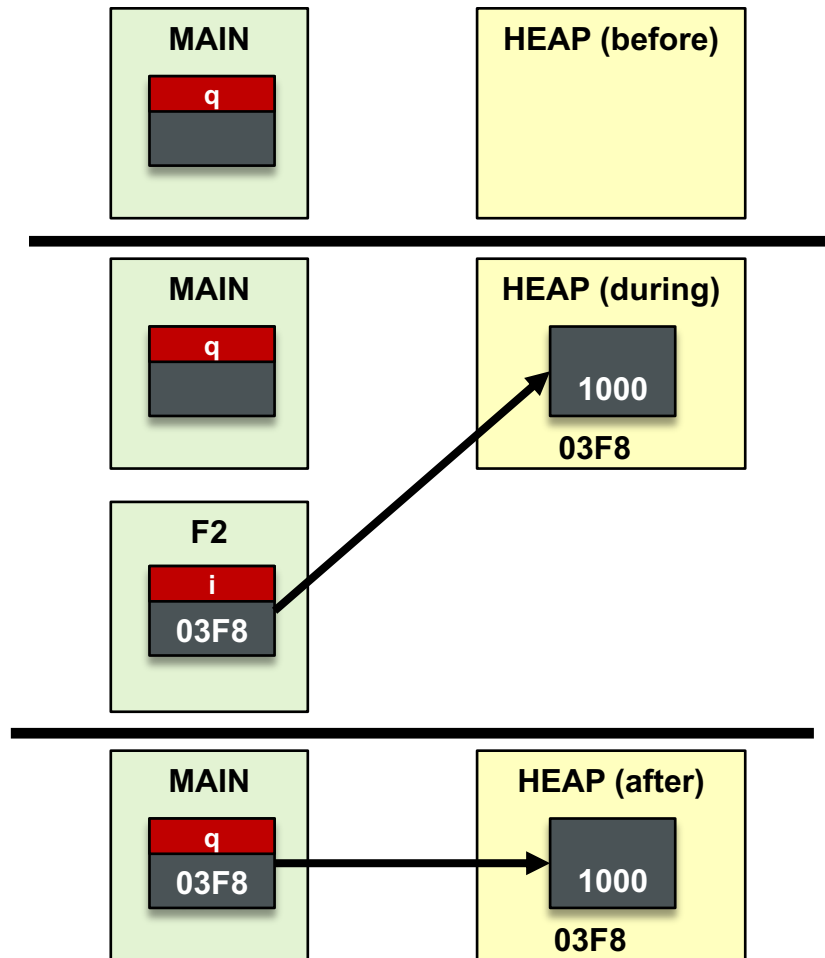


```
int* f2() {  
    int *i = new int(1000);  
    return i;  
}  
  
int main( ) {  
    int *q = f2();  
    cout << *q << "\n";  
}
```

// i goes out of scope
// return heap memory

// prints 1000

FUNCTIONS AND POINTERS

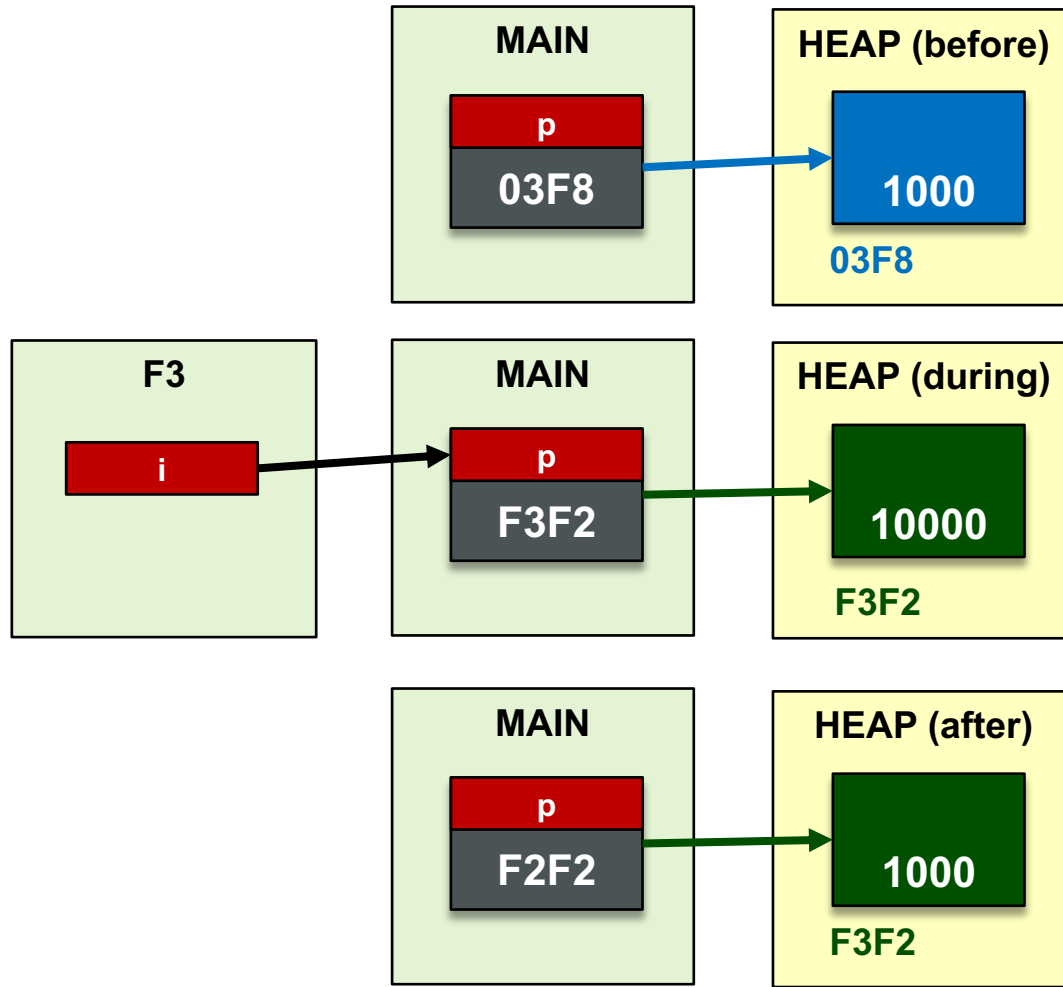


```
void f3(int *&i) {  
    delete i;  
    i = new int(10000);  
}
```

*// delete 03F8
// initialize F3F2*

```
int main( ) {  
    int *p = new int{1000};  
    f3(p);  
    cout << *p << "\n";  
}
```

*// p points to 03F8
// p points to F3F2
// prints 10000*

FUNCTIONS: DANGLING POINTER

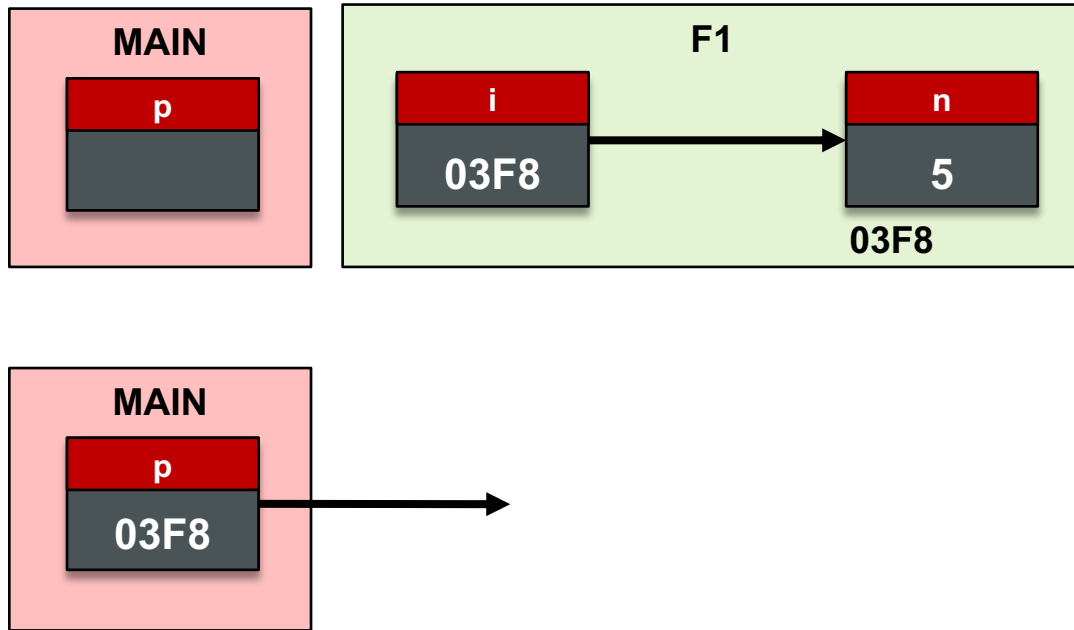

```
int* f1( ) {  
    int *i;  
    int n=5;  
    i=&n;  
    return i;  
}
```


// n and i go out of scope

```
int main( ) {  
    int *p = f1( );  
}
```

// 03F8 is no longer valid

p points to a memory location which is no longer valid

FUNCTIONS: MEMORY LEAK

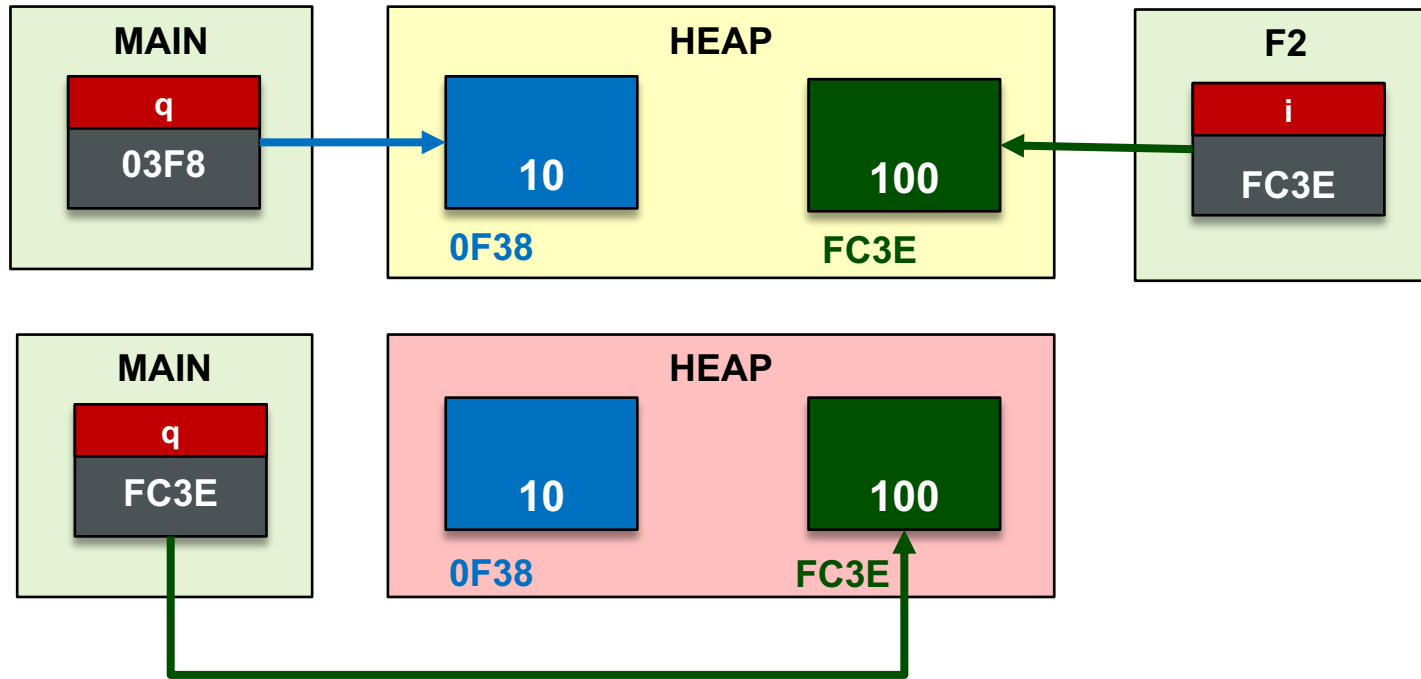

```
int* f2( ) {  
    int *i; = new int(100);  
    return i;  
}
```

```
int main( ) {  
    int *q = new int{10};  
    q = f2( );    // q assigned to new  
}
```

03F8 is no longer reachable since after the function call **q** points to **FC3E**

FUNCTION POINTERS

Purpose

a variable which stores the address of a function

```
int add(int a, int b) { return a+b; }  
int multiply(int a, int b) { return a*b; }
```

```
void print (int a, int b, int (*f) (int, int) ) {           // function pointer parameter  
    cout << (*f)(a, b) << "\n";                          // call the function  
}
```

```
int main() {  
    int (*f) (int, int);           // declare a function pointer  
    f = add;                       // assign the function pointer to the add function  
    print(5, 6, add);              // call print with literals 5, 6 and function add  
    print(5, 6, multiply);         // call print with literals 5, 6 and function multiply  
    return 0;  
}
```


TYPDEF

Purpose

custom aliases for types to make code easier to read

Example:

```
typedef int score;           // alias for the int type
typedef int* data;          // alias for the int pointer type
typedef int (*func) (int, int); // alias for a function pointer
using func2 = int (*f) (int, int); // c++11 alias declaration syntax

score n = 5;                // declare an integer variable
data p = new int(100);      // declare an integer pointer variable
func f;                     // declare an function pointer from typedef
func2 f;                   // declare an function pointer from using
```