

## WEI workflow orchestration

### workcell configuration

```
...  
- name: device_alias  
  interface: adapter  
  model: device  
  config: identifier  
...
```

### workflow definition

```
...  
name: Mix reaction  
module: device_alias  
command: action  
...
```


5) Retrieve address for alias

4) Record **address** of module daemon in workcell config, & define **alias**

6) Invoke action on module

## Software repositories

1) Implement or adapt **daemon & driver** software for new device

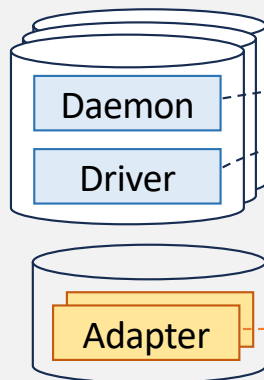

3) Deploy **daemon, adapter, & driver** software on computer attached to new device to create a **daemon**

2) Choose **adapter** for new device

