Joint Center for Satellite Data Assimilation

CRTM: v2.0 User Guide

March, 2010

Change History

Date	Author	Change
2009-01-30	P.van Delst	Initial release.
2009-02-03	P.van Delst	Updated chapter 2 with descriptions of the example code and coefficient tarballs. Added explanation of layering convention in chapter 4.
2010-03-12	P.van Delst	Updated for v2.0.

Contents

W	hat's	s New in v2.0	viii
	New	7 Science	viii
	Inte	rface Changes	ix
1	Intr	roduction	1
	1.1	Conventions	1
		1.1.1 Naming of Structure Types and Instances of Structures	1
		1.1.2 Naming of Definition Modules	1
		1.1.3 Naming of Application Modules	2
		1.1.4 Naming of I/O Modules	2
	1.2	Components	2
		1.2.1 Atmospheric Optics	2
		1.2.2 Surface Optics	3
		1.2.3 Radiative Transfer Solution	3
	1.3	Models	3
	1.4	Design Framework	4
2	Hov	w to obtain the CRTM	6
	2.1	CRTM ftp download site	6
	2.2	Coefficient Data	7
	2.3	Example Programs	7
3	Hov	w to build the CRTM library	9
	3.1	Build Files	9
	3.2	Predefined Build Targets	9
	3.3	Building the library	10
	3.4	Installing the library	10
	3.5	Linking to the library	10

4	Hov	v to us	e the CRTM library	12
	4.1	Step by	y Step Guide	12
		4.1.1	Step 1: Access the CRTM module	12
		4.1.2	Step 2: Declare the CRTM structures	12
		4.1.3	Step 3: Initialise the CRTM	13
		4.1.4	Step 4: Allocate the CRTM structures	14
		4.1.5	Step 5: Fill the CRTM input structures with data	15
		4.1.6	Step 6: Call the required CRTM function	16
		4.1.7	Step 7: Destroy the CRTM and cleanup	17
	4.2	Interfa	ce Descriptions	17
		4.2.1	CRTM_Init interface	17
		4.2.2	CRTM_Forward interface	20
		4.2.3	CRTM_Tangent_Linear interface	22
		4.2.4	CRTM_Adjoint interface	24
		4.2.5	CRTM_K_Matrix interface	26
		4.2.6	CRTM_Destroy interface	28
D:	blica	graphy		30
ום	bilog	graphy		30
A	Stru	ıcture	and procedure interface definitions	31
	A.1	Channe	elInfo Structure	32
		A.1.1	CRTM_ChannelInfo_Associated interface	32
		A.1.2	CRTM_ChannelInfo_DefineVersion interface	33
		A.1.3	CRTM_ChannelInfo_Destroy interface	33
		A.1.4	CRTM_ChannelInfo_Inspect interface	33
		A.1.5	CRTM_ChannelInfo_n_Channels interface	34
	A.2	Atmosp	bhere Structure	35
		A.2.1	CRTM_Atmosphere_AddLayerCopy interface	37
		A.2.2	CRTM_Atmosphere_Associated interface	37
		A.2.3	CRTM_Atmosphere_Compare interface	38
		A.2.4	CRTM_Atmosphere_Create interface	38
		A.2.5	CRTM_Atmosphere_DefineVersion interface	40
		A.2.6	CRTM_Atmosphere_Destroy interface	40
		A.2.7	CRTM_Atmosphere_Inspect interface	40
		A.2.8	CRTM_Atmosphere_IsValid interface	41
		A.2.9	CRTM_Atmosphere_Zero interface	41
			CRTM_Atmosphere_IOVersion interface	42
		A.2.11	CRTM_Atmosphere_InquireFile interface	42
			CRTM_Atmosphere_ReadFile interface	43
			CRTM_Atmosphere_WriteFile interface	45
	Λ 2	Cloud	Structure	17

	A.3.1	CRTM_Cloud_AddLayerCopy interface	48
	A.3.2	CRTM_Cloud_Associated interface	48
	A.3.3	CRTM_Cloud_Compare interface	49
	A.3.4	CRTM_Cloud_Create interface	49
	A.3.5	CRTM_Cloud_DefineVersion interface	50
	A.3.6	CRTM_Cloud_Destroy interface	50
	A.3.7	CRTM_Cloud_Inspect interface	51
	A.3.8	CRTM_Cloud_IsValid interface	51
	A.3.9	CRTM_Cloud_Zero interface	52
	A.3.10	CRTM_Cloud_IOVersion interface	52
	A.3.11	CRTM_Cloud_InquireFile interface	53
	A.3.12	CRTM_Cloud_ReadFile interface	54
	A.3.13	CRTM_Cloud_WriteFile interface	55
A.4	Aeroso	ol Structure	57
	A.4.1	CRTM_Aerosol_AddLayerCopy interface	58
	A.4.2	CRTM_Aerosol_Associated interface	58
	A.4.3	CRTM_Aerosol_Compare interface	59
	A.4.4	CRTM_Aerosol_Create interface	59
	A.4.5	CRTM_Aerosol_DefineVersion interface	60
	A.4.6	CRTM_Aerosol_Destroy interface	60
	A.4.7	CRTM_Aerosol_Inspect interface	61
	A.4.8	CRTM_Aerosol_IsValid interface	61
	A.4.9	CRTM_Aerosol_Zero interface	62
	A.4.10	CRTM_Aerosol_IOVersion interface	62
	A.4.11	CRTM_Aerosol_InquireFile interface	63
	A.4.12	CRTM_Aerosol_ReadFile interface	64
	A.4.13	CRTM_Aerosol_WriteFile interface	65
A.5	Surfac	se Structure	67
	A.5.1	CRTM_Surface_Associated interface	72
	A.5.2	CRTM_Surface_Compare interface	72
	A.5.3	CRTM_Surface_CoverageType interface	73
	A.5.4	CRTM_Surface_Create interface	73
	A.5.5	CRTM_Surface_DefineVersion interface	74
	A.5.6	CRTM_Surface_Destroy interface	74
	A.5.7	CRTM_Surface_Inspect interface	75
	A.5.8	CRTM_Surface_IsCoverageValid interface	75
	A.5.9	CRTM_Surface_IsValid interface	76
	A.5.10	CRTM_Surface_Zero interface	77
	A.5.11	CRTM_Surface_IOVersion interface	77
	A.5.12	CRTM_Surface_InquireFile interface	77

	$A.5.13$ CRTM_Surface_ReadFile $interface$	 78
	A.5.14 CRTM_Surface_WriteFile interface	 80
A.6	SensorData Structure	 82
	A.6.1 CRTM_SensorData_Associated interface	 83
	A.6.2 CRTM_SensorData_Compare interface	 83
	A.6.3 CRTM_SensorData_Create interface	 84
	A.6.4 CRTM_SensorData_DefineVersion interface	 84
	A.6.5 CRTM_SensorData_Destroy interface	 85
	A.6.6 CRTM_SensorData_Inspect interface	 85
	A.6.7 CRTM_SensorData_IsValid interface	 86
	A.6.8 CRTM_SensorData_Zero interface	 86
	A.6.9 CRTM_SensorData_IOVersion interface	 87
	A.6.10 CRTM_SensorData_InquireFile interface	 87
	A.6.11 CRTM_SensorData_ReadFile interface	 88
	A.6.12 CRTM_SensorData_WriteFile interface	 89
A.7	Geometry Structure	 91
	A.7.1 CRTM_Geometry_DefineVersion interface	 96
	A.7.2 CRTM_Geometry_Destroy interface	 96
	A.7.3 CRTM_Geometry_GetValue interface	 96
	A.7.4 CRTM_Geometry_Inspect interface	 99
	A.7.5 CRTM_Geometry_IsValid interface	 99
	A.7.6 CRTM_Geometry_SetValue interface	 100
	A.7.7 CRTM_Geometry_IOVersion interface	 102
	A.7.8 CRTM_Geometry_InquireFile interface	 103
	A.7.9 CRTM_Geometry_ReadFile interface	 103
	A.7.10 CRTM_Geometry_WriteFile interface	 104
A.8	RTSolution Structure	 106
	A.8.1 CRTM_RTSolution_Associated interface	 108
	A.8.2 CRTM_RTSolution_Compare interface	 108
	A.8.3 CRTM_RTSolution_Create interface	 109
	A.8.4 CRTM_RTSolution_DefineVersion interface	 109
	A.8.5 CRTM_RTSolution_Destroy interface	 110
	A.8.6 CRTM_RTSolution_Inspect interface	 110
	A.8.7 CRTM_RTSolution_IOVersion interface	 111
	A.8.8 CRTM_RTSolution_InquireFile interface	 111
	A.8.9 CRTM_RTSolution_ReadFile interface	 112
	A.8.10 CRTM_RTSolution_WriteFile interface	 113
A.9	Options Structure	115
	A.9.1 CRTM_Options_Associated interface	 117
	A.9.2 CRTM_Options_Create interface	 117

	A.9.3 CRTM_Options_DefineVersion interface	3
	A.9.4 CRTM_Options_Destroy interface	3
	A.9.5 CRTM_Options_Inspect interface)
	A.9.6 CRTM_Options_IsValid interface	9
	10 SSU_Input Structure	1
	A.10.1 SSU_Input_CellPressureIsSet interface	1
	A.10.2 SSU_Input_DefineVersion interface	2
	A.10.3 SSU_Input_GetValue interface	2
	A.10.4 SSU_Input_Inspect interface	3
	A.10.5 SSU_Input_IsValid interface	1
	A.10.6 SSU_Input_SetValue interface	1
	11 Zeeman_Input Structure	3
	A.11.1 Zeeman_Input_DefineVersion interface	3
	A.11.2 Zeeman_Input_GetValue interface	7
	A.11.3 Zeeman_Input_Inspect interface	3
	A.11.4 Zeeman_Input_IsValid interface	3
	A.11.5 Zeeman_Input_SetValue interface	9
\mathbf{B}	Valid Sensor Identifiers 131	Ĺ
	3.1 Infrared instruments	2
	3.2 Microwave instruments	1

List of Figures

1.1	Flowchart of the CRIM Forward and K-Matrix models	Э
2.1	The CRTM ftp site contents (as on Mar.12, 2010)	6
2.2	The CRTM coefficients tarball structure	7
2.3	The example code tarball structure. The example programs are shown in blue, and shell scripts to run them are shown in red	8
A.1	CRTM_ChannelInfo_type structure definition.	32
A.2	${\tt CRTM_Atmosphere_type\ structure\ definition.}$	35
A.3	$\label{lem:cond_type} \mbox{CRTM_Cloud_type structure definition.} \qquad \ldots \qquad $	47
A.4	${\tt CRTM_Aerosol_type\ structure\ definition.} \ldots \ldots$	57
A.5	${\tt CRTM_Surface_type\ structure\ definition.} \ldots \ldots$	67
A.6	CRTM_SensorData_type structure definition	82
A.7	${\tt CRTM_Geometry_type\ structure\ definition.} \qquad \ldots \qquad \ldots \qquad \ldots \qquad \ldots \qquad \ldots$	91
A.8	Definition of Geometry sensor scan angle component	93
A.9	Definition of Geometry sensor zenith angle component	93
A.10	Definition of Geometry sensor azimuth angle component	94
A.11	Definition of Geometry source zenith angle component	94
A.12	Definition of Geometry source azimuth angle component	95
A.13	CRTM_RTSolution_type structure definition	106
A.14	CRTM_Options_type structure definition.	115
A.15	SSU_Input_type structure definition	121
A.16	Zeeman_Input_type structure definition	126

List of Tables

3.1	Predefined makefile targets for CRTM library build. († Untested.)	9
A.1	CRTM Atmosphere structure valid Climatology definitions. The same set as defined for LBLRTM is used.	36
A.2	CRTM Atmosphere structure valid Absorber_ID definitions. The same molecule set as defined for HITRAN is used	36
A.3	CRTM Atmosphere structure valid Absorber_Units definitions. The same set as defined for LBLRTM is used	36
A.4	CRTM Cloud structure valid Type definitions	47
A.5	CRTM Aerosol structure valid Type definitions and effective radii. SSAM \equiv Sea Salt Accumulation Mode, SSCM \equiv Sea Salt Coarse Mode	57
A.6	CRTM Surface structure component description	68
A.7	CRTM Surface structure default values	69
A.8	CRTM Surface structure valid Land_Type definitions	70
A.9	CRTM Surface structure valid Water_Type definitions	70
A.10	CRTM Surface structure valid Snow_Type definitions	70
A.11	CRTM Surface structure valid Ice_Type definitions	71
A.12	CRTM SensorData structure component description	82
A.13	CRTM Geometry structure component description	92
A.14	CRTM RTSolution structure component description	107
A.15	CRTM Options structure component description	116
A.16	CRTM SSU_Input structure component description	121
A.17	CRTM Zeeman_Input structure component description	126
B.1	CRTM sensor identifiers for infrared instruments	133
B.2	CRTM sensor identifiers for microwave instruments.	134

What's New in v2.0

New Science

Multiple transmittance algorithms There are now two transmittance models available for use in the CRTM: ODAS (Optical Depth in Absorber Space), which is equivalent to the previous CompactOPTRAN algorithm; and ODPS (Optical Depth in Pressure Space) which is similar to the RTTOV-type of transmittance algorithm, except here OPTRAN is used for water vapor line absorption.

The algorithm is selectable by the user via the transmittance coefficient (TauCoeff) data file used to initialise the CRTM. This method, rather than a switch argument in the CRTM_Init() function, was chosen to allow users to "mix-and-match" transmittance algorithms for different sensors in the same initialisation call.

- SSU-specific transmittance model Similar to the multiple transmittance algorithm approach, a separate algorithm *just* for the SSU instrument has been constructed. The algorithm is based on the ODAS approach, but with elements to account for the time-dependence of the SSU CO₂ cell pressures.
- Zeeman-splitting transmittance model for SSMIS upper-level channels A separate algorithm is available to account for the change in absorption at very low pressures due to the Zeeman-splitting of absorption lines. Currently this algorithm has only been applied to the affected channels in the SSMIS instrument, 19-22.
- Visible sensor capability The CRTM now supports radiative transfer for visible instruments/channels. The treatment of visible channels was handled in the CRTM framework by considering them separate instruments. The sensor identifier for these instruments/channels are differentiated from their infrared counterparts by a "v." prefix. For example, while modis_aqua is the sensor identifier for the infrared channels, v.modis_aqua identifies the visible channels.
- Inclusion of Matrix Operator Method (MOM) in radiaitve transfer To handle visible wavelength radiative transfer in the prescence of aerosols, the Advanced Doubling-Adding (ADA) algorithm was adapted to use the MOM technique [Liu and Ruprecht, 1996].
- Inclusion of additional infrared sea surface emissivity model Files containing the emissivity data (EmisCoeff) for the Nalli et al. [2008a] model are provided. Previously, only the EmisCoeff files for the Wu and Smith [1997] model were provided. Users can now select between the Nalli et al. [2008a] or Wu and Smith [1997] models by specifying the requisite filename in the call to CRTM_Init().
- Surface BRDF for solar-affected shortwave IR channels A bi-directional reflectance distribution function (BRDF) has been added to account for reflected solar in affected shortware infrared channels [Breon, 1993].
- Reflectivity for downwelling infrared over water The reflectivity for downwelling infrared radiation over water surface has been changed from Lambertian to specular.

Aerosol type changes To account for changes in the handling of GOCART [Chin et al., 2002] aerosol model output, additional sea salt coarse modes were added to the list of allowed aerosol types. Also, the separate dry and wet types for organic and black carbon aerosols were combined, with a relative humidity of 0% used to indicate the previous "dry" aerosol type. See table A.5 for the new list of accepted aerosol types.

Interface Changes

CRTM Initialisation function The changes to the CRTM_Init() interface were relatively minor but do require calling codes to be modified:

- The Sensor_Id argument is now mandatory. This argument is used to construct the sensor-specific SpcCoeff and TauCoeff filename and in the past was optional to allow for "generic" filenames. This is no longer allowed and generic SpcCoeff and TauCoeff files are no longer used.
- The loading of the CloudCoeff and AerosolCoeff datafiles containing the optical properties of cloud and aerosol particulates is no longer mandatory. For cloud-free CRTM runs, the load of the CloudCoeff and AerosolCoeff datafiles can be disabled via the optional Load_CloudCoeff and Load_AerosolCoeff arguments which are logical switches (true or false).

User accessible structures The structures are defined as those that are used in the argument lists of the main CRTM functions (e.g. initialisation; the forward, tangent-linear, adjoint, and K-matrix models; and destruction). Changes were made to both the structure definitions and their procedures. To mitigate the possibility of memory leaks, the definitions of array members of structures have had their POINTER attribute replaced with ALLOCATABLE. This was a first step in preparation for use of Fortran2003 Object Oriented features in the CRTM (once Fortran2003 compiler become widely available), where the derived type structure definitions will be reclassified as objects and their procedures will be type-bound. To delineate this change from previous versions of CRTM the interfaces of the derived type procedures have been altered by:

- changing the procedure names to use the convention CRTM_object_action where an object can be any of the user accessible CRTM derived types (e.g. CRTM_Atmosphere_type, CRTM_RTSolution_type etc), and the action can be those defined operations for the structure (e.g. Create, Destroy, Inspect, etc).
- making the first dummy argument of the definition module procedures the derived type itself. This will eventually allow the procedures to be called via an instance of the derived type ¹²

All of the current derived type definitions and their associated procedures and interfaces are shown in appendix A.

Options structure specific changes The additional changes made to the CRTM_Options_type definition:

- all usage on/off switches have been changed from integers (0/1) to logicals (true/false),
- a logical switch to control input checking, Check_Input, has been added.
- structure components for SSU-specific and Zeeman model input have been added.

¹Interested readers can investigate the PASS attribute that can be used in the PROCEDURE statement within derived type definitions in Fortran 2003

²The I/O functions do not yet follow this convention, since they are considered secondary to the definition module procedures used to manipulate the derived types.

1

Introduction

1.1 Conventions

The following are conventions that have been adhered to in the current release of the CRTM framework. They are guidelines intended to make understanding the code at a glance easier, to provide a recognisable "look and feel", and to minimise name space clashes.

1.1.1 Naming of Structure Types and Instances of Structures

The derived data type, or structure¹ type, naming convention adopted for use in the CRTM is,

```
[CRTM_] name_{-}type
```

where *name* is an identifier that indicates for what a structure is to be used. All structure type names are suffixed with "_type" and CRTM-specific structure types are prefixed with "CRTM_". Some examples are,

```
CRTM_Atmosphere_type
CRTM_RTSolution_type
```

An instance of a structure is then referred to via its *name*, or some sort of derivate of its *name*. Some structure declarations examples are,

```
TYPE(CRTM_Atmosphere_type) :: atm, atm_K
TYPE(CRTM_RTSolution_type) :: rts, rts_K
```

where the K-matrix structure variables are identified with a " $_{\tt K}$ " suffix. Similarly, tangent-linear and adjoint variables are suffixed with " $_{\tt TL}$ " or " $_{\tt AD}$ " respectively.

1.1.2 Naming of Definition Modules

Modules containing structure type definitions are termed *definition modules*. These modules contain the actual structure definitions as well as various utility procedures to allocate, destroy, copy etc. structures of the designated type. The naming convention adopted for definition modules in the CRTM is,

```
[\mathtt{CRTM}\_] name\_\mathtt{Define}
```

where, as with the structure type names, all definition module names are suffixed with "_Define" and CRTM-specific definition modules are prefixed with "CRTM_". Some examples are,

```
CRTM_Atmosphere_Define
CRTM_RTSolution_Define
```

The actual source code files for these modules have the same name with a ".f90" suffix.

 $^{^{1}\}mathrm{The}$ terms "derived type" and "structure" are used interchangably in this document.

1.1.3 Naming of Application Modules

Modules containing the routines that perform the calculations for the various components of the CRTM are termed application modules. The naming convention adopted for application modules in the CRTM is,

```
\mathtt{CRTM}\_name
```

Some examples are,

```
CRTM_AtmAbsorption
CRTM_SfcOptics
CRTM_RTSolution
```

However, in this case, *name* does not necessarilty refer just to a structure type. Separate application modules are used as required to split up tasks in manageable (and easily maintained) chunks. For example, separate modules have been provided to contain the cloud and aerosol optical property retrieval; similarly separate modules handle different surface types for different instrument types in computing surface optics.

Again, the actual source code files for these modules have the same name with a ".f90" suffix. Note that not all definition modules have a corresponding application module since some structures (e.g. SpcCoeff structures) are simply data containers.

1.1.4 Naming of I/O Modules

Modules containing routines that read and write data from and to files are, naturally, termed I/O modules. Not all data structures have associated I/O modules. The naming convention adopted for these modules in the CRTM is,

```
[CRTM_] name_Binary_IO
or just
    [CRTM_] name_IO
Some examples are,

CRTM_Atmosphere_IO
    CRTM_RTSolution_IO
```

As with the other module types, the actual source code files for these modules have the same name with a ".f90" suffix

In the context of the CRTM, the term "Binary" is a euphemisn for sequential, unformatted I/O in Fortran.

1.2 Components

The CRTM is designed around three broad categories: atmospheric optics, surface optics and radiative transfer.

1.2.1 Atmospheric Optics

(AtmOptics) This category includes computation of the absorption by atmospheric gases (AtmAbsorption) and scattering and absorption by both clouds (CloudScatter) and aerosols (AerosolScatter).

The gaseous absorption component computes the optical depth of the absorbing constituents in the atmosphere given the pressure, temperature, water vapour, and ozone concentration² profiles.

²Additional trace gas absorption capabilities are being added.

The scattering component simply interpolates look-up-tables (LUTs) of optical properties – such as mass extinction coefficient and single scatter albedo – for cloud and aerosol types that are then used in the radiative transfer component. See tables A.4 and A.5 for the valid cloud and aerosol types, respectively, that are valid in the CRTM.

1.2.2 Surface Optics

(SfcOptics) This category includes the computation of surface emissivity and reflectivity for four gross surface types (land, water, snow, and ice). Each gross surface type has a specified number of specific surface types associated with it. See tables A.8, A.9, A.10, and A.11 for the land, water, snow, and ice surface types, respectively, that are valid in the CRTM.

The CRTM utilises separate models for each gross surface type for each spectral type (infrared and microwave). These models can be either physical models or database/LUT type of models.

1.2.3 Radiative Transfer Solution

(RTSolution) This category takes the AtmOptics and SfcOptics data and solves the radiative transfer problem in either clear or scattering atmospheres.

1.3 Models

The CRTM is composed of four models: a forward model, a tangent-linear model, an adjoint model, and a K-matrix model. These can be represented as shown in equations 1.1a to 1.1d.

$$\mathbf{T_B}, \mathbf{R} = \mathbf{F}(\mathbf{T}, \mathbf{q}, T_s, \dots) \tag{1.1a}$$

$$\delta \mathbf{T}_{\mathbf{B}}, \delta \mathbf{R} = \mathbf{H}(\mathbf{T}, \mathbf{q}, T_s, ... \delta \mathbf{T}, \delta \mathbf{q}, \delta T_s, ...)$$
(1.1b)

$$\delta^* \mathbf{T}, \delta^* \mathbf{q}, \delta^* T_s, \dots = \mathbf{H}^{\mathbf{T}} (\mathbf{T}, \mathbf{q}, T_s, \dots \delta^* T_{\mathbf{B}})$$
(1.1c)

$$\delta^* \mathbf{T}_l, \delta^* \mathbf{q}_l, \delta^* T_{s,l}, \dots = \mathbf{K}(\mathbf{T}, \mathbf{q}, T_s, \dots \delta^* \mathbf{T}_{\mathbf{B}}) \text{ for } l = 1, 2, \dots, L$$

$$(1.1d)$$

Here **F** is the forward operator that, given the atmospheric temperature and absorber profiles (**T** and **q**), surface temperature (T_s), etc., produces a vector of channel brightness temperatures (**T**_B) and radiances (**R**).

The tangent-linear operator, \mathbf{H} , represents a linearisation of the forward model about \mathbf{T} , \mathbf{q} , T_s , etc. and when also supplied with perturbations about the linearisation point (quantities represented by the δ 's) produces the expected perturbations to the brightness temperature and channel radiances.

The adjoint operator, $\mathbf{H}^{\mathbf{T}}$, is simply the transpose of the tangent-linear operator and produces gradients (the quantities represented by the δ^{**} s). It is worth noting that, in the CRTM, these adjoint gradients are accumulated over channel and thus do not represent channel-specific Jacobians.

The K-matrix operator³, \mathbf{K} , is effectively the same as the adjoint but with the results preserved by channel (indicated via the subscript l). In the CRTM, the adjoint and K-matrix results are related by,

$$\delta^* x = \sum_{l=1}^L \delta^* x_l \tag{1.2}$$

 $^{^3}$ The term K-matrix is used because references to this operation in the literature commonly use the symbol ${f K}$

Thus, the K-matrix results are the derivatives of the diagnostic variables with respect to the prognostic variables, e.g.

$$\delta^* x_l = \frac{\partial T_{B,l}}{\partial x} \tag{1.3}$$

Typically, only the forward or K-matrix models are used in applications. However, the intermediate models are generated and retained for maintenance and testing purposes. Any changes to the CRTM forward model are translated to the tangent-linear model and the latter tested against the former. When the tangent-linear model changes have been verified, the changes then translated to the adjoint model and, as before, the latter is tested against the former. This process is repeated for the adjoint-to-K-matrix models also.

1.4 Design Framework

This document is not really the place to fully discuss the design framework of the CRTM, so it will only be briefly mentioned here. Where appropriate, different physical processes are isolated into their own modules. The CRTM interfaces presented to the user are, at their core, simply drivers for the individual parts. This is shown schematically in the forward and K-matrix model flowcharts of figure 1.1.

A fundamental tenet of the CRTM design is that each component define its own structure definition and application modules to facilitate independent development of an algorithm outside of the mainline CRTM development. By isolating different processes, we can more easily identify requirements for an algorithm with a view to minimise or eliminate potential software conflicts and/or redundancies. The end result sought via this approach is that components developed by different groups can more easily be added into the framework leading to faster implementation of new science and algorithms.

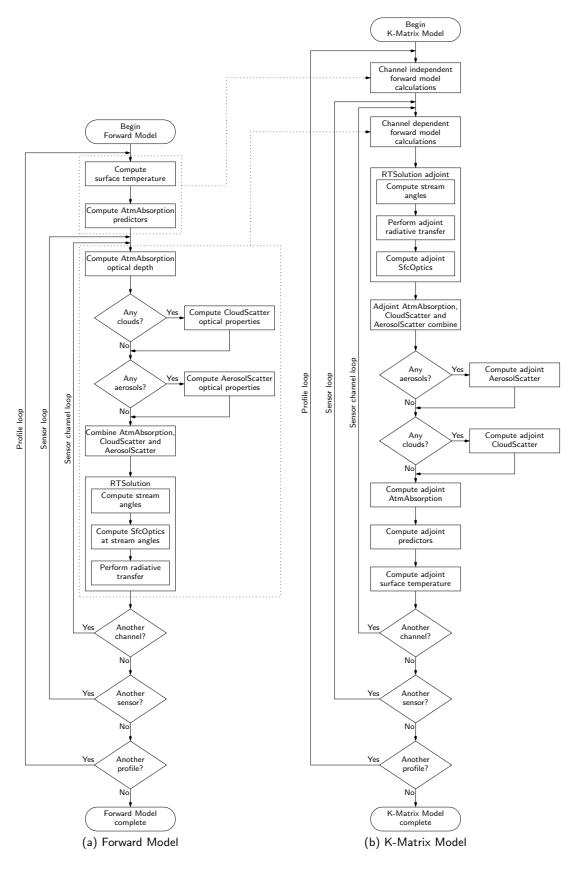


Figure 1.1: Flowchart of the CRTM Forward and K-Matrix models.

How to obtain the CRTM

2.1 CRTM ftp download site

The CRTM source code and coefficients, and example programs, are released as compressed tarballs¹ via the CRTM ftp site:

ftp://ftp.emc.ncep.noaa.gov/jcsda/CRTM/

A snapshot of that site is shown in figure 2.1. Note that the source code and coefficients can be released separately as updates to either one can occur independently of the other. Also note that additional releases, e.g. beta or experimental branches, are also made available on this ftp site.

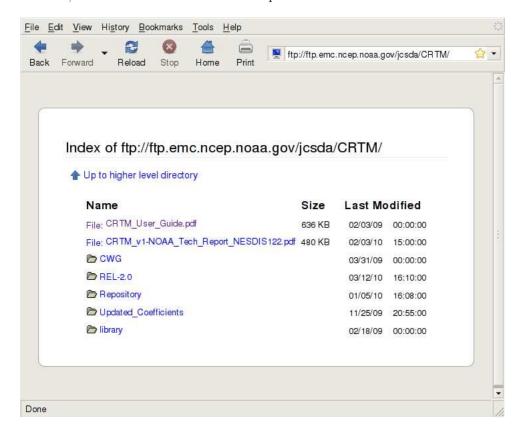


Figure 2.1: The CRTM ftp site contents (as on Mar.12, 2010)

 $^{^1\}mathrm{A}$ compressed (e.g. gzip'd) tape archive (tar) file.

2.2 Coefficient Data

The tarball labeled as "Coeffs" packages up all the transmittance, spectral, cloud, aerosol, and emissivity coefficient data needed by the CRTM. The coefficient tarball directory structure is organised by coefficient and format type as shown in figure 2.2.

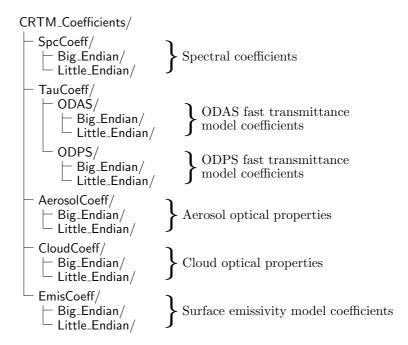


Figure 2.2: The CRTM coefficients tarball structure

Both big- and little-endian format files are provided to save users the trouble of switching what they use for their system. Note in the TauCoeff directory there are two subdirectories: ODAS and ODPS. These directories correspond to the coefficient files for the different transmittance model algorithms. The user can select which algorithm to use by using the corresponding TauCoeff file.

To run the CRTM, all the required coefficient files need to be in the same path (see the CRTM initialisation function description) so users will have to move/link the datafiles as required.

2.3 Example Programs

The tarball labeled as "Example_Code" contains two completely independent sets of example programs — one showing how to call the CRTM Forward model and the other for the K-matrix model. The Example Code tarball directory structure is shown in figure 2.3 where the directories for each example program are highlighted in blue, and shell scripts to run them are shown in red.

Some notes about building the example programs:

- The shell script files, run_Example_Forward.sh and run_Example_K_Matrix.sh, both build and run the example programs which include a comparison of their output to that supplied in the Results directory.
- The makefile.common file contains all the relevant macro definitions for the compilation. This file should be modified by users to alter the various macros and compilers flags to accommodate their system. This file uses the FC and FC_FLAGS macros to define the Fortran95 compiler and switches respectively. Currently the default compiler is gfortran, but additional definitions for different compilers are provided at the bottom of the file. Similarly for the FL and FL_FLAGS macro definitions.




Figure 2.3: The example code tarball structure. The example programs are shown in blue, and shell scripts to run them are shown in red.

• it is assumed the CRTM library has already been built (see chapter 3 for how to do that) and is in the generic location defined by the CRTM_DIR macro (currently setup for our JCSDA systems.)

You should modify the makefile.common file for your own system. As mentioned, other compiler switches are provided for guidance.

3

How to build the CRTM library

3.1 Build Files

The build system for the CRTM is currently quite unsophisticated. It consists of a number of make and include files in the CRTM tarball hierarchy:

makefile : The main makefile

make.macros: The include file containing all the defined macros, including the compiler and

linker flags.

make.rules: The include file containing the suffix rules for compiling Fortran95 source code.

3.2 Predefined Build Targets

Several targets are available for specific compilers. The compilers and makefile target names are shown in table 3.1. Both "production" and debug target names are supplied, with the former using compiler switches to produce fast code and the latter using compiler switches to turn on all the available debugging capabilities. Note that the debug targets will produce executables much slower than the production builds.

Platform	Compiler	Production Target	Debug Target
	GNU gfortran	gfortran	gfortran_debug
	Lahey lf95 [†]	lahey	$lahey_debug$
Linux	Intel ifort	intel	$intel_debug$
Liliux	PGI pgf95	pgi	pgi_debug
	g95	g95	g95_debug
	Absoft^\dagger	absoft	$absoft_debug$
IBM	AIX xlf95	ibm	ibm_debug
HP	HP-UX $f90^{\dagger}$	hp	hp_debug
SGI	IRIX f90 †	sgi	sgi_debug
Sun	Solaris f 90^{\dagger}	sun	sun_debug

Table 3.1: Predefined makefile targets for CRTM library build. († Untested.)

The actual compiler and switch definitions are listed in the make.macros file. Also note that not all of the above compilers have been tested for the current release.

3.3 Building the library

The default build is performed by simply typing,

make

and is operating system sensitive in that the compiler is selected based on the platform. For example, if you build on an IBM/AIX system, the xlf95 compiler is invoked. Doing the same on a linux or MacOSX system invokes the default linux compiler; currently this is the GNU gfortran¹ compiler.

So, if you are using a linux or MacOSX system and want to modify the *default* CRTM build (different compiler, different switches), you will need to edit the make.macros file. At the bottom of this file, you will see the following macro definitions,

```
LINUX_FLAGS = $(LINUX_FLAGS_GFORTRAN)
#LINUX_FLAGS = $(LINUX_FLAGS_LAHEY)
#LINUX_FLAGS = $(LINUX_FLAGS_PGI)
#LINUX_FLAGS = $(LINUX_FLAGS_INTEL)
#LINUX_FLAGS = $(LINUX_FLAGS_G95)
```

where you can see the generic LINUX_FLAGS macros is set to LINUX_FLAGS_GFORTRAN. To use any of the other defined compilers (Lahey, PGI, Intel, or g95), simply uncomment the required line. For example, if your compiler of choice is Intel ifort and you want that to be the default build, the change would simply be

```
#LINUX_FLAGS = $(LINUX_FLAGS_GFORTRAN)
#LINUX_FLAGS = $(LINUX_FLAGS_LAHEY)
#LINUX_FLAGS = $(LINUX_FLAGS_PGI)
LINUX_FLAGS = $(LINUX_FLAGS_INTEL)
#LINUX_FLAGS = $(LINUX_FLAGS_G95)
```

Note, however, than an Intel ifort build can also be obtained by using the predefined makefile targets as shown in table 3.1.

3.4 Installing the library

A very simple install target is specified in the supplied makefile to put all the necessary include files (the generated *.mod files containing all the procedure interface information) in an /include subdirectory and the library itself (the generated libCRTM.a file) in a /lib subdirectory. The make command is

```
make install
```

The /include and /lib subdirectories can then be moved to a more suitable location on your system, for example: \$HOME/local/CRTM

3.5 Linking to the library

Let's assume you've built the CRTM library and placed the /include and /lib subdirectories in your own local area, \$HOME/local/CRTM. In the makefile for your application that uses the CRTM, you will need to add

¹Note that for gfortran a version of 4.4 or later is required to build the CRTM library. Earlier versions (4.1,4.2,4.3) did not implement all the Fortran95+ features used in the CRTM source code.

-I\$HOME/local/CRTM/include

to your list of compilation switches, and the following to your list of link switches,

-L\$HOME/local/CRTM/lib -lCRTM

4

How to use the CRTM library

4.1 Step by Step Guide

This section will hopefully get you started using the CRTM library as quickly as possible. Refer to the following sections for more information about the structures and interfaces.

The examples shown here assume you are processing one sensor at a time. The CRTM can handle multiple sensors at once, but specifying the input information in a simple way is difficult; e.g. the Geometry structure that is used to specify the sensor viewing geometry – even sensors on the same platform typically have different numbers of fields-of-view (FOVs) per scan. For multiple sensor processing, we'll assume they will be separately processed in parallel.

Because there are many variations in what information is known ahead of time (and by "ahead of time" we mean at compile-time of your code), let's approach this via examples for a fixed number of atmospheric profiles, and a known sensors. It is left as an exercise to the reader to tailor calls to the CRTM in their application code according to their particular needs.

With regards to sensor identification, the CRTM uses a character string – refered to as the Sensor_Id – to distinguish sensors and platforms. The lists of currently supported sensors, along with their associated Sensor_Id's, are shown in appendix B.

4.1.1 Step 1: Access the CRTM module

All of the CRTM user procedures, parameters, and derived data type definitions are accessible via the container module CRTM_Module. Thus, one needs to put the following statement in any calling program, module or procedure,

USE CRTM_Module

Once you become familiar with the components of the CRTM you require, you can also specify an ONLY clause with the USE statement,

```
USE CRTM_Module[, ONLY: only-list]
```

where *only-list* is a list of the symbols you want to "import" from CRTM_Module. This latter form is the preferred style for self-documenting your code; e.g. when you give the code to someone else, they will be able to identify from which module various symbols in your code originate.

4.1.2 Step 2: Declare the CRTM structures

To compute satellite radiances you need to declare structures for the following information,

1. Atmospheric profile data such as pressure, temperature, absorber amounts, clouds, aerosols, etc. Handled using the Atmosphere structure.

- 2. Surface data such as type of surface, temperature, surface type specific parameters etc. Handled using the Surface structure.
- 3. Geometry information such as sensor scan angle, zenith angle, etc. Handled using the Geometry structure.
- 4. Instrument information, particularly which instrument(s), or sensor(s)¹, you want to simulate. Handled using the ChannelInfo structure.
- 5. Results of the radiative transfer calculation. Handled using the RTSolution structure.
- 6. Optional inputs. Handled using the Options structure.

Let's assume you want to process, say, 50 profiles for the NOAA-18 AMSU-A sensor which has 15 channels. The forward model declarations would look something like,

```
! Processing parameters
INTEGER
           , PARAMETER :: N_SENSORS = 1
            , PARAMETER :: N_CHANNELS = 15
INTEGER
           , PARAMETER :: N_PROFILES = 50
INTEGER
CHARACTER(*), PARAMETER :: SENSOR_ID(N_SENSORS) = (/'amsua_n18'/)
TYPE(CRTM_ChannelInfo_type) :: chInfo(N_SENSORS)
TYPE(CRTM_Geometry_type)
                             :: geo(N_PROFILES)
TYPE(CRTM_Options_type)
                            :: opt(N_PROFILES)
! Forward declarations
TYPE(CRTM_Atmosphere_type)
                            :: atm(N_PROFILES)
TYPE(CRTM_Surface_type)
                             :: sfc(N_PROFILES)
TYPE(CRTM_RTSolution_type)
                             :: rts(N_CHANNELS, N_PROFILES)
```

If you are also interested in calling the K-matrix model, you will also need the following declarations,

```
! K-Matrix declarations
TYPE(CRTM_Atmosphere_type) :: atm_K(N_CHANNELS, N_PROFILES)
TYPE(CRTM_Surface_type) :: sfc_K(N_CHANNELS, N_PROFILES)
TYPE(CRTM_RTSolution_type) :: rts_K(N_CHANNELS, N_PROFILES)
```

4.1.3 Step 3: Initialise the CRTM

The CRTM is initialised by calling the CRTM_Init() function. This loads all the various coefficient data used by CRTM components into memory for later use. We'll assume that all the required datafiles reside in the subdirectory ./coeff_data and follow on from the example of Step 2. The CRTM initialisation is profile independent, so we're only dealing with sensor information here. The CRTM initialisation function call looks like,

```
INTEGER :: errStatus
....
errStatus = CRTM_Init( SENSOR_ID, chInfo, File_Path='./coeff_data' )
IF ( errStatus /= SUCCESS ) THEN
    handle error...
END IF
```

Here we see for the first time how the CRTM functions let you know if they were successful. As you can see the CRTM_Init() function result is an error status that is checked against a parameterised integer error code, SUCCESS. The function result should *not* be tested against the actual value of the error code, just its parameterised name. Other available error code parameters are FAILURE, WARNING, and INFORMATION — although the latter is never used as a function result.

For a list of all the accepted sensor identifiers, see appendix B.

¹The terms "instrument" and "sensor" are used interchangeably in this document.

4.1.4 Step 4: Allocate the CRTM structures

Now we need to create instances of the various CRTM structures where necessary to hold the input or output data. Functions are used to perform any necessary component allocations allocations. The function naming convention is CRTM_object_Create where, for typical usage, the CRTM structures that need to be allocated are the Atmosphere, RTSolution and, if used, Options structures. Potentially, the SensorData component of the Surface structure may also need to be allocated to allow for input of sensor observations for some of the NESDIS microwave surface emissivity models.

Allocation of the Atmosphere structures

First, we'll allocate the atmosphere structures to the required dimensions. The forward variable is allocated like so:

```
! Allocate the forward atmosphere structure
  CALL CRTM_Atmosphere_Create( atm
                                          , &
                                                ! Object
                                n_Layers , & ! Input
                               n_Absorbers, & ! Input
                                         , & ! Input
                               n_Clouds
                               n_Aerosols ) ! Input
  ! Check it was actually allocated
  IF ( ANY(.NOT. CRTM_Atmosphere_Associated( atm )) ) THEN
    handle error...
  END IF
and the K-matrix variable is allocated by looping over all profiles<sup>2</sup>,
  ! Allocate the K-matrix atmosphere structure
  DO m = 1, N_PROFILES
    CALL CRTM_Atmosphere_Create( atm_k(:,m) , & ! Object
                                            , & ! Input
                                  n_Layers
                                  n_Absorbers, & ! Input
                                 n_Clouds , & ! Input
                                 n_Aerosols ) ! Input
    ! Check they were actually allocated
    IF ( ANY(.NOT. CRTM_Atmosphere_Associated( atm_k(:,m) ))    THEN
      handle error...
    END IF
  END DO
```

Note that for the ODAS algorithm the allowed number of absorbers is at most two: that of H_2O and O_3 . For the ODPS algorithm, CO_2 can also be specified. In future releases, trace gases such as CO, CH_4 , and N_2O will also be accepted as input.

Allocation of the RTSolution structure

To return additional information used in the radiative transfer calculations, such as upwelling radiance and layer optical depth profiles, the RTSolution structure must be allocated to the number of atmospheric layers used:

 $^{^2}$ The CRTM_Atmosphere_Create function is defined as elemental so the profile loop is not strictly needed

```
! Check it was actually allocated
IF ( ANY(.NOT. CRTM_RTSolution_Associated( rts )) ) THEN
   handle error...
END IF
```

Note that internal checks are performed in the CRTM to determine if the RTSolution structure has been allocated before its array components are accessed. Thus, if the additional information is not required, the RTSolution structure does not need to be allocated. Also, the extra information returned is only applicable to the forward model, not any of the tangent-linear, adjoint, or K-matrix models.

Allocation of the Options structure

If user-supplied surface emissivity data is to be used, then the options structure must first be allocated to the necessary number of channels:

If no emissivities are to be input, the options structure does not need to be allocated.

4.1.5 Step 5: Fill the CRTM input structures with data

This step simply entails filling the input atm, sfc, geo, and, if used, opt structures with the required information. However, there are some issues that need to be mentioned:

- In the CRTM, all profile layering is from top-of-atmosphere (TOA) to surface (SFC). So, for an atmospheric profile layered as k = 1, 2, ..., K, layer 1 is the TOA layer and layer K is the SFC layer.
- In the Atmosphere structure, the Climatology component is not yet used.
- In the Atmosphere structure, both the level and layer pressure profiles must be specified.
- In the Atmosphere structure, the absorber profile data units *must* be mass mixing ratio for water vapour and ppmv for other absorbers. The Absorber_Units component is not yet utilised to allow conversion of different user-supplied concentration units.
- In the Atmosphere structure, the Absorber_Id array must be set to the correct absorber identifiers (see table A.2) to allow the software to find a particular absorber. There is no necessary order in specifying the concentration profiles for different gaseous absorbers.
- In the Surface structure, the sum of the coverage types must add up to 1.0.
- In the Geometry structure, the sensor zenith and sensor scan angles should be consistent.
- Graphical definitions of the Geometry structure sensor scan, sensor zenith, sensor azimuth, source zenith, and source azimuth angles are shown in figures A.8, A.9, A.10, A.11, and A.12 respectively.
- The Options structure contains two "substructures", SSU_Input and Zeeman_Input to hold the necessary inputs for the SSU and Zeeman transmittance models. These substructures are private and can only be access via "GetValue" and "SetValue" functions as discussed further below.

For the K-matrix structures, you should zero the K-matrix outputs, atm_K, sfc_K,

```
! Zero the K-matrix OUTPUT structures
CALL CRTM_Atmosphere_Zero( atm_K )
CALL CRTM_Surface_Zero( sfc_K )
```

and initialise the K-matrix *input*, rts_K, to provide you with the derivatives you want. For example, if you want the atm_K, sfc_K outputs to contain brightness temperature derivatives, you should initialise rts_K like so,

```
! Initialise the K-Matrix INPUT to provide dTb/dx derivatives rts_K%Radiance = ZERO rts_K%Brightness_Temperature = ONE
```

Alternatively, if you want radiance derivatives returned in atm_K and sfc_K, the rts_K structure should be initialised like so.

```
! Initialise the K-Matrix INPUT to provide dR/dx derivatives rts_K%Radiance = ONE rts_K%Brightness_Temperature = ZERO
```

Filling the Options substructures for SSU and Zeeman model input

As mentioned above, the SSU_Input and Zeeman_Input data structures are private. This means the contents of the structure cannot be accessed directly, but via helper subroutines. For example, to set the SSU instrument mission time, one would call the SSU_Input_SetValue subroutine,

```
! Set the SSU input data in the options substructure

CALL SSU_Input_SetValue( opt%SSU_Input , & ! Object

Time=mission_time ) ! Optional input
```

where the local variable mission_time contains the required time.

Similarly for the necessary Zeeman model parameters,

```
! Set the Zeeman input data in the options substructure

CALL Zeeman_Input_SetValue( opt%Zeeman_Input , & ! Object
Field_Strength=Be , & ! Optional input
Cos_ThetaB =angle ) ! Optional input
```

where, again, Be and angle are the local variables for the necessary data.

4.1.6 Step 6: Call the required CRTM function

At this point, much of the prepatory heavy lifting has been done. The CRTM function calls themselves are quite simple. For the forward model we do,

```
errStatus = CRTM_Forward( atm , & ! Input sfc , & ! Input geo , & ! Input chInfo , & ! Input chInfo , & ! Input rts , & ! Output Options=opt ) ! Optional input IF ( errStatus /= SUCCESS ) THEN handle error...
```

and for the K-matrix model, the calling syntax is,

```
errStatus = CRTM_K_Matrix( atm
                                       , & ! Forward input
                                       , & ! Forward input
                                       , & ! K-matrix input
                           rts_K
                            geo
                                       , &! Input
                            {\tt chInfo}
                                       , &! Input
                            atm_K
                                       , & ! K-matrix output
                            sfc_K
                                       , & ! K-matrix output
                                       , & ! Forward output
                            Options=opt ) ! Optional input
IF ( errStatus /= SUCCESS ) THEN
  handle error...
END IF
```

Note that the K-matrix model also returns the forward model radiances. The tangent-linear and adjoint models have similar call structures and will not be shown here.

4.1.7 Step 7: Destroy the CRTM and cleanup

The last step is to cleanup. This involves calling the CRTM destruction function

```
errStatus = CRTM_Destroy( chInfo )
IF ( errStatus /= SUCCESS ) THEN
  handle error...
END IF
```

to deallocate all the shared coefficient data, as well as calling the individual structure destroy functions to deallocate as required. For the example here, that entails deallocating the various structure arrays that were created in Step 4.1.4. The cleanup mirrors that of the create step:

```
CALL CRTM_Options_Destroy(opt)
CALL CRTM_RTSolution_Destroy(rts)
CALL CRTM_Atmosphere_Destroy(atm_K)
CALL CRTM_Atmosphere_Destroy(atm)
```

4.2 Interface Descriptions

4.2.1 CRTM_Init interface

EmisCoeff_File = EmisCoeff_File , &
File_Path = File_Path , &
Load_CloudCoeff = Load_CloudCoeff , &
Load_AerosolCoeff = Load_AerosolCoeff, &
Quiet = Quiet , &
Process_ID = Process_ID , &
Output_Process_ID = Output_Process_ID)

INPUTS:

Sensor_ID: List of the sensor IDs (e.g. hirs3_n17, amsua_n18,

ssmis_f16, etc) with which the CRTM is to be

initialised. These sensor ids are used to construct the sensor specific SpcCoeff and TauCoeff filenames containing the necessary coefficient data, i.e.

<Sensor_ID>.SpcCoeff.bin

and

<Sensor_ID>.TauCoeff.bin
for each sensor Id in the list.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Rank-1 (n_Sensors)
ATTRIBUTES: INTENT(IN), OPTIONAL

OUTPUTS:

ChannelInfo: ChannelInfo structure array populated based on

the contents of the coefficient files and the

user inputs.
UNITS: N/A

TYPE: CRTM_ChannelInfo_type

DIMENSION: Same as input Sensor_Id argument

ATTRIBUTES: INTENT(OUT)

OPTIONAL INPUTS:

CloudCoeff_File: Name of the CRTM Binary format CloudCoeff file

containing the scattering coefficient data. If not specified the default filename is "CloudCoeff.bin".

UNITS: N/A

TYPE: CHARACTER(*)

DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

AerosolCoeff_File: Name of the CRTM Binary format AerosolCoeff file

containing the aerosol absorption and scattering coefficient data. If not specified the default

filename is "AerosolCoeff.bin".

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

EmisCoeff_File: Name of the CRTM Binary format EmisCoeff file

containing the IRSSEM coefficient data. If not specified the default filename is "EmisCoeff.bin".

UNITS: N/A

TYPE: CHARACTER(*)

DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

File_Path: Character string specifying a file path for the

input data files. If not specified, the current

directory is the default.

UNITS: N/A

TYPE: CHARACTER(*)

DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

Load_CloudCoeff: Set this logical argument for not loading the CloudCoeff data

to save memory space under the clear conditions

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

Load_AerosolCoeff: Set this logical argument for not loading the AerosolCoeff data

to save memory space under the clear conditions

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

Quiet: Set this logical argument to suppress INFORMATION

 ${\tt messages} \ {\tt being} \ {\tt printed} \ {\tt to} \ {\tt stdout}$

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

Process_ID: Set this argument to the MPI process ID that this

function call is running under. This value is used solely for controlling INFORMATION message output. If MPI is not being used, ignore this argument.

This argument is ignored if the Quiet argument is set.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

Output_Process_ID: Set this argument to the MPI process ID in which

all INFORMATION messages are to be output. If

the passed Process_ID value agrees with this value

the INFORMATION messages are output.

This argument is ignored if the Quiet argument

is set.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error

status. The error codes are defined in the

Message_Handler module.

If == SUCCESS the CRTM initialisation was successful

== FAILURE an unrecoverable error occurred.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

All public data arrays accessed by this module and its dependencies are overwritten.

RESTRICTIONS:

If specified, the length of the combined file path and filename strings cannot exceed 2000 characters.

4.2.2 CRTM_Forward interface

NAME:

CRTM_Forward

PURPOSE:

Function that calculates top-of-atmosphere (TOA) radiances and brightness temperatures for an input atmospheric profile or profile set and user specified satellites/channels.

CALLING SEQUENCE:

INPUTS:

Atmosphere: Structure containing the Atmosphere data.

UNITS: N/A

TYPE: CRTM_Atmosphere_type DIMENSION: Rank-1 (n_Profiles)

ATTRIBUTES: INTENT(IN)

Surface: Structure containing the Surface data.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN)

Geometry: Structure containing the view geometry

information. UNITS: N/A

TYPE: CRTM_Geometry_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN)

ChannelInfo: Structure returned from the CRTM_Init() function

that contains the satellite/sensor channel index

information.
UNITS: N/A

TYPE: CRTM_ChannelInfo_type DIMENSION: Rank-1 (n_Sensors)

ATTRIBUTES: INTENT(IN)

OUTPUTS:

RTSolution: Structure containing the soluition to the RT equation

for the given inputs.

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Rank-2 (n_Channels x n_Profiles)

ATTRIBUTES: INTENT(IN OUT)

OPTIONAL INPUTS:

Options: Options structure containing the optional arguments

for the CRTM.
UNITS: N/A

TYPE: CRTM_Options_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the $Message_Handler\ module$.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

COMMENTS:

- The Options optional input structure argument contains spectral information (e.g. emissivity) that must have the same spectral dimensionality (the "L" dimension) as the output RTSolution structure.

- The INTENT on the output RTSolution argument is IN OUT rather than just OUT. This is necessary because the argument may be defined upon input. To prevent memory leaks, the IN OUT INTENT is a must.

4.2.3 CRTM_Tangent_Linear interface

NAME:

CRTM_Tangent_Linear

PURPOSE:

Function that calculates tangent-linear top-of-atmosphere (TOA) radiances and brightness temperatures for an input atmospheric profile or profile set and user specified satellites/channels.

CALLING SEQUENCE:

Error_Status = CRTM_Tangent_Linear(Atmosphere , & Surface , & Atmosphere_TL , & Atmosphere_TL , & Surface_TL , & Geometry , & ChannelInfo , & RTSolution , & RTSolution_TL , & Options = Options)

INPUTS:

Atmosphere: Structure containing the Atmosphere data.

UNITS: N/A

TYPE: CRTM_Atmosphere_type
DIMENSION: Rank-1 (n_Profiles)

ATTRIBUTES: INTENT(IN)

Surface: Structure containing the Surface data.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN)

Atmosphere_TL: Structure containing the tangent-linear Atmosphere data.

UNITS: N/A

TYPE: CRTM_Atmosphere_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN)

Surface_TL: Structure containing the tangent-linear Surface data.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN)

Geometry: Structure containing the view geometry

information.
UNITS: N/A

TYPE: CRTM_Geometry_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN)

ChannelInfo: Structure returned from the CRTM_Init() function

that contains the satellite/sensor channel index

information.
UNITS: N/A

TYPE: CRTM_ChannelInfo_type
DIMENSION: Rank-1 (n_Sensors)

ATTRIBUTES: INTENT(IN)

OUTPUTS:

RTSolution: Structure containing the solution to the RT equation

for the given inputs.

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Rank-2 (n_Channels x n_Profiles)

ATTRIBUTES: INTENT(IN OUT)

RTSolution_TL: Structure containing the solution to the tangent-

linear RT equation for the given inputs.

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Rank-2 (n_Channels x n_Profiles)

ATTRIBUTES: INTENT(IN OUT)

OPTIONAL INPUTS:

Options: Options structure containing the optional forward model

arguments for the CRTM.

UNITS: N/A

TYPE: CRTM_Options_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

If == SUCCESS the computation was successful
== FAILURE an unrecoverable error occurred

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

COMMENTS:

- The Options optional input structure arguments contain spectral information (e.g. emissivity) that must have the same spectral dimensionality (the "L" dimension) as the output RTSolution structures.

- The INTENT on the output RTSolution arguments are IN OUT rather

than just OUT. This is necessary because the arguments may be defined upon input. To prevent memory leaks, the IN OUT INTENT is a must.

4.2.4 CRTM_Adjoint interface

NAME:

CRTM_Adjoint

PURPOSE:

Function that calculates the adjoint of top-of-atmosphere (TOA) radiances and brightness temperatures for an input atmospheric profile or profile set and user specified satellites/channels.

CALLING SEQUENCE:

Error_Status = CRTM_Adjoint(Atmosphere , & Surface , & RTSolution_AD , & Geometry , & ChannelInfo , & Atmosphere_AD , & Surface_AD , & RTSolution , & RTSolution , & RTSolution , & Options = Options)

INPUTS:

Atmosphere: Structure containing the Atmosphere data.

UNITS: N/A
TYPE:

TYPE: CRTM_Atmosphere_type DIMENSION: Rank-1 (n_Profiles)

ATTRIBUTES: INTENT(IN)

Surface: Structure containing the Surface data.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN)

RTSolution_AD: Structure containing the RT solution adjoint inputs.

**NOTE: On EXIT from this function, the contents of this structure may be modified (e.g. set to

zero.)

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Rank-2 (n_Channels x n_Profiles)

ATTRIBUTES: INTENT(IN OUT)

Geometry: Structure containing the view geometry

information.
UNITS: N/A

TYPE: CRTM_Geometry_type

DIMENSION: Same as input Atmosphere argument

ATTRIBUTES: INTENT(IN)

ChannelInfo: Structure returned from the CRTM_Init() function

that contains the satellite/sensor channel index

information. UNITS: N/A

TYPE: CRTM_ChannelInfo_type
DIMENSION: Rank-1 (n_Sensors)

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Options: Options structure containing the optional forward model

arguments for the CRTM.

UNITS: N/A

TYPE: CRTM_Options_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN), OPTIONAL

OUTPUTS:

Atmosphere_AD: Structure containing the adjoint Atmosphere data.

**NOTE: On ENTRY to this function, the contents of this structure should be defined (e.g. initialized to some value based on the

position of this function in the call chain.)

UNITS: N/A

TYPE: CRTM_Atmosphere_type

DIMENSION: Same as input Atmosphere argument

ATTRIBUTES: INTENT(IN OUT)

Surface_AD: Structure containing the tangent-linear Surface data.

**NOTE: On ENTRY to this function, the contents of this structure should be defined (e.g. initialized to some value based on the

position of this function in the call chain.)

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Same as input Atmosphere argument

ATTRIBUTES: INTENT(IN OUT)

RTSolution: Structure containing the solution to the RT equation

for the given inputs.

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Same as input RTSolution_AD argument

ATTRIBUTES: INTENT(IN OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar

SIDE EFFECTS:

Note that the input adjoint arguments are modified upon exit, and the output adjoint arguments must be defined upon entry. This is a consequence of the adjoint formulation where, effectively, the chain rule is being used and this function could reside anywhere in the chain of derivative terms.

COMMENTS:

- The Options optional structure arguments contain spectral information (e.g. emissivity) that must have the same spectral dimensionality (the "L" dimension) as the RTSolution structures.
- The INTENT on the output RTSolution, Atmosphere_AD, and Surface_AD arguments are IN OUT rather than just OUT. This is necessary because the arguments should be defined upon input. To prevent memory leaks, the IN OUT INTENT is a must.

4.2.5 CRTM_K_Matrix interface

NAME:

CRTM_K_Matrix

PURPOSE:

Function that calculates the K-matrix of top-of-atmosphere (TOA) radiances and brightness temperatures for an input atmospheric profile or profile set and user specified satellites/channels.

CALLING SEQUENCE:

INPUTS:

Atmosphere: Structure containing the Atmosphere data.

UNITS: N/A

TYPE: CRTM_Atmosphere_type
DIMENSION: Rank-1 (n_Profiles)

ATTRIBUTES: INTENT(IN)

Surface: Structure containing the Surface data.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Same as input Atmosphere argument.

ATTRIBUTES: INTENT(IN)

RTSolution_K: Structure containing the RT solution K-matrix inputs.

**NOTE: On EXIT from this function, the contents of this structure may be modified (e.g. set to

zero.)

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Rank-2 (n_Channels x n_Profiles)

ATTRIBUTES: INTENT(IN OUT)

Geometry: Structure containing the view geometry

information.
UNITS: N/A

TYPE: CRTM_Geometry_type

DIMENSION: Same as input Atmosphere argument

ATTRIBUTES: INTENT(IN)

ChannelInfo: Structure returned from the CRTM_Init() function

that contains the satellite/sesnor channel index

information.
UNITS: N/A

TYPE: CRTM_ChannelInfo_type DIMENSION: Rank-1 (n_Sensors)

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Options: Options structure containing the optional forward model

arguments for the CRTM.

UNITS: N/A

TYPE: CRTM_Options_type

DIMENSION: Same as input Atmosphere structure

ATTRIBUTES: INTENT(IN), OPTIONAL

OUTPUTS:

Atmosphere_K: Structure containing the K-matrix Atmosphere data.

**NOTE: On ENTRY to this function, the contents of this structure should be defined (e.g. initialized to some value based on the

position of this function in the call chain.)

UNITS: N/A

TYPE: CRTM_Atmosphere_type

DIMENSION: Same as input RTSolution_K argument

ATTRIBUTES: INTENT(IN OUT)

 ${\tt Surface_K:} \qquad {\tt Structure\ containing\ the\ tangent-linear\ Surface\ data}.$

**NOTE: On ENTRY to this function, the contents of this structure should be defined (e.g.

initialized to some value based on the

position of this function in the call chain.)

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Same as input RTSolution_K argument

ATTRIBUTES: INTENT(IN OUT)

RTSolution: Structure containing the solution to the RT equation

for the given inputs.

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Same as input RTSolution_K argument

ATTRIBUTES: INTENT(IN OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

Note that the input K-matrix arguments are modified upon exit, and the output K-matrix arguments must be defined upon entry. This is a consequence of the K-matrix formulation where, effectively, the chain rule is being used and this funtion could reside anywhere in the chain of derivative terms.

COMMENTS:

- The Options optional structure arguments contain spectral information (e.g. emissivity) that must have the same spectral dimensionality (the "L" dimension) as the RTSolution structures.
- The INTENT on the output RTSolution, Atmosphere_K, and Surface_K, arguments are IN OUT rather than just OUT. This is necessary because the arguments should be defined upon input. To prevent memory leaks, the IN OUT INTENT is a must.

4.2.6 CRTM_Destroy interface

NAME:

CRTM_Destroy

PURPOSE:

Function to deallocate all the shared data arrays allocated and populated during the CRTM initialization.

CALLING SEQUENCE:

OUTPUTS:

ChannelInfo: Reinitialized ChannelInfo structure.

UNITS: N/A

TYPE: CRTM_ChannelInfo_type

DIMENSION: Scalar

ATTRIBUTES: INTENT(IN OUT)

OPTIONAL INPUTS:

Process_ID: Set this argument to the MPI process ID that this

function call is running under. This value is used solely for controlling message output. If MPI is not

being used, ignore this argument.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error

status. The error codes are defined in the

Message_Handler module.

If == SUCCESS the CRTM deallocations were successful

== FAILURE an unrecoverable error occurred.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

All CRTM shared data arrays and structures are deallocated.

COMMENTS:

Note the INTENT on the output ChannelInfo argument is IN OUT rather than just OUT. This is necessary because the argument may be defined upon input. To prevent memory leaks, the IN OUT INTENT is a must.

Bibliography

- F.M. Breon. An analytical model for the cloud-free atmosphere/ocean system reflectance. *Remote Sens. Environ.*, 43(2):179–192, 1993.
- M. Chin, P. Ginoux, S. Kinne, O. Torres, B.N. Holben, B.N. Duncan, R.V. Martin, J.A. Logan, A. Higurashi, and T. Nakajima. Tropospheric aerosol optical thickness from the GOCART model and comparisons with satellite and sun photometer measurements. *J. Atmos. Sci.*, 59:461–483, 2002.
- Q. Liu and E. Ruprecht. Radiative transfer model: matrix operator method. Appl. Opt., 35(21):4229–4237, 1996
- N.R. Nalli, P.J. Minnett, and P. van Delst. Emissivity and reflection model for calculating unpolarized isotropic water surface-leaving radiance in the infrared. 1: Theoretical development and calculations. *Appl. Opt.*, 47 (21):3701–3721, 2008a.
- X. Wu and W.L. Smith. Emissivity of rough sea surface for 8-13 μ m: modeling and verification. *Appl. Opt.*, 36 (12):2609–2619, 1997.

A Structure and procedure interface definitions

A.1 Channel Info Structure

```
TYPE :: CRTM_ChannelInfo_type
  ! Allocation indicator
 LOGICAL :: Is_Allocated = .FALSE.
 ! Dimensions
 INTEGER :: n_Channels = 0 ! L dimension
 ! Scalar data
 CHARACTER(STRLEN) :: Sensor_ID
 INTEGER :: WMO_Satellite_ID = INVALID_WMO_SATELLITE_ID
                  :: WMO_Sensor_ID = INVALID_WMO_SENSOR_ID
 INTEGER
 INTEGER
                  :: Sensor_Index
  ! Array data
 INTEGER, ALLOCATABLE :: Sensor_Channel(:) ! L
 INTEGER, ALLOCATABLE :: Channel_Index(:)
END TYPE CRTM_ChannelInfo_type
```

Figure A.1: CRTM_ChannelInfo_type structure definition.

A.1.1 CRTM_ChannelInfo_Associated interface

NAME:

```
CRTM_ChannelInfo_Associated
PURPOSE:
     Elemental function to test the status of the allocatable components
      of a CRTM ChannelInfo object.
CALLING SEQUENCE:
      Status = CRTM_ChannelInfo_Associated( ChannelInfo )
OBJECTS:
     ChannelInfo:
                     ChannelInfo object which is to have its member's
                     status tested.
                     UNITS:
                                 TYPE(CRTM_ChannelInfo_type)
                     DIMENSION: Scalar or any rank
                     ATTRIBUTES: INTENT(IN)
FUNCTION RESULT:
     Status:
                     The return value is a logical value indicating the
                     status of the ChannelInfo members.
                       .TRUE. - if the array components are allocated.
                       .FALSE. - if the array components are not allocated.
                     UNITS:
                                 N/A
                                 LOGICAL
                     TYPE:
                     DIMENSION: Same as input ChannelInfo argument
```

A.1.2 CRTM_ChannelInfo_DefineVersion interface

NAME:

CRTM_ChannelInfo_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_ChannelInfo_DefineVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.1.3 CRTM_ChannelInfo_Destroy interface

NAME:

CRTM_ChannelInfo_Destroy

PURPOSE:

Elemental subroutine to re-initialize CRTM ChannelInfo objects.

CALLING SEQUENCE:

CALL CRTM_ChannelInfo_Destroy(ChannelInfo)

OBJECTS:

 ${\tt ChannelInfo:} \qquad {\tt Re-initialized} \ {\tt ChannelInfo} \ {\tt object.}$

UNITS: N/A

TYPE: TYPE(CRTM_ChannelInfo_type)

DIMENSION: Scalar OR any rank

ATTRIBUTES: INTENT(OUT)

A.1.4 CRTM_ChannelInfo_Inspect interface

NAME:

 ${\tt CRTM_ChannelInfo_Inspect}$

PURPOSE:

Subroutine to print the contents of a CRTM ChannelInfo object to stdout. $\,$

CALLING SEQUENCE:

CALL CRTM_ChannelInfo_Inspect(ChannelInfo)

INPUTS:

ChannelInfo: ChannelInfo object to display.

UNITS: N/A

TYPE: TYPE(CRTM_ChannelInfo_type)

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.1.5 CRTM_ChannelInfo_n_Channels interface

NAME:

 ${\tt CRTM_ChannelInfo_n_Channels}$

PURPOSE:

Function to return the number of channels defined in a ChannelInfo structure or structure array

CALLING SEQUENCE:

n_Channels = CRTM_ChannelInfo_n_Channels(ChannelInfo)

INPUTS:

ChannelInfo: ChannelInfo structure or structure which is to have its

channels counted. UNITS: N/A

TYPE: TYPE(CRTM_ChannelInfo_type)

DIMENSION: Scalar or

Rank-1

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

 ${\tt n_Channels:} \quad {\tt The \ number \ of \ defined \ channels \ in \ the \ input \ argument.}$

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.2 Atmosphere Structure

```
TYPE :: CRTM_Atmosphere_type
  ! Allocation indicator
 LOGICAL :: Is_Allocated = .FALSE.
 ! Dimension values
 INTEGER :: Max_Layers = 0 ! K dimension
 INTEGER :: n_Layers = 0 ! Kuse dimension
 INTEGER :: n_Absorbers = 0 ! J dimension
 INTEGER :: Max_Clouds = 0 ! Nc dimension
 INTEGER :: n_Clouds = 0 ! NcUse dimension
  INTEGER :: Max_Aerosols = 0 ! Na dimension
 INTEGER :: n_Aerosols = 0 ! NaUse dimension
 ! Number of added layers
 INTEGER :: n_Added_Layers = 0
  ! Climatology model associated with the profile
 INTEGER :: Climatology = US_STANDARD_ATMOSPHERE
  ! Absorber ID and units
  INTEGER, ALLOCATABLE :: Absorber_ID(:)
  INTEGER, ALLOCATABLE :: Absorber_Units(:) ! J
  ! Profile LEVEL and LAYER quantities
 REAL(fp), ALLOCATABLE :: Level_Pressure(:) ! 0:K
 REAL(fp), ALLOCATABLE :: Pressure(:)
 REAL(fp), ALLOCATABLE :: Temperature(:)
                                            ! K
 REAL(fp), ALLOCATABLE :: Absorber(:,:)
                                            ! K x J
  ! Clouds associated with each profile
 TYPE(CRTM_Cloud_type), ALLOCATABLE :: Cloud(:)
  ! Aerosols associated with each profile
 TYPE(CRTM_Aerosol_type), ALLOCATABLE :: Aerosol(:) ! Na
END TYPE CRTM_Atmosphere_type
```

Figure A.2: CRTM_Atmosphere_type structure definition.

Climatology Type	Parameter
Tropical	TROPICAL
Midlatitude summer	MIDLATITUDE_SUMMER
Midlatitude winter	MIDLATITUDE_WINTER
Subarctic summer	SUBARCTIC_SUMMER
Subarctic winter	SUBARCTIC_WINTER
U.S. Standard Atmosphere	US_STANDARD_ATMOSPHERE

Table A.1: CRTM Atmosphere structure valid Climatology definitions. The same set as defined for LBLRTM is used.

Molecule	Parameter	Molecule	Parameter
$\mathrm{H_{2}O}$	H2O_ID	HI	HI_ID
CO_2	CO2_ID	ClO	${\tt ClO_ID}$
O_3	03_ID	OCS	OCS_ID
N_2O	N2O_ID	$\mathrm{H}_{2}\mathrm{CO}$	H2CO_ID
CO	$CO_{-}ID$	HOCl	HOC1_ID
CH_4	$CH4_{-}ID$	N_2	N2_ID
O_2	$02_{-}ID$	HCN	$HCN_{-}ID$
NO	$NO_{-}ID$	$\mathrm{CH_{3}l}$	CH31_ID
SO_2	SO2_ID	$\mathrm{H_2O_2}$	H2O2_ID
NO_2	NO2_ID	C_2H_2	C2H2_ID
NH_3	NH3_ID	C_2H_6	C2H6_ID
HNO_3	HNO3_ID	PH_3	PH3_ID
ОН	OH_ID	COF_2	COF2_ID
$_{ m HF}$	${\tt HF_ID}$	SF_6	SF6_ID
HCl	HCl_ID	H_2S	$H2S_{-}ID$
$_{ m HBr}$	$\mathtt{HBr}_{-}\mathtt{ID}$	HCOOH	${\tt HCOOH_ID}$

Table A.2: CRTM Atmosphere structure valid Absorber_ID definitions. The same molecule set as defined for HITRAN is used.

Units	Parameter	
Volume mixing ratio, ppmv	VOLUME_MIXING_RATIO_UNITS	
Number density, cm^{-3}	NUMBER_DENSITY_UNITS	
Mass mixing ratio, g/kg	MASS_MIXING_RATIO_UNITS	
Mass density, $g.m^{-3}$	MASS_DENSITY_UNITS	
Partial pressure, hPa	PARTIAL_PRESSURE_UNITS	
Dewpoint temperature, K (H ₂ O ONLY)	DEWPOINT_TEMPERATURE_K_UNITS	
Dewpoint temperature, C (H ₂ O ONLY)	DEWPOINT_TEMPERATURE_C_UNITS	
Relative humidity, % (H ₂ O ONLY)	RELATIVE_HUMIDITY_UNITS	
Specific amount, g/g	SPECIFIC_AMOUNT_UNITS	
Integrated path, mm	INTEGRATED_PATH_UNITS	

Table A.3: CRTM Atmosphere structure valid Absorber_Units definitions. The same set as defined for LBLRTM is used.

A.2.1 CRTM_Atmosphere_AddLayerCopy interface

NAME:

CRTM_Atmosphere_AddLayerCopy

PURPOSE:

Elemental function to copy an instance of the CRTM Atmosphere object with additional layers added to the TOA of the input.

CALLING SEQUENCE:

Atm_out = CRTM_Atmosphere_AddLayerCopy(Atm, n_Added_Layers)

OBJECTS:

Atm: Atmosphere structure to copy.

UNITS: N/A

TYPE: CRTM_Atmosphere_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Added_Layers: Number of layers to add to the function result.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as atmosphere object

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

Atm_out: Copy of the input atmosphere structure with space for

extra layers added to TOA.

UNITS: N/A

TYPE: CRTM_Atmosphere_type

DIMENSION: Same as input. ATTRIBUTES: INTENT(OUT)

A.2.2 CRTM_Atmosphere_Associated interface

NAME:

CRTM_Atmosphere_Associated

PURPOSE:

Elemental function to test the status of the allocatable components of a CRTM Atmosphere object.

CALLING SEQUENCE:

Status = CRTM_Atmosphere_Associated(Atm)

OBJECTS:

Atm: Atmosphere structure which is to have its member's

status tested.

UNITS: N/A

TYPE: CRTM_Atmosphere_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

Status: The return value is a logical value indicating the

status of the Atmosphere members.

.TRUE. - if the array components are allocated. .FALSE. - if the array components are not allocated.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Same as input

A.2.3 CRTM_Atmosphere_Compare interface

NAME:

CRTM_Atmosphere_Compare

PURPOSE:

Elemental function to compare two CRTM_Atmosphere objects to within a user specified number of significant figures.

CALLING SEQUENCE:

is_comparable = CRTM_Atmosphere_Compare(x, y, n_SigFig=n_SigFig)

OBJECTS:

x, y: Two CRTM Atmosphere objects to be compared.

UNITS: N/A

TYPE: CRTM_Atmosphere_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

n_SigFig: Number of significant figure to compare floating point

components.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as input ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

is_equal: Logical value indicating whether the inputs are equal.

UNITS: N/A
TYPE: LOGICAL

DIMENSION: Same as inputs.

A.2.4 CRTM_Atmosphere_Create interface

NAME:

CRTM_Atmosphere_Create

PURPOSE:

Elemental subroutine to create an instance of the CRTM Atmosphere object.

CALLING SEQUENCE:

CALL CRTM_Atmosphere_Create(Atm ,

 n_Layers , &

n_Absorbers, &

 n_Clouds , &

n_Aerosols)

OBJECTS:

Atm: Atmosphere structure.

UNITS: N/A

TYPE: CRTM_Atmosphere_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Layers: Number of layers dimension.

Must be > 0.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as atmosphere object

ATTRIBUTES: INTENT(IN)

n_Absorbers: Number of absorbers dimension.

Must be > 0.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as atmosphere object

ATTRIBUTES: INTENT(IN)

n_Clouds: Number of clouds dimension.

Can be = 0 (i.e. clear sky).

UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as atmosphere object

ATTRIBUTES: INTENT(IN)

n_Aerosols: Number of aerosols dimension.

Can be = 0 (i.e. no aerosols).

UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as atmosphere object

ATTRIBUTES: INTENT(IN)

A.2.5 CRTM_Atmosphere_DefineVersion interface

NAME:

CRTM_Atmosphere_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Atmosphere_DefineVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module.
UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.2.6 CRTM_Atmosphere_Destroy interface

NAME:

CRTM_Atmosphere_Destroy

PURPOSE:

Elemental subroutine to re-initialize CRTM Atmosphere objects.

CALLING SEQUENCE:

CALL CRTM_Atmosphere_Destroy(Atm)

OBJECTS:

Atm: Re-initialized Atmosphere structure.

UNITS: N/A

TYPE: CRTM_Atmosphere_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

A.2.7 CRTM_Atmosphere_Inspect interface

NAME:

CRTM_Atmosphere_Inspect

PURPOSE:

Subroutine to print the contents of a CRTM Atmosphere object to stdout.

CALLING SEQUENCE:

```
CALL CRTM_Atmosphere_Inspect( Atm )
```

INPUTS:

Atm: CRTM Atmosphere object to display.

UNITS: N/A

TYPE: CRTM_Atmosphere_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.2.8 CRTM_Atmosphere_IsValid interface

NAME:

CRTM_Atmosphere_IsValid

PURPOSE:

Non-pure function to perform some simple validity checks on a CRTM Atmosphere object.

If invalid data is found, a message is printed to stdout.

CALLING SEQUENCE:

result = CRTM_Atmosphere_IsValid(Atm)

or

IF (CRTM_Atmosphere_IsValid(Atm)) THEN....

OBJECTS:

Atm: CRTM Atmosphere object which is to have its

contents checked. UNITS: N/A

TYPE: CRTM_Atmosphere_type

DIMENSION: Scalar ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

If == .FALSE., Atmosphere object is unused or contains

invalid data.

== .TRUE., Atmosphere object can be used in CRTM.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.2.9 CRTM_Atmosphere_Zero interface

NAME:

CRTM_Atmosphere_Zero

PURPOSE:

Elemental subroutine to zero out the data arrays in a CRTM Atmosphere object.

CALLING SEQUENCE:

CALL CRTM_Atmosphere_Zero(Atm)

OUTPUTS:

Atm: CRTM Atmosphere structure in which the data arrays

are to be zeroed out. UNITS: N/A

TYPE: CRTM_Atmosphere_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

COMMENTS:

- The dimension components of the structure are *NOT* set to zero.
- The Climatology, Absorber_ID, and Absorber_Units components are *NOT* reset in this routine.

A.2.10 CRTM_Atmosphere_IOVersion interface

NAME:

CRTM_Atmosphere_IOVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Atmosphere_IOVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.2.11 CRTM_Atmosphere_InquireFile interface

NAME:

CRTM_Atmosphere_InquireFile

PURPOSE:

Function to inquire CRTM Atmosphere object files.

CALLING SEQUENCE:

 $\label{eq:cror_Status} \begin{tabular}{ll} Error_Status = CRTM_Atmosphere_InquireFile(& filename & , & \\ & n_Channels = n_Channels, & \\ & n_Profiles = n_Profiles &) \end{tabular}$

INPUTS:

Filename: Character string specifying the name of a

CRTM Atmosphere data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OPTIONAL OUTPUTS:

n_Channels: The number of spectral channels for which there is

data in the file. Note that this value will always be 0 for a profile-only dataset-- it only has meaning

for K-matrix data.
UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

n_Profiles: The number of profiles in the data file.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

If == SUCCESS, the file inquire was successful
== FAILURE, an unrecoverable error occurred.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.2.12 CRTM_Atmosphere_ReadFile interface

NAME:

 ${\tt CRTM_Atmosphere_ReadFile}$

PURPOSE:

Function to read CRTM Atmosphere object files.

CALLING SEQUENCE:

INPUTS:

Filename: Character string specifying the name of an

Atmosphere format data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OUTPUTS:

Atmosphere: CRTM Atmosphere object array containing the Atmosphere

data. Note the following meanings attributed to the

dimensions of the object array:

Rank-1: M profiles.

Only profile data are to be read in. The file does not contain channel information. The dimension of the structure is understood to

n_Profiles = n_Profiles , &

be the PROFILE dimension.

Rank-2: L channels x M profiles

Channel and profile data are to be read in. The file contains both channel and profile information. The first dimension of the

structure is the CHANNEL dimension, the second is the PROFILE dimension. This is to allow K-matrix structures to be read in with the

same function.

UNITS: N/A

TYPE: CRTM_Atmosphere_type

DIMENSION: Rank-1 (M) or Rank-2 (L x M)

ATTRIBUTES: INTENT(OUT)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

OPTIONAL OUTPUTS:

n_Channels: The number of channels for which data was read. Note that

this value will always be 0 for a profile-only dataset--

it only has meaning for K-matrix data.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

n_Profiles: The number of profiles for which data was read.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

 ${\tt Error_Status:}$ The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.2.13 CRTM_Atmosphere_WriteFile interface

NAME:

CRTM_Atmosphere_WriteFile

PURPOSE:

Function to write CRTM Atmosphere object files.

CALLING SEQUENCE:

Quiet = Quiet)

INPUTS:

Filename: Character string specifying the name of the

Atmosphere format data file to write.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

Atmosphere: CRTM Atmosphere object array containing the Atmosphere

data. Note the following meanings attributed to the

dimensions of the Atmosphere array:

Rank-1: M profiles.

Only profile data are to be read in. The file does not contain channel information. The dimension of the array is understood to

be the PROFILE dimension.

Rank-2: L channels x M profiles

Channel and profile data are to be read in. The file contains both channel and profile

information. The first dimension of the array is the CHANNEL dimension, the second is the PROFILE dimension. This is to allow K-matrix structures to be read in with the same function.

UNITS: N/A

TYPE: CRTM_Atmosphere_type

DIMENSION: Rank-1 (M) or Rank-2 (L x M)

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

- If the output file already exists, it is overwritten.
- If an error occurs during *writing*, the output file is deleted before returning to the calling routine.

A.3 Cloud Structure

```
TYPE :: CRTM_Cloud_type

! Allocation indicator

LOGICAL :: Is_Allocated = .FALSE.
! Dimension values

INTEGER :: Max_Layers = 0 ! K dimension.

INTEGER :: n_Layers = 0 ! Kuse dimension.
! Number of added layers

INTEGER :: n_Added_Layers = 0
! Cloud type

INTEGER :: Type = INVALID_CLOUD
! Cloud state variables

REAL(fp), ALLOCATABLE :: Effective_Radius(:) ! K. Units are microns

REAL(fp), ALLOCATABLE :: Effective_Variance(:) ! K. Units are microns^2

REAL(fp), ALLOCATABLE :: Water_Content(:) ! K. Units are kg/m^2

END TYPE CRTM_Cloud_type
```

Figure A.3: CRTM_Cloud_type structure definition.

Cloud Type	Parameter
Water	WATER_CLOUD
Ice	ICE_CLOUD
Rain	RAIN_CLOUD
Snow	SNOW_CLOUD
Graupel	GRAUPEL_CLOUD
Hail	HAIL_CLOUD

Table A.4: CRTM Cloud structure valid Type definitions.

A.3.1 CRTM_Cloud_AddLayerCopy interface

NAME:

CRTM_Cloud_AddLayerCopy

PURPOSE:

Elemental function to copy an instance of the CRTM Cloud object with additional layers added to the ${\tt TOA}$ of the input.

CALLING SEQUENCE:

cld_out = CRTM_Cloud_AddLayerCopy(cld, n_Added_Layers)

OBJECTS:

cld: Cloud structure to copy.

UNITS: N/A

TYPE: CRTM_Cloud_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Added_Layers: Number of layers to add to the function result.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as Cloud object

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

cld_out: Copy of the input Cloud structure with space for

extra layers added to TOA.

UNITS: N/A

TYPE: CRTM_Cloud_type
DIMENSION: Same as input.
ATTRIBUTES: INTENT(OUT)

A.3.2 CRTM_Cloud_Associated interface

NAME:

 ${\tt CRTM_Cloud_Associated}$

PURPOSE:

Elemental function to test the status of the allocatable components of a CRTM Cloud object.

CALLING SEQUENCE:

Status = CRTM_Cloud_Associated(Cloud)

OBJECTS:

Cloud: Cloud structure which is to have its member's

status tested.

UNITS: N/A
TYPE: CRTM CRTM_Cloud_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

Status: The return value is a logical value indicating the

status of the Cloud members.

.TRUE. - if the array components are allocated. $. {\tt FALSE.}$ – if the array components are not allocated.

UNITS: N/A TYPE: LOGICAL

DIMENSION: Same as input Cloud argument

A.3.3 CRTM_Cloud_Compare interface

NAME:

CRTM_Cloud_Compare

PURPOSE:

Elemental function to compare two CRTM_Cloud objects to within a user specified number of significant figures.

CALLING SEQUENCE:

is_comparable = CRTM_Cloud_Compare(x, y, n_SigFig=n_SigFig)

OBJECTS:

Two CRTM Cloud objects to be compared. x, y:

UNITS: N/A

TYPE: CRTM_Cloud_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Number of significant figure to compare floating point n_SigFig:

> components. UNITS: N/A TYPE: INTEGER

DIMENSION: Scalar or same as input ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

is_equal: Logical value indicating whether the inputs are equal.

UNITS: N/A LOGICAL TYPE:

DIMENSION: Same as inputs.

A.3.4 CRTM Cloud Create interface

NAME:

CRTM_Cloud_Create

PURPOSE:

Elemental subroutine to create an instance of the CRTM Cloud object.

CALLING SEQUENCE:

CALL CRTM_Cloud_Create(Cloud, n_Layers)

OBJECTS:

Cloud: Cloud structure.

UNITS: N/A

TYPE: CRTM_Cloud_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Layers: Number of layers for which there is cloud data.

Must be > 0.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as Cloud object

ATTRIBUTES: INTENT(IN)

A.3.5 CRTM_Cloud_DefineVersion interface

NAME:

 ${\tt CRTM_Cloud_DefineVersion}$

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Cloud_DefineVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.3.6 CRTM_Cloud_Destroy interface

NAME:

CRTM_Cloud_Destroy

PURPOSE:

Elemental subroutine to re-initialize CRTM Cloud objects.

CALLING SEQUENCE:

CALL CRTM_Cloud_Destroy(Cloud)

OBJECTS:

Cloud: Re-initialized Cloud structure.

UNITS: N/A

TYPE: CRTM_Cloud_type
DIMENSION: Scalar OR any rank

ATTRIBUTES: INTENT(OUT)

A.3.7 CRTM_Cloud_Inspect interface

NAME:

CRTM_Cloud_Inspect

PURPOSE:

Subroutine to print the contents of a CRTM Cloud object to stdout.

CALLING SEQUENCE:

CALL CRTM_Cloud_Inspect(Cloud)

INPUTS:

Cloud: CRTM Cloud object to display.

UNITS: N/A

TYPE: CRTM_Cloud_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.3.8 CRTM_Cloud_IsValid interface

NAME:

CRTM_Cloud_IsValid

PURPOSE:

Non-pure function to perform some simple validity checks on a $\ensuremath{\mathsf{CRTM}}$ Cloud object.

If invalid data is found, a message is printed to stdout.

CALLING SEQUENCE:

result = CRTM_Cloud_IsValid(cloud)

or

IF (CRTM_Cloud_IsValid(cloud)) THEN....

OBJECTS:

cloud: CRTM Cloud object which is to have its

contents checked. UNITS: N/A

TYPE: CRTM_Cloud_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

If == .FALSE., Cloud object is unused or contains

invalid data.

== .TRUE., Cloud object can be used in CRTM.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.3.9 CRTM_Cloud_Zero interface

NAME:

CRTM_Cloud_Zero

PURPOSE:

Elemental subroutine to zero out the data arrays in a CRTM Cloud object.

CALLING SEQUENCE:

CALL CRTM_Cloud_Zero(Cloud)

OBJECTS:

Cloud: CRTM Cloud structure in which the data arrays are

to be zeroed out. UNITS: N/A

TYPE: CRTM_Cloud_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

COMMENTS:

- The dimension components of the structure are *NOT* set to zero.

- The cloud type component is *NOT* reset.

A.3.10 CRTM_Cloud_IOVersion interface

NAME:

CRTM_Cloud_IOVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Cloud_IOVersion(Id)

OUTPUT ARGUMENTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.3.11 CRTM_Cloud_InquireFile interface

NAME:

CRTM_Cloud_InquireFile

PURPOSE:

Function to inquire CRTM Cloud object files.

CALLING SEQUENCE:

INPUTS:

Filename: Character string specifying the name of a

CRTM Cloud data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OPTIONAL OUTPUTS:

n_Clouds: The number of Cloud profiles in the data file.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

 ${\tt Error_Status:} \quad {\tt The \ return \ value \ is \ an \ integer \ defining \ the \ error \ status.}$

The error codes are defined in the Message_Handler module.

If == SUCCESS, the file inquire was successful
== FAILURE, an unrecoverable error occurred.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar

A.3.12 CRTM_Cloud_ReadFile interface

CRTM_Cloud_ReadFile

NAME:

PURPOSE: Function to read CRTM Cloud object files. CALLING SEQUENCE: Error_Status = CRTM_Cloud_ReadFile(Filename Cloud , & Quiet = Quiet No_Close = No_Close, & n_Clouds = n_Clouds) INPUTS: Filename: Character string specifying the name of a Cloud format data file to read. UNITS: N/A TYPE: CHARACTER(*) DIMENSION: Scalar ATTRIBUTES: INTENT(IN) OUTPUTS: Cloud: CRTM Cloud object array containing the Cloud data. UNITS: N/A TYPE: CRTM_Cloud_type DIMENSION: Rank-1 ATTRIBUTES: INTENT(OUT) OPTIONAL INPUTS: Quiet: Set this logical argument to suppress INFORMATION messages being printed to stdout If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT]. == .TRUE., INFORMATION messages are SUPPRESSED. If not specified, default is .FALSE. UNITS: N/A TYPE: LOGICAL DIMENSION: Scalar ATTRIBUTES: INTENT(IN), OPTIONAL No_Close: Set this logical argument to NOT close the file upon exit. If == .FALSE., the input file is closed upon exit [DEFAULT] == .TRUE., the input file is NOT closed upon exit. If not specified, default is .FALSE. UNITS: N/A

LOGICAL

TYPE:

DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

OPTIONAL OUTPUTS:

n_Clouds: The actual number of cloud profiles read in.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.3.13 CRTM_Cloud_WriteFile interface

NAME:

CRTM_Cloud_WriteFile

PURPOSE:

Function to write CRTM Cloud object files.

CALLING SEQUENCE:

INPUTS:

Filename: Character string specifying the name of the

Cloud format data file to write.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

Cloud: CRTM Cloud object array containing the Cloud data.

UNITS: N/A

TYPE: CRTM_Cloud_type

DIMENSION: Rank-1 ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

 ${\tt messages} \ {\tt being} \ {\tt printed} \ {\tt to} \ {\tt stdout}$

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

No_Close: Set this logical argument to NOT close the file upon exit.

If == .FALSE., the input file is closed upon exit [DEFAULT]

== .TRUE., the input file is NOT closed upon exit.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

- If the output file already exists, it is overwritten.
- If an error occurs during *writing*, the output file is deleted before returning to the calling routine.

A.4 Aerosol Structure

```
TYPE :: CRTM_Aerosol_type
  ! Allocation indicator
  LOGICAL :: Is_Allocated = .FALSE.
  ! Dimension values
  INTEGER :: Max_Layers = 0  ! K dimension.
  INTEGER :: n_Layers = 0  ! Kuse dimension
  ! Number of added layers
  INTEGER :: n_Added_Layers = 0
  ! Aerosol type
  INTEGER :: Type = INVALID_AEROSOL
  ! Aerosol state variables
  REAL(fp), ALLOCATABLE :: Effective_Radius(:)  ! K. Units are microns
  REAL(fp), ALLOCATABLE :: Concentration(:)  ! K. Units are kg/m^2
  END TYPE CRTM_Aerosol_type
```

Figure A.4: CRTM_Aerosol_type structure definition.

Aerosol Type	Parameter	r_{eff} Range $(\mu \mathrm{m})$
Dust	DUST_AEROSOL	0.01 - 8
Sea salt SSAM	SEASALT_SSAM_AEROSOL	0.3 - 1.45
Sea salt SSCM1	SEASALT_SSCM1_AEROSOL	1.0 - 4.8
Sea salt SSCM2	SEASALT_SSCM2_AEROSOL	3.25 - 17.3
Sea salt SSCM3	SEASALT_SSCM3_AEROSOL	7.5 - 89
Organic carbon	ORGANIC_CARBON_AEROSOL	0.09 - 0.21
Black carbon	BLACK_CARBON_AEROSOL	0.036 - 0.074
Sulfate	SULFATE_AEROSOL	0.24 - 0.8

Table A.5: CRTM Aerosol structure valid Type definitions and effective radii. SSAM \equiv Sea Salt Accumulation Mode, SSCM \equiv Sea Salt Coarse Mode.

A.4.1 CRTM_Aerosol_AddLayerCopy interface

NAME:

CRTM_Aerosol_AddLayerCopy

PURPOSE:

Elemental function to copy an instance of the CRTM Aerosol object with additional layers added to the ${\tt TOA}$ of the input.

CALLING SEQUENCE:

aer_out = CRTM_Aerosol_AddLayerCopy(aer, n_Added_Layers)

OBJECTS:

aer: Aerosol structure to copy.

UNITS: N/A

TYPE: CRTM_Aerosol_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Added_Layers: Number of layers to add to the function result.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as Aerosol object

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

aer_out: Copy of the input Aerosol structure with space for

extra layers added to TOA.

UNITS: N/A

TYPE: CRTM_Aerosol_type
DIMENSION: Same as input.
ATTRIBUTES: INTENT(OUT)

A.4.2 CRTM_Aerosol_Associated interface

NAME:

CRTM_Aerosol_Associated

PURPOSE:

Elemental function to test the status of the allocatable components of a CRTM Aerosol object.

CALLING SEQUENCE:

Status = CRTM_Aerosol_Associated(Aerosol)

OBJECTS:

Aerosol: Aerosol structure which is to have its member's status tested.

UNITS: N/A
TYPE: CRTM CRTM_Aerosol_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

Status: The return value is a logical value indicating the

status of the Aerosol members.

.TRUE. - if the array components are allocated. $. {\tt FALSE.}$ – if the array components are not allocated.

UNITS: N/A TYPE: LOGICAL

DIMENSION: Same as input Aerosol argument

A.4.3 CRTM_Aerosol_Compare interface

NAME:

CRTM_Aerosol_Compare

PURPOSE:

Elemental function to compare two CRTM_Aerosol objects to within a user specified number of significant figures.

CALLING SEQUENCE:

is_comparable = CRTM_Aerosol_Compare(x, y, n_SigFig=n_SigFig)

OBJECTS:

Two CRTM Aerosol objects to be compared. x, y:

UNITS: N/A

TYPE: CRTM_Aerosol_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Number of significant figure to compare floating point n_SigFig:

> components. UNITS: N/A TYPE: INTEGER

DIMENSION: Scalar or same as input ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

is_equal: Logical value indicating whether the inputs are equal.

UNITS: N/A LOGICAL TYPE:

DIMENSION: Same as inputs.

A.4.4 CRTM_Aerosol_Create interface

NAME:

CRTM_Aerosol_Create

PURPOSE:

Elemental subroutine to create an instance of the CRTM Aerosol object.

CALLING SEQUENCE:

CALL CRTM_Aerosol_Create(Aerosol, n_Layers)

OBJECTS:

Aerosol: Aerosol structure.

UNITS: N/A

TYPE: CRTM_Aerosol_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Layers: Number of layers for which there is Aerosol data.

Must be > 0.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as Aerosol object

ATTRIBUTES: INTENT(IN)

A.4.5 CRTM_Aerosol_DefineVersion interface

NAME:

CRTM_Aerosol_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Aerosol_DefineVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module.
UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.4.6 CRTM_Aerosol_Destroy interface

NAME:

CRTM_Aerosol_Destroy

PURPOSE:

Elemental subroutine to re-initialize CRTM Aerosol objects.

CALLING SEQUENCE:

CALL CRTM_Aerosol_Destroy(Aerosol)

OBJECTS:

Aerosol: Re-initialized Aerosol structure.

UNITS: N/A

TYPE: CRTM_Aerosol_type
DIMENSION: Scalar OR any rank

ATTRIBUTES: INTENT(OUT)

A.4.7 CRTM_Aerosol_Inspect interface

NAME:

CRTM_Aerosol_Inspect

PURPOSE:

Subroutine to print the contents of a CRTM Aerosol object to stdout.

CALLING SEQUENCE:

CALL CRTM_Aerosol_Inspect(Aerosol)

INPUTS:

Aerosol: CRTM Aerosol object to display.

UNITS: N/A

TYPE: CRTM_Aerosol_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.4.8 CRTM_Aerosol_IsValid interface

NAME:

CRTM_Aerosol_IsValid

PURPOSE:

Non-pure function to perform some simple validity checks on a $\ensuremath{\mathsf{CRTM}}$ Aerosol object.

If invalid data is found, a message is printed to stdout.

CALLING SEQUENCE:

result = CRTM_Aerosol_IsValid(Aerosol)

or

IF (CRTM_Aerosol_IsValid(Aerosol)) THEN....

OBJECTS:

Aerosol: CRTM Aerosol object which is to have its

contents checked. UNITS: N/A

TYPE: CRTM_Aerosol_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

If == .FALSE., Aerosol object is unused or contains

invalid data.

== .TRUE., Aerosol object can be used in CRTM.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.4.9 CRTM_Aerosol_Zero interface

NAME:

CRTM_Aerosol_Zero

PURPOSE:

Elemental subroutine to zero out the data arrays in a CRTM Aerosol object.

CALLING SEQUENCE:

CALL CRTM_Aerosol_Zero(Aerosol)

OBJECTS:

Aerosol: CRTM Aerosol object in which the data arrays are

to be zeroed out. UNITS: N/A

TYPE: CRTM_Aerosol_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

COMMENTS:

- The dimension components of the structure are *NOT* set to zero.

- The Aerosol type component is *NOT* reset.

A.4.10 CRTM_Aerosol_IOVersion interface

NAME:

CRTM_Aerosol_IOVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Aerosol_IOVersion(Id)

OUTPUT ARGUMENTS:

Id: Character string containing the version Id information

for the module. UNITS: ${\rm N/A}$

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.4.11 CRTM_Aerosol_InquireFile interface

NAME:

CRTM_Aerosol_InquireFile

PURPOSE:

Function to inquire CRTM Aerosol object files.

CALLING SEQUENCE:

INPUTS:

Filename: Character string specifying the name of a

CRTM Aerosol data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OPTIONAL OUTPUTS:

n_Aerosols: The number of Aerosol profiles in the data file.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

 ${\tt Error_Status:} \quad {\tt The \ return \ value \ is \ an \ integer \ defining \ the \ error \ status.}$

The error codes are defined in the Message_Handler module.

If == SUCCESS, the file inquire was successful
== FAILURE, an unrecoverable error occurred.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar

A.4.12 CRTM_Aerosol_ReadFile interface

NAME:

CRTM_Aerosol_ReadFile PURPOSE: Function to read CRTM Aerosol object files. CALLING SEQUENCE: Error_Status = CRTM_Aerosol_ReadFile(Filename Aerosol Quiet = Quiet No_Close = No_Close , & n_Aerosols = n_Aerosols) INPUTS: Filename: Character string specifying the name of a Aerosol format data file to read. UNITS: N/A TYPE: CHARACTER(*) DIMENSION: Scalar ATTRIBUTES: INTENT(IN) OUTPUTS: Aerosol: CRTM Aerosol object array containing the aerosol data. UNITS: N/A CRTM_Aerosol_type TYPE: DIMENSION: Rank-1 ATTRIBUTES: INTENT(OUT) OPTIONAL INPUTS: Quiet: Set this logical argument to suppress INFORMATION messages being printed to stdout If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT]. == .TRUE., INFORMATION messages are SUPPRESSED. If not specified, default is .FALSE. N/A UNITS: TYPE: LOGICAL DIMENSION: Scalar ATTRIBUTES: INTENT(IN), OPTIONAL No_Close: Set this logical argument to NOT close the file upon exit. If == .FALSE., the input file is closed upon exit [DEFAULT] == .TRUE., the input file is NOT closed upon exit. If not specified, default is .FALSE. UNITS: N/A TYPE: LOGICAL

DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

OPTIONAL OUTPUTS:

n_Aerosols: The actual number of aerosol profiles read in.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.4.13 CRTM_Aerosol_WriteFile interface

NAME:

CRTM_Aerosol_WriteFile

PURPOSE:

Function to write CRTM Aerosol object files.

CALLING SEQUENCE:

Error_Status = CRTM_Aerosol_WriteFile(Filename , &

Aerosol , &
Quiet = Quiet , &
No_Close = No_Close)

INPUTS:

Filename: Character string specifying the name of the

Aerosol format data file to write.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

Aerosol: CRTM Aerosol object array containing the Aerosol data.

UNITS: N/A

TYPE: CRTM_Aerosol_type

DIMENSION: Rank-1 ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

 ${\tt messages} \ {\tt being} \ {\tt printed} \ {\tt to} \ {\tt stdout}$

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

No_Close: Set this logical argument to NOT close the file upon exit.

If == .FALSE., the input file is closed upon exit [DEFAULT]

== .TRUE., the input file is NOT closed upon exit.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

- If the output file already exists, it is overwritten.
- If an error occurs during *writing*, the output file is deleted before returning to the calling routine.

A.5 Surface Structure

```
TYPE :: CRTM_Surface_type
  ! Allocation indicator
 LOGICAL :: Is_Allocated = .TRUE. ! Placeholder for future expansion
 ! Dimension values
 ! ...None yet
 ! Gross type of surface determined by coverage
 REAL(fp) :: Land_Coverage = ZERO
 REAL(fp) :: Water_Coverage = ZERO
 REAL(fp) :: Snow_Coverage = ZERO
 REAL(fp) :: Ice_Coverage = ZERO
  ! Land surface type data
 INTEGER :: Land_Type
                                   = DEFAULT_LAND_TYPE
 REAL(fp) :: Land_Temperature = DEFAULT_LAND_TEMPERATURE
  REAL(fp) :: Soil_Moisture_Content = DEFAULT_SOIL_MOISTURE_CONTENT
  REAL(fp) :: Canopy_Water_Content = DEFAULT_CANOPY_WATER_CONTENT
  REAL(fp) :: Vegetation_Fraction = DEFAULT_VEGETATION_FRACTION
  REAL(fp) :: Soil_Temperature = DEFAULT_SOIL_TEMPERATURE
  ! Water type data
  INTEGER :: Water_Type = DEFAULT_WATER_TYPE
  REAL(fp) :: Water_Temperature = DEFAULT_WATER_TEMPERATURE
  REAL(fp) :: Wind_Speed = DEFAULT_WIND_SPEED
  REAL(fp) :: Wind_Direction = DEFAULT_WIND_DIRECTION
 REAL(fp) :: Salinity = DEFAULT_SALINITY
 ! Snow surface type data
INTEGER :: Snow_Type = DEFAULT_SNOW_TYPE
 REAL(fp) :: Snow_Temperature = DEFAULT_SNOW_TEMPERATURE
 REAL(fp) :: Snow_Depth = DEFAULT_SNOW_DEPTH
REAL(fp) :: Snow_Density = DEFAULT_SNOW_DENSITY
 REAL(fp) :: Snow_Grain_Size = DEFAULT_SNOW_GRAIN_SIZE
  ! Ice surface type data
  INTEGER :: Ice_Type
                           = DEFAULT_ICE_TYPE
  REAL(fp) :: Ice_Temperature = DEFAULT_ICE_TEMPERATURE
  REAL(fp) :: Ice_Thickness = DEFAULT_ICE_THICKNESS
                             = DEFAULT_ICE_DENSITY
  REAL(fp) :: Ice_Density
 REAL(fp) :: Ice_Roughness = DEFAULT_ICE_ROUGHNESS
  ! SensorData containing channel brightness temperatures
 TYPE(CRTM_SensorData_type) :: SensorData
END TYPE CRTM_Surface_type
```

Figure A.5: CRTM_Surface_type structure definition.

Component	Description	Units	Dimensions
n_Sensors	The number of sensors for which data is pro-	N/A	Scalar
	vided inside the SensorData structure	,	
Land_Coverage	Fraction of the FOV that is land surface	N/A	Scalar
Water_Coverage	Fraction of the FOV that is water surface	N/A	Scalar
${\tt Snow_Coverage}$	Fraction of the FOV that is snow surface	N/A	Scalar
Ice_Coverage	Fraction of the FOV that is ice surface	N/A	Scalar
Wind_Speed	Surface wind speed	$\mathrm{m.s^{-1}}$	Scalar
$Wind_Direction$	Surface wind direction	deg. E from N	Scalar
Land_Type	Land surface type	N/A	Scalar
${\tt Land_Temperature}$	Land surface temperature	Kelvin	Scalar
Soil_Moisture_Content	Volumetric water content of the soil	$\mathrm{g.cm^{-3}}$	Scalar
Canopy_Water_Content	Gravimetric water content of the canopy	$\mathrm{g.cm^{-3}}$	Scalar
Vegetation_Fraction	Vegetation fraction of the surface	%	Scalar
Soil_Temperature	Soil temperature	Kelvin	Scalar
Water_Type	Water surface type	N/A	Scalar
${\tt Water_Temperature}$	Water surface temperature	Kelvin	Scalar
Salinity	Water salinity	‰	Scalar
Snow_Type	Snow surface type	N/A	Scalar
Snow_Temperature	Snow surface temperature	Kelvin	Scalar
Snow_Depth	Snow depth	mm	Scalar
${ t Snow_Density}$	Snow density	$\mathrm{g.m^{-3}}$	Scalar
Snow_Grain_Size	Snow grain size	mm	Scalar
Ice_Type	Ice surface type	N/A	Scalar
Ice_Temperature	Ice surface temperature	Kelvin	Scalar
Ice_Thickness	Thickness of ice	mm	Scalar
Ice_Density	Density of ice	$\mathrm{g.m^{-3}}$	Scalar
Ice_Roughness	Measure of the surface roughness of the ice	N/A	Scalar
SensorData	Satellite sensor data required for some surface	N/A	Scalar
	emissivity algorithms	•	

 Table A.6: CRTM Surface structure component description.

Parameter	Value	Units	
Surface type independent data			
DEFAULT_WIND_SPEED	5.0	$\mathrm{m.s^{-1}}$	
DEFAULT_WIND_DIRECTION	0.0	deg. E from N	
Land surface type data			
DEFAULT_LAND_TYPE	GRASS_SOIL	N/A	
DEFAULT_LAND_TEMPERATURE	283.0	K	
DEFAULT_SOIL_MOISTURE_CONTENT	0.05	$\mathrm{g.cm^{-3}}$	
DEFAULT_CANOPY_WATER_CONTENT	0.05	$\mathrm{g.cm^{-3}}$	
DEFAULT_VEGETATION_FRACTION	0.3	30%	
DEFAULT_SOIL_TEMPERATURE	283.0	K	
Water type	e data		
DEFAULT_WATER_TYPE	SEA_WATER	N/A	
DEFAULT_WATER_TEMPERATURE	283.0	K	
DEFAULT_SALINITY	33.0	ppmv	
Snow surface	type data		
DEFAULT_SNOW_TYPE	NEW_SNOW	N/A	
DEFAULT_SNOW_TEMPERATURE	263.0	K	
DEFAULT_SNOW_DEPTH	50.0	mm	
DEFAULT_SNOW_DENSITY	0.2	$\mathrm{g.cm^{-3}}$	
DEFAULT_SNOW_GRAIN_SIZE	2.0	mm	
Ice surface type data			
DEFAULT_ICE_TYPE	FRESH_ICE	N/A	
DEFAULT_ICE_TEMPERATURE	263.0	K	
DEFAULT_ICE_THICKNESS	10.0	mm	
DEFAULT_ICE_DENSITY	0.9	$\mathrm{g.cm^{-3}}$	
DEFAULT_ICE_ROUGHNESS	0.0	N/A	

Table A.7: CRTM Surface structure default values.

Land Type	Parameter
Compacted soil	COMPACTED_SOIL
Tilled soil	TILLED_SOIL
Sand	SAND
Rock	ROCK
Irrigated low vegetation	IRRIGATED_LOW_VEGETATION
Meadow grass	MEADOW_GRASS
Scrub	SCRUB
Broadleaf forest	BROADLEAF_FOREST
Pine forest	PINE_FOREST
Tundra	TUNDRA
Grass-soil	GRASS_SOIL
Broadleaf-pine forest	BROADLEAF_PINE_FOREST
Grass scrub	GRASS_SCRUB
Soil-grass-scrub	SOIL_GRASS_SCRUB
Urban concrete	URBAN_CONCRETE
Pine brush	PINE_BRUSH
Broadleaf brush	BROADLEAF_BRUSH
Wet soil	WET_SOIL
Scrub-soil	SCRUB_SOIL
Broadleaf (70) -Pine (30)	BROADLEAF70_PINE30

 $\textbf{Table A.8: } \textbf{CRTM Surface structure valid } \textbf{Land_Type definitions}.$

Water Type	Parameter	
Sea water	SEA_WATER	
Fresh water	FRESH_WATER	

Table A.9: CRTM Surface structure valid Water_Type definitions.

Snow Type	Parameter
Wet snow	WET_SNOW
Grass after snow	GRASS_AFTER_SNOW
Powder snow	POWDER_SNOW
RS snow(A)	RS_SNOW_A
RS snow(B)	RS_SNOW_B
RS snow(C)	RS_SNOW_C
RS snow(D)	RS_SNOW_D
RS snow(E)	RS_SNOW_E
Thin Crust snow	THIN_CRUST_SNOW
Thick crust snow	THICK_CRUST_SNOW
Shallow snow	SHALLOW_SNOW
Deep snow	DEEP_SNOW
Crust snow	CRUST_SNOW
Medium snow	MEDIUM_SNOW
Bottom crust snow(A)	BOTTOM_CRUST_SNOW_A
Bottom crust snow(B)	BOTTOM_CRUST_SNOW_B

 $\textbf{Table A.10:} \ \, \mathsf{CRTM} \ \, \mathsf{Surface} \ \, \mathsf{structure} \ \, \mathsf{valid} \ \, \mathsf{Snow_Type} \ \, \mathsf{definitions}.$

Ice Type	Parameter
Fresh ice	FRESH_ICE
First year sea ice	FIRST_YEAR_SEA_ICE
Multiple year sea ice	MULTI_YEAR_SEA_ICE
Ice floe	ICE_FLOE
Ice ridge	ICE_RIDGE

 Table A.11: CRTM Surface structure valid Ice_Type definitions.

A.5.1 CRTM_Surface_Associated interface

NAME:

CRTM_Surface_Associated

PURPOSE:

Elemental function to test the status of the allocatable components of a CRTM Surface object.

CALLING SEQUENCE:

Status = CRTM_Surface_Associated(Sfc)

OBJECTS:

Sfc: Surface structure which is to have its member's

status tested. UNITS: N/A

TYPE: CRTM_Surface_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

Status: The return value is a logical value indicating the

status of the Surface members.

.TRUE. – if the array components are allocated. .FALSE. – if the array components are not allocated.

UNITS: N/A
TYPE: LOGICAL

DIMENSION: Same as input

A.5.2 CRTM_Surface_Compare interface

NAME:

CRTM_Surface_Compare

PURPOSE:

Elemental function to compare two CRTM_Surface objects to within a user specified number of significant figures.

CALLING SEQUENCE:

is_comparable = CRTM_Surface_Compare(x, y, n_SigFig=n_SigFig)

OBJECTS:

x, y: Two CRTM Surface objects to be compared.

UNITS: N/A

TYPE: CRTM_Surface_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

n_SigFig: Number of significant figure to compare floating point

components.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as input
ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

is_equal: Logical value indicating whether the inputs are equal.

UNITS: N/A
TYPE: LOGICAL

DIMENSION: Same as inputs.

A.5.3 CRTM_Surface_CoverageType interface

NAME:

CRTM_Surface_CoverageType

PURPOSE:

Elemental function to return the gross surface type based on coverage.

CALLING SEQUENCE:

type = CRTM_Surface_CoverageType(sfc)

INPUTS:

Sfc: CRTM Surface object for which the gross surface type is required.

UNITS: N/A

TYPE: CRTM_Surface_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

FUNCTION:

type: Surface type indicator for the passed CRTM Surface object.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Same as input

COMMENTS:

For a scalar Surface object, this function result can be used to determine what gross surface types are included by using it to index the SURFACE_TYPE_NAME parameter arrays, e.g.

WRITE(*,*) SURFACE_TYPE_NAME(CRTM_Surface_CoverageType(sfc))

A.5.4 CRTM_Surface_Create interface

NAME:

CRTM_Surface_Create

PURPOSE:

Elemental subroutine to create an instance of the CRTM Surface object.

CALLING SEQUENCE:

CALL CRTM_Surface_Create(Sfc , &

n_Channels)

OBJECTS:

Sfc: Surface structure.

UNITS: N/A

TYPE: CRTM_Surface_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUT ARGUMENTS:

n_Channels: Number of channels dimension of SensorData

substructure

** Note: Can be = 0 (i.e. no sensor data). **

UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as Surface object

ATTRIBUTES: INTENT(IN)

A.5.5 CRTM_Surface_DefineVersion interface

NAME:

CRTM_Surface_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Surface_DefineVersion(Id)

OUTPUT ARGUMENTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.5.6 CRTM_Surface_Destroy interface

NAME:

CRTM_Surface_Destroy

PURPOSE:

Elemental subroutine to re-initialize CRTM Surface objects.

CALLING SEQUENCE:

CALL CRTM_Surface_Destroy(Sfc)

OBJECTS:

Sfc: Re-initialized Surface structure.

UNITS: N/A

TYPE: CRTM_Surface_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

A.5.7 CRTM_Surface_Inspect interface

NAME:

CRTM_Surface_Inspect

PURPOSE:

Subroutine to print the contents of a CRTM Surface object to stdout.

CALLING SEQUENCE:

CALL CRTM_Surface_Inspect(Sfc)

INPUTS:

Sfc: CRTM Surface object to display.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.5.8 CRTM_Surface_IsCoverageValid interface

NAME:

CRTM_Surface_IsCoverageValid

PURPOSE:

Function to determine if the coverage fractions are valid for a CRTM Surface object.

CALLING SEQUENCE:

result = CRTM_Surface_IsCoverageValid(Sfc)

OBJECTS:

Sfc: CRTM Surface object which is to have its

coverage fractions checked.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Scalar

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.5.9 CRTM_Surface_IsValid interface

NAME:

CRTM_Surface_IsValid

PURPOSE:

Non-pure function to perform some simple validity checks on a CRTM Surface object.

If invalid data is found, a message is printed to stdout.

CALLING SEQUENCE:

result = CRTM_Surface_IsValid(Sfc)

or

IF (CRTM_Surface_IsValid(Sfc)) THEN....

OBJECTS:

Sfc: CRTM Surface object which is to have its

contents checked. UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

If == .FALSE., Surface object is unused or contains

invalid data.

== .TRUE., Surface object can be used in CRTM.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.5.10 CRTM_Surface_Zero interface

NAME:

CRTM_Surface_Zero

PURPOSE:

Elemental subroutine to zero out the data arrays in a CRTM Surface object.

CALLING SEQUENCE:

CALL CRTM_Surface_Zero(Sfc)

OUTPUT ARGUMENTS:

Sfc: CRTM Surface structure in which the data arrays

are to be zeroed out.

UNITS: N/A

TYPE: CRTM_Surface_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

COMMENTS:

- The various surface type indicator flags are *NOT* reset in this routine.

A.5.11 CRTM_Surface_IOVersion interface

NAME:

CRTM_Surface_IOVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Surface_IOVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.5.12 CRTM_Surface_InquireFile interface

NAME:

CRTM_Surface_InquireFile

PURPOSE:

Function to inquire CRTM Surface object files.

CALLING SEQUENCE:

 $\label{eq:cron_status} \begin{tabular}{ll} Error_Status = CRTM_Surface_InquireFile(Filename & , & \\ & n_Channels = n_Channels, & \\ & n_Profiles = n_Profiles &) \end{tabular}$

INPUTS:

Filename: Character string specifying the name of a

CRTM Surface data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OPTIONAL OUTPUTS:

n_Channels: The number of spectral channels for which there is

data in the file. Note that this value will always be 0 for a profile-only dataset-- it only has meaning

for K-matrix data.

UNITS: N/A

TYPE: INTEGER

DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

 $n_{\text{-}}$ Profiles: The number of profiles in the data file.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.5.13 CRTM_Surface_ReadFile interface

NAME:

CRTM_Surface_ReadFile

PURPOSE:

Function to read CRTM Surface object files.

CALLING SEQUENCE:

Surface , & Quiet = Quiet , &

n_Channels = n_Channels , & n_Profiles = n_Profiles , &

INPUTS:

Filename: Character string specifying the name of an

Surface format data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OUTPUTS:

Surface: CRTM Surface object array containing the Surface

data. Note the following meanings attributed to the

dimensions of the object array:

Rank-1: M profiles.

Only profile data are to be read in. The file does not contain channel information. The dimension of the structure is understood to

be the PROFILE dimension.

Rank-2: L channels x M profiles

Channel and profile data are to be read in. The file contains both channel and profile information. The first dimension of the

structure is the CHANNEL dimension, the second is the PROFILE dimension. This is to allow K-matrix structures to be read in with the

same function.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Rank-1 (M) or Rank-2 (L x M)

ATTRIBUTES: INTENT(OUT)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

OPTIONAL OUTPUTS:

n_Channels: The number of channels for which data was read. Note that

this value will always be 0 for a profile-only dataset--

it only has meaning for K-matrix data.

UNITS: N/A

TYPE: INTEGER DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

n_Profiles: The number of profiles for which data was read.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

 ${\tt Error_Status:}\ {\tt The\ return\ value\ is\ an\ integer\ defining\ the\ error\ status.}$

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.5.14 CRTM_Surface_WriteFile interface

NAME:

CRTM_Surface_WriteFile

PURPOSE:

Function to write CRTM Surface object files.

CALLING SEQUENCE:

Error_Status = CRTM_Surface_WriteFile(Filename , &

Surface , &

Quiet = Quiet)

INPUTS:

Filename: Character string specifying the name of the

Surface format data file to write.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

Surface: CRTM Surface object array containing the Surface

data. Note the following meanings attributed to the

dimensions of the Surface array:

Rank-1: M profiles.

Only profile data are to be read in. The file does not contain channel information. The dimension of the array is understood to

be the PROFILE dimension.

Rank-2: L channels x M profiles

Channel and profile data are to be read in. The file contains both channel and profile information. The first dimension of the array is the CHANNEL dimension, the second is the PROFILE dimension. This is to allow K-matrix structures to be read in with the same function.

UNITS: N/A

TYPE: CRTM_Surface_type

DIMENSION: Rank-1 (M) or Rank-2 (L x M)

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

If == SUCCESS, the file write was successful
== FAILURE, an unrecoverable error occurred.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

- If the output file already exists, it is overwritten.
- If an error occurs during *writing*, the output file is deleted before returning to the calling routine.

A.6 SensorData Structure

```
TYPE :: CRTM_SensorData_type

! Allocation indicator

LOGICAL :: Is_Allocated = .FALSE.
! Dimension values

INTEGER :: n_Channels = 0 ! L
! The data sensor IDs

CHARACTER(STRLEN) :: Sensor_Id = ' '

INTEGER :: WMO_Satellite_ID = INVALID_WMO_SATELLITE_ID

INTEGER :: WMO_Sensor_ID = INVALID_WMO_SENSOR_ID
! The sensor channels and brightness temperatures

INTEGER , ALLOCATABLE :: Sensor_Channel(:) ! L

REAL(fp), ALLOCATABLE :: Tb(:) ! L

END TYPE CRTM_SensorData_type
```

Figure A.6: CRTM_SensorData_type structure definition.

Component	Description	Units	Dimensions
n_Channels	Number of channels to use in SfcOptics emis-	N/A	Scalar
	sivty algorithms (L)		
${\tt Sensor_Id}$	The sensor id	N/A	Scalar
$WMO_Satellite_Id$	The WMO satellite Id	N/A	Scalar
WMO_Sensor_Id	The WMO sensor Id	N/A	Scalar
Sensor_Channel	The channel numbers	N/A	L
Tb	The brightness temperature measurements for	Kelvin	L
	each channel		

Table A.12: CRTM SensorData structure component description.

A.6.1 CRTM_SensorData_Associated interface

NAME:

CRTM_SensorData_Associated

PURPOSE:

Elemental function to test the status of the allocatable components of a CRTM SensorData object.

CALLING SEQUENCE:

Status = CRTM_SensorData_Associated(SensorData)

OBJECTS:

SensorData: SensorData structure which is to have its member's

status tested. UNITS: ${\rm N/A}$

TYPE: CRTM_SensorData_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

Status: The return value is a logical value indicating the

status of the SensorData members.

.TRUE. – if the array components are allocated. .FALSE. – if the array components are not allocated.

UNITS: N/A
TYPE: LOGICAL

DIMENSION: Same as input SensorData argument

A.6.2 CRTM_SensorData_Compare interface

NAME:

CRTM_SensorData_Compare

PURPOSE:

Elemental function to compare two CRTM_SensorData objects to within a user specified number of significant figures.

CALLING SEQUENCE:

is_comparable = CRTM_SensorData_Compare(x, y, n_SigFig=n_SigFig)

OBJECTS:

 ${\tt x}, {\tt y}$: Two CRTM SensorData objects to be compared.

UNITS: N/A

TYPE: CRTM_SensorData_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

n_SigFig: Number of significant figure to compare floating point

 ${\tt components.}$

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as input
ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

is_equal: Logical value indicating whether the inputs are equal.

UNITS: N/A
TYPE: LOGICAL

DIMENSION: Same as inputs.

A.6.3 CRTM_SensorData_Create interface

NAME:

CRTM_SensorData_Create

PURPOSE:

Elemental subroutine to create an instance of the CRTM SensorData object.

CALLING SEQUENCE:

CALL CRTM_SensorData_Create(SensorData, n_Channels)

OBJECTS:

SensorData: SensorData structure.

UNITS: N/A

TYPE: CRTM_SensorData_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Channels: Number of sensor channels.

Must be > 0.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as SensorData object

ATTRIBUTES: INTENT(IN)

A.6.4 CRTM_SensorData_DefineVersion interface

NAME:

CRTM_SensorData_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_SensorData_DefineVersion(Id)

OUTPUT ARGUMENTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.6.5 CRTM_SensorData_Destroy interface

NAME:

CRTM_SensorData_Destroy

PURPOSE:

Elemental subroutine to re-initialize CRTM SensorData objects.

CALLING SEQUENCE:

CALL CRTM_SensorData_Destroy(SensorData)

OBJECTS:

SensorData: Re-initialized SensorData structure.

UNITS: N/A

TYPE: CRTM_SensorData_type
DIMENSION: Scalar OR any rank

ATTRIBUTES: INTENT(OUT)

A.6.6 CRTM_SensorData_Inspect interface

NAME:

CRTM_SensorData_Inspect

PURPOSE:

Subroutine to print the contents of a CRTM SensorData object to stdout.

CALLING SEQUENCE:

CALL CRTM_SensorData_Inspect(SensorData)

INPUTS:

SensorData: CRTM SensorData object to display.

UNITS: N/A

TYPE: CRTM_SensorData_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.6.7 CRTM_SensorData_IsValid interface

NAME: CRTM_SensorData_IsValid PURPOSE: Non-pure function to perform some simple validity checks on a CRTM SensorData object. If invalid data is found, a message is printed to stdout. CALLING SEQUENCE: result = CRTM_SensorData_IsValid(SensorData) IF (CRTM_SensorData_IsValid(SensorData)) THEN.... OBJECTS: SensorData: CRTM SensorData object which is to have its contents checked. UNITS: N/A CRTM_SensorData_type TYPE: DIMENSION: Scalar ATTRIBUTES: INTENT(IN) FUNCTION RESULT: Logical variable indicating whether or not the input result: passed the check. If == .FALSE., SensorData object is unused or contains invalid data. == .TRUE., SensorData object can be used in CRTM. UNITS: N/A TYPE: LOGICAL DIMENSION: Scalar A.6.8 CRTM_SensorData_Zero interface NAME: CRTM_SensorData_Zero PURPOSE: Elemental subroutine to zero out the data arrays in a

SensorData: CRTM SensorData structure in which the data arrays are

CALL CRTM_SensorData_Zero(SensorData)

CRTM SensorData object.

CALLING SEQUENCE:

OBJECTS:

to be zeroed out. UNITS: N/A

TYPE: CRTM_SensorData_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

COMMENTS:

- The dimension components of the structure are *NOT* set to zero.
- The SensorData sensor id and channel components are *NOT* reset.

A.6.9 CRTM_SensorData_IOVersion interface

NAME:

CRTM_SensorData_IOVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_SensorData_IOVersion(Id)

OUTPUT ARGUMENTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.6.10 CRTM_SensorData_InquireFile interface

NAME:

CRTM_SensorData_InquireFile

PURPOSE:

Function to inquire CRTM SensorData object files.

CALLING SEQUENCE:

INPUTS:

Filename: Character string specifying the name of a

CRTM SensorData data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN)

OPTIONAL OUTPUTS:

n_DataSets: The number of datasets in the file.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.6.11 CRTM_SensorData_ReadFile interface

NAME:

CRTM_SensorData_ReadFile

PURPOSE:

Function to read CRTM SensorData object files.

CALLING SEQUENCE:

INPUTS:

Filename: Character string specifying the name of a

SensorData format data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

 ${\tt OUTPUTS:}$

SensorData: CRTM SensorData object array containing the sensor data.

UNITS: N/A

TYPE: CRTM_SensorData_type

DIMENSION: Rank-1
ATTRIBUTES: INTENT(OUT)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

No_Close: Set this logical argument to NOT close the file upon exit.

If == .FALSE., the input file is closed upon exit [DEFAULT]

== .TRUE., the input file is NOT closed upon exit.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

OPTIONAL OUTPUTS:

 $n_DataSets:$ The actual number of datasets read in.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.6.12 CRTM_SensorData_WriteFile interface

NAME:

CRTM_SensorData_WriteFile

PURPOSE:

Function to write CRTM SensorData object files.

CALLING SEQUENCE:

No_Close = No_Close)

INPUTS:

Filename: Character string specifying the name of the

SensorData format data file to write.

UNITS: N/A

TYPE: CHARACTER(*)

DIMENSION: Scalar ATTRIBUTES: INTENT(IN)

SensorData: CRTM SensorData object array containing the datasets.

UNITS: N/A

TYPE: CRTM_SensorData_type

DIMENSION: Rank-1
ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

No_Close: Set this logical argument to NOT close the file upon exit.

If == .FALSE., the input file is closed upon exit [DEFAULT]

== .TRUE., the input file is NOT closed upon exit.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

 ${\tt Error_Status:} \quad {\tt The \ return \ value \ is \ an \ integer \ defining \ the \ error \ status.}$

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

- If the output file already exists, it is overwritten.
- If an error occurs during *writing*, the output file is deleted before returning to the calling routine.


A.7 Geometry Structure

```
TYPE :: CRTM_Geometry_type
  ! Allocation indicator
 LOGICAL :: Is_Allocated = .TRUE. ! Placeholder for future expansion
 ! Field of view index (1-nFOV)
 INTEGER :: iFOV = O
 ! Earth location
 REAL(fp) :: Longitude
                            = ZERO
 REAL(fp) :: Latitude
                            = ZERO
 REAL(fp) :: Surface_Altitude = ZERO
  ! Sensor angle information
 REAL(fp) :: Sensor_Scan_Angle = ZERO
 REAL(fp) :: Sensor_Zenith_Angle = ZERO
 REAL(fp) :: Sensor_Azimuth_Angle = ZERO
  ! Source angle information
 REAL(fp) :: Source_Zenith_Angle = 100.0_fp ! Below horizon
 REAL(fp) :: Source_Azimuth_Angle = ZERO
  ! Flux angle information
 REAL(fp) :: Flux_Zenith_Angle = DIFFUSIVITY_ANGLE
  ! Date for geometry calculations
 INTEGER :: Year = 2001
 INTEGER :: Month = 1
 INTEGER :: Day
END TYPE CRTM_Geometry_type
```

Figure A.7: CRTM_Geometry_type structure definition.

Component	Description	Units	Dimensions
iFOV	The scan line FOV index	N/A	Scalar
Longitude	Earth longitude	deg. E $(0 \to 360)$	Scalar
Latitude	Earth latitude	deg. N $(-90 \rightarrow +90)$	Scalar
Surface_Altitude	Altitude of the Earth's surface at the specified	metres (m)	Scalar
	lon/lat location		
Sensor_Scan_Angle	The sensor scan angle from nadir. See fig.A.8	degrees	Scalar
Sensor_Zenith_Angle	The sensor zenith angle of the FOV. See fig.A.9	degrees	Scalar
Sensor_Azimuth_Angle	The sensor azimuth angle is the angle subtended by the horizontal projection of a direct line from the satellite to the FOV and the North-South axis measured clockwise from North. See fig. A.10	deg. from N	Scalar
Source_Zenith_Angle	The source zenith angle. The source is typically the Sun (IR/VIS) or Moon (MW/VIS) [only solar source valid in current release] See fig. A.11	degrees	Scalar
Source_Azimuth_Angle	The source azimuth angle is the angle subtended by the horizontal projection of a direct line from the source to the FOV and the North-South axis measured clockwise from North. See fig. A.12	deg. from N	Scalar
Flux_Zenith_Angle	The zenith angle used to approximate downwelling flux transmissivity. If not set, the default value is that of the diffusivity approximation, such that $\sec(F) = 5/3$. Maximum allowed value is determined from $\sec(F) = 9/4$	degrees	Scalar
Year	The year in 4-digit format	N/A	Scalar
Month	The month of year (1-12)	N/A	Scalar
Day	The day of month $(1-28/29/30/31)$	N/A	Scalar

 Table A.13: CRTM Geometry structure component description.

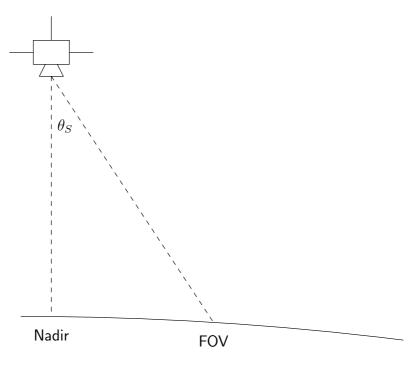

 $\textbf{Figure A.8:} \ \ \textbf{Definition of Geometry sensor scan angle component}.$

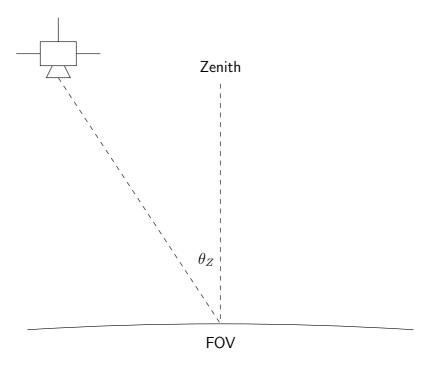


Figure A.9: Definition of Geometry sensor zenith angle component.

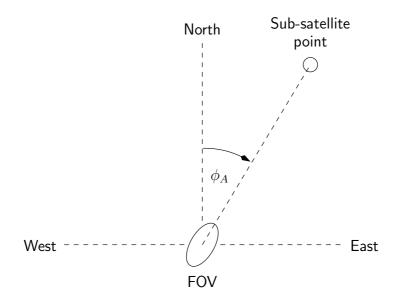


Figure A.10: Definition of Geometry sensor azimuth angle component.

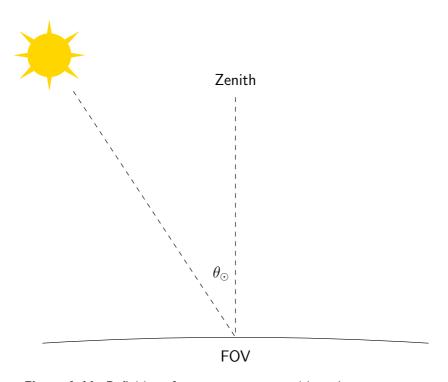


Figure A.11: Definition of Geometry source zenith angle component.

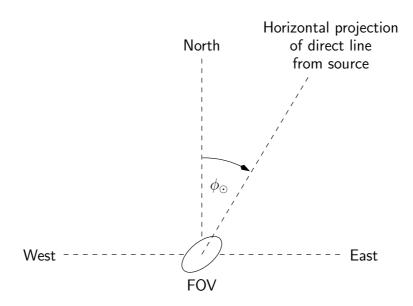


Figure A.12: Definition of Geometry source azimuth angle component.

A.7.1 CRTM_Geometry_DefineVersion interface

NAME:

CRTM_Geometry_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Geometry_DefineVersion(Id)

OUTPUT ARGUMENTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.7.2 CRTM_Geometry_Destroy interface

NAME:

CRTM_Geometry_Destroy

PURPOSE:

Elemental subroutine to re-initialize CRTM Geometry objects.

CALLING SEQUENCE:

CALL CRTM_Geometry_Destroy(geo)

OBJECTS:

geo: Re-initialized Geometry structure.

UNITS: N/A

TYPE: CRTM_Geometry_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

A.7.3 CRTM_Geometry_GetValue interface

NAME:

 ${\tt CRTM_Geometry_GetValue}$

PURPOSE:

Elemental subroutine to get the values of CRTM Geometry object components.

CALLING SEQUENCE:

CALL CRTM_Geometry_GetValue(geo, &

= iFOV iFOV , & , & Longitude = Longitude Latitude = Latitude Surface_Altitude = Surface_Altitude Sensor_Scan_Angle = Sensor_Scan_Angle Sensor_Zenith_Angle = Sensor_Zenith_Angle , & Sensor_Azimuth_Angle = Sensor_Azimuth_Angle, & Source_Zenith_Angle = Source_Zenith_Angle , & Source_Azimuth_Angle = Source_Azimuth_Angle, & Flux_Zenith_Angle = Flux_Zenith_Angle , & , & = Year Year = Month Month

= Day

, &

)

OBJECTS:

geo: Geometry object from which component values

> are to be retrieved. UNITS: N/A

Day

TYPE: CRTM_Geometry_type DIMENSION: Scalar or any rank ATTRIBUTES: INTENT(IN OUT)

OPTIONAL OUTPUTS:

iFOV: Sensor field-of-view index.

> UNITS: N/A TYPE: INTEGER

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Longitude: Earth longitude

UNITS: degrees East (0->360)

TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Latitude: Earth latitude.

UNITS: degrees North (-90->+90)

TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Surface_Altitude: Altitude of the Earth's surface at the specifed

> lon/lat location. UNITS: metres (m) TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Sensor_Scan_Angle: The sensor scan angle from nadir.

> UNITS: degrees REAL(fp) TYPE:

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Sensor_Zenith_Angle: The zenith angle from the field-of-view

to the sensor.

UNITS: degrees TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Sensor_Azimuth_Angle: The azimuth angle subtended by the horizontal

projection of a direct line from the satellite to the FOV and the North-South axis measured

clockwise from North.

UNITS: degrees from North (0->360)

TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Source_Zenith_Angle: The zenith angle from the field-of-view

to a source (sun or moon).

UNITS: degrees
TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Source_Azimuth_Angle: The azimuth angle subtended by the horizontal

projection of a direct line from the source to the FOV and the North-South axis measured

clockwise from North.

UNITS: degrees from North (0->360)

TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Flux_Zenith_Angle: The zenith angle used to approximate downwelling

flux transmissivity
UNITS: degrees
TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Year: The year in 4-digit format, e.g. 1997.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Month: The month of the year (1-12).

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Day: The day of the month (1-28/29/30/31).

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(OUT), OPTIONAL

A.7.4 CRTM_Geometry_Inspect interface

NAME:

CRTM_Geometry_Inspect

PURPOSE:

Subroutine to print the contents of a CRTM Geometry object to stdout.

CALLING SEQUENCE:

CALL CRTM_Geometry_Inspect(geo)

INPUTS:

geo: CRTM Geometry object to display.

UNITS: N/A

TYPE: CRTM_Geometry_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.7.5 CRTM_Geometry_IsValid interface

NAME:

CRTM_Geometry_IsValid

PURPOSE:

Non-pure function to perform some simple validity checks on a CRTM Geometry object.

If invalid data is found, a message is printed to stdout.

CALLING SEQUENCE:

result = CRTM_Geometry_IsValid(geo)

or

IF (CRTM_Geometry_IsValid(geo)) THEN....

OBJECTS:

geo: CRTM Geometry object which is to have its

contents checked. UNITS: N/A

TYPE: CRTM_Geometry_type

DIMENSION: Scalar

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

If == .FALSE., Geometry object is unused or contains

invalid data.

== .TRUE., Geometry object can be used in CRTM.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.7.6 CRTM_Geometry_SetValue interface

NAME:

CRTM_Geometry_SetValue

PURPOSE:

Elemental subroutine to set the values of CRTM Geometry object components.

CALLING SEQUENCE:

CALL CRTM_Geometry_SetValue(geo, &

= iFOV iFOV = Longitude Longitude Latitude = Latitude
Surface_Altitude = Surface_Altitude
Sensor_Scan_Angle = Sensor_Scan_Angle Sensor_Zenith_Angle = Sensor_Zenith_Angle , & Sensor_Azimuth_Angle = Sensor_Azimuth_Angle, & Source_Zenith_Angle = Source_Zenith_Angle , & Source_Azimuth_Angle = Source_Azimuth_Angle, & Flux_Zenith_Angle = Flux_Zenith_Angle , & = Year Year , & Month = Month = Day) Day

OBJECTS:

geo: Geometry object for which component values

are to be set. UNITS: N/A

TYPE: CRTM_Geometry_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

OPTIONAL INPUTS:

iFOV: Sensor field-of-view index.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Longitude: Earth longitude

UNITS: degrees East (0->360)

TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Latitude: Earth latitude.

UNITS: degrees North (-90->+90)

TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Surface_Altitude: Altitude of the Earth's surface at the specifed

lon/lat location.
UNITS: metres (m)
TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Sensor_Scan_Angle: The sensor scan angle from nadir.

UNITS: degrees TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Sensor_Zenith_Angle: The zenith angle from the field-of-view

to the sensor.
UNITS: degrees
TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Sensor_Azimuth_Angle: The azimuth angle subtended by the horizontal

projection of a direct line from the satellite to the FOV and the North-South axis measured

clockwise from North.

UNITS: degrees from North (0->360)

TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Source_Zenith_Angle: The zenith angle from the field-of-view

to a source (sun or moon).

UNITS: degrees TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Source_Azimuth_Angle: The azimuth angle subtended by the horizontal

projection of a direct line from the source to the FOV and the North-South axis measured $\,$

clockwise from North.

UNITS: degrees from North (0->360)

TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Flux_Zenith_Angle: The zenith angle used to approximate downwelling

flux transmissivity
UNITS: degrees
TYPE: REAL(fp)

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Year: The year in 4-digit format, e.g. 1997.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Month: The month of the year (1-12).

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

Day: The day of the month (1-28/29/30/31).

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as geo input

ATTRIBUTES: INTENT(IN), OPTIONAL

A.7.7 CRTM_Geometry_IOVersion interface

NAME:

CRTM_Geometry_IOVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Geometry_IOVersion(Id)

OUTPUT ARGUMENTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.7.8 CRTM_Geometry_InquireFile interface

NAME: CRTM_Geometry_InquireFile PURPOSE: Function to inquire CRTM Geometry object files. CALLING SEQUENCE: Error_Status = CRTM_Geometry_InquireFile(Filename n_Profiles = n_Profiles) INPUTS: Filename: Character string specifying the name of a CRTM Geometry data file to read. UNITS: N/A TYPE: CHARACTER(*) DIMENSION: Scalar ATTRIBUTES: INTENT(IN) OPTIONAL OUTPUTS: n_Profiles: The number of profiles for which their is geometry information in the data file. N/A UNITS: TYPE: INTEGER DIMENSION: Scalar ATTRIBUTES: OPTIONAL, INTENT(OUT) FUNCTION RESULT: Error_Status: The return value is an integer defining the error status. The error codes are defined in the Message_Handler module. If == SUCCESS, the file inquire was successful == FAILURE, an unrecoverable error occurred. UNITS: N/A INTEGER TYPE: DIMENSION: Scalar A.7.9 CRTM_Geometry_ReadFile interface NAME: CRTM_Geometry_ReadFile PURPOSE: Function to read CRTM Geometry object files. CALLING SEQUENCE: Error_Status = CRTM_Geometry_ReadFile(Filename Geometry Quiet = Quiet

n_Profiles = n_Profiles)

INPUTS:

Filename: Character string specifying the name of an

a Geometry data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OUTPUTS:

Geometry: CRTM Geometry object array containing the

data read from file. UNITS: N/A

TYPE: CRTM_Geometry_type

DIMENSION: Rank-1 ATTRIBUTES: INTENT(OUT)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

OPTIONAL OUTPUTS:

n_Profiles: The number of profiles for which data was read.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

 ${\tt Error_Status:}$ The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.7.10 CRTM_Geometry_WriteFile interface

NAME:

CRTM_Geometry_WriteFile

PURPOSE:

Function to write CRTM Geometry object files.

CALLING SEQUENCE:

INPUTS:

Filename: Character string specifying the name of the

Geometry format data file to write.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

Geometry: CRTM Geometry object array containing the Geometry

data to write. UNITS: ${\rm N/A}$

TYPE: CRTM_Geometry_type

DIMENSION: Rank-1
ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

- If the output file already exists, it is overwritten.
- If an error occurs during *writing*, the output file is deleted before returning to the calling routine.

A.8 RTSolution Structure

```
TYPE :: CRTM_RTSolution_type
 ! Allocation indicator
 LOGICAL :: Is_Allocated = .FALSE.
 ! Dimensions
 INTEGER :: n_Layers = 0  ! K
 ! Internal variables. Users do not need to worry about these.
 LOGICAL :: Scattering_Flag = .TRUE.
 INTEGER :: n_Full_Streams = 0
 INTEGER :: n_{\text{Stokes}} = 0
 ! Forward radiative transfer intermediate results for a single channel
      These components are not defined when they are used as TL, AD
      and K variables
 REAL(fp) :: Surface_Emissivity
                                   = ZERO
 REAL(fp) :: Up_Radiance
                                    = ZERO
 REAL(fp) :: Down_Radiance
                                   = ZERO
 REAL(fp) :: Down_Solar_Radiance = ZER0
 REAL(fp) :: Surface_Planck_Radiance = ZERO
 REAL(fp), ALLOCATABLE :: Upwelling_Radiance(:) ! K
 ! The layer optical depths
 REAL(fp), ALLOCATABLE :: Layer_Optical_Depth(:) ! K
 ! Radiative transfer results for a single channel/node
 REAL(fp) :: Radiance
                                   = ZERO
 REAL(fp) :: Brightness_Temperature = ZERO
END TYPE CRTM_RTSolution_type
```

Figure A.13: CRTM_RTSolution_type structure definition.

Component	Description	Units	Dimensions
n_Layers	Number of atmospheric profile layers (K)	N/A	Scalar
${\tt Surface_Emissivity}$	The computed surface emissivity	N/A	Scalar
Up_Radiance	The atmospheric portion of the upwelling radiance	$mW/(m^2.sr.cm^{-1})$	Scalar
Down_Radiance	The atmospheric portion of the downwelling radiance	$\mathrm{mW/(m^2.sr.cm^{\text{-}1})}$	Scalar
Down_Solar_Radiance	The downwelling direct solar radiance	$\mathrm{mW/(m^2.sr.cm^{-1})}$	Scalar
Surface_Planck_Radiance	The surface radiance	$mW/(m^2.sr.cm^{-1})$	Scalar
Upwelling_Radiance	The upwelling radiance profile, including the	$mW/(m^2.sr.cm^{-1})$	K
	reflected downwelling and surface contributions.		
Layer_Optical_Depth	The layer optical depth profile	N/A	K
Radiance	The sensor radiance	$mW/(m^2.sr.cm^{-1})$	Scalar
${\tt Brightness_Temperature}$	The sensor brightness temperature	Kelvin	Scalar

 Table A.14: CRTM RTSolution structure component description

A.8.1 CRTM_RTSolution_Associated interface

NAME:

CRTM_RTSolution_Associated

PURPOSE:

Elemental function to test the status of the allocatable components of a CRTM RTSolution object.

CALLING SEQUENCE:

Status = CRTM_RTSolution_Associated(RTSolution)

OBJECTS:

RTSolution: RTSolution structure which is to have its member's

status tested.
UNITS: N/A

TYPE: CRTM_RTSolution_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

Status: The return value is a logical value indicating the

status of the RTSolution members.

.TRUE. – if the array components are allocated. .FALSE. – if the array components are not allocated.

UNITS: N/A
TYPE: LOGICAL

DIMENSION: Same as input RTSolution argument

A.8.2 CRTM_RTSolution_Compare interface

NAME:

CRTM_RTSolution_Compare

PURPOSE:

Elemental function to compare two CRTM_RTSolution objects to within a user specified number of significant figures.

CALLING SEQUENCE:

is_comparable = CRTM_RTSolution_Compare(x, y, n_SigFig=n_SigFig)

OBJECTS:

 ${\tt x}, {\tt y}$: Two CRTM RTSolution objects to be compared.

UNITS: N/A

TYPE: CRTM_RTSolution_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

n_SigFig: Number of significant figure to compare floating point

 ${\tt components.}$

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as input ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

is_equal: Logical value indicating whether the inputs are equal.

UNITS: N/A
TYPE: LOGICAL

DIMENSION: Same as inputs.

A.8.3 CRTM_RTSolution_Create interface

NAME:

CRTM_RTSolution_Create

PURPOSE:

Elemental subroutine to create an instance of the CRTM RTSolution object.

CALLING SEQUENCE:

CALL CRTM_RTSolution_Create(RTSolution, n_Layers)

OBJECTS:

RTSolution: RTSolution structure.

UNITS: N/A

TYPE: CRTM_RTSolution_type DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Layers: Number of layers for which there is RTSolution data.

Must be > 0.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as RTSolution object

ATTRIBUTES: INTENT(IN)

A.8.4 CRTM_RTSolution_DefineVersion interface

NAME:

CRTM_RTSolution_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_RTSolution_DefineVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.8.5 CRTM_RTSolution_Destroy interface

NAME:

CRTM_RTSolution_Destroy

PURPOSE:

Elemental subroutine to re-initialize CRTM RTSolution objects.

CALLING SEQUENCE:

CALL CRTM_RTSolution_Destroy(RTSolution)

OBJECTS:

RTSolution: Re-initialized RTSolution structure.

UNITS: N/A

TYPE: CRTM_RTSolution_type
DIMENSION: Scalar OR any rank

ATTRIBUTES: INTENT(OUT)

A.8.6 CRTM_RTSolution_Inspect interface

NAME:

 ${\tt CRTM_RTSolution_Inspect}$

PURPOSE:

Subroutine to print the contents of a CRTM RTSolution object to stdout.

CALLING SEQUENCE:

CALL CRTM_RTSolution_Inspect(RTSolution)

INPUTS:

RTSolution: CRTM RTSolution object to display.

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.8.7 CRTM_RTSolution_IOVersion interface

NAME:

CRTM_RTSolution_IOVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_RTSolution_IOVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module.
UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.8.8 CRTM_RTSolution_InquireFile interface

NAME:

CRTM_RTSolution_InquireFile

PURPOSE:

Function to inquire CRTM RTSolution object files.

CALLING SEQUENCE:

 $\label{eq:cror_Status} \begin{tabular}{ll} Error_Status = CRTM_RTSolution_InquireFile(Filename & , & \\ & n_Channels = n_Channels, & \\ & n_Profiles = n_Profiles &) \end{tabular}$

INPUTS:

Filename: Character string specifying the name of a

CRTM RTSolution data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OPTIONAL OUTPUTS:

 $\hbox{n_Channels:} \qquad \hbox{The number of spectral channels for which there is} \\$

data in the file.
UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

n_Profiles: The number of profiles in the data file.

UNITS: N/A

TYPE: INTEGER DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

 ${\tt Error_Status:} \quad {\tt The \ return \ value \ is \ an \ integer \ defining \ the \ error \ status.}$

The error codes are defined in the Message_Handler module.

If == SUCCESS, the file inquire was successful
== FAILURE, an unrecoverable error occurred.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.8.9 CRTM_RTSolution_ReadFile interface

NAME:

CRTM_RTSolution_ReadFile

PURPOSE:

Function to read CRTM RTSolution object files.

CALLING SEQUENCE:

Error_Status = CRTM_RTSolution_ReadFile(Filename , &

RTSolution , 8

Quiet = Quiet ,

 $n_Channels = n_Channels$, &

n_Profiles = n_Profiles , &

INPUTS:

Filename: Character string specifying the name of an

RTSolution format data file to read.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

OUTPUTS:

RTSolution: CRTM RTSolution object array containing the RTSolution

data.

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Rank-2 (n_Channels x n_Profiles)

ATTRIBUTES: INTENT(OUT)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

OPTIONAL OUTPUTS:

n_Channels: The number of channels for which data was read.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

n_Profiles: The number of profiles for which data was read.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

ATTRIBUTES: OPTIONAL, INTENT(OUT)

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

A.8.10 CRTM_RTSolution_WriteFile interface

NAME:

CRTM_RTSolution_WriteFile

PURPOSE:

Function to write CRTM RTSolution object files.

CALLING SEQUENCE:

Error_Status = CRTM_RTSolution_WriteFile(Filename , 8

RTSolution , &
Quiet = Quiet)

INPUTS:

Filename: Character string specifying the name of the

RTSolution format data file to write.

UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

RTSolution: CRTM RTSolution object array containing the RTSolution

data.

UNITS: N/A

TYPE: CRTM_RTSolution_type

DIMENSION: Rank-2 (n_Channels x n_Profiles)

ATTRIBUTES: INTENT(IN)

OPTIONAL INPUTS:

Quiet: Set this logical argument to suppress INFORMATION

messages being printed to stdout

If == .FALSE., INFORMATION messages are OUTPUT [DEFAULT].

== .TRUE., INFORMATION messages are SUPPRESSED.

If not specified, default is .FALSE.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

ATTRIBUTES: INTENT(IN), OPTIONAL

FUNCTION RESULT:

Error_Status: The return value is an integer defining the error status.

The error codes are defined in the Message_Handler module.

UNITS: N/A
TYPE: INTEGER
DIMENSION: Scalar

SIDE EFFECTS:

- If the output file already exists, it is overwritten.
- If an error occurs during *writing*, the output file is deleted before returning to the calling routine.

A.9 Options Structure

```
TYPE :: CRTM_Options_type
  ! Allocation indicator
  LOGICAL :: Is_Allocated = .FALSE.
  ! Input checking on by default
  LOGICAL :: Check_Input = .TRUE.
  ! User defined emissivity/reflectivity
  ! ...Dimensions
  INTEGER :: n_Channels = 0  ! L dimension
  ! ...Index into channel-specific components
  INTEGER :: Channel = 0
  ! ... Emissivity optional arguments
  LOGICAL :: Use_Emissivity = .FALSE.
  REAL(fp), ALLOCATABLE :: Emissivity(:) ! L
  ! ...Direct reflectivity optional arguments
  LOGICAL :: Use_Direct_Reflectivity = .FALSE.
  REAL(fp), ALLOCATABLE :: Direct_Reflectivity(:) ! L
  ! Antenna correction application
  LOGICAL :: Use_Antenna_Correction = .FALSE.
  ! SSU instrument input
  TYPE(SSU_Input_type) :: SSU
  ! Zeeman-splitting input
  TYPE(Zeeman_Input_type) :: Zeeman
END TYPE CRTM_Options_type
```

Figure A.14: CRTM_Options_type structure definition.

Component	Description	Units	Dimensions
Check_Input	Logical switch to enable or disable input data checking. If:	N/A	Scalar
	.FALSE.: No input data check.		
	.TRUE. : Input data is checked [DEFAULT].	/ .	~ .
n_{-} Channels	Number of sensor channels (L).	N/A	Scalar
Channel	Index into channel-specific components.	N/A	Scalar
Use_Emissivity	Logical switch to apply user-defined surface emissivity.	N/A	Scalar
	If: .FALSE.: Calculate emissivity [DEFAULT].		
	.TRUE. : Use user-defined emissivity	/-	
Emissivity	User-defined surface emissivity for each sensor channel.	N/A	L
Use_Direct_Reflectivity	Logical switch to apply user-defined reflectivity for	N/A	Scalar
	downwelling source (e.g. solar). This switch is ignored		
	unless the Use_Emissivity switch is also set. If: .FALSE.: Calculate reflectivity [DEFAULT].		
	.TRUE. : Use user-defined reflectivity		
Direct_Reflectivity	User-defined direct reflectivity for downwelling source	N/A	L
	for each sensor channel.		
${\tt Use_Antenna_Correction}$	Logical switch to apply antenna correction for the	N/A	Scalar
	AMSU-A, AMSU-B, and MHS sensors. Note that for		
	this switch to be effective in the CRTM call, the FOV		
	field of the input Geometry structure must be set and		
	the antenna correction coefficients must be present in		
	the sensor SpcCoeff datafile. If: .FALSE.: No correction [DEFAULT].		
	.TRUE. : Apply antenna correction.		
SSU	Structure component containing optional SSU sensor-	N/A	Scalar
	specific input. See section A.10.	,	
Zeeman	Structure component containing optional input for those	N/A	Scalar
	sensors where Zeeman-splitting is an issue for high-	, -	
	peaking channels. See section A.11.		

Table A.15: CRTM Options structure component description

A.9.1 CRTM_Options_Associated interface

NAME:

CRTM_Options_Associated

PURPOSE:

Elemental function to test the status of the allocatable components of a CRTM Options object.

CALLING SEQUENCE:

Status = CRTM_Options_Associated(Options)

OBJECTS:

Options: Options structure which is to have its member's

status tested. UNITS: N/A

TYPE: CRTM_Options_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

Status: The return value is a logical value indicating the

status of the Options members.

.TRUE. – if the array components are allocated. .FALSE. – if the array components are not allocated.

UNITS: N/A
TYPE: LOGICAL

DIMENSION: Same as input Options argument

A.9.2 CRTM_Options_Create interface

NAME:

CRTM_Options_Create

PURPOSE:

Elemental subroutine to create an instance of the CRTM Options object.

CALLING SEQUENCE:

CALL CRTM_Options_Create(Options, n_Channels)

OBJECTS:

Options: Options structure.

UNITS: N/A

TYPE: CRTM_Options_type
DIMENSION: Scalar or any rank

ATTRIBUTES: INTENT(OUT)

INPUTS:

n_Channels: Number of channels for which there is Options data.

Must be > 0.

This dimension only applies to the emissivity-related

components.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Same as Options object

ATTRIBUTES: INTENT(IN)

A.9.3 CRTM_Options_DefineVersion interface

NAME:

CRTM_Options_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL CRTM_Options_DefineVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module. UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.9.4 CRTM_Options_Destroy interface

NAME:

CRTM_Options_Destroy

PURPOSE:

 ${\tt Elemental \ subroutine \ to \ re-initialize \ CRTM \ Options \ objects.}$

CALLING SEQUENCE:

CALL CRTM_Options_Destroy(Options)

OBJECTS:

Options: Re-initialized Options structure.

UNITS: N/A

TYPE: CRTM_Options_type
DIMENSION: Scalar OR any rank

ATTRIBUTES: INTENT(OUT)

A.9.5 CRTM_Options_Inspect interface

NAME:

CRTM_Options_Inspect

PURPOSE:

Subroutine to print the contents of a CRTM Options object to stdout.

CALLING SEQUENCE:

CALL CRTM_Options_Inspect(Options)

INPUTS:

Options: CRTM Options object to display.

UNITS: N/A

TYPE: CRTM_Options_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.9.6 CRTM_Options_IsValid interface

NAME:

CRTM_Options_IsValid

PURPOSE:

Non-pure function to perform some simple validity checks on a CRTM Options object.

If invalid data is found, a message is printed to stdout.

CALLING SEQUENCE:

result = CRTM_Options_IsValid(opt)

or

IF (CRTM_Options_IsValid(opt)) THEN....

OBJECTS:

opt: CRTM Options object which is to have its

contents checked. UNITS: N/A

TYPE: CRTM_Options_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

If == .FALSE., Options object is unused or contains

invalid data.

== .TRUE., Options object can be used in CRTM.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.10 SSU_Input Structure

The SSU_Input structure is a component of the Options input structure. Note in figure A.15 that the structure is declared as PRIVATE. As such, the only way to set values in, or get values from, the structure is via the SSU_Input_SetValue or SSU_Input_GetValue subroutines respectively.

```
TYPE :: SSU_Input_type
PRIVATE
! Time in decimal year (e.g. 2009.08892694 corresponds to 11:00 Feb. 2, 2009)
REAL(fp) :: Time = ZERO
! SSU CO2 cell pressures (hPa)
REAL(fp) :: Cell_Pressure(MAX_N_CHANNELS) = ZERO
END TYPE SSU_Input_type
```

Figure A.15: SSU_Input_type structure definition.

Component	Description	Units	Dimensions
Time	Time in decimal year corresponding to SSU	N/A	Scalar
	observation.		
Cell_Pressure	The SSU CO_2 cell pressures.	hPa	${\tt MAX_N_CHANNELS}\ (3)$

Table A.16: CRTM SSU_Input structure component description

A.10.1 SSU_Input_CellPressureIsSet interface

```
NAME:
      SSU_Input_CellPressureIsSet
PURPOSE:
      Elemental function to determine if SSU_Input object cell pressures
      are set (i.e. > zero).
CALLING SEQUENCE:
      result = SSU_Input_CellPressureIsSet( ssu )
        or
      IF ( SSU_Input_CellPressureIsSet( ssu ) ) THEN
      END IF
OBJECTS:
                 SSU_Input object for which the cell pressures
      ssu:
                 are to be tested.
                 UNITS:
                             N/A
                 TYPE:
                             SSU_Input_type
                 DIMENSION: Scalar or any rank
                 ATTRIBUTES: INTENT(IN)
```

FUNCTION RESULT:

result:

Logical variable indicating whether or not all the

SSU cell pressures are set.

If == .FALSE., cell pressure values are <= 0.0hPa and

thus are considered to be NOT set or valid.

== .TRUE., cell pressure values are > 0.0hPa and

thus are considered to be set and valid.

UNITS: N/A TYPE: LOGICAL DIMENSION: Scalar

A.10.2 SSU_Input_DefineVersion interface

NAME:

SSU_Input_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL SSU_Input_DefineVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

> for the module. UNITS: N/A

TYPE: CHARACTER(*) DIMENSION: Scalar ATTRIBUTES: INTENT(OUT)

A.10.3 SSU_Input_GetValue interface

NAME:

SSU_Input_GetValue

PURPOSE:

Elemental subroutine to Get the values of SSU_Input object components.

CALLING SEQUENCE:

CALL SSU_Input_GetValue(SSU_Input

Channel = Channel , & = Time Cell_Pressure = Cell_Pressure, & n_Channels = n_Channels

OBJECTS:

SSU_Input: SSU_Input object for which component values

are to be set. UNITS: N/A

TYPE: SSU_Input_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

OPTIONAL INPUTS:

Channel: SSU channel for which the CO2 cell pressure

is required.
UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as SSU_Input

ATTRIBUTES: INTENT(IN), OPTIONAL

OPTIONAL OUTPUTS:

Time: SSU instrument mission time.

UNITS: decimal year TYPE: REAL(fp)

DIMENSION: Scalar or same as SSU_Input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Cell_Pressure: SSU channel CO2 cell pressure. Must be

specified with the Channel optional input

dummy argument.
UNITS: hPa
TYPE: REAL(fp)

DIMENSION: Scalar or same as SSU_Input

ATTRIBUTES: INTENT(OUT), OPTIONAL

n_Channels: Number of SSU channels..

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as SSU_Input

ATTRIBUTES: INTENT(OUT), OPTIONAL

A.10.4 SSU_Input_Inspect interface

NAME:

SSU_Input_Inspect

PURPOSE:

Subroutine to print the contents of an SSU_Input object to stdout.

CALLING SEQUENCE:

CALL SSU_Input_Inspect(ssu)

INPUTS:

ssu: SSU_Input object to display.

UNITS: N/A

TYPE: SSU_Input_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

A.10.5 SSU_Input_IsValid interface

NAME:

SSU_Input_IsValid

PURPOSE:

Non-pure function to perform some simple validity checks on a $SSU_Input\ object.$

If invalid data is found, a message is printed to stdout.

CALLING SEQUENCE:

result = SSU_Input_IsValid(ssu)

or

IF (SSU_Input_IsValid(ssu)) THEN....

OBJECTS:

ssu: SSU_Input object which is to have its

contents checked. UNITS: N/A

TYPE: SSU_Input_type

DIMENSION: Scalar
ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

If == .FALSE., object is unused or contains

invalid data.

== .TRUE., object can be used.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.10.6 SSU_Input_SetValue interface

NAME:

SSU_Input_SetValue

PURPOSE:

Elemental subroutine to set the values of SSU_Input

object components.

CALLING SEQUENCE:

CALL SSU_Input_SetValue(SSU_Input , &

SSU_Input , &
Time = Time , &
Cell_Pressure = Cell_Pressure, &
Channel = Channel)

OBJECTS:

SSU_Input: SSU_Input object for which component values

are to be set. UNITS: N/A

TYPE: SSU_Input_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

OPTIONAL INPUTS:

Time: SSU instrument mission time.

UNITS: decimal year TYPE: REAL(fp)

DIMENSION: Scalar or same as SSU_Input

ATTRIBUTES: INTENT(IN), OPTIONAL

Cell_Pressure: SSU channel CO2 cell pressure. Must be

specified with the Channel optional dummy

argument.

UNITS: hPa TYPE: REAL(fp)

DIMENSION: Scalar or same as SSU_Input

ATTRIBUTES: INTENT(IN), OPTIONAL

Channel: SSU channel for which the CO2 cell pressure

is to be set. Must be specified with the ${\tt Cell_Pressure}$ optional dummy argument.

UNITS: N/A
TYPE: INTEGER

DIMENSION: Scalar or same as SSU_Input

ATTRIBUTES: INTENT(IN), OPTIONAL

A.11 Zeeman_Input Structure

The Zeeman_Input structure is a component of the Options input structure. Note in figure A.16 that the structure is declared as PRIVATE. As such, the only way to set values in, or get values from, the structure is via the Zeeman_Input_SetValue or Zeeman_Input_GetValue subroutines respectively.

```
TYPE :: Zeeman_Input_type

PRIVATE
! Earth magnetic field strength in Gauss

REAL(fp) :: Be = DEFAULT_MAGENTIC_FIELD
! Cosine of the angle between the Earth
! magnetic field and wave propagation direction

REAL(fp) :: Cos_ThetaB = ZERO
! Cosine of the azimuth angle of the Be vector.

REAL(fp) :: Cos_PhiB = ZERO
! Doppler frequency shift caused by Earth-rotation.

REAL(fp) :: Doppler_Shift = ZERO

END TYPE Zeeman_Input_type
```

Figure A.16: Zeeman_Input_type structure definition.

Component	Description	Units	Dimensions
Be	Earth magnetic field strength.	Gauss	Scalar
Cos_ThetaB	Cosine of the angle between the Earth mag-	N/A	Scalar
	netic field and wave propagation direction.		
Cos_PhiB	Cosine of the azimuth angle of the \mathbf{B}_e vec-	N/A	Scalar
	tor in the $(\mathbf{v}, \mathbf{h}, \mathbf{k})$ coordinates system, where		
	\mathbf{v} , \mathbf{h} and \mathbf{k} comprise a right-hand orthogonal		
	system, similar to the $(\mathbf{x}, \mathbf{y}, \mathbf{z})$ Cartesian coor-		
	dinates. The h vector is normal to the plane		
	containing the \mathbf{k} and \mathbf{z} vectors, where \mathbf{k} points		
	to the wave propagation direction and \mathbf{z} points		
	to the zenith. $\mathbf{h} = (\mathbf{z} \times \mathbf{k})/ \mathbf{z} \times \mathbf{k} $. The az-		
	imuth angle is the angle on the (\mathbf{v}, \mathbf{h}) plane		
	from the positive \mathbf{v} axis to the projected line		
	of the \mathbf{B}_e vector on this plane, positive coun-		
	terclockwise.		
Doppler_Shift	Doppler frequency shift caused by Earth-	KHz	Scalar
	rotation (positive towards sensor). A zero		
	value means no frequency shift.		

Table A.17: CRTM Zeeman_Input structure component description

A.11.1 Zeeman_Input_DefineVersion interface

NAME:

Zeeman_Input_DefineVersion

PURPOSE:

Subroutine to return the module version information.

CALLING SEQUENCE:

CALL Zeeman_Input_DefineVersion(Id)

OUTPUTS:

Id: Character string containing the version Id information

for the module.
UNITS: N/A

TYPE: CHARACTER(*)
DIMENSION: Scalar
ATTRIBUTES: INTENT(OUT)

A.11.2 Zeeman_Input_GetValue interface

NAME:

Zeeman_Input_GetValue

PURPOSE:

Elemental subroutine to get the values of Zeeman_Input object components.

CALLING SEQUENCE:

CALL Zeeman_Input_GetValue(Zeeman_Input , & Field_Strength = Field_Strength, & Cos_ThetaB = Cos_ThetaB , & Cos_PhiB = Cos_PhiB , &

Doppler_Shift = Doppler_Shift)

OBJECTS:

Zeeman_Input: Zeeman_Input object for which component values

are to be set. UNITS: N/A

TYPE: Zeeman_Input_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

OPTIONAL OUTPUTS:

Field_Strength: Earth's magnetic filed strength

UNITS: Gauss
TYPE: REAL(fp)

DIMENSION: Scalar or same as Zeeman_Input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Cos_ThetaB: Cosine of the angle between the Earth magnetic

field and wave propagation vectors.

UNITS: N/A
TYPE: REAL(fp)

DIMENSION: Scalar or same as Zeeman_Input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Cos_PhiB: Cosine of the azimuth angle of the Earth magnetic

field vector.
UNITS: N/A
TYPE: REAL(fp)

DIMENSION: Scalar or same as Zeeman_Input

ATTRIBUTES: INTENT(OUT), OPTIONAL

Doppler_Shift: Doppler frequency shift caused by Earth-rotation.

Positive towards sensor.

UNITS: KHz TYPE: REAL(fp)

DIMENSION: Scalar or same as Zeeman_Input

ATTRIBUTES: INTENT(OUT), OPTIONAL

A.11.3 Zeeman_Input_Inspect interface

NAME:

Zeeman_Input_Inspect

PURPOSE:

Subroutine to print the contents of an Zeeman_Input object to stdout.

CALLING SEQUENCE:

CALL Zeeman_Input_Inspect(z)

INPUTS:

z: Zeeman_Input object to display.

UNITS: N/A

TYPE: Zeeman_Input_type

DIMENSION: Scalar ATTRIBUTES: INTENT(IN)

A.11.4 Zeeman_Input_IsValid interface

NAME:

 ${\tt Zeeman_Input_IsValid}$

PURPOSE:

Non-pure function to perform some simple validity checks on a ${\tt Zeeman_Input}$ object.

If invalid data is found, a message is printed to stdout.

CALLING SEQUENCE:

result = Zeeman_Input_IsValid(z)

IF (Zeeman_Input_IsValid(z)) THEN....

OBJECTS:

z: Zeeman_Input object which is to have its

contents checked.
UNITS: N/A

TYPE: Zeeman_Input_type

DIMENSION: Scalar ATTRIBUTES: INTENT(IN)

FUNCTION RESULT:

result: Logical variable indicating whether or not the input

passed the check.

If == .FALSE., object is unused or contains

invalid data.

== .TRUE., object can be used.

UNITS: N/A
TYPE: LOGICAL
DIMENSION: Scalar

A.11.5 Zeeman_Input_SetValue interface

NAME:

Zeeman_Input_SetValue

PURPOSE:

Elemental subroutine to set the values of Zeeman_Input object components.

CALLING SEQUENCE:

CALL Zeeman_Input_SetValue(Zeeman_Input , &

Field_Strength = Field_Strength, &
Cos_ThetaB = Cos_ThetaB , &
Cos_PhiB = Cos_PhiB , &
Doppler_Shift = Doppler_Shift)

OBJECTS:

Zeeman_Input: Zeeman_Input object for which component values

are to be set. UNITS: N/A

TYPE: Zeeman_Input_type
DIMENSION: Scalar or any rank
ATTRIBUTES: INTENT(IN OUT)

OPTIONAL INPUTS:

Field_Strength: Earth's magnetic filed strength

UNITS: Gauss
TYPE: REAL(fp)

DIMENSION: Scalar or same as Zeeman_Input

ATTRIBUTES: INTENT(IN), OPTIONAL

Cos_ThetaB: Cosine of the angle between the Earth magnetic

field and wave propagation vectors.

UNITS: N/A
TYPE: REAL(fp)

DIMENSION: Scalar or same as Zeeman_Input

ATTRIBUTES: INTENT(IN), OPTIONAL

Cos_PhiB: Cosine of the azimuth angle of the Earth magnetic

field vector.
UNITS: N/A
TYPE: REAL(fp)

DIMENSION: Scalar or same as Zeeman_Input

ATTRIBUTES: INTENT(IN), OPTIONAL

Doppler_Shift: Doppler frequency shift caused by Earth-rotation.

Positive towards sensor.

UNITS: KHz TYPE: REAL(fp)

DIMENSION: Scalar or same as Zeeman_Input

ATTRIBUTES: INTENT(IN), OPTIONAL

B

Valid Sensor Identifiers

B.1 Infrared instruments

Instrument	Sensor Id	Instrument	Sensor Id
Aqua AIRS (281ch. subset)	airs281_aqua	NOAA-16 HIRS/3	hirs3_n16
Aqua AIRS (324ch. subset)	airs324_aqua	NOAA-17 HIRS/3	hirs3_n17
Aqua AIRS Module-1a	airsM1a_aqua	NOAA-18 HIRS/4	hirs4_n18
Aqua AIRS Module-1b	airsM1b_aqua	MetOp-A HIRS/4	hirs4_metop-a
Aqua AIRS Module-2a	airsM2a_aqua	NOAA-19 HIRS/4	hirs4_n19
Aqua AIRS Module-2b	airsM2b_aqua	MetOp-A IASI (300ch. subset)	iasi300_metop-a
Aqua AIRS Module-3	airsM3_aqua	MetOp-A IASI (316ch. subset)	iasi316_metop-a
Aqua AIRS Module-4a	airsM4a_aqua	MetOp-A IASI (616ch. subset)	iasi616_metop-a
Aqua AIRS Module-4b	airsM4b_aqua	MetOp-A IASI Band 1	iasiB1_metop-a
Aqua AIRS Module-4c	airsM4c_aqua	MetOp-A IASI Band 2	iasiB2_metop-a
Aqua AIRS Module-4d	airsM4d_aqua	MetOp-A IASI Band 3	iasiB3_metop-a
Aqua AIRS Module-5	airsM5_aqua	MetOp-A IASI	iasi_metop-a
Aqua AIRS Module-6	airsM6_aqua	NPP CrIS Band 1	crisB1_npp
Aqua AIRS Module-7	airsM7_aqua	NPP CrIS Band 2	crisB2_npp
Aqua AIRS Module-8	airsM8_aqua	NPP CrIS Band 3	crisB3_npp
Aqua AIRS Module-9	airsM9_aqua	GOES-08 Imager	imgr_g08
Aqua AIRS Module-10	airsM10_aqua	GOES-09 Imager	imgr_g09
Aqua AIRS Module-11	airsM11_aqua	GOES-10 Imager	imgr_g10
Aqua AIRS Module-12	airsM12_aqua	GOES-11 Imager	imgr_g11
Aqua AIRS	airs_aqua	GOES-12 Imager	$imgr_g12$
TIROS-N AVHRR/2	$avhrr2_tirosn$	GOES-13 Imager	$imgr_g13$
NOAA-06 AVHRR/2	avhrr2_n06	GOES-R ABI	abi_gr
NOAA-07 AVHRR/2	avhrr2_n07	MTSAT-1R Imager	$imgr_mt1r$
NOAA-08 AVHRR/2	avhrr2_n08	Aqua MODIS	${\tt modis_aqua}$
NOAA-09 AVHRR/2	avhrr2_n09	Terra MODIS	${\tt modis_terra}$
NOAA-10 AVHRR/2	avhrr2_n10	MeteoSat-08 SEVIRI	seviri_m08
NOAA-11 AVHRR/2	avhrr2_n11	MeteoSat-09 SEVIRI	seviri_m09
NOAA-12 AVHRR/2	avhrr2_n12	MeteoSat-10 SEVIRI	seviri_m10
NOAA-14 AVHRR/2	avhrr2_n14	GOES-08 Sounder	$sndr_g08$
NOAA-15 AVHRR/3	avhrr3_n15	GOES-09 Sounder	$sndr_g09$
NOAA-16 AVHRR/3	avhrr3_n16	GOES-10 Sounder	$sndr_g10$
NOAA-17 AVHRR/3	avhrr3_n17	GOES-11 Sounder	$sndr_g11$
NOAA-18 AVHRR/3	avhrr3_n18	GOES-12 Sounder	sndr_g12
MetOp-A AVHRR/3	avhrr3_metop-a	GOES-13 Sounder	sndr_g13
NOAA-19 AVHRR/3	avhrr3_n19	TIROS-N SSU	$\mathtt{ssu_tirosn}$
TIROS-N HIRS/2	$hirs2_tirosn$	NOAA-06 SSU	ssu_n06
NOAA-06 HIRS/2	hirs2_n06	NOAA-07 SSU	ssu_n07
NOAA-07 HIRS/2	hirs2_n07	NOAA-08 SSU	ssu_n08
NOAA-08 HIRS/2	hirs2_n08	NOAA-09 SSU	ssu_n09
NOAA-09 HIRS/2	hirs2_n09	NOAA-10 SSU	ssu_n11
NOAA-10 HIRS/2	hirs2_n10	NOAA-11 SSU	ssu_n14
NOAA-11 HIRS/2	hirs2_n11	GMS-5 VISSR (Detector A)	vissrDetA_gms5
NOAA-12 HIRS/2	hirs2_n12	Fengyun-3A VIRR	virr_fy3a
NOAA-14 HIRS/2	hirs2_n14	Fengyun-3A IRAS	iras_fy3a
NOAA-15 HIRS/3	hirs3_n15	Fengyun-3A MERSI	mersi_fy3a

Table B.1: CRTM sensor identifiers for infrared instruments.

B.2 Microwave instruments

Instrument	Sensor Id	Instrument	Sensor Id
Aqua AMSR-E	amsre_aqua	MetOp-A MHS	mhs_metop-a
Aqua AMSU-A	amsua_aqua	MetOp-B MHS	mhs_metop-b
Aqua HSB	hsb_aqua	MetOp-C MHS	mhs_metop-c
TIROS-N MSU	${\tt msu_tirosn}$	DMSP-08 SSM/I	$ssmi_f08$
NOAA-06 MSU	msu_n06	DMSP-10 SSM/I	$ssmi_f10$
NOAA-07 MSU	msu_n07	DMSP-11 SSM/I	$ssmi_f11$
NOAA-08 MSU	msu_n08	DMSP-13 SSM/I	$ssmi_f13$
NOAA-09 MSU	msu_n09	DMSP-14 SSM/I	$ssmi_f14$
NOAA-10 MSU	msu_n10	DMSP-15 SSM/I	$ssmi_f15$
NOAA-11 MSU	msu_n11	DMSP-13 SSM/T-1	$ssmt1_f13$
NOAA-12 MSU	msu_n12	DMSP-15 SSM/T-1	$ssmt1_f15$
NOAA-14 MSU	msu_n14	DMSP-14 SSM/T-2	$ssmt2_f14$
NOAA-15 AMSU-A	amsua_n15	DMSP-15 SSM/T-2	$ssmt2_f15$
NOAA-16 AMSU-A	amsua_n16	DMSP-16 SSMIS	$ssmis_f16$
NOAA-17 AMSU-A	amsua_n17	DMSP-17 SSMIS	$ssmis_f17$
NOAA-18 AMSU-A	amsua_n18	DMSP-18 SSMIS	$ssmis_f18$
NOAA-19 AMSU-A	amsua_n19	DMSP-19 SSMIS	$ssmis_f19$
MetOp-A AMSU-A	amsua_metop-a	DMSP-20 SSMIS	$ssmis_f20$
MetOp-B AMSU-A	amsua_metop-b	NPP ATMS	$atms_npp$
MetOp-C AMSU-A	amsua_metop-c	Coriolis WindSat	$windsat_coriolis$
NOAA-15 AMSU-B	$amsub_n15$	TRMM TMI	${\tt tmi_trmm}$
NOAA-16 AMSU-B	$amsub_n16$	GPM GMI	gmi_gpm
NOAA-17 AMSU-B	$amsub_n17$	Fengyun-3A MWRI	mwri_fy3a
NOAA-18 MHS	mhs_n18	Fengyun-3A MWHS	$mwhs_fy3a$
NOAA-19 MHS	mhs_n19	Fengyun-3A MWTS	${\tt mwts_fy3a}$

 Table B.2: CRTM sensor identifiers for microwave instruments.