MIT SCHOOL OF COMPUTING
Rajbaug, Loni-Kalbhor, Pune

MIT-ADT UNIVERSITY
PUNE, INDIA
A Leap Towards World Class Education

Name: Advait Awaee Class: SOC-08 Batch: 'A'
Subject: Python prog. Roll No.: 04 Exp. No.: 01
Name of the Experiment:

Performed on:
Submitted on:

Marks	Teacher's Signature with date
10	30/0

1. List the key features of python. Also mention two types of python IDE's or editors used for program development?

→ 1. It is easy to learn, uses simple, english like syntax.
2. Interpreted language, code is executed line by line.
3. Platform independant, can run in diff" operating systems.
4. object oriented & structured programming.
5. Suitable for many domains.

Two python IDE's used for development:-

- Pycharm.
- IDLE

Incomplete for Theory ☐ Diagrams ☐ Observation Table ☐
Calculations ☐ Graphs ☐ Results ☐ Conclusion ☐
Understanding Through Q/A ☐ Late Submission ☐ Neatness ☐

Teacher's Signature

2. Explain the history and evolution of python. Describe why python has become popular for beginners and industry application.

→

Python was created by 'Guido van Rossum' in late 1980's and released in 1991 with a focus on reliability and simplicity. Python 2 (2000) expanded it's features and community. and python 3 (2008) modernized the language with cleaner, more consistent design. After python 2 ended in 2020, Python 3 became the standard.

Python is easy because it's easy to learn, has a huge library ecosystem, works across many fields (web, automation, AI, DS) and has a strong open source community. This combination makes it great for both beginners and industry applications.

3. WAP to accept two numeric values from the user and perform the following operation.

- Addition
- Subtraction
- Multiplication
- Division

- used in decision-making, conditional statement and loop control.
- Typical in everyday program logic.

example.

```
age = 18
if age >= 18 :
print (" Eligible to vote").
```

2. logical operators
   - Combine multiple conditions : often used with relational expressions.

operators.
   and, or, not

- useful in compound conditions, such as
  - validating multiple outputs.
  - controlling program flow.

example.

```
username = " creator"
password = " 0909"
if username == " creator" and password ==
 "0909" :
print (" Login successful")
```

7. Write a program in python to display "Hello World".

→

```
Print ("Hello World")
```

Algorithm:
1. START.
2. Display the message.
3. END.

Flowchart:

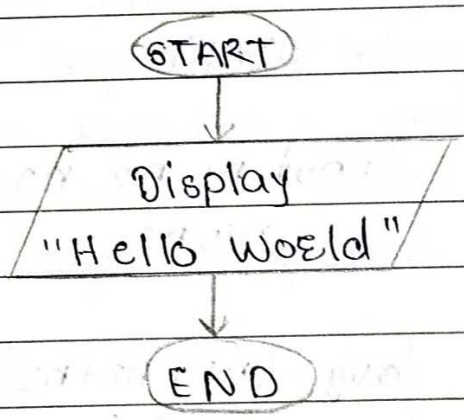

8. WAP to perform average of five numbers using input () function and type conversion

```
n1 = float(input ("Enter first number :"))
n2 = float(input ("Enter second number :"))
n3 = float(input ("Enter third number :"))
n4 = float(input ("Enter fourth number :"))
n5 = float(input ("Enter fifth number :"))
average = (n1 + n2 + n3 + n4 + n5) / 5
print (" Average of five number is :",
average)
```

```
years = int(input ("Enter your age in years:"))
months = years * 12
days = years * 365
print ("Age in years:", years)
print ("Age in months:", months)
print ("Age in Days:", days)
```

Algorithm

1. START
2. Read age in years using input ()
3. Convert input to integer
4. Calculate months = years x 12
5. Calculate days = years x 365
6. Display age in years, months, and days
7. STOP.

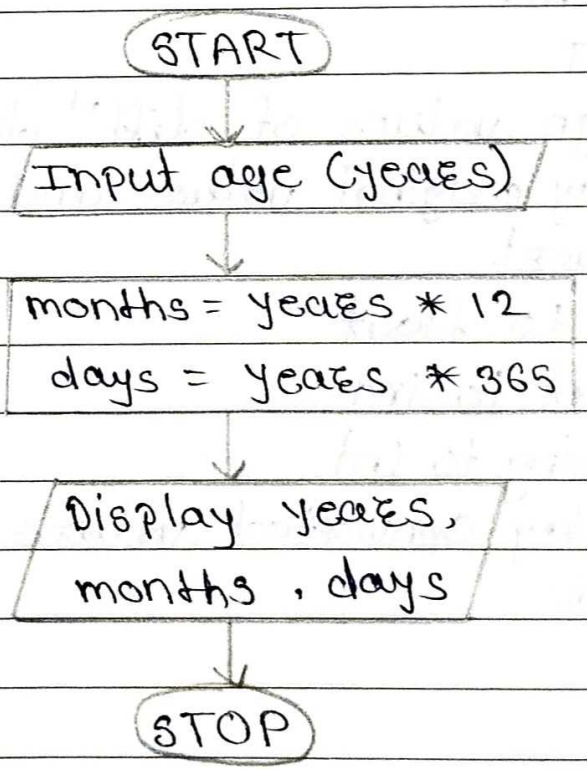

Flowchart :

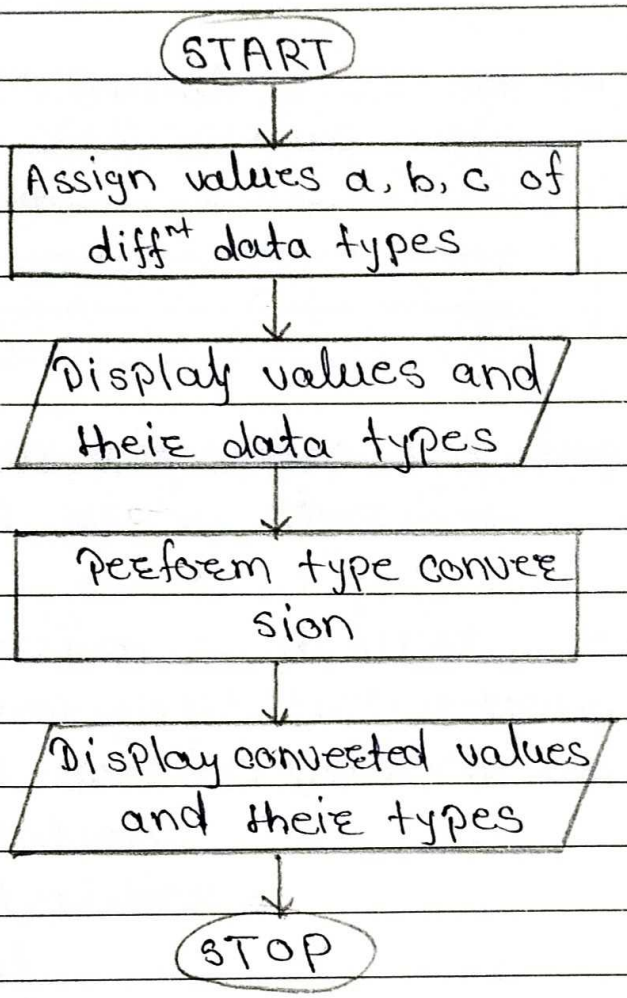
START
Assign values a, b, c of diff^nt data types
Display values and their data types
Perform type conversion
Display converted values and their types
STOP