

Home Workspaces API Network

Search Postman Ctrl K



Upgrade



Blank workspace

## Explore our templates

API demos

API development

API testing


API security

Incident response

Cloud infrastructure management

Partner Collaboration

Public API Network

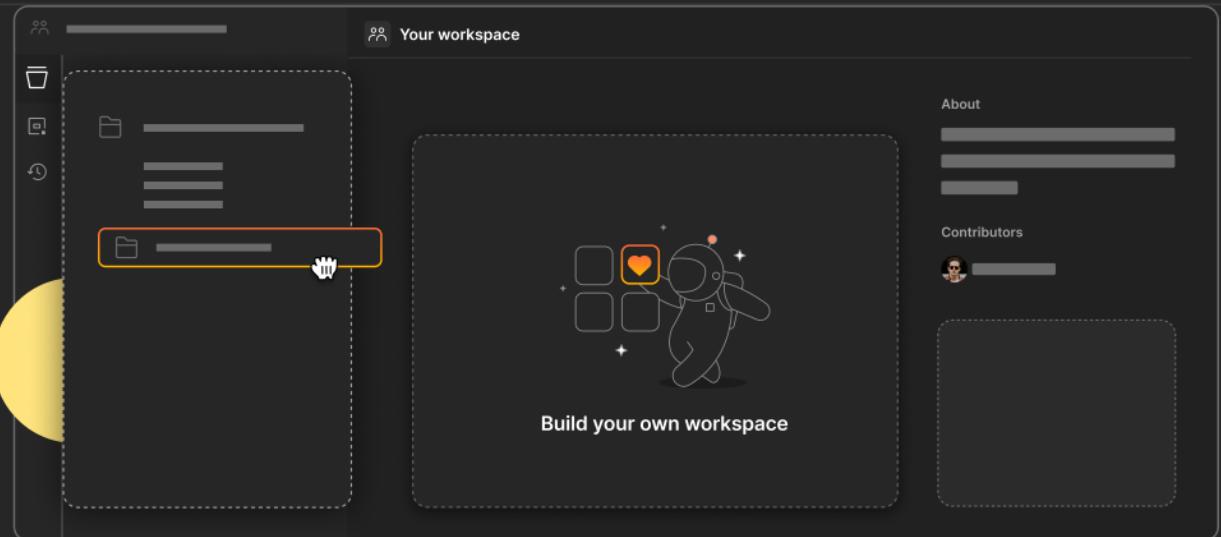

Build your own workspace

## Showcase your API's capabilities

Use Postman collections to document your APIs with ease. You can create your own or choose from 70+ collection templates tailored to your needs.



## Build together, work faster

Help your team maintain a shared source of truth, to build APIs and solve problems together.



Cancel

Next

https://web.postman.co/workspace/create

Life Insurance Corp... YouTube www.youtu... - Digitally signed Sa... My Captain Classroom Classroom Official\_1 Virtual Labs Mathway | Calculus...

Home Workspaces API Network

Search Postman Ctrl K

Upgrade

## Create your workspace

Customize this space to organize and share your API resources with your team.

Name

Task Tracker

Select workspace type

Internal Build and test APIs within your team

Partner Share APIs securely with trusted partners [Upgrade plan](#)

Public Make APIs accessible to the world

Manage access

Everyone in your team

Only you and invited people

Since you don't have a team, we will create one for you along with this workspace.

Your workspace

Build your own workspace

About

Contributors


Showcase your API's capabilities

Use Postman collections to document your APIs with ease. You can create your own or choose from 70+ collection templates tailored to your needs.

Build together, work faster

Help your team maintain a shared source of truth, to build APIs and solve problems together.

Back Create

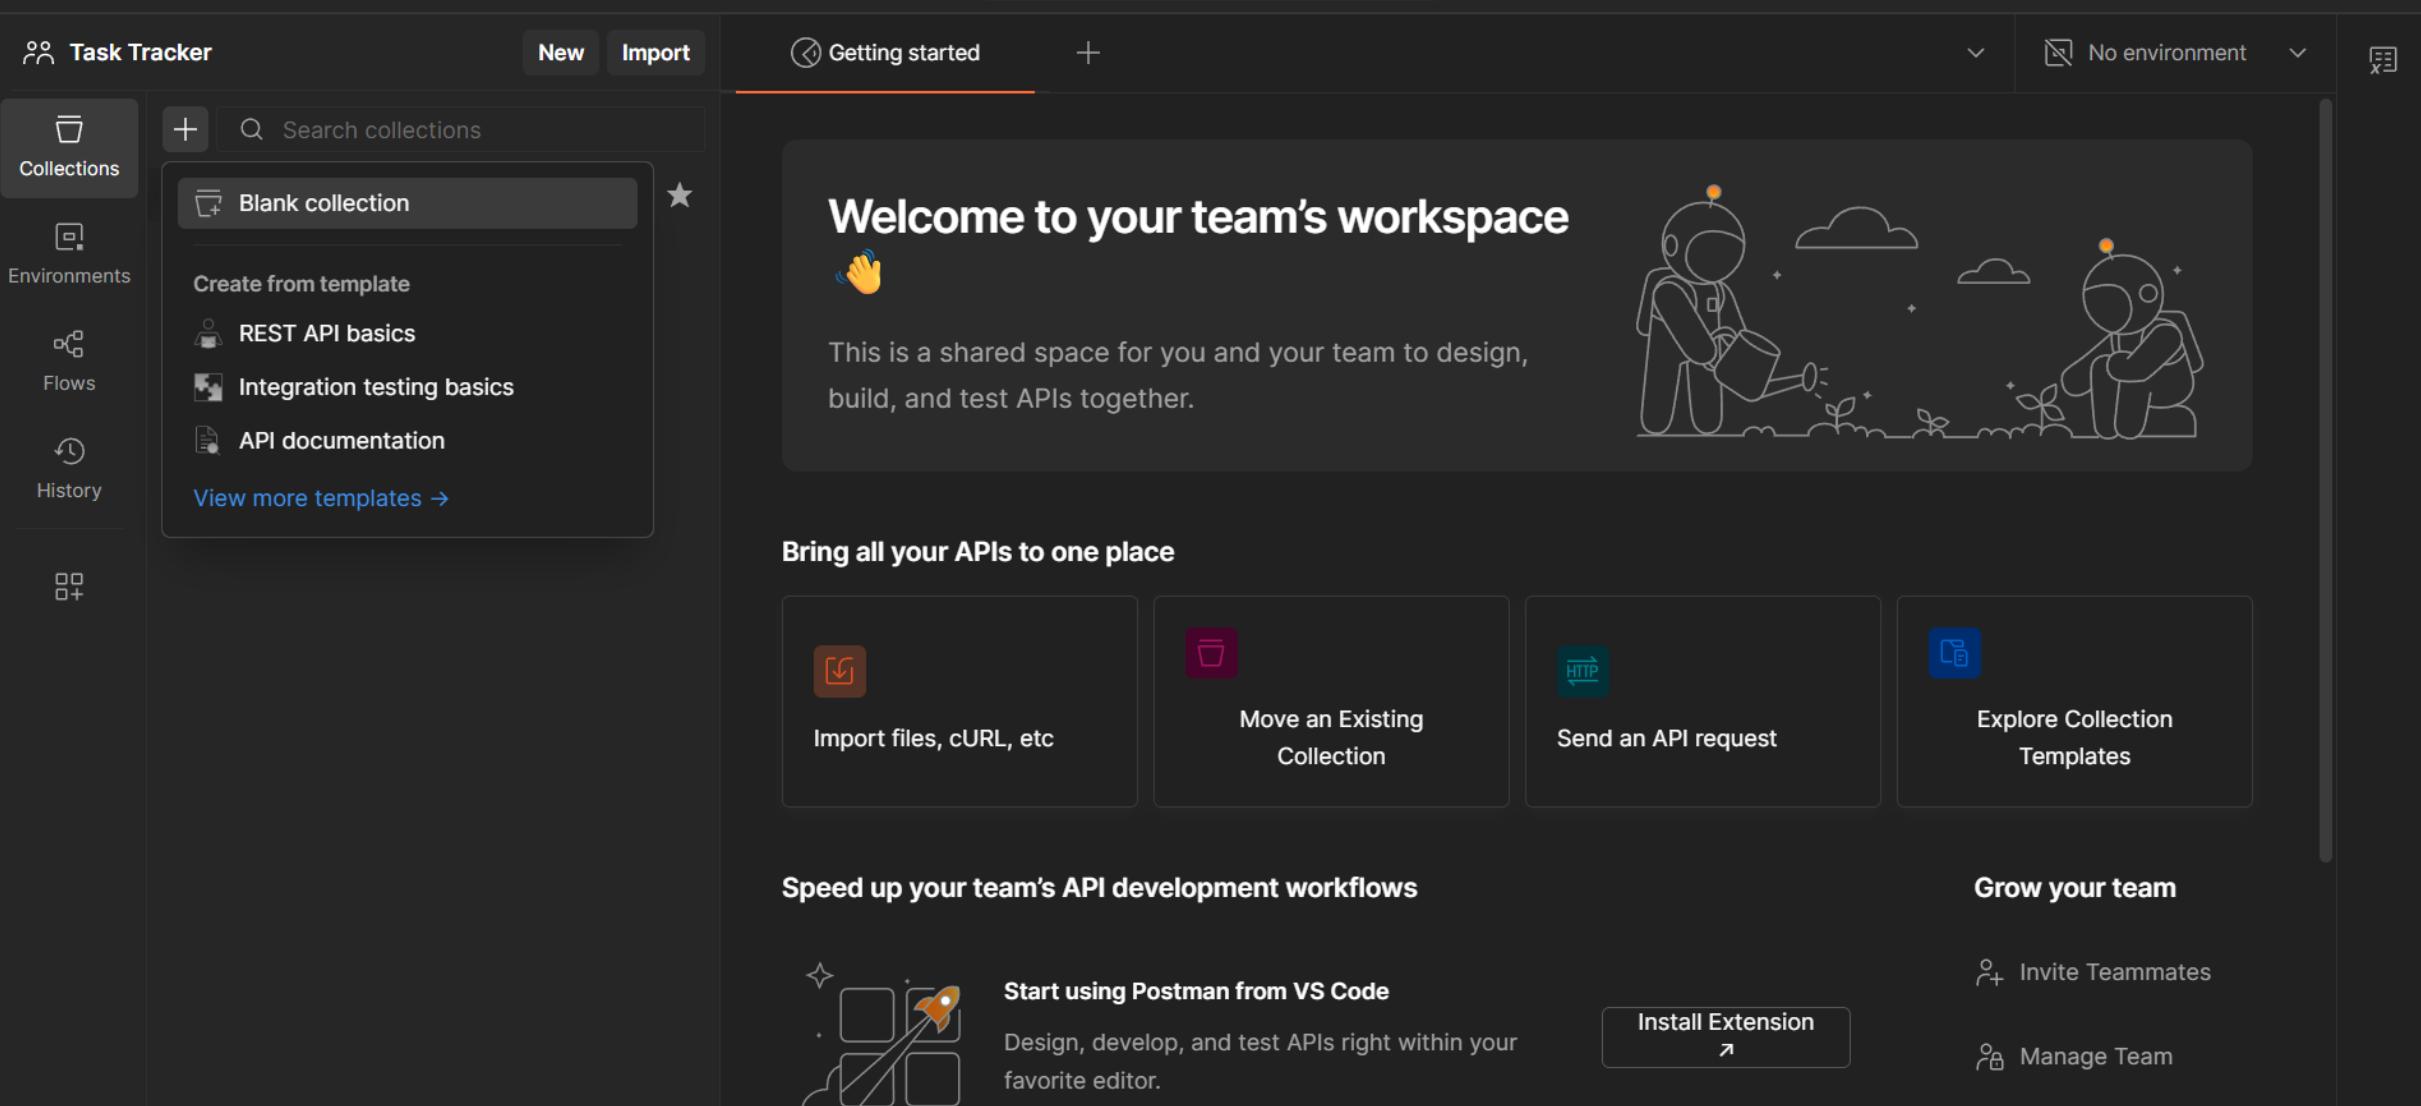

Inbox (28,793) - advaitchavan135 | Step 3: Add a Request | Task Tracker API - Task Tracker | +

<https://testapi-1410.postman.co/workspace/e8d6f8d8-0189-4b95-b3ff-951bb7b4affc/collection/40696938-0b3b40cf-f17d-4b29-b4be-4794d298b76f>

Life Insurance Corp... YouTube www.youtu... - Digitally signed Sa... My Captain Classroom Classroom Official\_1 Virtual Labs Mathway | Calculus...

Home Workspaces API Network Search Postman Ctrl K Invite Settings Bell Upgrade

Task Tracker New Import Getting started Task Tracker API + No environment

Collections Environments Flows History

+ Search collections API Prototyping Task Tracker API This collection is empty. Add a request to start working.

Task Tracker API Overview Auth Scripts Variables Runs

Run Fork 0 Watch 0 Share

0 requests 1 view 0 forks 0 watchers Created by: You

Pinned Environments + Pin an environment to automatically switch to it when working with this collection

Recent changes September 15, 2025

Online Console Postbot Runner Capture requests Cloud Agent Cookies Vault Trash ?

# Task Tracker API

\*A mock API for creating, updating, and deleting tasks

\*

View complete documentation →

Inbox (28,793) - advaitchavan135 | Step 3: Add a Request | GET all Tasks - Task Tracker

https://testapi-1410.postman.co/workspace/e8d6f8d8-0189-4b95-b3ff-951bb7b4affc/request/40696938-0823d4ab-f295-4f26-86f8-072c31ed4e... A ⭐

Life Insurance Corp... YouTube www.youtu... - Digitally signed Sa... My Captain Classroom Classroom Official\_1 Virtual Labs Mathway | Calculus...

Home Workspaces API Network Search Postman Ctrl K Invite Settings Bell Upgrade

Task Tracker New Import Getting started Task Tracker API GET GET all Tasks + No environment

Collections + Search collections API Prototyping Task Tracker API GET GET all Tasks

Environments

Flows

History

Response

HTTP Task Tracker API / GET all Tasks

GET Enter URL or paste text Send

Params Authorization Headers (7) Body Scripts Settings Cookies

Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

Enter the URL and click Send to get a response



## Task Tracker

New

Import



+ Search collections



API Prototyping



Task Tracker API



Overview

GET Task Tracker API




No environment



HTTP Task Tracker API / Task Tracker API

Save

Share



Send



GET

Enter URL or paste text

Params

Authorization

Headers (6)

Body

Scripts

Settings

Cookies



Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		



Response

History




Enter the URL and click Send to get a response



## Task Tracker

New

Import



+ Search collections



API Prototyping



Task Tracker API



Overview

GET Task Tracker API



No environment



HTTP Task Tracker API / Task Tracker API

Save

Share



Send

GET

{{baseUrl}}/tasks

Params

Authorization

Headers (6)

Body

Scripts

Settings

Cookies

Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

Response

History



Click Send to get a response



## Task Tracker

New

Import

Overview

GET Task Tracker API


+



No environment



+ Search collections



API Prototyping



Task Tracker API



GET Task Tracker API



Params Authorization

Headers (6)

Body

Scripts

Settings

Cookies

Add example

Share

Value

Description

... Bulk Edit

Copy link

Value

Description

Rename

Ctrl+E

Duplicate

Ctrl+D

Delete

Del

Response

History



Click Send to get a response




## Task Tracker

New

Import



+ Search collections



&gt; API Prototyping



Task Tracker API

GET Task Tracker API

e.g. 200 OK



Overview

GET Task Tracker API

e.g. 200 OK



No environment



Task Tracker API / Task Tracker API / 200 OK

Save

Share



Try ↗

GET

{{baseUrl}}/tasks

Params

Headers

Body

Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

Body Headers

Status Code

200 OK

Raw ▾

Preview

1 Ctrl+Alt+P for Postbot





## Task Tracker

New

Import



+ Search collections



API Prototyping



Task Tracker API

GET Task Tracker API



e.g. 200 OK



Overview

GET Task Tracker API

e.g. 200 OK



No environment



Task Tracker API / Task Tracker API / 200 OK

Save

Share



Try ↗

GET

{{baseUrl}}/tasks

Params

Headers

Body

Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

Body Headers

Status Code 200 OK

Raw ▾

Preview



```
1 [  
2 {  
3   "id": 1,  
4   "title": "Update Jira tickets",  
5   "completed": false  
6 }  
7 ]
```





## Task Tracker

New

Import

Overview

GET Task Tracker API

e.g. 200 OK

Create mock serve •

No environment



Search collections

API Prototyping



Task Tracker API

GET Task Tracker API

e.g. 200 OK

## Create a mock server

Select a collection to mock

 An existing collection  Create a new collection

Mock server name

Task Tracker Mock Server

Collection

Task Tracker API

Environment

An environment is a group of variables useful for storing and reusing values.

No Environment

Simulate a fixed network delay

No delay

 Save the mock server URL as an new environment variable

This will create a new environment containing URL.

 Make mock server privateTo call a private mock server, you'll need to add an `x-api-key` header to your requests. See how to generate a Postman API key ↗

Create Mock Server

Cancel



## Task Tracker

New

Import



+ Search collections



&gt; API Prototyping



Task Tracker API



GET Task Tracker API

e.g. 200 OK



Overview

GET Task Tracker API

e.g. 200 OK

Task Tracker Mock S

No environment

### Task Tracker Mock Server

Copy URL

View Collection Docs

Edit Configuration

Copy Mock Server URL

Mock server type  
PublicCollection  
[Task Tracker API](#)Environment  
No environment

Refresh Logs



No mock server calls yet

To call the mock server, follow these steps:

1. Send a request to the following mock server URL, followed by the request path  
<https://180c055d-bc29-4e74-b397-cfba8cc040b3.mock.pstmn.io>

2. Add examples responses to each request that the mock server will return.  
[Learn what examples are and how to use them](#) ↗



## Task Tracker

New

Import

Overview

GET Task Tracker A

e.g. 200 OK

Task Tracker N

Mock Server E



No environment



Collections



Search environments

Globals

Environments

Mock Server Environment

Flows

Mock servers

History



## Mock Server Environment

Variable	Value	Q	...
—	—	—	▼
—	.....	—	▼
Variable	Type	Initial	Current
✓ —	default	—	—
✓ —	secret	—	.....



## What's changed for variables

- Local by default: All variable values you input stay local unless shared explicitly.
- Initial Shared values: Share variable values with your teammates with click of a button.
- Mark as sensitive: Caution your teammates about the sensitive fields and mask their values.

Variable	Value
Add variable	



## Task Tracker

New

Import

Collections



Search mock servers

Task Tracker Mock Server

Environments

Flows

Mock servers

History



Overview

GET Task Tracker A

e.g. 200 OK

Task Tracker N

Mock Server E



No environment



## Mock Server Environment

Variable	Value	Q	...
.....	.....	.....	.....
Variable	Type	Initial	Current
.....	default	.....	.....
.....	secret	.....	.....



## What's changed for variables

- Local by default:** All variable values you input stay local unless shared explicitly.
- Initial Shared values:** Share variable values with your teammates with click of a button.
- Mark as sensitive:** Caution your teammates about the sensitive fields and mask their values.

## Variable

baseURL

Add variable

## Value



Mock URL copied





## Task Tracker

New

Import

Overview

GET Task Tracker A

e.g. 200 OK

Task Tracker N

Mock Server E



Mock Server Environ...



Collections



Search mock servers

Task Tracker Mock Server

Environments

Flows

Mock servers



History



## Mock Server Environment

Fork | 0

Share



Variable	Value
baseURL	https://180c055d-bc29-4e74-b397-cfba8cc040b3.mock....
Add variable	



## Task Tracker

New

Import

Overview

GET Task Tracker A

e.g. 200 OK

Task Tracker N

Mock Server E





Mock Server Environ...



Search collections

API Prototyping



HTTP Task Tracker API / Task Tracker API

GET

{{baseUrl}} /tasks

Save



Share



Send



Params

Authorization

Headers (6)

Body

Scripts

Settings

Cookies

Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

Response

History



Click Send to get a response



## Task Tracker

New

Import

Overview

GET Task Tracker A

e.g. 200 OK

Task Tracker N

Mock Server E




Mock Server Environ...



+ Search collections

API Prototyping




HTTP Task Tracker API / Task Tracker API

GET

{{baseUrl}} /tasks

Save



Share



Send



Params

Authorization

Headers (6)

Body

Scripts

Settings

Cookies

Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

Body

Cookies

Headers (17)

Test Results



200 OK

• 2.11 s • 880 B •



e.g. Save Response



HTML

Preview

Visualize



```
1 [  
2 {  
3   "id": 1,  
4   "title": "Update Jira tickets",  
5   "completed": false  
6 }  
7 ]
```





## Task Tracker

New Import

Overview GET Task Tra e.g. 200 OK Task Tra Mock Se Task Tra POST POST | + Mock Server Environ... ▾




+ Search collections



&gt; API Prototyping



Task Tracker API



GET Task Tracker API



e.g. 200 OK

POST POST New Task

HTTP Task Tracker API / POST New Task

POST

{{baseUrl}} /tasks

Send

Params

Authorization

Headers (8)

Body

Scripts

Settings

Cookies

 none form-data x-www-form-urlencoded raw binary GraphQL

JSON

 Schema

Beautify

```
1 {  
2   "title" : "Ponder existence",  
3   "completed" : false  
4 }
```

Response

History



Click Send to get a response



## Task Tracker

New

Import

Overview | GET Task | e.g. 200 OK | Task 1 | Mock | Task 1 | POST POS | + | Mock Server Environ...



+ Search collections



API Prototyping



Task Tracker API



GET Task Tracker API

e.g. 200 OK

POST POST New Task

PUT PUT Update Task

## HTTP Task Tracker API / PUT Update Task

PUT

{{baseUrl}} /tasks/:id

Save

Share

Send

Params

Authorization

Headers (7)

Body

Scripts

Settings

Cookies

 none form-data x-www-form-urlencoded raw binary GraphQL

JSON

 Schema

Beautify

1 Ctrl+Alt+P for Postbot

Response

History



Click Send to get a response



## Task Tracker


New Import

e.g. 200 OK Task 1 Mock Task 1 POST POS PUT PUT L DEL DELETE

Mock Server Environ...



+ Search collections




&gt; API Prototyping



Task Tracker API



GET Task Tracker API



e.g. 200 OK

POST POST New Task

PUT PUT Update Task

DEL DELETE Remove Task

## HTTP Task Tracker API / DELETE Remove Task

DELETE

{{baseUrl}} /tasks/:id

Send

Params

Authorization

Headers (6)

Body

Scripts

Settings

Cookies

## Query Params

	Key	Value	Description	... Bulk Edit
	Key	Value	Description	

## Path Variables

	Key	Value	Description	... Bulk Edit
	id	Value	Description	

Response

History



Click Send to get a response



## Task Tracker

New

Import

&lt; Task 1

Mock

Task 1

POST POS

PUT PUT L

DEL DELE

e.g. 201

&gt;

+

▼

Mock Server Environ...



+ Search collections



&gt; API Prototyping



▼ Task Tracker API



✓ GET Task Tracker API

e.g. 200 OK



✓ POST POST New Task

e.g. 201

PUT PUT Update Task

DEL DELETE Remove Task



## Task Tracker API / POST New Task / 201

Save

Share



Try ↗

POST

{{baseUrl}} /tasks

Params

Headers

Body

 none form-data x-www-form-urlencoded raw binary GraphQL JSON

Beautify

```
1 {  
2   "title" : "Ponder existence",  
3   "completed" : false  
4 }
```

Body

Headers

Status Code

Enter Response Code

Raw

Preview

1 Ctrl+Alt+P for Postbot





## Task Tracker

New Import

Task 1 Mock Task 1 POST POS PUT PUT L DEL DELETE e.g. 201

Mock Server Environ...



+ Search collections



&gt; API Prototyping



Task Tracker API



&lt; GET Task Tracker API



e.g. 200 OK

&lt; POST POST New Task

e.g. 201

PUT PUT Update Task

DEL DELETE Remove Task



## Task Tracker API / POST New Task / 201

Save

Share

Try ↗

POST

{{baseUrl}} /tasks

Params

Headers

Body

 none form-data x-www-form-urlencoded raw binary GraphQL JSON

Beautify

```
1 {  
2   "title": "Ponder existence",  
3   "completed": false  
4 }
```

Body Headers (1)

Status Code 201 Created

{ } JSON

Preview

```
1  
2 {  
3   "id": 2,  
4   "title": "New Task",  
5   "completed": false  
6 }  
7
```

JSON Schema



## Task Tracker

New Import

Mock Task 1 POST POS PUT PUT L DEL DELETE e.g. 201 e.g. 200 O

Mock Server Environ...

Collections

+ Search collections

&gt; API Prototyping

Environments

Task Tracker API

Flows

&gt; GET Task Tracker API

e.g. 200 OK

Mock servers

&gt; POST POST New Task

e.g. 201

History

&gt; PUT PUT Update Task

e.g. 200 OK

DEL DELETE Remove Task




## Task Tracker API / PUT Update Task / 200 OK

PUT

{{baseUrl}} /tasks/:id

Save

Share



No new changes to save.



Params Headers Body

 none  form-data  x-www-form-urlencoded  raw  binary  GraphQL  JSON Beautify

```
1 {  
2   "title": "Updated Task",  
3   "completed": true  
4 }
```

Body Headers (1)

Status Code 200 OK

{ } JSON ▾ Preview

Schema

```
1 {  
2   "id": 1,  
3   "title": "Updated Task",  
4   "completed": true  
5 }
```



## Task Tracker

New

Import

&lt; Task 1

POST POS

PUT PUT L

DEL DELETE

e.g. 201

e.g. 200 O


e.g. 204

&gt;

+

▼


Mock Server Environ...



Search collections



API Prototyping



## Task Tracker API / DELETE Remove Task / 204

Save

Share



Try ↗

DELETE

{{baseUrl}} /tasks/:id

## Params

Headers

Body

## Query Params

	Key	Value	Description	...	Bulk Edit
	Key	Value	Description		

## Path Variables

	Key	Value	Description	...	Bulk Edit
	id	Value	Description		

## Body

Headers

Status Code 204 No Content

Raw ▾

Preview

1 Ctrl+Alt+P for Postbot





## Task Tracker

New Import

GET Task

e.g. 200 O

Task 1

Mock

Task 1

POST POS

PUT PUT L

&gt;

+

&lt;

Mock Server Environ...




+ Search collections



API Prototyping



Task Tracker API



GET Task Tracker API



e.g. 200 OK



POST POST New Task

e.g. 201

PUT PUT Update Task

e.g. 200 OK

DEL DELETE Remove Task

e.g. 204

HTTP Task Tracker API / Task Tracker API

GET

{{baseUrl}} /tasks

Save Share

Send

Params

Authorization

Headers (6)

Body

Scripts

Settings

Cookies

Pre-request

1 Use JavaScript to configure this request dynamically. Ctrl+Alt+P for Postbot

Post-response

Packages Snippets Save Response

Body

Cookies

Headers (17)

Test Results



200 OK

2.11 s

880 B



Save Response

HTML

Preview

Visualize

```
1 [  
2 {  
3   "id": 1,  
4   "title": "Update Jira tickets",  
5   "completed": false  
6 }  
7 ]
```

| | | | |



## Task Tracker

New Import

GET Task

e.g. 200 O

Task 1

Mock

Task 1

POST POS

PUT PUT L

&gt;

+

Mock Server Environ...



+ Search collections



API Prototyping



Task Tracker API



GET Task Tracker API



e.g. 200 OK



POST POST New Task

e.g. 201

PUT PUT Update Task

e.g. 200 OK

DEL DELETE Remove Task

e.g. 204

HTTP Task Tracker API / Task Tracker API

GET

{{baseUrl}} /tasks

Save Share

Send

Params

Authorization

Headers (6)

Body

Scripts

Settings

Cookies

Pre-request

```
1 pm.test("Status code is 200", function () {  
2   pm.response.to.have.status(200);  
3 });  
4
```

Post-response

Packages Snippets

Body

Cookies

Headers (17)

Test Results



200 OK

2.11 s

880 B



Save Response

HTML

Preview

Visualize

```
1 [  
2 {  
3   "id": 1,  
4   "title": "Update Jira tickets",  
5   "completed": false  
6 }  
7 ]
```



## Task Tracker

New

Import

&lt; Overview &gt; + Mock Server Environ...


GET Task

+

▼



+ Search collections



API Prototyping



Task Tracker API



GET Task Tracker API

e.g. 200 OK




POST POST New Task

e.g. 201



PUT PUT Update Task

e.g. 200 OK



DEL DELETE Remove Task

e.g. 204

HTTP Tasks / Task Tracker API Save Share

GET

{{baseUrl}} /tasks

Send

Scripts

Pre-req

Post-res

Cookies

```
1 pm.test("Response status code is 200",  
         function () {  
2     pm.response.to.have.status(200);  
3 };  
4 );
```

Test Results

Filter Results

FAILED

Status code is 200 | TypeError: Cannot read properties of undefined

PASSED

Response status code is 200



## Documentation

/tasks

## API Endpoint

## Documentation: Retrieve Tasks

## Overview

This endpoint allows clients to retrieve a list of tasks from the server. The tasks are returned in a structured format, providing essential details such as the task ID, title, and completion status.

## Request

- Method: GET
- Endpoint: /tasks

## Parameters

This endpoint does not require any query parameters or request body.



## Task Tracker

New Import

&lt; k 1 POST POS PUT &gt; + Mock Server Environ...



## Documentation



Collections

+ Search collections

API Prototyping



Environments

Flows

Mock servers

History

+

- > API Prototyping
- > Task Tracker API
  - ✓ GET Task Tracker API
    - e.g. 200 OK
  - ✓ POST POST New Task
    - e.g. 201
  - ✓ PUT PUT Update Task
    - e.g. 200 OK
  - ✓ DEL DELETE Remove Task
    - e.g. 204

HTTP Task... / POST New Task Save Share

POST {{baseUrl}} /tasks Send

Scripts Cookies

```
1 pm.test("Status code is 201", function() {  
2     pm.response.to.have.status(201);  
3 });
```

Pre-req

Post-res

Body

{ } JSON

```
1 {  
2     "id": 2,  
3     "title": "New Task",  
4     "completed": false  
5 }
```

201

🕒 ⏺ 🌐

≡ 🔍 ⌂

/tasks

## Create Task

This endpoint allows users to create a new task in the system. By sending a POST request to /tasks with the required parameters in the request body, a new task will be generated.

## Request Body Parameters:

- title** (string): The title of the task to be created.
- completed** (boolean): Indicates whether the task is completed or not.

## Example Request:

JSON  

```
{  
    "title": "Ponder existence",  
    "completed": false  
}
```

## Expected Response:

Upon successful creation of the task, the server responds with a status code of 201 and returns a JSON object containing the following fields:



## Task Tracker

New Import

&lt; POST POS PUT PUT L &gt; + Mock Server Environ...



## Documentation

Collections

+ Search collections

&gt; API Prototyping

Environments

Flows

Mock servers

History

+

- > API Prototyping
- Task Tracker API
  - GET Task Tracker API
    - e.g. 200 OK
  - POST POST New Task
    - e.g. 201
  - PUT PUT Update Task
    - 200 OK
  - DEL DELETE Remove Task
    - e.g. 204

HTTP Tasks / PUT Update Task

Save

Share



Send

Scripts

Cookies

Pre-req

Post-res

```
1 pm.test("Status code is ", function () {  
2   pm.response.to.have.status(200);  
3 } );  
4 
```

Test Results

404



Filter Results



FAILED Status code is | Assertion Error: expected response to have stati



/tasks/:id

## Update Task

This endpoint allows you to update an existing task identified by its unique `id`. The request should be made using the HTTP PUT method.

## Endpoint

Plain Text

PUT /tasks/:id

## Parameters

- `id` (path parameter): The unique identifier of the task you want to update. This should be a valid integer corresponding to an existing task.

## Request Body

The request body must be in JSON format and can include the following fields:

- `title` (string, optional): The new title of the task.
- `completed` (boolean, optional): The completion status of the task.



## Task Tracker

New Import

&lt; JT PUT | DEL DELETE &gt; + Mock Server Environ...



## Documentation

Collections

+ Search collections

&gt; API Prototyping

Environments

Task Tracker API

Flows

GET Task Tracker API

e.g. 200 OK

Mock servers

POST POST New Task

e.g. 201

History

PUT PUT Update Task

e.g. 200 OK

+

DEL DELETE Remove Task

e.g. 204

HTTP ... / DELETE Remove...

Save

Share



DELETE {{baseUrl}} /tasks/:id Send

Scripts

Cookies

Pre-req

Post-res

```
1 pm.test("Response status code is 404",  
         function () {  
2     pm.expect(pm.response.code).to.equal  
3     (404);  
4 });
```

Test Results

404



Filter Results



PASSED Response status code is 404

File

Comment

&lt;/&gt;

Down arrow

Information

i

## DELETE /tasks/:id

This endpoint is used to delete a specific task identified by its unique `id`.

## Request Parameters

- `id` (path parameter): The unique identifier of the task that you want to delete. This should be a valid task ID that exists in the system.

## Expected Responses

- 204 No Content:** Indicates that the task was successfully deleted. No additional content will be returned.
- { "error": { "name": "", "message": "", "header": "" } } This structure may provide additional context about the error, although the specific fields may not be populated.

## Notes for Users

- Ensure that the `id` provided in the request corresponds to an existing task to avoid receiving a 404 error.
- Deleting a task is irreversible; once deleted, the task



## Task Tracker

New Import

GET Task ● e.g. 200 O

Task 1 Mock

Task 1

POST POS

PUT PUT L

&gt;

+

Mock Server Environ...



Collections

+ Search collections

&gt; API Prototyping



Environments

Flows

Mock servers

History



HTTP Task Tracker API / Task Tracker API

Save

Share



Send



GET

{{baseUrl}} /tasks

Params

Authorization

Headers (6)

Body

Scripts ●

Settings

Cookies

```
1 pm.test("Response status code is 200", function () {  
2   pm.response.to.have.status(200);  
3 };  
4 
```

&lt;/&gt;

Pre-request

Post-response ●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

●

Body

Cookies

Headers (17)

Test Results (1/1) | ↻

200 OK

• 489 ms

• 880 B

●

e.g. Save Response

...

Filter Results

PASSED Response status code is 200



## Task Tracker

New Import

GET Task ● e.g. 200 O Task 1 Mock Task 1 POST POS PUT PUT L + Mock Server Environ...



+ Search collections



&gt; API Prototyping



Task Tracker API



GET Task Tracker API

e.g. 200 OK



POST POST New Task

e.g. 201



PUT PUT Update Task

e.g. 200 OK

DEL DELETE Remove Task

e.g. 204

## HTTP Task Tracker API / POST New Task

POST

{{baseUrl}} /tasks

Send

Params

Authorization

Headers (8)

Body

Scripts

Settings

Cookies

```
1 pm.test("Status code is 201", function () {  
2 | pm.response.to.have.status(201);  
3 });
```

Pre-request

Post-response

Packages &lt;/&gt; Snippets ⌂ ⌂

Body Cookies Headers (17) Test Results (1/1) ⌂

201 Created • 2.03 s • 875 B • ⌂ e.g. Save Response ⌂

Filter Results ⌂

C

PASSED Status code is 201

