

Open API for Yealink Management Cloud Service V4X

1. YMCS APIs

1.1 Introduction

YMCS Open API provides third-party developers with a portal to securely use device management services. Through YMCS APIs, developers can use YMCS's device management, account management, configuration management and other functions.

YMCS API is a REST-like API based on HTTP. The REST-like style indicates that the resource is tagged using a URI and allows access to the API via the HTTP protocol. The API relies on HTTP semantics and methods.

In order to ensure the security of using the YMCS API, the transport protocol is unified using HTTPS and all requests need to be authenticated. If the YMCS API is used without carrying the correct identity credentials information, the request will be rejected outright. More information about YMCS authentication will be detailed in **1.2.2 Authentication**.

The YMCS platform limits the frequency of API calls to ensure system stability. Most endpoints are rate-limited to 50 requests per second. This rate limit is at the enterprise level, for each enterprise that supports the YMCS API, we allow 50 requests per second. More information on rate limiting is detailed in [Invoking Rate Limiting](#).

1.2 Use YMCS APIs

YMCS APIs allow developers to access and manipulate resources under YMCS, including but not limited to device management, account management, configuration management, and other operations. This chapter will describe how to correctly call the YMCS API.

YMCS API

- **Version:** 1.0.0

- **Host:**
 - If your enterprise is in the EU region: `eu-api.ymcs.yealink.com`
 - If your enterprise is in the US region: `us-api.ymcs.yealink.com`
 - If your enterprise is in the AU region: `au-api.ymcs.yealink.com`
- **Protocols:** `HTTPS`
- **Accepts:** `application/json`
- **Responds With:** `application/json`


Authentication

Every HTTP request made to the YMCS API must go through authentication. This operation is to ensure whether the client accessing the service is a registered user of the system. During the process of authentication, [OAuth2.0 protocol](#) will be used.

Before calling the API, you need to obtain the Client ID and Client Secret from the YMCS platform to apply for an access token. An enterprise can only apply for one set of Client ID and Client Secret.

Process Description

The process for a user to request access tokens and initiate requests is as follows:

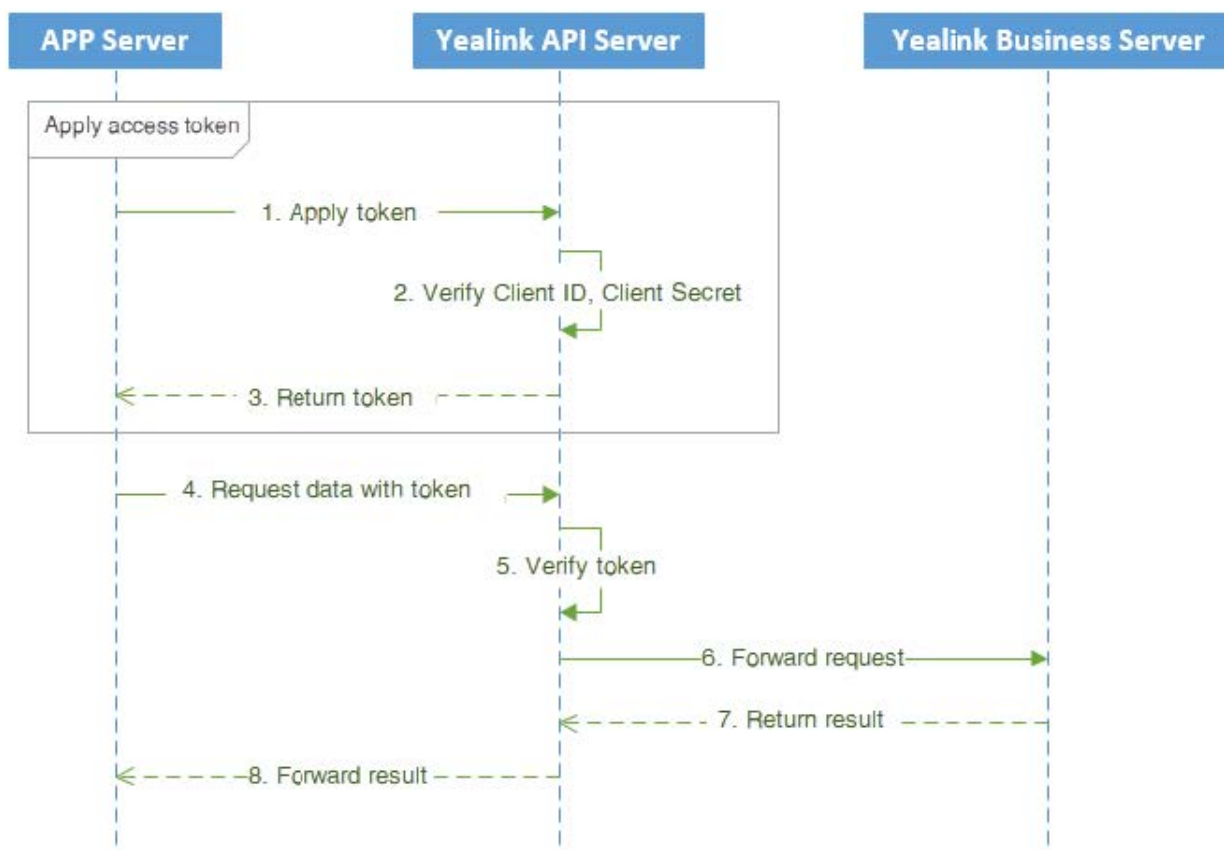

1. The third-party application server initiates and sends a request, carrying the Client ID and Client Secret, to the YMCS API server to access a token.
2. The API server verifies whether the Client ID and Client Secret information is correct.
3. Yealink API server returns access token after successful verification.
4. The third-party application server initiates a business request and carries an access token.
5. Yealink API server checks for the existence of an access token, and then verifies the validity of the access token.
6. Yealink API server forwards the request to the Yealink business server.
7. Yealink business server will return the processed result to the Yealink API server.
8. The API server will pass the response result to the third-party application server.

If the access token is invalid, you will need to provide the corresponding code to retrieve the token from the server again.

Apply for access token

Request Method

POST

Request URL

/v2/token

Request parameters

Parameter	Parameter Type	Data Type	Required	Description
Authorization	Header	String	Yes	Basic base64Encode(client_id:client_secret), connect Client ID and Client Secret with a colon, and then perform Base64 encoding.
timestamp	Header	String	Yes	Timestamp, the number of milliseconds from January 1, 1970, 00:00:00 to now.

nonce	Header	String	Yes	Random number, maximum length 32 bits
grant_type	Body	String	Yes	client_credentials

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter transmission exception, see exception response parameters for details.
401	Authentication failed, see exception response parameters.
500	Server exception, see exception response parameters for details.

Response parameters

Parameter	Data Type	Description
access_token	String	access token
token_type	String	bearer
expires_in	Long	Access token validity period, in seconds.

Exception response parameters

Parameter	Data Type	Description
error	String	Provide error codes according to the definition of the OAuth2 protocol . Error coded can be used to categorize and handle errors.
code	String	Server-defined error code, used for quick problem localization.

request id	String	Request ID generated by the server to track the execution status of the request on the server side. It can help developers quickly identify issues.
message	String	Clear and concise error Description that can be understood by end users.

Example Request

```

httpPOST /v2/token HTTP/1.1
Content-Type: application/json
Authorization: Basic czZCaGRSa3F0MzpnWDFmQmF0M2JW

{
  "grant_type": "client_credentials"
}
```

Example of response parameters

```

httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Cache-Control: no-store
Pragma: no-cache

{
  "access_token": "[JWT TOKEN]",
  "token_type": "bearer",
  "expires_in": 86400
}
```

Exception response parameters

```

httpHTTP/1.1 400 Bad Request
Content-Type: application/json;charset=UTF-8
Cache-Control: no-store
Pragma: no-cache
```

```
{
  "error": "invalid_request",
  "code": "70011",
  "requestId": "255d1aef",
  "message": "The provided value for the input parameter 'grant_type' is not valid."
}
```

Initiate business request

All API requests must be made via HTTPS. The base URL for requests is <https://api.ymcs.yealink.com/v2/>. The complete URL varies depending on the resource of the operation.

Each time you request the API, you must provide 3 HTTP Request Headers, as follows:

Name	Data Type	Description
Authorization	String	Authentication information. The format is: <code>Bearer [ACCESS TOKEN]</code>
timestamp	String	Timestamp, the number of milliseconds from January 1, 1970, 00:00:00 to now.
nonce	String	Random number, maximum length 32 bits

HTTP Request Header Example

```
httpAuthorization: Bearer [ACCESS TOKEN]
timestamp: 1568693976264
nonce: 097e0ac619ba41f68f16f1955787feb9
```

1.3 Error Definitions

Yealink API uses HTTP status codes to reflect the success or failure of request operations. 2XX status codes indicate successful operations, while 4XX or 5XX status codes indicate operation errors. If an erroneous status code is received, the error code and error message in the response body can be used to understand the reason for the error.

Status code	Description	Scenario example
2XX	Operation successful	
400	Request data error	Invalid or incomplete request data.
401Authentication error	Authentication error	The request did not carry an access token.
403	Access to certain resources is not allowed	Authentication failed
404	No data matching the request	No data found.
429	Request rate exceeds frequency limit	Request too frequent
500	Server Error	Internal server error

Error object definition

Error object

Na me	Data Typ e	Description
cod e	Stri ng	Error codes defined by the server, used for quick problem localization.
req uest Id	Stri ng	Request ID generated by the server, used for tracking the execution status of requests on the server. It helps developers quickly locate issues.
mes sag e	Stri ng	A simple and clear error Description that can be understood by the end user.
deta	Error	List of details that caused the error, may be empty

ils	Detail l[]	
-----	---------------	--

ErrorDetail object

Name	Data Type	Description
field	String	Error in the request parameter name
message	String	A simple and clear error Description that can be understood by the end user.

Error Response Example

```
json{
  "code": "{errorCode}",
  "requestId": "{requestId}",
  "message": "Validation Failed",
  "details": [
    {
      "field": "email",
      "message": "Invalid field"
    },
    {
      "field": "type",
      "message": "Invalid field"
    }
  ]
}
```

Operational code	Description	Description
------------------	-------------	-------------

900200	Operation successful	Operate Successfully
900400	Incorrect request parameters	Request parameters are incorrect
900401	The user has not logged in or the login has expired, please log in again	User is not logged in or the account has expired, please log in again
900403	The request has been forbidden.	This request is forbidden
900404	The requested resource cannot be found.	Requested resource is not found
900408	Request timed out, please try again later.	Time out, please try again
900409	Conflict request.	Request conflict
900412	Concurrent editing error.	Concurrent editing error
900429	Too many requests.	Too Many Requests
900440	Session expired.	Login Time-out
900500	The server is busy, please try again later.	The server is busy, please try again later
900501	This operation is not supported.	Not Implemented
90050	When a server acting as a gateway or proxy	Bad Gateway

2	attempts to process a request, it receives an invalid response from the upstream server.	
90050 3	Service Unavailable.	Service Unavailable
90050 4	The upstream server is not responding.	Gateway Timeout
90051 1	Internal server error	Server Internal Error
90059 9	Unknown error	unknown mistake
90040 0	Parameters cannot be null	Cannot be null
90040 0	Parameters cannot be null	Cannot be empty
90040 0	The parameter length is incorrect.	Incorrect length
90040 0	ID cannot be empty.	ID cannot be empty
90040 0	Resource does not exist	The resource does not exist or has been deleted
80000 1	Mac is not legal.	Invalid MAC
80000 2	Invalid SN.	SN is invalid
80000 3	Resource already exists.	Resource already exists

800004	The device has been added by another company.	MAC has been added by another enterprise/organization
800005	Device type illegal	Device Type is invalid
800006	The number of devices added in a batch exceeds the limit	The number of added devices exceeds the limit
800007	Invalid parameters.	Incorrect parameter format
800008	Data exceeds limit.	Data exceeds limit
800130	Account already exists	Account already exists
800200	The authentication username and password must appear in pairs.	Username and password must appear in pairs

1.4 Invoke Rate Limiting

In order to maintain the reliability of the YMCS API platform, our API has the following rate limits.

The rate limit for the normal API is 50 requests/second unless otherwise noted. Please control the frequency of your application calls and do not exceed the access rate limit or you will receive a 429 status response.

Invokers of the YMCS API shall retry Error 429 using [the exponential backoff algorithm](#) and with a minimum delay of 30 seconds.

2. Device Management

2.1 Device Basic Information Management

2.1.1 Add Devices

Request Method

POST

Request URL

/v2/dm/devices

Body parameter

Parameter	Data Type	Required	Description
mac	String	Yes	Device MAC, minimum length 12, maximum length 17 characters
sn	String	Yes	SN code, maximum length 128
deviceType	Integer	Yes	Device Type 1: Phone Device 3: Room Device
modelId	String	Yes	Model ID
name	String	No	Device name, maximum length 128
siteId	String	No	Site ID

HTTP status code

Code	Description
201	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	The device ID.
mac	String	The device MAC address.

sn	String	The group ID.
name	String	The device name.
modelId	String	The device model ID.
siteId	String	The site ID.
programVersion	String	The version number of the device firmware.

Example Request

```
httpPOST /v2/dm/devices HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "mac":"001565bbb1a9",
  "sn":"1106312113402006",
  "name":"my t54s",
  "deviceType":1
}
```

Example Response

```
httpHTTP/1.1 201 Created
```

```
Content-Type: application/json;charset=UTF-8
```

```
{
  "id": "8d07a56207074d26b61026099625b9e2",
  "mac":"001565bbb1a9",
  "sn":"1106312113402006",
  "name":"my t54s",
  "modelId":"61e659e4d78d42ebada88ef1eb751b64",
  "siteId":"a624453e1cbb44ecb9bb6ee31731a856",
  "programVersion":"70.83.0.68"
```

```
}
```

2.1.2 Add Device in Batches

Note: You can add up to 100 devices at a time.

Request Method

POST

Request URL

/v2/dm/addDevices

Body parameter

Parameter	Data Type	Required	Description
mac	String	Yes	Device MAC, minimum length 12, maximum length 17
sn	String	Yes	SN code, maximum length 128
deviceType	Integer	Yes	Device Type 1: Phone Device 3: Room Device
modelId	String	Yes	Model ID
name	String	No	Device name, maximum length 128
siteId	String	No	Site ID

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	The total number of batch additions.
successCount	Integer	The total number of successful additions.
failureCount	Integer	The total number of failures.
errors	AddError[]	Error message.

AddError object

parameter	Data Type	Description
mac	String	The device MAC address.
sn	String	The device SN address.
errorInfo	String	Error message.

Example Request

```
httpPOST /v2/dm/addDevices HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

[{
  "mac":"3a1565bbb1a9",
  "sn":"1106312113402006",
  "name":"my t54s",
  "modelId":"61e659e4d78d42ebada88ef1eb751b64",
  "deviceType":1
}]
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
```

```
{
  "total": 1,
  "successCount": 0,
  "failureCount": 1,
  "errors": [{
    "mac": "3a1565bbb1a9",
    "sn": "1106312113402006",
    "errorInfo": "device.mac.invalid"
  }]
}
```

2.1.3 Add device without SN

Note: You can add up to 100 devices at a time.

Request Method

POST

Request URL

/v2/dm/addDevicesByMac

Body parameter

Parameter	Parameter Type	Data Type	Required	Description
mac	Body	String	Yes	Device MAC, minimum length 12, maximum length 17
device Type	Body	Integer	Yes	Device Type 1: Phone Device 3: Room Device
model Id	Body	String	Yes	Model ID
name	Body	String	No	Device name, maximum length 128
siteId	Body	String	No	Site ID

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	The total number of batch additions.
successCount	Integer	The total number of successful additions.
failureCount	Integer	The total number of failures.
errors	AddError[]	Error message.

Parameter	Data Type	Description
mac	String	The device MAC address.
sn	String	The device SN address.
errorInfo	String	Error message.

Example Request

```

httpPOST /v2/dm/addDevicesByMac HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

[
  {
    "mac": "3a1565bbb1a9",
    "name": "my t54s",
    "modelId": "61e659e4d78d42ebada88ef1eb751b64",
    "deviceType": 1
  }
]

```

```
}}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 1,
  "successCount": 0,
  "failureCount": 1,
  "errors": [{
    "mac": "3a1565bbb1a9",
    "sn": "1106312113402006",
    "errorInfo": "device.mac.invalid"
  }]
}
```

2.1.4 Delete Device

Request Method

DELETE

Request URL

/v2/dm/devices/{deviceId}

PATH parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception

401	Authentication failed
500	Server exception

Example Request

```
httpDELETE /v2/dm/devices/e33b8f25247e45de84dd4c74503b241a HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 204
```

2.1.5 Delete Devices in Batches

Request Method

POST

Request URL

/v2/dm/delDevices

Body parameter

Parame ter	Data Type	Req uire d	Description
device Type	Integ er	Yes	Device Type 1: Phone Device 3: Room Device
deviceI dType	Strin g	No	Indicates the type of device identifier, default id, optional mac, id
deviceI ds	Strin g[]	Yes	Device identifier, maximum length 200

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception

401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/delDevices HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "deviceType":1,
  "deviceIds":["001565bbb1a9","001567"],
  "deviceIdType":"mac"
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
```

```
{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "001567",
    "msg": "Invalid MAC"
  }]
}
```

2.1.6 Device List

Request Method

POST

Request URL

/v2/dm/listDevices

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 100.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.
filter	Filter	No	search parameters

Filter object definition

Parameter	Data Type	Required	Description
mac	String	No	Device MAC fuzzy search keyword, maximum length 17, supports with : or -, such as 00:15:65:bb:b1:a9
modelId	String	No	Model ID
deviceStatus	Integer	No	Device status, 1: online, 0: offline, -1: not reported
accountStatus	Integer	No	Account status, 1: Registered 2: dnd 3: Unregistered
deviceType	Integer	No	Device type status, 1: Phone Device 3: Room Device, if not filled in, it means all.
siteId	String	No	Site ID

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	The offset value.
limit	Long	The maximum returned number.
total	Long	The total number.
data	Device[]	Device information array

Device object definition

Parameter	Data Type	Description
id	String	device id
mac	String	Device MAC
sn	String	Device SN
name	String	Device Name
modelId	String	Model ID
siteId	String	Site ID
programVersion	String	Device firmware version number
deviceStatus	String	Device status, online: online, offline: offline, pending: not reported

Example Request

```
httpPOST /v2/dm/listDevices HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 20,
  "autoCount": true,
  "filter": {
    "deviceStatus": 1,
    "siteId": "a624453e1cbb44ecb9bb6ee31731a856"
  }
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json;charset=UTF-8
```

```
{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [
    {
      "id": "8d07a56207074d26b61026099625b9e2",
      "mac": "001565bbb1a9",
      "sn": "1106312113402006",
      "name": "my t54s",
      "modelId": "61e659e4d78d42ebada88ef1eb751b64",
      "siteId": "a624453e1cbb44ecb9bb6ee31731a856",
      "programVersion": "70.83.0.68",
      "deviceStatus": "online"
    }
  ]
}
```

2.1.7 Edit Device

Request Method

PATCH

Request URL

/v2/dm/devices/{deviceId}

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID address.

Body parameter

Parameter	Data Type	Required	Description
name	String	No	Device name, maximum length 128
siteId	String	No	Site ID

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPATCH /v2/dm/devices/8d07a56207074d26b61026099625b9e2 HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "name":"my t54s2"
}
```

Example Response

```
httpHTTP/1.1 204
```

2.1.8 Device Details

Request Method

GET

Request URL

/v2/dm/devices/{deviceId}

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	device id
mac	String	Device MAC
sn	String	group id
name	String	Device Name
modelId	String	Model ID
modelN	String	Model Name

ame		
siteId	String	Site ID
siteName	String	Site Name
lanIp	String	Intranet IP
deviceStatus	String	Device status, online: online, offline: offline, pending: not reported
programVersion	String	Firmware version
lastReportTime	long	Last reporting time
accounts	ReportAccount[]	Reported account information

ReportAccount object definition

Parameter	Data Type	Description
accountId	String	Account ID
lineId	Integer	Account line, starting from 1
accountType	Integer	Account type: 0: SIP, 1: H323, 2: SFB
accountServer	String	Account server address
registerName	String	Registration Name

username	String	User Name
status	Integer	Account status: 1: Registered 2: dnd 3: Not registered 4: Unknown

Example Request

```
httpGET /v2/dm/devices/8d07a56207074d26b61026099625b9e2 HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "8d07a56207074d26b61026099625b9e2",
  "mac": "001565bbb1a9",
  "sn": "1106312113402006",
  "name": "my t54s",
  "modelId": "61e659e4d78d42ebada88ef1eb751b64",
  "modelName": "SIP-T54S",
  "siteId": "a624453e1cbb44ecb9bb6ee31731a856",
  "siteName": "mysite",
  "lanIp": "10.50.198.6",
  "deviceStatus": "online",
  "programVersion": "70.83.0.68",
  "lastReportTime": 1711093807136,
  "accounts": [{
    "accountId": "604e67944c7c43fe8b66099254ec3439",
    "lineId": 1,
    "accountType": 0,
    "accountServer": "10.200.108.48",
    "registerName": "1000",
    "username": "1000",
```

```
"status":0

},{
"accountId":"a45a6b4a7e0447b8a6c3f2839d902acd"
"linelId":2,
"accountType":0,
"accountServer":"10.200.108.48",
"registerName":"2000",
"username":"2000",
"status":0
}}
}
```

2.1.9 Device Combination Configuration Query

Request Method

GET

Request URL

/v2/dm/devices/{deviceId}/configs

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data	Description
-----------	------	-------------

	Type	
deviceConfig	String	Device MAC Configuration
siteConfig	String	Device Site Configuration
globalConfig	String	Enterprise Configurations
enforceConfig	String	Site forced inheritance configuration

Example Request

```
httpGET /v2/dm/devices/8d07a56207074d26b61026099625b9e2/configs HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "deviceConfig": "account.1.auth_name = test1101",
  "siteConfig": "lang.gui=English",
  "globalConfig": "auto_provision.server.url=\r\nlang.gui=English",
  "enforceConfig": "security.user_password=user2"
}
```

2.2 Device Group Management

2.2.1 Add Group

Request Method

POST

Request URL

/v2/dm/deviceGroups

Body parameter

Parameter	Data Type	Required	Description
name	String	Yes	Group name, length 64

deviceType	Integer	Yes	Device Type 1: Phone Device 3: Room Device
Description	String	No	Group Description information, length 256

HTTP status code

Code	Description
201	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	The group ID.
name	String	Group Name
deviceType	Integer	Device Types
description	String	Group description information

Example Request

```
httpPOST /v2/dm/deviceGroups HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "name": "t54sgroup",
  "deviceType": 1,
  "Description": "test"
```

```
}
```

Example Response

```
httpHTTP/1.1 201 Created
Content-Type: application/json;charset=UTF-8

{
  "id": "00884cef841e48f4acd213c084e65f67",
  "name": "t54sgroup",
  "deviceType": 1,
  "Description": "test"
}
```

2.2.2 Edit Group

Request Method

PATCH

Request URL

/v2/dm/deviceGroups/{deviceGroupId}

Path parameter

parameter	Data Type	Required	Description
deviceGroupId	String	Yes	Group ID

Body parameter

Parameter	Data Type	Required	Description
name	String	Yes	Group name, length 64
deviceType	Integer	Yes	Device Type 1: Phone Device 3: Room Device
Description	String	No	Group Description information, length 256

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPATCH /v2/dm/deviceGroups/00884cef841e48f4acd213c084e65f67/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "name":"t54sgroup2",
  "deviceType":1,
  "Description":"test2"
}
```

Example Response

```
httpHTTP/1.1 204
```

2.2.3 Group List

Request Method

POST

Request URL

/v2/dm/listDeviceGroups

Body parameter

Param eter	Data Type	Requir ed	Description
---------------	--------------	--------------	-------------

skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.
filter	Filter	No	search parameters

Filter object definition

Parameter	Data Type	Required	Description
deviceType	Integer	No	Device type status, 1: Phone Device 3: Room Device, if not filled in, it means all.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	offset

limit	Long	The maximum returned number.
total	Long	Total quantity
data	DeviceGroup[]	DeviceGroup information array

DeviceGroup object definition

Parameter	Data Type	Description
id	String	Group ID
name	String	Group name, length 64
deviceType	Integer	Device Type 1: Phone Device 3: Room Device
Description	String	Group Description information, length 256

Example Request

```
httpPOST /v2/dm/listDeviceGroups HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 10,
  "autoCount": true,
  "filter": {
    "deviceType": 1
  }
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json;charset=UTF-8
```

```
{
```

```
"skip": 0,
"limit": 10,
"total": 1,
"data": [{
  "id": "00884cef841e48f4acd213c084e65f67",
  "name": "t54sgroup",
  "deviceType": 1,
  "Description": "test"
}]
}
```

2.2.4 Delete Group

Request Method

DELETE

Request URL

/v2/dm/deviceGroups/{deviceGroupId}

PATH parameter

parameter	Data Type	Required	Description
deviceGroupId	String	Yes	Group ID

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpDELETE /v2/dm/deviceGroups/00884cef841e48f4acd213c084e65f67 HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

httpHTTP/1.1 204

2.2.5 Add Device to Group

Request Method

POST

Request URL

/v2/dm/deviceGroups/{deviceId}/addDevices

PATH parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	Group ID

Body parameter

Parameter	Data Type	Required	Description
deviceIds	String[]	Yes	Device ID list, limited to 200.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.

errors	OpError[]	Error message.
--------	-----------	----------------

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/deviceGroups/00884cef841e48f4acd213c084e65f67/addDevices
HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "deviceIds":
  ["0006572538f74e8683716cf961caa95b","00099642675e4d4bb5e91fd9ae5ce585"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "00099642675e4d4bb5e91fd9ae5ce585",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

2.2.6 Remove devices from the group

Request Method

POST

Request URL

/v2/dm/deviceGroups/{deviceGroupId}/delDevices

PATH parameter

parameter	Data Type	Required	Description
deviceGroupId	String	Yes	Group ID

Body parameter

Parameter	Data Type	Required	Description
deviceIds	String[]	Yes	Device ID list, maximum length 200

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/deviceGroups/00884cef841e48f4acd213c084e65f67/delDevices HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "deviceIds":
  ["0006572538f74e8683716cf961caa95b","00099642675e4d4bb5e91fd9ae5ce585"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "00099642675e4d4bb5e91fd9ae5ce585",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

2.2.7 Query Device List within Group

Request Method

POST

Request URL

/v2/dm/deviceGroups/{deviceId}/listDevices

PATH parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	Group ID

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.
filter	Filter	No	search parameters

Filter object definition

Para	Dat	Re	Description
------	-----	----	-------------

meter	Parameter Type	Required	
mac	String	No	Device MAC fuzzy search keyword, maximum length 17, supports with : or -, such as 00:15:65:bb:b1:a9
modelId	String	No	Model ID
deviceStatus	Integer	No	Device status, 1: online, 0: offline, -1: not reported

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total quantity
data	Device[]	Device information array

Device object definition

Parameter	Data Type	Description
-----------	-----------	-------------

id	String	device id
mac	String	Device MAC
sn	String	Device SN
name	String	Device Name
modelId	String	Model ID
siteId	String	Site ID
programVersion	String	Device firmware version number
deviceStatus	String	Device status, online: online, offline: offline, pending: not reported

```
httpPOST /v2/dm/deviceGroups/00884cef841e48f4acd213c084e65f67/listDevices HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 10,
  "autoCount": true
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json;charset=UTF-8
```

```
{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "8d07a56207074d26b61026099625b9e2",
    "mac": "001565bbb1a9",
    "sn": "1106312113402006",
    "name": "my t54s",
    "modelId": "61e659e4d78d42ebada88ef1eb751b64",
    "siteId": "a624453e1cbb44ecb9bb6ee31731a856",
    "programVersion": "70.83.0.68",
    "deviceStatus": "online"
  }]
}
```

2.3 Device Control

2.3.1 Device Restart

Request Method

POST

Request URL

/v2/dm/device/reboot

Body parameter

Parameter	Data Type	Required	Description
deviceIds	String[]	Yes	Device ID list, maximum length 200
deviceType	Integer	Yes	Device Type 1: Phone Device 3: Room Device

HTTP status code

Code	Description
------	-------------

200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Total number of factory restored devices
successCount	Integer	Number of successful factory restored
failureCount	Integer	Number of failed factory restored
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/device/reboot HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "deviceIds":
    ["0006572538f74e8683716cf961caa95b","00099642675e4d4bb5e91fd9ae5ce585"],
  "deviceType":1
}
```

```
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount":1,
  "failureCount":1,
  "errors":[{"
    "field":"0006572538f74e8683716cf961caa95b",
    "msg":"The resource does not exist or has been deleted"
  }]
}
```

2.3.2 Device Factory Reset

Request Method

POST

Request URL

/v2/dm/device/reset

Body parameter

Paramet er	Data Type	Requi red	Description
deviceIds	String[]	Yes	Device ID list
deviceTy pe	Integer	Yes	Device Type 1: Phone Device 3: Room Device

HTTP status code

Code	Description
204	Operation successful

400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Total number of factory restored devices
successCount	Integer	Number of successful factory restored
failureCount	Integer	Number of failed factory restored
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/device/reset HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "deviceIds":
    ["0006572538f74e8683716cf961caa95b","00099642675e4d4bb5e91fd9ae5ce585"],
  "deviceType":1
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "0006572538f74e8683716cf961caa95b",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

2.4 Device Identification Management

2.4.1 Obtain Device ID

Request Method

POST

Request URL

/v2/dm/deviceId

Body parameter

Parameter	Data Type	Required	Description
device Type	Integer	Yes	Device Type 1: Phone Device 3: Room Device
device IdType	String	No	Indicates the type of device identifier, default is mac, optional is mac.
deviceIds	String[]	Yes	Device ID, limit 200 characters

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
key	String	Device identification
deviceId	String	The device ID.

Example Request

```
httpPOST /v2/dm/deviceId HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "deviceType":1,
  "deviceIds":["001565bbb1a9"],
  "deviceIdType":"mac"
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json;charset=UTF-8
```

```
[{
  "key":"001565bbb1a9",
  "deviceId":"8d07a56207074d26b61026099625b9e2"
}]
```

2.5 Device Accessories Management

2.5.1 Accessory List

Request Method

POST

Request URL

/v2/dm/devices/{deviceId}/listParts

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.

HTTP status code

Code	Description
200	Operation successful

400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	accessory id
mac	String	Accessory MAC
sn	String	Accessory SN
modelId	String	Model ID
connectWay	String	Connection methods for accessories, including USB, BT, etc.
connStatus	Integer	Status, 1: online, 0: offline
lanIp	String	Intranet IP
programVersion	String	Firmware version number
lastReportTime	Long	Last reporting time

Example Request

```

httpPOST /v2/dm/devices/8d07a56207074d26b61026099625b9e2/listParts HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "skip": 0,
  "limit": 20,

```

```
"autoCount": true
}
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "5d6017f6fe004eb7ac1107c80c1c44b7",
    "mac": "001565bbb1a9",
    "sn": "1106312113402006",
    "modelId": "e7c5c0c406cf4a02bd9ed64183d1de05",
    "modelName": "CP700",
    "connectWay": "USB",
    "connStatus": 1,
    "lanIp": "10.60.50.22",
    "programVersion": "153.433.0.5",
    "lastReportTime": 1709577211630
  }]
}
```

2.5.2 Accessory Details

Request Method

GET

Request URL

/v2/dm/devices/{deviceId}/parts/{partId}

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.
partId	String	Yes	Accessories ID

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	accessory id
mac	String	Accessory MAC
sn	String	Accessory SN
modelId	String	Model ID

	ng	
con nec tWa y	St ri ng	Connection methods for accessories, including USB, BT, etc.
conn Stat us	In te ge r	Status, 1: online, 0: offline
lanl p	St ri ng	Intranet IP
prog ramV ersi on	St ri ng	Firmware version number
last Rep ortT ime	Lo ng	Last reporting time
extr alInf o	Ex tr al nf o	Additional information related to the model, when the model is a sensor, the response content includes temperature, battery level, and other information.

ExtraInfo object definition

- When the model is a sensor, the content is as follows.

parameter	Data Type	Description
batteryLevel	Integer	Battery Level
humidity	Integer	Humidity
irradiance	IntegerIlluminance	
temperature	Integer	Temperature
numPeople	Integer	People Count Statistics

Example Request

```
httpGET /v2/dm/devices/8d07a56207074d26b61026099625b9e2/
parts/104aa43ca9994de0825ec8d32f3a8c60 HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "104aa43ca9994de0825ec8d32f3a8c60",
  "mac": "84fd27df8045",
  "sn": "803111D070000358",
  "modelId": "50b2674518a648968367ea2bb61a5572",
  "modelName": "RoomSensor",
  "connectWay": "BT",
  "connStatus": 1,
  "lanIp": "10.60.50.21",
  "programVersion": "153.433.0.5",
  "lastReportTime": 1709577211630,
  "extraInfo": {
    "batteryLevel": 100,
    "humidity": 55,
    "irradiance": 27,
    "temperature": 31,
```

```
"numPeople":2
}

}
```

2.5.2 Accessory Restart

Request Method

POST

Request URL

/v2/dm/devices/{deviceId}/parts/reboot

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Parameter	Data Type	Required	Description
partIds	String[]	No	Accessory ID list, maximum length 200, not passing indicates a restart of all accessories under this device.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
total	Integer	Total number of rebooted devices
successCount	Integer	Number of successful reboots
failureCount	Integer	Number of failed reboots
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/device/0006572538f74e8683716cf961caa95b/parts/reboot HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "partIds":["00ab7c8da8ff4345af3857feb68aedf","0299d1254f7042068c4ef1c5895b7e5a"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "00ab7c8da8ff4345af3857feb68aedf",
```

```
"msg":"The resource does not exist or has been deleted"
}}
}
```

2.5.4 Restore Accessories to Factory Settings

Request Method

POST

Request URL

/v2/dm/devices/{deviceId}/parts/reset

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Parameter	Data Type	Required	Description
partIds	String []	No	Accessory ID list, maximum length of 200, if not provided, indicates that all accessories under this device will be restored to factory settings.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed

500	Server exception
-----	------------------

Response parameters

Parameter	Data Type	Description
total	Integer	Total number of factory restored devices
successCount	Integer	Number of successful factory restored
failureCount	Integer	Number of failed factory restored
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/device/0006572538f74e8683716cf961caa95b/parts/reset HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "partIds":["00ab7c8da8ff4345af3857feb68aedef","0299d1254f7042068c4ef1c5895b7e5a"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
```

```
"total": 2,
"successCount":1,
"failureCount":1,
"errors":[{"
"field":"00ab7c8da8ff4345af3857feb68aedef",
"msg":"The resource does not exist or has been deleted"
}]
}
```

2.6 Device Account Management

2.6.1 Device Binding Account

Request Method

POST

Request URL

/v2/dm/devices/{deviceId}/bindAccounts

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Parameter	Data Type	Required	Description
accounts	BindAccount []	Yes	List of account information to be bound

BindAccount object definition

Parameter	Data Type	Description
lineId	integer	Account line, starting from 1
accountType	Integer	Account type: 0: SIP, 1: H323, 2: SFB

accountId	String	Account ID
-----------	--------	------------

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
total	Integer	Total number of bindings
successCount	Integer	Number of successful bindings
failureCount	Integer	Number of failed bindings
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/devices/8d07a56207074d26b61026099625b9e2/bindAccounts HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

[{
  "linelId":1,
  "accountType":0,
```

```
"accountId":"604e67944c7c43fe8b66099254ec3439"
},{
"linId":2,
"accountType":0,
"accountId":"a45a6b4a7e0447b8a6c3f2839d902acd"
}]
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
"total": 2,
"successCount":1,
"failureCount":1,
"errors":[{"
"field":"604e67944c7c43fe8b66099254ec3439",
"msg":"The resource does not exist or has been deleted"
}]
}
```

2.6.2 Device Unbinding Account

Request Method

POST

Request URL

/v2/dm/devices/{deviceId}/unbindAccounts

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Paramete	Data	Require	Description
----------	------	---------	-------------

r	Type	d	
accountIds	String[]	Yes	List of account IDs to be unbound

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
total	Integer	The total number of unbundled
successCount	Integer	Number of successful unbindings
failureCount	Integer	Number of failed unbindings
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/devices/8d07a56207074d26b61026099625b9e2/unbindAccounts
HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json
```

```
{
```

```
"accountIds":
["604e67944c7c43fe8b66099254ec3439","a45a6b4a7e0447b8a6c3f2839d902acd"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "604e67944c7c43fe8b66099254ec3439",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

2.6.3 List of accounts bound to the device

Request Method

GET

Request URL

/v2/dm/devices/{deviceId}/boundAccounts

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception

401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
data	BindAccount[]	Bind account information array

BindAccount object definition

Parameter	Data Type	Description
accountId	String	Account ID
lineId	Integer	Account line, starting from 1
accountType	Integer	Account type: 0: SIP, 1: H323, 2: SFB
accountServer	String	Account server address
registerName	String	Registration Name
username	String	User Name

Example Request

```
httpGET /v2/dm/devices/8d07a56207074d26b61026099625b9e2/boundAccounts HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json

[{
  "accountId":"604e67944c7c43fe8b66099254ec3439"
  "lineId":1,
  "accountType":0,
```

```
"accountServer":"10.200.108.48",
"registerName":"1000",
"username":"1000"

},{
"accountId":"a45a6b4a7e0447b8a6c3f2839d902acd"
"linelId":2,
"accountType":0,
"accountServer":"10.200.108.48",
"registerName":"2000",
"username":"2000"

}]
```

3.Account Management

3.1 Add SIP account

Request Method

POST

Request URL

/v2/dm/sipAccounts

Body parameter

Parameter	Data Type	Required	Description
register Name	String	Yes	The registered name, with no more than 128 characters.
username	String	Yes	Username, maximum length 128
password	String	Yes	Password, maximum length 128
display	String	No	Display name, maximum length 128

Name			
label	String	No	Label, maximum length 128
sipServer1	SipServer	Yes	sip server 1 address
sipServer2	SipServer	No	sip server 2 address
remark	String	No	Note, maximum length 512
siteId	String	No	Site ID to be assigned

SipServer object definition

Parameter	Data Type	Description
host	String	Server address, maximum length 256
port	Integer	Server port, 0~65535

HTTP status code

Code	Description
201	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	account id
username	String	username
registerInfo	String	Registration Information

serverAddress	String	Server address
accountType	Integer	Account type, 0: SIP, 1: H323, 2: SFB
remark	String	Note
createTime	Long	Creation time

Example Request

```
httpPOST /v2/dm/sipAccounts HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "registerName": "2552",
  "username": "2552",
  "password": "*****",
  "label": "2552",
  "displayName": "2552",
  "sipServer1": {
    "host": "ume.yealink.com",
    "port": 5061
  },
  "siteId": "0006d62003684754b11c09c5d94ea687",
  "remark": "test"
}
```

Example Response

```
httpHTTP/1.1 201 Created
Content-Type: application/json;charset=UTF-8

{
  "id": "e33b8f25247e45de84dd4c74503b241a",
  "registerInfo": "2552",
  "username": "2552",
```

```
"serverAddress": "ume.yealink.com",
"accountType": 0,
"createTime": 1698052518923
}
```

3.2 Edit SIP Account

Request Method

PATCH

Request URL

/v2/dm/sipAccounts/{accountId}

Path parameter

parameter	Data Type	Required	Description
accountId	String	Yes	Account

Body parameter

Parameter	Data Type	Required	Description
registerName	String	Yes	Name, maximum length 128
username	String	Yes	Username, maximum length 128
password	String	Yes	Password, maximum length 128
displayName	String	No	Display name, maximum length 128
label	String	No	Label, maximum length 128
sipServer1	SipServer	Yes	sip server 1 address
sipServer2	SipServer	No	sip server 2 address
remark	String	No	Note, maximum length 512

siteld	String	No	Site ID to be assigned
--------	--------	----	------------------------

SipServer object definition

Parameter	Data Type	Description
host	String	Server address, maximum length 256
port	Integer	Server port, 0~65535

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPATCH /v2/dm/sipAccounts/e33b8f25247e45de84dd4c74503b241a HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "registerName": "2553",
  "username": "2552",
  "password": "*****",
  "label": "2552",
  "displayName": "2552",
  "sipServer1": {
    "host": "ume.yealink.com",
    "port": 5061
  },
  "siteld": "0006d62003684754b11c09c5d94ea687",
  "remark": "test"
```

```
}
```

Example Response

```
httpHTTP/1.1 204
```

3.3 Account List

Request Method

POST

Request URL

/v2/dm/listAccounts

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.
filter	Filter	No	search parameters

Filter object definition

Parameter	Data Type	Required	Description
-----------	-----------	----------	-------------

username	String	No	Username fuzzy search keyword
----------	--------	----	-------------------------------

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total quantity
data	Account[]	Account information array

Account object definition

Parameter	Data Type	Description
id	String	account id
username	String	username
registerInfo	String	Registration Information
serverAddress	String	Server address
accountType	Integer	Account type, 0: SIP, 1: H323, 2: SFB
remark	String	Note
createTime	Long	Creation time

Example Request


```
httpPOST /v2/dm/listAccounts HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 20,
  "autoCount": true,
  "filter": {
    "username": "2552"
  }
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json;charset=UTF-8
```

```
{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "e33b8f25247e45de84dd4c74503b241a",
    "registerInfo": "2552",
    "username": "h323",
    "accountType": 1,
    "createTime": 1698052518923
  }]
}
```

3.4 Delete Account

Request Method

POST

Request URL

/v2/dm/delAccounts

Body parameter

Parameter	Data Type	Required	Description
accountIds	String[]	Yes	Account ID list, maximum length 200

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/delAccounts HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "accountIds":
  ["e33b8f25247e45de84dd4c74503b241a","2d3e77b736e240eabf25aa1f5448aa0c"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "2d3e77b736e240eabf25aa1f5448aa0c",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

4. Configuration Management

4.1 Telephone Device Configuration Management

4.1.1 Device Configuration List

Request Method

POST

Request URL

/v2/dm/listDeviceConfigs

Body parameter

Para mete	Data Type	Requ ired	Description
--------------	--------------	--------------	-------------

r			
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
auto Count	Boolean	No	Whether to return the total number of records
filter	Filter	No	filter condition

Filter object definition

Parameter	Data Type	Required	Description
mac	String	No	Device MAC fuzzy search keyword, maximum length 17, supports with : or -, such as 00:15:65:bb:b1:a9

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total data volume
data	Config[]	Config information array

Config object definition

parameter	Data Type	Description
id	String	The primary key ID.

name	String	The configuration name.
modelId	String	The device model ID.
Description	String	Enter a description for the configuration.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/listDeviceConfigs HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 10,
  "autoCount": true,
  "filter": {
    "mac": "001565bbb1a9"
  }
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json;charset=UTF-8
```

```
{
  "skip": 0,
```

```
"limit": 10,
"total": 1,
"data": [{
  "id": "8d07a56207074d26b61026099625b9e2",
  "name": "my config",
  "modelId": "61e659e4d78d42ebada88ef1eb751b64",
  "Description": "my t54s config"
}]
}
```

4.1.2 Add Device Configuration

Request Method

POST

Request URL

/v2/dm/deviceConfigs

Body parameter

Parameter	Data Type	Required	Description
deviceId	String	Yes	Device ID
content	String	Yes	cfg file content
autoPush	Boolean	No	Whether to automatically push this device configuration when the phone device is powered on for the first time or restored to factory settings, true: yes false: no

HTTP status code

Code	Description
201	Operation successful

400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	The device configuration ID.

Example Request

```
httpPOST /v2/dm/deviceConfigs HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "deviceId": "8d07a56207074d26b61026099625b9e2",
  "content": "lang.wui=English\nlang.gui=English",
  "autoPush":true
}
```

Example Response

```
httpHTTP/1.1 201 Created
Content-Type: application/json;charset=UTF-8

{
  "id": "d916a46b4557464c87c278cb37477bef"
}
```

4.1.3 Delete Device Configuration

Request Method

POST

Request URL

/v2/dm/delDeviceConfigs

Body parameter

Parameter	Data Type	Required	Description
configIds	String[]	Yes	Device configuration ID list, maximum length 200

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/delDeviceConfigs HTTP/1.1
```


Host: api.ymcs.yealink.com

Content-Type: application/json

```
{
  "configIds":
  ["e33b8f25247e45de84dd4c74503b241a","8d07a56207074d26b61026099625b9e2"]
}
```

Example Response

httpHTTP/1.1 200 OK

Content-Type: application/json;charset=UTF-8

```
{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "e33b8f25247e45de84dd4c74503b241a",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

4.1.4 Device Configuration Details

Request Method

GET

Request URL

/v2/dm/deviceConfigs/{configId}

Path parameter

Parameter	Data Type	Required	Description
configId	String	Yes	The device configuration ID.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
id	String	The device configuration ID.
name	String	The configuration name.
modelId	String	The device model ID.
content	String	Configuration Content
Description	String	Enter a description for the configuration.

Example Request

```
httpGET /v2/dm/deviceConfigs/e33b8f25247e45de84dd4c74503b241a HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "8d07a56207074d26b61026099625b9e2",
  "name": "my config",
  "modelId": "61e659e4d78d42ebada88ef1eb751b64",
  "content": "#!version:1.0.0.1\naccount.1.codec.g722.enable=1"
  "Description": "my t54s config"
}
```

4.1.5 Push Device Configuration

Request Method

POST

Request URL

/v2/dm/deviceConfigs/{configId}/push

Path parameter

parameter	Data Type	Required	Description
configId	String	Yes	The configuration ID.

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/deviceConfigs/e33b8f25247e45de84dd4c74503b241a/push HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 204
```

4.2 Telephone Substation Configuration Management

4.2.1 Add Sub-site Configuration

Request Method

POST

Request URL

/v2/dm/siteConfigs

Body parameter

Parameter	Data Type	Required	Description
name	String	Yes	Sub-site configuration name, length 64
siteId	String	Yes	Site ID
deviceType	Integer	Yes	Device Type 1: Phone Device
modelId	String	No	Model ID, leaving it blank indicates all models
content	String	No	Configuration file content
Description	String	No	Description, length 256

HTTP status code

Code	Description
201	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	The device configuration ID.

Example Request

```
httpPOST /v2/dm/siteConfigs HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "name": "site1 config",
```

```
"siteId":"048a97f00ece46bd8d8bf97f5002992a",
"deviceType":1,
"modelId":"db249ca8f83f425baeda09214288d0a9",
"content": "lang.wui=English\nlang.gui=English",
"Description":"test"
}
```

Example Response

```
httpHTTP/1.1 201 Created
Content-Type: application/json;charset=UTF-8

{
  "id": "8b7f1739ad6d4a578267d09b53a262a3"
}
```

4.2.2 Edit Subsite Configuration

Request Method

PATCH

Request URL

/v2/dm/siteConfigs/{configId}

Path parameter

Parameter	Data Type	Required	Description
configId	String	Yes	Subsite configuration ID.

Body parameter

Parameter	Data Type	Required	Description
name	String	Yes	Sub-site configuration name, length 64
siteId	String	Yes	Site ID
deviceType	Integer	Yes	Device Type 1: Phone Device

modelId	String	No	Model ID, leaving it blank indicates all models
content	String	No	Configuration file content
Description	String	No	Description, length 256

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPATCH /v2/dm/siteConfigs/8b7f1739ad6d4a578267d09b53a262a3 HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "name": "site1 config2",
  "siteId": "048a97f00ece46bd8d8bf97f5002992a",
  "deviceType": 1,
  "modelId": "db249ca8f83f425baeda09214288d0a9",
  "content": "lang.wui=English\nlang.gui=English",
  "Description": "test2"
}
```

Example Response

```
httpHTTP/1.1 204
```

4.2.3 Delete Subsite Configuration

Request Method

POST

Request URL

/v2/dm/delSiteConfigs

Body parameter

Parameter	Data Type	Required	Description
configIds	String[]	Yes	Sub-site configuration ID list, maximum length 200

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field

msg	String	Error message.
-----	--------	----------------

Example Request

```
httpPOST /v2/dm/delSiteConfigs HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "configIds":
  ["8b7f1739ad6d4a578267d09b53a262a3","e33b8f25247e45de84dd4c74503b241a"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "e33b8f25247e45de84dd4c74503b241a",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

4.2.4 Subsite Configuration Details

Request Method

GET

Request URL

/v2/dm/siteConfigs/{configId}

Path parameter

Parameter	Data Type	Required	Description
-----------	-----------	----------	-------------

configId	String	Yes	Subsite configuration ID.
----------	--------	-----	---------------------------

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	Sub-site Configuration ID
name	String	Sub-site configuration name, length 64
siteId	String	Site ID
deviceType	Integer	Device Type 1: Phone Device
modelId	String	Model ID
content	String	Configuration file content
Description	String	Description, length 256

Example Request

```
httpGET /v2/dm/siteConfigs/8b7f1739ad6d4a578267d09b53a262a3 HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
```

```
{
  "id": "8b7f1739ad6d4a578267d09b53a262a3",
  "name": "site1 config2",
  "siteId": "048a97f00ece46bd8d8bf97f5002992a",
  "deviceType": 1,
  "modelId": "db249ca8f83f425baeda09214288d0a9",
  "content": "lang.wui=English\nlang.gui=English",
  "Description": "test2"
}
```

4.2.5 Substation Configuration List

Request Method

POST

Request URL

/v2/dm/listSiteConfigs

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
auto Count	Boolean	No	Whether to return the total number of records

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total data volume

data	Config[]	Config information array
------	----------	--------------------------

Config definition

Parameter	Data Type	Description
id	String	Sub-site Configuration ID
name	String	Sub-site configuration name, length 64
siteId	String	Site ID
deviceType	Integer	Device Type 1: Phone Device
modelId	String	Model ID
Description	String	Description, length 256

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/listSiteConfigs HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 10,
  "autoCount": true
}
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "8b7f1739ad6d4a578267d09b53a262a3",
    "name": "site1 config2",
    "siteId": "048a97f00ece46bd8d8bf97f5002992a",
    "deviceType": 1,
    "modelId": "db249ca8f83f425baeda09214288d0a9",
    "Description": "test2"
  }]
}
```

4.2.6 Push Subsite Configuration

Request Method

POST

Request URL

/v2/dm/siteConfigs/{configId}/push

Path parameter

parameter	Data Type	Required	Description
configId	String	Yes	The configuration ID.

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception

401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/siteConfigs/8b7f1739ad6d4a578267d09b53a262a3/push HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 204
```

4.3 Phone Group Configuration Management

4.3.1 Add Group Configuration

Request Method

POST

Request URL

/v2/dm/groupConfigs

Body parameter

Parameter	Data Type	Required	Description
name	String	Yes	Group configuration name, length 64
deviceGroupUpId	String	Yes	Device Group ID
deviceType	Integer	Yes	Device Type 1: Phone Device
modelId	String	No	Model ID, leaving it blank indicates all models
content	String	No	Configuration file content
Description	String	No	Description, length 256

Response parameters

Parameter	Data Type	Description
id	String	Group Configuration ID

HTTP status code

Code	Description
201	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/groupConfigs HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "name": "group config",
  "deviceGroupId":"1185861ed00840ea99a7b07aa0f28f88",
  "deviceType":1,
  "modelId":"db249ca8f83f425baeda09214288d0a9",
  "content": "lang.wui=English\nlang.gui=English",
  "Description":"test"
}
```

Example Response

```
httpHTTP/1.1 201 Created
Content-Type: application/json;charset=UTF-8

{
  "id": "8faa39e34929425f85b4cd9925a2bbcb"
```

```
}
```

4.3.2 Edit Group Configuration

Request Method

PATCH

Request URL

/v2/dm/groupConfigs/{configId}

Path parameter

Parameter	Data Type	Required	Description
configId	String	Yes	Group Configuration ID

Body parameter

Parameter	Data Type	Required	Description
name	String	Yes	Group configuration name, length 64
deviceGroupUpId	String	Yes	Device Group ID
deviceType	Integer	Yes	Device Type 1: Phone Device
modelId	String	No	Model ID, leaving it blank indicates all models
content	String	No	Configuration file content
Description	String	No	Description, length 256

HTTP status code

Code	Description
204	Operation successful

400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPATCH /v2/dm/groupConfigs/8faa39e34929425f85b4cd9925a2bbcb HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "name": "group config2",
  "deviceGroupId": "1185861ed00840ea99a7b07aa0f28f88",
  "deviceType": 1,
  "modelId": "db249ca8f83f425baeda09214288d0a9",
  "content": "lang.wui=English\nlang.gui=English",
  "Description": "test2"
}
```

Example Response

```
httpHTTP/1.1 204
```

4.3.3 Delete Group Configuration

Request Method

POST

Request URL

/v2/dm/delGroupConfigs

Body parameter

Parame ter	Data Type	Requi red	Description
configl ds	String[]	Yes	Group configuration ID list, maximum length 200

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```

httpDELETE /v2/dm/delGroupConfigs HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "configIds":
  ["8faa39e34929425f85b4cd9925a2bbcb","e33b8f25247e45de84dd4c74503b241a"]
}

```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "e33b8f25247e45de84dd4c74503b241a",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

4.3.4 Group Configuration Details

Request Method

GET

Request URL

/v2/dm/groupConfigs/{configId}

Path parameter

Parameter	Data Type	Required	Description
configId	String	Yes	Group Configuration ID

Response parameters

Parameter	Data Type	Description
id	String	Group Configuration ID
name	String	Group configuration name, length 64
deviceGroupId	String	Group ID
deviceType	Integer	Device Type 1: Phone Device

modelId	String	Model ID
content	String	Configuration file content
Description	String	Description, length 256

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpGET /v2/dm/groupConfigs/8faa39e34929425f85b4cd9925a2bbcb HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "8faa39e34929425f85b4cd9925a2bbcb",
  "name": "group config2",
  "deviceGroupId": "1185861ed00840ea99a7b07aa0f28f88",
  "deviceType": 1,
  "modelId": "db249ca8f83f425baeda09214288d0a9",
  "content": "lang.wui=English\nlang.gui=English",
  "Description": "test2"
}
```

4.3.5 Group Configuration List

Request Method

POST

Request URL

/v2/dm/listGroupConfigs

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
auto Count	Boolean	No	Whether to return the total number of records

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total data volume
data	Config[]	Config information array

Config definition

Parameter	Data Type	Description
id	String	Group Configuration ID
name	String	Group configuration name, length 64
deviceGroupId	String	Group ID
deviceType	Integer	Device Type 1: Phone Device

modelId	String	Model ID
Description	String	Description, length 256

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/listGroupConfigs HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 10,
  "autoCount": true
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json;charset=UTF-8
```

```
{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "8faa39e34929425f85b4cd9925a2bbcb",
    "name": "group config2",
```

```
"deviceId":"1185861ed00840ea99a7b07aa0f28f88",
"deviceType":1,
"modelId":"db249ca8f83f425baeda09214288d0a9",
"Description":"test2"
}]
}
```

4.3.6 Push Group Configuration

Request Method

POST

Request URL

/v2/dm/groupConfigs/{configId}/push

Path parameter

parameter	Data Type	Required	Description
configId	String	Yes	The configuration ID.

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/groupConfigs/8faa39e34929425f85b4cd9925a2bbcb/push HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 204
```

4.4 Conference Room Equipment Configuration Management

4.4.1 Save Device Configuration

Request Method

PUT

Request URL

/v2/dm/rooms/deviceConfigs

Body parameter

Parameter	Data Type	Required	Description
deviceId	String	Yes	Device ID
content	String	Yes	cfg file content

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	The device configuration ID.

Example Request

```

httpPUT /v2/dm/rooms/deviceConfigs HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "deviceId": "8d07a56207074d26b61026099625b9e2",
  "content": "lang.wui=English\nlang.gui=English"
}

```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "id": "d916a46b4557464c87c278cb37477bef"
}
```

4.4.2 Device Configuration Details

Request Method

GET

Request URL

/v2/dm/rooms/deviceConfigs/{configId}

Path parameter

Parameter	Data Type	Required	Description
configId	String	Yes	The device configuration ID.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	The device configuration ID.
content	String	Configuration ID

Example Request

```
httpGET /v2/dm/rooms/deviceConfigs/e33b8f25247e45de84dd4c74503b241a HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "8d07a56207074d26b61026099625b9e2",
  "content": "#!version:1.0.0.1\naccount.1.codec.g722.enable=1"
}
```

4.4.3 Push Device Configuration

Request Method

POST

Request URL

/v2/dm/rooms/deviceConfigs/{configId}/push

Path parameter

parameter	Data Type	Required	Description
configId	String	Yes	The configuration ID.

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/rooms/deviceConfigs/e33b8f25247e45de84dd4c74503b241a/push
HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 204
```

4.4 Conference Room Equipment Configuration Management

4.4.1 Save Device Configuration

Request Method

PUT

Request URL

/v2/dm/rooms/deviceConfigs

Body parameter

Parameter	Data Type	Required	Description
deviceId	String	Yes	Device ID
content	String	Yes	cfg file content

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	The device configuration ID.

Example Request

```
httpPUT /v2/dm/rooms/deviceConfigs HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "deviceId": "8d07a56207074d26b61026099625b9e2",
  "content": "lang.wui=English\nlang.gui=English"
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "id": "d916a46b4557464c87c278cb37477bef"
}
```

4.4.2 Device Configuration Details

Request Method

GET

Request URL

/v2/dm/rooms/deviceConfigs/{configId}

Path parameter

Parameter	Data Type	Required	Description
configId	String	Yes	The device configuration ID.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception

401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	The device configuration ID.
content	String	Configuration ID

Example Request

```
httpGET /v2/dm/rooms/deviceConfigs/e33b8f25247e45de84dd4c74503b241a HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "8d07a56207074d26b61026099625b9e2",
  "content": "#!version:1.0.0.1\naccount.1.codec.g722.enable=1"
}
```

4.4.3 Push Device Configuration

Request Method

POST

Request URL

/v2/dm/rooms/deviceConfigs/{configId}/push

Path parameter

parameter	Data Type	Required	Description
configId	String	Yes	The configuration ID.

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPOST /v2/dm/rooms/deviceConfigs/e33b8f25247e45de84dd4c74503b241a/push
HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 204
```

5.RPS management

5.1 RPS Device Management

5.1.1 Add Device

Request Method

POST

Request URL

/v2/rps/devices

Body parameter

Parameter	Data Type	Required	Description
mac	String	Yes	Device MAC, minimum length 12, maximum length 17
sn	String	Yes	SN code, maximum length 128
serverId	String	No	Server ID
uniqueServe	String	No	Server address, maximum length 256

rUrl			
authName	String	No	Authentication username, maximum length 128
password	String	No	Authentication password, maximum length 128
remark	String	No	Note, maximum length 256

HTTP status code

Code	Description
201	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
id	String	The device ID.
mac	String	The device MAC address.
sn	String	The group ID.
serverId	String	The server ID.
uniqueServerUrl	String	The server address.
authName	String	The username for authentication.
remark	String	The remark.

Example Request

```
httpPOST /v2/rps/devices HTTP/1.1
Host: api.ymcs.yealink.com
```

Content-Type: application/json

```
{
  "mac": "001565bbb1a9",
  "sn": "1106312113402006",
  "serverId": "ba7c7b13ed114a5fa6f12063ea9dff41",
  "remark": "SeakeerDevice",
  "authName": "Seakeer",
  "password": "654321"
}
```

Example Response

```
httpHTTP/1.1 201 Created
Content-Type: application/json;charset=UTF-8

{
  "id": "8d07a56207074d26b61026099625b9e2",
  "mac": "001565bbb1a9",
  "sn": "1106312113402006",
  "serverId": "ba7c7b13ed114a5fa6f12063ea9dff41",
  "remark": "SeakeerDevice",
  "authName": "Seakeer",
}
```

5.1.2 Batch Add Devices

Note: A maximum of 100 items at a time.

Request Method

POST

Request URL

/v2/rps/addDevices

Body parameter

Parameter	Data Type	Required	Description
mac	String	Yes	Device MAC, minimum length 12, maximum length 17
sn	String	Yes	SN code, maximum length 128
serverId	String	No	Server ID
uniqueServerUrl	String	No	Server address, maximum length 256
authName	String	No	Authentication username, maximum length 128
password	String	No	Authentication password, maximum length 128
remark	String	No	Note, maximum length 256

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	The total number of batch additions.
successCount	Integer	The total number of successful additions.
failureCount	Integer	The total number of failures.

errors	AddError[]	Error message.
--------	------------	----------------

AddError object

parameter	Data Type	Description
mac	String	The device MAC address.
sn	String	The device SN address.
errorInfo	String	Error message.

Example Request

```
httpPOST /v2/rps/addDevices HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

[{
  "mac":"3a1565bbb1a9",
  "sn":"1106312113402006",
  "serverId":"ba7c7b13ed114a5fa6f12063ea9dff41",
  "remark":"SeakeerDevice",
  "authName":"Seakeer",
  "password":"654321"
}]
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 1,
  "successCount": 0,
  "failureCount": 1,
  "errors": [{
```

```
"mac":"3a1565bbb1a9",
"sn":"1106312113402006",
"errorInfo":"Invalid MAC"
}]
}
```

5.1.3 Add device without SN

Note: A maximum of 100 items at a time.

Request Method

POST

Request URL

/v2/rps/addDevicesByMac

Body parameter

Parameter	Data Type	Required	Description
mac	String	Yes	Device MAC, minimum length 12, maximum length 17
serverId	String	No	Server ID
uniqueServerUrl	String	No	Server address, maximum length 256
authName	String	No	Authentication username, maximum length 128
password	String	No	Authentication password, maximum length 128
remark	String	No	Note, maximum length 256

HTTP status code

Code	Description
200	Operation successful, see response parameters.

400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	The total number of batch additions.
successCount	Integer	The total number of successful additions.
failureCount	Integer	The total number of failures.
errors	AddError[]	Error message.

AddError object

parameter	Data Type	Description
mac	String	The device MAC address.
sn	String	The device SN address.
errorInfo	String	Error message.

Example Request

```

httpPOST /v2/rps/addDevicesByMac HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

[{
  "mac":"3a1565bbb1a9",
  "serverId":"ba7c7b13ed114a5fa6f12063ea9dff41",
  "remark":"SeakeerDevice",
  "authName":"Seakeer",
  "password":"654321"
}]

```

```
}}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 1,
  "successCount": 0,
  "failureCount": 1,
  "errors": [{
    "mac": "3a1565bbb1a9",
    "sn": "1106312113402006",
    "errorInfo": "Invalid MAC"
  }]
}
```

5.1.4 Edit Device

Request Method

PATCH

Request URL

/v2/rps/devices/{deviceId}

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Parameter	Data Type	Required	Description
serverId	String	No	Server ID
uniqueServerUrl	String	No	Address of server, maximum length 256

authName	String	No	Username for authentication, maximum length 128
password	String	No	Password for authentication, maximum length 128
remark	String	No	Note, maximum length 256

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPATCH /v2/rps/devices/8d07a56207074d26b61026099625b9e2 HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "serverId":"ba7c7b13ed114a5fa6f12063ea9dff41",
  "remark":"SeakeerDevice",
  "authName":"Seakeer",
  "password":"654321"
}
```

Example Response

```
httpHTTP/1.1 204
```

5.1.5 Device Paging List

Request Method

POST

Request URL

/v2/rps/listDevices

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and set it to false for queries on other pages.
filter	Filter	No	search parameters

Filter object definition

Parameter	Data Type	Required	Description
mac	String	No	Device MAC, maximum length 17, supports with : or -, such as 00:15:65:bb:b1:a1

HTTP status code

Code	Description
------	-------------

200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total quantity
data	Device[]	Device information array

Device object definition

parameter	Data Type	Description
id	String	The device ID.
mac	String	The device MAC address.
sn	String	The device serial number.
serverId	String	The server ID.
serverName	String	The server name.
serverUrl	String	The server address.
uniqueServerUrl	String	The address of the unique server.
ipAddress	String	The IP address.
remark	String	The remark.
dateRegiste	Long	The binding time.

red		
lastConnect ed	Long	The last time when the device is connected to the platform.

Example Request

```
httpPOST /v2/rps/listDevices HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{  
  "skip": 0,  
  "limit": 20,  
  "autoCount": true,  
  "filter": {  
    "mac": "001565bbb1a9"  
  }  
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json; charset=UTF-8
```

```
{  
  "skip": 0,  
  "limit": 10,  
  "total": 1,  
  "data": [{  
    "id": "8d07a56207074d26b61026099625b9e2",  
    "mac": "001565bbb1a9",  
    "sn": "1106312113402006",  
    "serverId": "b25ac1016caf416a90d5ca1ee438153a",  
    "serverName": "SeakeerServerTest",  
    "serverUrl": "https://dm30-devtest.yealinkclient.com/dm.cfg",  
  }  
}
```



```
"ipAddress": null,
"dateRegistered": 1542680124026,
"lastConnected": null,
"remark": "edit"

}]
}
```

5.1.6 Device Details

Request Method

GET

Request URL

/v2/rps/devices/{deviceId}

PATH parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Response parameters

parameter	Data Type	Description
id	String	The device ID.
mac	String	The device MAC address.
sn	String	The device serial number.
serverId	String	The server ID.
serverName	String	The server name.
serverUrl	String	The server address.
uniqueServerUrl	String	The address of the unique server.
ipAddress	String	The IP address.

remark	String	The remark.
dateRegistered	Long	The binding time.
lastConnected	Long	The last time when the device is connected to the platform.
authName	String	The username for authentication.

Example Request

```
httpGET /v2/rps/devices/8d07a56207074d26b61026099625b9e2 HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "8d07a56207074d26b61026099625b9e2",
  "mac": "001565bbb1a9",
  "sn": "1106312113402006",
  "serverId": "b25ac1016caf416a90d5ca1ee438153a",
  "serverName": "SeakeerServerTest",
  "serverUrl": "https://dm30-devtest.yealinkclient.com/dm.cfg",
  "ipAddress": null,
  "dateRegistered": 1542680124026,
  "lastConnected": null,
  "remark": "edit",
  "authName": "edit",
}
```

5.1.7 Delete Device

Request Method

POST

Request URL

/v2/rps/delDevices

Body parameter

Parameter	Data Type	Required	Description
deviceIds	String	Yes	Device ID list, maximum length 200

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/rps/delDevices HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "deviceIdType": "mac",
  "deviceIds": ["001565bbb1a9", "001567"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
```

```
Content-Type: application/json;charset=UTF-8
```

```
{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "001567",
    "msg": "Invalid MAC"
  }]
}
```

5.2 RPS server management

5.2.1 Add Server

Request Method

POST

Request URL

/v2/rps/servers

Body parameters:

Request parameters	Parameter Type	Require	Description
--------------------	----------------	---------	-------------

		d	
serverName	String	Yes	The server name, with no more than 20 characters.
url	String	Yes	The address of server, with no more than 512 characters.
authName	String	No	The username for authentication, with no more than 32 characters.
password	String	No	The password for authentication, with no more than 32 characters.
certificateUrl	String	No	The certificate URL.
serverCertificateUrl	String	No	The URL of the server certificate.
serverCertificateEnable	Boolean	No	Set whether to enable the custom certificate or not.
serverCertificateEnableWithSHA256	Boolean	No	Enable this when the certificate type is non-SHA256.

HTTP status code

Code	Description
201	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
-----------	-----------	-------------

id	String	The server ID.
serverName	String	The server name.
url	String	The server address.
authName	String	The username for authentication.

Example Request

```
httpPOST /v2/rps/servers HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "serverName": "TestServer",
  "url": "https://https://www.yealink.com",
  "serverCertificateEnable": true,
  "serverCertificateEnableWithSHA256": true,
  "authName": "Seakeer",
  "password": "123456",
  "certificateUrl": "https://www.yealink.com/certificate"
}
```

Example Response

```
httpHTTP/1.1 201 Created
Content-Type: application/json;charset=UTF-8

{
  "id": "b38dea23a4e6458188799833b72d950f",
  "serverName": "TestServer",
  "url": "https://www.yealink.com",
  "authName": "Seakeer"
}
```

5.2.2 Edit Server

Request Method

PATCH

Request URL

/v2/rps/servers/{serverId}

PATH parameter

parameter	Data Type	Required	Description
serverId	String	Yes	The server ID.

Body parameters:

Request parameters	Parameter Type	Required	Description
serverName	String	Yes	The server name, with no more than 20 characters.
url	String	Yes	The address of server, with no more than 512 characters.
authName	String	No	The username for authentication, with no more than 32 characters.
password	String	No	The password for authentication, with no more than 32 characters.
certificateUrl	String	No	The certificate URL.
serverCertificateUrl	String	No	The URL of the server certificate.
serverCertificateEnable	Boolean	No	Set whether to enable the custom certificate or not.
serverCertificateEnableWithSHA256	Boolean	No	Enable this when the certificate type is non-SHA256.

6			
---	--	--	--

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPATCH /v2/rps/servers/b38dea23a4e6458188799833b72d950f HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "serverName":"YealinkServer",
  "url":"http://www.yealink.com",
  "authName":"Yealink",
  "password":"Yealink",
  "certificateUrl":"http://cer/cer.cer",
  "serverCertificateEnable": true,
  "serverCertificateEnableWithSHA256": true
}
```

Example Response

```
httpHTTP/1.1 204
```

5.2.3 Delete Server

Request Method

POST

Request URL

/v2/rps/delServers

Body parameter

Parameter	Data Type	Required	Description
serverIds	String[]	Yes	Server ID list, maximum length 200

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/rps/delServers HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "serverIds":["b38dea23a4e6458188799833b72d950f","1234"]
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
  "successCount": 1,
  "failureCount": 1,
  "errors": [{
    "field": "1234",
    "msg": "The resource does not exist or has been deleted"
  }]
}
```

5.2.4 Server Details

Request Method

GET

Request URL

/v2/rps/servers/{serverId}

Path parameter

parameter	Data Type	Required	Description
serverId	String	Yes	The server ID.

Response parameters

parameter	Data Type	Description
id	String	The server ID.
serverName	String	The server name.
url	String	The server address.

authName	String	The username for authentication.
certificateUrl	String	The certificate URL.
serverCertificateUrl	String	The URL of the server certificate.
serverCertificateEnable	Boolean	Set whether to enable the custom certificate or not.
serverCertificateEnableWithSHA256	Boolean	Enable this when the certificate type is non-SHA256.

Example Request

```
httpGET /v2/rps/servers/b38dea23a4e6458188799833b72d950f HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "b38dea23a4e6458188799833b72d950f",
  "serverName": "TestServer",
  "url": "https://www.yealink.com",
  "authName": "Seakeer",
  "certificateUrl": "http://cer/cer.cer",
  "serverCertificateEnable": true,
  "serverCertificateEnableWithSHA256": true
}
```

5.2.5 Server Pagination List

Request Method

POST

Request URL

/v2/rps/listServers

Body parameter

Parameter	Data Type	Required	Description
searchKey	String	No	Search keywords, support server name, URL search
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to return the total number of records
filter	Filter	No	search parameters

Filter object definition

Parameter	Data Type	Required	Description
name	String	No	The server name.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total data volume
data	Server[]	Server information array

Server object definition

parameter	Data Type	Description
id	String	The server ID.
serverName	String	The server name.
url	String	The server address.
authName	String	The username for authentication.

Example Request

```
httpPOST /v2/rps/listServers HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 20,
  "autoCount": true,
  "filter": {
    "name": "test"
  }
}
```

Example Response

```
httpHTTP/1.1 200
```

Content-Type: application/json;charset=UTF-8

```
{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "b38dea23a4e6458188799833b72d950f",
    "serverName": "test",
    "url": "https://www.yealink.com",
    "authName": "Seakeer"
  }]
}
```

6.Call Quality Management

6.1 Pagination List

Request Method

POST

Request URL

/v2/dm/listQoes

Body parameter

ParameterName	Data Type	Required	Parameter Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
totalCount	Boolean	No	Whether to return the total number of records
filter	Filter	No	search parameters

Filter object definition

Parameter	Data Type	Required	Description
mac	String	No	Device MAC, maximum length 17, supports with : or -, such as 00:15:65:bb:b1:a9
siteIds	List	false	List of site IDs to query
startTime	Long	false	Start time to query
endTime	Long	false	End time to query

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total data volume
data	QoeInfo[]	QoeInfo information array

QoeInfo object definition

Name	Type	Description
id	String	QOE record id
deviceName	String	Device Name
mac	String	MAC
modelName	String	Device Model
firmwareVersion	String	Firmware version

username	String	Account \u2014 Username
displayName	String	Account \u2014 Display Name
siteName	String	Affiliated site
quality	String	Call Quality Good, Poor, Bad
startTime	long	The call start timestamp.
endTime	long	The call end timestamp.
callerURI	String	Caller URL, fromURI
calleeURI	String	Called URL, toURI
duration	long	Call duration (ms)

Example Request

```
httpPOST /v2/dm/listQoes HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "skip":0,
  "limit":10,
  "filter":{
    "startTime":1700876148000,
    "endTime":1703468148329,
    "siteIds":["126b25122362470daca91ae8ad038a27"]
  }
}
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
```



```
{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "a26b25122362470daca91ae8ad038a27",
    "deviceName": null,
    "mac": "805ec091cfc6",
    "modelName": "UNKNOWN",
    "firmwareVersion": "108.86.0.57",
    "username": "8195",
    "displayName": "8195",
    "siteName": "global测试-baiyf",
    "quality": "Good",
    "startTime": 1660542991000,
    "endTime": 1660543218000,
    "callerURI": "\"8195\" <sip:8195@ume.yealink.com:5061>",
    "calleeURI": "<sip:77031@ume.yealink.com>",
    "duration": 227000
  }]
}
```

6.2 QOE details

Request Method

GET

Request URL

/v2/dm/qoe/{qoeld}

Path parameter

Parameter	Data Type	Required	Description
qoeld	String	Yes	QOE记录 ID

Response parameters

Name	Type	Description

id	String	QOE record ID.
sessionId	String	The meeting ID.
reportTime	long	The reporting time of the call data.
deviceName	String	The device name.
mac	String	MAC
modelName	String	The device model.
firmwareVersion	String	The firmware version.
ip	String	The device IP address.
deviceType	String	The device type: audio, video.
username	String	Account-username.
displayName	String	Account-display name.
serverType	String	The account type.
siteName	String	The belonging site.
quality	String	The call quality, including Good, Poor, and Bad.

	ing	
startTime	long	The call start timestamp.
endTime	long	The call end timestamp.
callId	String	The call ID.
callerURI	String	Calling URL, fromURI.
calleeURI	String	Called URL, toURI.
isCaller	boolean	Check whether the user is the caller of the querying call record or not.
callType	String	The call type.
confURI	String	Configure the URL.
time	long	The current time.
event	String	The events.
duration	long	The call duration (ms).
inJitterAvg	int	Input the average jitter.
inJitterMax	int	Input the maximum jitter.
inLossRateAvg	double	Input the average loss rate.

	ble	
inLossRateMax	dou ble	Input the maximum loss rate.
inLossTotal	int	Input the missing value.
inDelayAvg	int	Input the average delay.
inDelayMax	int	Input the maximum delay.
inListenMosAvg	dou ble	Input the average value for the call answering quality.
inListenMosMin	dou ble	Input the minimum value for the call answering quality.
inConversationalMosAvg	dou ble	Input the average value for the call quality rating.
inConversationalMosMin	dou ble	Input the minimum value for the call quality rating.
inReceivePacketTotal	int	The total number of input packages.
inPayloadName	Str ing	Input the load name.
outJitterAvg	int	Output the average jitter.
outJitterMax	int	Output the maximum jitter.
outLossRateAvg	dou ble	Output the average loss rate.
outLossRateMax	dou ble	Output the maximum loss rate.
outLossTotal	int	Output the maximum loss.
outDelayAvg	int	Output the average delay.

outDelayMax	int	Output maximum delay.
outListenMosAvg	double	Output the average value for the call answering quality.
outListenMosMin	double	Output the minimum value for the call answering quality.
outConversationalMosAvg	double	Output the average value for the call quality.
outConversationalMosMin	double	Output the minimum value for the call quality.
outReceivePacketTotal	int	The total number of output packages.
outPayloadName	String	Output the load name.

Example Request

```
httpGET /v2/dm/qoe/c5a56e74bab546c8bc3cccf2e82aeb0c HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8
{
  "id": "a26b25122362470daca91ae8ad038a27",
  "sessionId": "805ec091cfc6-0_934910374@10.50.144.6",
  "reportTime": 1660543237204,
  "deviceName": null,
  "mac": "805ec091cfc6",
  "modelName": "UNKNOWN",
  "firmwareVersion": "108.86.0.57",
```

```
"ip": "10.50.144.6",
"deviceType": "UNKNOWN",
"username": "8195",
"displayName": "8195",
"serverType": "SIP",
"siteName": "global测试-baiyf",
"quality": "Good",
"startTime": 1660542991000,
"endTime": 1660543218000,
"callId": "0_934910374@10.50.144.6",
"callerURI": "\"8195\" <sip:8195@ume.yealink.com:5061>",
"calleeURI": "<sip:77031@ume.yealink.com>",
"remoteIP": null,
"callType": "p2p",
"confURI": null,
"time": 1660543218000,
"event": "0",
"duration": 227000,
"inJitterAvg": 3,
"inJitterMax": 3,
"inLossRateAvg": 0.0,
"inLossRateMax": 0.0,
"inDelayAvg": 5,
"inDelayMax": 5,
"inListenMosAvg": 4.0,
"inListenMosMin": 4.0,
"inConversationalMosAvg": 4.0,
"inConversationalMosMin": 4.0,
"inReceivePacketTotal": 11299,
"inPayloadName": "G722",
"outJitterAvg": 3,
"outJitterMax": 4,
"outLossRateAvg": 0.0,
"outLossRateMax": 0.0,
```

```
"outLossTotal": 0,
"outDelayAvg": 5,
"outDelayMax": 5,
"outListenMosAvg": 4.4,
"outListenMosMin": 4.0,
"outConversationalMosAvg": 4.4,
"outConversationalMosMin": 4.4,
"outReceivePacketTotal": 11333,
"outPayloadName": "G722",

}
```

7.Statistics

7.1 Total number of devices

Request Method

GET

Request URL

/v2/dm/statistics/deviceCount

Query parameter

Parameter Name	Data Type	Required	Parameter Description
deviceStatus	Integer	false	Device status, 1: online, 0: offline, -1: not reported, if this parameter is not passed, get the total count.
deviceType	Integer	false	Device Type

Response parameters

Name	Type	Description
total	Long	Device quantity.

Example Request

```
httpGET /v2/dm/statistics/deviceCount?deviceStatus=1 HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "total":100
}
```

7.2 QOE statistics

Request Method

POST

Request URL

/v2/dm/statistics/qoe

Body parameter

ParameterName	Data Type	Required	Parameter Description
siteIds	String []	false	List of site IDs to be counted
startTime	Long	false	The start time to be counted; this value must be used together with endTime, otherwise it will not take effect.

endTime	Long	false	The end time to be counted must be used together with startTime; otherwise, it will not take effect.
---------	------	-------	--

Response parameters

Name	Type	Description
total	long	The total number of calls.
badPercentage	double	The percentage of poor quality.
badTotal	long	Poor call quality.
goodPercentage	double	The percentage of good quality.
goodTotal	long	Good call quality.
meetingPercentage	double	The percentage of total meetings.
meetingTotal	long	The total number of meetings.
p2pPercentage	double	The percentage of p2p calls.
p2pTotal	long	The total number of p2p calls.
poorPercentage	double	The percentage of average quality.
poorTotal	long	General call quality.
voiceMailPercentage	double	The total number of voice mails.
voiceMailTotal	long	The total number of voice mails.

Example Request

```
httpPOST /v2/dm/statistics/qoe HTTP/1.1
```

Host: api.ymcs.yealink.com

Content-Type: application/json

```
{
  "startTime":1700876148000,
  "endTime":1703468148329,
  "siteIds":["126b25122362470daca91ae8ad038a27"]
}
```

Example Response

httpHTTP/1.1 200

Content-Type: application/json;charset=UTF-8

```
{

  "total":25,
  "goodTotal": 24,
  "poorTotal": 1,
  "badTotal": 0,
  "goodPercentage": 0.96,
  "poorPercentage": 0.04,
  "badPercentage": 0.0,
  "p2pTotal": 25,
  "meetingTotal": 0,
  "voiceMailTotal": 0,
  "p2pPercentage": 1.0,
  "meetingPercentage": 0.0,
  "voiceMailPercentage": 0.0
}
```

8.Model Management

8.1 Model List

Request Method

GET

Request URL

/v2/dm/models

Query parameter

Parameter	Data Type	Required	Description
deviceType	Integer	Yes	Device Type 1: Phone Device 3: Room Device

Response parameters

Parameter	Data Type	Description
data	Model[]	The model information array.

Model object definition

Parameter	Data Type	Description
id	String	The model ID.
name	String	The model name.

Example Request

```
httpGET /v2/dm/models?deviceType=1 HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

[{"id": "61e659e4d78d42ebada88ef1eb751b64",
"name": "SIP-T54S",
}]
```

```
"id":"02c47b640c3046dc86853c9ccfd37dd0",
"name":"SIP-T31P"
}]
```

9.Site Management

9.1 Add Site

Request Method

POST

Request URL

/v2/dm/sites

Body parameter

Parameter	Data Type	Required	Description
name	String	Yes	Site name, maximum length 128
parentId	String	Yes	Parent Site ID
Description	String	No	Description, maximum length 1024

HTTP status code

Code	Description
201	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
id	String	Site ID
name	String	Site Name

parentId	String	Parent Site ID
siteNumber	String	Site number

Example Request

```
httpPOST /v2/dm/sites HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "name":"site1",
  "parentId":"d3a6ff43f2154b868ba1157eb3677c1e",
  "Description":"site1"
}
```

Example Response

```
httpHTTP/1.1 201 Created
Content-Type: application/json;charset=UTF-8

{
  "id": "0006d62003684754b11c09c5d94ea687",
  "name":"site1",
  "parentId":"d3a6ff43f2154b868ba1157eb3677c1e",
  "siteNumber":"ofpb5gvg"
}
```

9.2 Edit Site

Request Method

PATCH

Request URL

/v2/dm/sites/{siteId}

Path parameter

parameter	Data Type	Required	Description
-----------	-----------	----------	-------------

siteld	String	Yes	Site ID
--------	--------	-----	---------

Body parameter

Parameter	Data Type	Required	Description
name	String	No	Site Name
parentId	String	No	Parent Site ID
Description	String	No	Description, maximum length 1024.

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPATCH /v2/dm/sites/0006d62003684754b11c09c5d94ea687 HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "name":"site11",
  "Description":"site11",
  "parentId":"d3a6ff43f2154b868ba1157eb3677c1e"
}
```

Example Response

```
httpHTTP/1.1 204
```

9.3 Delete Site

Request Method

DELETE

Request URL

/v2/dm/sites/{siteId}

PATH parameter

parameter	Data Type	Required	Description
siteId	String	Yes	Site ID

Example Request

```
httpDELETE /v2/dm/sites/e33b8f25247e45de84dd4c74503b241a HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 204
```

9.4 Site List

Request Method

POST

Request URL

/v2/dm/listSites

Body parameter

ParameterName	Data Type	Required	Parameter Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to return the total number of records

filter	Filter	No	search parameters
--------	--------	----	-------------------

Filter object definition

Parameter	Data Type	Required	Description
name	String	No	Site Name

Response parameters

Parameter	Data Type	Description
data	Site[]	Site information array

Site object definition

Parameter	Data Type	Description
id	String	site id
parentId	String	Parent Site ID
name	String	Site Name
level	Integer	Site level, 0 indicates the root site.
sequence	Integer	“Serial number of the site in the hierarchy”

Example Request

```
httpPOST /v2/dm/listSites HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip":0,
  "limit":10,
  "filter":{
    "name":"test"
  }
}
```



```
}
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "1e876bc0fca24b728eeb3e52bbfeb5e",
    "parentId": "23b63cac1f6d4134b5459a4face901c3",
    "name": "test",
    "level": 2,
    "sequence": 1,

  ]
}
```

9.5 site details

Request Method

GET

Request URL

/v2/dm/sites/{siteId}

Path parameter

parameter	Data Type	Required	Description
siteId	String	Yes	Site ID

Response parameters

parameter	Data Type	Description
-----------	-----------	-------------

id	String	Site ID
parentId	String	Parent Site ID
name	String	Site Name
siteNumber	String	Site number
Description	String	Description information

Example Request

```
httpGET /v2/dm/sites/288ff0d0bd4948b0a95785ba7bc72a8e HTTP/1.1
Host: api.ymcs.yealink.com
```

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "288ff0d0bd4948b0a95785ba7bc72a8e",
  "name": "site1",
  "parentId": "d3a6ff43f2154b868ba1157eb3677c1e",
  "siteNumber": "ofpb5gvg",
  "Description": "site1"
}
```

10.Resource Management

10.1 Firmware Management

10.1.1 Firmware List

Request Method

POST

Request URL

/v2/dm/listFirmwares

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.
filter	Filter	No	search parameters

Filter object definition

Parameter	Data Type	Required	Description
modelId	String	No	Firmware Model ID

firmwareType	Integer	No	Firmware Type 0: Master Device 1: Accessory
deviceType	Integer	No	Device Type 1: Phone Device 3: Room Device

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total quantity
data	Firmware[]	Firmware information array

Firmware object definition

Parameter	Data Type	Description
id	String	firmware id
name	String	Firmware Name
deviceType	Integer	Device Type 1: Phone Device 3: Room Device
firmwareType	Integer	Firmware Type 0: Master Device 1: Accessory

version	String	Firmware version number
---------	--------	-------------------------

Example Request

```
httpPOST /v2/dm/listFirmwares HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 10,
  "autoCount": true,
  "filter": {
    "firmwareType": 0,
    "deviceType": 1
  }
}
```

Example Response

```
httpHTTP/1.1 200
```

```
Content-Type: application/json; charset=UTF-8
```

```
{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [
    {
      "id": "01d7ae1897f7418dad2d26609329be38",
      "name": "t54s firmware",
      "deviceType": 1,
      "firmwareType": 0,
      "version": "108.85.3.19",
    }
  ]
}
```

10.1.2 Firmware Details

Request Method

GET

Request URL

/v2/dm/firmwares/{firmwareId}

Path parameter

parameter	Data Type	Required	Description
firmwareId	String	Yes	firmware ID

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
id	String	firmware id
name	String	Firmware Name
filename	String	Firmware file name
deviceType	Integer	Device Type 1: Phone Device 3: Room Device
firmwareType	Integer	Firmware Type 0: Master Device 1: Accessory
downloadUrl	String	Download address
version	String	Firmware version number
supportMode	String[]	Supported model list

ls		
siteId	String	Site ID
Description	String	Firmware Description

Example Request

```
httpGET /v2/dm/firmwares/01d7ae1897f7418dad2d26609329be38 HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "id": "01d7ae1897f7418dad2d26609329be38",
  "name": "t54s firmware",
  "filename": "t54s.rom",
  "deviceType": 1,
  "firmwareType": 0,
  "downloadUrl": "https://resources.yiot.yealink.com/yiot-manager/api/v1/terminal/
resource/download/69847884d3be4327b86bfd0513c4572/1/
T46S(T48S,T42S,T41S)-66.86.0.15.rom",
  "version": "108.85.3.19",
  "supportModels": ["SIP-T54S"],
  "siteId": "ee06cddee78948a298fc12565a35cdbe"
}
```

10.1.3 Official Firmware List

Request Method

POST

Request URL

/v2/dm/listOfficalFirmwares

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.
filter	Filter	Yes	search parameters

Filter object definition

Parameter	Data Type	Required	Description
modelId	String	Yes	Firmware model ID

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	offset

limit	Long	The maximum returned number.
total	Long	Total quantity
data	Firmware[]	Firmware information array

Firmware object definition

Parameter	Data Type	Description
id	String	Firmware ID
name	String	Firmware name
version	String	Firmware version number

Example Request

```

httpPOST /v2/dm/listOfficalFirmwares HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "skip": 0,
  "limit": 10,
  "autoCount": true,
  "filter": {
    "modelId": "23a5da55f3534f84abc7956a9f183330"
  }
}
```

Example Response

```

httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "skip": 0,
  "limit": 10,
  "total": 1,
```

```
"data":[{
  "id": "01d7ae1897f7418dad2d26609329be38",
  "name": "t54s firmware",
  "version": "108.85.3.19"
}]
}
```

10.1.4 Push Firmware

Request Method

POST

Request URL

/v2/dm/firmwares/{firmwareId}/push

PATH parameter

parameter	Data Type	Required	Description
firmwareId	String	Yes	Firmware ID

Body parameter

Parameter	Data Type	Required	Description
deviceIds	String[]	Yes	Device ID list, maximum length 200
deviceType	Integer	Yes	Device Type 1: Phone Device 3: Room Device

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```

httpPOST /v2/dm/firmwares/09972370b360461d868e3e02f9cdec77/push HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "deviceIds":
  ["0006572538f74e8683716cf961caa95b","00099642675e4d4bb5e91fd9ae5ce585"],
  "deviceType":1
}
```

Example Response

```

httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "total": 2,
```

```
"successCount":1,
"failureCount":1,
"errors":[{"
"field":"00099642675e4d4bb5e91fd9ae5ce585",
"msg":"The resource does not exist or has been deleted"
}]
}
```

10.1.5 Push Official Firmware

Request Method

POST

Request URL

/v2/dm/officalFirmwares/{officalFirmwareId}/push

PATH parameter

parameter	Data Type	Required	Description
officalFirmwareId	String	Yes	Official firmware ID

Body parameter

Parameter	Data Type	Required	Description
deviceIds	String[]	Yes	Device ID list, maximum length 200
deviceType	Integer	Yes	Device Type 1: Phone Device 3: Room Device

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed

500	Server exception
-----	------------------

Response parameters

Parameter	Data Type	Description
total	Integer	Delete total count
successCount	Integer	Total number of successful deletions.
failureCount	Integer	The total number of failures.
errors	OpError[]	Error message.

OpError object

Parameter	Data Type	Description
field	String	Error field
msg	String	Error message.

Example Request

```
httpPOST /v2/dm/officalFirmwares/09972370b360461d868e3e02f9cdec77/push HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "deviceIds":
  ["0006572538f74e8683716cf961caa95b","00099642675e4d4bb5e91fd9ae5ce585"],
  "deviceType":1
}
```

Example Response

```
httpHTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
```

```
"total": 2,
"successCount":1,
"failureCount":1,
"errors":[{"
"field":"00099642675e4d4bb5e91fd9ae5ce585",
"msg":"The resource does not exist or has been deleted"
}]
}
```

11.Device Diagnosis

User Manual: After successfully calling the diagnostic interface, obtain the diagnosisId from the response, and periodically poll (recommended every 10 seconds) to check the diagnostic status. If the status response is successful (status=success), you can obtain the download URL for the diagnostic file from the response and retrieve the file using the URL.

11.1 Get the list of network port types

Request Method

GET

Request URL

/v2/dm/devices/{deviceId}/networkInterfaces

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
data	String[]	Type list

Example Request

```
httpGET /v2/dm/devices/8d07a56207074d26b61026099625b9e2/networkInterfaces
HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

["wan","wlan0","ext0"]
```

11.2 Start packet capture

Request Method

PUT

Request URL

/v2/dm/devices/{deviceId}/startPacketCapture

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Parameter	Data Type	Required	Description

network interface	String	Yes	Network port, the specific value is obtained from the network interface type list, generally includes wan (Wide Area Network port), ext0 (external telephone line port), wlan0 (Wireless Local Area Network port), default is wan.
type	Integer	No	Packet capture type, 0 – Custom, 1 – SIP or H245 or H225, 2 – RTP, 3 – Not RTP
filter	String	No	Capture filtering information, this value is only needed when the capture type = 0.
duration	Integer	Yes	Capture maximum duration, unit seconds, range: 180~3600

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
diagnosisId	String	Diagnosis Session ID

Example Request

```

httpPUT /v2/dm/devices/8d07a56207074d26b61026099625b9e2/startPacketCapture
HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "networkInterface": "wan",
  "type": 0,
  "duration": 180
}
```

Example Response

```

httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "diagnosisId": "0006d62003684754b11c09c5d94ea687",
}
```

11.3 End Capture

Request Method

PUT

Request URL

/v2/dm/devices/{deviceId}/stopPacketCapture

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

parameter	Data Type	Required	Description
diagnosisId	String	Yes	Diagnosis ID

HTTP status code

Code	Description
204	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPUT /v2/dm/devices/8d07a56207074d26b61026099625b9e2/stopPacketCapture
HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "diagnosisId": "0006d62003684754b11c09c5d94ea687"
}
```

Example Response

```
httpHTTP/1.1 204
```

11.4 screenshots

Request Method

PUT

Request URL

/v2/dm/devices/{deviceId}/captureScreen

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
diagnosisId	String	Diagnosis ID

Example Request

```
httpPUT /v2/dm/devices/8d07a56207074d26b61026099625b9e2/captureScreen HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "diagnosisId": "0006d62003684754b11c09c5d94ea687",
}
```

11.5 Export system log

Request Method

PUT

Request URL

/v2/dm/devices/{deviceId}/exportSyslog

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
diagnosisId	String	Diagnosis ID

Example Request

```
httpPUT /v2/dm/devices/8d07a56207074d26b61026099625b9e2/exportSyslog HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "diagnosisId": "0006d62003684754b11c09c5d94ea687",
}
```

11.6 Export Configuration File

Request Method

PUT

Request URL

/v2/dm/devices/{deviceId}/exportConfig

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Example Request

```
httpPUT /v2/dm/devices/8d07a56207074d26b61026099625b9e2/exportConfig HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "diagnosisId": "0006d62003684754b11c09c5d94ea687",
}
```

11.7 Detect Network \u2014 ping

Request Method

PUT

Request URL

/v2/dm/devices/{deviceId}/ping

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Parameter	Data Type	Required	Description
host	String	Yes	IP/domain name to ping
times	Integer	Yes	Number of times, minimum 1, maximum 30

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
diagnosisId	String	Diagnosis ID

Example Request

```
httpPUT /v2/dm/devices/8d07a56207074d26b61026099625b9e2/ping HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
```

```
"host": "www.google.com",
"times": 1
}
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "diagnosisId": "0006d62003684754b11c09c5d94ea687",
}
```

11.8 Network Detection \u2014 traceroute

Request Method

PUT

Request URL

/v2/dm/devices/{deviceId}/traceroute

Path parameter

parameter	Data Type	Required	Description
deviceId	String	Yes	The device ID.

Body parameter

Parameter	Data Type	Required	Description
host	String	Yes	IP/domain name to traceroute
times	Integer	Yes	Number of times, minimum 1, maximum 30

HTTP status code

Code	Description
200	Operation successful, see response parameters.

400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

parameter	Data Type	Description
diagnosisId	String	Diagnosis ID

Example Request

```
httpPUT /v2/dm/devices/8d07a56207074d26b61026099625b9e2/traceroute HTTP/1.1
Host: api.ymcs.yealink.com
Content-Type: application/json

{
  "host":"www.google.com",
  "times":1
}
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "diagnosisId": "0006d62003684754b11c09c5d94ea687",
}
```

11.9 Query Diagnostic Status

Request Method

GET

Request URL

/v2/dm/diagnosis/{diagnosisId}/status

Path parameter

parameter	Data Type	Required	Description
diagnosisId	String	Yes	Diagnosis ID

HTTP status code

Code	Description
200	Operation successful, see response parameters.
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
deviceId	String	Device ID
status	String	Diagnosis Status: inprogress: In Progress success: Success failure: Failure
url	String	File download address, available when status = success.

Example Request

```
httpGET /v2/dm/diagnosis/0006d62003684754b11c09c5d94ea687/status HTTP/1.1
Host: api.ymcs.yealink.com
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8
```

```
{
  "deviceId": "0006d62003684754b11c09c5d94ea687",
  "status": "success",
  "url": "https://yealinkussdev.blob.core.windows.net/single-12/allinone-10.122.131.12-uss%2F40ae7a
sv=2021-06-08&spr=https%2Chttp&se=2024-01-10T02%3A06%3A01Z&sr=b&sp=r&sig=JHco76T2o4i
}
```

12.Alarm Management

12.1 Alarm List

Request Method

POST

Request URL

/v2/dm/listAlarms

Body parameter

Parameter	Data Type	Required	Description
skip	Long	No	Number of skipped records, default is 0
limit	Long	No	Maximum number of records to retrieve, default is 10, maximum is 500.
autoCount	Boolean	No	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.

filter	Filter	No	search parameters
--------	--------	----	-------------------

Filter object definition

Parameter	Data Type	Required	Description
mac	String	No	Device MAC fuzzy search keyword, maximum length 17, supports with : or -, such as 00:15:65:bb:b1:a9
deviceType	Integer	No	Device Type, 1: Phone Device 3: Room Device, leave blank for all

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total quantity
data	Alarm[]	Alarm information array

Alarm object definition

Parameter	Data Type	Description
id	String	Alarm ID
event	String	Alarm Event Name
level	Integer	Alarm Level 1-Minor 2-Major 3-Critical
mac	String	MAC
model	String	model
ip	String	IP
siteName	String	site
status	Integer	Processing status 1-active 2-solve 3-ignore
firstAlarmTime	Long	First alarm time
lastAlarmTime	Long	Last alarm time

Example Request

```
httpPOST /v2/dm/listAlarms HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 10,
  "autoCount": true,
  "filter": {
    "mac": "001565"
  }
}
```

Example Response

```

httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "id": "01d7ae1897f7418dad2d26609329be38",
    "event": "Offline",
    "level": 3,
    "mac": "001565bbb1a9",
    "model": "SIP-T54S",
    "ip": "10.50.198.156",
    "siteName": "test",
    "status": 1,
    "firstAlarmTime": 1737082468768

  ]
}
```

13.Operation Log Management

13.1 Operation Log List

Request Method

POST

Request URL

/v2/dm/listOpLogs

Body parameter

Parameter	Data Type	Required	Description

sk ip	Lo ng	N o	Number of skipped records, default is 0
li mi t	Lo ng	N o	Maximum number of records to retrieve, default is 10, maximum is 500.
au to Co un t	Bo ol ea n	N o	Whether to respond with the total count, it is recommended to set it to true when querying the first page, and pass false for subsequent page turns.
fil te r	Fil te r	Ye s	search parameters

Filter object definition

parameter	Data Type	Required	Description
startTime	Long	No	Start time
endTime	Long	No	End time

HTTP status code

Code	Description
200	Operation successful
400	Client parameter exception
401	Authentication failed
500	Server exception

Response parameters

Parameter	Data Type	Description
-----------	-----------	-------------

skip	Long	offset
limit	Long	The maximum returned number.
total	Long	Total quantity
data	Log[]	Log information array

Log object definition

parameter	Data Type	Description
module	String	Log Module
operationType	String	Log Type
operationObject	String	Log Operation Object
operator	String	Operator
ip	String	IP
createTime	Long	Time
result	String	Result

Example Request

```
httpPOST /v2/dm/listOpLogs HTTP/1.1
```

```
Host: api.ymcs.yealink.com
```

```
Content-Type: application/json
```

```
{
  "skip": 0,
  "limit": 10,
  "autoCount": true,
  "filter": {
    "startTime": 1737099689158,
    "endTime": 1738205662000
  }
}
```

Example Response

```
httpHTTP/1.1 200
Content-Type: application/json;charset=UTF-8

{
  "skip": 0,
  "limit": 10,
  "total": 1,
  "data": [{
    "module": "i18n.yiot.backend.module.device.management",
    "operationType": "i18n.yiot.backend.operation.device.management.restart",
    "operationObject": "805ec0985cd2",
    "operator": "yiot123@yealink.com",
    "ip": "10.122.131.12",
    "createTime": "1736999161388",
    "result": "success"
  }]
}
```