


2.

MariaDB [sukupuu]> desc henkilo;							
Field	Туре	Null	Key	Default	Extra		
Isan_Henkilo_ID Aidin_Henkilo_ID Henkilo_ID Sairaus Sukupuoli	int(11) int(11) int(11) varchar(5) varchar(6)	NO NO NO NO NO	 PRI	NULL NULL NULL NULL NULL			
5 rows in set (0.026 sec)							

3.

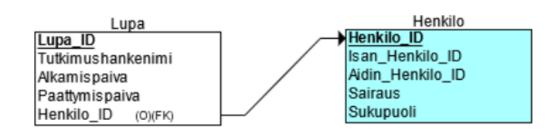

```
insert into henkilo values(3, 4, 13, "ei", "nainen");
insert into lupa values ("CC1", 1, '2021-1-1', NULL, 13), ("BRD2000", 2, '2022-08-27', NULL, 13);
update lupa set Paattymispaiva='2021-06-21' where Lupa ID=1;
MariaDB [sukupuu]> select * from henkilo;
 Isan_Henkilo_ID | Aidin_Henkilo_ID | Henkilo_ID | Sairaus | Sukupuoli |
                3 |
                       4 |
                                               13 | ei
1 row in set (0.001 sec)
MariaDB [sukupuu]> select * from lupa;
 Tutkimushankenimi | Lupa_ID | Alkamispaiva | Paattymispaiva | Henkilo_ID |
                                              2021-06-21
 CC1
                           1 2021-01-01
 BRD2000
                            2 | 2022-08-27
                                              NULL
                                                                         13
2 rows in set (0.001 sec)
```