## Module2 - R Markdown Document 1

# Anne Cunningham 26 September 2018

## This is a level 1 header

#### R Markdown

#### This is a level 3 header

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.

Here is a link to GOOGLE

Here is a word in **bold** and another word in **bold** 

Here is a word in *italics* and another word in *italics* 

When we compile our document, we are using the rmarkdown package.

Here are some example R commands:

#### 2+2

mean(c(1,2,3,4,5))

Here is an example of a non-numbered list:

- Breakfast
  - food
    - \* eggs
    - \* toast
    - \* bacon
  - drink
    - \* apple juice
- Lunch
  - taco
- Dinner
  - baked chicken
  - broccoli
  - rice

Here is an example of a numbered list:

- 1. Breakfast
  - a. food
    - i. eggs
    - ii. toast
    - iii. bacon
  - b. drink
    - i. apple juice
- 2. Lunch
  - a. taco
- 3. Dinner
  - a. baked chicken

- b. broccoli
- c. rice

Here is an example of a blockquote:

This is a block quote. This paragraph has two lines.

- 1. This is a list inside a block quote.
- 2. Second item.

Here is an example of a nested blockquote:

This is a block quote. This paragraph has two lines.

This text is nested

Here is an example of code in a blockquote:

```
2+2 mean(c(1,2,3,4,5))
```

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

#### summary(cars)


```
##
        speed
                         dist
##
    Min.
           : 4.0
                   Min.
                           : 2.00
##
    1st Qu.:12.0
                    1st Qu.: 26.00
    Median:15.0
                   Median : 36.00
##
                           : 42.98
##
    Mean
           :15.4
                   Mean
    3rd Qu.:19.0
                    3rd Qu.: 56.00
##
##
   Max.
           :25.0
                   Max.
                           :120.00
```

#### **Including Plots**

You can also embed plots, for example:



Note that the  $\mbox{echo} = \mbox{FALSE}$  parameter was added to the code chunk to prevent printing of the R code that generated the plot.

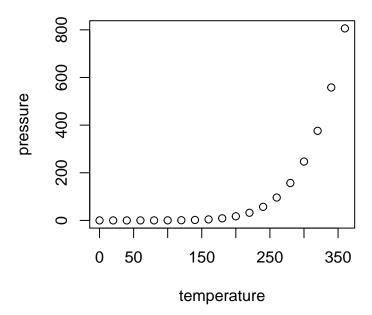

## **Insert Tables**


Table 1: Top 6 rows of Cars dataset

spe	eed	dist
	4	2
	4	10
	7	4
	7	22
	8	16
	9	10
_		

## Insert an equation

$$Y = \beta_0 + \beta_1 x$$

## **Insert Images**



Here is an image inserted

## Insert text with some footnotes

Here is a footnote reference  $^{\rm 1}$  and another  $^{\rm 2}$ 

Here is an inline footnote  $^3$ 

 $<sup>^{1}</sup>$ Here is the footnote  $^{2}$ Here's one with multiple blocks  $^{3}$ Inline notes are easier to write, since you don't have to pick an identifier and move down to type the note.