



THE UNIVERSITY OF
CHICAGO

**MASTERS IN
COMPUTATIONAL
SOCIAL SCIENCE**
THE UNIVERSITY OF CHICAGO

MACS 30111

Dictionaries

Misc

▶ Today:

- ▶ We will use information from TT3:

<https://classes.ssd.uchicago.edu/macss/macss30121/modules/tt/tt3.html>

- ▶ Materials:

<https://classroom.github.com/a/VZDXJhdo>

- ▶ Ed!!

Virtual environments

- ▶ Setting up and managing: conda vs venv
- ▶ Installs: pip vs conda

Topics:

- ❑ Introduction to Python dictionaries
- ❑ Useful dictionary operations
- ❑ Constructing dictionaries
- ❑ Iterating over dictionaries
- ❑ Accumulation
- ❑ Data structure and time complexity
- ❑ Sets

Review Lists:

- ❑ List creation and basic usage `lang = ["C", "C++", "Python", "Java"]`
- ❑ List iteration
- ❑ Adding, removing elements from a list
- ❑ List slicing
- ❑ Other operations
- ❑ Tuples
- ❑ Strings
- ❑ List Comprehensions
- ❑ Lists in Memory

Topics:

- ❑ **Introduction to Python dictionaries**
- ❑ Useful dictionary operations
- ❑ Constructing dictionaries
- ❑ Iterating over dictionaries
- ❑ Accumulation
- ❑ Dictionaries as objects
- ❑ Data structure and time complexity
- ❑ Sets

Dictionaries

- ↴ What do we know?
- ↴ What are they like?
- ↴ What are they NOT like?
- ↴ When would we use them?


Representing candidates using a *dictionary*

- Map keys to values
- Each value is associated with a **unique** key rather than a position in a sequence

Sample candidate:

First Name: Sam
Last Name: Seaborn
Party: DEM
City: Laguna Beach
State: CA
ZIP Code: 92651
Candidate ID: C00002600
District: 47

```
{ "First Name": "Sam",  
  "Last Name": "Seaborn",  
  "Party": "DEM",  
  "City": "Laguna Beach",  
  "State": "CA",  
  "ZIP Code": "92651",  
  "Candidate ID": "C00002600",  
  "District": 47  
}
```

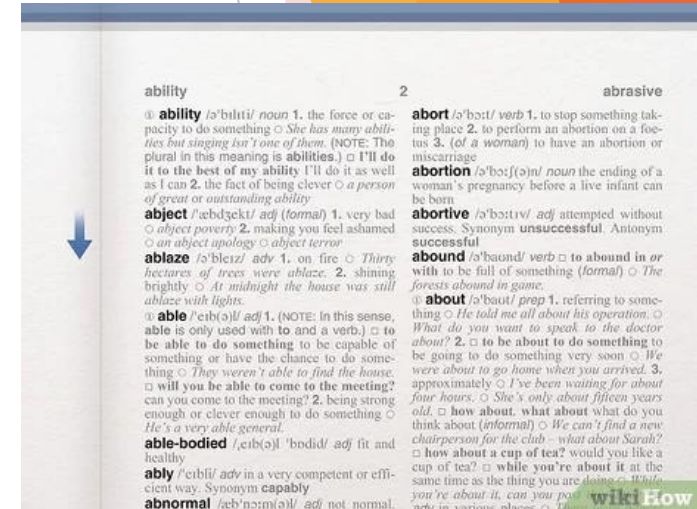

Coding practice: 2.2

```
[ 'Sam', 'Seaborn', 'DEM', 'Laguna Beach', 'CA', '92651', 'C00002600', 47 ]
```


Topics:

- ❑ Introduction to Python dictionaries
- ❑ **Useful dictionary operations**
- ❑ Constructing dictionaries
- ❑ Iterating over dictionaries
- ❑ Accumulation
- ❑ Dictionaries as objects
- ❑ Data structure and time complexity
- ❑ Sets

Access information in a dictionary

```
d = {"first_name": "John",  
     "last_name": "Doe",  
     "zip_code": "60637",  
     "campaign": "Kang for President 2016",  
     "amount": 27.50}
```

- ▶ subscript notation
- ▶ *get* method
- ▶ *in* operator

```
d["zip_code"]
```

```
d.get("affiliation", "Unknown")
```

```
"first_name" in d
```

Coding practice: 2.2.1

Updating dictionaries

```
d = {"first_name": "John",  
     "last_name": "Doe",  
     "zip_code": "60637",  
     "campaign": "Kang for President 2016",  
     "amount": 27.50}
```

- Updating the value associated with a key
- Adding new key value pairs
- Remove an entry

```
d["zip_code"] = "94305"
```

```
d["affiliation"] = "Kodosican"
```

```
del d["affiliation"]
```

Coding practice: 2.2.1

Dictionaries

```
d = {"first_name": "John", "last_name": "Doe", "zip_code": "60637",  
"campaign": "Kang for President 2016", "amount": 27.50}
```

```
d.get("first_name")
```

What is the difference?

```
d.get("affiliation") vs d.get("affiliation", "Unknown")
```

TT3: all fun, all the time

Pull up all materials

Exercise: TT3

↳ Load your files:

```
import json  
CFPB_16 = json.load(open("cfpb16_1000.json"))
```

(alternative: import cfpb)

↳ What is CFPB_16? What structure does it have?

Topics:

- ❑ Introduction to Python dictionaries
- ❑ Useful dictionary operations
- ❑ Constructing dictionaries
- ❑ **Iterating over dictionaries**
- ❑ Accumulation
- ❑ Dictionaries as objects
- ❑ Data structure and time complexity
- ❑ Sets

Iterating over dictionaries

- ▶ ***keys()*** yields a list-like object with the keys in a dictionary
- ▶ ***values()*** yields a list-like object with the values in a dictionary
- ▶ ***items()*** yields a list-like object with key/value tuples from a dictionary

Used in conjunction with for loops to iterate over dictionaries.

Coding practice: 2.2.1



TT3

Party continues

TT3: PARTY!

- ▶ Look over the TT3 code if you have not done so already
- ▶ Create a map of the functions.
- ▶ Draw lines to show where / how functions are called / used by others

Exercise: TT3

- ▶ Get the keys from `cfpb.CFPB_16` or `CFPB_16`



TT3

Party continues

Prepping Task 1

- ↳ **Task 1:** In `cfpb.py`, write a function
 - ↳ `def find_companies(complaints):`
- ↳ that **takes a list of complaints and returns a list (or set — see above)** of the companies that received at least one complaint.
- ↳ Remember: we've included a variable called `CFPB_16` that contains information from 1000 complaints in 2016. You will be using this variable when testing these functions, as shown below.

Misc

▶ Today:

- ▶ We will use information from TT3:

<https://classes.ssd.uchicago.edu/macss/mac30121/modules/tt/tt3.html>

- ▶ Materials: <https://classroom.github.com/a/VZDXJhdo>

▶ Midterm exam: 10/29 (in person + take home)

▶ Notecards:

- ▶ What questions do you have for this week's content?
- ▶ What part of learning Python has been your favorite so far?
- ▶ What has been the most challenging?
- ▶ What do you want us to focus on for Thursday?

Summary

- ▶ Dictionaries are very useful for accumulating values associated with keys.
- ▶ The ***in*** operator, the ***not in*** operator, and the ***get*** method all allow us to handle previously seen and previously unseen keys cleanly.


Topics:

- ❑ Introduction to Python dictionaries
- ❑ Useful dictionary operations
- ❑ Constructing dictionaries
- ❑ Iterating over dictionaries
- ❑ Accumulation
- ❑ **Sets**
- ❑ Dictionaries as objects
- ❑ Data structure and time complexity

Anatomy of a script

Task 1

↓ def find_companies(complaints):

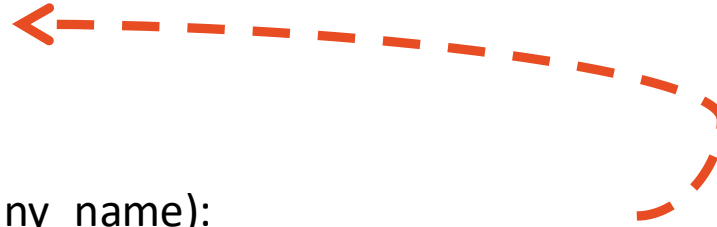

Task 2

↓ def count_complaints_about(complaints, company_name):

Task 3

↓ def count_by_state(complaints):



Task 4

↓ def state_with_most_complaints(cnt_by_state):

Task 5

↓ def count_by_company_by_state(complaints):

Task 6

↓ def complaints_by_company(complaints):

Task 7

↓ def count_by_company_by_state_2(complaints):



Sets

- ↳ Making a set: `set([list])`
- ↳ Only count things once
- ↳ `add()` to add something
- ↳ `update([list])` to add multiple
- ↳ `remove()` or `discard()` to remove an element
 - ↳ If you choose something that isn't present, only 'remove' will let you know with an error message
- ↳ `union()` or ``|'` will bring together sets
- ↳ `intersection()` or ``&'` will return common elements
- ↳ `difference()` returns only elements unique to first set

Sets v Lists

↴ Set tasks:

- ↴ Make a set, `s1`, that contains the following elements: `1,2,3,3,4,5,4,3,4`
 - ↴ How many elements will it contain?
- ↴ Add 3 to your set
- ↴ Add 5,6,7 to your set
- ↴ Compare `s1` with a second set, `s2`, that contains `3, 6,9`.
- ↴ What will `s1.difference(s2)` produce?

Caution

- ▶ Do not add/remove keys as you iterate over a dictionary

```
# INCORRECT!  
for cand_id, cand_tot in cand_to_total.items():  
    if cand_tot < 50000:  
        del cand_to_total[cand_id]
```

Common pitfall: 2.2.1

Topics:

- ❑ Introduction to Python dictionaries
- ❑ Useful dictionary operations
- ❑ Constructing dictionaries
- ❑ Iterating over dictionaries
- ❑ Accumulation
- ❑ Sets
- ❑ **Dictionaries as objects**
- ❑ Data structure and time complexity

Dictionaries as objects

- ▶ Dictionaries are also commonly used to store "objects"
- ▶ E.g., keep track of programming assignments

```
pa1 = {"name": "Programming Assignment #1",  
       "short_name": "pa1",  
       "deadline": "2022/10/12",  
       "num_submissions": 154}  
  
pa2 = {"name": "Programming Assignment #2",  
       "short_name": "pa2",  
       "deadline": "2022/10/19",  
       "num_submissions": 78}  
  
pa3 = {"name": "Programming Assignment #3",  
       "short_name": "pa3",  
       "deadline": "2022/10/26",  
       "num_submissions": 0}
```

```
1 pas = [pa1, pa2, pa3]  
2  
3 for pa in pas:  
4     print(pa["name"], "is due on", pa["deadline"])
```

```
Programming Assignment #1 is due on 2021/10/15  
Programming Assignment #2 is due on 2021/10/22  
Programming Assignment #3 is due on 2021/10/29
```

Topics:

- ❑ Introduction to Python dictionaries
- ❑ Useful dictionary operations
- ❑ Constructing dictionaries
- ❑ Iterating over dictionaries
- ❑ Accumulation
- ❑ Dictionaries as objects
- ❑ **Data structure and time complexity**
- ❑ Sets

Data structure and time complexity

- Your choice of data structure can have a considerable impact on code efficiency
- List: running time proportional to the size of the list $O(n)$ because we need to iterate over the list
- Dict: implemented using a *hash table* that is optimized to access key-value mappings very quickly, in constant time $O(1)$

	N = 5000	N = 20000	N = 43582
Lists	0.158 ms	0.572 ms	1.17 ms
Dictionaries	0.00471 ms	0.00465 ms	0.00498 ms

%timeit

Coding practice: 2.2.5

Big-O notation

- ▶ Complexity of Python operations: <https://wiki.python.org/moin/TimeComplexity>
- ▶ If n is the size of the input to a problem:
 - ▶ $O(n^2)$ means the running time is roughly proportional to n^2 (i.e., as n gets bigger, the running time grows quadratically).
 - ▶ $O(n)$ means the running time grows linearly.
 - ▶ $O(\log n)$ means the running time grows logarithmically.
 - ▶ $O(1)$ means the running time is constant.

Dictionaries and data: who, what, where, when, why, how

- ▶ Use to work with data
- ▶ Often when you are working with a database
- ▶ PROBABLY NOT if you're trying to do data manipulation
- ▶ Think of it as a super structured table
- ▶ Can use to create a database (hello, R!)

Troubleshooting

```
===== short test summary info =====
FAILED test_sir.py::test_advance_person_at_location[test_params13] - AssertionError: Actual ({} ) and expected ({} ) v
alues do not match an index {}.
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!! stopping after 1 failures !!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
===== 1 failed, 13 passed, 100 deselected, 2 warnings in 0.04s =====
```

Troubleshooting

```
===== short test summary info =====
FAILED test_sir.py::test_advance_person_at_location[test_params13] - AssertionError: Actual ({} ) and expected ({} ) v
alues do not match an index {}.
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!! stopping after 1 failures !!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
===== 1 failed, 13 passed, 100 deselected, 2 warnings in 0.04s =====
```

- ▶ Look at the structure:
- ▶ Test_sir.py: this is our file
- ▶ Test_advance_person_at_location: this is our function
- ▶ Test_params13: this is our set of values we are testing

Test file

Test function



Test values

- ▶ This is in our test file
- ▶ What is the structure?
- ▶ How can we pull out the trouble-case?

TT3: task 8

TT3: comparing code

Task 8: With your team, compare the implementations of `count_by_company_by_state` and `count_by_company_by_state_2`, and discuss the advantages and disadvantages of each.

Some aspects to consider:

1. Which is easier to read and understand?
2. Which uses less code?
3. Which is easier to debug?
4. Which is faster?
 - As a proxy for speed, you can ask:
 - Which requires fewer passes through the data?
 - Which implementation would you choose?

TT3: function comparison

```
def count_by_company_by_state(complaints):
```

```
'''  
Computes a dict of {company: {state: count, state: count}} for all states  
and companies
```

Inputs:

complaints (list) A list of complaints, where each complaint is a dictionary

Returns: (dict) with count per company per state

```
'''
```

```
by_company_by_state = {}
```

```
for complaint in complaints:
```

```
    company = complaint["Company"]
```

```
    state = complaint["State"]
```

```
        if company not in by_company_by_state:
```

```
            by_company_by_state[company] = {}
```

```
        if state not in by_company_by_state[company]:
```

```
            by_company_by_state[company][state] = 0
```

```
            by_company_by_state[company][state] += 1
```

```
return by_company_by_state
```

TT3: function comparison

```
def count_by_company_by_state_2(complaints):
```

```
'''
```

Computes a dict of {company: {state: count, state: count}} for all states and companies

Inputs: complaints (list) A list of complaints, where each complaint is a dictionary

Returns: (dict) with count per company per state

This implementation involves composing complaints_by_company with count_by_state

```
'''
```

```
by_company = complaints_by_company(complaints)
```

```
by_company_by_state = {company: count_by_state(company_complaints) for company, company_complaints in
```

```
by_company.items() }
```

```
return by_company_by_state
```

TT3: function comparison

```
def count_by_company_by_state(complaints):  
    """
```

Computes a dict of {company: {state: count, state: count}} for all states and companies

Inputs:

complaints (list) A list of complaints, where each complaint is a dictionary

Returns: (dict) with count per company per state
 """

```
    by_company_by_state = {}  
    for complaint in complaints:  
        company = complaint["Company"]  
        state = complaint["State"]  
        if company not in by_company_by_state:  
            by_company_by_state[company] = {}  
        if state not in by_company_by_state[company]:  
            by_company_by_state[company][state] = 0  
            by_company_by_state[company][state] += 1  
  
    return by_company_by_state
```

```
def count_by_company_by_state_2(complaints):  
    """
```

Computes a dict of {company: {state: count, state: count}} for all states and companies

Inputs: complaints (list) A list of complaints, where each complaint is a dictionary

Returns: (dict) with count per company per state

This implementation involves composing complaints_by_company with count_by_state
 """

```
    by_company = complaints_by_company(complaints)  
    by_company_by_state = {company: count_by_state(company_complaints)  
        for company, company_complaints in by_company.items()}  
  
    return by_company_by_state
```



Additional practice

Topics:

- ❑ Introduction to Python dictionaries
- ❑ Useful dictionary operations
- ❑ **Constructing dictionaries**
- ❑ Iterating over dictionaries
- ❑ Accumulation
- ❑ Dictionaries as objects
- ❑ Data structure and time complexity
- ❑ Sets

Construct *dict*: dictionary literals

```
d = {"first_name": "John",  
     "last_name": "Doe",  
     "zip_code": "60637",  
     "campaign": "Kang for President 2016",  
     "amount": 27.50}
```

Coding practice: 2.2.2

Construct *dict*: empty dictionary + dictionary updates

- ▶ Start with an empty dictionary
- ▶ Add key/value pairs using the subscript notation

```
d = {}
```

```
d["first_name"] = "John"
```

```
d["last_name"] = "Doe"
```

```
d["zip_code"] = "60637"
```

```
d["campaign"] = "Kang for President 2016"
```

```
d["amount"] = 27.50
```

```
d["affiliation"] = "Kodosican"
```

```
d
```

TT3: How would we get the first element? How would we get the first element's product?

Construct *dict*: dict constructor

- Use the *dict* constructor with a list of key-value pairs or another dictionary

```
d = {"first_name": "John", "last_name": "Doe",  
     "zip_code": "60637", "campaign": "Kang for President  
2016", "amount": 27.50}
```

```
keys_and_data = [("first_name", "John"),  
                  ("last_name", "Doe"), ("zip_code", "60637"),  
                  ("campaign", "Kang for President 2016"), ("amount",  
27.50)]
```

```
d_from_list = dict(keys_and_data)
```

```
d_from_dict = dict(d)
```

Construct *dict*: dictionary comprehensions

d = {key: value **for** key, value **in**
keys_and_data}

```
<list name> = [ <transformation expression> for <variable name>  
                in <list expression> ]
```

Coding practice: 2.2.2

PA2 (!!!)

- ▶ Review of initial assignment
- ▶ Importance of sketching
- ▶ **DUE DATE 11/8 START AHEAD!!!**

PA2: the “Technical Challenge”



Recipes contain helpful instructions like:

- Make cookies
- Make custard
- Bake

PA2

- ▶ Language model
- ▶ Based on cellular automata
- ▶ VERY OPEN ENDED
- ▶ For the model, specify:
 - ▶ a region,
 - ▶ the speakers in a region,
 - ▶ a speaker's neighborhood,
 - ▶ community centers in a region,
 - ▶ a speaker's engagement level,
 - ▶ language transmission rules,
 - ▶ a step in the simulation, and
 - ▶ the stopping conditions for the simulation.

PA2

- ▶ Suggested workflow:
- ▶ Sketch out what you will need
- ▶ “Big rocks first”:
 - ▶ README files!!
 - ▶ Main file + test folder
 - ▶ Sketch (rough draft ON PAPER)
 - ▶ Functions: (what do you need to include to reduce errors)?
 - ▶ Docstrings
 - ▶ Text
- ▶ TEST AS YOU GO!!

Representing campaign data

Represent political candidates and contributions.

Sample candidate:

First Name: Sam
Last Name: Seaborn
Party: DEM
City: Laguna Beach
State: CA
ZIP Code: 92651
Candidate ID: C00002600
District: 47

Sample contribution:

Candidate ID: C00002600
Amount: \$1000
City: Silver Spring
State: MD
ZIP Code: 20902
Month: 11
Year: 2003

```
['Sam', 'Seaborn', 'DEM', 'Laguna Beach', 'CA', '92651', 'C00002600', 47]
```

```
['C00002600', '$1000', 'Silver Spring', 'MD', '20902', 11, 2003]
```

Disadvantages

Representing contributions

- Keys are **often strings**, but other immutable types (integers, booleans) can be used as well.
- Values can have any type, including different types for different values.

```
{ "Cand_ID": "C00002600",  
  "Amount": 1000,  
  "City": "Silver Spring",  
  "State": "MD",  
  "ZIP Code": "20902",  
  "Month": 11,  
  "Year": 2003 }
```

Sample contribution

Candidate ID: C00002600

Amount: \$1000

City: Silver Spring

State: MD

ZIP Code: 20902

Month: 11

Year: 2003

Values can have any type

- Values can have any type, including dictionaries, list of dictionaries, etc.

Sample candidate:

First Name: Sam
Last Name: Seaborn
Party: DEM
City: Laguna Beach
State: CA
ZIP Code: 92651
Candidate ID: C00002600
District: 47

```
{ "First Name": "Sam",  
  "Last Name": "Seaborn",  
  "Party": "DEM",  
  "City": "Laguna Beach",  
  "State": "CA",  
  "ZIP Code": "92651",  
  "Candidate ID": "C00002600",  
  "District": 47  
}
```

Nested dictionaries

```
{ "Name":  
  { "First Name": "Sam",  
    "Last Name": "Seaborn"},  
  "Party": "DEM",  
  "Office Location":  
    { "City": "Laguna Beach",  
      "State": "CA",  
      "ZIP Code": "92651"},  
  "Candidate ID": "C00002600",  
  "District": 47  
}
```

Bad keys

```
1 d = {0.3: "found"}
```

```
1 d[0.1+0.1+0.1]
```

```
-----  
KeyError                                Traceback (most recent call last)  
<ipython-input-2-da5394697656> in <module>  
----> 1 d[0.1+0.1+0.1]  
  
KeyError: 0.30000000000000004
```

- ▶ Computers use binary system instead of a base 10 system
- ▶ 0.1 and 0.3 can't be precisely represented in a binary system
- ▶ The binary representation of 0.3 is not equal to that of 0.1+0.1+0.1

Representing contributions

Sample contribution

Candidate ID: C00002600

Amount: \$1000

City: Silver Spring

State: MD

ZIP Code: 20902

Month: 11

Year: 2003

```
{ "Cand_ID": "C00002600",  
  "Amount": 1000,  
  "City": "Silver Spring",  
  "State": "MD",  
  "ZIP Code": "20902",  
  "Month": 11,  
  "Year": 2003 }
```

Total contributions for all candidates

- Mapping from candidate IDs to total contributions received by the candidates
- Accumulate values based on keys

```
{ "Cand_ID": "C00002600",  
  "Amount": 1000,  
  "City": "Silver Spring",  
  "State": "MD",  
  "ZIP Code": "20902",  
  "Month": 11,  
  "Year": 2003 }
```

```
cand_to_total =  
    {'C00002600': 433680,  
     'C00012229': 469755,  
     'C00013128': 398652,  
     'C00017830': 561314,  
     'C00019075': 538150,  
     ...  
    }
```

Coding practice: 2.2.3