Aplikasi Berbasis Platform
WEEK 7

Disusun oleh:
DIDIK WEKA PRATAMA
2311102285
S1 IF-11-04

Dosen Pengampu:
Cahyo Prihantoro, S.Kom., M.Eng.

PROGRAM STUDI S1 INFORMATIKA
FAKULTAS INFORMATIKA
TELKOM UNIVERSITY PURWOKERTO
2025/2026

Langkah langkah

1. Buka VS code

2. Tambahkan extension flutter di VS code, flutter yang paling atas lalu install

3. Install Flutter with VS Code

1. Open the command palette in VS Code.

Go to **View** > **Command Palette** or press Control + Shift + P.

2. In the command palette, type flutter.
3. Select **Flutter: New Project**.
4. VS Code prompts you to locate the Flutter SDK on your computer. Select **Download SDK**.
5. When the **Select Folder for Flutter SDK** dialog displays, choose where you want to install Flutter.
6. Click **Clone Flutter**.

While downloading Flutter, VS Code displays this pop-up notification:

Downloading the Flutter SDK. This may take a few minutes.

This download takes a few minutes. If you suspect that the download has hung, click **Cancel** then start the installation again.

7. Click **Add SDK to PATH**.

When successful, a notification displays:

The Flutter SDK was added to your PATH

8. VS Code might display a Google Analytics notice.

If you agree, click **OK**.

9. To ensure that Flutter is available in all terminals:
    a. Close, then reopen all terminal windows.
    b. Restart VS Code.

Test Drive Flutter

1. Create a new Flutter app
    1. Open the command palette in VS Code.

Go to **View** > **Command Palette** or press Control + Shift + P.

    2. In the command palette, start typing flutter:.

VS Code should surface commands from the Flutter plugin.

    3. Select the **Flutter: New Project** command.

Your OS or VS Code might ask for access to your documents, agree to continue to the next step.

4. Choose the **Application** template.

VS Code should prompt you with **Which Flutter template?**. Choose **Application** to bootstrap a simple counter app.

5. Create or select the parent directory for your new app's folder.

A file dialog should appear.

    1. Select or create the parent directory where you want the project to be created.
    2. To confirm your selection, click **Select a folder to create the project in**.

6. Enter a name for your app.

VS Code should prompt you to enter a name for your new app. Enter trying_flutter or a similar lowercase_with_underscores name. To confirm your selection, press Enter.

7. Wait for project initialization to complete.

Task progress is often surfaced as a notification in the bottom right and can also be accessed from the **Output** panel.

8. Open the lib directory, then the main.dart file.

If you're curious about what each portion of the code does, check out the preceding comments throughout the file.

2. Run your app on the web

While Flutter apps can run on many platforms, try running your new app on the web.

1. Open the command palette in VS Code.

Go to **View** > **Command Palette** or press Control + Shift + P.

2. In the command palette, start typing flutter:.

VS Code should surface commands from the Flutter plugin.

3. Select the **Flutter: Select Device** command.
4. From the **Select Device** prompt, select **Chrome**.
5. Run or start debugging your app.

Go to **Run** > **Start Debugging** or press F5.

flutter run is used to build and start your app, then a new instance of Chrome should open and start running your newly created app.

3. Try hot reload

Flutter offers a fast development cycle with **stateful hot reload**, the ability to reload the code of a live running app without restarting or losing app state.

You can change your app's source code, run the hot reload command in VS Code, then see the change in your running app.

1. In the running app, try adding to the counter a few times by clicking the button.
2. With your app still running, make a change in the lib/main.dart file.

Change the _counter++ line in the _incrementCounter method to instead decrement the _counter field.

```
setState(() {
  // ...
  _counter++;
  _counter--;
});
```

3. Save your changes (**File** > **Save All**) or click the **Hot Reload** button.

Flutter updates the running app without losing any existing state. Notice the existing value stayed the same.

4. Try clicking the button again. Notice the value decreases instead of increases.

4. Explore the Flutter sidebar

The Flutter plugin adds a dedicated sidebar to VS Code for managing Flutter debug sessions and devices, viewing an outline of your code and widgets, as well as accessing the Dart and Flutter DevTools.

1. If your app isn't running, start debugging it again.

Go to **Run** > **Start Debugging** or press F5.

2. Open the Flutter sidebar in VS Code.

Either open it with the Flutter button in the VS Code sidebar or open it from the command palette by running the **Flutter: Focus on Flutter Sidebar View** command.

3. In the Flutter sidebar, under **DevTools**, click the **Flutter Inspector** button.

A separate **Widget Inspector** panel should open in VS Code.

In the widget inspector, you can view your app's widget tree, view the properties and layout of each widget, and more.

4. In the widget inspector, try clicking the top-level MyHomePage widget.

A view of its properties and layout should open, and the VS Code editor should navigate to and focus the line where the widget was included.

5. Explore and try out other features in the widget inspector and Flutter sidebar.

SS Output

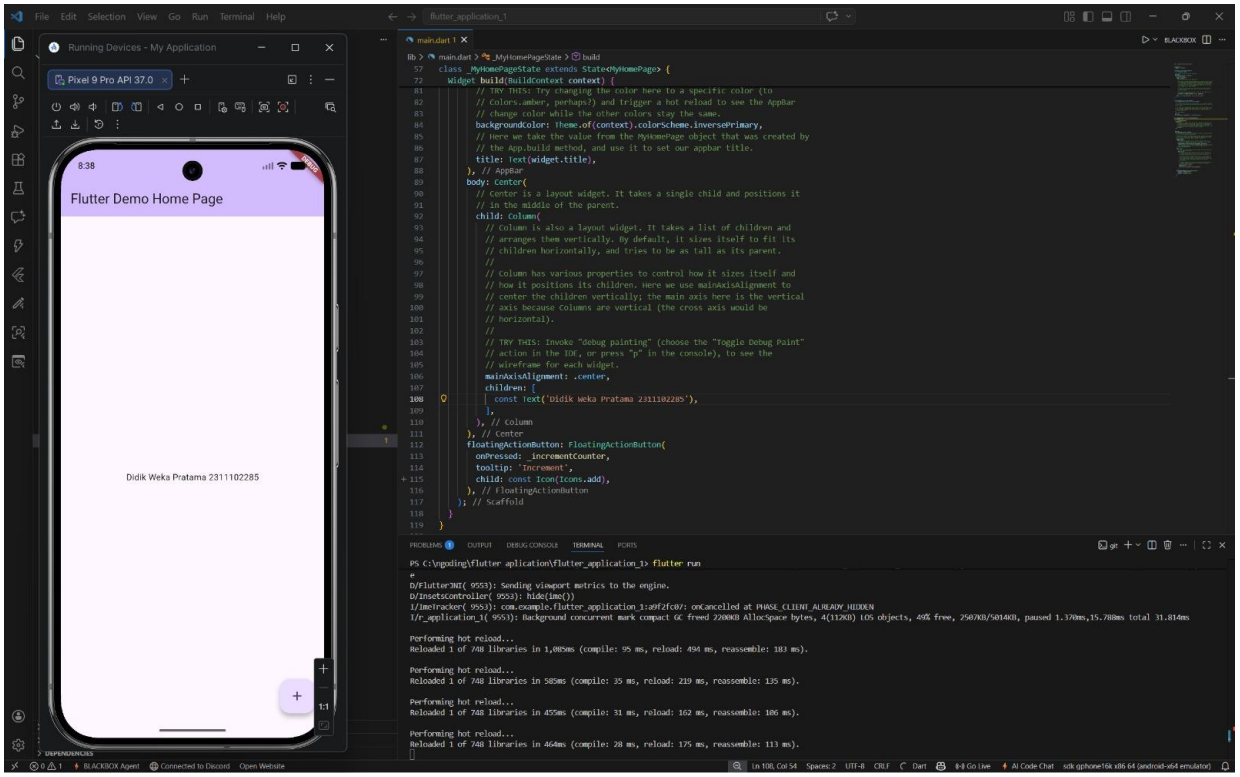
File Edit Selection View Go Run Terminal Help
flutter_application_1
Running Devices - My Application
Pixel 9 Pro API 37.0
8:38
Flutter Demo Home Page
Didik Weka Pratama 2311102285
main.dart 1
lib > main.dart > _MyHomePageState > build
class _MyHomePageState extends State<MyHomePage> {
Widget build(BuildContext context) {
// TRY THIS: Try changing the color here to a specific color (to
// Colors.amber, perhaps?) and trigger a hot reload to see the AppBar
// change color while the other colors stay the same.
backgroundColor: Theme.of(context).colorScheme.inversePrimary,
// Here we take the value from the MyHomePage object that was created by
// the App.build method, and use it to set our appbar title.
title: Text(widget.title),
), // AppBar
body: Center(
// Center is a layout widget. It takes a single child and positions it
// in the middle of the parent.
child: Column(
// Column is also a layout widget. It takes a list of children and
// arranges them vertically. By default, it sizes itself to fit its
// children horizontally, and tries to be as tall as its parent.
//
// Column has various properties to control how it sizes itself and
// how it positions its children. Here we use mainAxisAlignment to
// center the children vertically; the main axis here is the vertical
// axis because Columns are vertical (the cross axis would be
// horizontal).
//
// TRY THIS: Invoke "debug painting" (choose the "Toggle Debug Paint"
// action in the IDE, or press "p" in the console), to see the
// wireframe for each widget.
mainAxisAlignment: .center,
children: [
const Text('Didik Weka Pratama 2311102285'),
],
), // Column
), // Center
floatingActionButton: FloatingActionButton(
onPressed: _incrementCounter,
tooltip: 'Increment',
child: const Icon(Icons.add),
), // FloatingActionButton
); // Scaffold
}
}
PROBLEMS 1 OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\ngoding\Flutter aplication\flutter_application_1> flutter run
e
D/Flutter3NI(9553): Sending viewport metrics to the engine.
D/InsetsController(9553): hide(ime())
I/ImeTracker(9553): com.example.flutter_application_1:a9f2fc07: onCancelled at PHASE_CLIENT_ALREADY_HIDDEN
I/r_application_1(9553): Background concurrent mark compact GC freed 220KB AllocSpace bytes, 4(112KB) LOS objects, 49% free, 2507KB/5014KB, paused 1.370ms,15.788ms total 31.814ms
Performing hot reload...
Reloaded 1 of 748 libraries in 1,085ms (compile: 95 ms, reload: 494 ms, reassemble: 183 ms).
Performing hot reload...
Reloaded 1 of 748 libraries in 585ms (compile: 35 ms, reload: 219 ms, reassemble: 135 ms).
Performing hot reload...
Reloaded 1 of 748 libraries in 455ms (compile: 31 ms, reload: 162 ms, reassemble: 106 ms).
Performing hot reload...
Reloaded 1 of 748 libraries in 464ms (compile: 28 ms, reload: 175 ms, reassemble: 113 ms).
Ln 108, Col 54 Spaces: 2 UTF-8 CRLF Dart Go Live AI Code Chat