



UNIVERSITY OF PISA

DEPARTMENT OF COMPUTER SCIENCE

COMPUTATIONAL MATHEMATICS
WILDCARD PROJECT NR. 5 WITH MACHINE LEARNING
GROUP 35

Support Vector Machines

Author:

Donato Meoli
d.meoli@studenti.unipi.it

March, 2021

Contents

| | |
|--|-----------|
| List of Figures | 2 |
| List of Tables | 3 |
| List of Algorithms | 4 |
| List of Theorems | 5 |
| 1 Track | 6 |
| 2 Abstract | 6 |
| 3 Linear Support Vector Classifier | 7 |
| 3.1 Hinge loss | 7 |
| 3.1.1 Primal formulation | 8 |
| 3.1.2 Wolfe Dual formulation | 9 |
| 3.1.3 Lagrangian Dual formulation | 11 |
| 3.2 Squared Hinge loss | 12 |
| 3.2.1 Primal formulation | 12 |
| 4 Linear Support Vector Regression | 13 |
| 4.1 Epsilon-insensitive loss | 14 |
| 4.1.1 Primal formulation | 14 |
| 4.1.2 Wolfe Dual formulation | 15 |
| 4.1.3 Lagrangian Dual formulation | 16 |
| 4.2 Squared Epsilon-insensitive loss | 18 |
| 4.2.1 Primal formulation | 18 |
| 5 Nonlinear Support Vector Machines | 19 |
| 5.1 Polynomial kernel | 19 |
| 5.2 Gaussian RBF kernel | 19 |
| 6 Optimization Methods | 21 |
| 6.1 Gradient Descent | 22 |
| 6.1.1 Momentum | 23 |
| 6.2 AdaGrad | 26 |
| 6.3 Sequential Minimal Optimization | 27 |
| 6.3.1 Classification | 27 |
| 6.3.2 Regression | 32 |
| 7 Experiments | 36 |
| 7.1 Support Vector Classifier | 36 |
| 7.1.1 Hinge loss | 36 |
| 7.1.2 Squared Hinge loss | 39 |
| 7.2 Support Vector Regression | 40 |
| 7.2.1 Epsilon-insensitive loss | 40 |
| 7.2.2 Squared Epsilon-insensitive loss | 44 |
| 8 Conclusions | 46 |
| References | 47 |

List of Figures

| | | |
|----|--|----|
| 1 | Linear SVC hyperplane | 8 |
| 2 | SVC Hinge loss with different optimization steps | 9 |
| 3 | SVC Squared Hinge loss with different optimization steps | 13 |
| 4 | Linear SVR hyperplane | 14 |
| 5 | SVR Epsilon-insensitive loss with different optimization steps | 15 |
| 6 | SVC Squared Epsilon-insensitive loss with different optimization steps | 18 |
| 7 | Polynomial SVM hyperplanes | 19 |
| 8 | Gaussian SVM hyperplanes | 20 |
| 9 | Polyak's and Nesterov's Momentum | 23 |
| 10 | SMO for two Lagrange multipliers | 27 |

List of Tables

| | | |
|----|---|----|
| 1 | SVC Primal formulation results with Hinge loss | 36 |
| 2 | Linear SVC Wolfe Dual formulation results with Hinge loss | 37 |
| 3 | Linear SVC Lagrangian Dual formulation results with Hinge loss | 37 |
| 4 | Nonlinear SVC Wolfe Dual formulation results with Hinge loss | 38 |
| 5 | Nonlinear SVC Lagrangian Dual formulation results with Hinge loss | 38 |
| 6 | SVC Primal formulation results with Squared Hinge loss | 39 |
| 7 | SVR Primal formulation results with Epsilon-insensitive loss | 40 |
| 8 | Linear SVR Wolfe Dual formulation results with Epsilon-insensitive loss | 41 |
| 9 | Linear SVR Lagrangian Dual formulation results with Epsilon-insensitive loss | 42 |
| 10 | Nonlinear SVR Wolfe Dual formulation results with Epsilon-insensitive loss | 43 |
| 11 | Nonlinear SVR Lagrangian Dual formulation results with Epsilon-insensitive loss | 44 |
| 12 | SVR Primal formulation results with Squared Epsilon-insensitive loss | 45 |

List of Algorithms

| | | |
|---|---|----|
| 1 | Gradient Descent | 22 |
| 2 | Stochastic Gradient Descent | 23 |
| 3 | Polyak Accelerated Gradient Descent or or Heavy-Ball method | 24 |
| 4 | Nesterov Accelerated Gradient Descent | 24 |
| 5 | AdaGrad | 26 |
| 6 | Sequential Minimal Optimization for Classification | 29 |
| 7 | Sequential Minimal Optimization for Regression | 34 |

List of Theorems

| | | |
|---|---|----|
| 1 | Definition (Convexity) | 21 |
| 2 | Definition (Strong Convexity) | 21 |
| 3 | Definition (L-smoothness) | 21 |
| 4 | Theorem (Gradient Descent convergence for convex functions) | 22 |
| 5 | Theorem (Gradient Descent convergence for strongly convex functions) | 22 |
| 6 | Theorem (Nesterov Accelerated Gradient Descent convergence for convex functions) | 24 |
| 7 | Theorem (Nesterov Accelerated Gradient Descent convergence for strongly convex functions) | 24 |

1 Track

(M1.1) is a *Support Vector Classifier (SVC)* with the *hinge* loss.

(A1.1.1) is a *momentum descent* approach [1, 2], an *accelerated gradient* method for solving the SVC in its *primal* formulation.

(A1.1.2) is the *Sequential Minimal Optimization (SMO)* algorithm [3, 4], an ad hoc *active set* method for training a SVC in its *Wolfe dual* formulation with *linear*, *polynomial* and *gaussian* kernels.

(A1.1.3) is the *AdaGrad* algorithm [5], a *deflected subgradient* method for solving the SVC in its *Lagrangian dual* formulation with *linear*, *polynomial* and *gaussian* kernels.

(M1.2) is a *Support Vector Classifier (SVC)* with the *squared hinge* loss.

(A1.2.1) is a *momentum descent* approach [1, 2], an *accelerated gradient* method for solving the SVC in its *primal* formulation.

(M2.1) is a *Support Vector Regression (SVR)* with the *epsilon-insensitive* loss.

(A2.1.1) is a *momentum descent* approach [1, 2], an *accelerated gradient* method for solving the SVR in its *primal* formulation.

(A2.1.2) is the *Sequential Minimal Optimization (SMO)* algorithm [6, 7], an ad hoc *active set* method for training a SVR in its *Wolfe dual* formulation with *linear*, *polynomial* and *gaussian* kernels.

(A2.1.3) is the *AdaGrad* algorithm [5], a *deflected subgradient* method for solving the SVR in its *Lagrangian dual* formulation with *linear*, *polynomial* and *gaussian* kernels.

(M2.2) is a *Support Vector Regression (SVR)* with the *squared epsilon-insensitive* loss.

(A2.2.1) is a *momentum descent* approach [1, 2], an *accelerated gradient* method for solving the SVR in its *primal* formulation.

2 Abstract

A *Support Vector Machine* is a learning model used both for *classification* and *regression* tasks whose goal is to construct a *maximum margin separator*, i.e., a decision boundary with the largest distance from the nearest training data points.

The aim of this report is to compare the *primal*, the *Wolfe dual* [8] and the *Lagrangian dual* formulations of this model in terms of *numerical precision*, *accuracy* and *complexity*.

Firstly, I will provide a detailed mathematical derivation of the model for all these formulations, then I will propose two algorithms to solve the optimization problem in case of *constrained* or *unconstrained* formulation of the problem, explaining their theoretical properties, i.e., *convergence* and *complexity*.

Finally, I will show some experiments for *linearly* and *nonlinearly* separable generated datasets to compare the performance of different *kernels*, also by comparing the *custom* results with *sklearn* SVM implementations, i.e., *liblinear* [9] and *libsvm* [10] implementations, and *cvxopt* [11] QP solver.

3 Linear Support Vector Classifier

Given n training points, where each input x_i has m attributes, i.e., is of dimensionality m , and is in one of two classes $y_i = \pm 1$, i.e., our training data is of the form:

$$\{(x_i, y_i), x_i \in \mathbb{R}^m, y_i = \pm 1, i = 1, \dots, n\} \quad (1)$$

For simplicity we first assume that data are (not fully) linearly separable in the input space x , meaning that we can draw a line separating the two classes when $m = 2$, a plane for $m = 3$ and, more in general, a hyperplane for an arbitrary m .

Support vectors are the examples closest to the separating hyperplane and the aim of support vector machines is to orientate this hyperplane in such a way as to be as far as possible from the closest members of both classes, i.e., we need to maximize this margin.

This hyperplane is represented by the equation $w^T x + b = 0$. So, we need to find w and b so that our training data can be described by:

$$\begin{aligned} w^T x_i + b &\geq +1 - \xi_i, \forall y_i = +1 \\ w^T x_i + b &\leq -1 + \xi_i, \forall y_i = -1 \\ \xi_i &\geq 0 \quad \forall_i \end{aligned} \quad (2)$$

where the positive slack variables ξ_i are introduced to allow misclassified points. In this way data points on the incorrect side of the margin boundary will have a penalty that increases with the distance from it.

These two equations can be combined into:

$$\begin{aligned} y_i(w^T x_i + b) &\geq 1 - \xi_i \quad \forall_i \\ \xi_i &\geq 0 \quad \forall_i \end{aligned} \quad (3)$$

The margin is equal to $\frac{1}{\|w\|}$ and maximizing it subject to the constraint in (3) while as we are trying to reduce the number of misclassifications is equivalent to finding:

$$\begin{aligned} \min_{w, b, \xi} \quad & \|w\| + C \sum_{i=1}^n \xi_i \\ \text{subject to} \quad & y_i(w^T x_i + b) \geq 1 - \xi_i \quad \forall_i \\ & \xi_i \geq 0 \quad \forall_i \end{aligned} \quad (4)$$

Minimizing $\|w\|$ is equivalent to minimizing $\frac{1}{2}\|w\|^2$, so we need to find:

$$\begin{aligned} \min_{w, b, \xi} \quad & \frac{1}{2}\|w\|^2 + C \sum_{i=1}^n \xi_i \\ \text{subject to} \quad & y_i(w^T x_i + b) \geq 1 - \xi_i \quad \forall_i \\ & \xi_i \geq 0 \quad \forall_i \end{aligned} \quad (5)$$

where the parameter C controls the trade-off between the slack variable penalty and the size of the margin.

3.1 Hinge loss

The *hinge* loss is defined as:

$$\mathcal{L}_1 = \begin{cases} 0 & \text{if } y(w^T x + b) \geq 1 \\ 1 - y(w^T x + b) & \text{otherwise} \end{cases} \quad (6)$$

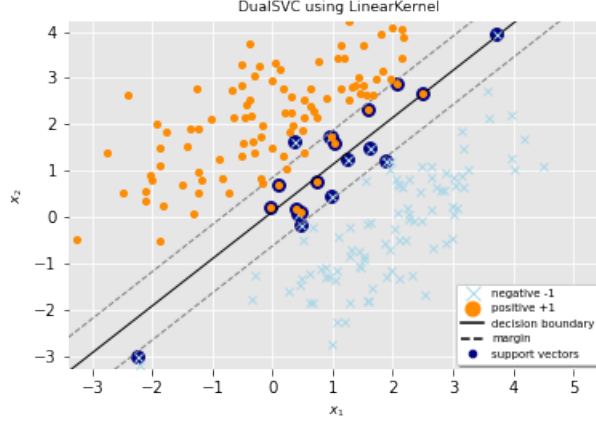


Figure 1: Linear SVC hyperplane

or, equivalently:

$$\mathcal{L}_1 = \max(0, 1 - y(w^T x + b)) \quad (7)$$

and it is a nondifferentiable convex function due to its nonsmoothness in 1, but has a subgradient wrt w that is given by:

$$\frac{\partial \mathcal{L}_1}{\partial w} = \begin{cases} -yx & \text{if } y(w^T x + b) < 1 \\ 0 & \text{otherwise} \end{cases} \quad (8)$$

3.1.1 Primal formulation

The general primal unconstrained formulation takes the form:

$$\min_{w,b} \mathcal{R}(w,b) + C \sum_{i=1}^n \mathcal{L}(w,b; x_i, y_i) \quad (9)$$

where $\mathcal{R}(w,b)$ is the *regularization term* and $\mathcal{L}(w,b; x_i, y_i)$ is the *loss function* associated with the observation (x_i, y_i) [12].

The quadratic optimization problem (5) can be equivalently formulated as:

$$\min_{w,b} \frac{1}{2} \|w\|^2 + C \sum_{i=1}^n \max(0, 1 - y_i(w^T x_i + b)) \quad (10)$$

where we make use of the *hinge loss* (6) or (7).

The above formulation penalizes slacks ξ linearly and is called \mathcal{L}_1 -SVC.

To simplify the notation and so also the design of the algorithms, the simplest approach to learn the bias term b is that of including that into the *regularization term*; so we can rewrite (10) and (41) as follows:

$$\min_{w,b} \frac{1}{2} (\|w\|^2 + b^2) + C \sum_{i=1}^n \mathcal{L}(w; x_i, y_i) \quad (11)$$

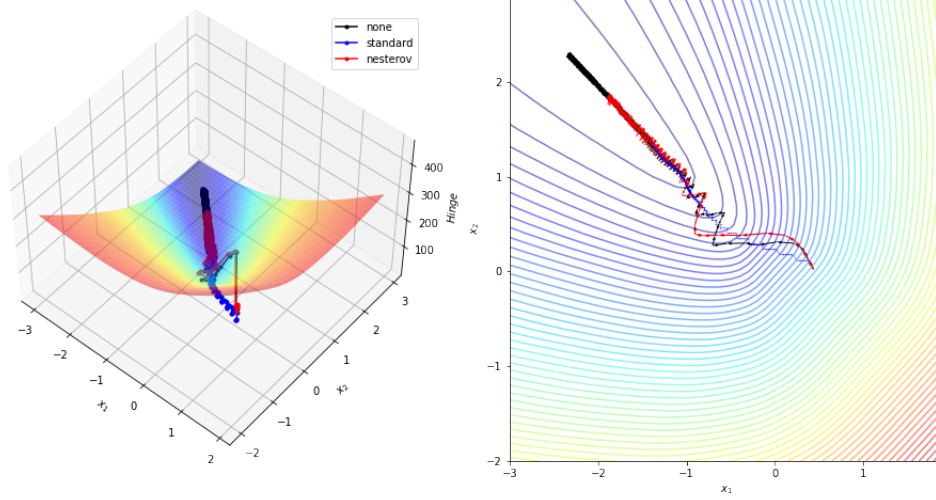


Figure 2: SVC Hinge loss with different optimization steps

or, equivalently, by augmenting the weight vector w with the bias term b and each instance x_i with an additional dimension, i.e., with constant value equal to 1:

$$\min_w \frac{1}{2} \|\bar{w}\|^2 + C \sum_{i=1}^n \mathcal{L}(w; \bar{x}_i, y_i) \quad (12)$$

where $\bar{w}^T = [w^T, b]$
 $\bar{x}_i^T = [x_i^T, 1]$

with the advantages of having convex properties of the objective function useful for convergence analysis and the possibility to directly apply algorithms designed for models without the bias term.

Notice that in terms of numerical optimization the formulations (10) and (41) are not equivalent to (11) or (12) since in the first one the bias term b does not contribute to the *regularization term*, so the SVM formulation is based on an unregularized bias term b , as highlighted by the *statistical learning theory*. But, in machine learning sense, numerical experiments in [13] show that the accuracy does not vary much when the bias term b is embedded into the weight vector w .

3.1.2 Wolfe Dual formulation

To reformulate the (5) as a *Wolfe dual*, we need to allocate the Lagrange multipliers $\alpha_i \geq 0, \mu_i \geq 0 \forall_i$:

$$\max_{\alpha, \mu} \min_{w, b, \xi} \mathcal{W}(w, b, \xi, \alpha, \mu) = \frac{1}{2} \|w\|^2 + C \sum_{i=1}^n \xi_i - \sum_{i=1}^n \alpha_i (y_i (w^T x_i + b) - 1 + \xi_i) - \sum_{i=1}^n \mu_i \xi_i \quad (13)$$

We wish to find the w , b and ξ_i which minimizes, and the α and μ which maximizes \mathcal{W} , provided $\alpha_i \geq 0, \mu_i \geq 0 \forall_i$. We can do this by differentiating \mathcal{W} wrt w and b and setting the derivatives to 0:

$$\frac{\partial \mathcal{W}}{\partial w} = w - \sum_{i=1}^n \alpha_i y_i x_i \Rightarrow w = \sum_{i=1}^n \alpha_i y_i x_i \quad (14)$$

$$\frac{\partial \mathcal{W}}{\partial b} = - \sum_{i=1}^n \alpha_i y_i \Rightarrow \sum_{i=1}^n \alpha_i y_i = 0 \quad (15)$$

$$\frac{\partial \mathcal{W}}{\partial \xi_i} = 0 \Rightarrow C = \alpha_i + \mu_i \quad (16)$$

Substituting (14) and (15) into (13) together with $\mu_i \geq 0 \forall_i$, which implies that $\alpha \leq C$, gives a new formulation being dependent on α . We therefore need to find:

$$\begin{aligned} \max_{\alpha} \mathcal{W}(\alpha) &= \sum_{i=1}^n \alpha_i - \frac{1}{2} \sum_{i,j} \alpha_i \alpha_j y_i y_j \langle x_i, x_j \rangle \\ &= \sum_{i=1}^n \alpha_i - \frac{1}{2} \sum_{i,j} \alpha_i Q_{ij} \alpha_j \text{ where } Q_{ij} = y_i y_j \langle x_i, x_j \rangle \\ &= \sum_{i=1}^n \alpha_i - \frac{1}{2} \alpha^T Q \alpha \text{ subject to } 0 \leq \alpha_i \leq C \forall_i, \sum_{i=1}^n \alpha_i y_i = 0 \end{aligned} \quad (17)$$

or, equivalently:

$$\begin{aligned} \min_{\alpha} \quad & \frac{1}{2} \alpha^T Q \alpha + q^T \alpha \\ \text{subject to} \quad & 0 \leq \alpha_i \leq C \forall_i \\ & y^T \alpha = 0 \end{aligned} \quad (18)$$

where $q^T = [1, \dots, 1]$.

By solving (18) we will know α and, from (14), we will get w , so we need to calculate b .

We know that any data point satisfying (15) which is a support vector x_s will have the form:

$$y_s(w^T x_s + b) = 1 \quad (19)$$

and, by substituting in (14), we get:

$$y_s \left(\sum_{m \in S} \alpha_m y_m \langle x_m, x_s \rangle + b \right) = 1 \quad (20)$$

where s denotes the set of indices of the support vectors and is determined by finding the indices i where $\alpha_i > 0$, i.e., nonzero Lagrange multipliers.

Multiplying through by y_s and then using $y_s^2 = 1$ from (2):

$$y_s^2 \left(\sum_{m \in S} \alpha_m y_m \langle x_m, x_s \rangle + b \right) = y_s \quad (21)$$

$$b = y_s - \sum_{m \in S} \alpha_m y_m \langle x_m, x_s \rangle \quad (22)$$

Instead of using an arbitrary support vector x_s , it is better to take an average over all of the support vectors in S :

$$b = \frac{1}{N_s} \sum_{s \in S} y_s - \sum_{m \in S} \alpha_m y_m \langle x_m, x_s \rangle \quad (23)$$

We now have the variables w and b that define our separating hyperplane's optimal orientation and hence our support vector machine. Each new point x' is classified by evaluating:

$$y' = \text{sgn} \left(\sum_{i=1}^n \alpha_i y_i \langle x_i, x' \rangle + b \right) \quad (24)$$

From (18) we can notice that the equality constraint $y^T \alpha = 0$ arises from the stationarity condition $\partial_b \mathcal{W} = 0$. So, again, for simplicity, we can again consider the bias term b embedded into the weight vector. We report below the box-constrained dual formulation [13] that arises from the primal (11) or (12) where the bias term b is embedded into the weight vector w :

$$\begin{aligned} \min_{\alpha} \quad & \frac{1}{2} \alpha^T (Q + yy^T) \alpha + q^T \alpha \\ \text{subject to} \quad & 0 \leq \alpha_i \leq C \quad \forall_i \end{aligned} \quad (25)$$

3.1.3 Lagrangian Dual formulation

In order to relax the constraints in the *Wolfe dual* formulation (18) we define the problem as a *Lagrangian dual* relaxation by embedding them into objective function, so we need to allocate the Lagrangian multipliers $\mu \geq 0, \lambda_+ \geq 0, \lambda_- \geq 0$:

$$\begin{aligned} \max_{\mu, \lambda_+, \lambda_-} \min_{\alpha} \mathcal{L}(\alpha, \mu, \lambda_+, \lambda_-) &= \frac{1}{2} \alpha^T Q \alpha + q^T \alpha - \mu^T (y^T \alpha) - \lambda_+^T (u - \alpha) - \lambda_-^T \alpha \\ &= \frac{1}{2} \alpha^T Q \alpha + (q - \mu y + \lambda_+ - \lambda_-)^T \alpha - \lambda_+^T u \end{aligned} \quad (26)$$

where the upper bound $u^T = [C, \dots, C]$.

Taking the derivative of the Lagrangian \mathcal{L} wrt α and settings it to 0 gives:

$$\frac{\partial \mathcal{L}}{\partial \alpha} = 0 \Rightarrow Q\alpha + (q - \mu y + \lambda_+ - \lambda_-) = 0 \quad (27)$$

With α optimal solution of the linear system:

$$Q\alpha = -(q - \mu y + \lambda_+ - \lambda_-) \quad (28)$$

the gradient wrt μ, λ_+ and λ_- are:

$$\frac{\partial \mathcal{L}}{\partial \mu} = -y\alpha \quad (29)$$

$$\frac{\partial \mathcal{L}}{\partial \lambda_+} = \alpha - u \quad (30)$$

$$\frac{\partial \mathcal{L}}{\partial \lambda_-} = -\alpha \quad (31)$$

If the Hessian matrix Q is not positive definite, i.e., the Lagrangian function is not strictly convex since it will be linear along the eigenvectors correspondent to the null eigenvalues and so it will be unbounded below, the Lagrangian dual relaxation will be nondifferentiable, so it will have infinite solutions and for each of them it will have a different subgradient. In order to compute an approximation of the gradient, we will choose α in such a way as the one that minimizes the norm of the residual:

$$\begin{aligned} \min_{\alpha_n \in K_n(Q, b)} \quad & \|Q\alpha_n - b\| \\ \text{where} \quad & b = -(q - \mu y + \lambda_+ - \lambda_-) \end{aligned} \quad (32)$$

Since we are dealing with a symmetric but indefinite linear system we will choose a well-known Krylov method that performs the Lanczos iterate, i.e., symmetric Arnoldi iterate, called *minres*, i.e., symmetric *gmres*, to compute the vector α_n that minimizes the norm of the residual $r_n = Q\alpha_n - b$ among all vectors in $K_n(Q, b) = \text{span}(b, Qb, Q^2b, \dots, Q^{n-1}b)$.

From (18) we can notice that the equality constraint $y^T \alpha = 0$ arises from the stationarity condition $\partial_b \mathcal{W} = 0$. So, again, for simplicity, we can again consider the bias term b embedded into the weight vector. In this way

the dimensionality of (26) is reduced of 1/3 by removing the multipliers μ which was allocated to control the equality constraint $y^T \alpha = 0$, so we will end up solving exactly the problem (25).

$$\begin{aligned} \max_{\lambda_+, \lambda_-} \min_{\alpha} \mathcal{L}(\alpha, \lambda_+, \lambda_-) &= \frac{1}{2} \alpha^T (Q + yy^T) \alpha + q^T \alpha - \lambda_+^T (u - \alpha) - \lambda_-^T \alpha \\ &= \frac{1}{2} \alpha^T (Q + yy^T) \alpha + (q + \lambda_+ - \lambda_-)^T \alpha - \lambda_+^T u \end{aligned} \quad (33)$$

where, again, the upper bound $u^T = [C, \dots, C]$.

Now, taking the derivative of the Lagrangian \mathcal{L} wrt α and settings it to 0 gives:

$$\frac{\partial \mathcal{L}}{\partial \alpha} = 0 \Rightarrow (Q + yy^T) \alpha + (q + \lambda_+ - \lambda_-) = 0 \quad (34)$$

With α optimal solution of the linear system:

$$(Q + yy^T) \alpha = -(q + \lambda_+ - \lambda_-) \quad (35)$$

the gradient wrt λ_+ and λ_- are:

$$\frac{\partial \mathcal{L}}{\partial \lambda_+} = \alpha - u \quad (36)$$

$$\frac{\partial \mathcal{L}}{\partial \lambda_-} = -\alpha \quad (37)$$

3.2 Squared Hinge loss

The *squared hinge* loss is defined as:

$$\mathcal{L}_2 = \begin{cases} 0 & \text{if } y(w^T x + b) \geq 1 \\ (1 - y(w^T x + b))^2 & \text{otherwise} \end{cases} \quad (38)$$

or, equivalently:

$$\mathcal{L}_2 = \max(0, 1 - y(w^T x + b))^2 \quad (39)$$

It is a strictly convex function and its gradient wrt w is given by:

$$\frac{\partial \mathcal{L}_2}{\partial w} = \begin{cases} -2yx & \text{if } y(w^T x + b) < 1 \\ 0 & \text{otherwise} \end{cases} \quad (40)$$

3.2.1 Primal formulation

Since smoothed versions of objective functions may be preferred for optimization, we can reformulate (10) as:

$$\min_{w, b} \frac{1}{2} \|w\|^2 + C \sum_{i=1}^n \max(0, 1 - y_i(w^T x_i + b))^2 \quad (41)$$

where we make use of the *squared hinge* loss that quadratically penalized slacks ξ and is called \mathcal{L}_2 -SVC.



Figure 3: SVC Squared Hinge loss with different optimization steps

4 Linear Support Vector Regression

In the case of regression the goal is to predict a real-valued output for y' so that our training data is of the form:

$$\{(x_i, y_i), x \in \mathbb{R}^m, y_i \in \mathbb{R}, i = 1, \dots, n\} \quad (42)$$

The regression SVM use a loss function that not allocating a penalty if the predicted value y'_i is less than a distance ϵ away from the actual value y_i , i.e., if $|y_i - y'_i| \leq \epsilon$, where $y'_i = w^T x_i + b$. The region bound by $y'_i \pm \epsilon \forall_i$ is called an ϵ -insensitive tube. The output variables which are outside the tube are given one of two slack variable penalties depending on whether they lie above, ξ^+ , or below, ξ^- , the tube, provided $\xi^+ \geq 0$ and $\xi^- \geq 0 \forall_i$:

$$\begin{aligned} y_i &\leq y'_i + \epsilon + \xi^+ \forall_i \\ y_i &\geq y'_i - \epsilon - \xi^- \forall_i \\ \xi_i^+, \xi_i^- &\geq 0 \forall_i \end{aligned} \quad (43)$$

The objective function for SVR can then be written as:

$$\begin{aligned} \min_{w, b, \xi^+, \xi^-} \quad & \frac{1}{2} \|w\|^2 + C \sum_{i=1}^n (\xi_i^+ + \xi_i^-) \\ \text{subject to} \quad & y_i - w^T x_i - b \leq \epsilon + \xi_i^+ \forall_i \\ & w^T x_i + b - y_i \leq \epsilon + \xi_i^- \forall_i \\ & \xi_i^+, \xi_i^- \geq 0 \forall_i \end{aligned} \quad (44)$$



Figure 4: Linear SVR hyperplane

4.1 Epsilon-insensitive loss

The *epsilon-insensitive* loss is defined as:

$$\mathcal{L}_\epsilon = \begin{cases} 0 & \text{if } |y - (w^T x + b)| \leq \epsilon \\ |y - (w^T x + b)| - \epsilon & \text{otherwise} \end{cases} \quad (45)$$

or, equivalently:

$$\mathcal{L}_\epsilon = \max(0, |y - (w^T x + b)| - \epsilon) \quad (46)$$

As the *hinge* loss, also the *epsilon-insensitive* loss is a nondifferentiable convex function due to its nonsmoothness in $\pm\epsilon$, but has a subgradient wrt w that is given by:

$$\frac{\partial \mathcal{L}_\epsilon}{\partial w} = \begin{cases} (y - (w^T x + b))x & \text{if } |y - (w^T x + b)| > \epsilon \\ 0 & \text{otherwise} \end{cases} \quad (47)$$

4.1.1 Primal formulation

The general primal unconstrained formulation takes the same form of (9).

The quadratic optimization problem (44) can be equivalently formulated as:

$$\min_{w,b} \frac{1}{2} \|w\|^2 + C \sum_{i=1}^n \max(0, |y_i - (w^T x_i + b)| - \epsilon) \quad (48)$$

where we make use of the *epsilon-insensitive* loss (45) or (46).

The above formulation penalizes slacks ξ linearly and is called \mathcal{L}_1 -SVR.



Figure 5: SVR Epsilon-insensitive loss with different optimization steps

4.1.2 Wolfe Dual formulation

To reformulate the (44) as a *Wolfe dual*, we introduce the Lagrange multipliers $\alpha_i^+ \geq 0, \alpha_i^- \geq 0, \mu_i^+ \geq 0, \mu_i^- \geq 0 \forall_i$:

$$\begin{aligned} \max_{\alpha^+, \alpha^-, \mu^+, \mu^-} \min_{w, b, \xi^+, \xi^-} \mathcal{W}(w, b, \xi^+, \xi^-, \alpha^+, \alpha^-, \mu^+, \mu^-) = & \frac{1}{2} \|w\|^2 + C \sum_{i=1}^n (\xi_i^+ + \xi_i^-) - \sum_{i=1}^n (\mu_i^+ \xi_i^+ + \mu_i^- \xi_i^-) \\ & - \sum_{i=1}^n \alpha_i^+ (\epsilon + \xi_i^+ + y'_i - y_i) - \sum_{i=1}^n \alpha_i^- (\epsilon + \xi_i^- - y'_i + y_i) \end{aligned} \quad (49)$$

Substituting for y_i , differentiating wrt w, b, ξ^+, ξ^- and setting the derivatives to 0 gives:

$$\frac{\partial \mathcal{W}}{\partial w} = w - \sum_{i=1}^n (\alpha_i^+ - \alpha_i^-) x_i \Rightarrow w = \sum_{i=1}^n (\alpha_i^+ - \alpha_i^-) x_i \quad (50)$$

$$\frac{\partial \mathcal{W}}{\partial b} = - \sum_{i=1}^n (\alpha_i^+ - \alpha_i^-) \Rightarrow \sum_{i=1}^n (\alpha_i^+ - \alpha_i^-) = 0 \quad (51)$$

$$\frac{\partial \mathcal{W}}{\partial \xi_i^+} = 0 \Rightarrow C = \alpha_i^+ + \mu_i^+ \quad (52)$$

$$\frac{\partial \mathcal{W}}{\partial \xi_i^-} = 0 \Rightarrow C = \alpha_i^- + \mu_i^- \quad (53)$$

Substituting (50) and (51) in, we now need to maximize \mathcal{W} wrt α_i^+ and α_i^- , where $\alpha_i^+ \geq 0, \alpha_i^- \geq 0 \forall_i$:

$$\max_{\alpha^+, \alpha^-} \mathcal{W}(\alpha^+, \alpha^-) = \sum_{i=1}^n y_i (\alpha_i^+ - \alpha_i^-) - \epsilon \sum_{i=1}^n (\alpha_i^+ + \alpha_i^-) - \frac{1}{2} \sum_{i,j} (\alpha_i^+ - \alpha_i^-) \langle x_i, x_j \rangle (\alpha_j^+ - \alpha_j^-) \quad (54)$$

Using $\mu_i^+ \geq 0$ and $\mu_i^- \geq 0$ together with (50) and (51) means that $\alpha_i^+ \leq C$ and $\alpha_i^- \leq C$. We therefore need to find:

$$\begin{aligned} \min_{\alpha^+, \alpha^-} \quad & \frac{1}{2}(\alpha^+ - \alpha^-)^T K(\alpha^+ - \alpha^-) + \epsilon q^T(\alpha^+ + \alpha^-) - y^T(\alpha^+ - \alpha^-) \\ \text{subject to} \quad & 0 \leq \alpha_i^+, \alpha_i^- \leq C \quad \forall_i \\ & q^T(\alpha^+ - \alpha^-) = 0 \end{aligned} \quad (55)$$

where $q^T = [1, \dots, 1]$.

We can write the (55) in a standard quadratic form as:

$$\begin{aligned} \min_{\alpha} \quad & \frac{1}{2}\alpha^T Q\alpha - q^T\alpha \\ \text{subject to} \quad & 0 \leq \alpha_i \leq C \quad \forall_i \\ & e^T\alpha = 0 \end{aligned} \quad (56)$$

where the Hessian matrix Q is $\begin{bmatrix} K & -K \\ -K & K \end{bmatrix}$, q is $\begin{bmatrix} -y \\ y \end{bmatrix} + \epsilon$, and e is $\begin{bmatrix} 1 \\ -1 \end{bmatrix}$.

Each new predictions y' can be found using:

$$y' = \sum_{i=1}^n (\alpha_i^+ - \alpha_i^-) \langle x_i, x' \rangle + b \quad (57)$$

A set S of support vectors x_s can be created by finding the indices i where $0 \leq \alpha \leq C$ and $\xi_i^+ = 0$ or $\xi_i^- = 0$. This gives us:

$$b = y_s - \epsilon - \sum_{m \in S} (\alpha_m^+ - \alpha_m^-) \langle x_m, x_s \rangle \quad (58)$$

As before it is better to average over all the indices i in S :

$$b = \frac{1}{N_s} \sum_{s \in S} y_s - \epsilon - \sum_{m \in S} (\alpha_m^+ - \alpha_m^-) \langle x_m, x_s \rangle \quad (59)$$

From (56) we can notice that the equality constraint $e^T\alpha = 0$ arises from the stationarity condition $\partial_b \mathcal{W} = 0$. So, again, for simplicity, we can again consider the bias term b embedded into the weight vector. We report below the box-constrained dual formulation [13] that arises from the primal (11) or (12) where the bias term b is embedded into the weight vector w :

$$\begin{aligned} \min_{\alpha} \quad & \frac{1}{2}\alpha^T (Q + ee^T)\alpha + q^T\alpha \\ \text{subject to} \quad & 0 \leq \alpha_i \leq C \quad \forall_i \end{aligned} \quad (60)$$

4.1.3 Lagrangian Dual formulation

In order to relax the constraints in the *Wolfe dual* formulation (55) we define the problem as a *Lagrangian dual* relaxation by embedding them into objective function, so we need to allocate the Lagrangian multipliers $\mu \geq 0, \lambda_+ \geq 0, \lambda_- \geq 0$:

$$\begin{aligned} \max_{\mu, \lambda_+, \lambda_-} \min_{\alpha} \mathcal{L}(\alpha, \mu, \lambda_+, \lambda_-) &= \frac{1}{2}\alpha^T Q\alpha + q^T\alpha - \mu^T(e^T\alpha) - \lambda_+^T(u - \alpha) - \lambda_-^T\alpha \\ &= \frac{1}{2}\alpha^T Q\alpha + (q - \mu e + \lambda_+ - \lambda_-)^T\alpha - \lambda_+^T u \end{aligned} \quad (61)$$

where the upper bound $u^T = [C, \dots, C]$.

Taking the derivative of the Lagrangian \mathcal{L} wrt α and settings it to 0 gives:

$$\frac{\partial \mathcal{L}}{\partial \alpha} = 0 \Rightarrow Q\alpha + (q - \mu e + \lambda_+ - \lambda_-) = 0 \quad (62)$$

With α optimal solution of the linear system:

$$Q\alpha = -(q - \mu e + \lambda_+ - \lambda_-) \quad (63)$$

the gradient wrt μ , λ_+ and λ_- are:

$$\frac{\partial \mathcal{L}}{\partial \mu} = -e\alpha \quad (64)$$

$$\frac{\partial \mathcal{L}}{\partial \lambda_+} = \alpha - u \quad (65)$$

$$\frac{\partial \mathcal{L}}{\partial \lambda_-} = -\alpha \quad (66)$$

If the Hessian matrix Q is not positive definite, i.e., the Lagrangian function is not strictly convex since it will be linear along the eigenvectors correspondent to the null eigenvalues and so it will be unbounded below, the Lagrangian dual relaxation will be nondifferentiable, so it will have infinite solutions and for each of them it will have a different subgradient. In order to compute an approximation of the gradient, we will choose α in such a way as the one that minimizes the norm of the residual:

$$\min_{\alpha_n \in K_n(Q, b)} \|Q\alpha_n - b\| \quad (67)$$

where $b = -(q - \mu e + \lambda_+ - \lambda_-)$

Since we are dealing with a symmetric but indefinite linear system we will choose a well-known Krylov method that performs the Lanczos iterate, i.e., symmetric Arnoldi iterate, called *minres*, i.e., symmetric *gmres*, to compute the vector α_n that minimizes the norm of the residual $r_n = Q\alpha_n - b$ among all vectors in $K_n(Q, b) = \text{span}(b, Qb, Q^2b, \dots, Q^{n-1}b)$.

From (56) we can notice that the equality constraint $e^T \alpha = 0$ arises from the stationarity condition $\partial_b \mathcal{W} = 0$. So, again, for simplicity, we can again consider the bias term b embedded into the weight vector. In this way the dimensionality of (61) is reduced of 1/3 by removing the multipliers μ which was allocated to control the equality constraint $e^T \alpha = 0$, so we will end up solving exactly the problem (60).

$$\begin{aligned} \max_{\lambda_+, \lambda_-} \min_{\alpha} \mathcal{L}(\alpha, \lambda_+, \lambda_-) &= \frac{1}{2} \alpha^T (Q + ee^T) \alpha + q^T \alpha - \lambda_+^T (u - \alpha) - \lambda_-^T \alpha \\ &= \frac{1}{2} \alpha^T (Q + ee^T) \alpha + (q + \lambda_+ - \lambda_-)^T \alpha - \lambda_+^T u \end{aligned} \quad (68)$$

where, again, the upper bound $u^T = [C, \dots, C]$.

Now, taking the derivative of the Lagrangian \mathcal{L} wrt α and settings it to 0 gives:

$$\frac{\partial \mathcal{L}}{\partial \alpha} = 0 \Rightarrow (Q + ee^T) \alpha + (q + \lambda_+ - \lambda_-) = 0 \quad (69)$$

With α optimal solution of the linear system:

$$(Q + ee^T) \alpha = -(q + \lambda_+ - \lambda_-) \quad (70)$$

the gradient wrt λ_+ and λ_- are:

$$\frac{\partial \mathcal{L}}{\partial \lambda_+} = \alpha - u \quad (71)$$

$$\frac{\partial \mathcal{L}}{\partial \lambda_-} = -\alpha \quad (72)$$

4.2 Squared Epsilon-insensitive loss

The *squared epsilon-insensitive* loss is defined as:

$$\mathcal{L}_\epsilon^2 = \begin{cases} 0 & \text{if } |y - (w^T x + b)| \leq \epsilon \\ (|y - (w^T x + b)| - \epsilon)^2 & \text{otherwise} \end{cases} \quad (73)$$

or, equivalently:

$$\mathcal{L}_\epsilon^2 = \max(0, |y - (w^T x + b)| - \epsilon)^2 \quad (74)$$

As the *squared hinge* loss, also the *squared epsilon-insensitive* loss is a strictly convex function and it has a gradient wrt w that is given by:

$$\frac{\partial \mathcal{L}_\epsilon^2}{\partial w} = \begin{cases} 2((y - (w^T x + b))x) & \text{if } |y - (w^T x + b)| > \epsilon \\ 0 & \text{otherwise} \end{cases} \quad (75)$$

4.2.1 Primal formulation

To provide a continuously differentiable function the optimization problem (48) can be formulated as:

$$\min_{w,b} \frac{1}{2} \|w\|^2 + C \sum_{i=1}^n \max(0, |y_i - (w^T x_i + b)| - \epsilon)^2 \quad (76)$$

where we make use of the *squared epsilon-insensitive* loss that quadratically penalized slacks ξ and is called \mathcal{L}_2 -SVR.



Figure 6: SVC Squared Epsilon-insensitive loss with different optimization steps

5 Nonlinear Support Vector Machines

When applying our SVC to *linearly separable* data in (17), we have started by creating a matrix Q from the dot product of our input variables:

$$Q_{ij} = y_i y_j k(x_i, x_j) \quad (77)$$

or, a matrix K from the dot product of our input variables in the SVR case (55):

$$K_{ij} = k(x_i, x_j) \quad (78)$$

where $k(x_i, x_j)$ is an example of a family of functions called *kernel functions* and:

$$k(x_i, x_j) = \langle \phi(x_i), \phi(x_j) \rangle = \phi(x_i)^T \phi(x_j) \quad (79)$$

where $\phi(\cdot)$ is the identity function, is known as *linear kernel*.

The reason that this *kernel trick* is useful is that there are many classification/regression problems that are nonlinearly separable/regressable in the *input space*, which might be in a higher dimensionality *feature space* given a suitable mapping $x \rightarrow \phi(x)$.

5.1 Polynomial kernel

The *polynomial* kernel is defined as:

$$k(x_i, x_j) = (\gamma \langle x_i, x_j \rangle + r)^d \quad (80)$$

where γ define how far the influence of a single training example reaches (low values meaning ‘far’ and high values meaning ‘close’).



(a) Polynomial SVC hyperplane



(b) Polynomial SVR hyperplane

Figure 7: Polynomial SVM hyperplanes

5.2 Gaussian RBF kernel

The *gaussian* kernel is defined as:

$$k(x_i, x_j) = \exp\left(-\frac{\|x_i - x_j\|^2}{2\sigma^2}\right) \quad (81)$$

or, equivalently:

$$k(x_i, x_j) = \exp(-\gamma \|x_i - x_j\|^2) \quad (82)$$

where $\gamma = \frac{1}{2\sigma^2}$ define how far the influence of a single training example reaches (low values meaning ‘far’ and high values meaning ‘close’).



(a) Gaussian SVC hyperplane



(b) Gaussian SVR hyperplane

Figure 8: Gaussian SVM hyperplanes

6 Optimization Methods

In order to explain the *convergence* and *efficiency* properties of the following optimization methods, we need to introduce some preliminary definitions about *convexity* and the *L-smoothness* of a function [14].

Definition 1 (Convexity).

i We say that a function $f : \mathbb{R}^m \rightarrow \mathbb{R}$ is convex if:

$$(\lambda x + (1 - \lambda)y) \leq \lambda f(x) + (1 - \lambda)f(y) \quad \forall x, y \in \mathbb{R}^m, \lambda \in [0, 1]$$

ii We say that a differentiable function $f : \mathbb{R}^m \rightarrow \mathbb{R}$, i.e., $f \in C^1$, is convex if:

$$f(x) \geq f(y) + \langle \nabla f(y), x - y \rangle \quad \forall x, y \in \mathbb{R}^m$$

iii We say that a twice differentiable function $f : \mathbb{R}^m \rightarrow \mathbb{R}$, i.e., $f \in C^2$ and the Hessian matrix is *symmetric*, is convex iff:

$$\nabla^2 f(x) \succeq 0 \quad \forall x \in \mathbb{R}^m$$

i.e., the Hessian matrix is *positive semidefinite*.

Definition 2 (Strong Convexity). We say that a function $f : \mathbb{R}^m \rightarrow \mathbb{R}$ is μ -strongly convex if the function:

$$g(x) = f(x) - \frac{\mu}{2} \|x\|^2$$

is convex for any $\mu > 0$. If f is differentiable, i.e., $f \in C^1$, this is also equivalent to:

$$f(y) \geq f(x) + \langle \nabla f(x), y - x \rangle + \frac{\mu}{2} \|y - x\|^2 \quad \forall x, y \in \mathbb{R}^m$$

and, if f is a twice differentiable function, i.e., $f \in C^2$ and the Hessian matrix is *symmetric*, then f is μ -strongly convex iff:

$$\nabla^2 f(x) \succ 0 \quad \forall x \in \mathbb{R}^m$$

i.e., the Hessian matrix is *positive definite*, which is:

$$\nabla^2 f(x) \succeq \mu \quad \forall x \in \mathbb{R}^m$$

Definition 3 (L-smoothness). We say that a function $f : \mathbb{R}^m \rightarrow \mathbb{R}$ is L-smooth, i.e., L-Lipschitz continuous, if it is differentiable and if:

$$\|\nabla f(x) - \nabla f(y)\| \leq L\|x - y\| \quad \forall x, y \in \mathbb{R}^m$$

6.1 Gradient Descent

The Gradient Descent algorithm is the simplest *first-order optimization* method that exploits the orthogonality of the gradient wrt the level sets to take a descent direction. In particular, it performs the following iterations:

Algorithm 1 Gradient Descent

Require: Function f to minimize

Require: Learning rate or step size $\alpha > 0$

function GRADIENTDESCENT(f, α)

 Initialize weight vector x_0

$t = 0$

while *not_convergence* **do**

$x_{t+1} = x_t - \alpha \nabla f(x_t)$

$t = t + 1$

end while

return x_t

end function

Theorem 4 (Gradient Descent convergence for convex functions). *Let $f : \mathbb{R}^m \rightarrow \mathbb{R}$ be a L -smooth convex function. Let x_* be the minimum of f on \mathbb{R}^m . Then the Gradient Descent with step size $\alpha \leq 1/L$ satisfies:*

$$f(x_t) - f(x_*) \leq \frac{\|x_0 - x_*\|^2}{2\alpha t}$$

In particular, for $\alpha = 1/L$:

$$f(x_t) - f(x_*) \leq \frac{L\|x_0 - x_*\|^2}{2t}$$

Theorem 5 (Gradient Descent convergence for strongly convex functions). *Let $f : \mathbb{R}^m \rightarrow \mathbb{R}$ be a L -smooth, μ strongly convex function. Let x_* be the minimum of f on \mathbb{R}^m . Then the Gradient Descent with step size $\alpha \leq 1/L$ satisfies:*

$$f(x_t) - f(x_*) \leq (1 - \alpha\mu)^t \|x_0 - x_*\|^2$$

In particular, for $\alpha = 1/L$:

$$\begin{aligned} f(x_t) - f(x_*) &\leq \left(1 - \frac{\mu}{L}\right)^t \|x_0 - x_*\|^2 \\ &= \left(1 - \frac{1}{\kappa}\right)^t \|x_0 - x_*\|^2 \end{aligned}$$

where $\kappa = L/\mu$.

Gradient Descent is based on full gradients, since at each iteration we compute the average gradient on the whole dataset:

$$\nabla f(x) = \frac{1}{n} \sum_{i=1}^n \nabla f_i(x)$$

The downside is that every step is very computationally expensive, $\mathcal{O}(nm)$ per iteration, where n is the number of samples in our dataset and m is the number of dimensions.

Since *Gradient Descent* becomes impractical when dealing with large datasets we introduce a stochastic version, called *Stochastic Gradient Descent*, which does not use the whole set of examples to compute the gradient at every step. By doing so, we can reduce computation all the way down to $\mathcal{O}(m)$ per iteration, instead of $\mathcal{O}(nm)$.

Algorithm 2 Stochastic Gradient Descent**Require:** Function f to minimize**Require:** Learning rate or step size $\alpha > 0$ **Require:** Batch size k **function** STOCHASTICGRADIENTDESCENT(f, α, k) Initialize weight vector x_0 $t \leftarrow 0$ **while** *not_convergence* **do** Sample $(i_1, \dots, i_k) \sim \mathcal{U}^k(1, \dots, n)$

$$x_{t+1} \leftarrow x_t - \alpha \frac{1}{k} \sum_{j=1}^k \nabla f_{i_j}(x_t)$$

 $t \leftarrow t + 1$ **end while** **return** x_t **end function**

Note that in expectation, we converge like GD, since $\mathbb{E}_{i \sim \mathcal{U}(1, \dots, n)}[\nabla f_i(x_t)] = \nabla f(x_t)$, therefore, the expected iterate of SGD converges to the optimum.

SGD's convergence rate for L -smooth convex functions is $\mathcal{O}\left(\frac{1}{\sqrt{t}}\right)$ and $\mathcal{O}\left(\frac{1}{t}\right)$ for strongly convex. More iterations are needed to reach the same accuracy as GD, but the iterations are far cheaper.

6.1.1 Momentum

To mitigate the pathological zig-zagging of the SGD method we introduce two accelerated methods [1] and [2] that exploits information from the history, i.e., past iterates, to add some inertia, i.e., the momentum, to yield smoother trajectory.

In the Polyak's method [1] the velocity vector v_t is calculated by applying the β momentum to the previous v_{t-1} displacement, and subtracting the gradient step to x_t .



Polyak's Momentum**Nesterov's Momentum**

Figure 9: Polyak's and Nesterov's Momentum

Algorithm 3 Polyak Accelerated Gradient Descent or Heavy-Ball method

Require: Function f to minimize**Require:** Learning rate or step size $\alpha > 0$ **Require:** Momentum $\beta \in [0, 1)$

```

function POLYAKACCELERATEDGRADIENTDESCENT( $f, \alpha, \beta$ )
  Initialize weight vector  $x_1 \leftarrow x_0$  and velocity vector  $v_0 \leftarrow 0$ 
   $t \leftarrow 1$ 
  while not_convergence do
     $v_t = \beta v_{t-1} + \alpha \nabla f(x_t)$ 
     $x_{t+1} = x_t - v_t$ 
     $t \leftarrow t + 1$ 
  end while
  return  $x_t$ 
end function

```

Leveraging the idea of momentum introduced by Polyak, Nesterov introduced a slightly altered update rule that has been shown to converge not only for quadratic functions, but for general convex functions. In the Nesterov's method [2], instead, the velocity vector v_t is calculated by applying the β momentum to the previous v_{t-1} displacement, and subtracting the gradient step to $x_t + \beta v_{t-1}$, which is the point where the momentum term leads from x_t .

Algorithm 4 Nesterov Accelerated Gradient Descent

Require: Function f to minimize**Require:** Learning rate $\alpha > 0$ **Require:** Momentum $\beta \in [0, 1)$

```

function NESTEROVACCELERATEDGRADIENTDESCENT( $f, \alpha, \beta$ )
  Initialize weight vector  $x_1 \leftarrow x_0$  and velocity vector  $v_0 \leftarrow 0$ 
   $t \leftarrow 1$ 
  while not_convergence do
     $\hat{x}_t \leftarrow x_t + \beta v_{t-1}$ 
     $v_t \leftarrow \beta v_{t-1} + \alpha \nabla f(\hat{x}_t)$ 
     $x_{t+1} \leftarrow x_t - v_t$ 
     $t \leftarrow t + 1$ 
  end while
  return  $x_t$ 
end function

```

Comparing the algorithm 3 with the algorithm 4, we can see that Polyak's method evaluates the gradient before adding momentum, whereas Nesterov's algorithm evaluates it after applying momentum, which intuitively brings us closer to the minimum x^* , as shown in figure 9.

Theorem 6 (Nesterov Accelerated Gradient Descent convergence for convex functions). *Let $f : \mathbb{R}^m \rightarrow \mathbb{R}$ be a L -smooth convex function. Let x_* be the minimum of f on \mathbb{R}^m . Then the Gradient Descent with step size $\alpha \leq 1/L$ and $\beta_{t+1} = t/(t+3)$ satisfies:*

$$f(x_t) - f(x_*) \leq \frac{2\|x_0 - x_*\|^2}{\alpha(t+1)^2}$$

In particular, for $\alpha = 1/L$:

$$f(x_t) - f(x_*) \leq \frac{2L\|x_0 - x_*\|^2}{(t+1)^2}$$

Theorem 7 (Nesterov Accelerated Gradient Descent convergence for strongly convex functions). *Let $f : \mathbb{R}^m \rightarrow \mathbb{R}$ be a L -smooth, μ strongly convex function. Let x_* be the minimum of f on \mathbb{R}^m . Then the Gradient Descent with step size $\alpha \leq 1/L$ and $\beta_t = \frac{1 - \sqrt{\mu/L}}{1 + \sqrt{\mu/L}} = \frac{1 - 1/\sqrt{\kappa}}{1 + 1/\sqrt{\kappa}}$ satisfies:*

$$\begin{aligned} f(x_t) - f(x_*) &\leq \frac{\|x_0 - x_*\|^2}{\alpha} \left(1 - \sqrt{\frac{\mu}{L}}\right)^t \\ &= \frac{\|x_0 - x_*\|^2}{\alpha} \left(1 - \frac{1}{\sqrt{\kappa}}\right)^t \end{aligned}$$

In particular, for $\alpha = 1/L$:

$$\begin{aligned} f(x_t) - f(x_*) &\leq L\|x_0 - x_*\|^2 \left(1 - \sqrt{\frac{\mu}{L}}\right)^t \\ &= L\|x_0 - x_*\|^2 \left(1 - \frac{1}{\sqrt{\kappa}}\right)^t \end{aligned}$$

where $\kappa = L/\mu$.

Nesterov momentum brings the rate of convergence from $\mathcal{O}\left(\frac{1}{t}\right)$ to $\mathcal{O}\left(\frac{1}{t^2}\right)$ and in the case of smooth and strongly convex functions gives the acceleration that we had with Polyak's momentum for quadratic functions. This is great, because we get the guarantee for a more general class of functions.

We can write the iteration complexity of these methods, i.e., the smallest t such that we're within ϵ , for a L -smooth and μ -strongly convex function as $\mathcal{O}\left(\kappa \log \frac{1}{\epsilon}\right)$ for the standard GD method, $\mathcal{O}\left(\sqrt{\kappa} \log \frac{1}{\epsilon}\right)$ for the Polyak's method and, finally, $\mathcal{O}\left(\frac{1}{\sqrt{\epsilon}}\right)$ for the NAG method to get ϵ -close to global optimum and where κ , i.e., the *conditioning number*, is defined as $\kappa = L/\mu$ and where L and μ are also equal to the smallest and the largest eigenvalues λ_{min} and λ_{max} respectively.

6.2 AdaGrad

Due to the sparsity of the weight vector of the *Lagrangian dual*, i.e., the Lagrange multipliers, we might end up in a situation where some components of the gradient are very small and others large. This, in terms of *conditioning number*, i.e., $\kappa = L/\mu \gg 1$, means that the level sets of f are ellipsoid, i.e., we are dealing with an ill-conditioned problem. So, given a learning rate, a standard gradient descent approach might end up in a situation where it decreases too quickly the small weights or too slowly the large ones.

Another method, that is usually deprecated in ML applications due to its increased computational complexity, is Newton's method. Newton's method favors a much faster convergence rate, i.e., number of iterations, at the cost of being more expensive per iteration. For convex problems, the recursion is similar to the gradient descent algorithm:

$$x_{t+1} = x_t - \alpha H^{-1} \nabla f(x_t)$$

where α is often close to one (damped-Newton) or one, and H^{-1} denotes the Hessian of f at the current point, i.e., $\nabla^2 f(x_t)$.

The above suggest a general rule in optimization: find any preconditioner, in convex optimization it has to be positive semidefinite, that improves the performance of gradient descent in terms of iterations, but without wasting too much time to compute that preconditioner. The above result into:

$$x_{t+1} = x_t - \alpha P^{-1} \nabla f(x_t)$$

where P is the preconditioner. This idea is the basis of the BFGS quasi-Newton method.

The *AdaGrad* [5] algorithm is just a variant of preconditioned gradient descent, where P is selected to be a diagonal preconditioner matrix and is updated using the gradient information, in particular it is the diagonal approximation of the inverse of the square roots of gradient outer products, until the k -th iteration. The above lead to the algorithm:

Algorithm 5 AdaGrad

Require: Function f to minimize

Require: Learning rate or step size $\alpha > 0$

Require: Offset $\epsilon > 0$ to ensures not divide by 0

function ADAGRAD(f, α, ϵ)

 Initialize weight vector x_0 and the squared accumulated gradients vector $s_t \leftarrow 0$
 $t = 1$

while *not_convergence* **do**

$g_t \leftarrow \nabla f(x_t)$

$s_t \leftarrow s_{t-1} + g_t^2$

$x_{t+1} \leftarrow x_t - \alpha P_t^{-1} g_t = x_t - \frac{\alpha}{\sqrt{s_t + \epsilon}} \odot g_t$ where $P_t \leftarrow \text{diag}(s_t + \epsilon)^{1/2}$

$t \leftarrow t + 1$

end while

return x_t

end function

In practical terms, *AdaGrad* addresses the problem of the sparse optimal by adaptively scaling the learning rate for each dimension with the magnitude of the gradients. Coordinates that routinely correspond to large gradients are scaled down significantly, whereas others with small gradients receive a much more gentle treatment. *AdaGrad*'s convergence rate for L-smooth convex functions is $\mathcal{O}\left(\frac{1}{\sqrt{t}}\right)$.

6.3 Sequential Minimal Optimization

The *Sequential Minimal Optimization (SMO)* [3] method is the most popular approach for solving the SVM QP problem without any extra Q matrix storage required by common QP methods. The advantage of SMO lies in the fact that it performs a series of two-point optimizations since we deal with just one equality constraint, so the Lagrange multipliers can be solved analytically.

6.3.1 Classification

At each iteration, SMO chooses two α_i to jointly optimize, let α_1 and α_2 , finds the optimal values for these multipliers and update the SVM to reflect these new values. In order to solve for two Lagrange multipliers, SMO first computes the constraints over these and then solves for the constrained minimum. Since there are only two multipliers, the box-constraints cause the Lagrange multipliers to lie within a box, while the linear equality constraint causes the Lagrange multipliers to lie on a diagonal line inside the box. So, the constrained minimum must lie there as shown in 10.



Figure 10: SMO for two Lagrange multipliers

In case of classification the ends of the diagonal line segment, i.e., the lower and upper bounds, can be expressed as follow if the target $y_1 \neq y_2$:

$$\begin{aligned} L &= \max(0, \alpha_2 - \alpha_1) \\ H &= \min(C, C + \alpha_2 - \alpha_1) \end{aligned} \quad (83)$$

or, alternatively, if the target $y_1 = y_2$:

$$\begin{aligned} L &= \max(0, \alpha_2 + \alpha_1 - C) \\ H &= \min(C, \alpha_2 + \alpha_1) \end{aligned} \quad (84)$$

The second derivative of the objective quadratic function along the diagonal line can be expressed as:

$$\eta = K(x_1, x_1) + K(x_2, x_2) - 2K(x_1, x_2) \quad (85)$$

that will be grather than zero if the kernel matrix will be positive definite, so there will be a minimum along the linear equality constraints that will be:

$$\alpha_2^{new} = \alpha_2 + \frac{y_2(E_1 - E_2)}{\eta} \quad (86)$$

where $E_i = y_i - y'_i$ is the error on the i -th training example and y'_i is the output of the SVC for the same.

Then, the box-constrained minimum is found by clipping the unconstrained minimum to the ends of the line segment:

$$\alpha_2^{new, clipped} = \begin{cases} H & \text{if } \alpha_2^{new} \geq H \\ \alpha_2^{new} & \text{if } L < \alpha_2^{new} < H \\ L & \text{if } \alpha_2^{new} \leq L \end{cases} \quad (87)$$

Finally, the value of α_1 is computed from the new clipped α_2 as:

$$\alpha_1^{new} = \alpha_1 + s(\alpha_2 - \alpha_2^{new,clipped}) \quad (88)$$

where $s = y_1 y_2$.

Since the *Karush-Kuhn-Tucker* conditions are necessary and sufficient conditions for optimality of a positive definite QP problem and the KKT conditions for the classification problem (18) are:

$$\begin{aligned} \alpha_i &= 0 \Leftrightarrow y_i y'_i \geq 1 \\ 0 < \alpha_i < C &\Leftrightarrow y_i y'_i = 1 \\ \alpha_i &= C \Leftrightarrow y_i y'_i \leq 1 \end{aligned} \quad (89)$$

the steps described above will be iterate as long as there will be an example that violates them.

After optimizing α_1 and α_2 , we select the threshold b such that the KKT conditions are satisfied for x_1 and x_2 . If, after optimization, α_1 is not at the bounds, i.e., $0 < \alpha_1 < C$, then the following threshold b_{up} is valid, since it forces the SVC to output y_1 when the input is x_1 :

$$b_{up} = E_1 + y_1(\alpha_1^{new} - \alpha_1)K(x_1, x_1) + y_2(\alpha_2^{new,clipped} - \alpha_2)K(x_1, x_2) + b \quad (90)$$

similarly, the following threshold b_{low} is valid if $0 < \alpha_2 < C$:

$$b_{low} = E_2 + y_1(\alpha_1^{new} - \alpha_1)K(x_1, x_2) + y_2(\alpha_2^{new,clipped} - \alpha_2)K(x_2, x_2) + b \quad (91)$$

If, after optimization, both $0 < \alpha_1 < C$ and $0 < \alpha_2 < C$ then both these thresholds are valid, and they will be equal; else, if both α_1 and α_2 are at the bounds, i.e., $\alpha_1 = 0$ or $\alpha_1 = C$ and $\alpha_2 = 0$ or $\alpha_2 = C$, then all the thresholds between b_{up} and b_{low} satisfy the KKT conditions, so we choose the threshold to be halfway in between b_{up} and b_{low} . This gives the complete equation for b :

$$b = \begin{cases} b_{up} & \text{if } 0 < \alpha_1 < C \\ b_{low} & \text{if } 0 < \alpha_2 < C \\ \frac{b_{up} + b_{low}}{2} & \text{otherwise} \end{cases} \quad (92)$$

Algorithm 6 Sequential Minimal Optimization for Classification

Require: Training examples matrix $X \in \mathbb{R}^{n \times m}$
Require: Training target vector $y \in \pm 1^n$
Require: Kernel matrix $K \in \mathbb{R}^{n \times n}$
Require: Regularization parameter $C > 0$
Require: Tolerance value tol for stopping criterion

function SMOCLASSIFIER(X, y, K, C, tol)
 Initialize the Lagrange multipliers vector $\alpha \in \mathbb{R}^n, \alpha \leftarrow 0$
 Initialize the empty set $I0 \leftarrow \{i : 0 < \alpha_i < C\}$
 Initialize the set $I1 \leftarrow \{i : y_i = +1, \alpha_i = 0\}$ to contain all the indices of the training examples of class +1
 Initialize the empty set $I2 \leftarrow \{i : y_i = -1, \alpha_i = C\}$
 Initialize the empty set $I3 \leftarrow \{i : y_i = +1, \alpha_i = C\}$
 Initialize the set $I4 \leftarrow \{i : y_i = -1, \alpha_i = 0\}$ to contain all the indices of the training examples of class -1
 Initialize $b_{up} \leftarrow -1$
 Initialize $b_{low} \leftarrow +1$
 Initialize the error cache vector $errors \in \mathbb{R}^n, errors \leftarrow 0$
while $num_changed > 0$ **or** $examine_all = True$ **do**
 $num_changed \leftarrow 0$
 $examine_all \leftarrow True$
 if $examine_all = True$ **then**
 for $i \leftarrow 0$ to n **do** ▷ loop over all training examples
 $num_changed \leftarrow num_changed + EXAMINEEXAMPLE(i)$
 end for
 else
 for i in $I0$ **do** ▷ loop over examples where α_i are not already at their bounds
 $num_changed \leftarrow num_changed + EXAMINEEXAMPLE(i)$
 if $b_{up} > b_{low} - 2tol$ **then** ▷ check if optimality on $I0$ is attained
 $num_changed \leftarrow 0$
 break
 end if
 end for
 end if
 if $examine_all = True$ **then**
 $examine_all \leftarrow False$
 else if $num_changed = 0$ **then**
 $examine_all \leftarrow True$
 end if
end while
 Compute b by (92)
return α, b
end function

Require: $i2$ -th Lagrange multiplier

```
function EXAMINEEXAMPLE( $i2$ )  
  if  $i2$  in  $I0$  then  
     $E_2 \leftarrow errors_{i2}$   
  else  
    Compute  $E_2$   
     $errors_{i2} \leftarrow E_2$   
    Update  $(b_{low}, i_{low})$  or  $(b_{up}, i_{up})$  using  $(E_2, i2)$   
  end if  
  if optimality is attained using current  $b_{low}$  and  $b_{up}$  then  
    return 0  
  else  
    Find an index  $i1$  to do joint optimization with  $i2$   
    if TAKESTEP( $i1, i2$ ) = True then  
      return 1  
    else  
      return 0  
    end if  
  end if  
end function
```

Require: $i1$ -th Lagrange multiplier

Require: $i2$ -th Lagrange multiplier

function TAKESTEP($i1, i2$)

if $i1 = i2$ **then**

return False

end if

 Compute L and H using (83) or (84)

if $L = H$ **then**

return False

end if

 Compute η by (85)

\triangleright we assume that $\eta > 0$, i.e., the kernel matrix K is positive definite

if $\eta < 0$ **then**

 Choose $\alpha_2^{new, clipped}$ between L and H according to the largest value of the objective function at these points

else

 Compute α_2^{new} by (86)

 Compute $\alpha_2^{new, clipped}$ by (87)

end if

if changes in $\alpha_2^{new, clipped}$ are larger than some eps **then**

 Compute α_1^{new} by (88)

 Update $\alpha_2^{new, clipped}$ and α_1^{new}

for i in $I0$ **do**

 Update $errors_i$ using new Lagrange multipliers

end for

 Update α using new Lagrange multipliers

 Update $I0, I1, I2, I3$ and $I4$

 Update $errors_{i1}$ and $errors_{i2}$

for i in $I0 \cup \{i1, i2\}$ **do**

 Compute (i_{low}, b_{low}) by $b_{low} = \max\{errors_i : i \in I0 \cup I3 \cup I4\}$

 Compute (i_{up}, b_{up}) by $b_{up} = \min\{errors_i : i \in I0 \cup I1 \cup I2\}$

end for

return True

else

return False

end if

end function

6.3.2 Regression

In case of regression the bounds and the new multipliers $\alpha_1^{+,new}$ and $\alpha_2^{+,new}$ can be expressed as follows if $(\alpha_1^+ > 0 \text{ or } (\alpha_1^- = 0 \text{ and } E_1 - E_2 > 0))$ and $(\alpha_2^+ > 0 \text{ or } (\alpha_2^- = 0 \text{ and } E_1 - E_2 < 0))$:

$$\begin{aligned} L &= \max(0, \gamma - C) \\ H &= \min(C, \gamma) \end{aligned} \quad (93)$$

$$\alpha_2^{+,new} = \alpha_2^+ - \frac{E_1 - E_2}{\eta} \quad (94)$$

$$\alpha_1^{+,new} = \alpha_1^+ - (\alpha_2^{+,new,clipped} - \alpha_2^+) \quad (95)$$

or, if $(\alpha_1^+ > 0 \text{ or } (\alpha_1^- = 0 \text{ and } E_1 - E_2 > 2\epsilon))$ and $(\alpha_2^- > 0 \text{ or } (\alpha_2^+ = 0 \text{ and } E_1 - E_2 > 2\epsilon))$:

$$\begin{aligned} L &= \max(0, -\gamma) \\ H &= \min(C, -\gamma + C) \end{aligned} \quad (96)$$

$$\alpha_2^{-,new} = \alpha_2^- + \frac{(E_1 - E_2) - 2\epsilon}{\eta} \quad (97)$$

$$\alpha_1^{+,new} = \alpha_1^+ + (\alpha_2^{-,new,clipped} - \alpha_2^-) \quad (98)$$

or, if $(\alpha_1^- > 0 \text{ or } (\alpha_1^+ = 0 \text{ and } E_1 - E_2 < -2\epsilon))$ and $(\alpha_2^+ > 0 \text{ or } (\alpha_2^- = 0 \text{ and } E_1 - E_2 < -2\epsilon))$:

$$\begin{aligned} L &= \max(0, \gamma) \\ H &= \min(C, C + \gamma) \end{aligned} \quad (99)$$

$$\alpha_2^{+,new} = \alpha_2^+ - \frac{(E_1 - E_2) + 2\epsilon}{\eta} \quad (100)$$

$$\alpha_1^{-,new} = \alpha_1^- + (\alpha_2^{+,new,clipped} - \alpha_2^+) \quad (101)$$

or, finally, if $(\alpha_1^- > 0 \text{ or } (\alpha_1^+ = 0 \text{ and } E_1 - E_2 < 0))$ and $(\alpha_2^- > 0 \text{ or } (\alpha_2^+ = 0 \text{ and } E_1 - E_2 > 0))$:

$$\begin{aligned} L &= \max(0, -\gamma - C) \\ H &= \min(C, -\gamma) \end{aligned} \quad (102)$$

$$\alpha_2^{-,new} = \alpha_2^- + \frac{E_1 - E_2}{\eta} \quad (103)$$

$$\alpha_1^{-,new} = \alpha_1^- - (\alpha_2^{-,new,clipped} - \alpha_2^-) \quad (104)$$

where $\gamma = \alpha_1^+ - \alpha_1^- + \alpha_2^+ - \alpha_2^-$. Notice that η and $\alpha_2^{+,new,clipped}$ or $\alpha_2^{-,new,clipped}$ are identical to (85) and (87) respectively.

The KKT conditions for the regression problem (55) are:

$$\begin{aligned} \alpha_i^+ - \alpha_i^- &= 0 \Leftrightarrow |y_i - y'_i| < \epsilon \\ -C < \alpha_i^+ - \alpha_i^- < C &\Leftrightarrow |y_i - y'_i| = \epsilon \\ \alpha_i^+ + \alpha_i^- &= C \Leftrightarrow |y_i - y'_i| > \epsilon \end{aligned} \quad (105)$$

so, the steps described above will be iterate as long as there will be an example that violates them.

In case of regression we select the threshold b as follows:

$$b_{up} = E_1 + ((\alpha_1^+ - \alpha_1^-) - (\alpha_1^{+,new} - \alpha_1^{-,new}))K(x_1, x_1) + ((\alpha_2^+ - \alpha_2^-) - (\alpha_2^{+,new,clipped} - \alpha_2^{-,new,clipped}))K(x_1, x_2) + b \quad (106)$$

$$b_{low} = E_2 + ((\alpha_1^+ - \alpha_1^-) - (\alpha_1^{+,new} - \alpha_1^{-,new}))K(x_1, x_2) + ((\alpha_2^+ - \alpha_2^-) - (\alpha_2^{+,new,clipped} - \alpha_2^{-,new,clipped}))K(x_2, x_2) + b \quad (107)$$

$$b = \begin{cases} b_{up} & \text{if } 0 < \alpha_1^+, \alpha_1^- < C \\ b_{low} & \text{if } 0 < \alpha_2^+, \alpha_2^- < C \\ \frac{b_{up} + b_{low}}{2} & \text{otherwise} \end{cases} \quad (108)$$

The improvements described in [4, 7] for classification and regression respectively are about the definition of subsets of multipliers to efficiently update them at each iteration by separating the multipliers at the bounds from those who can be further minimized.

Algorithm 7 Sequential Minimal Optimization for Regression

Require: Training examples matrix $X \in \mathbb{R}^{n \times m}$
Require: Training target vector $y \in \mathbb{R}^n$
Require: Kernel matrix $K \in \mathbb{R}^{n \times n}$
Require: Regularization parameter $C > 0$
Require: Epsilon-tube value $\epsilon \geq 0$ within which no penalty is associated in the epsilon-insensitive loss function
Require: Tolerance value tol for stopping criterion

function SMOREGRESSION($X, y, K, C, \epsilon, tol$)
 Initialize the Lagrange multipliers vector $\alpha^+ \in \mathbb{R}^n, \alpha^+ \leftarrow 0$
 Initialize the Lagrange multipliers vector $\alpha^- \in \mathbb{R}^n, \alpha^- \leftarrow 0$
 Initialize the empty set $I0 \leftarrow \{i : 0 < \alpha_i^+, \alpha_i^- < C\}$
 Initialize the set $I1 \leftarrow \{i : \alpha_i^+ = 0, \alpha_i^- = 0\}$ to contain all the indices of the training examples
 Initialize the empty set $I2 \leftarrow \{i : \alpha_i^+ = 0, \alpha_i^- = C\}$
 Initialize the empty set $I3 \leftarrow \{i : \alpha_i^+ = C, \alpha_i^- = 0\}$
 Initialize $i_{up} \leftarrow 0$ ▷ or any other target index i_{up} from the training examples
 Initialize $i_{low} \leftarrow 0$ ▷ or any other target index i_{low} from the training examples
 Initialize $b_{up} \leftarrow y_{i_{up}} + \epsilon$
 Initialize $b_{low} \leftarrow y_{i_{low}} - \epsilon$
 Initialize the error cache vector $errors \in \mathbb{R}^n, errors \leftarrow 0$
while $num_changed > 0$ **or** $examine_all = True$ **do**
 $num_changed \leftarrow 0$
 $examine_all \leftarrow True$
 if $examine_all = True$ **then**
 for $i \leftarrow 0$ to n **do** ▷ loop over all training examples
 $num_changed \leftarrow num_changed + \text{EXAMINEEXAMPLE}(i)$
 end for
 else
 for i in $I0$ **do** ▷ loop over examples where α_i^+ and α_i^- are not already at their bounds
 $num_changed \leftarrow num_changed + \text{EXAMINEEXAMPLE}(i)$
 if $b_{up} > b_{low} - 2tol$ **then** ▷ check if optimality on $I0$ is attained
 $num_changed \leftarrow 0$
 break
 end if
 end for
 end if
 if $examine_all = True$ **then**
 $examine_all \leftarrow False$
 else if $num_changed = 0$ **then**
 $examine_all \leftarrow True$
 end if
end while
 Compute b by (108)
return α^+, α^-, b
end function

Require: $i1$ -th Lagrange multiplier

Require: $i2$ -th Lagrange multiplier

function TAKESTEP($i1, i2$)

if $i1 = i2$ **then**

return False

end if

$finished = False$

while not $finished$ **do**

 Compute L and H using (93), (96), (99) or (102)

if $L < H$ **then**

 Compute η by (85)

 ▷ we assume that $\eta > 0$, i.e., the kernel matrix K is positive definite

if $\eta < 0$ **then**

 Choose $\alpha_2^{+,new,clipped}$ or $\alpha_2^{-,new,clipped}$ between L and H according to the largest value of the objective function at these points

else

 Compute $\alpha_2^{+,new}$ or $\alpha_2^{-,new}$ using (94), (100) or (97), (103) respectively

 Compute $\alpha_2^{+,new,clipped}$ or $\alpha_2^{-,new,clipped}$ by (87)

end if

 Compute $\alpha_1^{+,new}$ or $\alpha_1^{-,new}$ using (95), (98) or (101), (104) respectively

if changes in $\alpha_2^{+,new,clipped}$, $\alpha_2^{-,new,clipped}$, $\alpha_1^{+,new}$ or $\alpha_1^{-,new}$ are larger than some eps **then**

 Update $\alpha_2^{+,new,clipped}$, $\alpha_2^{-,new,clipped}$, $\alpha_1^{+,new}$ or $\alpha_1^{-,new}$

end if

else

$finished = True$

end if

end while

if changes in $\alpha_2^{+,new,clipped}$, $\alpha_2^{-,new,clipped}$, $\alpha_1^{+,new}$ or $\alpha_1^{-,new}$ are larger than some eps **then**

for i in $I0$ **do**

 Update $errors_i$ using new Lagrange multipliers

end for

 Update α^+ and α^- using new Lagrange multipliers

 Update $I0, I1, I2$ and $I3$

 Update $errors_{i1}$ and $errors_{i2}$

for i in $I0 \cup \{i1, i2\}$ **do**

 Compute (i_{low}, b_{low}) by $b_{low} = \max\{errors_i : i \in I0 \cup I1 \cup I2\}$

 Compute and (i_{up}, b_{up}) by $b_{up} = \min\{errors_i : i \in I0 \cup I1 \cup I3\}$

end for

return True

else

return False

end if

end function

7 Experiments

The following experiments refer to *linearly* and *nonlinearly* separable generated datasets of size 100.

7.1 Support Vector Classifier

Below experiments are about the SVC for which I tested different values for the regularization hyperparameter C , i.e., from *soft* to *hard margin*, and in case of nonlinearly separable data also different *kernel functions* mentioned above.

7.1.1 Hinge loss

Primal formulation The experiments results shown in 1 referred to *Stochastic Gradient Descent* algorithm are obtained with α , i.e., the *learning rate* or *step size*, setted to 0.001 and β , i.e., the *momentum*, equal to 0.4. The batch size is setted to 20. Training is stopped if after 5 iterations the training loss is not lower than the best found so far.

Table 1: SVC Primal formulation results with Hinge loss

| | | | fit_time | accuracy | n_iter | n_sv |
|-----------|----------|-----|----------|----------|--------|------|
| solver | momentum | C | | | | |
| sgd | none | 1 | 0.519958 | 0.965 | 291 | 50 |
| | | 10 | 0.589300 | 0.970 | 328 | 19 |
| | | 100 | 0.084209 | 0.975 | 51 | 17 |
| | standard | 1 | 0.667757 | 0.970 | 213 | 45 |
| | | 10 | 0.581267 | 0.970 | 204 | 19 |
| | | 100 | 0.323588 | 0.970 | 52 | 15 |
| | nesterov | 1 | 0.353313 | 0.970 | 213 | 45 |
| | | 10 | 0.544228 | 0.970 | 197 | 19 |
| | | 100 | 0.087562 | 0.970 | 51 | 16 |
| liblinear | - | 1 | 0.001512 | 0.970 | 221 | 16 |
| | | 10 | 0.001837 | 0.970 | 1000 | 13 |
| | | 100 | 0.002751 | 0.975 | 1000 | 12 |

The results provided from the *custom* implementation, i.e., the SGD with different momentum settings, are strongly similar to those of *sklearn* implementation, i.e., *liblinear* [9] implementation, in terms of *accuracy* score. More training data points are selected as *support vectors* from the SGD solver but it always requires lower iterations, i.e., epochs, to achieve the same *numerical precision*. *Standard* or *Polyak* and *Nesterov* momentums always perform lower iterations as expected from the theoretical analysis of the convergence rate.

Linear Dual formulations The experiments results shown in 3 are obtained with α , i.e., the *learning rate* or *step size*, setted to 0.001 for the *AdaGrad* algorithm. Notice that the *qp* dual refers to the formulation (26), while the *bcqp* dual refers to the formulation (33).

Table 2: Linear SVC Wolfe Dual formulation results with Hinge loss

| | | fit_time | accuracy | n_iter | n_sv |
|--------|-----|----------|----------|--------|------|
| solver | C | | | | |
| smo | 1 | 0.240170 | 0.97 | 142 | 20 |
| | 10 | 2.656202 | 0.97 | 6975 | 16 |
| | 100 | 2.029251 | 0.97 | 3601 | 16 |
| libsvm | 1 | 0.002645 | 0.97 | 174 | 20 |
| | 10 | 0.002526 | 0.97 | 448 | 16 |
| | 100 | 0.003148 | 0.97 | 2357 | 16 |
| cvxopt | 1 | 0.144664 | 0.97 | 10 | 20 |
| | 10 | 0.162875 | 0.97 | 10 | 16 |
| | 100 | 0.038245 | 0.97 | 10 | 18 |

For what about the linear *Wolfe dual* formulation we can immediately notice as higher *regularization hyperparameter* C makes the model harder, so the *custom* implementation of the SMO algorithm and also the *sklearn* implementation, i.e., *libsvm* [10] implementation, needs to perform more iterations to achieve the same *numerical precision*; meanwhile the *cvxopt* [11] seems to be insensitive to the increasing complexity of the model. The results in terms of *accuracy* and number of *support vectors* are strongly similar to each others.

Table 3: Linear SVC Lagrangian Dual formulation results with Hinge loss

| | | fit_time | accuracy | n_iter | n_sv |
|------|-----|----------|----------|--------|------|
| dual | C | | | | |
| qp | 1 | 0.028132 | 0.97 | 1 | 194 |
| | 10 | 0.027381 | 0.97 | 1 | 194 |
| | 100 | 0.034051 | 0.97 | 1 | 194 |
| bcqp | 1 | 0.031179 | 0.97 | 1 | 193 |
| | 10 | 0.023645 | 0.97 | 1 | 193 |
| | 100 | 0.028539 | 0.97 | 1 | 193 |

For what about the linear *Lagrangian dual* formulation we can see as it seems to be insensitive to the increasing complexity of the model in terms of number of *iterations* but it tends to select many training data points as *support vectors*.

Nonlinear Dual formulations The experiments results shown in 4 and 5 are obtained with d and r hyperparameters equal to 3 and 1 respectively for the *polynomial* kernel; γ is setted to ‘scale’ for both *polynomial* and *gaussian RBF* kernels. The experiments results shown in 5 are obtained with α , i.e., the *learning rate* or *step size*, setted to 0.001 for the *AdaGrad* algorithm.

Table 4: Nonlinear SVC Wolfe Dual formulation results with Hinge loss

| | | | fit_time | accuracy | n_iter | n_sv |
|--------|--------|-----|----------|----------|--------|------|
| solver | kernel | C | | | | |
| smo | poly | 1 | 0.379582 | 0.7600 | 189 | 35 |
| | | 10 | 0.247968 | 0.7200 | 136 | 11 |
| | | 100 | 0.182547 | 1.0000 | 53 | 7 |
| | rbf | 1 | 0.256769 | 1.0000 | 49 | 49 |
| | | 10 | 0.472447 | 1.0000 | 59 | 16 |
| | | 100 | 0.397661 | 1.0000 | 34 | 10 |
| libsvm | poly | 1 | 0.014780 | 1.0000 | 469 | 35 |
| | | 10 | 0.013879 | 1.0000 | 267 | 11 |
| | | 100 | 0.010141 | 1.0000 | 170 | 7 |
| | rbf | 1 | 0.011520 | 1.0000 | 93 | 48 |
| | | 10 | 0.013638 | 1.0000 | 156 | 16 |
| | | 100 | 0.008230 | 1.0000 | 120 | 10 |
| cvxopt | poly | 1 | 0.162190 | 0.7600 | 10 | 35 |
| | | 10 | 0.177191 | 0.7225 | 10 | 11 |
| | | 100 | 0.268605 | 1.0000 | 10 | 7 |
| | rbf | 1 | 0.204111 | 1.0000 | 10 | 53 |
| | | 10 | 0.413414 | 1.0000 | 10 | 20 |
| | | 100 | 0.402257 | 1.0000 | 10 | 11 |

Table 5: Nonlinear SVC Lagrangian Dual formulation results with Hinge loss

| | | | fit_time | accuracy | n_iter | n_sv |
|------|--------|-----|----------|----------|--------|------|
| dual | kernel | C | | | | |
| qp | poly | 1 | 0.083991 | 0.5900 | 3 | 312 |
| | | 10 | 0.082520 | 0.5900 | 3 | 312 |
| | | 100 | 0.063880 | 0.5900 | 3 | 312 |
| | rbf | 1 | 0.159785 | 0.7625 | 7 | 307 |
| | | 10 | 0.215768 | 0.7625 | 7 | 307 |
| | | 100 | 0.161169 | 0.7625 | 7 | 307 |
| bcqp | poly | 1 | 5.586180 | 0.5875 | 1000 | 312 |
| | | 10 | 5.466839 | 0.5875 | 1000 | 312 |
| | | 100 | 5.492280 | 0.5875 | 1000 | 312 |
| | rbf | 1 | 0.072574 | 1.0000 | 1 | 398 |
| | | 10 | 0.095489 | 1.0000 | 1 | 398 |
| | | 100 | 0.035152 | 1.0000 | 1 | 398 |

The same considerations made for the previous linear *Wolfe dual* and *Lagrangian dual* formulations are confirmed also in the nonlinearly separable case. In this setting the complexity of the model coming with higher C regularization values seems to be not paying a tradeoff in terms of the number of *iterations* of the algorithm and, moreover, the *bcqp Lagrangian dual* formulation seems to perform better wrt the *qp* formulation, both tends to select even more training data points as *support vectors*.

7.1.2 Squared Hinge loss

Primal formulation The experiments results shown in 6 referred to *Stochastic Gradient Descent* algorithm are obtained with α , i.e., the *learning rate* or *step size*, setted to 0.001 and β , i.e., the *momentum*, equal to 0.4. The batch size is setted to 20. Training is stopped if after 5 iterations the training loss is not lower than the best found so far.

Table 6: SVC Primal formulation results with Squared Hinge loss

| solver | momentum | C | fit_time | accuracy | n_iter | n_sv |
|-----------|----------|-----|----------|----------|--------|------|
| | | | | | | |
| sgd | none | 1 | 0.255476 | 0.970 | 116 | 51 |
| | | 10 | 0.077421 | 0.970 | 27 | 33 |
| | | 100 | 0.049408 | 0.970 | 12 | 19 |
| | standard | 1 | 0.353654 | 0.965 | 83 | 49 |
| | | 10 | 0.117922 | 0.970 | 19 | 31 |
| | | 100 | 0.051094 | 0.970 | 8 | 18 |
| | nesterov | 1 | 0.305486 | 0.965 | 83 | 49 |
| | | 10 | 0.164126 | 0.970 | 25 | 30 |
| | | 100 | 0.062333 | 0.970 | 10 | 21 |
| liblinear | - | 1 | 0.009826 | 0.970 | 499 | 38 |
| | | 10 | 0.009072 | 0.970 | 1000 | 34 |
| | | 100 | 0.008421 | 0.970 | 1000 | 42 |

Again, the results provided from the *custom* implementation, i.e., the SGD with different momentum settings, are strongly similar to those of *sklearn* implementation, i.e., *liblinear* [9] implementation, in terms of *accuracy* score. More training data points are selected as *support vectors* from the SGD solver but it always requires even lower iterations, i.e., epochs, to achieve the same *numerical precision*. *Standard* or *Polyak* and *Nesterov* momentums always perform lower iterations as expected from the theoretical analysis of the convergence rate.

7.2 Support Vector Regression

Below experiments are about the SVR for which I tested different values for regularization hyperparameter C , i.e., from *soft* to *hard margin*, the ϵ penalty value and in case of nonlinearly separable data also different *kernel functions* mentioned above.

7.2.1 Epsilon-insensitive loss

Primal formulation The experiments results shown in 7 referred to *Stochastic Gradient Descent* algorithm are obtained with α , i.e., the *learning rate* or *step size*, setted to 0.001 and β , i.e., the *momentum*, equal to 0.4. The batch size is setted to 20. Training is stopped if after 5 iterations the training loss is not lower than the best found so far.

Table 7: SVR Primal formulation results with Epsilon-insensitive loss

| solver | momentum | C | epsilon | fit_time | r2 | n_iter | n_sv |
|-----------|----------|-----|---------|----------|----------|--------|------|
| sgd | none | 1 | 0.1 | 0.305684 | 0.476051 | 61 | 100 |
| | | | 0.2 | 0.271255 | 0.476051 | 61 | 100 |
| | | | 0.3 | 0.295661 | 0.476051 | 61 | 100 |
| | | 10 | 0.1 | 0.271766 | 0.976336 | 65 | 99 |
| | | | 0.2 | 0.302971 | 0.976335 | 65 | 97 |
| | | | 0.3 | 0.312793 | 0.976335 | 65 | 96 |
| | | 100 | 0.1 | 0.217348 | 0.977543 | 29 | 99 |
| | | | 0.2 | 0.196685 | 0.977543 | 28 | 98 |
| | | | 0.3 | 0.086447 | 0.977543 | 32 | 96 |
| | standard | 1 | 0.1 | 0.090969 | 0.496182 | 39 | 100 |
| | | | 0.2 | 0.081605 | 0.496182 | 39 | 100 |
| | | | 0.3 | 0.082573 | 0.496182 | 39 | 100 |
| | | 10 | 0.1 | 0.086846 | 0.976716 | 41 | 100 |
| | | | 0.2 | 0.078833 | 0.976717 | 41 | 100 |
| | | | 0.3 | 0.087009 | 0.976717 | 41 | 98 |
| | | 100 | 0.1 | 0.030361 | 0.977554 | 11 | 98 |
| | | | 0.2 | 0.037782 | 0.977554 | 11 | 97 |
| | | | 0.3 | 0.025428 | 0.977554 | 11 | 97 |
| | nesterov | 1 | 0.1 | 0.069402 | 0.495933 | 39 | 100 |
| | | | 0.2 | 0.085645 | 0.495933 | 39 | 100 |
| | | | 0.3 | 0.081845 | 0.495933 | 39 | 100 |
| | | 10 | 0.1 | 0.083945 | 0.976679 | 41 | 100 |
| | | | 0.2 | 0.086326 | 0.976678 | 41 | 100 |
| | | | 0.3 | 0.083877 | 0.976679 | 41 | 98 |
| | | 100 | 0.1 | 0.026455 | 0.977550 | 12 | 99 |
| | | | 0.2 | 0.034582 | 0.977550 | 12 | 97 |
| | | | 0.3 | 0.023644 | 0.977550 | 11 | 97 |
| liblinear | - | 1 | 0.1 | 0.000879 | 0.964163 | 12 | 97 |
| | | | 0.2 | 0.000794 | 0.963786 | 12 | 97 |
| | | | 0.3 | 0.001147 | 0.963443 | 18 | 95 |
| | | 10 | 0.1 | 0.001303 | 0.977559 | 111 | 100 |
| | | | 0.2 | 0.001115 | 0.977552 | 126 | 99 |
| | | | 0.3 | 0.001408 | 0.977564 | 253 | 98 |
| | | 100 | 0.1 | 0.001333 | 0.977481 | 672 | 99 |
| | | | 0.2 | 0.001883 | 0.977442 | 881 | 99 |
| | | | 0.3 | 0.001565 | 0.977458 | 1000 | 98 |

The results provided from the *custom* implementation, i.e., the SGD with different momentum settings, are strongly similar to those of *sklearn* implementation, i.e., *liblinear* [9] implementation, in terms of *r2* score, except in case of *C* regularization hyperparameter equals to 1 for which those of SGD are lower. Moreover, the SGD solver always requires lower iterations, i.e., epochs, for higher *C* regularization values, i.e., for *C* equals to 10 or 100, to achieve the same *numerical precision*. Again, *Standard* or *Polyak* and *Nesterov* momentums always perform lower iterations as expected from the theoretical analysis of the convergence rate. The results in terms of *support vectors* are strongly similar to each others.

Linear Dual formulations The experiments results shown in 9 are obtained with α , i.e., the *learning rate* or *step size*, setted to 0.001 for the *AdaGrad* algorithm. Notice that the *qp* dual refers to the formulation (61), while the *bcqp* dual refers to the formulation (68).

Table 8: Linear SVR Wolfe Dual formulation results with Epsilon-insensitive loss

| solver | C | epsilon | fit_time | r2 | n_iter | n_sv |
|--------|-----|---------|----------|----------|--------|------|
| | | | | | | |
| smo | 1 | 0.1 | 0.023381 | 0.964127 | 17 | 98 |
| | | 0.2 | 0.044661 | 0.963707 | 18 | 96 |
| | | 0.3 | 0.035539 | 0.963707 | 14 | 96 |
| | 10 | 0.1 | 0.137995 | 0.977576 | 69 | 100 |
| | | 0.2 | 0.500972 | 0.977573 | 749 | 100 |
| | | 0.3 | 0.129166 | 0.977573 | 78 | 99 |
| | 100 | 0.1 | 0.544417 | 0.977515 | 549 | 100 |
| | | 0.2 | 0.471177 | 0.977496 | 723 | 100 |
| | | 0.3 | 0.512489 | 0.977493 | 926 | 99 |
| libsvm | 1 | 0.1 | 0.003990 | 0.964103 | 81 | 98 |
| | | 0.2 | 0.005355 | 0.963680 | 81 | 97 |
| | | 0.3 | 0.007024 | 0.963684 | 78 | 96 |
| | 10 | 0.1 | 0.009187 | 0.977559 | 226 | 100 |
| | | 0.2 | 0.005927 | 0.977554 | 706 | 100 |
| | | 0.3 | 0.011225 | 0.977564 | 181 | 99 |
| | 100 | 0.1 | 0.008480 | 0.977481 | 1224 | 100 |
| | | 0.2 | 0.017160 | 0.977450 | 2126 | 100 |
| | | 0.3 | 0.008723 | 0.977463 | 2680 | 99 |
| cvxopt | 1 | 0.1 | 0.044434 | 0.964127 | 10 | 100 |
| | | 0.2 | 0.040610 | 0.963709 | 9 | 100 |
| | | 0.3 | 0.050188 | 0.963706 | 9 | 100 |
| | 10 | 0.1 | 0.043882 | 0.977576 | 8 | 100 |
| | | 0.2 | 0.059017 | 0.977573 | 9 | 100 |
| | | 0.3 | 0.037176 | 0.977573 | 9 | 99 |
| | 100 | 0.1 | 0.057136 | 0.977515 | 8 | 100 |
| | | 0.2 | 0.045696 | 0.977496 | 9 | 100 |
| | | 0.3 | 0.033306 | 0.977493 | 9 | 100 |

For what about the linear *Wolfe dual* formulation we can immediately notice as higher *regularization hyperparameter* *C* and lower ϵ values makes the model harder, so the *custom* implementation of the SMO algorithm and also the *sklearn* implementation, i.e., *libsvm* [10] implementation, needs to perform more iterations to achieve the same *numerical precision*; meanwhile, again, the *cvxopt* [11] seems to be insensitive to the increasing complexity of the model. The results in terms of *r2* and number of *support vectors* are strongly similar to each others.

Table 9: Linear SVR Lagrangian Dual formulation results with Epsilon-insensitive loss

| | | | fit_time | r2 | n_iter | n_sv |
|------|-----|---------|----------|----------|--------|------|
| dual | C | epsilon | | | | |
| qp | 1 | 0.1 | 2.834686 | 0.731400 | 1000 | 100 |
| | | 0.2 | 2.834862 | 0.731400 | 1000 | 100 |
| | | 0.3 | 2.812738 | 0.731400 | 1000 | 100 |
| | 10 | 0.1 | 2.840206 | 0.731400 | 1000 | 100 |
| | | 0.2 | 2.368673 | 0.731400 | 1000 | 100 |
| | | 0.3 | 2.633349 | 0.731400 | 1000 | 100 |
| | 100 | 0.1 | 2.593171 | 0.731400 | 1000 | 100 |
| | | 0.2 | 2.531446 | 0.731400 | 1000 | 100 |
| | | 0.3 | 1.191494 | 0.731400 | 1000 | 100 |
| bcqp | 1 | 0.1 | 2.962745 | 0.733183 | 1000 | 100 |
| | | 0.2 | 2.746601 | 0.733183 | 1000 | 100 |
| | | 0.3 | 3.205020 | 0.733183 | 1000 | 100 |
| | 10 | 0.1 | 3.041657 | 0.733183 | 1000 | 100 |
| | | 0.2 | 2.699528 | 0.733183 | 1000 | 100 |
| | | 0.3 | 2.801045 | 0.733183 | 1000 | 100 |
| | 100 | 0.1 | 2.534525 | 0.733183 | 1000 | 100 |
| | | 0.2 | 2.534465 | 0.733183 | 1000 | 100 |
| | | 0.3 | 1.243881 | 0.733183 | 1000 | 100 |

For what about the linear *Lagrangian dual* formulation we can see as it seems to be insensitive to the increasing complexity of the model in terms of number of *iterations* and require many *iterations* wrt the *Wolfe dual* formulation.

Nonlinear Dual formulations The experiments results shown in 10 and 11 are obtained with d and r hyperparameters both equal to 3 for the *polynomial* kernel; γ is setted to ‘scale’ for both *polynomial* and *gaussian RBF* kernels. The experiments results shown in 5 are obtained with α , i.e., the *learning rate* or *step size*, setted to 0.001 for the *AdaGrad* algorithm.

Table 10: Nonlinear SVR Wolfe Dual formulation results with Epsilon-insensitive loss

| | | | | fit_time | r2 | n_iter | n_sv |
|--------|--------|-----|---------|-------------|-----------|----------|------|
| solver | kernel | C | epsilon | | | | |
| smo | poly | 1 | 0.1 | 16.621604 | 0.965958 | 22565 | 28 |
| | | | 0.2 | 10.662649 | 0.915386 | 18370 | 7 |
| | | | 0.3 | 2.206419 | -0.019348 | 2577 | 4 |
| | | 10 | 0.1 | 162.003244 | 0.873457 | 269916 | 29 |
| | | | 0.2 | 5.475889 | 0.773653 | 7385 | 4 |
| | | | 0.3 | 2.235514 | -0.019348 | 2577 | 4 |
| | | 100 | 0.1 | 1570.878271 | 0.873592 | 2837623 | 29 |
| | | | 0.2 | 5.905676 | 0.773653 | 7385 | 4 |
| | | | 0.3 | 1.954492 | -0.019348 | 2577 | 4 |
| | rbf | 1 | 0.1 | 0.162744 | 0.989251 | 58 | 20 |
| | | | 0.2 | 0.042457 | 0.916460 | 30 | 6 |
| | | | 0.3 | 0.017082 | 0.863690 | 7 | 5 |
| | | 10 | 0.1 | 0.962114 | 0.988808 | 855 | 22 |
| | | | 0.2 | 0.023530 | 0.916260 | 26 | 6 |
| | | | 0.3 | 0.010618 | 0.863690 | 7 | 5 |
| | | 100 | 0.1 | 4.986097 | 0.986641 | 4714 | 19 |
| | | | 0.2 | 0.019692 | 0.916260 | 26 | 6 |
| | | | 0.3 | 0.017319 | 0.863690 | 7 | 5 |
| libsvm | poly | 1 | 0.1 | 0.033172 | 0.982113 | 58829 | 28 |
| | | | 0.2 | 0.010934 | 0.974153 | 15817 | 7 |
| | | | 0.3 | 0.009176 | 0.946442 | 2697 | 4 |
| | | 10 | 0.1 | 0.166147 | 0.982366 | 477441 | 29 |
| | | | 0.2 | 0.008310 | 0.979179 | 5598 | 4 |
| | | | 0.3 | 0.005829 | 0.946442 | 2697 | 4 |
| | | 100 | 0.1 | 2.230161 | 0.982119 | 10669851 | 29 |
| | | | 0.2 | 0.020086 | 0.979179 | 5598 | 4 |
| | | | 0.3 | 0.004748 | 0.946442 | 2697 | 4 |
| | rbf | 1 | 0.1 | 0.009822 | 0.989178 | 80 | 20 |
| | | | 0.2 | 0.013293 | 0.982040 | 37 | 6 |
| | | | 0.3 | 0.001457 | 0.951730 | 18 | 5 |
| | | 10 | 0.1 | 0.003906 | 0.990056 | 833 | 20 |
| | | | 0.2 | 0.007880 | 0.982014 | 38 | 6 |
| | | | 0.3 | 0.002544 | 0.951730 | 18 | 5 |
| | | 100 | 0.1 | 0.011858 | 0.990542 | 12361 | 19 |
| | | | 0.2 | 0.005540 | 0.982014 | 38 | 6 |
| | | | 0.3 | 0.001965 | 0.951730 | 18 | 5 |
| cvxopt | poly | 1 | 0.1 | 0.087879 | 0.966650 | 8 | 28 |
| | | | 0.2 | 0.162963 | 0.389408 | 10 | 6 |
| | | | 0.3 | 0.103764 | 0.070818 | 10 | 4 |
| | | 10 | 0.1 | 0.133711 | 0.824379 | 9 | 30 |
| | | | 0.2 | 0.139223 | 0.777645 | 10 | 4 |
| | | | 0.3 | 0.069593 | 0.070820 | 10 | 4 |
| | | 100 | 0.1 | 0.044351 | 0.952412 | 9 | 72 |
| | | | 0.2 | 0.033852 | 0.777643 | 10 | 4 |
| | | | 0.3 | 0.036072 | 0.070818 | 10 | 4 |
| | rbf | 1 | 0.1 | 0.042391 | 0.989236 | 10 | 20 |
| | | | 0.2 | 0.033710 | 0.915828 | 9 | 6 |
| | | | 0.3 | 0.050085 | 0.858355 | 9 | 6 |
| | | 10 | 0.1 | 0.043324 | 0.987421 | 10 | 21 |
| | | | 0.2 | 0.032647 | 0.915828 | 10 | 6 |
| | | | 0.3 | 0.044080 | 0.861873 | 10 | 5 |
| | | 100 | 0.1 | 0.043129 | 0.990163 | 10 | 29 |
| | | | 0.2 | 0.025641 | 0.915828 | 10 | 6 |
| | | | 0.3 | 0.046823 | 0.861873 | 10 | 5 |

Table 11: Nonlinear SVR Lagrangian Dual formulation results with Epsilon-insensitive loss

| dual | kernel | C | epsilon | fit_time | r2 | n_iter | n_sv |
|------|--------|-----|---------|----------|----------|--------|------|
| qp | poly | 1 | 0.1 | 2.878647 | 0.522377 | 1000 | 100 |
| | | | 0.2 | 3.229230 | 0.522371 | 1000 | 100 |
| | | | 0.3 | 2.915349 | 0.514329 | 1000 | 100 |
| | | 10 | 0.1 | 3.205288 | 0.522377 | 1000 | 100 |
| | | | 0.2 | 3.025414 | 0.522371 | 1000 | 100 |
| | | | 0.3 | 3.429473 | 0.514329 | 1000 | 100 |
| | | 100 | 0.1 | 2.834170 | 0.522377 | 1000 | 100 |
| | | | 0.2 | 3.083545 | 0.522371 | 1000 | 100 |
| | | | 0.3 | 2.165671 | 0.514329 | 1000 | 100 |
| | rbf | 1 | 0.1 | 4.209712 | 0.741313 | 1000 | 100 |
| | | | 0.2 | 3.593633 | 0.741307 | 1000 | 100 |
| | | | 0.3 | 3.679845 | 0.741296 | 1000 | 100 |
| | | 10 | 0.1 | 4.031607 | 0.741313 | 1000 | 100 |
| | | | 0.2 | 3.590530 | 0.741307 | 1000 | 100 |
| | | | 0.3 | 4.207299 | 0.741296 | 1000 | 100 |
| | | 100 | 0.1 | 3.867373 | 0.741313 | 1000 | 100 |
| | | | 0.2 | 3.342026 | 0.741307 | 1000 | 100 |
| | | | 0.3 | 2.298903 | 0.741296 | 1000 | 100 |
| bcqp | poly | 1 | 0.1 | 2.790911 | 0.521716 | 1000 | 100 |
| | | | 0.2 | 3.112377 | 0.521710 | 1000 | 100 |
| | | | 0.3 | 2.636403 | 0.513753 | 1000 | 100 |
| | | 10 | 0.1 | 2.786911 | 0.521716 | 1000 | 100 |
| | | | 0.2 | 2.712968 | 0.521710 | 1000 | 100 |
| | | | 0.3 | 2.760177 | 0.513753 | 1000 | 100 |
| | | 100 | 0.1 | 2.641157 | 0.521716 | 1000 | 100 |
| | | | 0.2 | 2.820422 | 0.521710 | 1000 | 100 |
| | | | 0.3 | 1.920233 | 0.513753 | 1000 | 100 |
| | rbf | 1 | 0.1 | 0.984536 | 0.738116 | 234 | 100 |
| | | | 0.2 | 1.739418 | 0.729001 | 351 | 100 |
| | | | 0.3 | 1.377367 | 0.651317 | 401 | 100 |
| | | 10 | 0.1 | 0.908652 | 0.738116 | 234 | 100 |
| | | | 0.2 | 1.505759 | 0.729001 | 351 | 100 |
| | | | 0.3 | 1.626456 | 0.651317 | 401 | 100 |
| | | 100 | 0.1 | 0.875851 | 0.738116 | 234 | 100 |
| | | | 0.2 | 1.231001 | 0.729001 | 351 | 100 |
| | | | 0.3 | 1.231122 | 0.651317 | 401 | 100 |

The same considerations made for the previous linear *Wolfe dual* and *Lagrangian dual* formulations are confirmed also in the nonlinearly separable case. In this setting, the complexity of the model coming with higher C regularization hyperparameters and lower ϵ values pays a larger tradeoff in terms of the number of *iterations* of the algorithm.

7.2.2 Squared Epsilon-insensitive loss

Primal formulation The experiments results shown in 12 referred to *Stochastic Gradient Descent* algorithm are obtained with α , i.e., the *learning rate* or *step size*, setted to 0.001 and β , i.e., the *momentum*, equal to 0.4. The batch size is setted to 20. Training is stopped if after 5 iterations the training loss is not lower than the best found so far.

Table 12: SVR Primal formulation results with Squared Epsilon-insensitive loss

| solver | momentum | C | epsilon | fit_time | r2 | n_iter | n_sv |
|-----------|----------|-----|---------|----------|----------|--------|------|
| sgd | none | 1 | 0.1 | 1.203146 | 0.977025 | 641 | 100 |
| | | | 0.2 | 1.090908 | 0.977021 | 633 | 99 |
| | | | 0.3 | 1.121058 | 0.977016 | 625 | 99 |
| | | 10 | 0.1 | 0.423047 | 0.977573 | 74 | 100 |
| | | | 0.2 | 0.342571 | 0.977572 | 70 | 99 |
| | | | 0.3 | 0.355486 | 0.977572 | 72 | 99 |
| | | 100 | 0.1 | 0.111561 | 0.977409 | 9 | 100 |
| | | | 0.2 | 0.101309 | 0.977408 | 9 | 99 |
| | | | 0.3 | 0.039628 | 0.977407 | 9 | 98 |
| | standard | 1 | 0.1 | 0.710437 | 0.977035 | 398 | 100 |
| | | | 0.2 | 0.586380 | 0.977031 | 392 | 99 |
| | | | 0.3 | 0.694706 | 0.977025 | 385 | 99 |
| | | 10 | 0.1 | 0.097984 | 0.977572 | 42 | 99 |
| | | | 0.2 | 0.159697 | 0.977571 | 40 | 99 |
| | | | 0.3 | 0.151594 | 0.977572 | 42 | 99 |
| | | 100 | 0.1 | 0.017708 | 0.977439 | 7 | 99 |
| | | | 0.2 | 0.022605 | 0.977438 | 7 | 99 |
| | | | 0.3 | 0.033693 | 0.977441 | 7 | 98 |
| | nesterov | 1 | 0.1 | 0.528662 | 0.977035 | 399 | 100 |
| | | | 0.2 | 0.499102 | 0.977030 | 392 | 99 |
| | | | 0.3 | 0.507848 | 0.977026 | 386 | 99 |
| | | 10 | 0.1 | 0.086664 | 0.977572 | 43 | 99 |
| | | | 0.2 | 0.070886 | 0.977572 | 42 | 99 |
| | | | 0.3 | 0.086196 | 0.977570 | 40 | 99 |
| | | 100 | 0.1 | 0.016199 | 0.977411 | 7 | 100 |
| | | | 0.2 | 0.018226 | 0.977411 | 7 | 99 |
| | | | 0.3 | 0.016476 | 0.977413 | 7 | 98 |
| liblinear | - | 1 | 0.1 | 0.001553 | 0.977554 | 96 | 100 |
| | | | 0.2 | 0.001414 | 0.977553 | 96 | 100 |
| | | | 0.3 | 0.001962 | 0.977551 | 96 | 100 |
| | | 10 | 0.1 | 0.006422 | 0.977577 | 826 | 100 |
| | | | 0.2 | 0.007993 | 0.977576 | 826 | 99 |
| | | | 0.3 | 0.005684 | 0.977576 | 839 | 99 |
| | | 100 | 0.1 | 0.008910 | 0.977538 | 1000 | 100 |
| | | | 0.2 | 0.008264 | 0.977540 | 1000 | 99 |
| | | | 0.3 | 0.007509 | 0.977541 | 1000 | 98 |

Again, the results provided from the *custom* implementation, i.e., the SGD with different momentum settings, are strongly similar to those of *sklearn* implementation, i.e., *liblinear* [9] implementation, in terms of *r2* score. SGD solver always requires even lower iterations, i.e., epochs, for higher *C* regularization values, i.e., for *C* equals to 10 or 100, to achieve the same *numerical precision*. *Standard* or *Polyak* and *Nesterov* momentums always perform lower iterations as expected from the theoretical analysis of the convergence rate.

8 Conclusions

For what about the SVM formulations, it is known, in general, that the *primal formulation*, is suitable for large linear training since the complexity of the model grows with the number of features or, more in general, when the number of examples n is much larger than the number of features m , i.e., $n \gg m$; meanwhile the *dual formulation*, is more suitable in case the number of examples n is less than the number of features m , i.e., $n < m$, since the complexity of the model is dominated by the number of examples, or more in general when the training data are not linearly separable in the input space.

From all these experiments we can see as all the *custom* implementations underperforms all the others, i.e., both *cvxopt* [11] and *sklearn* implementations, i.e., *liblinear* [9] and *libsvm* [10] implementations, in terms of *time* obviously due to the different core implementation languages, i.e., Python and C respectively.

In the *primal* formulations the *liblinear* [9] implementation uses an optimization method called *Coordinate Gradient Descent* which minimizes one coordinate at a time.

Meanwhile, for what about the *Wolfe dual* formulations we can notice as *cvxopt* [11] underperforms the *sklearn* implementation, i.e., *libsvm* [10] implementation, in terms of *time* since it is a general-purpose QP solver and it does not exploit the structure of the problem, as SMO does. An interesting consideration can be made about the number of *iterations* of *custom* SMO implementation wrt that in *libsvm* which seems to be always lower thanks to the improvements described in [4, 7] for classification and regression respectively.

Finally, in the *Lagrangian dual* formulations the goodness of the solution in terms of *accuracy* or *r2* values depends by the residue in the solution of the *Lagrangian dual* at each step provided by *minres* algorithm. Moreover, we can see as fitting the intercept in an explicit way, i.e., by adding Lagrange multipliers to control the equality constraint always get lower scores wrt the *Lagrangian dual* of the same problem with the bias term embedded into the weight matrix.

References

- [1] Boris T Polyak. Some methods of speeding up the convergence of iteration methods. *Ussr computational mathematics and mathematical physics*, 4(5):1–17, 1964.
- [2] Yurii Nesterov. Introductory lectures on convex programming volume i: Basic course. *Lecture notes*, 3(4):5, 1998.
- [3] John Platt. Sequential minimal optimization: A fast algorithm for training support vector machines. 1998.
- [4] S. Sathiya Keerthi, Shirish Krishnaji Shevade, Chiranjib Bhattacharyya, and Karuturi Radha Krishna Murthy. Improvements to Platt’s SMO algorithm for SVM classifier design. *Neural computation*, 13(3):637–649, 2001.
- [5] John Duchi, Elad Hazan, and Yoram Singer. Adaptive subgradient methods for online learning and stochastic optimization. *Journal of machine learning research*, 12(7), 2011.
- [6] Gary William Flake and Steve Lawrence. Efficient SVM regression training with SMO. *Machine Learning*, 46(1):271–290, 2002.
- [7] SK Shevade, SS Keerthi, C Bhattacharyya, and KRK Murthy. Improvements to SMO algorithm for SVM regression (Tech. Rep. No. CD-99-16). *Singapore: Control Division Department of Mechanical and Production Engineering*, 1999.
- [8] Tristan Fletcher. Support vector machines explained. *Tutorial paper.*, Mar, page 28, 2009.
- [9] Rong-En Fan, Kai-Wei Chang, Cho-Jui Hsieh, Xiang-Rui Wang, and Chih-Jen Lin. LIBLINEAR: A library for large linear classification. *the Journal of machine Learning research*, 9:1871–1874, 2008.
- [10] Chih-Chung Chang and Chih-Jen Lin. LIBSVM: a library for support vector machines. *ACM transactions on intelligent systems and technology (TIST)*, 2(3):1–27, 2011.
- [11] Lieven Vandenbergh. The CVXOPT linear and quadratic cone program solvers. *Online: <http://cvxopt.org/documentation/coneprog.pdf>*, 2010.
- [12] Veronica Piccialli and Marco Sciandrone. Nonlinear optimization and support vector machines. *4OR*, 16(2):111–149, 2018.
- [13] Chih-Wei Hsu and Chih-Jen Lin. A simple decomposition method for support vector machines. *Machine Learning*, 46(1):291–314, 2002.
- [14] Stephen Boyd, Stephen P Boyd, and Lieven Vandenbergh. *Convex optimization*. Cambridge university press, 2004.