



Plug & Trust MW Documentation

Release v03.00.05

NXP

Nov 05, 2020

CONTENTS

1 NXP Plug & Trust Middleware	1
1.1 Organization of Documentation	2
1.2 Folder Structure	4
1.3 List of Platform Prerequisites	5
2 Changes	7
2.1 Pending Refactoring items	7
2.2 Known limitations	7
2.3 Release v03.00.05	7
2.3.1 Functional Changes	7
2.3.2 New feature support	7
2.3.3 SSSCLI Changes	7
2.3.4 Documentation Changes	8
2.3.5 Examples / DEMO updates	8
2.3.6 Difference between Apache2 licensed package and NXP Proprietary package	8
2.4 Release v03.00.04	9
2.4.1 File/Folder relocation	9
2.4.2 Build system changes	9
2.4.3 APIs & enum/types Changes	9
2.4.4 Functional Changes	9
2.4.5 New platform support	9
2.4.6 New feature support	9
2.4.7 SEMSLite	9
2.4.8 SSSCLI / PyCLI Changes	9
2.4.9 Documentation Changes	9
2.4.10 Examples / DEMO updates	9
2.4.11 Communication Layer Changes	10
2.4.12 User Interface Changes	10
2.4.13 External modules Changes	10
2.4.14 Other Miscellaneous Changes	10
2.5 Release v03.00.03	10
2.5.1 File/Folder relocation	10
2.5.2 Build system changes	10
2.5.3 APIs & enum/types Changes	10
2.5.4 Functional Changes	10
2.5.5 New platform support	10
2.5.6 New feature support	11
2.5.7 SEMSLite	11
2.5.8 SSSCLI / PyCLI Changes	11
2.5.9 Documentation Changes	11

2.5.10	Examples / DEMO updates	11
2.5.11	Communication Layer Changes	11
2.5.12	User Interface Changes	11
2.5.13	External modules Changes	11
2.5.14	Other Miscellaneous Changes	11
2.6	Release v03.00.02	12
2.6.1	File/Folder relocation	12
2.6.2	Build system changes	12
2.6.3	APIs & enum/types Changes	12
2.6.4	Functional Changes	12
2.6.5	New platform support	12
2.6.6	New feature support	12
2.6.7	SSSCLI / PyCLI Changes	13
2.6.8	Documentation Changes	13
2.6.9	Examples / DEMO updates	13
2.6.10	Communication Layer Changes	13
2.6.11	User Interface Changes	13
2.6.12	Other Miscellaneous Changes	13
2.7	Release v02.16.01	13
2.7.1	APIs & enum/types Changes	14
2.7.2	Documentation Changes	14
2.7.3	Other Miscellaneous Changes	14
2.8	Release v02.16.00	14
2.8.1	File/Folder relocation	14
2.8.2	Build system changes	15
2.8.3	APIs & enum/types Changes	15
2.8.4	Functional Changes	15
2.8.5	New platform support	15
2.8.6	New feature support	15
2.8.7	SSSCLI / PyCLI Changes	15
2.8.8	Documentation Changes	15
2.8.9	Examples / DEMO updates	15
2.8.10	Communication Layer Changes	16
2.8.11	User Interface Changes	16
2.8.12	Other Miscellaneous Changes	16
2.9	Release v02.15.00	16
2.9.1	Build system changes	16
2.9.2	APIs & enum/types Changes	16
2.9.3	Functional Changes	17
2.9.4	New feature support	17
2.9.5	Documentation Changes	17
2.9.6	Examples / DEMO updates	17
2.9.7	Other Miscellaneous Changes	17
2.10	Release v02.14.00	18
2.10.1	File/Folder relocation	18
2.10.2	Build system changes	18
2.10.3	New platform support	18
2.10.4	APIs & enum/types Changes	19
2.10.5	Functional Changes	19
2.10.6	New feature support	19
2.10.7	SSSCLI / PyCLI Changes	20
2.10.8	Communication Layer Changes	20
2.10.9	APIs & enum/types Changes	20
2.10.10	Examples / DEMO updates	20

2.10.11	Documentation Changes	21
2.10.12	Other Miscellaneous Changes	21
2.11	Release v02.12.05	21
2.12	Release v02.12.04	21
2.13	Release v02.12.03	21
2.14	Release v02.12.02	21
2.14.1	AKM Specific changes	21
2.14.2	Example Updates	22
2.14.3	Other Miscellaneous Changes	22
2.15	Release v02.12.01	22
2.15.1	AKM Specific changes	22
2.15.2	New example / example updates	22
2.15.3	Other Miscellaneous Changes	22
2.16	Release v02.12.00	22
2.16.1	New feature support	22
2.16.2	SSSCLI / PyCLI Changes	23
2.16.3	Documentation Changes	23
2.17	Release v02.11.03	23
2.17.1	File/Folder relocation	23
2.17.2	New feature support	23
2.17.3	Scripts and Build changes	23
2.17.4	Documentation Changes	24
2.17.5	Other Miscellaneous Changes	24
2.18	Internal Release v02.11.01	24
2.18.1	APIs & enum/types Changes	24
2.18.2	Functional Changes	24
2.18.3	New feature support	25
2.18.4	Scripts and Build changes	25
2.18.5	Documentation Changes	25
2.18.6	Communication Layer Changes	25
2.18.7	User Interface Changes	25
2.18.8	Other Miscellaneous Changes	26
2.19	Release v02.11.00	26
2.19.1	File/Folder relocation	26
2.19.2	APIs & enum/types Changes	28
2.19.3	Functional Changes	28
2.19.4	New platform support	28
2.19.5	Scripts and Build changes	28
2.19.6	SSSCLI / PyCLI Changes	28
2.19.7	Documentation Changes	29
2.19.8	Communication Layer Changes	29
2.19.9	Other Miscellaneous Changes	29
2.20	Release v02.10.00	30
2.20.1	APIs & enum/types Changes	30
2.20.2	New platform support	31
2.20.3	Scripts and Build changes	31
2.20.4	SSSCLI / PyCLI Changes	31
2.20.5	Other Miscellaneous Changes	31
2.21	Release v02.09.00	31
2.21.1	Middleware	31
2.21.2	CLI Tool	31
2.22	Release v02.07.00	32
2.22.1	Middleware	32
2.22.2	SMCom	32

2.22.3	SSS APIs	32
2.22.4	CLI Tool	32
2.22.5	Development Platform	33
2.23	Release v02.06.00	33
2.23.1	Demos	33
2.23.2	Plug & Trust Middleware	33
2.23.3	Documentation	33
2.23.4	Development Platform	33
2.24	Release v02.05.00	33
2.25	Release v02.04.00	34
2.26	Release 02.03.00	34
3	Plug & Trust MW Stack	35
3.1	Features	35
3.2	Plug & Trust MW : Block Diagram	36
3.3	SSS APIs	36
3.3.1	SSS: Introduction	36
3.3.2	Session	37
3.3.3	Key Store	42
3.3.4	Key Object	45
3.3.5	Asymmetric	52
3.3.6	Policies	61
3.3.7	Example Boot-Up	68
3.3.8	SSS api key format (asymmetric keys)	72
3.4	SSS APIs: SE051 vs SE050	74
3.5	Parameter Check & Conventions	75
3.5.1	Parameter Convention	75
3.5.2	Helper Macros	76
3.5.3	Apis	76
3.6	I2CM / Secure Sensor	79
3.6.1	Normal Read/Write	79
3.6.2	Attested Read	80
3.6.3	Transaction	80
3.6.4	Read with Attestation	81
3.6.5	I2C Master APIs	81
3.7	Logging	86
3.7.1	Logging level	86
3.7.2	Adding log messages into the source code	86
3.7.3	Logging APIs	86
3.7.4	Logging Header Files	89
3.7.5	Changing logging level	89
3.8	Feature File - <code>fsl_sss_ftr.h</code>	91
3.8.1	When Using CMake	91
3.8.2	When Using MCUXpresso IDE	91
3.8.3	<code>fsl_sss_ftr_default.h</code>	91
3.8.4	Using feature file to reduce code size	92
3.9	Using Platform SCP Keys from File System	93
3.9.1	How to Run examples with Platform SCP03 keys	94
3.10	Auth Objects	94
3.11	Auth Objects : UserID	95
3.11.1	User ID - Provisioning / Injection	95
3.11.2	User ID - Use for connection / authentication	96
3.11.3	User ID - Applet Spec Notes	97
3.12	Auth Objects : AESKey	97

3.13	Auth Objects : ECKey	97
3.13.1	ECKey - Keys Used	97
3.13.2	ECKey - Use for connection / authentication	98
3.14	Key Id Range and Purpose	100
3.15	Authentication Keys	100
3.16	Trust provisioned KeyIDs	101
3.17	SCP03 with PUF	101
3.17.1	Activation Code	101
3.17.2	Key Code	101
3.17.3	Using with LPC55S	102
3.18	SSS Heap Management	102
4	Building / Compiling	103
4.1	Windows Build	103
4.1.1	Prerequisite	103
4.1.2	Create Build files	103
4.1.3	SSS Examples	103
4.2	Import MCUXPresso projects from SDK	104
4.2.1	Prerequisite	104
4.2.2	Importing an example	104
4.2.3	Running / Debugging example	109
4.2.4	Logging on console	113
4.3	Freedom K64F Build (CMake - Advanced)	113
4.3.1	Prerequisite	114
4.3.2	Importing the Project	114
4.3.3	Running / Debugging example	119
4.3.4	Logging on console	123
4.4	i.MX Linux Build	123
4.4.1	Prerequisite	123
4.4.2	Build Instructions	124
4.4.3	SSS Examples	125
4.5	Raspberry Pi Build	125
4.5.1	Prerequisite	125
4.5.2	Connecting SE05X with RaspberryPi	126
4.5.3	Enable Pin configuration for SE05X	126
4.5.4	Build Instructions	126
4.5.5	SSS Examples	127
4.6	CMake	128
4.6.1	Reference Commands	128
4.6.2	CMake - Cross compiling	128
4.7	CMake Options	129
4.7.1	Applet	129
4.7.2	SE05X_Ver	129
4.7.3	Host	129
4.7.4	SMCOM	130
4.7.5	HostCrypto	130
4.7.6	RTOS	131
4.7.7	mbedTLS_ALT	131
4.7.8	SCP	131
4.7.9	FIPS	131
4.7.10	SE05X_Auth	132
4.7.11	A71CH_AUTH	132
4.7.12	Log	132
4.7.13	CMAKE_BUILD_TYPE	133

4.7.14	Feature Control	133
4.7.15	Deprecated Defines	134
4.7.16	NXP Internal Options	136
4.7.17	Other Variables	136
5	Demo and Examples	137
5.1	Demo List	137
5.1.1	DEMO List	137
5.2	SSS API Examples	144
5.2.1	SSS API Examples	144
5.3	Cloud Demos	153
5.3.1	AWS Demo for KSDK	153
5.3.2	AWS Demo for iMX Linux / RaspberryPi	155
5.3.3	GCP Demo for KSDK	158
5.3.4	GCP Demo for iMX Linux / Raspberry Pi	161
5.3.5	IBM Watson Demo for KSDK	163
5.3.6	IBM Watson Demo for iMX Linux / Raspberry Pi	166
5.3.7	Azure Demo for KSDK	169
5.3.8	Azure Demo for iMX Linux / Raspberry Pi	171
5.4	Linux Specific Demos	175
5.4.1	Greengrass Demo for Linux	175
5.4.2	OpenSSL Engine: TLS Client example for iMX/Rpi3	179
5.4.3	Access Manager: Manage access from multiple (Linux) processes to an SE05x IoT Applet	183
5.5	OPC-UA Example	188
5.5.1	OPC UA (Open62541) Demo	188
5.6	ARM PSA Example	192
5.6.1	PSA Non Secure Example	192
5.7	SE05X Examples	194
5.7.1	SE05X Minimal example	194
5.7.2	SE05X Get Info example	194
5.7.3	APDU Player Demo	197
5.7.4	Using policies for secure objects	197
5.7.5	Get Certificate from the SE	201
5.7.6	SE05X Rotate PlatformSCP Keys Demo	201
5.7.7	I2C Master Example	203
5.7.8	SE05X WiFi KDF Example	207
5.7.9	SE05X Export Transient objects	208
5.7.10	SE05X Import Transient objects	209
5.7.11	Import External Object Prepare	210
5.7.12	SE05X Mandate SCP example	215
5.7.13	Read object with Attestation	215
5.7.14	SE05X Transport Lock example	219
5.7.15	SE05X Transport UnLock example	220
5.7.16	SE05X Timestamp	220
5.7.17	SE05X PCR example	220
5.7.18	Configuring Applet Features	224
5.7.19	Write APDU to buffer	225
5.7.20	Inject Certificate into SE	226
5.7.21	SE05X Read State example	227
5.7.22	SE05X Personalization Remove RSA Key Generation Module	228
5.7.23	Test non deletion of desfire CRC module without Features	229
5.7.24	DEMO for Personalization of SE051	230
5.7.25	SE05X MultiThread demo	231
5.7.26	SE05X Invoke Garbage Collection Example	232

5.7.27	ECC Concurrent Example	233
5.7.28	Symmetric Multi Step Concurrent Example	234
5.7.29	Delete and Test Provision	236
5.8	OpenSSL Examples	238
5.8.1	Tool to create Reference key file	238
5.8.2	Building a self-signed certificate	239
5.9	Tests for User Crypto	239
5.9.1	Tests for User Crypto	239
5.10	NXPNFCRDLIB examples	240
5.10.1	MIFARE DESFire EV2 : Prepare Secure Element	240
5.10.2	MIFARE DESFire EV2 : Prepare MDFEV2	241
5.10.3	MIFARE DESFire EV2 : Authentication	243
5.10.4	MIFARE DESFire EV2 : Change Key	247
5.10.5	MIFARE DESFire EV2 : Diversified Change Key	257
5.11	Ease-of-Use examples	268
5.11.1	Ease of Use configuration - IBM Watson	268
5.11.2	Ease of Use configuration - Google Cloud Platform	270
5.11.3	Ease of Use configuration - Azure IoT Hub	272
5.11.4	Ease of Use configuration - AWS IoT Console	274
5.12	Semslite examples	276
5.12.1	SEMS Lite Agent Demo (sems_lite_ex_update)	276
5.12.2	SEMS Lite CLI APP	277
5.13	PUF examples	279
5.13.1	Key Injection to PUF	279
5.13.2	Key Rotation using PUF	281
6	NXP EdgeLock 2GO Agent	287
6.1	Introduction	287
6.2	Building and running the EdgeLock 2GO agent	287
6.2.1	Building / Compiling the EdgeLock 2GO agent	287
6.2.2	Registering the device to the EdgeLock 2GO service	287
6.2.3	Connecting the device to the EdgeLock 2GO service	288
6.3	Datastore / Keystore	288
6.4	Connection to the EdgeLock 2GO cloud service	288
6.4.1	Transport layer security	288
6.4.2	Client authentication	289
6.4.3	Server authentication	289
6.4.4	Application layer protocol	289
6.4.5	Parameters for the connection to EdgeLock 2GO cloud service	290
6.5	Claim Codes	290
6.6	API	290
6.6.1	EdgeLock 2GO Main	290
6.6.2	EdgeLock 2GO Datastore	296
6.6.3	EdgeLock 2GO Keystore	296
6.6.4	EdgeLock 2GO Session	297
6.6.5	EdgeLock 2GO Service	298
6.6.6	EdgeLock 2GO Dispatcher	302
6.6.7	EdgeLock 2GO Utils	302
6.7	Usage Examples	304
7	SEMS Lite Agent	307
7.1	SEMS Lite Overview (Only for SE051)	307
7.1.1	Update Manager (from customer)	308
7.1.2	SEMS Lite Agent (from NXP)	308

7.2	Update Package	308
7.2.1	Package Meta Data	309
7.2.2	MulticastCommands In Protocol Buffer Format	310
7.2.3	Generator Tools	312
7.3	SEMS Lite Agent Usage	314
7.3.1	Case 1: Basic Usage	314
7.3.2	Case 2: In case there was a tearing	315
7.3.3	Case 3: Doing a recovery after a failed update	317
7.3.4	Case 4: Tearing during recovery	321
7.3.5	Case 5: Load Key rotate script encounter SE unexpected power off	321
7.3.6	API Calls for Usage of SEMS Lite Agent	323
7.4	SEMS Lite management APIs	323
7.4.1	Get UUID	324
7.4.2	Get Public Key	324
7.4.3	Get Card contents	325
7.5	SEMS Lite Agent Package Load Process	326
7.6	APIs	331
7.7	SEMS Lite Known Issue	341
7.7.1	Signature for rerun script is incorrect occasionally	341
7.8	SEMS Lite DEMOs	341
8	Plugins / Add-ins	343
8.1	Introduction on OpenSSL engine	343
8.1.1	General	343
8.1.2	Keys	344
8.1.3	Building the OpenSSL engine	346
8.1.4	Sample scripts to demo OpenSSL Engine	347
8.2	Introduction on mbedTLS ALT Implementation	353
8.2.1	Using mbedTLS ALT	353
8.2.2	Testing	355
8.2.3	mbedTLS ALT APIs	356
8.3	Platform Security Architecture	357
8.3.1	PSA SE Driver Interface	357
8.3.2	PSA Concepts	357
8.3.3	Managing KeyIDs	358
8.3.4	Building PSA for TrustZone	358
8.4	Android Key master	359
8.5	Introduction on Open62541 (OPC UA stack)	359
8.5.1	Integrating SE050 in Open62541	359
8.6	WiFi EAP Demo with Raspberry Pi3	359
8.6.1	Prerequisites	359
8.6.2	Introduction	360
8.6.3	Setting up Access point	360
8.6.4	Setting up freeradius Server on Ubuntu	360
8.6.5	Setting up Raspberry Pi3	362
8.7	PKCS#11 Standalone Library	364
8.7.1	Building on Linux/Raspberry Pi3	364
8.7.2	PKCS#11 specifications	364
8.7.3	Using with pkcs11-tool	365
9	CLI Tool	367
9.1	Introduction	367
9.2	Block Diagram	367
9.3	Steps needed before running <code>ssscli</code> tool	368

9.3.1	Once per installation	368
9.3.2	Communication interface (cmake SMCOM setting)	370
9.4	Running the <code>ssscli</code> tool - Windows	370
9.5	CLI Provisioning	370
9.5.1	Generating keys and certificates	370
9.5.2	Provisioning for the demo	370
9.5.3	Steps to provision your device for demo on Windows	371
9.5.4	Steps to provision your device for demo on iMX or Raspberry Pi	372
9.6	Usage Examples	373
9.6.1	SE05X: VCOM Interface	373
9.6.2	SE05X: PCSC interface	375
9.6.3	se05x: JRCPV2 interface	375
9.6.4	A71CH: VCOM Interface	378
9.6.5	A71CH: SCI2C interface	378
9.6.6	MBEDTLS	379
9.7	List of <code>ssscli</code> commands	379
9.7.1	<code>ssscli</code> Commands	380
9.7.2	Set Commands	385
9.7.3	Get Commands	387
9.7.4	Generate Commands	389
9.7.5	Refpem Commands	389
9.7.6	Se05x Commands	390
9.7.7	A71CH Commands	391
9.7.8	POLICY Commands	392
9.8	CLI Data formats	395
9.8.1	DER	395
9.8.2	PEM	396
9.8.3	HEX	396
9.8.4	REFERENCE KEY	396
9.9	Object Policies Through <code>ssscli</code>	396
9.9.1	Create object policy	396
9.9.2	Attach policy to object	399
9.10	Upload keys and certificates to SE05X using <code>ssscli</code> tool	400
10	A71CH	401
10.1	A71CH and SSS API	401
10.1.1	Introduction	401
10.1.2	A71CH API to SSS API mapping	401
10.1.3	Mixing SSS API and A71CH API	403
10.1.4	SSS Object Identifier to A71CH Internal storage mapping	405
10.2	Miscellaneous	405
10.2.1	Demos and examples supported on A71CH	405
10.2.2	OpenSSL Engine	406
10.2.3	A71CH and SCP03	407
10.2.4	A71CH on Raspberry Pi	407
10.3	A71CH Legacy API	408
10.3.1	Introduction	408
10.3.2	A71CH API	409
10.3.3	SW structure	409
10.3.4	API details	410
10.4	A71CH Legacy HLSE (Generic) API	434
10.4.1	HLSE API	434
10.4.2	Logical objects	435
10.4.3	API details	438

10.5	A71CH Legacy Configure Tool	449
10.5.1	Introduction	449
10.5.2	Usage modes	451
10.5.3	Tool deployment	451
10.5.4	Command reference	454
10.5.5	Not connected mode	465
11	Appendix	467
11.1	Glossary	467
11.2	APDU Commands over VCOM	467
11.2.1	COM port parameters	467
11.2.2	VCOM Format	467
11.2.3	Example Commands	468
11.3	Visual Studio 2019 Setup	470
11.3.1	Prerequisites	470
11.3.2	Installing the components	470
11.4	Setting up MCUXpresso IDE	472
11.4.1	To Download and install MCUXpresso IDE:	472
11.4.2	To Install board specific SDK in MCUXpresso	473
11.5	Development Platforms	473
11.5.1	Setup i.MX 8Quad-MCIMX8M-EVK	473
11.5.2	Setup i.MX6UL-MCIMX6UL-EVK	479
11.5.3	Freedom K64F	483
11.5.4	i.MX RT 1060	483
11.5.5	LPC55S69	483
11.5.6	Android: Hikey960	486
11.6	How to get SE Platform Information and UID	500
11.6.1	Using TeraTerm and pre-built binary	501
11.6.2	Using VCOM and binary	502
11.6.3	Using ssscli Tool	504
11.6.4	SE Platform Information on Android platform	504
11.7	Version Information	505
11.8	Certificate Chains	506
11.8.1	SE050 Certificate Chains	506
11.8.2	SE051 Certificate Chains	510
11.9	JRCP_v1 Server	514
11.9.1	Introduction	514
11.9.2	Using the JRCP_v1 server	515
11.10	Using own Platform SCP03 Keys	516
11.11	Write APDU to buffer	517
11.12	Plug & Trust MW APIs	517
11.12.1	Class Hierarchy	517
11.12.2	File Hierarchy	521
11.12.3	Full API	522
12	Indices and tables	831
Index		833

**CHAPTER
ONE**

NXP PLUG & TRUST MIDDLEWARE

Note: The contents of this package is a subset of the regular Plug & Trust Middleware Package. NXP developed components and source files only available under a proprietary NXP license have been removed from this package (e.g. NXP EdgeLock 2GO Agent, SEMS Lite Agent, ...). A more complete list of components and directories removed can be found in *Difference between Apache2 licensed package and NXP Proprietary package*

The NXP Plug&Trust Middleware documentation covers following Secure Elements:

- EdgeLock™ SE050 (Including variants **A**, **B** and **C**)
- EdgeLock™ SE051 (Including variants **A** and **C**)
- A71CH (refer to the [A71CH](#) section at the end of this document)

Setting up SE05x and A71CH development environment for:

- Linux: [Section 4.4 i.MX Linux Build](#)
- Embedded:
 - [Section 11.5.3 Freedom K64F](#)
 - [Section 11.5.4 i.MX RT 1060](#)
 - [Section 11.5.5 LPC55S69](#)
- Android: [Section 11.5.6 Android: Hikey960](#)
- RaspberryPi: [Section 4.5 Raspberry Pi Build](#)
- Windows: [Section 4.1 Windows Build](#)

Documentation also covers:

- Executing Demos and Examples.
- Using the CLI Tool to configure the Secure Element for the Demos.
- Setting up the iMX and Kinetis Freedom boards to be used with the CLI Tool.
- Setting up and executing Demo Examples.

Dedicated application notes:

- Overview of support package
 - [SE050 Support Package](#)
 - [SE051 Support Package](#)
- Secure Element configurations are available here:

- SE050 Configuration
- SE051 Configuration
- Some of the important Application Notes are as shown below:
 - MCU/RTOS: K64F iMXRT1060 LPC55S69
 - MPU/Linux: iMX6UL iMX8MQ
 - Windows: AN12398
- Details regarding SE050 and other detailed application notes can be found at <https://www.nxp.com/products/:SE050>
- Details regarding SE051 and other detailed application notes can be found at <https://www.nxp.com/products/:SE051>

1.1 Organization of Documentation

This documentation is organized into following parts/sections.

- What has changed so far in the middleware stack be found in Section 2 — *Changes*.
- The overall middleware stack is explained in Section 3 — *Plug & Trust MW Stack*
 - The common SSS APIs, a subset of the overall stack, is explained in Section 3.3 — *SSS APIs*
- How to build MW for various reference platform/IDEs is explained in Section 4 — *Building / Compiling*.
 - Section 4.1 — *Windows Build*
 - Section 4.2 — *Import MCUXPresso projects from SDK*. Steps for i.MX RT 1060 and LPC55S are similar to those for *Import MCUXPresso projects from SDK*
 - For advanced users to take power of CMake's capabilities, Section 4.3 — *Freedom K64F Build (CMake - Advanced)*. Steps for i.MX RT 1060 and LPC55S are similar to those for *Freedom K64F Build (CMake - Advanced)*
 - Section 4.4 — *i.MX Linux Build*
 - Section 4.5 — *Raspberry Pi Build*
- The MW package has lots of examples, they are part of Section 5 — *Demo and Examples*.
 - Section 5.1.1 — *DEMO List* has an itemized list of the demos.
 - Section 5.1.1 — *Platforms List*
 - Section 5.1.1 — *Cloud connectivity Examples*
 - Section 5.1.1 — *OpenSSL Engine Examples*
 - Section 5.1.1 — *mbedTLS Examples*
 - Section 5.1.1 — *OPC UA Examples*
 - Section 5.1.1 — *SE05X Specific Examples*
 - Section 5.1.1 — *NFC (DESFire) Examples*
 - Section 5.1.1 — *Ease of Use Configuration Examples*
- Integration with other middlewares/systems is explained in Section 8 — *Plugins / Add-ins*.
 - Section 8.1 — *Introduction on OpenSSL engine*

- Section 8.2 — *Introduction on mbedTLS ALT Implementation*
- Section 11.5.6 — *Android: Hikey960*
- Section 8.5 — *Introduction on Open62541 (OPC UA stack)*
- Section 8.7 — *PKCS#11 Standalone Library*
- The CLI Tool is explained in Section 9 — *CLI Tool*
 - Section 9.7 — *List of ssscli commands*

1.2 Folder Structure

Folder / File Name	Description
README . First . txt	<i>PLEASE Read this file before using the Software Package</i>
EULA.pdf	Contains the End User License Agreement. Required to be agreed mandatorily before using the PlugAndTrustMW software
Third _ Party _ License.pdf	This file lists the Third Party license(s) in text that are part of this software package.
akm	This folder has the files corresponding to Android Key Master implementation as part of Plug&Trust MW Currently AKM solution is supported only on HiKey 960 development platform.
binaries	This folder has pre-build binaries and executables. e.g. It has firmware binaries to emulate Virtual COM port on freedom K64F, etc. binaries for platforms supported. For Ex: FRDM-K64F, i.MX RT1060.
binaries/pySSSCLI	This folder contains pre-compiled ssscli tool. This tool runs on Windows.
demos	This folder contains various Demonstration Examples for the supported platforms. See DEMO List for list of supported Demos.
demos / Certificate_Chains	This folder contains the certificate chains as per OEF configuration The intermediate and RootCA certificates are required to connect to clouds using trust provisioned device certificates. See Certificate Chains
doc	This folder contains the documentation for Plug&Trust MW in the form of html files
ext	This folder contains files related to external dependencies that are required to build the Middleware and it's demo examples. e.g. amazon-FreeRTOS, openSSL, mbedTLS, JRCP, etc.
hostlib	This folder contains the <i>common</i> part of host library e.g. T=1oI2C communication protocol stack, SE05x APIs, etc.
hostlib/hostlib/accessManager	Contains the source code of the Access Manager application. The Access Manager supports concurrent access from multiple linux processes to an SE05x IoT applet.
nxp_iot_agent	This folder contains source code of the EdgeLock 2GO agent and demonstration examples.
projects	This contains MCUXpresso projects that can use CMake generated gnu-arm-gcc cross compiled build directories for easy download and debug.
pycli	This folder contains the NXP proprietary command-line tool (ssscli) for configuring and provisioning the SE05x (Secure Element) Please ensure that PYTHON Version 3.6 or later (32 bit) is installed. The default pre-compiled DLLs are 32bit and hence this tool needs a 32 bit Python.
scripts	This folder contains scripts for creating CMake projects
semslite	This folder contains source code of the SEMS Lite agent, demonstration examples and generator tools.
sss	This folder contains the “SSS” APIs interface to the Application Layer
tools	This folder contains the pre-built binaries and DLLs.

1.3 List of Platform Prerequisites

All the examples assume that build environment is setup and refer these sections for guidance.

Platform	Link
Windows	<i>Windows Build</i>
FRDM-K64F	<i>Import MCUXPresso projects from SDK or Freedom K64F Build (CMake - Advanced)</i>
RaspberryPi-3 RaspberryPi-4	/ <i>Raspberry Pi Build</i>
IMX6UL / IMX8M	<i>i.MX Linux Build</i>
RT1060	<i>i.MX RT 1060</i>
LPC55S	<i>LPC55S69</i>

CHANGES

2.1 Pending Refactoring items

The following items would be re-factored and changed in future releases. These topics are deemed to be deprecated and to be used with vigilance.

2.2 Known limitations

The following known limitations exist in this package. And they would be addressed in subsequent releases.

- [SSS] Cipher init manages crypto object: The SSS layer's implementation of multistep symmetric ciphers does not allow concurrent execution of ciphers with the same cipher mode (e.g. twice kAlgorithm_SSS_AES_CBC).
 - Workaround : Use lower layer api's instead of sss api's for multistep symmetric for concurrent or interleaved access.

2.3 Release v03.00.05

2.3.1 Functional Changes

- Added Platform SCP03 keys for SE051 (Variant A2 and C2).

2.3.2 New feature support

- Added support for Key Attestation when multiple digests are specified during key creation in Android Keystarter.

2.3.3 SSSCLI Changes

- Read ID list has been sorted based on object index.

2.3.4 Documentation Changes

- Updated documentation to include links to SE051 specific documents and Application Notes.

2.3.5 Examples / DEMO updates

- Added examples [Section 5.7.27 ECC Concurrent Example](#) and [Section 5.7.28 Symmetric Multi Step Concurrent Example](#) for Access Manager
- Access Manager ([Access Manager: Manage access from multiple \(Linux\) processes to an SE05x IoT Applet](#)): miscellaneous implementation improvements.

2.3.6 Difference between Apache2 licensed package and NXP Proprietary package

The Apache2 licensed package includes support for using the Plug&Trust Middleware on Linux Platforms.

The following modules or directories are not part of the Apache2 licensed package:

- akm Android Keymaster support
- binaries A set of precompiled binaries for microcontrollers and pyCli tool
- demos/kdsk microcontroller based demos
- demos/lpc55s Trustzone demo on LPC55S
- demos/nxpnfcrdlib NXP reader library
- demos/se05x/psa_nonsecure PSA demo on LPC55S
- demos/tfm_port Trustzone demo on LPC55S
- demos/jrcplib JRCPPv2 support
- demos/JRCPPProxyConsole JRCPPv2 to vcom proxy for Windows
- demos/mcu-sdk Microcontroller SDK's
- demos/nxpnfcrdlib_dal NXP reader library
- demos/nxpnfcrdlib_rtos NXP reader library
- hostlib/hostlib/ccid CCID driver
- hostlib/hostlib/platform/ksdk KSDK specific files
- hostlib/hostlib/vcom Microcontroller side vcom driver
- nxp_iot_agent EdgeLock 2GO Agent library and examples
- semslite SEMS Lite Agent library and examples
- sss/plugin/psa

In addition a subset of source files and scripts are now released under an Apache2 license instead of an NXP proprietary license.

2.4 Release v03.00.04

2.4.1 File/Folder relocation

2.4.2 Build system changes

- Building the OpenSSL Engine with `OPENSSL_NO_HW` defined is now triggering a build error. This changes the old behaviour where the OpenSSL Engine built did not support integration with the Secure Element.

2.4.3 APIs & enum/types Changes

2.4.4 Functional Changes

2.4.5 New platform support

2.4.6 New feature support

2.4.7 SEMSLite

2.4.8 SSSCLI / PyCLI Changes

- Added support for session authentication with Platform SCP03 combinations:
 - `UserID_PlattSCP03`
 - `AESKey_PlattSCP03`
 - `ECKey_PlattSCP03`

2.4.9 Documentation Changes

- SEMS Lite documentation update
- Access Manager documentation update
- Yocto flow to create iMX8 SD card updated to Yocto Zeus

2.4.10 Examples / DEMO updates

- `demos/se05x/se05x_ReadWithAttestation` : Updated parsing of Object attributes. Take into account differences between SE050 and SE051 regarding Object attributes. (*Read object with Attestation*)
- `hostlib/hostlib/accessManager` : Additional functionality and miscellaneous bug improvements on an embedded Linux system. (*Access Manager: Manage access from multiple (Linux) processes to an SE05x IoT Applet*)
 - Added command line option to allow incoming connections on all IP addresses, previously this was the default behaviour
 - Improvement: Server now closes STREAM connection in case Client has closed it.
 - Improvement: Fix applet version detection
 - Compile time removal (default) of incomplete and un-tested lock / unlock handling

2.4.11 Communication Layer Changes

2.4.12 User Interface Changes

2.4.13 External modules Changes

2.4.14 Other Miscellaneous Changes

- Bug Fix : Fix for attestation read of symmetric objects which have no read policy.

2.5 Release v03.00.03

2.5.1 File/Folder relocation

2.5.2 Build system changes

- Embedded Linux: Support for building against mbedTLS shared libraries

2.5.3 APIs & enum/types Changes

- smCom_Init: return type is now *U16* instead of *void*. Return value indicates success/failure to create mutex/semaphore.
- The enumerated type **SE05x_EDSignatureAlgo_t** contained a value **kSE05x_EDSignatureAlgo_ED25519PH_SHA_512**. The mnemonic name of the value was misleading as it actually corresponded to the *Pure EDDSA algorithm* not the *Prehashed (PH) EDDSA algorithm*. This has now been corrected. **This will require corresponding update in the application code.**
 - EDDSA signature algorithm enumerated value **kSE05x_EDSignatureAlgo_ED25519PH_SHA_512** is changed into **kSE05x_EDSignatureAlgo_ED25519PURE_SHA_512**.
 - EDDSA attestation algorithm enumerated value **kSE05x_AttestationAlgo_ED25519PH_SHA_512** is changed into as **kSE05x_AttestationAlgo_ED25519PURE_SHA_512**.

2.5.4 Functional Changes

2.5.5 New platform support

- Embedded Linux / Yocto: using Yocto Zeus (5.4.24_2.1.0) as iMX reference environment
- Integrated KSDK Rel.12 specific changes into Plug&Trust MW

2.5.6 New feature support

- Multithreaded support extended from Posix to FreeRTOS
- SE05x Garbage collection API and example using the Garbage collection API

2.5.7 SEMSLite

- Support for MulticastPackageFormat 1.2
- KSDK Examples added
- SEMSLite CLI application now available as a pre-compiled Windows binary

2.5.8 SSSCLI / PyCLI Changes

2.5.9 Documentation Changes

2.5.10 Examples / DEMO updates

- `hostlib\hostlib\accessManager` illustrates how multiple processes can share access to a Secure Element on an embedded Linux system. (*Access Manager: Manage access from multiple (Linux) processes to an SE05x IoT Applet*)

2.5.11 Communication Layer Changes

- Select Applet: No prequel with Select CM required for SE05x

2.5.12 User Interface Changes

2.5.13 External modules Changes

- `simw-top/ext/amazon-freertos` updated to KSDK version 202002.00_rev1
- `simw-top/ext/mbedtls` updated to KSDK version 2.16.2_rev2
- `simw-top/ext/mcu-sdk` updated to public release 2.8.0
- `simw-top/ext/paho.mqtt.c` updated to version 1.3.5

2.5.14 Other Miscellaneous Changes

- Fixed warnings when compiling with GCC 9.2
- Fixed typo in example code API: `ex_sss_keystore_and_object_init()` is now `ex_sss_key_store_and_object_init()`
- Extended SE051 specific APDU command and response buffer size to match SE051's capabilities.
- Removed support for intermediate versions of the SE051 product
- SSS API blocks SHA512 attestation, signing and verification for RSA512 key

2.6 Release v03.00.02

2.6.1 File/Folder relocation

2.6.2 Build system changes

- Cmake workareas for iMX/RspPi created by scripts/create_cmake_projects.py now default to linking against shared libraries
- Shared libraries installed by Cmake all go into /usr/local/lib (paho libraries no longer go into /usr/local/lib64)
- New Host Crypto library cmake option MBEDCRYPTO added: mandatory for PSA TF-M demo (*Platform Security Architecture*). UseMBEDTLS for other use cases and demos where mbedTLS host crypto is required.
- Supported Secure element versions (SE05X_Ver) are 03_XX (SE050) and 06_00 (SE051) only.

2.6.3 APIs & enum/types Changes

- AEAD APIs are added as a part of Se051.

```
sss_aead_context_free()  
sss_aead_context_init()  
sss_aead_finish()  
sss_aead_init()  
sss_aead_one_go()  
sss_aead_update()  
sss_aead_update_aad()
```

2.6.4 Functional Changes

- Added heap management macros for SSS layer. [SSS Heap Management](#)
- Extend support to SE051 (default build is for SE050, to make SE051 specific features available in the host software, set SE05X_Ver to 06_00)

2.6.5 New platform support

2.6.6 New feature support

SEMS Lite - Enables the deployment and update of applets in the field, while enabling preservation of on device applet data.

2.6.7 SSSCLI / PyCLI Changes

- ssscli connect se050 has been replaced with ssscli connect se05x

2.6.8 Documentation Changes

2.6.9 Examples / DEMO updates

- Examples Added for Se051
 - se05x_DesfireCRC : *Test non deletion of desfire CRC module without Features*
 - se05x_ReadState : *SE05X Read State example*
 - se05x_Perso_Delete_Mod_RSAKeyGen : *SE05X Personalization Remove RSA Key Generation Module*
- iMX/RspPi Linux cloud demos now link against Paho libraries that are included in the Plug&Trust MW in the siwm/ext folder. Except for Azure cloud demo which links against downloaded Paho from git master.
- PSA TF-M demo on LPC55S69 (*PSA Non Secure Example* or *Platform Security Architecture*)

2.6.10 Communication Layer Changes

2.6.11 User Interface Changes

2.6.12 Other Miscellaneous Changes

- T1oI2C:
 - Fixed: potential null pointer dereference
 - Fixed: RSYNC _ + CRC error results in saving response to uninitialised buffer.
- Yocto recipe for Plug&Trust Mw Package: contained in scripts/yocto folder
- hostlib/hostLib/platform/linux/i2c_a7.c: A call to *axI2CTerm()* now closes the I2C file descriptor associated with the I2C communication channel.
- Fix OpenSSL Engine Issue: Key Creation was not handed back to SW implementation (issue introduced in v02.16.00 and linked to X25519 and X448 curve support)

2.7 Release v02.16.01

Note: This release fixes an issue introduced in v02.16.00 (see under ‘APIs & enum/types Changes’). If you are using v02.16.00 please migrate to v02.16.01.

2.7.1 APIs & enum/types Changes

- Removed member **object_exist** from C structure **Se05xPolicy_t**. This solves a potential issue with the direct usage from the following APIs:

- *Se05x_API_WriteECKey*
- *Se05x_API_WriteRSAKey*
- *Se05x_API_WriteSymmKey*
- *Se05x_API_WriteBinary*
- *Se05x_API_WritePCR*

The potential issue prevented by this change is as follows: In case **object_exist** was not properly initialized, the specific object policy passed as an argument for an object to be created would not be applied, instead the default policy would be applied.

The invocation of the above API's from the SSS layer has been modified accordingly.

2.7.2 Documentation Changes

- The enumerated type **SE05x_EDSignatureAlgo_t** contains a value **kSE05x_EDSignatureAlgo_ED25519PH_SHA_512**. The mnemonic name of the value is misleading as it actually corresponds to the *Pure EDDSA algorithm* not the *Prehashed (PH) EDDSA algorithm*.

2.7.3 Other Miscellaneous Changes

- T1oI2C:
 - Fixed: potential null pointer dereference
 - Fixed: RSYNC _ + CRC error results in saving response to uninitialised buffer.
- Include pre-compiled a7x_vcom_to_* binaries for the iMX.RT1060 host platform (instead of iMX.RT1050) in the simw/binaries folder.
- Fixed issue with VCOM on RT1060

2.8 Release v02.16.00

2.8.1 File/Folder relocation

- **se05x.Inject_Certificate** renamed to **se05x.InjectCertificate**
- **se05x.minimal** renamed to **se05x.Minimal**
- **se05x.Get_Info** to **se05x.GetInfo**
- **se05x.Get_Certificate** to **se05x.GetCertificate**
- **ex_i2cMaster** to **se05x.I2cMaster**

2.8.2 Build system changes

2.8.3 APIs & enum/types Changes

2.8.4 Functional Changes

2.8.5 New platform support

- Added support for MIMXRT1060

2.8.6 New feature support

- Added EdgeLock2go examples
- Montgomery X25519 curve support added for Openssl engine

2.8.7 SSSCLI / PyCLI Changes

- Added support to create object policy and attach to objects
- Sign and Verify input data restricted to file, Command line facility is removed

2.8.8 Documentation Changes

2.8.9 Examples / DEMO updates

- Added example for LPC55S based *Key Injection to PUF*
- Added example for LPC55S based *Key Rotation using PUF*
- Examples renamed
 - se05x_setAppletFeatures => se05x_SetAppletFeatures
 - se05x.Inject_Certificate => se05x.InjectCertificate
 - se05x_minimal => se05x_Minimal
 - ex_A71CHMain => a71ch_Main
 - se05x_Get_Info => se05x_GetInfo
 - se05x_Get_Certificate => se05x_GetCertificate
 - ex_i2cMaster => se05x_I2cMaster
 - ex_i2cMaster_with_Attestation => se05x_I2cMasterWithAttestation
 - cloud_demo_aws => cloud_aws
 - cloud_demo_gcp => cloud_gcp
 - cloud_demo_ibm_watson => cloud_ibm_watson
 - cloud_demo_azure => cloud_azure

2.8.10 Communication Layer Changes

- smComSerial for Linux PC: Do not translate CR (carriage return) into NL (newline) character when reading data

2.8.11 User Interface Changes

2.8.12 Other Miscellaneous Changes

- MIMXRT1050 support replaced with MIMXRT1060
- ImportExternalObjectCreate example is removed. ImportExternalObjectPrepare prepares and sends the object.

2.9 Release v02.15.00

Internal Milestone - Not published to NXP Website

2.9.1 Build system changes

- Changed FIPS Selection. Now use *FIPS* -DSSS_HAVE_FIPS=ON is no longer valid. Use -DFIPS=SE050 to enable FIPS mode or -DFIPS=None to disable FIPS mode.

2.9.2 APIs & enum/types Changes

- Added support for extended applet features to be used with *Se05x_API_SetAppletFeatures()*.
- Updated *Se05x_API_SetAppletFeatures()* and *sss_se05x_set_feature()* signature. Defined new structure with applet features and extended features.
- Added *kAlgorithm_SSS_ECDAA* in *sss_algorithm_t* for Barreto Naehrig curves.
- Refactored *sss_algorithm_t*, added common algorithm *kAlgorithm_SSS_RSAES_PKCS1_V1_5*, removed SHA dependency.
- Added APIs *Se05x_API_WriteSymmKey_with_version()*, *Se05x_API_WriteECKey_with_version()*, *Se05x_API_WriteRSAKey_with_version()* and *Se05x_API_WriteBinary_with_version()* to create key with version information.
- Added API *Se05x_API_TLSCalculateRsaPreMasterSecret()* to support RSA Pre-master secret with client version.
- Updated PCR functionality to not pass hash value from outside. Application should pass an input which will be hashed inside the applet.

2.9.3 Functional Changes

- Enable usage of usleep for clang.
- Moved PSA driver initialization to secure application on LPC55S.
- Added support for flash storage of PSA keystore on LPC55S. See [Managing KeyIDs](#).
- Added support for Platform SCP03 using PUF on LPC55S.

2.9.4 New feature support

- SEMS Lite added for applet install, upgrade, delete etc.
- Added support for AES GCM on AKM

2.9.5 Documentation Changes

- Added Documentation on ota-greengrass for Greengrass.
- Added documentation for SEMS Lite.

2.9.6 Examples / DEMO updates

- Updated example Section 5.7.18 [Configuring Applet Features](#) to demonstrate use of extended features.
- Added attestation examples. Section 5.2.1 and Section 5.2.1
- Added example to demonstrate [kAlgorithm_SSS_ECDAASigning](#) signing operation.
- Added example for secure pairing on LPC55S
- Added examples for SEMS Lite
- Added examples for Perso scripts to demonstrate how to personalize the applet.

2.9.7 Other Miscellaneous Changes

- Files simw-top/hostlib/hostLib/platform/imx/i2c_a7.c and simw-top/hostlib/hostLib/platform/rsp/i2c_a7.c have been merged and the resulting I2C wrapper file is now located at simw-top/hostlib/hostLib/platform/linux/i2c_a7.c
- Memory leak fixes in T1oI2C layer
- Buffer size fixes, support for CKA_LABEL, CKA_CERTIFICATE_TYPE and CKA_ALWAYS_AUTHENTICATE in PKCS#11.

2.10 Release v02.14.00

2.10.1 File/Folder relocation

- Renamed DTLS/SSL2 Server and client executables. New names are:
 - mbedtls_ex_orig_ssl_server2
 - mbedtls_ex_sss_dtls_client
 - mbedtls_ex_orig_dtls_server
 - mbedtls_ex_sss_ssl2_client
- Renamed project greengrass to sss_pkcs11
- Renamed file greengrass.c to sss_pkcs11.c
- Renamed folders of Reader Library examples.
 - ex_prepare_MFDDEV2 => ex_Ev2Prepare_Card
 - ex_prepare_se05x => ex_Ev2Prepare_se05x

2.10.2 Build system changes

- Extensively revamped fsl_sss_ftr.h file for finer control of build configuration selection. This design will be extended extensively in future releases.
- On LPC55S with FreeRTOS, using native malloc instead of Heap_4.c for mbedTLS
- Compile time asserts added for sizes of structures.
- scripts/env_setup.sh, scripts/env_setup.sh prints info on which tools are used from which paths.
- Changed Applet selection in CMake (See [Section 4.7.1 Applet](#)). We no longer use name SE050_A, SE050_B or SE050_C for builds / Applet selection. New names are SE05X_A, SE05X_B or SE05X_C
- CMake Option Applet_SE05X_Ver is no longer used. Instead, [Section 4.7.2 SE05X_Ver](#) is introduced for future use.
- See [Section 4.7.10 SE05X_Auth](#)
 - FastSCP is now called ECKey.
 - AppletSCP is now called AESKEY.

2.10.3 New platform support

- i.MX8 support added ([Setup i.MX 8MQuad - MCIMX8M-EVK](#))

2.10.4 APIs & enum/types Changes

- Use `Se05x_API_ReadObject_W_Attest()` instead of `sss_se05x_key_store_get_key_attst()` to read with attestation large binary files greater than 500 bytes. See example *Reading large binary objects with attestation*
- For Montgomery curves the key arguments, DH Shared secret and Signature are passed in Little Endian Convention. Refer to *SSS api key format (asymmetric keys)* for details on Endianness.
- `sss_derive_key_go()` is deprecated and is replaced by `sss_derive_key_one_go()`
- Added `sss_status_sz()` to convert SSS API Return code to string.
- Updated Enumeration from `SE05x_TransientType_t` to `SE05x_INS_t` in the following API's:
 - `Se05x_API_WriteECKey`
 - `Se05x_API_WriteRSAKey`
 - `Se05x_API_WriteSymmKey`
- Define T1oI2C_UM1225_SE050 is no longer applicable, use T1oI2C_UM11225_SE05X instead.
- Added SE050 APIs `Se05x_API_CreateCounter`, `Se05x_API_SetCounterValue`, `Se05x_API_IncCounter`
- smCom Layer is refactored so that Application send down the connection handles/parameters to lower layer.
e.g. SSCLI and Demos on PC which can take command line argument can now use the I2C device over command line at run time without recompiling the middleware/example.

2.10.5 Functional Changes

- Extensive support for *A71CH*.
- Added enable pin support for SE05X on Raspberry Pi
- Modified SE policy of keymaster HAL in Android
- Updated RSA reference key format for Android Key Master. It now uses prefix A5 to import Key ID 00000001.

2.10.6 New feature support

- Added tool `se05x_setAppletFeatures` to configure applet features
- Added support to use Platform SCP keys from file system
- Added support to retrieve existing certificates in pem format
- Added tool to mandate Platform SCP03
- Integrated mBED Crypto PSA interface
- Added Secure-NonSecure example based on PSA for LPC55S
- Added examples of SE05X Import Transient objects, SE05X Export Transient objects, Import External Object Prepare and Import External Object Create
- Added example to demonstrate object read with attestation
- Added example to demonstrate how timestamp is incremented in SE
- Added example to demonstrate how to create APDU buffer to import external key objects.

- Lock and unlock secure element using transport key
- Upgraded mbedTLS to version 2.16

2.10.7 SSSCLI / PyCLI Changes

- Added support for ECC ED25519 and MONT DH 25519 curves
- Fixed sign and verify operation for ED25519.
- Added API to inject HMAC key
- Endianness of ed25519 and mont_dh_25519 keys, signature and shared secret are updated to little endian.

2.10.8 Communication Layer Changes

- VCOM Interface updates on OSX and PC Linux
- Added connection handle in smCom layer. This allows connection data to be passed from application. Tested on windows, raspberry pi and imx platform.

2.10.9 APIs & enum/types Changes

- Re-Wrote (internal) low level Tx/Rx APIs for APDU TxRx.
 - 1) DoAPDUTxRx_s_Case2
 - 2) DoAPDUTxRx_s_Case3
 - 3) DoAPDUTxRx_s_Case4
 - 4) DoAPDUTxRx_s_Case4E
- Define T1oI2C_UM1225_SE05X is no longer applicable, use T1oI2C_UM11225 instead.
- *SE05x_CryptoModeSubType_t* `::u8` renamed to `SE05x_CryptoModeSubType_t::union_8bit`
- Endianness of ed25519 and mont_dh_25519 signature and shared secret are updated to little endian.

2.10.10 Examples / DEMO updates

Updated Examples:

- [Section 5.7.2 SE05X Get Info example](#) Updated to show CPLC data.

New Examples:

- [Section 5.7.11 Import External Object Prepare](#)
- `import-external-obj-create` `import-external-obj-create`
- [Section 5.7.13 Read object with Attestation](#)
- [Section 5.7.14 SE05X Transport Lock example](#)
- [Section 5.7.15 SE05X Transport UnLock example](#)
- [Section 5.7.16 SE05X Timestamp](#)
- [Section 5.7.19 Write APDU to buffer](#)

2.10.11 Documentation Changes

- Updated notes on `ssscli se05x reset` and `Se05x_API_DeleteAll_Iterative()`
- Updated documentation of SE05X layer of SSS APIs, e.g. `sss_se05x_key_store_load()` now mentions that this API does not do anything special on SE05X.
- Updated wifi-eap document.
- Changed logging styles and updated misc documentation with the same information.
- Added documentation for PKCS#11 standalone library
- Updated Greengrass documentation with new PKCS#11 project name
- Added documentation for Import External Object example
- Extended API Documentation for SE05X Low Level APIs

2.10.12 Other Miscellaneous Changes

- Bug fix: Remaining cache data and input data handled in `sss_cipher_finish` API
- OPC-UA Example enabled for compilation/running from Raspberry PI
- mbedTLS Upgraded to v02.16.02
- Added mbedCrypto for LPC55S / TF-M related work. (Ongoing, NXP Internal work)

2.11 Release v02.12.05

Handle PC Linux for VCOM Interface.

2.12 Release v02.12.04

Minor touch ups.

2.13 Release v02.12.03

AKM: Fix processing of keys without read policy.

2.14 Release v02.12.02

2.14.1 AKM Specific changes

- Fixed limitation in importing Key ID 00000001. (Using prefix 0xA5.)

2.14.2 Example Updates

- Updated example Section 5.2.1 *RSA Example* to also inject RSA key and run with FIPS compiled option.
- Added compile time check to skip examples Section 5.2.1 *HKDF Example* and Section 5.2.1 *ECDH Example* when compiled with FIPS

2.14.3 Other Miscellaneous Changes

- Added check to skip attempt to erase Trust Provisioned objects.

2.15 Release v02.12.01

2.15.1 AKM Specific changes

- Modified SE policy of keymaster HAL in Android
- Added Section 5.7.6 *SE05X Rotate PlatformSCP Keys Demo* to be build by Android build system.

2.15.2 New example / example updates

- Added support to retrieve existing certificates in pem format
- Ex se05x_Minimal.c shows `kSE05x_MemoryType_PERSISTENT` memory. (Earlier it used `kSE05x_MemoryType_TRANSIENT_DESELECT`)
- Extended Section 5.7.6 *SE05X Rotate PlatformSCP Keys Demo* & its documentation.

2.15.3 Other Miscellaneous Changes

- Updated Platform SCP Keys & SSD_NAME from Application Note
- Added *Using Platform SCP Keys from File System*
- Logging. Added USE_COLORED_LOGS inside nxLog.c
- Support FastSCP with and without KDF counter.
- Added support of VEN pin support for SE05X on Raspberry Pi / iMX6.
- Supports applet version 03.06.00

2.16 Release v02.12.00

2.16.1 New feature support

- Added demos *HMAC Example* and *ECDH Example*
- SHA (one shot and multi step) and HMAC (one shot and multi step) implementation in SCCP A71CH layer
- Added support for AWS Cloud example with Ease-of-Use configuration
- Added support of Multistep update for HMAC in Android Keystream

2.16.2 SSSCLI / PyCLI Changes

- Updated AWS Provisioning certificate chain to remove Intermediate CA

2.16.3 Documentation Changes

- Added documentation for AWS Ease-of-Use

2.17 Release v02.11.03

2.17.1 File/Folder relocation

Moved this files: hostLib:

```
a71ch/src/a71ch_com.c => libCommon/infra/sm_connect.c
tstUtil/app_boot.h => libCommon/infra/app_boot.h
tstUtil/app_boot_nfc.c => libCommon/infra/app_boot_nfc.c
tstUtil/app_boot_nfc.h => libCommon/infra/app_boot_nfc.h
tstUtil/a7x_app_boot.c => libCommon/infra/sm_app_boot.c

tstUtil/tst_utils_kinetis.c => libCommon/infra/sm_demo_utils.c
tstUtil/tst_utils_kinetis.h => libCommon/infra/sm_demo_utils.h

tstUtil/tst_utils_rtos.c -> libCommon/infra/sm_demo_utils_rtos.c

inc/a71ch_const.h => sm_const.h
```

hostLib/libCommon/scp:

```
scp.c split to scp.c and scp_a7x.c
```

2.17.2 New feature support

- WiFi and cloud demos support for LPC55S

2.17.3 Scripts and Build changes

- I2C is not longer a valid define. Use SCI2C to select SCI2C for A71XX Family.
- NON Cmake based MCUXPresso projects from projects/ folder are removed and no longer supported.

These examples are now separately released as KSDK Packages.

2.17.4 Documentation Changes

- Updated API usage description for T1oI2C protocol stack

2.17.5 Other Miscellaneous Changes

- PKCS#11 Testbench Integration

2.18 Internal Release v02.11.01

2.18.1 APIs & enum/types Changes

- Added phNxpEse_data in iFrameInfo_t also in sFrameInfo_t
- Changed order of parameters to `sss_channel_context_init`:

```
// Earlier:  
    sss_status_t sss_channel_context_init(  
        sss_session_t *session, sss_channel_t *context);  
  
// Now: Parameters are swapped  
    sss_status_t sss_channel_context_init(  
        sss_channel_t *context, sss_session_t *session);
```

- Changed order of parameters to `sss_rng_context_init()`:

```
// Earlier:  
    sss_status_t sss_rng_context_init(  
        sss_session_t *session, sss_rng_context_t *context);  
  
// Now: Parameters are swapped  
    sss_status_t sss_rng_context_init(  
        sss_rng_context_t *context, sss_session_t *session);
```

- Renamed `sss_channel_context_init` to `sss_tunnel_context_init`
- Renamed `sss_channel_context_free` to `sss_tunnel_context_free`

2.18.2 Functional Changes

- Added support for jrcp server on Android platform
- Fixed bug in VCOM Close for A71XX Family
- Handle WTX for CCID/PCSC Interface
- Added open62541 (OPC UA)
- Added RSA support to `<simw-top>/demos/linux/tls_client/scripts/tlsServer.sh`, `tlsSeClient.sh` and `tlsExtendedSeClient.sh` scripts.
- Added /reset support for jrcp server V1.

2.18.3 New feature support

- Added support for AWS Greengrass core on Rpi.

2.18.4 Scripts and Build changes

- Fixed MSVC Compiler warnings
- CMake option `SSS_HAVE_FIPS` is not a boolean. Earlier it was a string.
- AKM android based system set to build with `SSS_HAVE_FIPS` and `SSS_HAVE_SCP_SCP03_SSS`
- `SSS_HAVE_TESTCOUNTERPART` and `WithSSS_TestCounterPart` are deprecated. Please use `SSSFTR_SW_TESTCOUNTERPART`
- In file `hostLib/platform/imx/i2c_a7.c`, check `I2C_FUNC_SMBUS_READ_BLOCK_DATA` only for SCI2C (A71CH)
- Removed obsolete variables `ENGINE_DRIVEN_LIB_TYPE` and `BUILD_A71CH_OPENSSL_ENGINE` from cmake build scripts. Only the cmake option `WithSharedLIB` now determines the type of library (shared or static) that will be built / installed.
- AKM android based system set to build with All authentication types

2.18.5 Documentation Changes

- Fixed ssscli pre-steps documentation for RaspberryPi.
- Updated documentation
- Added ssscli commands list.
- Added Ease-Of-Use documentation for Azure IoT Hub.

2.18.6 Communication Layer Changes

- Removed unwanted buffer handling from T1oI2C.

2.18.7 User Interface Changes

- Updated input parameters in `<simw-top>/demos/linux/tls_client/scripts/provisionTlsClient.py` script. Usage example:

```
python provisionTlsClient.py --key_type ecc --connection_data 169.254.0.1:8050
```

They are documented in [Section 8.1 Introduction on OpenSSL engine](#)

2.18.8 Other Miscellaneous Changes

- ECC Key overwrite on different curve id not allowed
- lwIP stack updated. Current version of lwIP is based on lwIP 2.1.2 and lwIP-contrib 2.1.0.
- Freertos version upgraded to 1.4.7_rev0
- Added NO_REGISTER_ALL flag for openSSL engine (openssl 1.1.1) to use the capabilities specified in openSSL conf file.
- openSSL 1.1.1 warnings fixed.


2.19 Release v02.11.00

2.19.1 File/Folder relocation

boards folder has been moved from

`simw-top\ext\mcu-sdk` to

`simw-top\demos\ksdk\common`

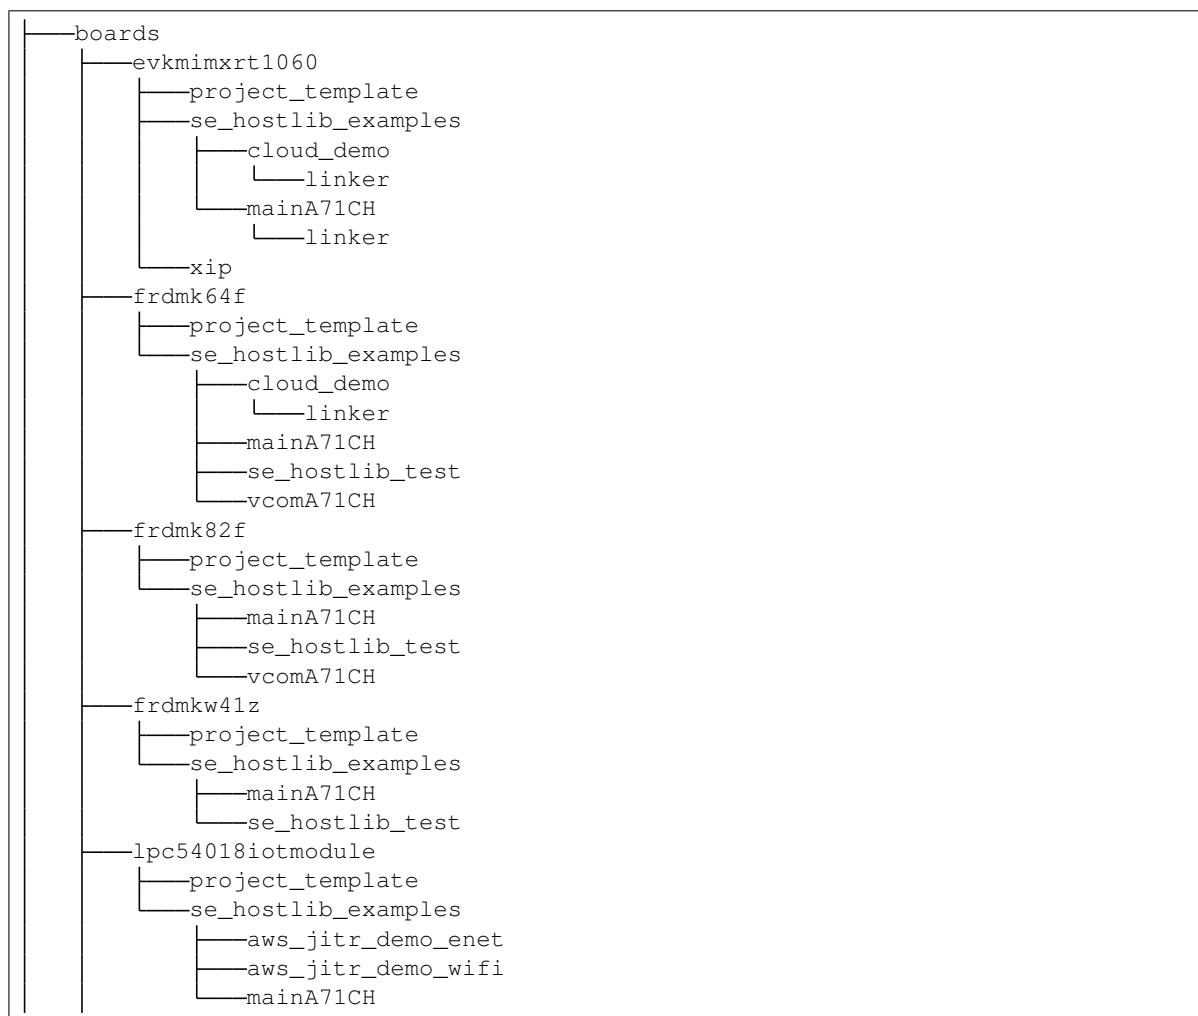

(continues on next page)

(continued from previous page)

```

└── lpcxpresso55s
    ├── project_template
    └── se_hostlib_examples
        └── cloud_demo
            └── linker

```

freertos folder moved from

simw-top\ext\freertos to

simw-top\demos\ksdk\common\freertos

```

└── freertos
    └── FreeRTOSConfig.c

```

other boards folder has been moved from

simw-top\ext\boards to

simw-top\demos\ksdk\common\freertos\boards

```

└── boards
    ├── evkmimxrt1060
    │   app.h
    │   aws_bufferpool_config.h
    │   aws_mqtt_agent_config.h
    │   aws_mqtt_config.h
    │   aws_secure_sockets_config.h
    │   CMakeLists.txt
    │   FreeRTOSConfig.h
    │   FreeRTOSIPConfig.h
    │   fsl_phy.h
    │   lwipopts.h
    └── frdmk64f
        app.h
        aws_bufferpool_config.h
        aws_mqtt_agent_config.h
        aws_mqtt_config.h
        aws_secure_sockets_config.h
        CMakeLists.txt
        FreeRTOSConfig.h
        FreeRTOSIPConfig.h
        fsl_phy.h
        lwipopts.h
    └── lpcxpresso55s
        app.h
        aws_bufferpool_config.h
        aws_mqtt_agent_config.h
        aws_mqtt_config.h
        aws_secure_sockets_config.h
        CMakeLists.txt
        FreeRTOSConfig.h
        FreeRTOSIPConfig.h
        fsl_phy.h
        lwipopts.h

```

2.19.2 APIs & enum/types Changes

- Removed SE05x_AuthCtx_UserID_t. Use *SE05x_AuthCtx_ID_t* instead
- Removed SE_ConnType_t. Use SSS_Conn_Type_t instead
- Removed SEConnType_t. Use SSS_Conn_Type_t instead
- Removed AppletConfig_SM from *SE05x_Applet_Feature_t*
- Renamed se05x_TP_PlatformSCP03keys to se05x_RotatePlatformSCP03Keys

2.19.3 Functional Changes

- **Added CCID/PCSC Interface (Experimental):**
 - Added kType_SE_Conn_Type_PCSC
 - Added weak function SysTick_Handler_APP_CB() to allow unblocking of threads. This is needed to handle the IRQ based design of CCID Middleware.
- **Added support for hmac-sha224 in mbedtls and openssl SSS MAC apis:**
 - Added *kAlgorithm_SSS_HMAC_SHA224*
 - Fix a crash seen in sss_mbedtls_mac_context_free.
 - Renamed and modified project se05x_Get_UID as se05x_Get_Info to include platform information also.

2.19.4 New platform support

- Added support for secure world and non secure world implementation of LPC55S.

2.19.5 Scripts and Build changes

- Added AOSP build support for Android keymaster.
- Added Host=lpcxpresso55s_s and Host=lpcxpresso55s_ns to support secure world implementation of LPC55S.
- No longer supporting -DApplet_SE05X_Ver=02_02_00
- Creating cmake_options.mak similar to fsl_sss_ftr.h so that customer build systems can be used/extended.

2.19.6 SSSCLI / PyCLI Changes

- Switched to Python 3
- Provisioning scripts refactored to be more consistent with internal variable names for keys and certificates. (No behaviour change)
- Updated cryptography patch to support BrainpoolP256R1 curve
- Refactored scripts to use different variable names.
- For some versions of python cryptography module, key_size was not available. Handling this within python library now.

- Added PKCS#12 format reference key creation.
- Enabled pcsc connection method

2.19.7 Documentation Changes

- Documentation for Demos updated. Earlier, KSDK demos were mentioning Raspberry Pi steps as well. This is removed now.
- Included documentation on how to get SE UID
- Included documentation for Ease of Use with IBM Watson and GCP
- Added default cmake options for imx and rpi build document.
- i.MX / Yocto instructions updated to include Python3 and func-timeout Python package

2.19.8 Communication Layer Changes

- Optimized T1oI2C transceive time by 3-8 ms.
- Poll waiting time has been reduced from 5ms to 1ms.
- T=1 I2C support for GP 0.39 specification.

Warning: You need to add both `-DT1oI2C` and `-DT1oI2C_UM1225_SE050` in your build system makefile to select T=1 over I2C Interface of SE050.

Earlier only `-DT1oI2C` was needed.

2.19.9 Other Miscellaneous Changes

- Support for DTLS example
- Included certificate chain in middleware for trust provisioned keys
- Included pre-built binary to get SE UID for FRDM-K64F, iMX-RT1060 and LPC55S
- Included pre-built binary for VCOM for LPC55S
- Added azure root certificate
- Key generation added for a71ch openssl engine (openssl 1.1.1)
- Compile time directives for SE050A/B/C in openssl engine
- Added `EX_SSS_BOOT_OPEN_HOST_SESSION` to let application decide on opening a host session
- Extended legacy openssl engine test scripts with multiple ecc keys testing. Also replaced ssscli tool with a71ch config tool for testing
- Added sampleConfig.json file for aws (linux) demo
- Added pre-built binaries to configure applet flavour (A, B or C) on iMX6 platform
- Added pre-built EXEs to configure applet flavour (A, B or C) from PC and VCOM Connection

2.20 Release v02.10.00

2.20.1 APIs & enum/types Changes

Renaming of structures to follow convention:

- auth_scp03_dyn_context_t -> *NXSCP03_DynCtx_t*
- auth_scp03_static_context_t -> *NXSCP03_StaticCtx_t*
- se05x_auth_mech_scp03_context_t -> *NXSCP03_AuthCtx_t*
- se05x_auth_mech_fastscp_context_t -> *SE05x_AuthCtx_FastScp_t*

Re-factored structure for cleaner isolation of static and dynamic objects:

- **SE05x_AuthCtx_FastScp_t, NXSCP03_AuthCtx_t**
 - Moved members to separate structure *NXFastSCP03_StaticCtx_t*

Re-factored structure to reclaim static memory when not needed:

- *NXSCP03_AuthCtx_t*, *SE05x_AuthCtx_FastScp_t* and *SE05x_AuthCtx_ID_t* now uses pointers to objects that can be freed eventually by the application after they are used during initial suthentication.
- **a71ch_auth_context_t**
 - Removed *a71ch_auth_context_t* and using only *SE_Connect_Ctx_t*
- **sss_sscp_session**
 - Added member *mem_sscp_ctx : sscp_context_t* for memory.

Added configurability:

- *NXSCP03_StaticCtx_t* - Added keyVersioNo for platform SCP.
- **sss_se05x_channel_context_t**
 - Added member *channelLock : pthread_mutex_t* for simultaneous access.

Moved SE050 specific parameters to the end of structure:

- *NXSCP03_DynCtx_t* - authType is now the last member of the structure. Earlier it was the first structure.

New structure added:

- Added *sss_connect_ctx_t* and *SE_Connect_Ctx_t*

Promoted Auth to be generic instead of being SE050 Specific:

- kSE05x_AuthType_UserID -> kSSS_AuthType_ID
- kSE05x_AuthType_SCP03 -> kSSS_AuthType_SCP03
- kSE05x_AuthType_FastSCP -> kSSS_AuthType_FastSCP
- kSE05x_AuthType_AppletSCP03 -> kSSS_AuthType_AppletSCP03
- kSE05x_AuthType_None -> kSSS_AuthType_None

Add new use cases:

- SmCommState_t Added skip_select_applet to skip selecting the applet.

2.20.2 New platform support

- **Added LPC55s**
 - WiFi is not yet integrated on LPC55s demos
- **Raspberry PI**
 - Tested using Raspbian OS for SE050

2.20.3 Scripts and Build changes

- iMX RT 1050 drivers updated to SDK Release 2.6.1

2.20.4 SSSCLI / PyCLI Changes

- Added timeout mechanism in `ssscli`

2.20.5 Other Miscellaneous Changes

- In few files, NON-ASCII characters are replaced with their ASCII equivalents.

2.21 Release v02.09.00

- Integration Applet release v02.05.00
- Renamed `hostLib/se05x_02_02_00` to `hostLib/se05x_02_02_xx`
- No longer using the term PIN. Using UserID for Authentication Objects
- Integration Applet release v02.03.00

2.21.1 Middleware

- Refactor: Changed `kSSS_KeyType_Certificate` to `kSSS_KeyType_Binary`

2.21.2 CLI Tool

- Updated `ssscli --help` documentation
- option `--format` has been added to CLI commands to specify file format.
- option `--hashalgo` has been added to sign and verify commands.
- option `--auth_type` has been added to connect command.

2.22 Release v02.07.00

2.22.1 Middleware

- Re-Wrote CMake build system to use Drop Down for selection of values instead of Check Boxes.
- WithSMCOM_SOCKET renamed to WithSMCOM_JRCP_V1
- WithSMCOM_JRCP renamed to WithSMCOM_JRCP_V2
- Added support for Applet_SE05X_Ver_02_02_xx, removed support for other version of Applet.
- Renamed eSE05xTAG_t to SE05x_TAG_t
- Added Negative test cases to check T1oI2C functionality.
- Hard reset recovery Mechanism implemented.
- Logging implemented for Android platform

2.22.2 SMCom

- Added Thread smCom Layer (Experimental)
- Changed T=1 over I2C layer to support JCOP SR6 (Handling of CRC Changed)

Note: This change makes it in-compatible with older CES release of SE050.

- API exposed for clearing T1oI2C 7816 params to SMCom Layer (smComT1oI2C_ComReset())
- Hard Resetting IC using ENA pin is implemented.
- Read polling count decreases.

2.22.3 SSS APIs

- Refactored RSA/CRT RSA Key types. RSA Deemed RAW By default.
- Added separate policies for Symmetric / Asymmetric keys
- Added policies for counters

2.22.4 CLI Tool

- Changed set ecc NIST_P256 to set ecc
- Session Open uses PIN with pin ID “0x7DA00001” and key “[0xC0, 0x01, 0x02, 0x03, 0x04]”
- CLI Failure Stack dump captured in log file.
- Added ‘se05x’ specific commands

2.22.5 Development Platform

- (Hikey960) Added support for SE050 v2.2.4
- (Hikey960) Support for HMAC
- (Hikey960) Support for HMAC sign/verify
- (Hikey960) Support for AES encrypt/decrypt
- (Hikey960) Support for Attestation

2.23 Release v02.06.00

2.23.1 Demos

2.23.2 Plug & Trust Middleware

- (SE050) Added basic policies
- (SE050) Updated enums for EC Curve IDs
- (SE050) Support v1.1.0 and v1.2.0 from same stack
- (SSS, SE050) Added policies
- (CLI-Tool) Changed ecc 256 to ecc NIST_P256

2.23.3 Documentation

- Updated section on *Logging*
- Updated section on *AOSP build Environment Setup*
- Added/Updated CMake Options
- Updated navbar and searchbox placement for handling of html display

2.23.4 Development Platform

- (Hikey960) Added support for SE050 v1.2.0
- (Hikey960) Support for ECC-521 and AES-128

2.24 Release v02.05.00

Added Android Key Master.

2.25 Release v02.04.00

Added SE050 EAR CH and SE050 EAR CL Applet supports.

2.26 Release 02.03.00

Added support for SSS APIs.

PLUG & TRUST MW STACK

3.1 Features

Supported development platforms: *Development Platforms*

The Plug & Trust Middleware Stack supports:

- Directly accessible standard API/integration
 - mbed TLS
 - OpenSSL
 - Android KeyStore
- Examples for quick integration
 - TLS examples
 - Cloud service on-boarding examples
- Integration with NXP EdgeLock 2GO cloud service (Upcoming)

3.2 Plug & Trust MW : Block Diagram



3.3 SSS APIs


3.3.1 SSS: Introduction

SSS is an acronym for Secure Sub System

The SSS APIs are functional APIs to abstract the access to various types of Cryptographic Sub Systems. Such secure subsystems could be (but not limited to):

- Secure Elements
- Secure Enclaves
- Cryptographic HWs

3.3.2 Session

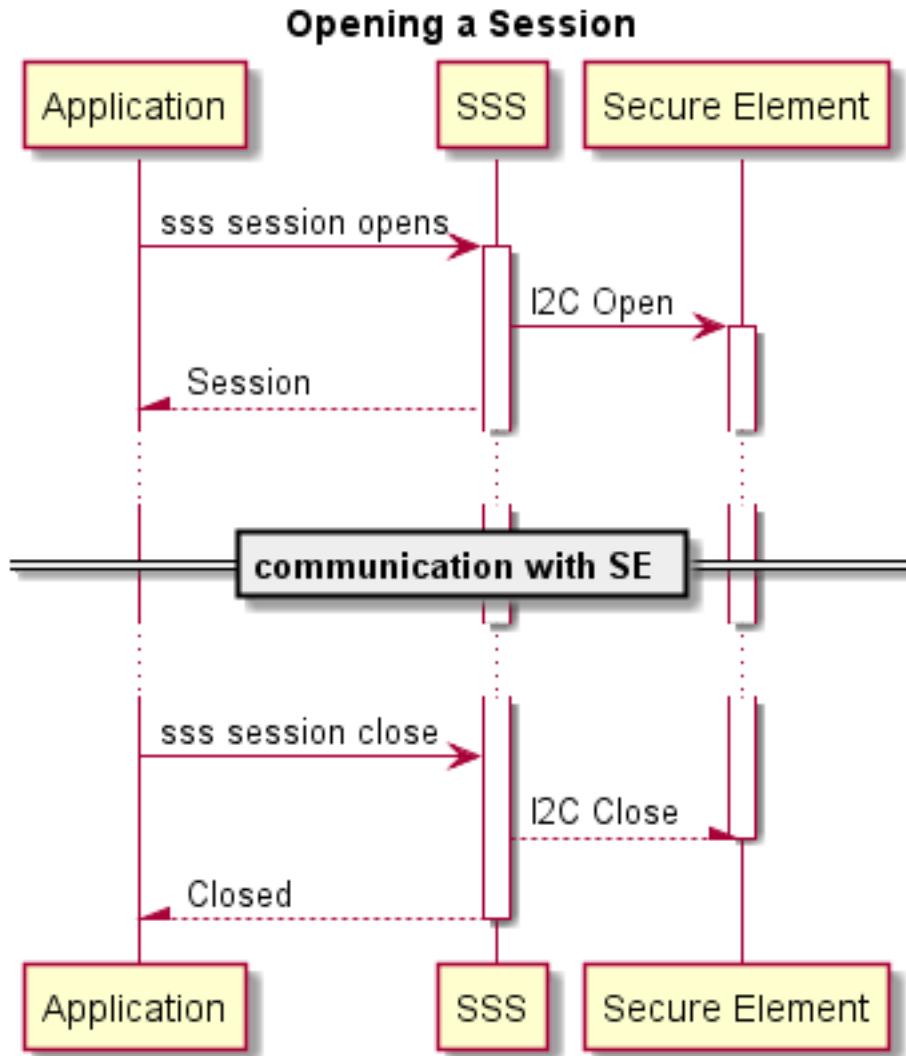

See `sss_session_open()`, `sss_session_close()`

Opening a Session

Sessions are tightly coupled with underlying system. For opening a session, `sss_session_open()`, subsystem is passed from `sss_type_t`, while the parameter `connectionData` plays a pivotal role where there are subsystem specific parameters to be handled.

SE05x Session

For example, a dedicated `SE_Connect_Ctx_t` is passed while opening a session to the SE05x Secure Element.

```
/* Opening a password/user id based session */
sss_session_t session      = {0};
SE_Connect_Ctx_t connectCtx = {0};
sss_object_t ex_id         = {0}; /* Object to store the id value */
sss_status_t status;

/* we need a host session and key store to access
 * values from host */
sss_session_t host_session  = {0};
sss_key_store_t host_keystore = {0};

/* Value which we are going to use eventually.
 * We will not use it directly, but indirectly.
 * We will store this in ex_id
 */
const uint8_t value_user_id[] = EX_SSS_AUTH_SE05X_UserID_VALUE;

/* Open host session and key store */
status = sss_session_open(&host_session, kType_SSS_Software, 0, kSSS_ConnectionType_Plain, NULL);
TEST_ASSERT_EQUAL_HEX(kStatus_SSS_Success, status);
status = sss_key_store_context_init(&host_keystore, &host_session);
TEST_ASSERT_EQUAL_HEX(kStatus_SSS_Success, status);

/* Set the auth object in Connect context */
connectCtx.auth.ctx.idobj.pObj = &ex_id;
status                         = sss_key_object_init(connectCtx.auth.ctx.idobj.pObj, &host_keystore);
TEST_ASSERT_EQUAL_HEX(kStatus_SSS_Success, status);

/* On the host, allocate object and set value */
status = sss_key_object_allocate_handle(connectCtx.auth.ctx.idobj.pObj,
                                         __LINE__,
                                         kSSS_KeyPart_Default,
                                         kSSS_CipherType.UserID,
                                         sizeof(value_user_id),
                                         kKeyObject_Mode_Transient);
TEST_ASSERT_EQUAL_HEX(kStatus_SSS_Success, status);
status = sss_key_store_set_key(&host_keystore,
                               connectCtx.auth.ctx.idobj.pObj,
                               value_user_id,
                               sizeof(value_user_id),
                               8 * sizeof(value_user_id),
                               NULL,
                               0);
TEST_ASSERT_EQUAL_HEX(kStatus_SSS_Success, status);

/* Now we connect to the SE. In this example, we
 * are connecting to over JRCP V2 interface */
connectCtx.portName        = gszA71SocketPortDefault;
connectCtx.connType         = kType_SE_Conn_Type_JRCP_V2;
connectCtx.auth.authType   = kSSS_AuthType_ID;
```

(continues on next page)

(continued from previous page)

```
const uint32_t authObjectIdForPasswordSession = EX_SSS_AUTH_SE05X_UserID_AUTH_ID;

/* Open the session to the secure element */
status = sss_session_open(
    &session, kType_SSS_SecureElement, authObjectIdForPasswordSession, kSSS_
    ↳ConnectionType_Password, &connectCtx);
TEST_ASSERT_EQUAL_HEX(kStatus_SSS_Success, status);
/* .... operations with the SE ... */
/* Close the connection to secure element */
sss_session_close(&session);
```

APIS

group **sss_session**
Manage session.

Enums

enum sss_session_prop_au8_t

Properties of session that are S32

From 0 to kSSS_SessionProp_Optional_Prop_Start, around $2^{24} = 16777215$ Properties are possible.

From 0 to kSSS_SessionProp_Optional_Prop_Start, around $2^{24} = 16777215$ Properties are possible.

Values:

kSSS_SessionProp_au8_NA = 0

Invalid

kSSS_SessionProp_szName

Name of the product, string

kSSS_SessionProp_UID

Unique Identifier

kSSS_SessionProp_au8_Optional_Start = 0x00FFFFFFu

Optional Properties Start

kSSS_SessionProp_au8_Proprietary_Start = 0x01FFFFFFu

Proprietary Properties Start

enum sss_session_prop_u32_t

Properties of session that are U32

From 0 to kSSS_SessionProp_Optional_Prop_Start, around $2^{24} = 16777215$ Properties are possible.

From 0 to kSSS_SessionProp_Optional_Prop_Start, around $2^{24} = 16777215$ Properties are possible.

Values:

kSSS_SessionProp_u32_NA = 0

Invalid

kSSS_SessionProp_VerMaj

Major version

kSSS_SessionProp_VerMin

Minor Version

```
kSSS_SessionProp_VerDev
    Development Version

kSSS_SessionProp_UIDLen

kSSS_SessionProp_u32_Optional_Start = 0x00FFFFFFu
    Optional Properties Start

kSSS_KeyStoreProp_FreeMem_Persistant
    How much persistent memory is free

kSSS_KeyStoreProp_FreeMem_Transient
    How much transient memory is free

kSSS_SessionProp_u32_Proprietary_Start = 0x01FFFFFFu
    Proprietary Properties Start
```

Functions

void **sss_session_close** (*sss_session_t* **session*)
Close session between application and security subsystem.

This function closes a session which has been opened with a security subsystem. All commands within the session must have completed before this function can be called. The implementation must do nothing if the input *session* parameter is NULL.

Parameters

- *session*: Session context.

sss_status_t **sss_session_create** (*sss_session_t* **session*, *sss_type_t* *subsystem*, *uint32_t* *application_id*, *sss_connection_type_t* *connection_type*, *void* **connectionData*)

Same as *sss_session_open* but to support sub systems that explicitly need a create before opening.

For the sake of portability across various sub systems, the application has to call *sss_session_create* before calling *sss_session_open*.

Parameters

- [inout] *session*: Pointer to session context
- [in] *subsystem*: See *sss_session_open*
- [in] *application_id*: See *sss_session_open*
- [in] *connection_type*: See *sss_session_open*
- [in] *connectionData*: See *sss_session_open*

void **sss_session_delete** (*sss_session_t* **session*)

Counterpart to *sss_session_create*

Similar to constraint on *sss_session_create*, application may call *sss_session_delete* to explicitly release all underlying/used session specific resources of that implementation.

sss_status_t **sss_session_open** (*sss_session_t* **session*, *sss_type_t* *subsystem*, *uint32_t* *application_id*, *sss_connection_type_t* *connection_type*, *void* **connectionData*)

Open session between application and a security subsystem.

Open virtual session between application (user context) and a security subsystem and function thereof. Pointer to session shall be supplied to all SSS APIs as argument. Low level SSS functions can provide implementation specific behaviour based on the session argument.

Return status

Parameters

- [inout] session: Session context.
- [in] subsystem: Indicates which security subsystem is selected to be used.
- [in] application_id: ObjectId/AuthenticationID Connecting to:
 - application_id == 0 => Super user / Platform user
 - Anything else => Authenticated user
- [in] connection_type: How are we connecting to the system.
- [inout] connectionData: subsystem specific connection parameters.

```
sss_status_t sss_session_prop_get_au8(sss_session_t *session, uint32_t property, uint8_t
                                      *pValue, size_t *pValueLen)
```

Get an underlying property of the crypto sub system.

This API is used to get values that are numeric in nature.

Property can be either fixed value that is calculated at compile time and returned directly, or it may involve some access to the underlying system.

Return

Parameters

- [in] session: Session context
- [in] property: Value that is part of `sss_session_prop_au8_t`
- [out] pValue: Output buffer array
- [inout] pValueLen: Count of values there are/must be read

```
sss_status_t sss_session_prop_get_u32(sss_session_t *session, uint32_t property, uint32_t
                                       *pValue)
```

Get an underlying property of the crypto sub system.

This API is used to get values that are numeric in nature.

Property can be either fixed value that is calculated at compile time and returned directly, or it may involve some access to the underlying system.

For applicable properties see `sss_session_prop_u32_t`

Return

Parameters

- [in] session: Session context
- [in] property: Value that is part of `sss_session_prop_u32_t`
- [out] pValue:

```
struct sss_session_t
#include <fsl_sss_api.h> Root session.
```

This is a *singleton* for each connection (physical/logical) to individual cryptographic system.

Public Members

```
uint8_t data[(0 + (1 * sizeof(void *)) + (1 * sizeof(void *))) + (8 * sizeof(void *)) + 16]
```

```
struct sss_session_t::[anonymous] extension
```

Reserved memory for implementation specific extension


```
sss_type_t subsystem
```

Indicates which security subsystem is selected.

This is set when *sss_session_open* is successful

3.3.3 Key Store

KeyStore is a container for all secure keys and objects inside a secure storage.

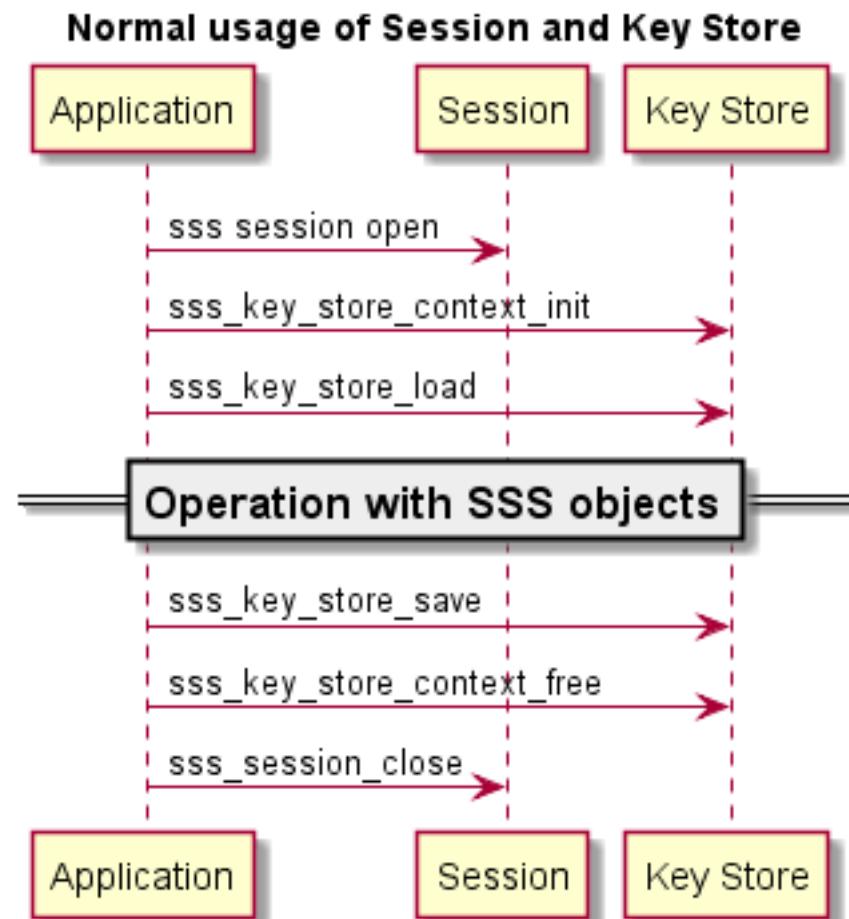

APIs

group **sss_key_store**

Secure storage for keys and certificates.

Enums

enum **sss_key_store_prop_au8_t**

properties of a Key Store that return array

Values:

kSSS_KeyStoreProp_au8_Optional_Start = 0x00FFFFFFu

Optional Properties Start

enum **sss_tunnel_dest_t**

Entity on the other side of the tunnel

Values:

kSSS_TunnelDest_None = 0

Default value

kSSS_TunnelType_Se05x_Iot_applet

SE05X IoT Applet

Functions

sss_status_t sss_key_store_allocate (sss_key_store_t *keyStore, uint32_t keystoreId)

Get handle to key store. If the key store already exists, nothing is allocated. If the key store does not exists, new empty key store is created and initialized. Key store context structure is updated with actual information.

Parameters

- [out] keyStore: Pointer to key store context. Key store context is updated on function return.
- keystoreId: Implementation specific ID, can be used in case security subsystem manages multiple different key stores.

void sss_key_store_context_free (sss_key_store_t *keyStore)

Destructor for the key store context.

sss_status_t sss_key_store_context_init (sss_key_store_t *keyStore, sss_session_t *session)

Constructor for the key store context data structure.

Parameters

- [out] keyStore: Pointer to key store context. Key store context is updated on function return.
- session: Session context.

sss_status_t sss_key_store_erase_key (sss_key_store_t *keyStore, sss_object_t *keyObject)

Delete / destroy allocated keyObject .

Return The sss status.

Parameters

- keyStore: The key store
- keyObject: The key object to be deleted

`sss_status_t sss_key_store_freeze_key (sss_key_store_t *keyStore, sss_object_t *keyObject)`

The referenced key cannot be updated any more.

Return The sss status.

Parameters

- keyStore: The key store
- keyObject: The key object to be locked / frozen.

`sss_status_t sss_key_store_generate_key (sss_key_store_t *keyStore, sss_object_t *keyObject, size_t keyBitLen, void *options)`

This function generates key[] in the destination key store.

`sss_status_t sss_key_store_get_key (sss_key_store_t *keyStore, sss_object_t *keyObject, uint8_t *data, size_t *dataLen, size_t *pKeyBitLen)`

This function exports plain key[] from key store (if constraints and user id allows reading)

`sss_status_t sss_key_store_load (sss_key_store_t *keyStore)`

Load from persistent memory to cached objects.

`sss_status_t sss_key_store_open_key (sss_key_store_t *keyStore, sss_object_t *keyObject)`

Access key store using one more level of encryption.

e.g. Access keys / encryption key during storage

Return The sss status.

Parameters

- keyStore: The key store
- keyObject: The key object that is to be used as a KEK (Key Encryption Key)

`sss_status_t sss_key_store_save (sss_key_store_t *keyStore)`

Save all cached persistent objects to persistent memory.

`sss_status_t sss_key_store_set_key (sss_key_store_t *keyStore, sss_object_t *keyObject, const uint8_t *data, size_t dataLen, size_t keyBitLen, void *options, size_t optionsLen)`

This function moves data[] from memory to the destination key store.

Return

Parameters

- keyStore: Key store context
- keyObject: Reference to a key and it's properties
- data: Data to be stored in Key. When setting ecc private key only, do not include key header.
- dataLen: Length of the data
- keyBitLen: Crypto algorithm key bit length
- options: Pointer to implementation specific options
- optionsLen: Length of the options in bytes

```
struct sss_key_store_t
#include <fsl_sss_api.h> Store for secure and non secure key objects within a cryptographic system.
```

- A cryptographic system may have more than partitions to store such keys.

Public Members

`uint8_t data[(0 + (1 * sizeof(void *)) + (4 * sizeof(void *)) + 16)]`

`struct sss_key_store_t::[anonymous] extension`

Reserved memory for implementation specific extension

`sss_session_t *session`

Virtual connection between application (user context) and specific security subsystem and function thereof.

Key Format

The `sss_key_store_set_key` and `sss_key_store_get_key` API's do not impose a specific format on the data parameter. Different implementations of the SSS API can have different capabilities in dealing with an input format (relevant for `sss_key_store_set_key`) and will use a specific output format (relevant for `sss_key_store_get_key`). The following section illustrates this by taking the example of the SE050 implementation in the context of EC Key pairs.

EC Key pair

When passing an EC key pair as data argument to the `sss_key_store_set_key` API, the key pair data must be DER encoded using either the pkcs#8 format or classic OpenSSL format.


When retrieving an EC key pair as data argument from the `sss_key_store_get` API, the full key pair cannot be retrieved. Instead the public key value is returned. The public key is retrieved in ANSI X9.62 uncompressed format.

3.3.4 Key Object

Objects / Key Objects are Low level entities of key/certificates in SSS domain.


Below we can see UML Hierarchy of an object:

Container : Session / Key Store / Objects

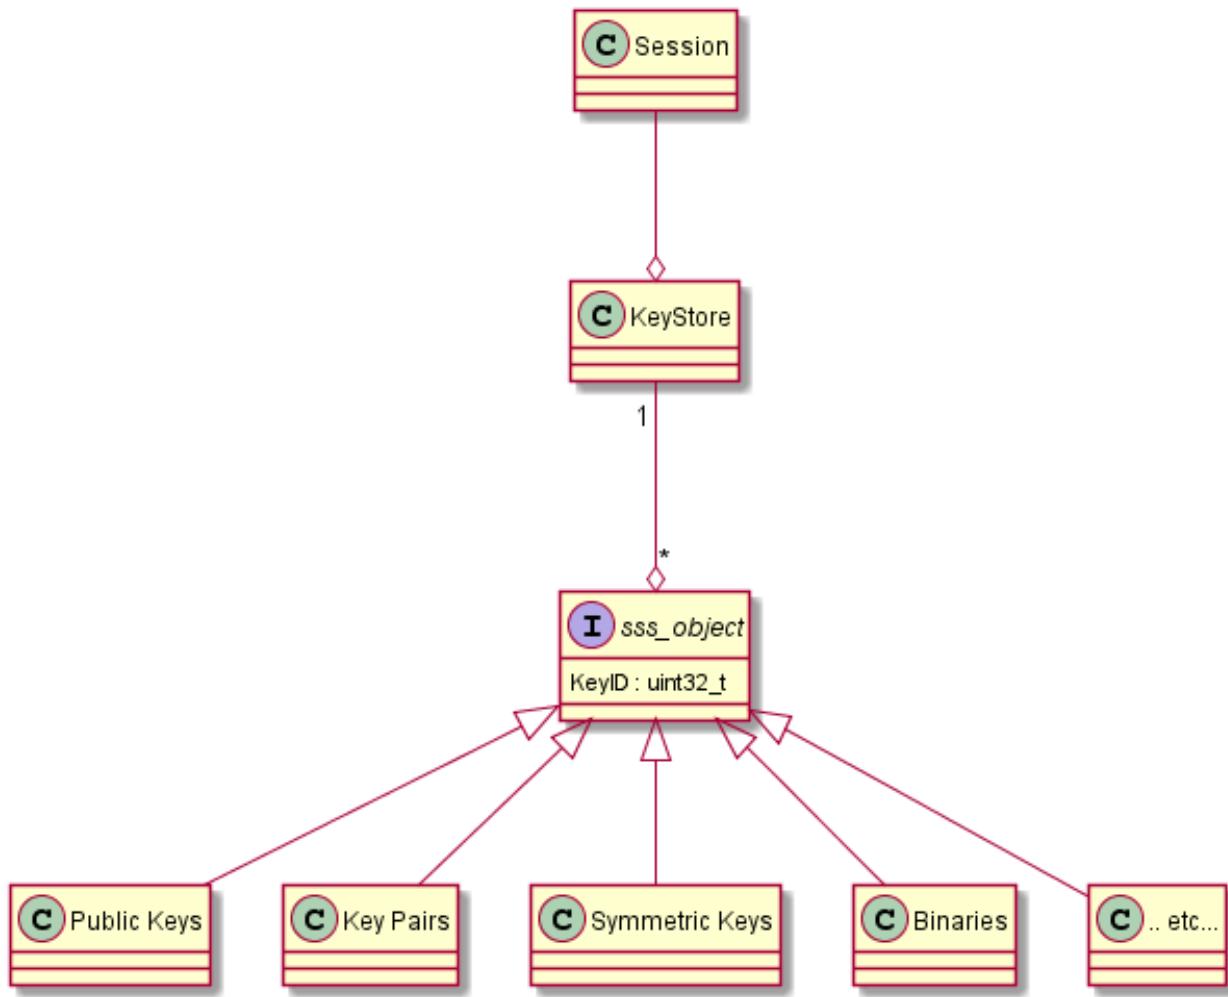

Create / Provision

To create a key, the sequence of APIs looks as under. This is generally done during provisioning stage.

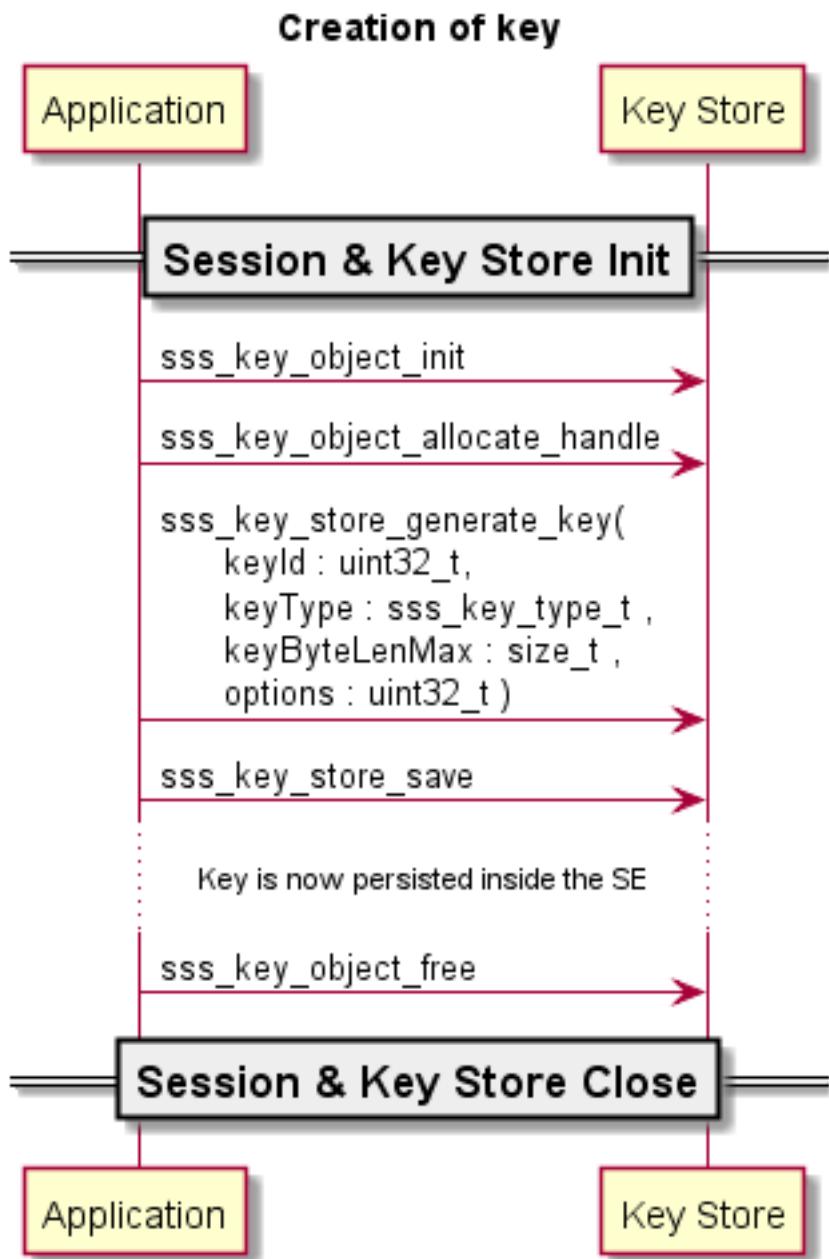

To set (inject) values in a previously allocated key, the sequence of APDUs look as under.


Note: Policies

This section would be updated later to show case creation of keys with different policies attached to it.

Change value of previously created Objects


To create a key, the sequence of APIs looks as under:

Change value of previously created object

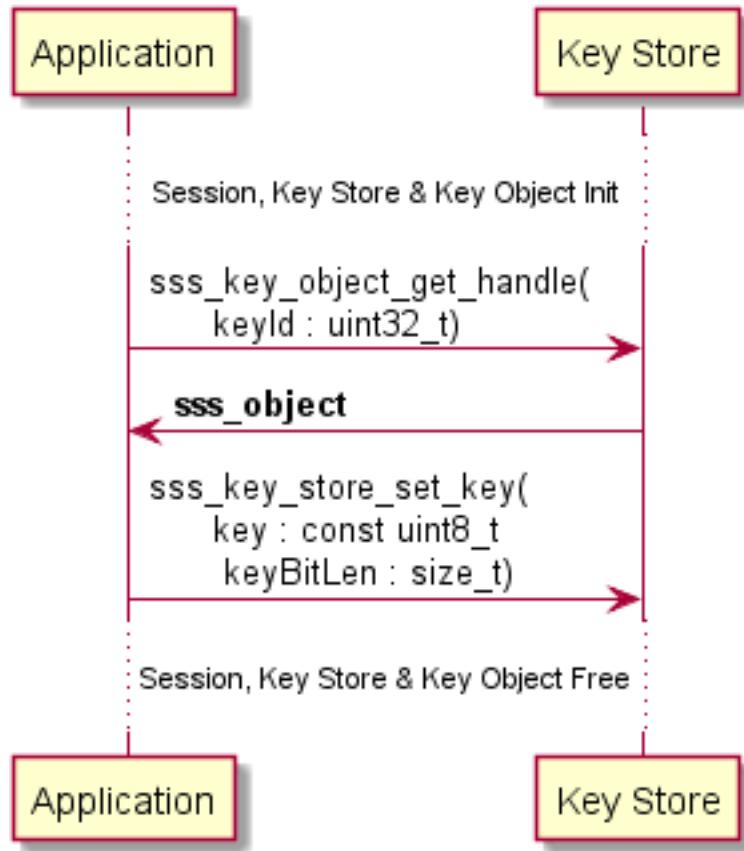

Use previously provisioned/created Keys/Objects

To use a key, the API sequence is as under:

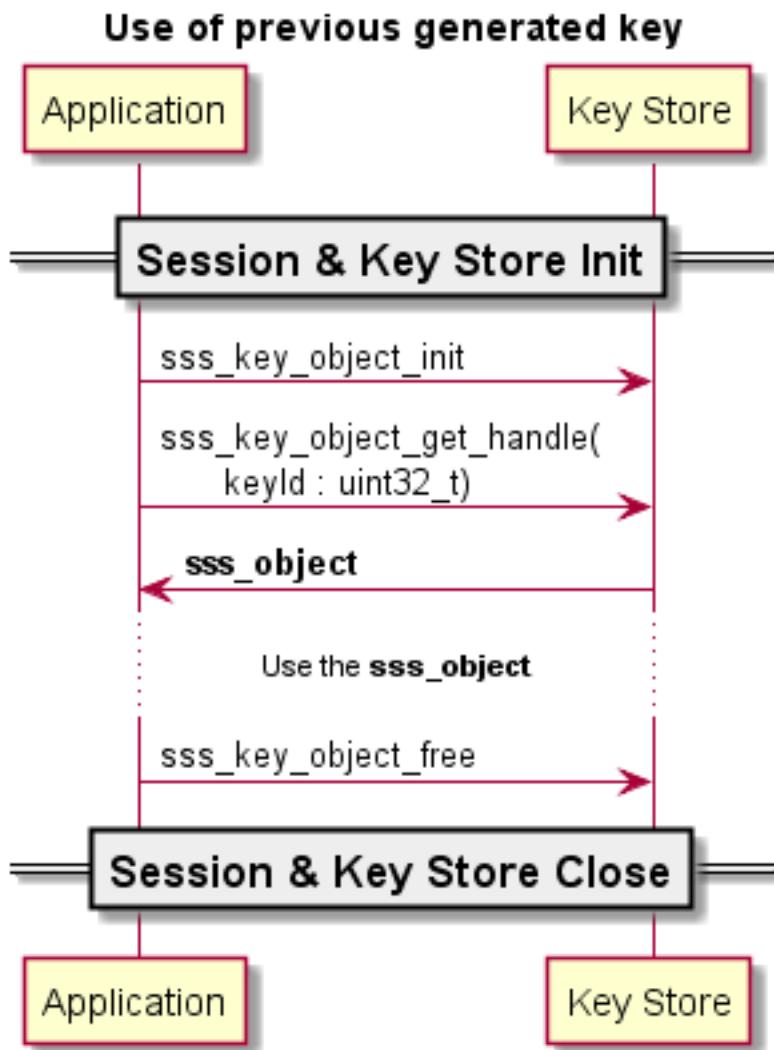

APIs

group **sss_key_object**
Low level iota of key/certificates in SSS domain.

Functions

```
sss_status_t sss_key_object_allocate_handle(sss_object_t *keyObject, uint32_t keyId,
                                            sss_key_part_t keyPart, sss_cipher_type_t cipherType,
                                            size_t keyByteLenMax, uint32_t options)
```

Allocate / pre-provision memory for new key.

This API allows underlying cryptographic subsystems to perform preconditions of before creating any cryptographic key object.

Return Status of object allocation.

Parameters

- [inout] keyObject: The object If required, update implementation defined values inside the keyObject
- keyId: External Key ID. Later on this may be used by `sss_key_object_get_handle`
- keyPart: See `sss_key_part_t`
- cipherType: See `sss_cipher_type_t`
- keyByteLenMax: Maximum storage this type of key may need. For systems that have their own internal allocation table this would help
- options: 0 = Persistant Key (Default) or Transient Key. See `sss_key_object_mode_t`

`void sss_key_object_free(sss_object_t *keyObject)`

Destructor for the key object. The function frees key object context.

Parameters

- keyObject: Pointer to key object context.

`sss_status_t sss_key_object_get_access(sss_object_t *keyObject, uint32_t *access)`

Check what are access restrictions on an object

Return

Parameters

- keyObject: Object
- access: What is permitted

`sss_status_t sss_key_object_get_handle(sss_object_t *keyObject, uint32_t keyId)`

Get handle to an existing allocated/provisioned/created Object.

See `sss_key_object_allocate_handle`.

After calling this API, Ideally keyObject should become equivlant to as set after the calling of `sss_key_object_allocate_handle` api.

Return The sss status.

Parameters

- keyObject: The key object
- [in] keyId: The key identifier

`sss_status_t sss_key_object_get_purpose(sss_object_t *keyObject, sss_mode_t *purpose)`

Check what is purpose restrictions on an object

Return

Parameters

- keyObject: Object to be checked
- purpose: Know what is permitted.

`sss_status_t sss_key_object_get_user(sss_object_t *keyObject, uint32_t *user)`

get attributes

`sss_status_t sss_key_object_init(sss_object_t *keyObject, sss_key_store_t *keyStore)`

Constructor for a key object data structure. The function initializes keyObject data structure and associates it with a key store in which the plain key and other attributes are stored.

Return Status of the operation

Parameters

- keyObject:
- keyStore:

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

`sss_status_t sss_key_object_set_access(sss_object_t *keyObject, uint32_t access, uint32_t options)`

Assign access permissions to a key object.

Parameters

- keyObject: the object where permission restrictions are applied
- access: Logical OR of read, write, delete, use, change attributes defined by enum _sss_access_permission.
- options: Transient or persistent update. Allows for transient update of persistent attributes.

`sss_status_t sss_key_object_set_eccgfp_group(sss_object_t *keyObject, sss_eccgfp_group_t *group)`

Set elliptic curve domain parameters over Fp for a key object.

When the key object is a reference to one of ECC Private, ECC Public or ECC Pair key types, this function shall be used to specify the exact domain parameters prior to using the key object for ECDSA or ECDH algorithms.

Parameters

- keyObject: The destination key object
- group: Pointer to elliptic curve domain parameters over Fp (sextuple p,a,b,G,n,h)

`sss_status_t sss_key_object_set_purpose(sss_object_t *keyObject, sss_mode_t purpose, uint32_t options)`

Assign purpose to a key object.

Parameters

- keyObject: the object where permission restrictions are applied
- purpose: Usage of the key.
- options: Transient or persistent update. Allows for transient update of persistent attributes.

`sss_status_t sss_key_object_set_user(sss_object_t *keyObject, uint32_t user, uint32_t options)`

Assign user to a key object.

Parameters

- `keyObject`: the object where permission restrictions are applied
- `user`: Assign User id for a key object. The user is kept in the key store along with the key data and other properties.
- `options`: Transient or persistent update. Allows for transient update of persistent attributes.

```
struct sss_object_t
#include <fsl_sss_api.h> An object (secure / non-secure) within a Key Store.
```


Public Members

```
uint32_t cipherType
    cipherType type from sss\_cipher\_type\_t
uint8_t data[(0 + (1 * sizeof(void *)) + (2 * sizeof(int)) + (4 * sizeof(void *)) + 16)]
struct sss_object_t::[anonymous] extension
    Reserved memory for implementation specific extension
uint32_t keyId
    Application specific key identifier. The keyId is kept in the key store along with the key data and other properties.
sss\_key\_store\_t *keyStore
    key store holding the data and other properties
uint32_t objectType
    The type/part of object is referenced from sss\_key\_part\_t
```

3.3.5 Asymmetric

Sign


To perform sign operation , the sequence of APIs looks as under.

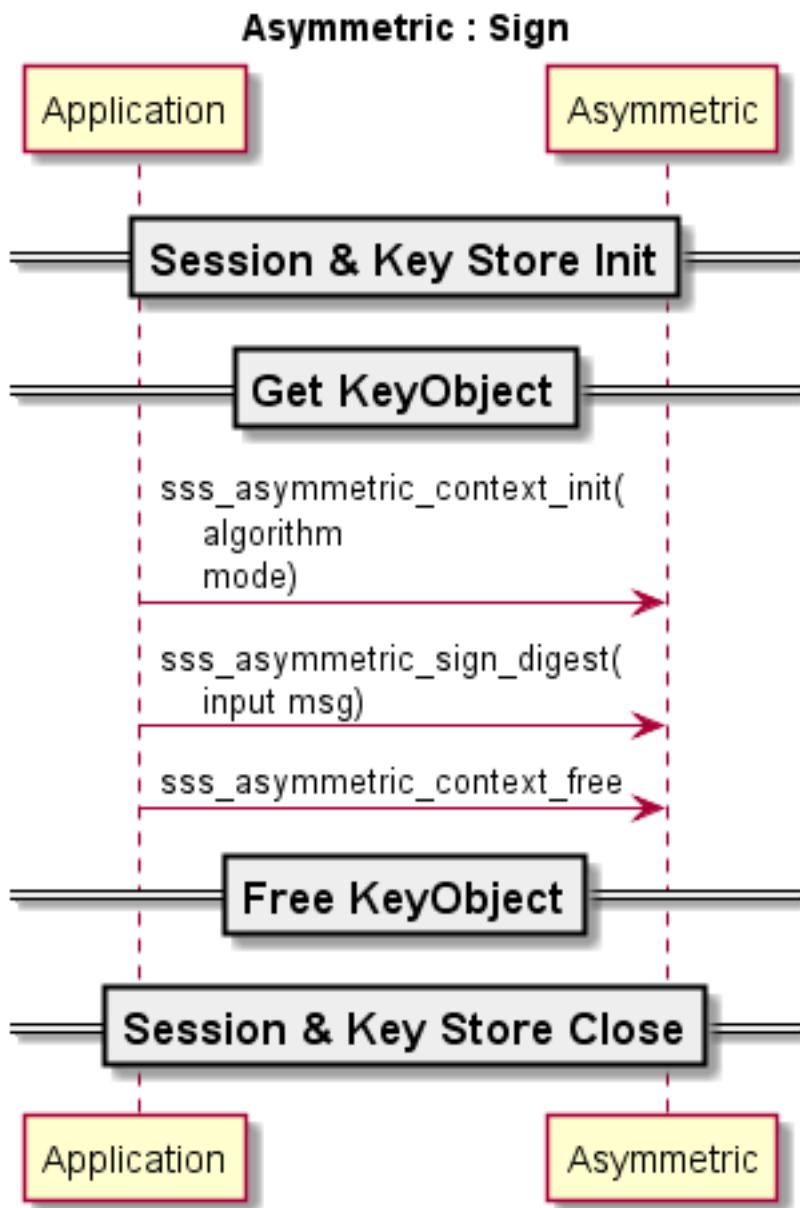**Note:**

- 1) To perform rsa sign and verify on plain data (with hash calculated inside SE), use `sss_se05x_asymmetric_sign` and `sss_se05x_asymmetric_verify` apis.
- 2) Sign / Verify operations with Twisted Edward curve is supported only on plain data with hash calculated inside SE. Use `sss_se05x_asymmetric_sign` and `sss_se05x_asymmetric_verify` apis. Only SHA512 is supported.


Verify

To perform sign verify operation , the sequence of APIs looks as under:

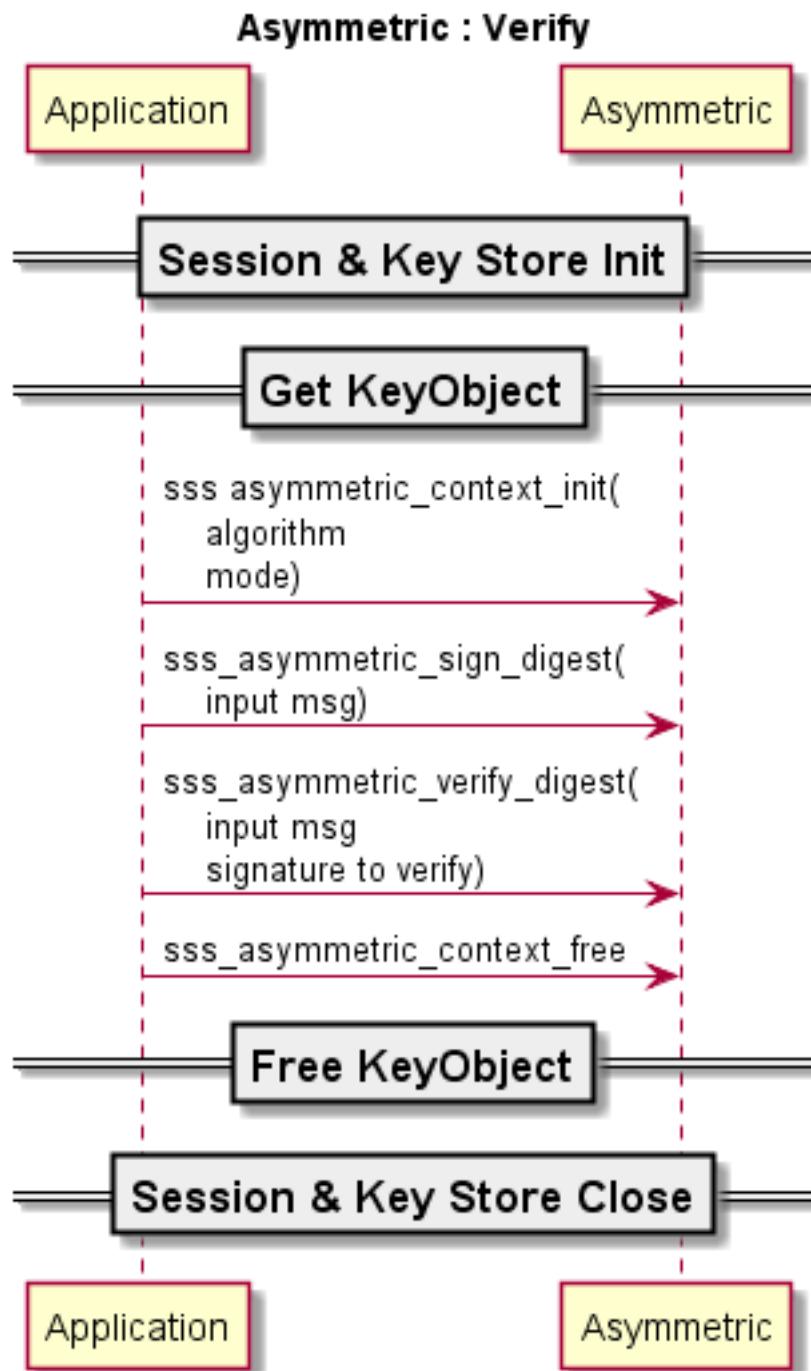


Encryption

To encrypt the data , the API sequence is as under:

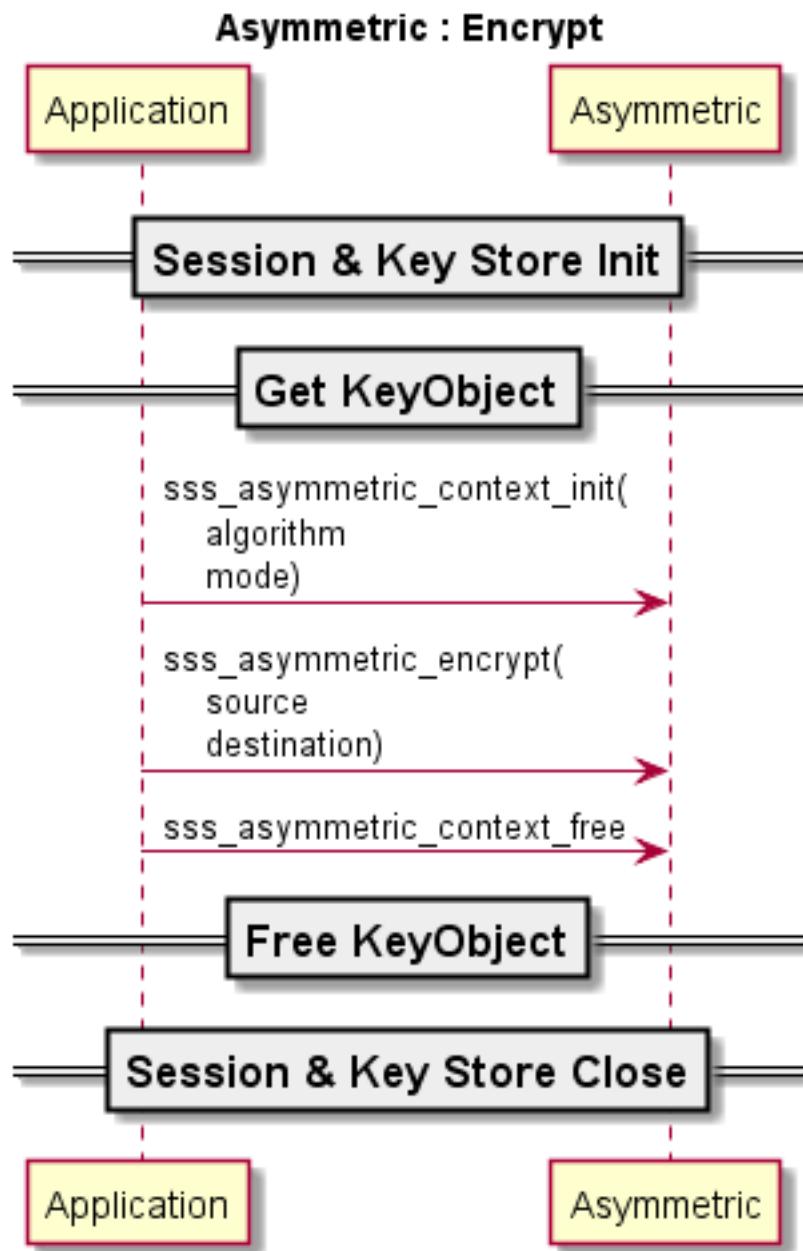

Decryption

To Decrypt the encrypted data , the API sequence is as under:

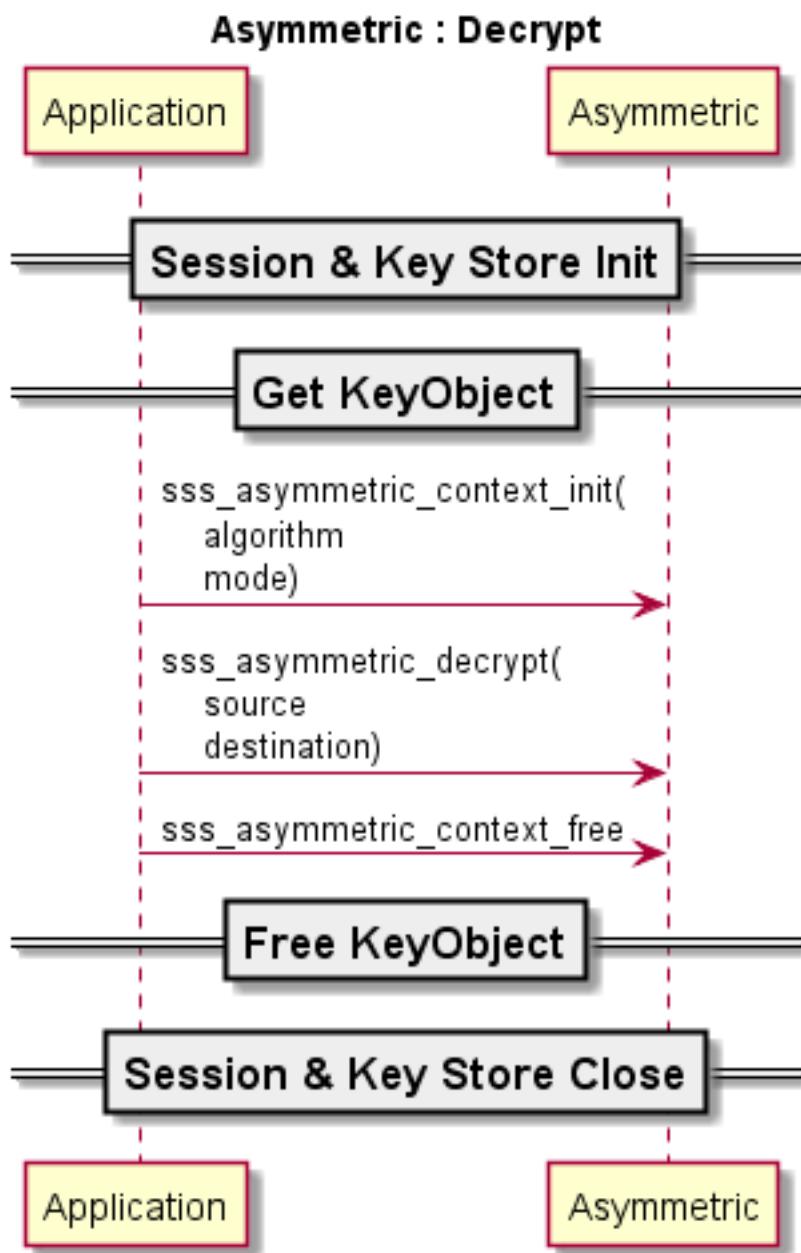

Reference Example

Before we use any Cryptographic operations, we need relevant Keys to be declared.

Here is a reference snippet to *inject* a key into the Secure Domain. (If the key was already existing in the Key Store, these steps are not needed)

```
/* Pre-requisite for Signing Part*/
status = sss_key_object_init(&keyPair, &pCtx->ks);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

status = sss_key_object_allocate_handle(&keyPair,
    MAKE_TEST_ID(__LINE__),
    kSSS_KeyPart_Pair,
    kSSS_CipherType_EC_NIST_P,
    sizeof(keyPairData),
    kKeyObject_Mode_Persistent);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

status = sss_key_store_set_key(&pCtx->ks, &keyPair, keyPairData,
    sizeof(keyPairData), EC_KEY_BIT_LEN, NULL, 0);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);
```

Signing on a digest of length digestLen is performed as below.

```
status = sss_asymmetric_context_init(&ctx_asymm, &pCtx->session, &keyPair,
    kAlgorithm_SSS_SHA256, kMode_SSS_Sign);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

signatureLen = sizeof(signature);
/* Do Signing */
LOG_I("Do Signing");
LOG_MAU8_I("digest", digest, digestLen);
status = sss_asymmetric_sign_digest(&ctx_asymm, digest, digestLen, signature, &
    signatureLen);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);
LOG_MAU8_I("signature", signature, signatureLen);
LOG_I("Signing Successful !!!");
sss_asymmetric_context_free(&ctx_asymm);
```

After the above operation, `signature` has the signature using the key object `keyPair`.

RSA Encryption algorithms supported

Supported rsa encryption / decryption algorithms - PKCS1_OAEP and PKCS1_V1_5.

```
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA1      = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP,
    0x01),
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA224     = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP,
    0x02),
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA256     = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP,
    0x03),
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA384     = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP,
    0x04),
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA512     = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP,
    0x05),
```

(continues on next page)

(continued from previous page)

kAlgorithm_SSS_RSAES_PKCS1_V1_5 ↳ 0x01),	= SSS_ENUM_ALGORITHM(RSAES_PKCS1_V1_5, ↳ 0x01),
---	--

RSA Signature algorithms supported

Supported rsa sign / verify algorithms - PKCS1_PSS_MGF1 , PKCS1_V1_5 and No_Padding.

Hash algorithms supported for sign/verify - SHA1, SHA224, SHA256, SHA384, SHA512

kAlgorithm_SSS_RSASSA_PKCS1_V1_5_NO_HASH ↳ 0x01),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, ↳ 0x01),
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA1 ↳ 0x02),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, ↳ 0x02),
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA224 ↳ 0x03),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, ↳ 0x03),
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA256 ↳ 0x04),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, ↳ 0x04),
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA384 ↳ 0x05),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, ↳ 0x05),
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA512 ↳ 0x06),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, ↳ 0x06),
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA1 ↳ MGF1, 0x01),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, ↳ 0x01),
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA224 ↳ MGF1, 0x02),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, ↳ 0x02),
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA256 ↳ MGF1, 0x03),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, ↳ 0x03),
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA384 ↳ MGF1, 0x04),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, ↳ 0x04),
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA512 ↳ MGF1, 0x05),	= SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, ↳ 0x05),

kAlgorithm_SSS_RSASSA_NO_PADDING = SSS_ENUM_ALGORITHM(RSASSA_NO_PADDING, 0x01),

When using PKCS1_PSS_MGF1 padding, there are few limitations on hash algorithm with rsa key size as below,

RSA Bit Length	Valid Hash Algorithm
512	SHA1, SHA224
1024	SHA1, SHA224, SHA256, SHA384
1152	SHA1, SHA224, SHA256, SHA384, SHA512
2048	SHA1, SHA224, SHA256, SHA384, SHA512
3072	SHA1, SHA224, SHA256, SHA384, SHA512
4096	SHA1, SHA224, SHA256, SHA384, SHA512

ECC Signature algorithms supported

Supported hash values for ecc sign / verify - SHA1, SHA224, SHA256, SHA384, SHA512

```
kAlgorithm_SSS_ECDSA_SHA1 = SSS_ENUM_ALGORITHM(ECDSA, 0x01),
kAlgorithm_SSS_ECDSA_SHA224 = SSS_ENUM_ALGORITHM(ECDSA, 0x02),
kAlgorithm_SSS_ECDSA_SHA256 = SSS_ENUM_ALGORITHM(ECDSA, 0x03),
kAlgorithm_SSS_ECDSA_SHA384 = SSS_ENUM_ALGORITHM(ECDSA, 0x04),
kAlgorithm_SSS_ECDSA_SHA512 = SSS_ENUM_ALGORITHM(ECDSA, 0x05),
```

OR

```
kAlgorithm_SSS_SHA1 = SSS_ENUM_ALGORITHM(SHA, 0x01),
kAlgorithm_SSS_SHA224 = SSS_ENUM_ALGORITHM(SHA, 0x02),
kAlgorithm_SSS_SHA256 = SSS_ENUM_ALGORITHM(SHA, 0x03),
kAlgorithm_SSS_SHA384 = SSS_ENUM_ALGORITHM(SHA, 0x04),
kAlgorithm_SSS_SHA512 = SSS_ENUM_ALGORITHM(SHA, 0x05),
```

ECDA algorithm

```
kAlgorithm_SSS_ECDA = SSS_ENUM_ALGORITHM(ECDA, 0x01),
```

APIs

group sss_crypto_asymmetric

Asymmetric cryptographic operations like RSA / ECC/etc.

Functions

```
void sss_asymmetric_context_free(sss_asymmetric_t *context)
Asymmetric context release. The function frees asymmetric context.
```

Parameters

- context: Pointer to asymmetric context.

```
sss_status_t sss_asymmetric_context_init(sss_asymmetric_t *context, sss_session_t *session,
                                         sss_object_t *keyObject, sss_algorithm_t algorithm, sss_mode_t mode)
Asymmetric context init. The function initializes asymmetric context with initial values.
```

Return Status of the operation

Parameters

- context: Pointer to asymmetric crypto context.
- session: Associate SSS session with asymmetric context.
- keyObject: Associate SSS key object with asymmetric context.
- algorithm: One of the asymmetric algorithms defined by *sss_algorithm_t*.
- mode: One of the modes defined by *sss_mode_t*.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.

- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

`sss_status_t sss_asymmetric_decrypt(sss_asymmetric_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen)`

Asymmetric decryption The function uses asymmetric algorithm to decrypt data. Private key portion of a key pair is used for decryption.

Return Status of the operation

Parameters

- context: Pointer to asymmetric context.
- srcData: Input buffer
- srcLen: Length of the input in bytes
- destData: Output buffer
- destLen: Length of the output in bytes

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

`sss_status_t sss_asymmetric_encrypt(sss_asymmetric_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen)`

Asymmetric encryption The function uses asymmetric algorithm to encrypt data. Public key portion of a key pair is used for encryption.

Return Status of the operation

Parameters

- context: Pointer to asymmetric context.
- srcData: Input buffer
- srcLen: Length of the input in bytes
- destData: Output buffer
- destLen: Length of the output in bytes

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

`sss_status_t sss_asymmetric_sign_digest(sss_asymmetric_t *context, uint8_t *digest, size_t digestLen, uint8_t *signature, size_t *signatureLen)`

Asymmetric signature of a message digest The function signs a message digest.

Return Status of the operation

Parameters

- context: Pointer to asymmetric context.
- digest: Input buffer containing the input message digest
- digestLen: Length of the digest in bytes
- signature: Output buffer written with the signature of the digest
- signatureLen: Length of the signature in bytes

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

`sss_status_t sss_asymmetric_verify_digest(sss_asymmetric_t *context, uint8_t *digest, size_t digestLen, uint8_t *signature, size_t signatureLen)`

Asymmetric verify of a message digest The function verifies a message digest.

Return Status of the operation

Parameters

- context: Pointer to asymmetric context.
- digest: Input buffer containing the input message digest
- digestLen: Length of the digest in bytes
- signature: Input buffer containing the signature to verify
- signatureLen: Length of the signature in bytes


Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

3.3.6 Policies

Policies can be used to restrict & control the usage of session or objects.

Policy Types (TODO)

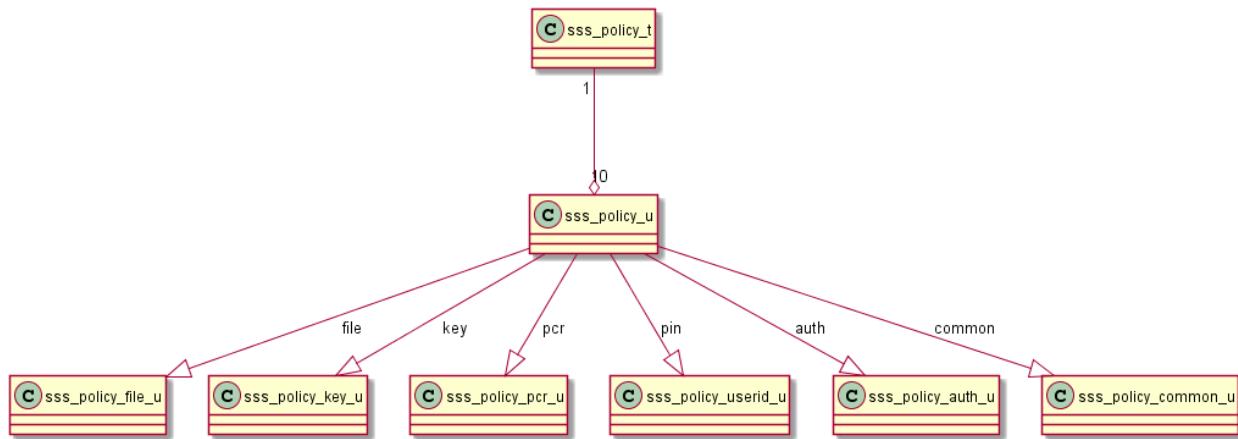

Usage

Policy can be declared like below:

```

/* Policies for key */
const sss_policy_u key_withPol = {
    .type = KPolicy_Asym_Key,
    /*Authentication object based on SE05X_AUTH*/
    .auth_obj_id = EX_LOCAL_OBJ_AUTH_ID,
    .policy = {
        /*Asymmetric key policy*/
        .asymkey = {
            /*Policy for sign*/
            .can_Sign = allow_sign,
            /*Policy for verify*/
            .can_Verify = allow_verify,
            /*Policy for encrypt*/
            .can_Encrypt = 1,
            /*Policy for decrypt*/
            .can_Decrypt = 1,
            /*Policy for Key Derivation*/
            .can_KD = 1,
            /*Policy for wrapped object*/
            .can_Wrap = 1,
            /*Policy to re-write object*/
            .can_Write = 1,
            /*Policy for reading object*/
            .can_Read = 1,
            /*Policy to use object for attestation*/
            .can_Attest = 1,
        }
    }
};

/* Common rules */
const sss_policy_u common = {
    .type = KPolicy_Common,
    /*Authentication object based on SE05X_AUTH*/
    .auth_obj_id = EX_LOCAL_OBJ_AUTH_ID,
}
  
```

(continues on next page)

(continued from previous page)

```

.policy = {
.common = {
/*Secure Messaging*/
.req_Sm = 0,
/*Policy to Delete object*/
.can_Delete = 1,
/*Forbid all operations on object*/
.forbid_All = 0,
}
}
};

/* create policy set */
sss_policy_t policy_for_ec_key = {
.nPolicies = 2,
.policies = { &key_withPol, &common }
};

```

To create an object with that policy, usage is as below:

```

status = sss_key_store_generate_key(
&pCtx->ks,
&object,
ECC_KEY_BIT_LEN,
&policy_for_ec_key);

```

APIs

group **sss_policy**

Policies to restrict and control sessions and objects.

Enums

enum **sss_policy_type_u**

Type of policy

Values:

KPolicy_None

No policy applied

KPolicy_Session

Policy related to session.

See [*sss_policy_session_u*](#)

KPolicy_Sym_Key

Policy related to key.

See [*sss_policy_key_u*](#)

KPolicy_Asym_Key

KPolicy_UserID

KPolicy_File

KPolicy_Counter

```
KPolicy_PCR  
KPolicy_Common  
KPolicy_Common_PCR_Value  
struct sss_policy_asym_key_u  
#include <fsl_sss_policy.h> Policies applicable to Asymmetric KEY
```

Public Members

```
uint8_t can_Attest  
    Allow to attest an object  
uint8_t can_Decrypt  
    Allow decryption  
uint8_t can_Encrypt  
    Allow encryption  
uint8_t can_Gen  
    Allow to (re)generate the object  
uint8_t can_Import_Export  
    Allow to imported or exported  
uint8_t can_KA  
    Allow key agreement  
uint8_t can_KD  
    Allow key derivation  
uint8_t can_Read  
    Allow to read the object  
uint8_t can_Sign  
    Allow signature generation  
uint8_t can_Verify  
    Allow signature verification  
uint8_t can_Wrap  
    Allow key wrapping  
uint8_t can_Write  
    Allow to write the object  
uint8_t forbid_Derived_Output  
    Forbid derived output  
struct sss_policy_common_pcr_value_u  
#include <fsl_sss_policy.h> Common PCR Value Policies for all object types
```

Public Members

```
uint8_t pcrExpectedValue[32]
    Expected value of the PCR

uint32_t pcrObjId
    PCR object ID

struct sss_policy_common_u
#include <fsl_sss_policy.h> Common Policies for all object types
```

Public Members

```
uint8_t can_Delete
    Allow to delete the object

uint8_t forbid_All
    Forbid all operations

uint8_t req_Sm
    Require having secure messaging enabled with encryption and integrity on the command

struct sss_policy_counter_u
#include <fsl_sss_policy.h> All policies related to secure object type Counter
```

Public Members

```
uint8_t can_Read
    Allow to read the object

uint8_t can_Write
    Allow to write the object

struct sss_policy_file_u
#include <fsl_sss_policy.h> All policies related to secure object type File
```

Public Members

```
uint8_t can_Read
    Allow to read the object

uint8_t can_Write
    Allow to write the object

struct sss_policy_pcr_u
#include <fsl_sss_policy.h> All policies related to secure object type PCR
```

Public Members

`uint8_t can_Read`
Allow to read the object

`uint8_t can_Write`
Allow to write the object

`struct sss_policy_session_u`
`#include <fsl_sss_policy.h>` Policy applicable to a session

Public Members

`uint8_t allowRefresh`
Whether this session can be refreshed without losing context. And also reset maxDurationOfSession_sec / maxOperationsInSession

`uint8_t has_MaxDurationOfSession_sec`
Whether maxOperationsInSession is set. This is to ensure ‘0 == maxDurationOfSession_sec’ does not get set by middleware.

`uint8_t has_MaxOperationsInSession`
Whether maxOperationsInSession is set. This is to ensure ‘0 == maxOperationsInSession’ does not get set by middleware.

`uint16_t maxDurationOfSession_sec`
Session can be used for this much time, in seconds

`uint16_t maxOperationsInSession`
Number of operations permitted in a session

`struct sss_policy_sym_key_u`
`#include <fsl_sss_policy.h>` Policies applicable to Symmetric KEY

Public Members

`uint8_t allow_kdf_ext_rnd`
Allow kdf(prf) external random

`uint8_t can_Decrypt`
Allow decryption

`uint8_t can_Desfire_Auth`
Allow to perform DESFire authentication

`uint8_t can_Desfire_Dump`
Allow to dump DESFire session keys

`uint8_t can_Encrypt`
Allow encryption

`uint8_t can_Gen`
Allow to (re)generate the object

`uint8_t can_Import_Export`
Allow to imported or exported

`uint8_t can_KD`
Allow key derivation

```

uint8_t can_Sign
    Allow signature generation

uint8_t can_Verify
    Allow signature verification

uint8_t can_Wrap
    Allow key wrapping

uint8_t can_Write
    Allow to write the object

uint8_t forbid_Derived_Output
    Forbid derived output

struct sss_policy_t
    #include <fsl_sss_policy.h> An array of policies sss_policy_u

```

Public Members

```

size_t nPolicies
    Number of policies

const sss_policy_u *policies[(10)]
    Array of unique policies, this needs to be allocated based nPolicies

struct sss_policy_u
    #include <fsl_sss_policy.h> Unique/individual policy. For any operation, you need array of sss_policy_u.

```

Public Members

```

sss_policy_asym_key_u asymkey

uint32_t auth_obj_id
    Auth ID for each Object Policy, invalid for session policy type == KPolicy_Session

sss_policy_common_u common

sss_policy_common_pcr_value_u common_pcr_value

sss_policy_counter_u counter

sss_policy_file_u file

sss_policy_pcr_u pcr

sss_policy_userid_u pin

union sss_policy_u:[anonymous] policy
    Union of applicable policies based on the type of object

sss_policy_session_u session

sss_policy_sym_key_u symkey

sss_policy_type_u type
    Secure Object Type

struct sss_policy_userid_u
    #include <fsl_sss_policy.h> All policies related to secure object type UserID

```

Public Members

`uint8_t can_Write`
Allow to write the object

3.3.7 Example Boot-Up

The Examples and use cases based on SSS APIs are them selves (*more or less*) Cryptosystem agnostic, how ever the platforms where they run and how they run would be very specific.

e.g. While running from PC with a Secure Element, you may need to choose and connect to specific COM Port / Socket. On the other hand, when running from different embedded platforms like FREEDOM K64F, iMX RT 1050, etc., few board specific steps are needed.

To simplify examples, them selves, the files in `sss/ex/inc` and `sss/ex/src` try to isolate such details.


Some of the scenarios of boot up are:

Booting from Windows / Linux

In such a system, many decisions are taken at run time. e.g. COM Port for interface to the secure element, etc.


In such a system, examples also have access to command line arguments and environment variables.

Such a setup is mostly for testing and early prototyping.

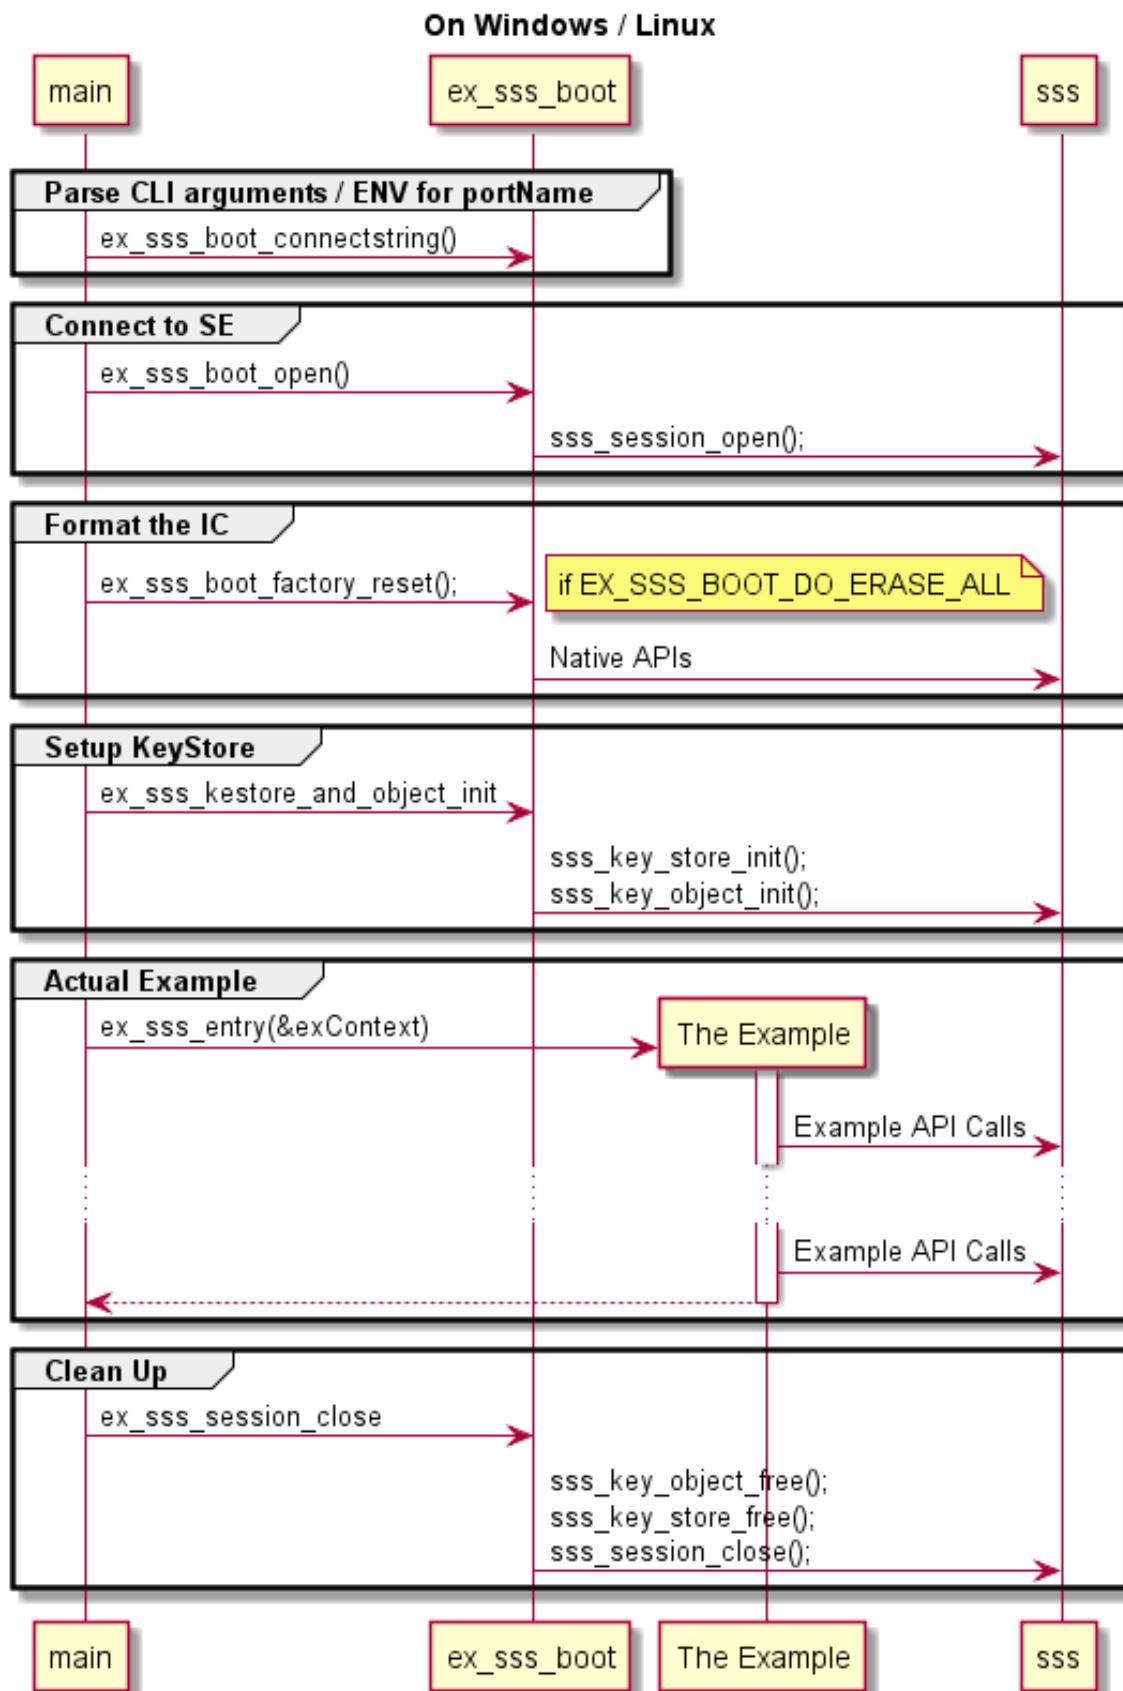


Booting from an embedded system, without any RTOS

In such a system, the example is pre-compiled for specific platform/combinations. There are very less decisions to be taken at run time, and most decisions are pre-selected during build/compile time.

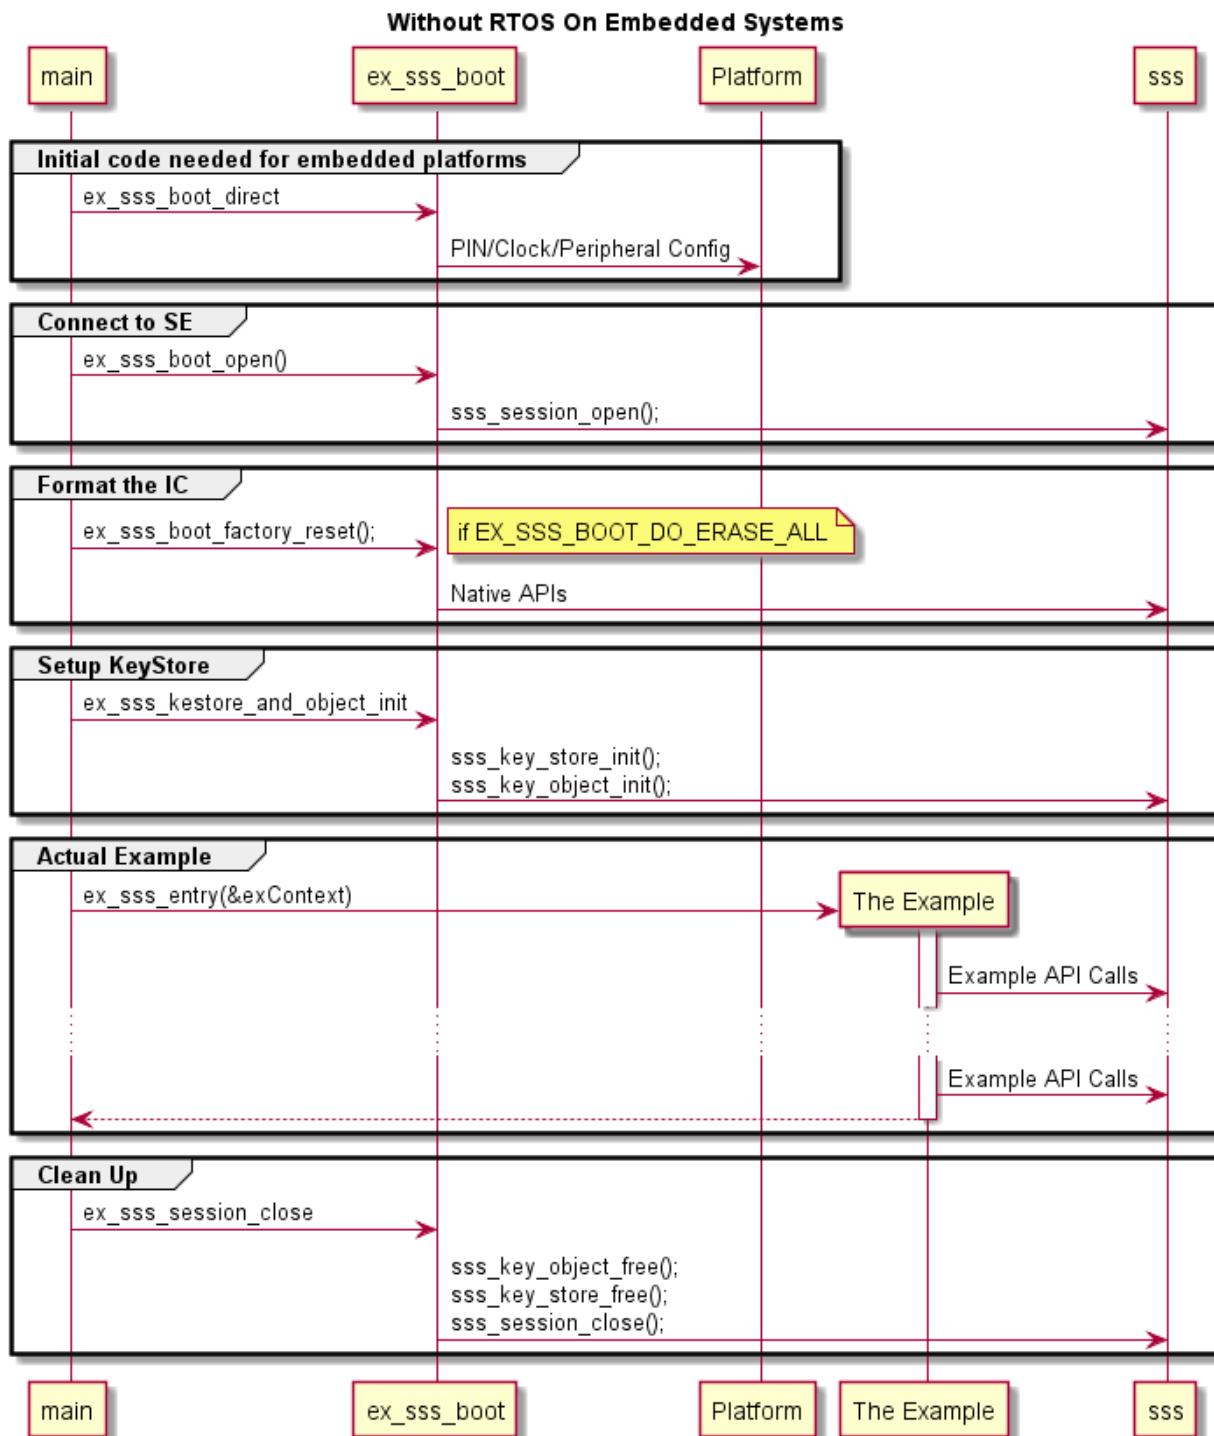

Booting from an embedded system, with RTOS

In such a system, the example uses RTOS. And the example itself is to be run from an RTOS Thread context.

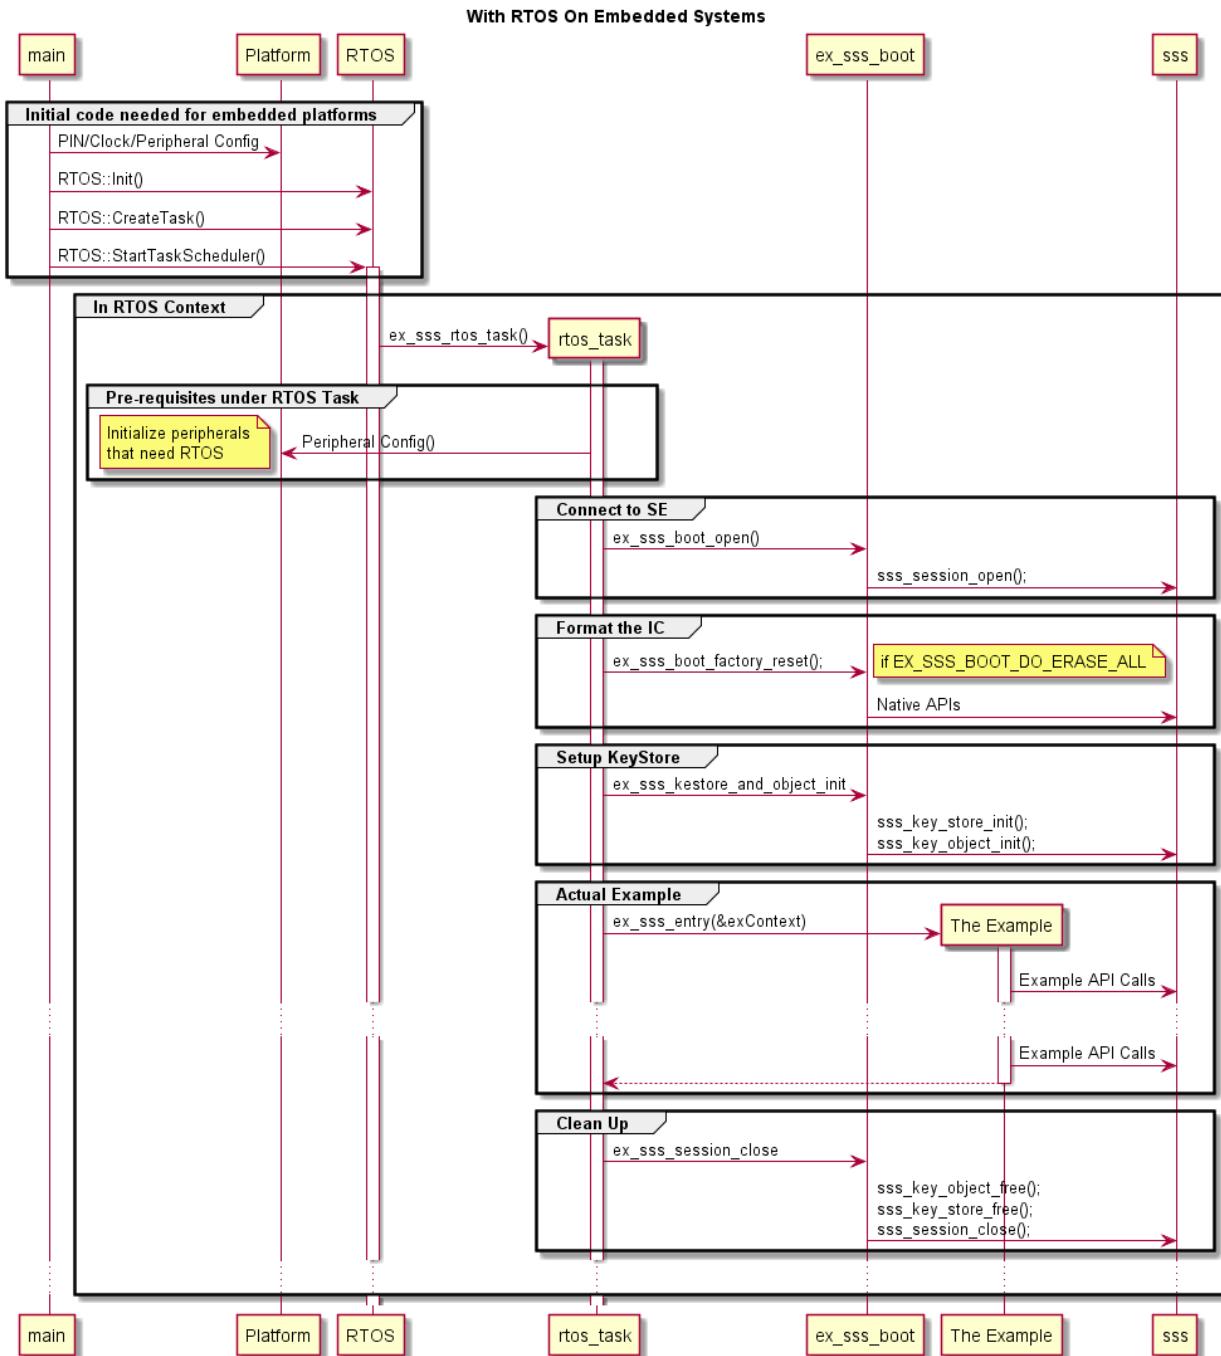

3.3.8 SSS api key format (asymmetric keys)

NIST-P, NIST-K and BRAINPOOL ECC Keys

When passing the key pair / public key, the key should be passed DER encoded using PKCS #8 or traditional openssl format. When passing the private key alone, do not include the key header.

When retrieving the key pair as data argument from the sss_key_store_get api, the full key pair cannot be retrieved. Instead the public key value is returned in ANSI X9.62 uncompressed format.

Note: Keys, signature and shared secret key generated all follow the big endian convention.

EDWARD and MONTGOMERY ECC keys

When passing the key pair / public key, the key should be passed DER encoded using the format specified in RFC 8410. When passing the private key alone, do not include the key header.

When retrieving the key pair as data argument from the sss_key_store_get api, the full key pair cannot be retrieved. Instead the public key value is returned in ANSI X9.62 uncompressed format.

Note: Keys, signature and shared secret key generated all follow the little endian convention.

A set of examples of a X25519 keypair encoded according to RFC 8410:

```
$ dumpasn1 X25519_keypair.der
0  81: SEQUENCE {
2   1:   INTEGER 1
5   5:   SEQUENCE {
7   3:     OBJECT IDENTIFIER curveX25519 (1 3 101 110)
    :
12  34:   OCTET STRING, encapsulates {
14  32:     OCTET STRING
    :
    :      58 5D B1 E3 50 0B 71 24 F6 B1 E1 41 83 54 93 12
    :      F4 4B 0C A3 44 F7 52 A1 8A 12 2F E7 DA D9 CE 52
    :
48  33:   [1]
    :
    :      00 A2 8E 04 FF 1C DC 1C 3D 60 91 0F BC 98 EF 01
    :      BF 9F 0F 69 C0 B7 EF 70 61 35 34 62 F3 06 28 C7
    :
    :      29
    :

$ dumpasn1 X25519_priv.pem
0  46: SEQUENCE {
2   1:   INTEGER 0
5   5:   SEQUENCE {
7   3:     OBJECT IDENTIFIER curveX25519 (1 3 101 110)
    :
12  34:   OCTET STRING, encapsulates {
14  32:     OCTET STRING
    :
    :      58 5D B1 E3 50 0B 71 24 F6 B1 E1 41 83 54 93 12
    :      F4 4B 0C A3 44 F7 52 A1 8A 12 2F E7 DA D9 CE 52
    :
    :
```

(continues on next page)

(continued from previous page)

```
$ dumpasn1 X25519_pub.pem
0 42: SEQUENCE {
2 5:  SEQUENCE {
4 3:    OBJECT IDENTIFIER curveX25519 (1 3 101 110)
5:  }
9 33:  BIT STRING
:    A2 8E 04 FF 1C DC 1C 3D 60 91 0F BC 98 EF 01 BF
:    9F 0F 69 C0 B7 EF 70 61 35 34 62 F3 06 28 C7 29
: }
```

The X25519 keypair from the example above can be created with the `asn1parse` OpenSSL tool. The command line invocation is as follows:

```
openssl asn1parse -genconf key_config.txt -out X25519_keypair.der
```

The file **key_config.txt** contains the different ASN.1 components and values of the keypair to create. The resulting DER representation of the keypair is stored in the file **X25519_keypair.der**. The contents of the **key_config.txt** file is as follows:

```
asn1 = SEQUENCE:seq_section

[seq_section]

field1 = INTEGER:1
field2 = SEQUENCE:seq_section_oid
field3 = OCTWRAP,FORMAT:HEX,
  ↪OCT:585DB1E3500B7124F6B1E14183549312F44B0CA344F752A18A122FE7DAD9CE52
field4 = IMP:1C,
  ↪INT:0x00A28E04FF1CDC1C3D60910FBC98EF01BF9F0F69C0B7EF7061353462F30628C729

[seq_section_oid]

field1 = OID:X25519
```

Note: Additional information on the `asn1parse` command and the key configuration format is available under the manpages of respectively `asn1parse` and `ASN1_generate_nconf`

BN Curve ECC keys

When passing key pair, private key or public key do not include key header. When retrieving the key from the `sss_key_store_get` api, the public key value is returned without any header.

RSA keys

When passing the key pair / public key, the key should be passed DER encoded using PKCS #8 or traditional openssl format. When passing the private key alone, do not include the key header.

When retrieving the key pair as data argument from the `sss_key_store_get` API, the full key pair cannot be retrieved. Instead the public key value is returned in ANSI X9.62 uncompressed format.

See also [Section 5.2.1 SSS API Examples](#)

3.4 SSS APIs: SE051 vs SE050

SSS API name	SE051	SE050
<code>sss_session_open()</code>	Available	Available
<code>sss_session_close()</code>	Available	Available
<code>sss_key_store_set_key()</code>	POLICY_OBJ_FORBID_DERIVED_OUTPUT can be set to a SymmKey object	
<code>sss_key_store_generate()</code>	Available	Available
<code>sss_key_store_get_key()</code>	Available	Available
<code>sss_key_store_open_key()</code>	Available	Available
<code>sss_key_store_erase_key()</code>	Available	Available
<code>sss_key_store_context()</code>	Available	Available
<code>sss_key_object_init()</code>	Available	Available
<code>sss_key_object_allocate()</code>	Available	Available
<code>sss_key_object_get_handle()</code>	Available	Available
<code>sss_key_object_free()</code>	Available	Available
<code>sss_symmetric_context()</code>	Available	Available
<code>sss_cipher_one_go()</code>	Available	Available
<code>sss_cipher_init()</code>	Available	Available
<code>sss_cipher_update()</code>	Available	Available
<code>sss_cipher_finish()</code>	Available	Available
<code>sss_cipher_crypt_ctr()</code>	Available	Available
<code>sss_symmetric_context()</code>	Available	Available
<code>sss_aead_context_init()</code>	Available	NA
<code>sss_aead_one_go()</code>	Available	NA
<code>sss_aead_init()</code>	Available	NA
<code>sss_aead_update_aad()</code>	Available	NA
<code>sss_aead_update()</code>	Available	NA
<code>sss_aead_finish()</code>	Available	NA
<code>sss_aead_context_free()</code>	Available	NA
<code>sss_digest_context_init()</code>	Available	Available
<code>sss_digest_one_go()</code>	Available	Available
<code>sss_digest_init()</code>	Available	Available
<code>sss_digest_update()</code>	Available	Available
<code>sss_digest_finish()</code>	Available	Available
<code>sss_digest_context_free()</code>	Available	Available
<code>sss_mac_context_init()</code>	Available	Available
<code>sss_mac_one_go()</code>	Available	Available
<code>sss_mac_init()</code>	Available	Available

Continued on next page

Table 1 – continued from previous page

SSS API name	SE051	SE050
<code>sss_mac_update()</code>	Available	Available
<code>sss_mac_finish()</code>	Available	Available
<code>sss_mac_context_free()</code>	Available	Available
<code>sss_asymmetric_context_free()</code>	Available	Available
<code>sss_asymmetric_encrypt()</code>	Available	Available
<code>sss_asymmetric_decrypt()</code>	Available	Available
<code>sss_asymmetric_sign_d()</code>	Available	Available
<code>sss_asymmetric_verify()</code>	Available	Available
<code>sss_asymmetric_context_init()</code>	Available	Available
<code>sss_derive_key_context_free()</code>	Available	Available
<code>sss_derive_key_go()</code>	Deprecated	Deprecated
<code>sss_derive_key_one_go()</code>	Derived Key object can be stored in Secure Element	Available
<code>sss_derive_key_sobj_free()</code>	Derived Key object can be stored in Secure Element	Available
<code>sss_derive_key_dh()</code>	Derived Key object can be stored in Secure Element	Available
<code>sss_derive_key_context_init()</code>	Available	Available
<code>sss_rng_context_init()</code>	Available	Available
<code>sss_rng_get_random()</code>	Available	Available
<code>sss_rng_context_free()</code>	Available	Available

3.5 Parameter Check & Conventions

3.5.1 Parameter Convention

APIs for which a buffer is input. e.g.:

```
smStatus_t Se05x_API_VerifySessionUserID(
    pSe05xSession_t session_ctx,
    const uint8_t *userId,
    size_t userIdLen);
```

In the above case `userId` is a buffer input. It is assumed that the length as set in `userIdLen` is same as that pointed to by `userId`. This parameter is used as is and any mistake by the calling API will have unpredictable errors.

APIs for which a buffer is input. e.g.:

```
smStatus_t Se05x_API_ReadObject(
    pSe05xSession_t session_ctx,
    uint32_t objectID,
    uint16_t offset,
    uint16_t length,
    uint8_t *data,
    size_t *pdataLen);
```

In the above case `data` is a buffer output and `pdataLen` is both input and output. It is assumed that the length as set in `pdataLen` is set to the maximum as available to the pointer pointed by `data`. This parameter is used as is and any mistake by the calling API will have unpredictable errors.

PCSC/CCID Interface and 64 Byte packet

See the note “USB 64 byte boundary” at `hostlib\\hostLib\\libCommon\\smCom\\smComPCSC.c`

3.5.2 Helper Macros

Helper macros are available as a part of the stack to capture warnings if some parameters are not as expected.

During debug builds, it is recommended to enable the logging to capture mistakes during integration.

During Retail/Release builds, they may be kept silent.

3.5.3 Apis

group param_check
Parameter Checks.

`nxEnsure.h`: Helper parameter assertion check macros.

Pre Condition: The source file must have included `nxLog.h` header file.

Project: SecureIoTMW

Defines

ENSURE_OR_BREAK (CONDITION)

If condition fails, break.

Sample Usage:

```
int SomeAPI ()  
{  
    ...  
  
    do {  
        status = Operation1();  
        ENSURE_OR_BREAK(0 == status);  
  
        status = Operation2();  
        ENSURE_OR_BREAK(0 == status);  
  
        ...  
    } while(0);  
  
    return status;  
}
```

ENSURE_OR_EXIT_WITH_STATUS_ON_ERROR (CONDITION, STATUS, RETURN_VALUE)

If condition fails, goto quit with return value status updated.

```
int SomeAPI ()  
{  
    int status = 0;  
    ...
```

(continues on next page)

(continued from previous page)

```

value = Operation1();
ENSURE_OR_QUIT_WITH_STATUS_ON_ERROR(0 == value, status, ERR_FAIL);

value = Operation2();
ENSURE_OR_QUIT_WITH_STATUS_ON_ERROR(0 == value, status, ERR_NOT_ENOUGH_
↪SPACE);

...
quit:
    return status;
}

```

Warning This macro introduces system of multiple returns from a function which is not easy to debug/trace through and hence not recommended.

ENSURE_OR_GO_CLEANUP (CONDITION)

If condition fails, goto :cleanup label

```

{
    ...

    status = Operation1();
    ENSURE_OR_GO_CLEANUP(0 == status);

    status = Operation2();
    ENSURE_OR_GO_CLEANUP(0 == status);

    ...

cleanup:
    return status;
}

```

ENSURE_OR_GO_EXIT (CONDITION)

If condition fails, goto :exit label

```

{
    ...

    status = Operation1();
    ENSURE_OR_GO_EXIT(0 == status);

    status = Operation2();
    ENSURE_OR_GO_EXIT(0 == status);

    ...

exit:
    return status;
}

```

ENSURE_OR_RETURN (CONDITION)

If condition fails, return

```

void SomeAPI()
{

```

(continues on next page)

(continued from previous page)

```

...
status = Operation1();
ENSURE_OR_RETURN(0 == status);

status = Operation2();
ENSURE_OR_RETURN(0 == status);

...
return;
}

```

Warning This macro introduces system of multiple returns from a function which is not easy to debug/trace through and hence not recommended.

ENSURE_OR_RETURN_ON_ERROR (CONDITION, RETURN_VALUE)

If condition fails, return

```

int SomeAPI()
{
...
status = Operation1();
ENSURE_OR_RETURN_ON_ERROR(0 == status, ERR_FAIL);

status = Operation2();
ENSURE_OR_RETURN_ON_ERROR(0 == status, ERR_NOT_ENOUGH_SPACE);

...
return 0;
}

```

Warning This macro introduces system of multiple returns from a function which is not easy to debug/trace through and hence not recommended.

NX_ENSURE_DO_LOG_MESSAGE

Build time over-ride if we want to enable/disable Warning Prints

During debug builds, it makes sense to print them, During retail builds, such loggings would be of any use and remove and reduce code size.

NX_ENSURE_MESSAGE (strCONDITION)

Waring print of the parameter strCONDITION

Warning NX_ENSURE_MESSAGE is an internal message/API to this file. Do not use directly.

NX_ENSURE_MESSAGE (strCONDITION)

Waring print of the parameter strCONDITION


Warning NX_ENSURE_MESSAGE is an internal message/API to this file. Do not use directly.

3.6 I2CM / Secure Sensor

For an example regarding this, see Section 5.7.7 *I2C Master Example*


3.6.1 Normal Read/Write

The sequence to read from I2CM Sensor is as below:

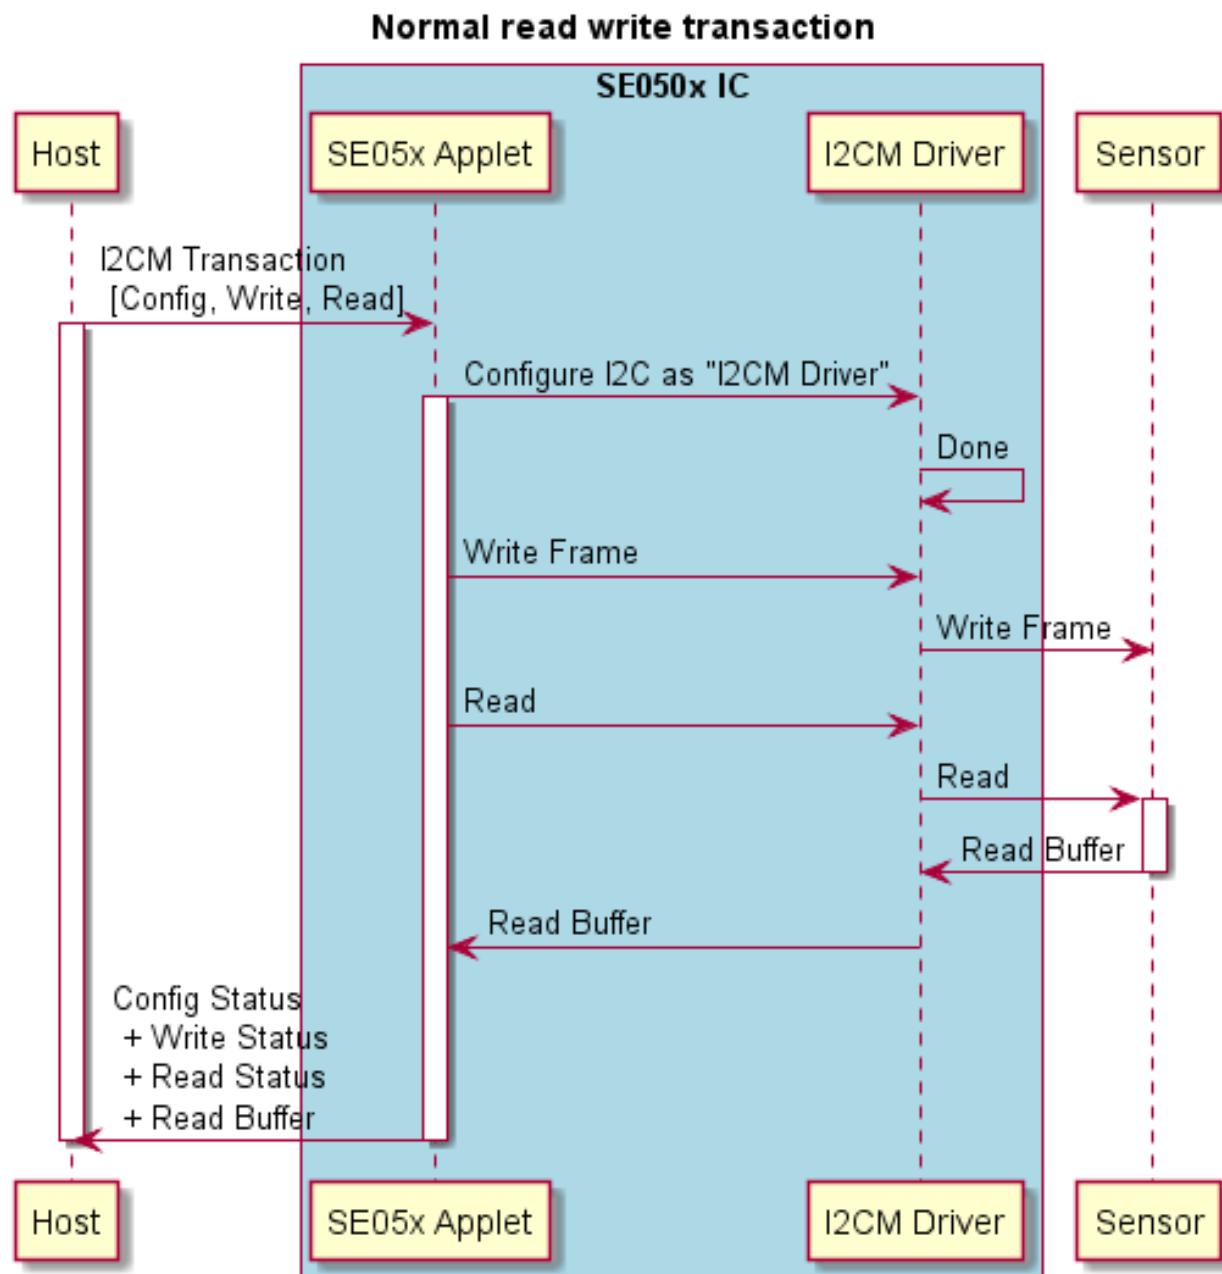

3.6.2 Attested Read

The sequence to read with attestation from I2CM Sensor is as below:

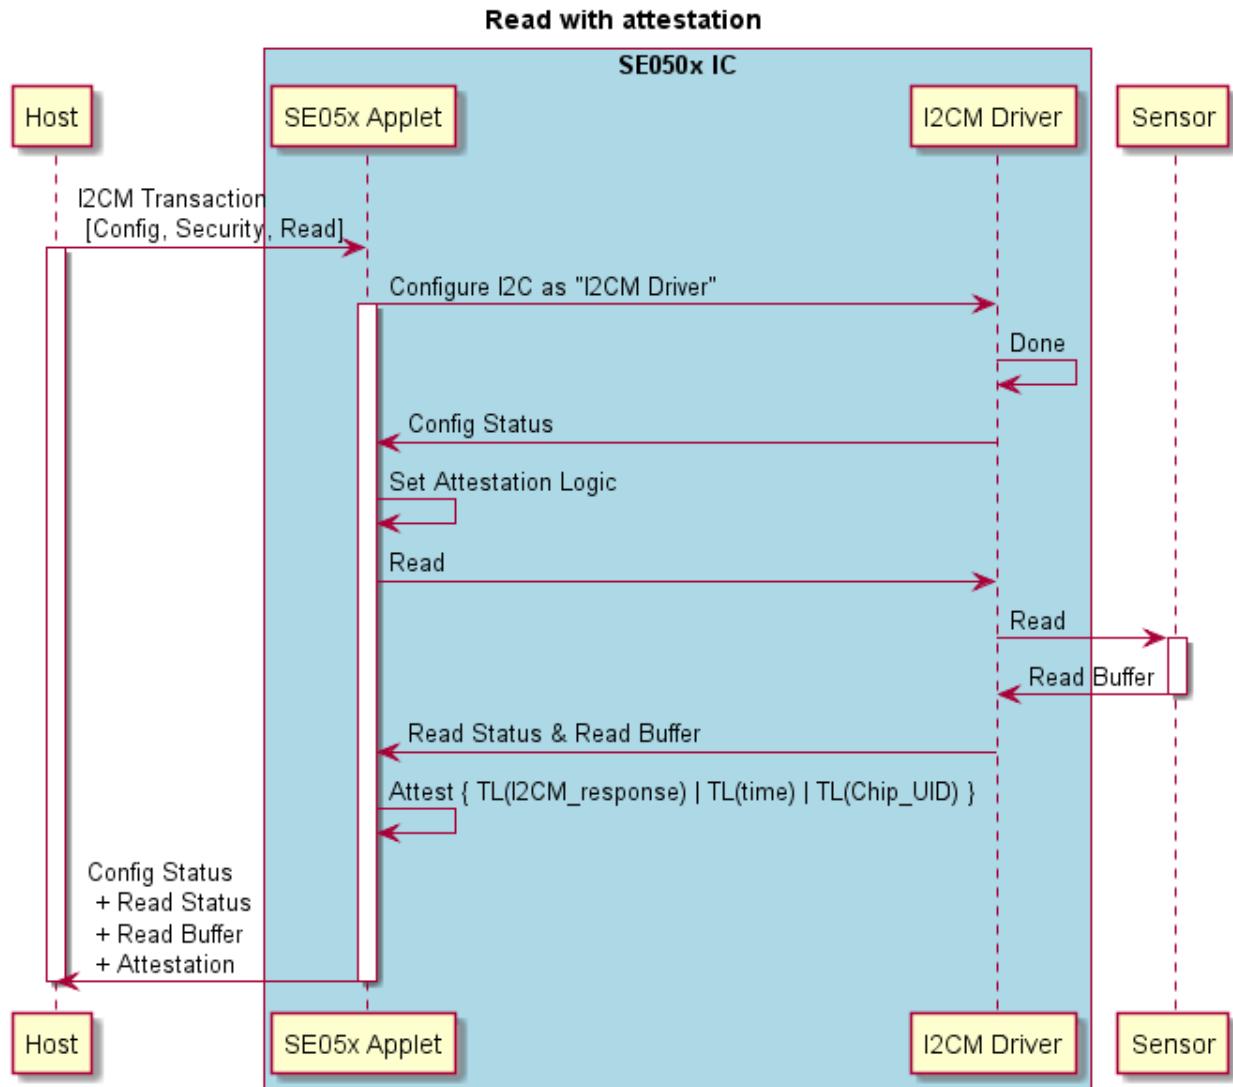

3.6.3 Transaction

A sample I2CM Transaction can be performed as below:

Code:

```
FujAddr[0] = 0x03;
FujAddr[1] = 0x00;
TLV[0].type = kSE05x_I2CM_Configure;
TLV[0].cmd.cfg.I2C_addr = FUJITSU_I2C_ADDR;
TLV[0].cmd.cfg.I2C_baudRate = kSE05x_I2CM_Baud_Rate_100Khz;

TLV[1].type = kSE05x_I2CM_Write;
TLV[1].cmd.w.writeLength = sizeof(FujAddr);
```

(continues on next page)

(continued from previous page)

```

TLV[1].cmd.w.writebuf = FujAddr;

TLV[2].type = kSE05x_I2CM_Read;
TLV[2].cmd.rd.readLength = I2C_MAX_DATA;
TLV[2].cmd.rd.rdBuf = pFujMemRead;

status = Se05x_i2c_master_txn(>gtCtx.session, &TLV[0], 3);

```

3.6.4 Read with Attestation

A sample I2CM read with Attestation can be performed as below:

Code:

```

TLV[0].type = kSE05x_I2CM_Configure;
TLV[0].cmd.cfg.I2C_addr = FUJITSU_I2C_ADDR;
TLV[0].cmd.cfg.I2C_baudRate = kSE05x_I2CM_Baud_Rate_400Khz;

TLV[1].type = kSE05x_I2CM_Write;
TLV[1].cmd.w.writeLength = sizeof(FujAddr);
TLV[1].cmd.w.writebuf = FujAddr;

TLV[2].type = kSE05x_I2CM_Read;
TLV[2].cmd.rd.readLength = I2C_MAX_DATA;
TLV[2].cmd.rd.rdBuf = pFujMemRead;

signatureLen = MAX_SIGNATURE_LEN;
status = Se05x_i2c_master_attst_txn(>gtCtx.session,
    &gtCtx.key,
    &TLV[0],
    random,
    sizeof(random),
    attest_algo,
    &timeStamp,
    &timeStampLen,
    outrandom,
    &outrandomLen,
    chipId,
    &chipIdLen,
    signature,
    &signatureLen,
    3);

```

3.6.5 I2C Master APIs

group **se050_i2cm**

I2C Master APIs in SE050 for secure sensor.

Enums

enum SE05x_I2CM_Baud_Rate_t

Configuration for I2CM

Values:

kSE05x_I2CM_Baud_Rate_100Khz = 0

kSE05x_I2CM_Baud_Rate_400Khz

enum SE05x_I2CM_securityReq_t

Additional operation on data read by I2C

Values:

kSE05x_Security_None = 0

kSE05x_Sign_Request

kSE05x_Sign_Enc_Request

enum SE05x_I2CM_status_t

Status of I2CM Transaction

Values:

kSE05x_I2CM_Success = 0x5A

kSE05x_I2CM_I2C_Nack_Fail = 0x01

kSE05x_I2CM_I2C_Write_Error = 0x02

kSE05x_I2CM_I2C_Read_Error = 0x03

kSE05x_I2CM_I2C_Time_Out_Error = 0x05

kSE05x_I2CM_Invalid_Tag = 0x11

kSE05x_I2CM_Invalid_Length = 0x12

kSE05x_I2CM_Invalid_Length_Encode = 0x13

kSE05x_I2CM_I2C_Config = 0x21

enum SE05x_I2CM_TAG_t

I2C Master micro operation.

Values:

kSE05x_TAG_I2CM_Config = 0x01

kSE05x_TAG_I2CM_Write = 0x03

kSE05x_TAG_I2CM_Read = 0x04

enum SE05x_I2CM_TLV_type_t

Types of entries in an I2CM Transaction

Values:

kSE05x_I2CM_None = 0

Do nothing

kSE05x_I2CM_Configure

Configure the address, baudrate

```

kSE05x_I2CM_Write = 3
    Write to I2C Slave

kSE05x_I2CM_Read
    Read from I2C Slave

kSE05x_I2CM_StructuralIssue = 0xFF
    Response from SE05x that there is something wrong

```

Functions

```

smStatus_t Se05x_i2c_master_attst_txn(sss_session_t *sess, sss_object_t *keyObject,
                                         SE05x_I2CM_cmd_t *p, uint8_t *random_attst,
                                         size_t random_attstLen, SE05x_AttestationAlgo_t
                                         attst_algo, SE05x_TimeStamp_t *ptimeStamp, size_t
                                         *timeStampLen, uint8_t *freshness, size_t *pfresh-
                                         nessLen, uint8_t *chipId, size_t *pchipIdLen, uint8_t
                                         *signature, size_t *psignatureLen, uint8_t noOfTags)

```

Se05x_i2c_master_attst_tx.

I2CM Read With Attestation

Pre p describes I2C master commands.

Post p contains execution state of I2C master commands, the I2C master commands can be overwritten to report on execution failure.

Parameters

- [in] sess: session identifier
- [in] keyObject: Keyobject which contains 4 byte attestaion KeyId
- [inout] p: Array of structure type capturing a sequence of i2c master cmd/rsp transactions.
- [in] random_attst: 16-byte freshness random
- [in] random_attstLen: length of freshness random
- [in] attst_algo: 1 byte attestationAlgo
- [out] ptimeStamp: timestamp
- [out] timeStampLen: Length for timestamp
- [out] freshness: freshness (random)
- [out] pfreshnessLen: Length for freshness
- [out] chipId: unique chip Id
- [out] pchipIdLen: Length for chipId
- [out] signature: signature
- [out] psignatureLen: Length for signature
- [in] noOfTags: Amount of structures contained in p

```

smStatus_t Se05x_i2c_master_txn(sss_session_t *sess, SE05x_I2CM_cmd_t *cmds, uint8_t
                                         cmdLen)

```

Se05x_i2c_master_tx.

I2CM Transaction

Pre p describes I2C master commands.

Post p contains execution state of I2C master commands, the I2C master commands can be overwritten to report on execution failure.

Parameters

- [in] sess: session identifier
- [inout] cmds: Array of structure type capturing a sequence of i2c master cmd/rsp transactions.
- [in] cmdLen: Amount of structures contained in cmds

```
struct SE05x_I2CM_cmd_t
#include <fsl_sss_se05x_types.h> Individual entry in array of TLV commands, with type
Se05x_i2c_master_txn would expect an array of these.
```

Public Members

SE05x_I2CM_INS_type_t cmd
Individual entry in array of TLV commands.

SE05x_I2CM_TLV_type_t type

```
struct SE05x_I2CM_configData_t
#include <fsl_sss_se05x_types.h> Data Configuration for I2CM
```

Public Members

uint8_t I2C_addr
7 Bit address of I2C slave

SE05x_I2CM_Baud_Rate_t I2C_baudRate
What baud rate

SE05x_I2CM_status_t status
return status of the config operation

```
union SE05x_I2CM_INS_type_t
#include <fsl_sss_se05x_types.h> Individual entry in array of TLV commands.
```

Public Members

SE05x_I2CM_configData_t cfg
Data Configuration for I2CM

SE05x_I2CM_structuralIssue_t issue
Used to report error response, not for outgoing command

SE05x_I2CM_readData_t rd
Read to I2CM from I2C Slave

SE05x_I2CM_securityData_t sec
Security Configuration for I2CM.

SE05x_I2CM_writeData_t w
Write From I2CM to I2C Slave.

```
struct SE05x_I2CM_readData_t
#include <fsl_sss_se05x_types.h> Read to I2CM from I2C Slave
```

Public Members

uint8_t *rdBuf
Output. rdBuf will point to Host buffer.

SE05x_I2CM_status_t rdStatus
[Out] status of the operation

uint16_t readLength
How many bytes to read

```
struct SE05x_I2CM_securityData_t
#include <fsl_sss_se05x_types.h> Security Configuration for I2CM.
```

Public Members

uint32_t keyObject
object used for the operation

SE05x_I2CM_securityReq_t operation
Additional operation on data read by I2C

```
struct SE05x_I2CM_structuralIssue_t
#include <fsl_sss_se05x_types.h> Used to report error response, not for outgoing command
```

Public Members

SE05x_I2CM_status_t issueStatus
[Out] In case there is any structural issue

```
struct SE05x_I2CM_writeData_t
#include <fsl_sss_se05x_types.h> Write From I2CM to I2C Slave.
```

Public Members

uint8_t *writebuf
Buffer to be written

uint8_t writeLength
How many bytes to write

SE05x_I2CM_status_t wrStatus
[Out] status of the operation

3.7 Logging

In order to efficiently debug and diagnose the Plug & Trust Middleware and its supported use-cases and examples, it supports logging. The logging Framework is written in such a way that embedded platforms are kept in mind and at priority. The choice of logging is done at compile time and not at run time like other high-level languages.

3.7.1 Logging level

The logging is divided into following levels:

Error Some kind of unrecoverable or unexpected error has happened and the behaviour from this point on is most likely to be out of specifications/expectations. The suffix for this in *Logging APIs* is **E**.

Warn Whatever happened is unexpected but not fatal, the severity of the warning requires the judgement of the user. The suffix for this in *Logging APIs* is **W**.

Info This is information for the user. The suffix for this in *Logging APIs* is **I**.

Debug These are verbose low level diagnostic debug messages and not to be used/enabled in normal circumstances. The suffix for this in *Logging APIs* is **D**.

3.7.2 Adding log messages into the source code

- 1) Add one of *Logging Header Files* to the C source code.

Warning: Only for C source code. Never add the logging files to header files, only add them to C source code.

- 2) Call applicable *Logging APIs* at respective *Logging level*
- 3) Re-compile and re-run the software.

3.7.3 Logging APIs

The following are the loggings APIs to be called from the source code.

LOG_I(...) Log any value. C language format specifiers and values can be used if needed.

LOG_X8_I(VALUE) Log a HEX number 8 bits wide

LOG_U8_I(VALUE) Log an unsigned decimal number 8 bits wide

LOG_X16_I(VALUE) Log a HEX number 16 bits wide

LOG_U16_I(VALUE) Log a unsigned decimal number 16 bits wide

LOG_X32_I(VALUE) Log a HEX number 32 bits wide

LOG_U32_I(VALUE) Log an unsigned number 32 bits wide

LOG_AU8_I(ARRAY, LEN) Log an array of 8bits of length LEN

LOG_MAU8_I(MESSAGE, ARRAY, LEN) Same as LOG_AU8_I, but use MESSAGE.

- The logging APIs effectively use preprocessor directives like # and ## and therefore, if the variable names are verbose enough, API calls like LOG_X16_I(statusOfDeleteKey) are enough to log response with relevant information, and efficient for the developer to add a logging instruction.

- The suffix `_I` can be replaced with `_E`, `_W` or `_D` based on *Logging level*. The convention of logging remains the same.
- Use HEX Values to log enums and other hexadecimal numbers. For items that are not treated as HEX (e.g. length), use the decimal logging APIs.

For example, the APIs can be called as below.

```
retStatus = DoAPDUTxRx_Case3( /* ...,
    rspbuf,
    &rspbufLen);
LOG_X16_D(retStatus);
LOG_AU8_D(rspbuf, rspbufLen);
```

If needed, the same can be made more verbose as below.

```
LOG_D("Sending FOO Command");
retStatus = DoAPDUTxRx_Case3( /* ...,
    rspbuf,
    &rspbufLen);

LOG_D("FOO retStatus=0x04X", rtStatus);
LOG_MAU8_D("FOO Command", rspbuf, rspbufLen);
```

Logging - Information

Code:

```
uint32_t xu32val=0x12341234u;
uint8_t xu8val=0x44;

LOG_I("Values are xu32val=0x%08X xu8val=0x%02X", xu32val, xu8val);
```

Output:

```
App:INFO :Values are xu32val=0x12341234 xu8val=0x44
```

Logging - Variable Names

Code:

```
uint32_t xu32val=0x12341234u;
uint8_t xu8val=0x44;
unsigned int some_int_value = 783;
unsigned char some_byte_value = 96;

LOG_I("Values are:");
LOG_X8_I(xu8val);
LOG_U8_I(some_byte_value);
LOG_X16_I(xu8val);
LOG_U16_I(some_byte_value);
LOG_X32_I(xu32val);
LOG_U32_I(some_int_value);
```

(continues on next page)

(continued from previous page)

```
/* Logging that will be mis-interpreted */
LOG_X16_I(some_byte_value);
```

Output:

```
App:INFO :Values are:
App:INFO :xu8val=0x44
App:INFO :some_byte_value=96
App:INFO :xu8val=0x0044
App:INFO :some_byte_value=96
App:INFO :xu32val=0x12341234
App:INFO :some_int_value=783
App:INFO :some_byte_value=0x0060
```

Logging - Arrays

Code:

```
const uint8_t some_array[] = {
    0x5A, 0x5B, 0x5C, 0x5D,
    0x5E, 0x5F, 0x60, 0x61,
    0x62, 0x63, 0x64, 0x65,
    0x66, 0x67, 0x68, 0x69,
    0x6A, 0x6B, 0x6C, 0x6D};

const uint8_t buffer[] = {
    0x2A, 0x2B, 0x2C, 0x2D,
    0x2E, 0x2F, 0x30, 0x31,
    0x32, 0x33, 0x34, 0x35,
    0x36, 0x37, 0x38, 0x39,
    0x3A, 0x3B, 0x3C, 0x3D,
    0x3E, 0x3F, 0x40, 0x41,
    0x42, 0x43, 0x44, 0x45};

LOG_AU8_I(some_array, ARRAY_SIZE(some_array));
LOG_MAU8_I("meaningful name", buffer, ARRAY_SIZE(buffer));
```

Output:

```
App:INFO :some_array (Len=20)
5A 5B 5C 5D      5E 5F 60 61      62 63 64 65      66 67 68 69
6A 6B 6C 6D

App:INFO :meaningful name (Len=28)
2A 2B 2C 2D      2E 2F 30 31      32 33 34 35      36 37 38 39
3A 3B 3C 3D      3E 3F 40 41      42 43 44 45
```

Logging - Levels

Code:

```
uint32_t xu32val=0x12341234u;
LOG_X32_D(xu32val);
LOG_X32_I(xu32val);
LOG_X32_W(xu32val);
LOG_X32_E(xu32val);
```

Output:

```
App:INFO :xu32val=0x12341234
App:WARN :xu32val=0x12341234
App:ERROR:xu32val=0x12341234
```

3.7.4 Logging Header Files

Some of the header files for logging are as under.

nxLog_UseCases.h High level use cases.

nxLog_App.h Applications and tools.

nxLog_VCOM.h Logging specifically for VCOM Layer.

nxLog_sss.h Logging specifically for SSS Layer.

nxLog_hostLib.h Logging specifically for Host Library Layer.

nxLog_smCom.h Communication and common layer.

They can be found at hostlib/hostLib/libCommon/infra. These files are machine generated and hence is not recommended to hand edit them.

3.7.5 Changing logging level

To change the level of logging, the following approaches are valid and based on the need of the problem, they can and should be used.

Full source-code

hostlib/hostLib/libCommon/infra/nxLog_DefaultConfig.h can be modified to change logging level. nxLog_DefaultConfig.h is self documented.

```
/* See Plug & Trust Middleware Docuemntation --> stack --> Logging
   for more information */

/*
 * - 1 => Enable Debug level logging - for all.
 * - 0 => Disable Debug level logging. This has to be
 *         enabled individually by other logging
 *         header/source files */
#define NX_LOG_ENABLE_DEFAULT_DEBUG 0

/* Same as NX_LOG_ENABLE_DEFAULT_DEBUG but for Info Level */
#define NX_LOG_ENABLE_DEFAULT_INFO 1

/* Same as NX_LOG_ENABLE_DEFAULT_DEBUG but for Warn Level */
#define NX_LOG_ENABLE_DEFAULT_WARN 1

/* Same as NX_LOG_ENABLE_DEFAULT_DEBUG but for Error Level.
 * Ideally, this shoudl always be kept enabled */
#define NX_LOG_ENABLE_DEFAULT_ERROR 1
```

(continues on next page)

(continued from previous page)

```
/* Release - retail build */
#ifndef FLOW_SILENT
#define NX_LOG_ENABLE_DEFAULT_DEBUG 0
#define NX_LOG_ENABLE_DEFAULT_INFO 0
#define NX_LOG_ENABLE_DEFAULT_WARN 0
#define NX_LOG_ENABLE_DEFAULT_ERROR 0

#endif
```

Logging at component level

For example, changing logging level of App, `hostlib/hostLib/libCommon/infra/nxLog_App.h` can be updated. As shown below, in `nxLog_App.h`, the values of `NX_LOG_ENABLE_APP_INFO`, etc. can be updated.

```
/* If source file, or nxLog_Config.h has not set it, set these defines
 *
 * Do not #undef these values, rather set to 0/1. This way we can
 * jump to definition and avoid plain-old-text-search to jump to
 * undef. */

#ifndef NX_LOG_ENABLE_APP_DEBUG
#define NX_LOG_ENABLE_APP_DEBUG (NX_LOG_ENABLE_DEFAULT_DEBUG)
#endif
#ifndef NX_LOG_ENABLE_APP_INFO
#define NX_LOG_ENABLE_APP_INFO (NX_LOG_ENABLE_APP_DEBUG + NX_LOG_ENABLE_DEFAULT_
    ↪INFO)
#endif
#ifndef NX_LOG_ENABLE_APP_WARN
#define NX_LOG_ENABLE_APP_WARN (NX_LOG_ENABLE_APP_INFO + NX_LOG_ENABLE_DEFAULT_
    ↪WARN)
#endif
#ifndef NX_LOG_ENABLE_APP_ERROR
#define NX_LOG_ENABLE_APP_ERROR (NX_LOG_ENABLE_APP_WARN + NX_LOG_ENABLE_DEFAULT_
    ↪ERROR)
#endif
```

Individual files

Rather than applying logging levels to full stack, if the need is to set the logging level in individual files, the individual source file can set required defined before including the respective log file.

e.g. The below lines will set log level to maximum:

```
#define NX_LOG_ENABLE_APP_DEBUG 1
#include <nxLog_App.h>
```

e.g. The below lines will set log level to just error:

```
#define NX_LOG_ENABLE_APP_DEBUG 0
#define NX_LOG_ENABLE_APP_INFO 0
```

(continues on next page)

(continued from previous page)

```
#define NX_LOG_ENABLE_APP_WARN 0
#define NX_LOG_ENABLE_APP_ERROR 1
#include <nxLog_App.h>
```

`nxLog_App.h` and `_APP_` needs to be replaced with respective names as per the list in *Logging Header Files*.

3.8 Feature File - `fsl_sss_ftr.h`

The Plug & Trust Middleware uses a feature file to select/detect used/enabled features Within the middleware stack. When using CMake this file is automatically generated into the generated and used build directory. when not using CMake (e.g. using demo/example from the MCUXpresso KSDK package, this file is kept at the root of the source folder.

3.8.1 When Using CMake

Please be careful that when you're using C Make this file is overwritten every time CMake is invoked or it re-generates the make files.

You do not have to hand modify `fsl_sss_ftr.h` feature file. Selections from CMake edit cache would automatically make relevant updates into the generated feature file.

This file is auto generated from `simw-top\sss\inc\fsl_sss_ftr.h.in`

3.8.2 When Using MCUXpresso IDE

As mentioned in above sections this file is kept in the root folder of the imported project. The file is filled with checks and balances so that at compile time some of the invalid selections are handled up front

3.8.3 `fsl_sss_ftr_default.h`

There is also provision to use a default fall-back file in case this feature file is not generated.

In the relevant parts the Middleware uses the following snippet to select the main or fall-back feature file:

```
#if defined(SSS_USE_FTR_FILE)
#include "fsl_sss_ftr.h"
#else
#include "fsl_sss_ftr_default.h"
#endif
```

It must be obvious that if the macro `SSS_USE_FTR_FILE` is not defined by the build system, default feature file gets used. In the reference demos and use cases from the Middleware, `SSS_USE_FTR_FILE` is always defined and only `fsl_sss_ftr.h` is used.

3.8.4 Using feature file to reduce code size

By setting below items to 0, either in CMake or the `fsl_sss_ftr.h` relevant sections of the code is removed from compilation and thereby reducing the code consumption.

`SSSFTR_SW_TESTCOUNTERPART`

For some of the demos we use cryptography both from the secure element and the host. For example, this makes an easy check for comparison where use comparison where we ask the host crypto to encrypt something and the secure element to do the counterpart (in this case encrypt) decrypt. Similarly for sign, verify.

Setting this to Zero, removes the implementation of counterpart.

`SSSFTR_SW_ECC`

When we set this to 1, this feature exposes the asymmetric cryptography from the host for ECC. When using ECKey Authentication (See [Auth Objects : ECKey](#)) this feature needs to be enabled. Please note that `SSSFTR_SW_AES` also needs to be enabled for ECKey Authentication

`SSSFTR_SW_RSA`

When we set this to 0, RSA related implementation from the host SW is removed.

Symmetric cryptography on Host

If for some reason there is no cryptography used at all on the host side then these macros can also be set to 0 to remove relevant code from the host.

- `SSSFTR_SW_AES`
- `SSSFTR_SW_KEY_GET`
- `SSSFTR_SW_KEY_SET`

`SSSFTR_SE05X_AuthECKey`

When set to 0 the authentication using (See [Auth Objects : ECKey](#)) mode is disabled from the Host.

`SSSFTR_SE05X_AuthSession`

When set to 0 then only Platform SCP or default session can be used to talk to the secure element.

SSSFTR_SE05X_AES

When set to 0 then the symmetric cryptography related APIs from the Secure Element is removed from compilation.

SSSFTR_SE05X_CREATE_DELETE_CRYPTOOBJ

When we set this to zero the host never creates new crypto objects or neither delete them. under such situation crypto objects should already be created once in the lifetime of the secure element explicitly.

SSSFTR_SE05X_ECC

Feature related to various elliptic curves is removed when we set this to 0.

SSSFTR_SE05X_KEY_GET

When there is no use case to fetch a key from the secure element to the host via the SSS APIs, this can be set to 0.

SSSFTR_SE05X_KEY_SET

When there is no use case to inject a key into the secure element from the host this can be set to 0. note that the keys can still be provisioned remotely for authenticated sessions this just removes the code from the host middleware.

SSSFTR_SE05X_RSA

Removes the code related to RSA features of the secure element from the middleware when we set this to 0.

3.9 Using Platform SCP Keys from File System

Warning: Keeping keys in plain on file system is not secure. This mechanism is just to test quick prototyping / testing.

Note:

- This is valid only for hosts with filesystem access e.g. : Windows/Linux
- *CLI Tool* does not use this mechanism.

Using this mechanism, pre-compiled windows/linux demo examples can pick up platform SCP Keys from file system.

- 1) Create a file as set by EX_SSS_SCP03_FILE_PATH

You can over-ride value for this variable in `sss/ex/inc/ex_sss_scp03_keys.h`

For Android

```
#define EX_SSS_SCP03_FILE_DIR "/data/vendor/SE05x/"
#define EX_SSS_SCP03_FILE_PATH EX_SSS_SCP03_FILE_DIR "plain_scp.txt"
```

For Linux

```
#define EX_SSS SCP03 FILE DIR "/tmp/SE05X/"  
#define EX_SSS SCP03 FILE PATH EX_SSS SCP03 FILE DIR "plain_scp.txt"
```

For Windows

```
#define EX_SSS SCP03 FILE DIR "C:\\nxp\\SE05X\\\"  
#define EX_SSS SCP03 FILE PATH EX_SSS SCP03 FILE DIR "plain_scp.txt"
```

- 2) Let us assume the Platform SCP03 keys provisioned in SE050 are as follows

- ENC is 35C29245895EA34F6136155F8209D6CD
- MAC is AF172D5D54F7C0D5C10A05B9F1207F78
- DEK is A2BC8438BF77015B361A4425F239FA29

The format of a reference file is as below:

```
# This is a comment, empty lines and comment lines allowed.  
ENC 35C29245895EA34F6136155F8209D6CD # Trailing comment  
MAC AF172D5D54F7C0D5C10A05B9F1207F78 # Optional trailing comment  
DEK A2BC8438BF77015B361A4425F239FA29 # Optional trailing comment
```

The Default Platform SCP keys for ease of use configurations are present in <https://www.nxp.com/docs/en/application-note/AN12436.pdf>

3.9.1 How to Run examples with Platform SCP03 keys

Once the plain_scp.txt file is filled with the correct SCP keys for the sample, run any example e.g.: *ECC Example*. The example will automatically pick up the keys from the file at this location, if the file exists. If the file does not exist, it uses keys from pre-compiled values in the example.

3.10 Auth Objects

There are 3 types of Auth Objects:

- *Auth Objects : UserID* : Sometimes referred to as Identifier or password
- *Auth Objects : AESKey* : Uses AES Key as authentication
- *Auth Objects : ECKey* : Uses ECC Key for authentication

These are needed to have an authenticated session to the Applet. Also, in SE05X, access to many objects can be controlled via policies. Many of these polices are related to which Auth Object was used for the session to the SE05X.

3.11 Auth Objects : UserID

As user ID is kind of Symmetric Identifier that is used to authenticate a session.

3.11.1 User ID - Provisioning / Injection

To *provision / inject* the key, the process is like this:

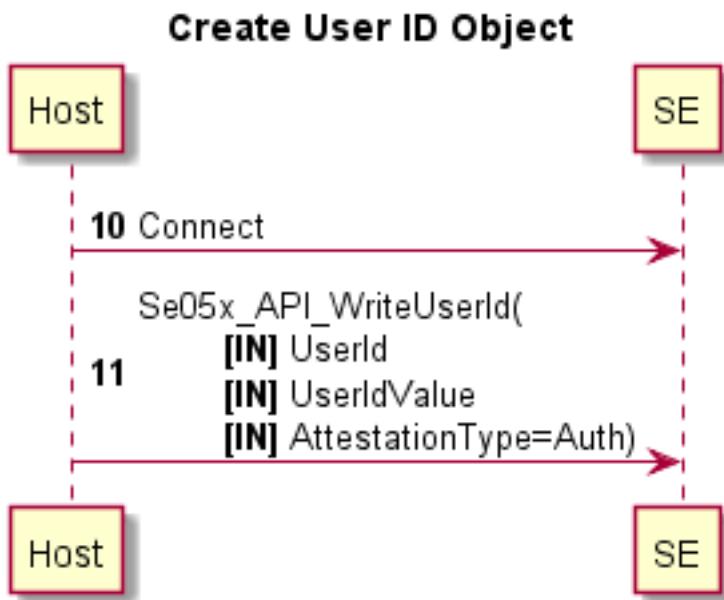


Table 2: Steps to provision

Step	Operation
10	We establish physical connection to SE
11	We create a UserID object, <i>Attestation Type</i> is Auth

3.11.2 User ID - Use for connection / authentication

To use the key, the process is like this:

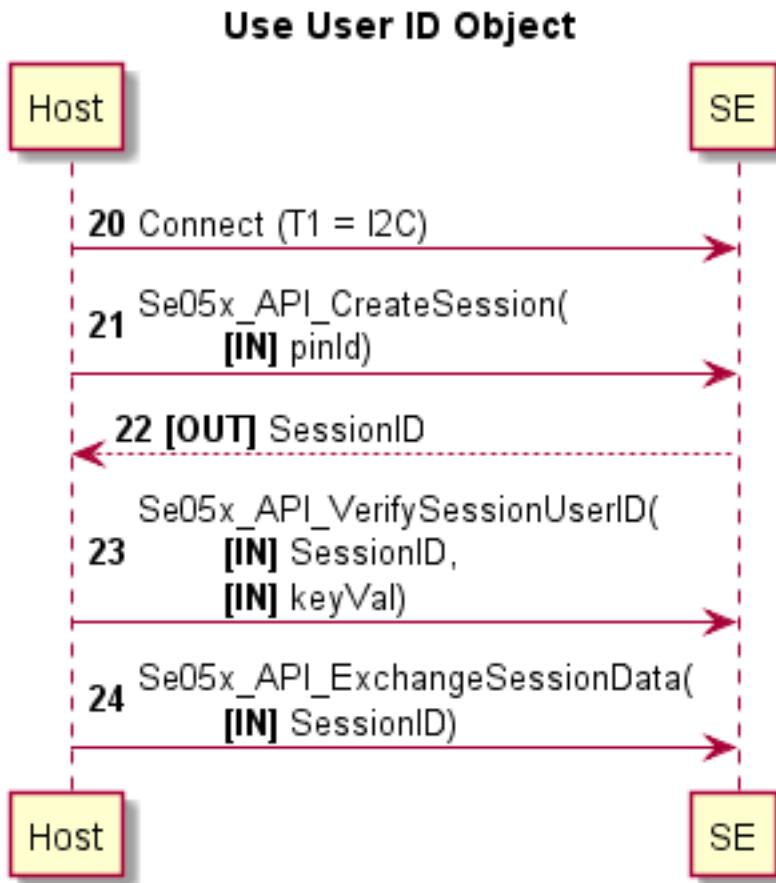


Table 3: Steps

Step	Operation
20	Host establishes physical connection to SE
21	Host calls <code>Se05x_API_CreateSession()</code> and use the 32bit id of UserId that we are going to use.
22	As a part of <code>Se05x_API_CreateSession()</code> API, Applet returns an 8 byte Session ID. We use this in future communication with the SE.
23	Host calls <code>Se05x_API_VerifySessionUserID()</code> . At this point, we pass the Value that we are going to use. (Host must already know the value of the PIN that is used/chosen in step 21.)
24	Finally, Host calls <code>Se05x_API_ExchangeSessionData()</code> API

3.11.3 User ID - Applet Spec Notes

From APDU Spec:

3.2.1.9 UserID

A UserID object is a byte array that holds a value that is linked to a user.

UserID objects can only be created as Authentication object. By default, the maximum number of allowed authentication attempts is set to 255.

Length = 1 up to 16 bytes

3.12 Auth Objects : AESKey

Applet SCP03 is applet level secure channel protocol, which involved single symmetric key as static ENC, MAC, DEC key. First applet scp session is created using auth object provisioned in the SE, and then it follows the standard SCP03 protocol — Initialized Update and External Authenticate.

3.13 Auth Objects : ECKey

ECKey is secure channel protocol tailored for secured authentication and communication between a Host and a connected SE.

Please contact NXP CAS/FAE for the specification of ECKey.

The Secure Channel Protocol consists of two logical phases:

- 1) Authentication phase
- 2) Secure messaging phase

3.13.1 ECKey - Keys Used

The table below gives an overview of the required keys and their presence at SE and Host as required for the ECKey setup, authentication phase

Table 4: Auth Keys

key	SE	Host	Purpose
SK.SE.ECKA	Yes		Static SE key pair for Key Agreement Private key
PK.SE.ECKA	Yes	Yes	Static SE key pair for Key Agreement Public key
SK.Host.ECDSA		Yes	Host signing key pair Private key
PK.Host.ECDSA	Yes		Host signing key pair Private key
eSK.Host.ECKA		Yes	Ephemeral private key of the Host used for key agreement
ePK.Host.ECKA		Yes	Ephemeral public key of the Host used for key agreement

3.13.2 ECKey - Use for connection / authentication


Authentication Phase:

- 1) In the Secure Channel authentication phase, a Host-generated ephemeral key pair, the static SE key pair and SE-generated random data are used to compute a shared master secret
- 2) The Host generates an ephemeral ECC key pair and exchanges the public key component ePK.Host.ECKA with the SE. The ePK.Host.ECKA is signed to prove its authenticity.
- 3) Both the Host and the SE compute the shared secret ShS from (eSK.Host.ECKA , PK.SE.ECKA) and (SK.SE.ECKA, ePK.Host.ECKA) respectively.
- 4) The SE generates random bytes DR.SE and exchanges this with the Host.
- 5) Both the Host and the SE compute the shared master secret MK from the shared secret ShS and random bytes DR.SE.
- 6) **Optionally:**
 - A) Both Host and SE compute the Key-DEK.
 - B) Both Host and SE compute the S-RMAC session key (used for the receipt).
 - C) Both Host and SE compute the receipt.
 - D) The Host verifies the receipt.

Secure Messaging phase:

- 1) In the Secure Channel secure messaging phase, first a setup is performed, where the shared master secret is used to compute the AES session keys (S-ENC, S-MAC and S-RMAC) and initialize the encryption counter
- 2) Both the Host and the SE compute the AES session keys from MK.
- 3) Both the Host and the SE apply an OWF to MK. Note that this is performed after the validation of the command's C-MAC (to exclude DOS attacks on the SE).
- 4) Both the Host and the SE initialize the encryption counter to 1 for the first command/response with C-DECRIPTION or R-ENCRYPTION.
- 5) After the secure messaging setup has been performed, the AES session keys are employed to realize SCP03 secure messaging between Host and SE
- 6) Command APDUs are MACed.
- 7) Response APDUs are optionally MACed.
- 8) Command and response APDUs are optionally encrypted. For each command/response with C-DECRIPTION or R-ENCRYPTION, the encryption counter is incremented.

The phases inclusive the optional Key-DEK and receipt are shown in the figure below

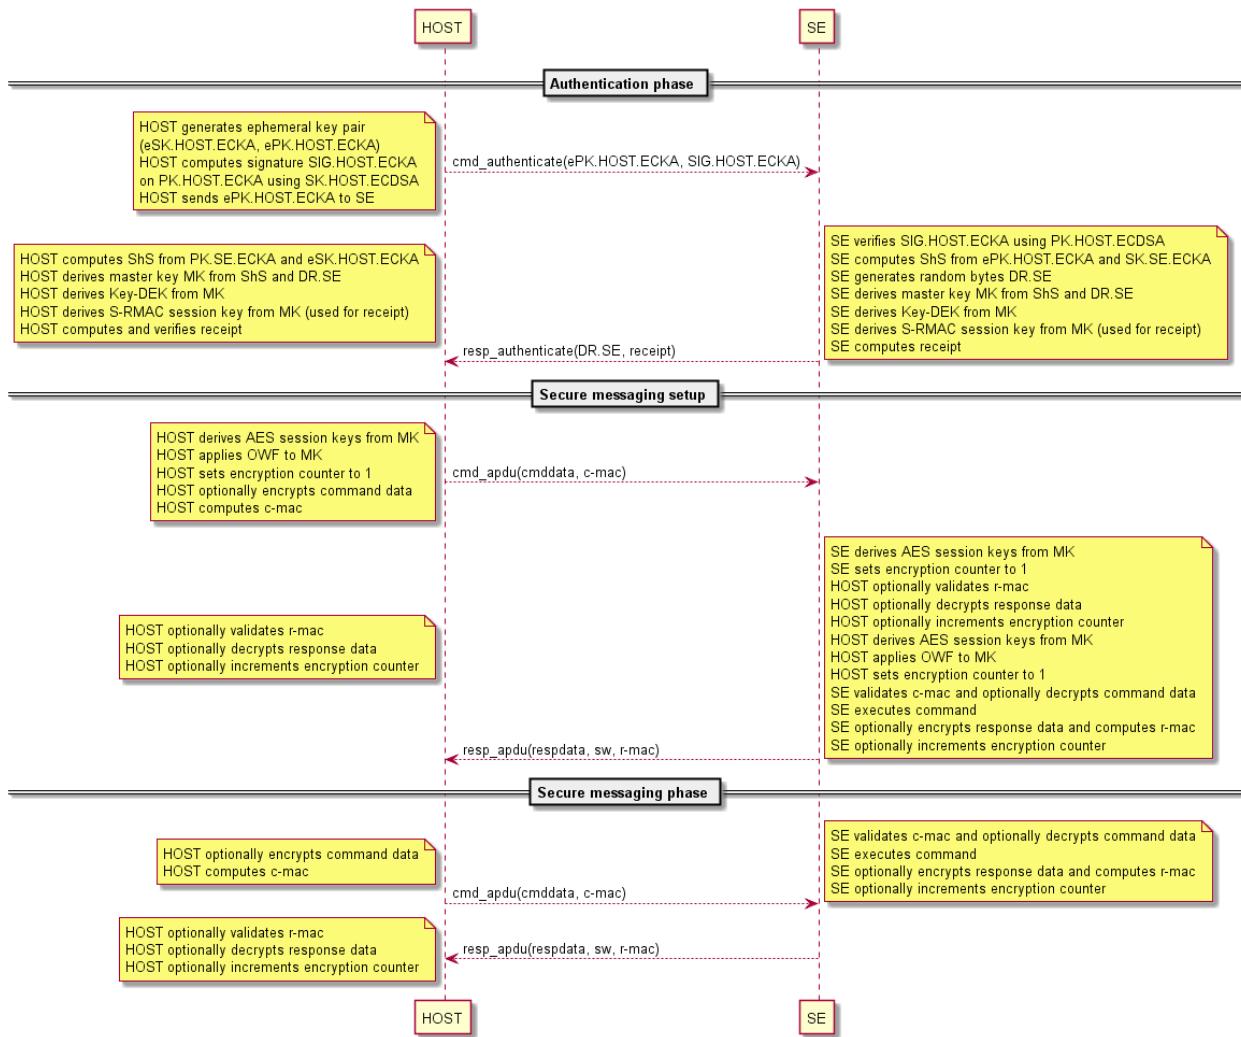

3.14 Key Id Range and Purpose

Purpose		Range
Customer keys	Start	0x00000001
	End	0x7BFFFFFF
AKM Dynamic	Start	0x7C000000
	End	0x7CFFFFFF
Middleware Use Cases and Demos	Start	0x7D000000
	End	0x7DFFFFFF
Applet Reserved	Start	0x7FFF0000
	End	0x7FFFFFFF
Managed by EdgeLock 2GO for different cloud onboarding	Start	0x80000000
	End	0xEEFFFFFF
Middleware testing	Start	0xEF000000
	End	0xEFFFFFFF
Required for EdgeLock 2GO	Start	0xF0000000
	End	0xFFFFFFFF

3.15 Authentication Keys

Authentication object type	KeyID
UserID	0x7DA00001
UserID	0x7DA00011
AESKey	0x7DA00002
AESKey	0x7DA00012
ECKey	0x7DA00003
ECKey	0x7DA00013

Note: These Key IDs are used in examples.

3.16 Trust provisioned KeyIDs

Trust Provisioned object type	KeyID
ECC-256	
Device Key	0xF0000100
Device Certificate	0xF0000101
Gateway Key	0xF0000102
Gateway Certificate	0xF0000103
RSA-2K	
Device Key	0xF0000110
Device Certificate	0xF0000111
Gateway Key	0xF0000112
Gateway Certificate	0xF0000113
RSA-4K	
Device Key	0xF0000120
Device Certificate	0xF0000121
Gateway Key	0xF0000122
Gateway Certificate	0xF0000123

3.17 SCP03 with PUF

To keep Platform SCP03 keys secure, we can use PUF on LPC55S. PUF will have the actual keys stored and we can perform cryptographic operations with it using HashCrypt block. The keys cannot be read out of PUF.

3.17.1 Activation Code

The Activation Code (AC) is a 1192-byte code used to start PUF. The AC is generated during PUF_Enroll operation. This must be generated once for the lifetime of the device and stored in PFR region of flash.

Each PUF has a different AC and cannot be used with any other device.

Note: For testing, we use pre-compiled activation code from `ex_scp03_puf.h` instead of reading from PFR. In actual use case, it **MUST** be stored and read from PFR.

3.17.2 Key Code

For every key stored in PUF, we get a Key Code (KC) which is used to access the key. Hardware keys stored in PUF cannot be exported. SCP03 keys must be stored as hardware keys.

3.17.3 Using with LPC55S

PUF is integrated with `sss_session_open()` on LPC55S. Use the following CMake configurations to compile with PUF on LPC55S:

- Host=lpcxpresso55s_s
- SCP=SCP03_SSS
- SE05X_Auth=PlatfSCP03

When we compile any application on LPC55S secure zone, it will try to read HW keys provisioned in PUF. If in case the keys are not provisioned in PUF, the implementation will fallback on software implementation.

Note: You need to pass keyCodes in connectionData to `sss_session_open` instead of actual keys provisioned in PUF.

Only the static SCP03 keys are injected inside the PUF. Dynamic keys are derived from the static keys using CMAC operations with Hashcrypt module.

For example on how to enroll PUF and store SCP03 keys, refer [Key Injection to PUF](#).

3.18 SSS Heap Management

For effective heap management, macros `SSS_MALLOC`, `SSS_CALLOC` and `SSS_FREE` are available in `sss/port/ksdk/fsl_sss_types.h` for embedded build and in `sss/port/default/fsl_sss_types.h` for PC/Linux build.

```
#ifndef SSS_MALLOC
#define SSS_MALLOC malloc
#endif // SSS_MALLOC

#ifndef SSS_FREE
#define SSS_FREE free
#endif // SSS_FREE

#ifndef SSS_CALLOC
#define SSS_CALLOC calloc
#endif // SSS_CALLOC
```

These macros are used in SSS for heap management operations and can be defined as platform dependent implementations of malloc, calloc and free APIs.

BUILDING / COMPILING

The Plug & Trust Middleware uses *CMake* for compiling / building.

4.1 Windows Build

4.1.1 Prerequisite

- Visual studio installed
- Python 3 32 bit installed

4.1.2 Create Build files

- Use `<SE05X_root_folder>/simw-top/scripts/create_cmake_projects.py` to generate the build files, Run as

```
@REM Setup environment variables and PATH
call env_setup.bat

@REM Use CMake to generate .sln files
python create_cmake_projects.py
```

- Build files are generated at `<SE05X_root_folder>/simw-top_build/`
- Use the visual studio solution at `<SE05X_root_folder>/simw-top_build/se_x86/PlugAndTrustMW.sln` to build sample examples and demo examples

4.1.3 SSS Examples

- Sample examples can be found at `<SE05X_root_folder>/simw-top_build/se_x86/bin`
- Run the example as

```
<example_name>.exe <COM_PORT>
```

Refer *Demo and Examples* for details on these examples and for running cloud/tls demo applications

4.2 Import MCUXPresso projects from SDK


With Plug & Trust middleware, MCUXPresso SDKs are supplied for supported boards. Projects can be imported/executed from these SDKs.

4.2.1 Prerequisite


- MCUXpresso installed. Refer to [Setting up MCUXPresso IDE](#) for details on installation
- Plug & Trust Middleware SE050 MCUXPresso SDK Package is downloaded and available

4.2.2 Importing an example


- Drag and drop SDK to “Install SDKs” windows of MCUXPresso. Even if you have older SDK, you can drag and drop. MCUXPresso will take the latest SDK based on version number.

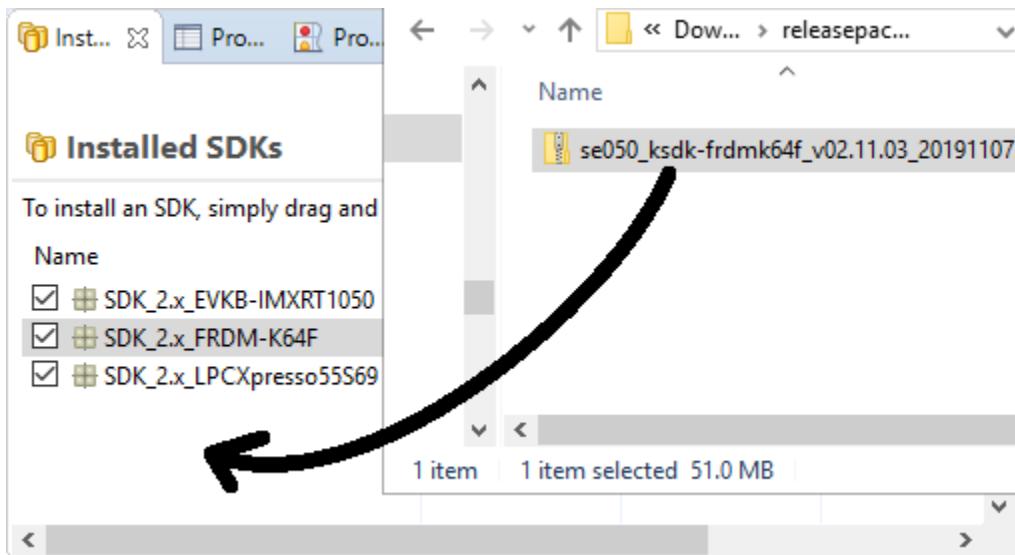


- Accept the request to import the SDK.

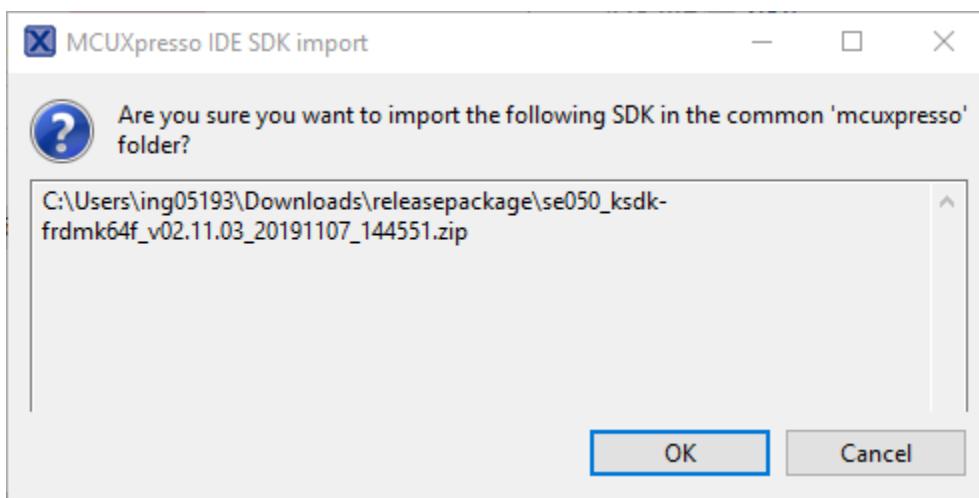


- You should see a new / updated entry. In this case version 2.6.5. Based on the release, this version may change. If you have Newer version of SDK, and you would like to use this version, you must delete the old SDK.

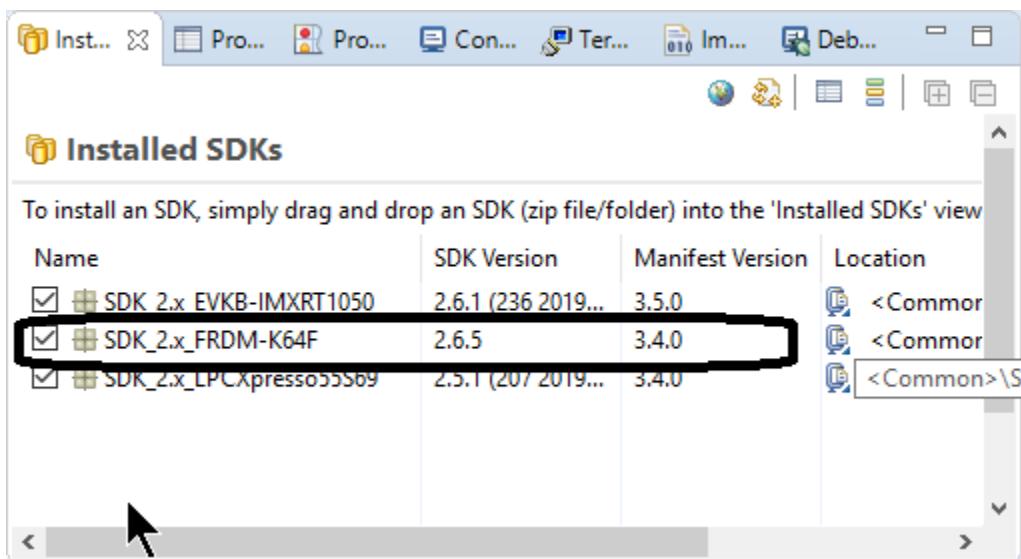


- From the “Quickstart Panel” → “Import SDK Example(s)”

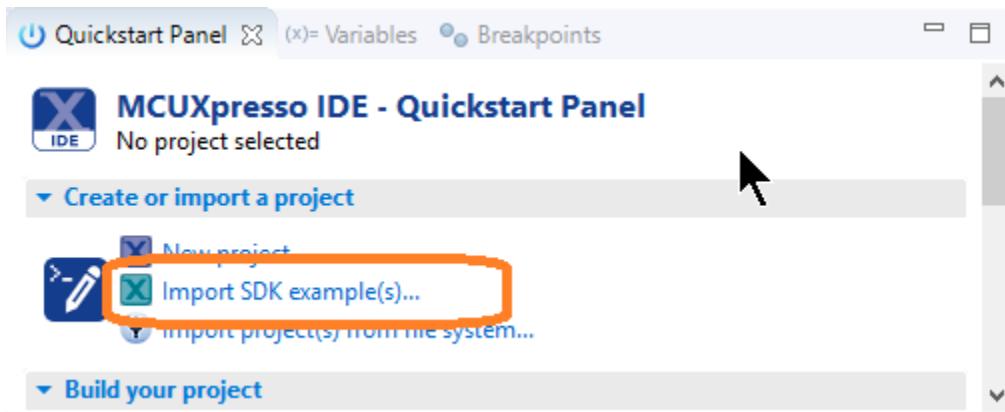

- You must see K64F with SE050 marked. For other SDKs, same convention follows. If you do not see SE050 there, it means you have newer version of the SDK and you must delete them.

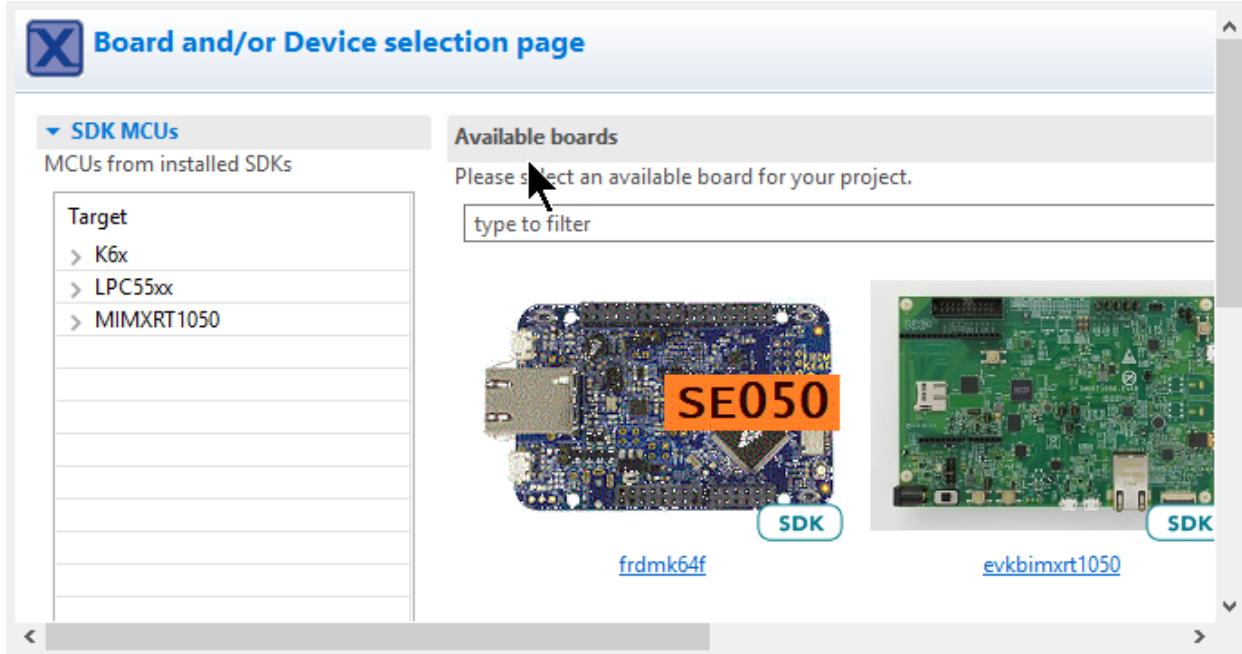

- When you import and click next, you will see support examples for that board.
- Select the example you would like to run/test. In this case, we go for “minimal”

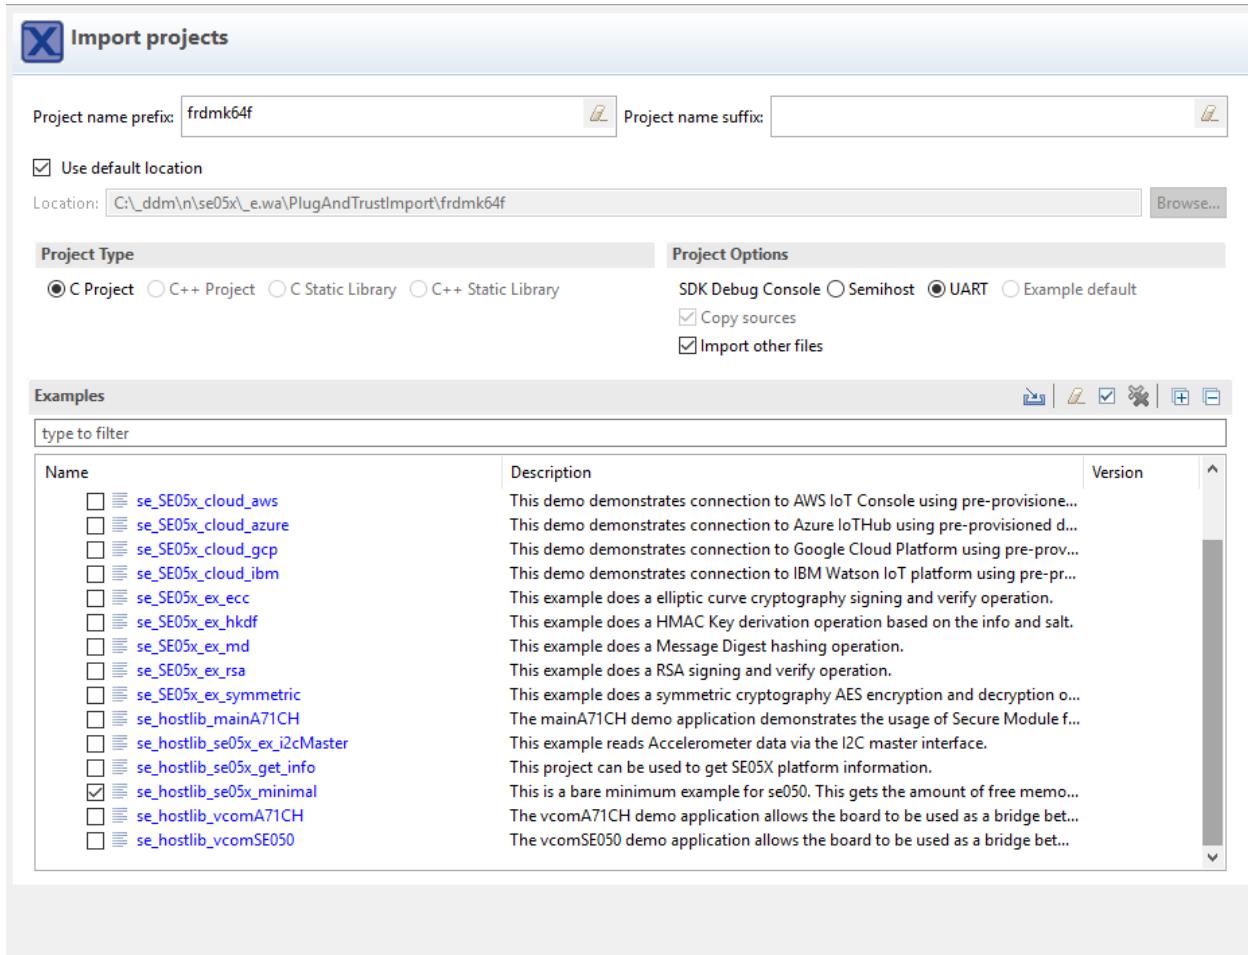

- You can choose different settings if you like to as supported by MCUXPresso

C/C++ Library Settings

Set library type (and hosting variant) **NewlibNano (nohost)**

- Redlib: Use floating point version of printf
- Redlib: Use character rather than string based printf
- Redirect SDK "PRINTF" to C library "printf"
- Include semihost HardFault handler
- NewlibNano: Use floating point version of printf
- NewlibNano: Use floating point version of scanf
- Redirect printf/scanf to ITM
- Redirect printf/scanf to UART

Hardware settings

Set Floating Point type **FPv4-SP (Hard ABI)**

MCU Compiler

Language standard **GNU C99 (-std=gnu99)**

MCU Linker

Link application to RAM


Memory Configuration

Memory details

Default LinkServer Flash Driver


Type	Name	Alias	Location	Size	Driver
Flash	PROGRAM_FLASH	Flash	0x0	0x100000	FTFE_4K.cfx
RAM	SRAM_UPPER	RAM	0x20000000	0x30000	
RAM	SRAM_LOWER	RAM2	0x1fff0000	0x10000	
RAM	FLEX_RAM	RAM3	0x14000000	0x1000	

- Now the examples are ready to be tested.

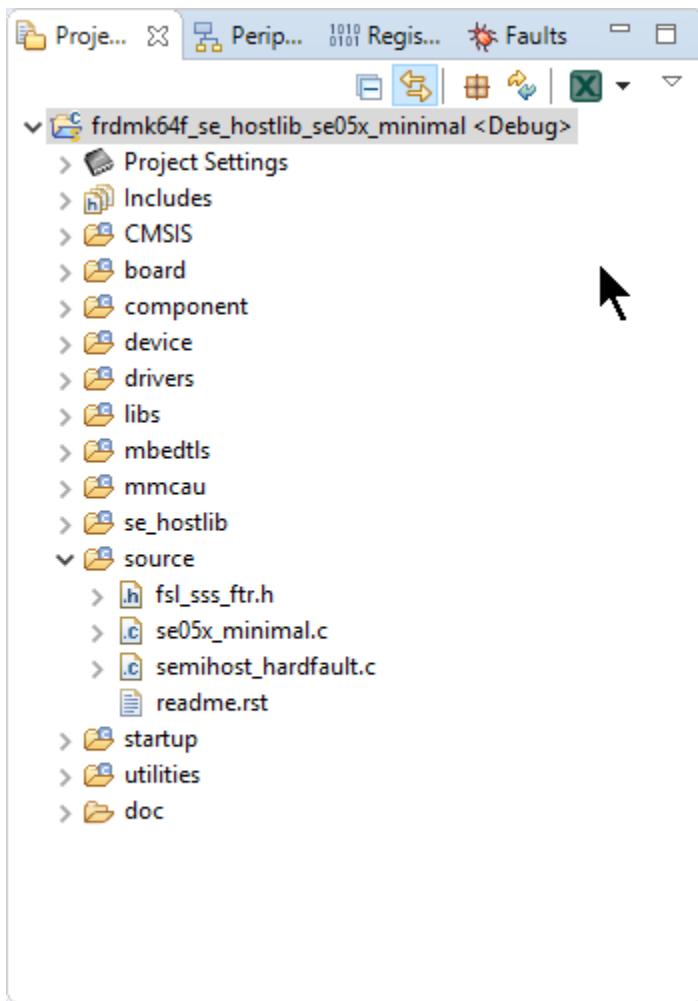


4.2.3 Running / Debugging example


- Click on Build to compile and generate the executables

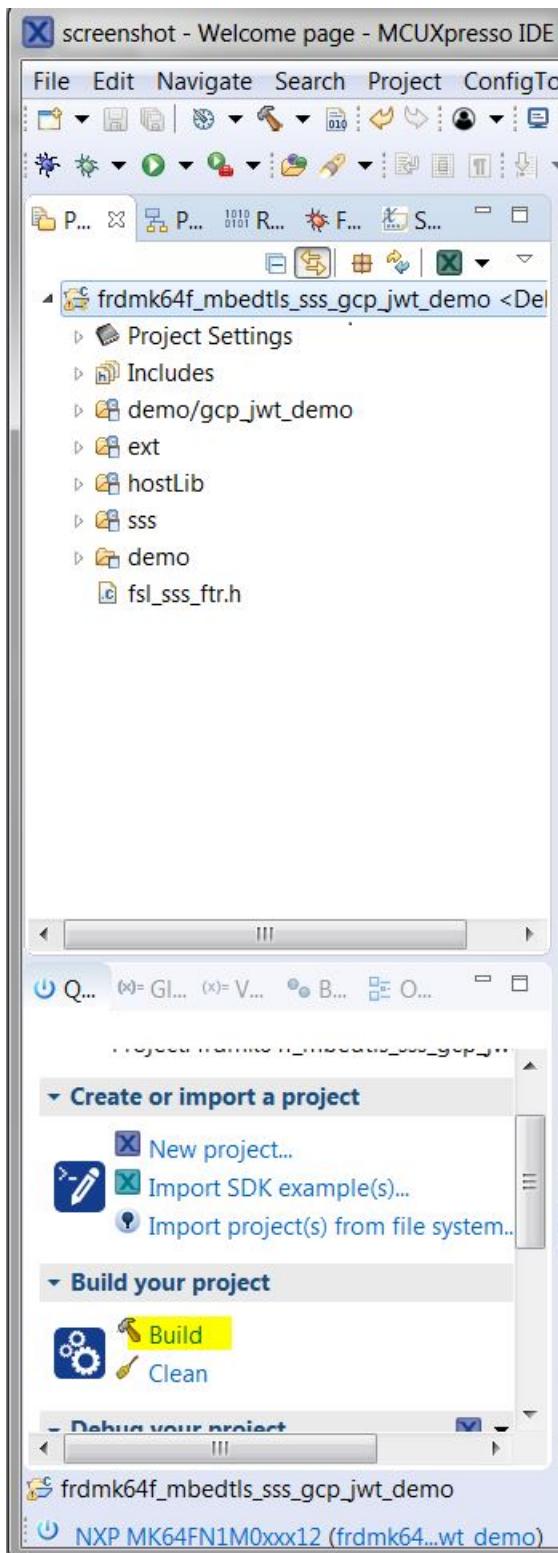


- Click on debug to program the binary into the device

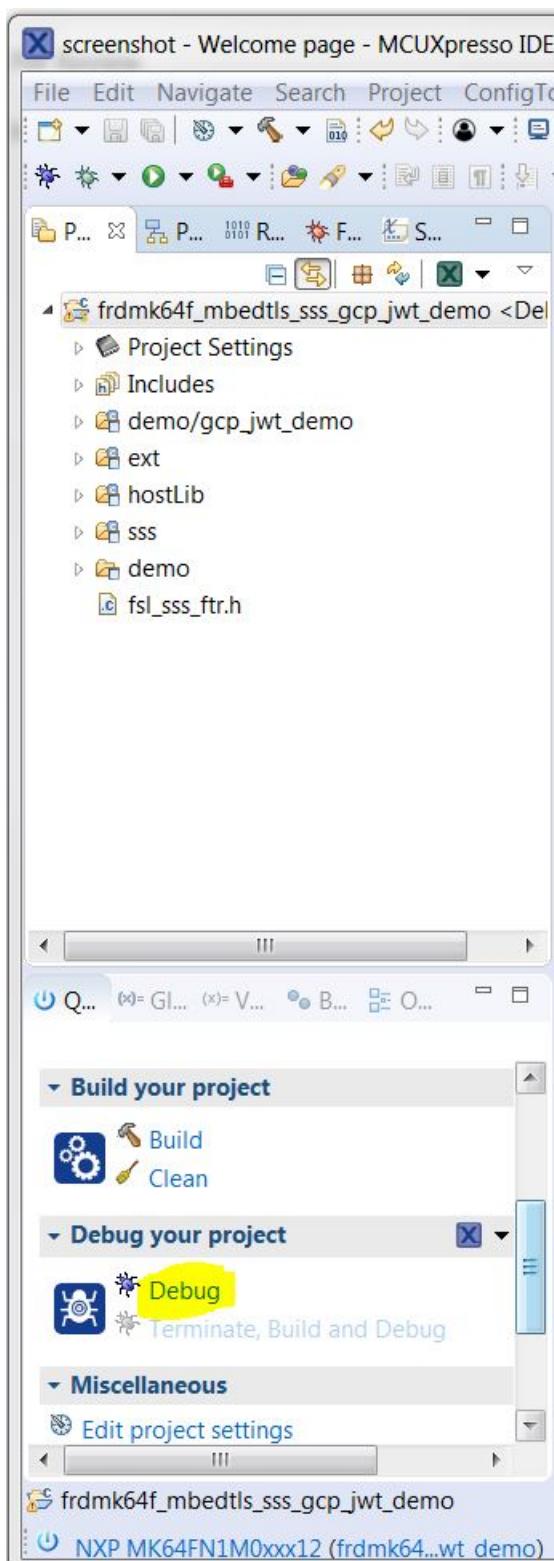

- Select J-Link OpenSDA and click on OK. For more details on OpenSDA, refer to <https://www.nxp.com/support/developer-resources/run-time-software/kinetis-developer-resources/ides-for-kinetis-mcus/opensda-serial-and-debug-adapter:OPENSDA>

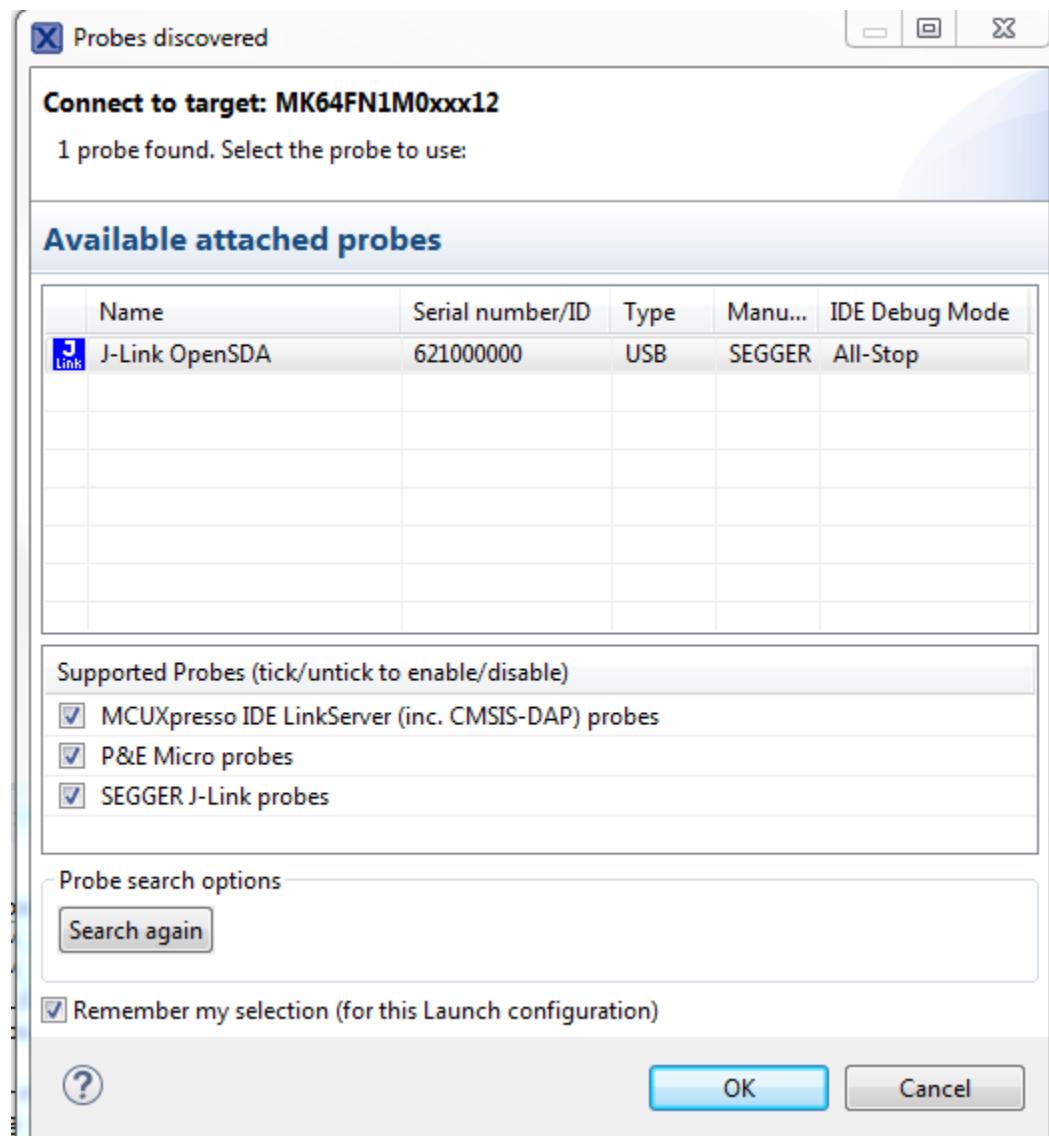

- Click on the Resume button to start program execution

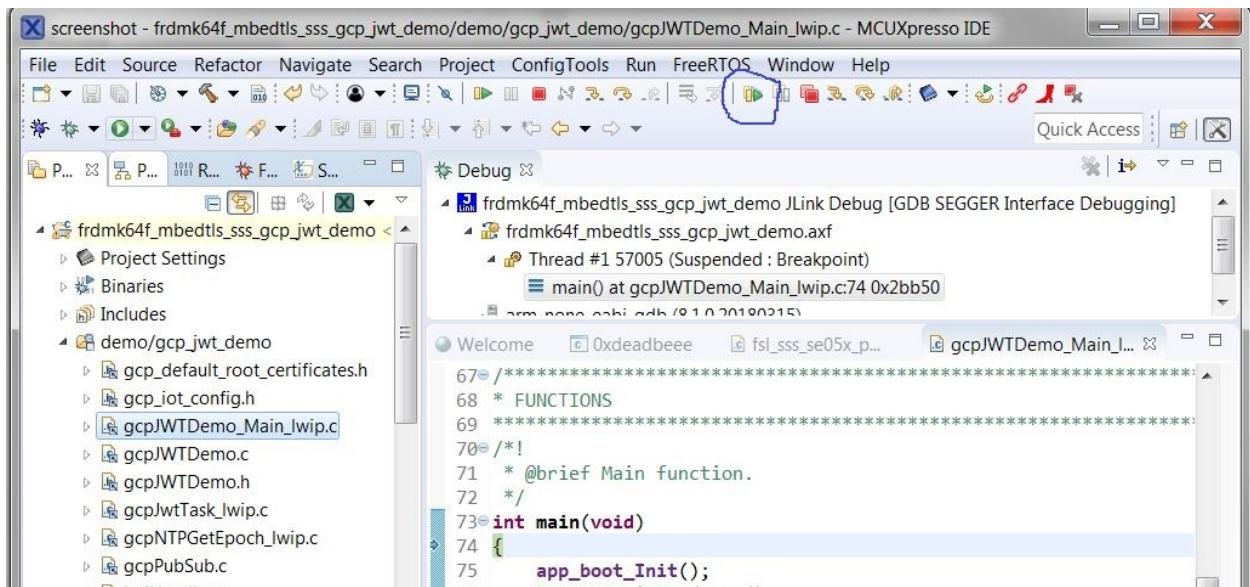

4.2.4 Logging on console

For UART, a serial terminal application(for e.g Tera Term) on PC for VCOM serial device needs to be configured as follows

- 115200 baud rate
- 8 data bits
- No parity
- One stop bit
- No flow control

Once the program execution begins, logs are printed on the terminal(e.g. Tera Term) indicating the status of execution and test results. The ATR and the various module versions are printed followed by a SELECT-DONE after which the respective test logs are printed.

4.3 Freedom K64F Build (CMake - Advanced)

For the advanced users and users who are aware of CMake / want to use true potential of CMake, the plug and trust MW supports build system where developers can run exactly the same example on PC/Windows/Linux and embedded targets.


e.g. Using this, developer can develop/extend example on a Windows Machine with visual studio which supports multiple break points, watch points, etc. and then recompile same example for K64F and test it there.

4.3.1 Prerequisite


- MCUXpresso installed. Refer to [Setting up MCUXPresso IDE](#) for details on installation
- CMake is installed
- Python is installed and projects are created using `scripts/create_cmake_projects.py`

4.3.2 Importing the Project

- Import a project using the option provided by MCUXPresso. Do not use the “Quickstart Panel” to import project.

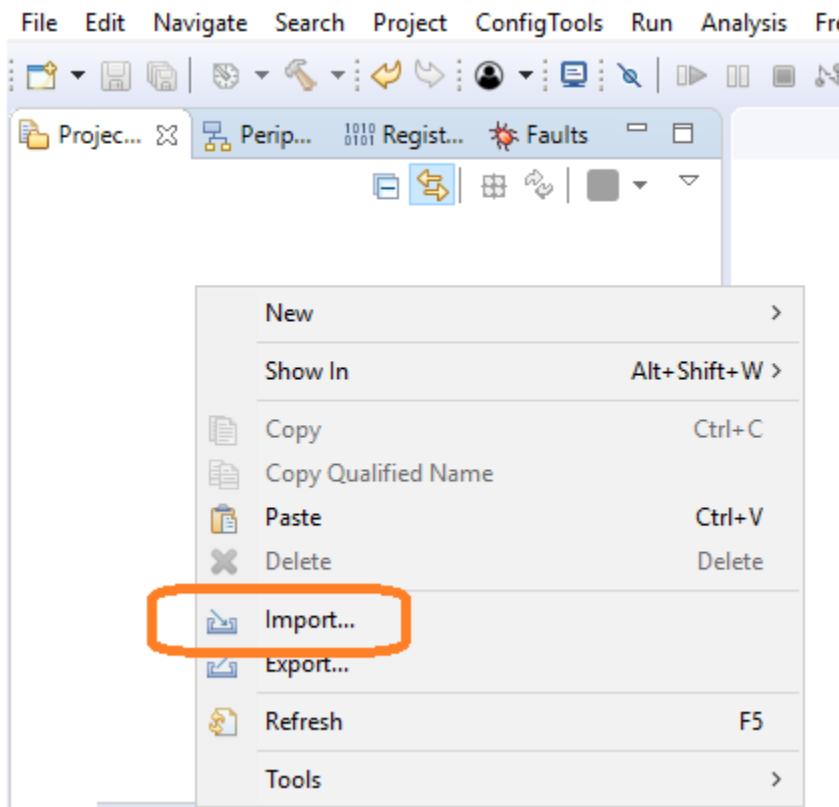


- Import existing projects into Workspace

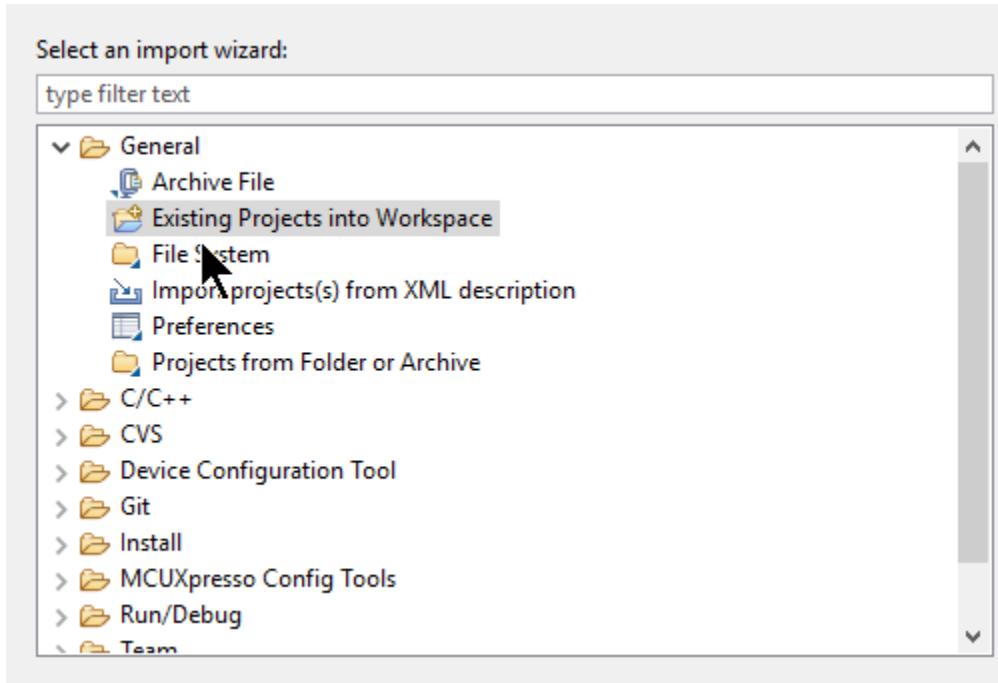


- First import the project generated by `scripts/create_cmake_projects.py`. We are going to use that workarea to build the examples.

Never select “Copy projects into workspace” for this CMake configuration.

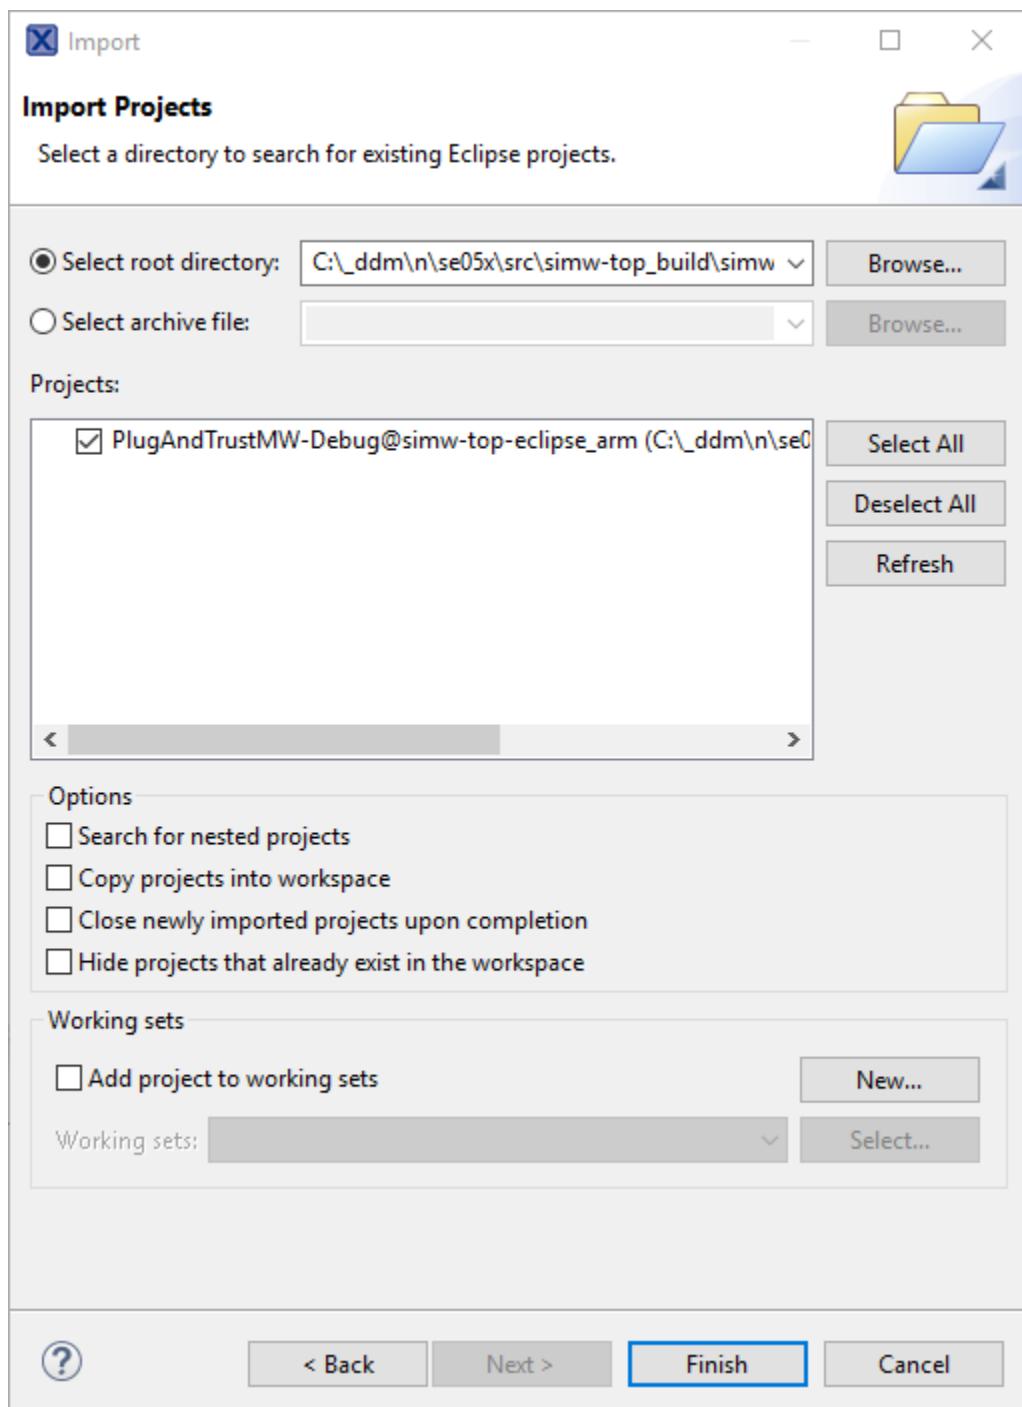


- Then import the project from “projects” directory. Import only the project for your board. In this case we import `cmake_project_XXXX`, where **XXXX** is the board name. This project is used to *debug* and *download* to the target. It’s a manually maintained project.

Never select “Copy projects into workspace” for this CMake configuration.

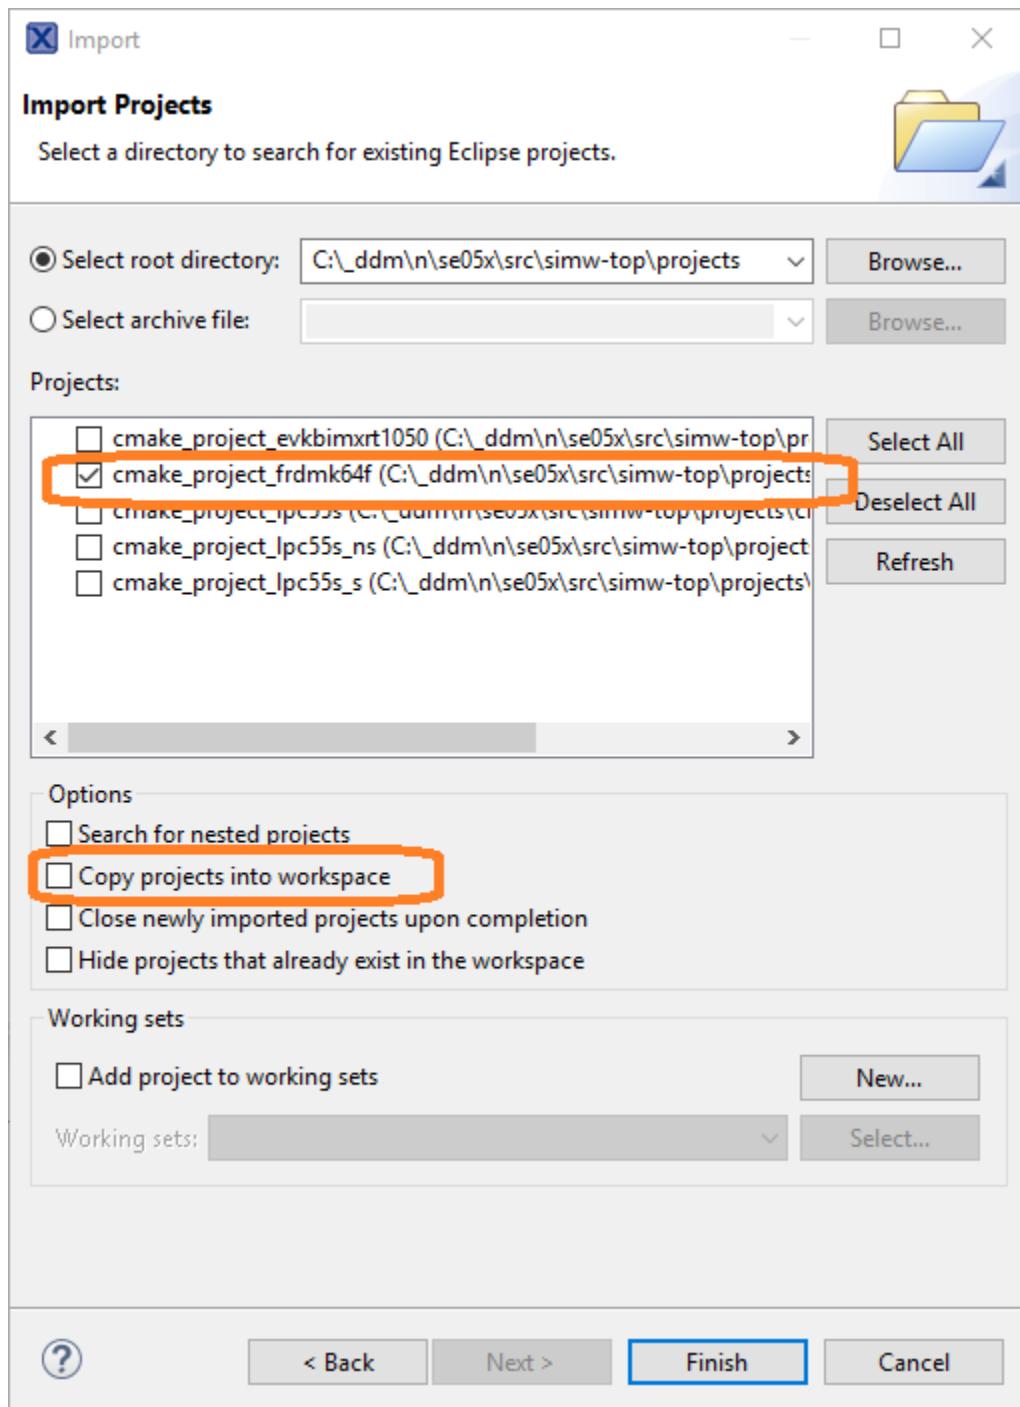

- You may have to run cmake's edit_cache to change the configuration of your example. e.g. choice of RTOS, Applet, Board, optimization level, etc.

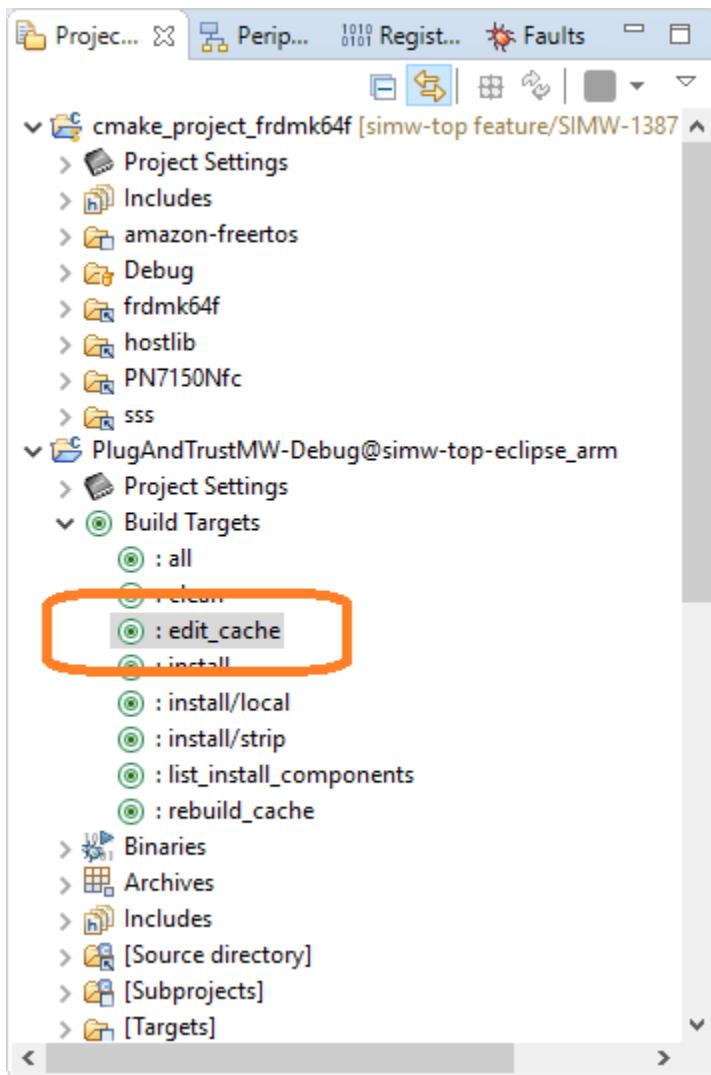

- You would mostly have to change the target that you want to build and download. Modify `cmake_project_XXXX/Debug/Makefile`.

As you can see, the default selection is `se05x_Minimal`.


You can run the help target of this project a shown in next image to see which projects are supported.

```

workspace1 - cmake_project_frdmk64f/Debug/Makefile - MCUXpresso IDE
File Edit Navigate Search Project ConfigTools Run FreeRTOS Window Help
Project Explorer Makefile
cmake_project_frdmk64f [simw-top feature/SIMW-926-plugandtrust-mw-documentation]
  Project Settings
    Associated SDK
    Libraries (and semihosting)
    MCU
    Memory
    Options
  Includes
  amazon-freertos
  Debug
    Makefile
  frdmk64f
  hostlib
  PN7150Nfc
1 # cmake_project_frdmk64f/Debug/Makefile
2
3 #Update these variables if needed
4 TOP_NAME=simw-top
5 BUILD_DIR= / / / ${TOP_NAME}_build/${TOP_NAME}-eclipse_arm
6 BUILD_TARGET=se05x_minimal
7
8 #...
9 a7x_utils
10#... ex_A71CHMain
11#... a7x_a71chMainTst
12#... a7x_vcom
13#... ex_common
14#... ex_ecc
15
16ifeq (help, ${ConfigName})
17BUILD_TARGET=help


```

- cmake_project_XXXX project's settings also supports helpful target to edit_cache or list supported projects by that configuration.

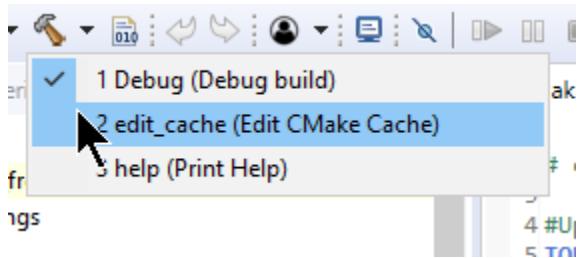


4.3.3 Running / Debugging example


- Click on Build to compile and generate the executables

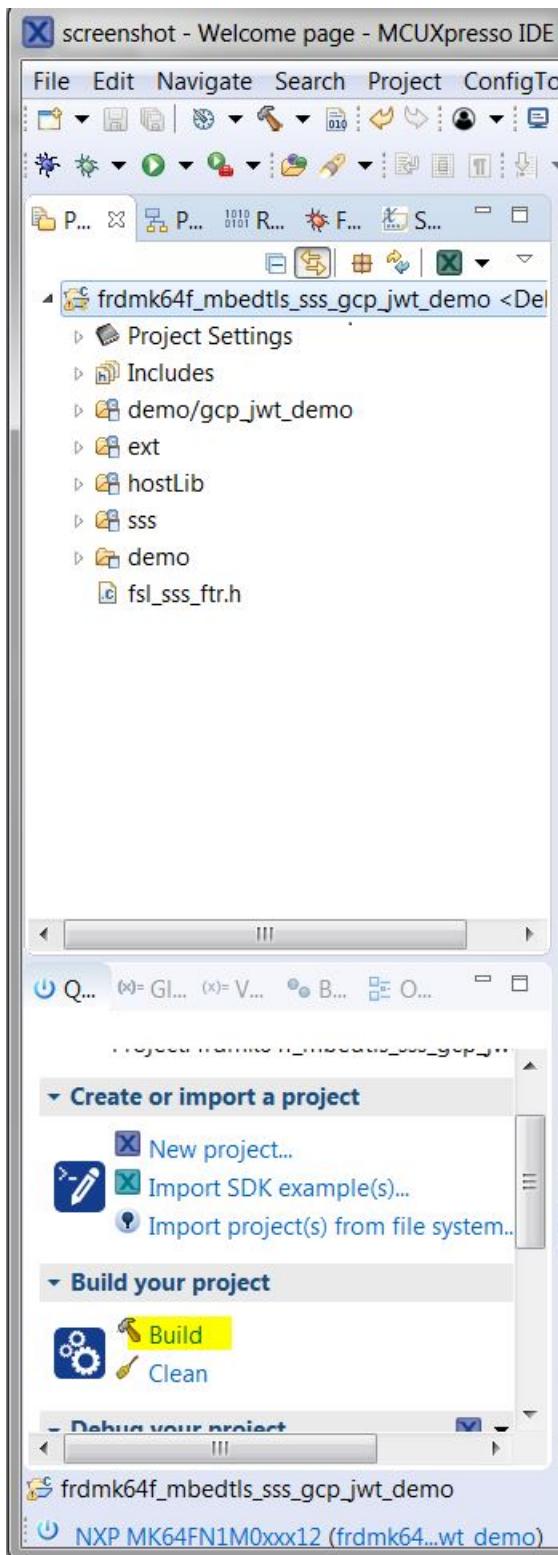


- Click on debug to program the binary into the device

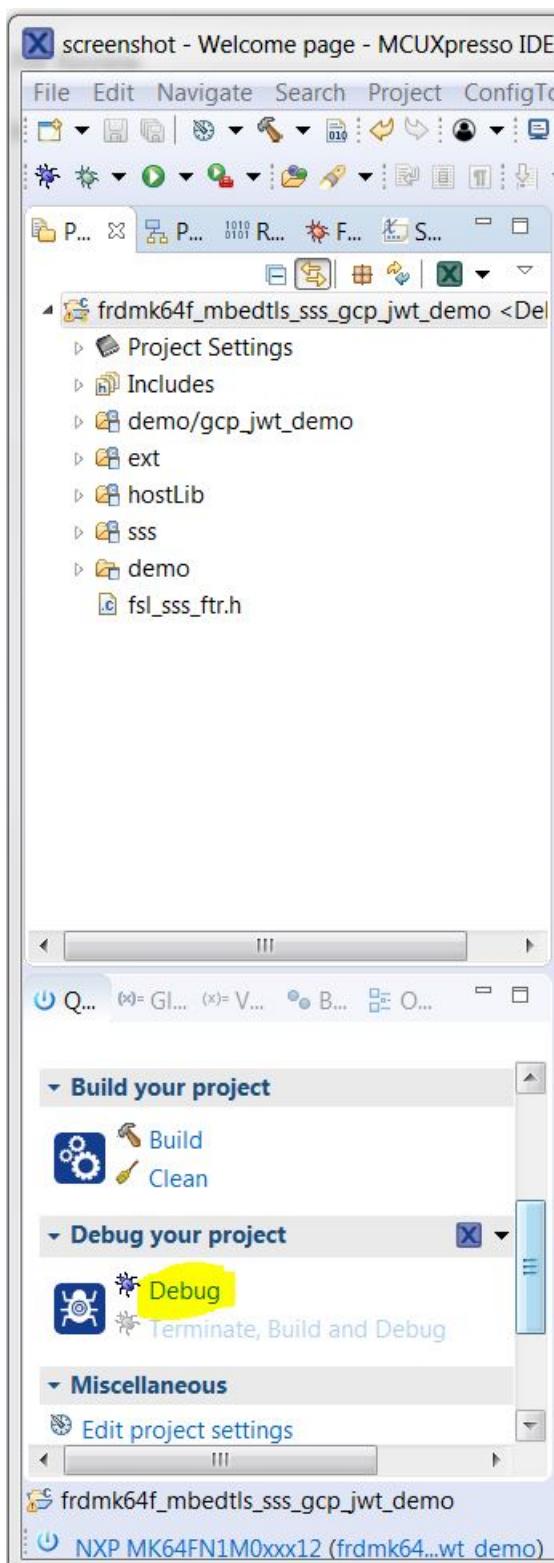

- Select J-Link OpenSDA and click on OK. For more details on OpenSDA, refer to <https://www.nxp.com/support/developer-resources/run-time-software/kinetis-developer-resources/ides-for-kinetis-mcus/opensda-serial-and-debug-adapter:OPENSDA>

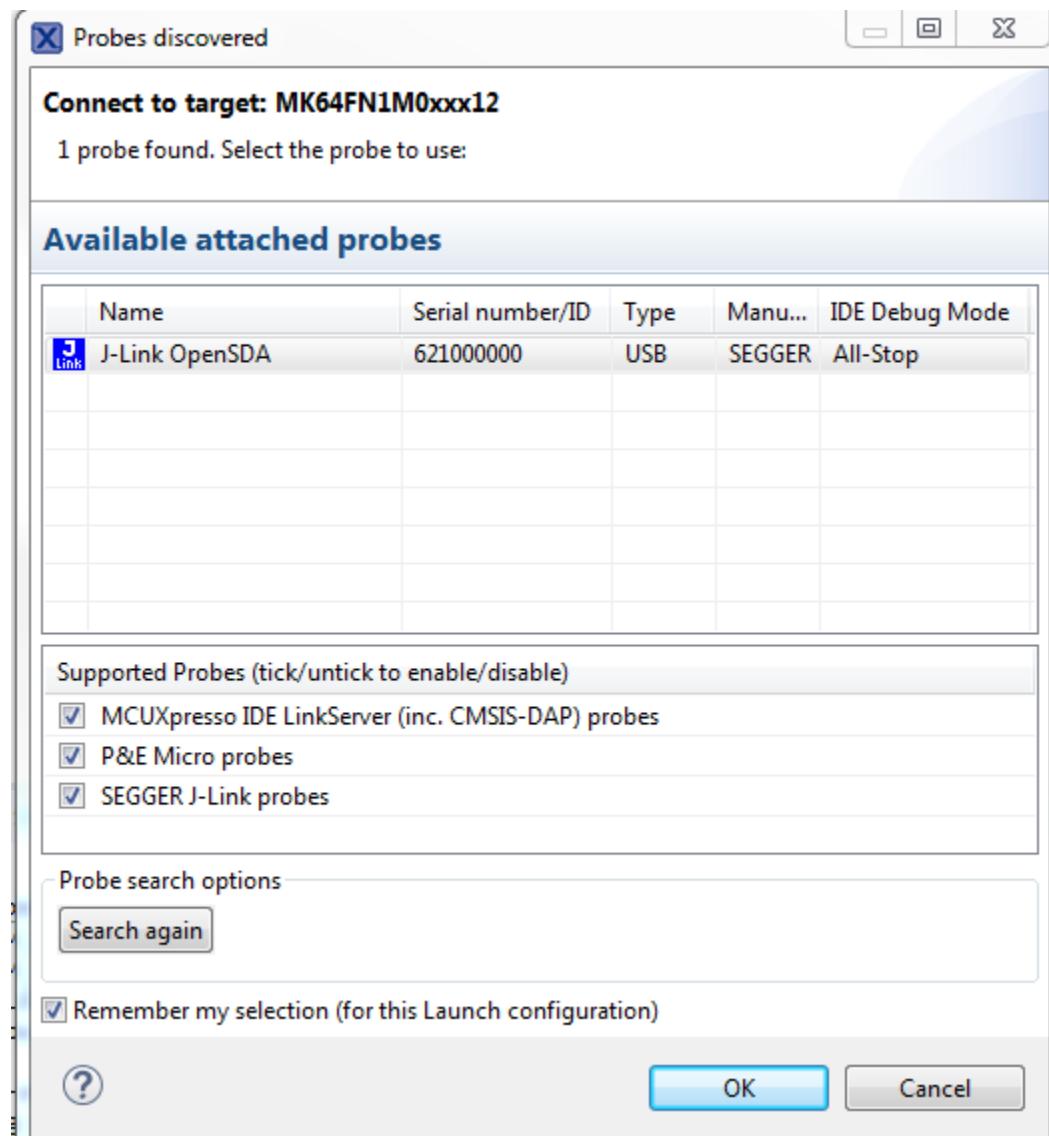

- Click on the Resume button to start program execution

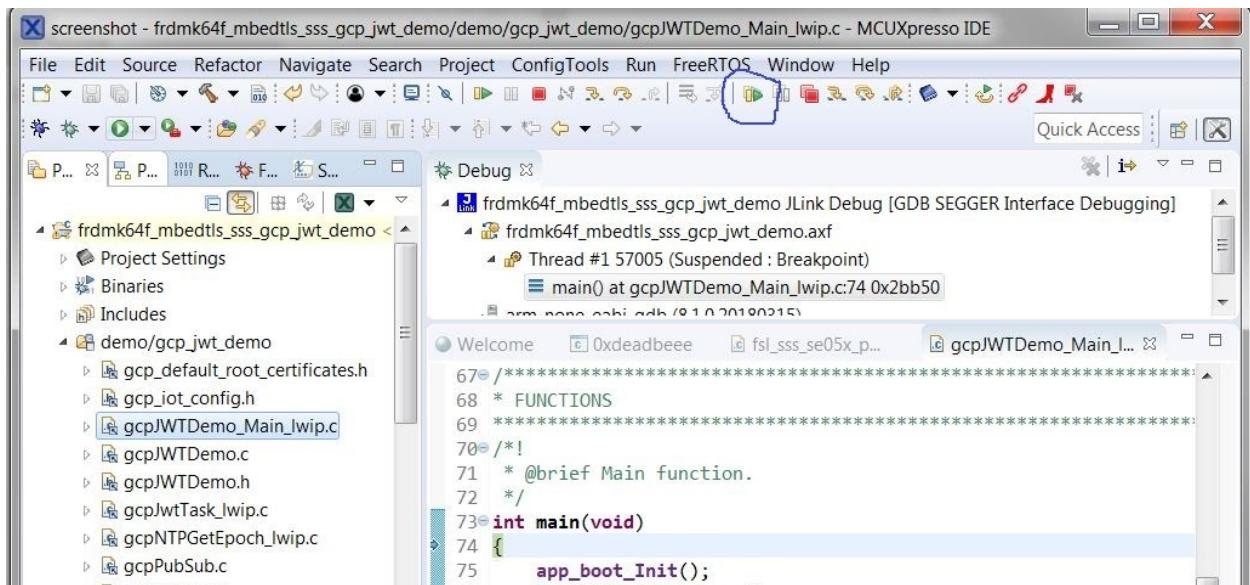

4.3.4 Logging on console

For UART, a serial terminal application(for e.g Tera Term) on PC for VCOM serial device needs to be configured as follows

- 115200 baud rate
- 8 data bits
- No parity
- One stop bit
- No flow control

Once the program execution begins, logs are printed on the terminal(e.g. Tera Term) indicating the status of execution and test results. The ATR and the various module versions are printed followed by a SELECT-DONE after which the respective test logs are printed.

4.4 i.MX Linux Build

4.4.1 Prerequisite

Linux should be running on e.g. the MCIMX8M-EVK or MCIMX6UL-EVK development board. Refer to [Setup i.MX 8Quad - MCIMX8M-EVK](#) for details on preparing the platform.

4.4.2 Build Instructions

- 1) Copy the plug and trust middleware package to the i.MX file system
- 2) Execute the below commands to build and install the se05x libraries on the system:

```
cd simw-top
python scripts/create_cmake_projects.py # invoke this only once
cd ../simw-top_build/imx_native_se050_t1oi2c
cmake --build .
make install
ldconfig /usr/local/lib
```

Default cmake options are shown below:

Applet	SE050_C
Host	iMXLinux
HostCrypto	OPENSSL
IOT	GCP
OpenSSL	1_1_1
RTOS	Default
SCP	None
SE05X_Auth	None
SMCOM	T1oI2C
WithCodeCoverage	OFF
WithNXPNFCRdLib	OFF
WithSSS_TestCounterPart	ON
WithSharedLIB	OFF
mbedTLS_ALT	None

To get the list of enabled cmake options, execute the following command from the build area:

```
cmake -L .
```

- 3) If required cmake options can be changed and libraries can be rebuilt and installed. Refer to [CMake](#)

```
cd simw-top_build/imx_native_se050_t1oi2c
ccmake .
```

ccmake (i.e. a text-ui to cmake) is not available by default on the Yocto distribution for i.MX.

An alternative approach to change cmake options is to set them on the command line.

Explicitly overruling cmake options (in this case changing SE05X_Auth to UserID):

```
cd simw-top_build/imx_native_se050_t1oi2c
cmake -DSE05X_Auth=UserID .
cmake --build .
```

An easier approach is to use the script `simw-top/scripts/cmake_options` to enable command line completion of the available cmake options. First source the convenience script (`simw-top/scripts/cmake_options`). In the fragment below the SW is built with the same SE05X_Auth option as above:

```
cd simw-top
source scripts/cmake_options.sh
cd simw-top_build/imx_native_se050_t1oi2c
echo ${do} # type double tab to enable command line completion hints
```

(continues on next page)

(continued from previous page)

```

${doApplet_A71CH_ON}           ${doHost_evkmimxrt1060_ON}
${doSE05X_Auth_AppletSCP03_ON} ${doSE05X_Auth_None_ON}
${doApplet_A71CL_ON}           ${doHost_frdmk64f_ON}

...
...
${doHost_Win10IoT_ON}          ${doSCP SCP03_SSS_ON}

cmake ${doSE05X_Auth_UserID_ON} .
cmake --build .

```

Note: The SW package also includes an install script (`scripts/imx/se05x_mw_install.sh`) that assists in installing the Plug&Trust MW on the iMX:

- Copy the Plug&Trust MW zip file into directory `/home/root/install`
- Copy the install script `scripts/imx/se05x_mw_install.sh` into directory `/home/root/install`
- Execute:

```

cd /home/root/install
chmod 755 se05x_mw_install.sh
./se05x_mw_install.sh <Plug&Trust>.zip

```

4.4.3 SSS Examples

Above build steps will also create a few examples that illustrate the usage of se05x. Location - `simw-top_build/imx_native_se050_t1oi2c/bin` A subset of these examples is installed (upon executing `make install`) in `/usr/local/bin`.


Refer to [Demo and Examples](#) for details on these examples and for running cloud/tls demo applications

4.5 Raspberry Pi Build

4.5.1 Prerequisite

Linux should be running on the Raspberry Pi development board, the release was tested with Raspbian Buster (4.19.75-v7l+)

4.5.2 Connecting SE05X with RaspberryPi

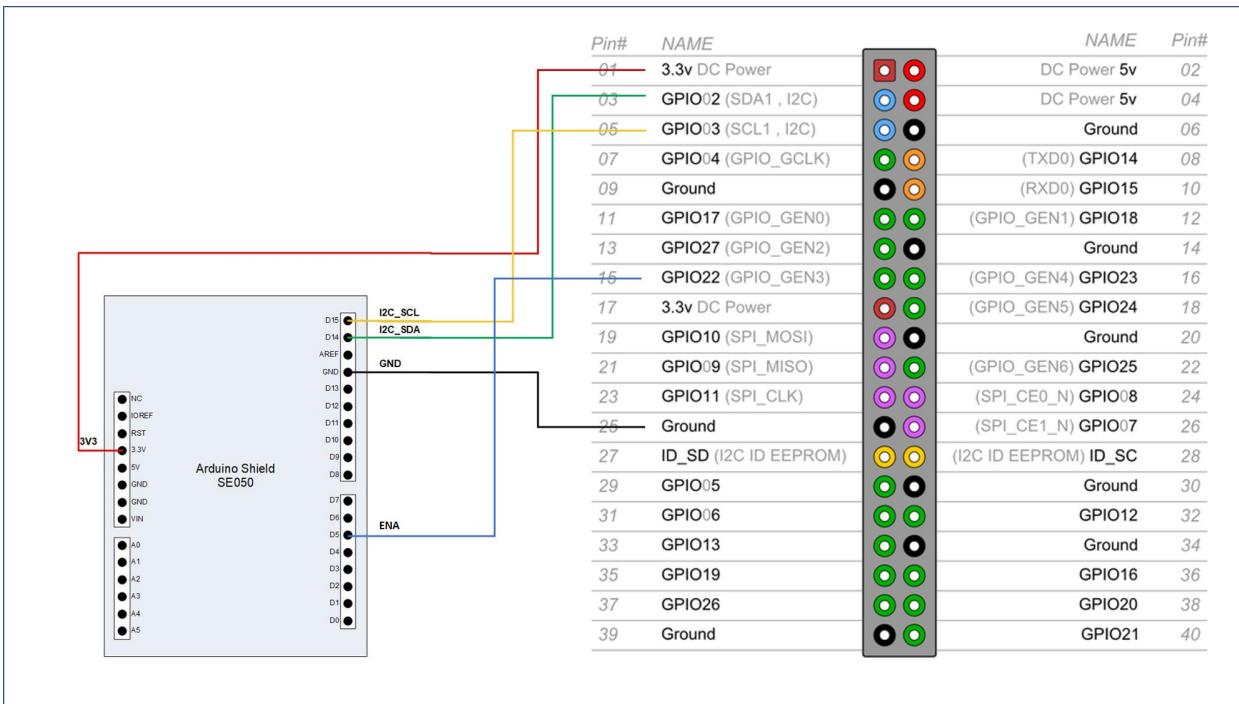

4.5.3 Enable Pin configuration for SE05X

Connect GPIO22 (P1_15) to enable pin of SE05X as indicated in the image above.

4.5.4 Build Instructions

- 1) Copy the Plug & Trust middleware package to the raspberry pi file system
- 2) Install required build tools, if the image does not have them already
- 3) Enable I2C if not yet enabled on your board. If `ls /sys/bus/i2c/devices` does not list `i2c-1`, I2C needs to be enabled for your board..
 - Run `sudo raspi-config`
 - Use the down arrow to select Interfacing Options.
 - Follow instructions and Enable I2C
- 4) Install extra build tools. e.g. on `2019-07-10-raspbian-buster-lite.img`, following packages are also required:

```
sudo apt-get install cmake cmake-curses-gui cmake-gui libssl-dev
```

- 5) Execute the below commands to build and install the se05x libraries to the system

```
cd simw-top
python scripts/create_cmake_projects.py
cd ../simw-top_build/raspberrypi_native_se050_t1oi2c
```

(continues on next page)

(continued from previous page)

```
cmake --build .
make install
ldconfig /usr/local/lib
```

Default cmake options are shown below:

Applet	SE050_C
CMAKE_BUILD_TYPE	Debug
CMAKE_INSTALL_PREFIX	/usr/local
Host	Raspbian
HostCrypto	OPENSSL
IOT	GCP
Log	Verbose
NXPInternal	ON
OpenSSL	1_1_1
RTOS	Default
SCP	None
SE05X_Auth	None
SMCOM	VCOM
SSS_HAVE_FIPS	0
WithCodeCoverage	OFF
WithNXPNFCRdLib	OFF
WithSSS_TestCounterPart	ON
WithSharedLIB	OFF
mbedTLS_ALT	None

- 6) If required cmake options can be changes and libraries can be rebuilt and installed. Refer [CMake](#)

```
cd simw-top_build/raspberrypi_native_se050_t1oi2c
# With Gui
cmake-gui .
```

The `cmake-gui` will bring up CMake GUI that can set up command with bring up the CMake UI using which options like logging level, etc. can be changed.

If you are connected to Raspberry PI over a command line terminal, (which does not have GUI), you can use `ccmake .` instead of `cmake-gui .`

4.5.5 SSS Examples

Above build steps will also build few sample examples for se05x test. Location: `simw-top_build/raspberrypi_native_se050_t1oi2c/bin`

Refer [Demo and Examples](#) for details on these examples and for running cloud/tls demo applications

4.6 CMake

CMake is an open-source, cross-platform family of tools designed to build, test and package software. CMake is used to control the software compilation process using simple platform and compiler independent configuration files, and generate native makefiles and workspaces that can be used in the compiler environment of your choice. (From <https://cmake.org/>). CMake can be downloaded from <https://cmake.org/download/>.

4.6.1 Reference Commands

We recommend to use out of the source build of Cmake and run it from other directory.

A reference command to compiling for SE050_C from Windows PC is:

```
cd <ROOT_DIR>
mkdir ..\build_se050
cd ..\build_se050
cmake ..\<ROOT_DIR> -DApplet=SE050_C -DHost=PCWindows
```

A helper python script `scripts\create_cmake_projects.py` is available as a part of the project.

Sample usage on Windows is:

```
call <ROOT_DIR>\scripts\env_setup.bat
python scripts\create_cmake_projects.py
```

Sample usage on Linux/POSIX is:

```
. <ROOT_DIR>/scripts/env_setup.sh
python scripts\create_cmake_projects.py
```

This will create a `<ROOT_DIR>_build` directory with some reference CMake projects.

Warning: It is recommended to keep `<ROOT_DIR>` to:

- A small path as much as possible. i.e. Closer to top most directory of the drive, instead of a deep long path.
- Is kept in a path that does not have spaces in it. This avoids issues faced with building some times.

Note: For sample paths of installation tools, please see `scripts\env_setup.bat` and `scripts\env_setup.sh`

4.6.2 CMake - Cross compiling

CMake can also be used for cross compiling for non native platforms. For that tool-chain files have to be used. As part of the Plug & Trust Middleware the following files are used.

Android `$NDK_ROOT/build/cmake/android.toolchain.cmake`

iMX6 `scripts/ToolchainFile_imx6.cmake`

FRDM K64F `scripts/armgcc_force_cpp.cmake`

`NDK_ROOT` is the environment variable set by Android Build system.

4.7 CMake Options

4.7.1 Applet

Applet

The Secure Element Applet

You can compile host library for different Applets listed below. Please note, some of these Applets may be for NXP Internal use only.

- DApplet=None: Compiling without any Applet Support
- DApplet=A71CH: A71CH (ECC)
- DApplet=SE05X_A: SE050 Type A (ECC)
- DApplet=SE05X_B: SE050 Type B (RSA)
- DApplet=SE05X_C: SE050 (Super set of A + B)

4.7.2 SE05X_Ver

SE05X_Ver

SE05X Applet version.

Selection of Applet version 03_XX enables SE050 features. Selection of Applet version 06_00 enables SE051 features.

- DSE05X_Ver=03_XX: SE050
- DSE05X_Ver=06_00: SE051

4.7.3 Host

Host

Host where the software stack is running

e.g. Windows, PC Linux, Embedded Linux, Kinetis like embedded platform

- DHost=Darwin: OS X / Macintosh
- DHost=PCLinux32: PC/Laptop Linux with 32bit libraries
- DHost=PCLinux64: PC/Laptop Linux with 64bit libraries
- DHost=PCWindows: PC/Laptop Windows
- DHost=Cygwin: Using Cygwin
- DHost=frdmk64f: Embedded Kinetis Freedom K64F
- DHost=evkmimxrt1060: Embedded Kinetis i.MX RT 1060
- DHost=lpcxppresso55s: Embedded LPCXpresso55s (No demarcation of secure/non-secure world)
- DHost=lpcxppresso55s_ns: Non Secure world of LPCXpresso55s
- DHost=lpcxppresso55s_s: Secure world of LPCXpresso55s
- DHost=iMXLinux: Embedded Linux on i.MX
- DHost=Raspbian: Embedded Linux on Raspberry PI

-DHost=Android: Android

4.7.4 SMCOM

SMCOM

Communication Interface

How the host library communicates to the Secure Element. This may be directly over an I2C interface on embedded platform. Or sometimes over Remote protocol like JRCP_V1 / JRCP_V2 / VCOM from PC.

-DSMCOM=None: Not using any Communication layer

-DSMCOM=JRCP_V2: Socket Interface New Implementation

-DSMCOM=JRCP_V1: Socket Interface Old Implementation. This is the interface used from Host PC when we run jrcpv1_server from the linux PC.

-DSMCOM=VCOM: Virtual COM Port

-DSMCOM=SCI2C: Smart Card I2C for A71CH and A71CH

-DSMCOM=T1oI2C: T=1 over I2C for SE050

-DSMCOM=PCSC: CCID PC/SC reader interface

4.7.5 HostCrypto

HostCrypto

Counterpart Crypto on Host

What is being used as a cryptographic library on the host. As of now only OpenSSL / mbedTLS is supported

-DHostCrypto=MBEDTLS: Use mbedTLS as host crypto

-DHostCrypto=MBEDCRYPTO: Use mbed-crypto as host crypto Required for ARM-PSA / TF-M

-DHostCrypto=OPENSSL: Use OpenSSL as host crypto

-DHostCrypto=User: User Implementation of Host Crypto e.g. Files at `sss/src/user/crypto` have low level AES/CMAC primitives. The files at `sss/src/user` use those primitives. This becomes an example for users with their own AES Implementation. This then becomes integration without mbedTLS/OpenSSL for SCP03 / AESKey.

Note: ECKey abstraction is not implemented/available yet.

-DHostCrypto=None: NO Host Crypto Note, this is unsecure and only provided for experimentation on platforms that do not have an mbedTLS PORT. Many *Feature Control* have to be disabled to have a valid build.

4.7.6 RTOS

RTOS

Choice of Operating system

Default would mean nothing special. i.e. Without any RTOS on embedded system, or default APIs on PC/Linux

- DRTOS=Default: No specific RTOS. Either bare metal on embedded system or native linux or Windows OS

- DRTOS=FreeRTOS: Free RTOS for embedded systems

4.7.7 mbedTLS_ALT

mbedTLS_ALT

ALT Engine implementation for mbedTLS

When set to None, mbedTLS would not use ALT Implementation to connect to / use Secure Element. This needs to be set to SSS for Cloud Demos over SSS APIs

- DmbedTLS_ALT=SSS: Use SSS Layer ALT implementation

- DmbedTLS_ALT=A71CH: Legacy implementation

- DmbedTLS_ALT=None: Not using any mbedTLS_ALT

When this is selected, cloud demos can not work with mbedTLS

4.7.8 SCP

SCP

Secure Channel Protocol

In case we enable secure channel to Secure Element, which interface to be used.

- DSCP=None

- DSCP=SCP03_SSS: Use SSS Layer for SCP. Used for SE050 family.

- DSCP=SCP03_HostCrypto: Use Host Crypto Layer for SCP03. Legacy implementation. Used for older demos of A71CH Family.

4.7.9 FIPS

FIPS

Enable or disable FIPS

This selection mostly impacts tests, and generally not the actual Middleware

- DFIPS=None: NO FIPS

- DFIPS=SE050: SE050 IC FIPS

4.7.10 SE05X_Auth

SE05X_Auth

SE050 Authentication

This settings is used by examples to connect using various options to authenticate with the Applet. The SE05X_Auth options can be changed for KSDK Demos and Examples. To change SE05X_Auth option follow below steps. Set flag SSS_HAVE_SCP_SCP03_SSS to 1 and Reset flag SSS_HAVE_SCP_NONE to 0. To change SE05X_Auth option other than None and PlatfSCP03, execute se05x_Delete_and_test_provision.exe in order to provision the Authentication Key. To change SE05X_Auth option to ECKey or ECKey_PlatformSCP03, Set additional flag SSS_HAVE_HOSTCRYPTO_ANY to 1.

- DSE05X_Auth=None: Use the default session (i.e. session less) login
- DSE05X_Auth=UserID: Do User Authentication with UserID
- DSE05X_Auth=PlatfSCP03: Use Platform SCP for connection to SE
- DSE05X_Auth=AESKey: Do User Authentication with AES Key** Earlier this was called AppletSCP03
- DSE05X_Auth=ECKey: Do User Authentication with EC Key** Earlier this was called FastSCP
- DSE05X_Auth=UserID_PlatformSCP03: UserID and PlatfSCP03
- DSE05X_Auth=AESKey_PlatformSCP03: AESKey and PlatfSCP03
- DSE05X_Auth=ECKey_PlatformSCP03: ECKey and PlatfSCP03

4.7.11 A71CH_AUTH

A71CH_AUTH

A71CH Authentication

This settings is used by SSS-API based examples to connect using either plain or authenticated to the A71CH.

- DA71CH_AUTH=None: Plain communication, not authenticated or encrypted
- DA71CH_AUTH=SCP03: SCP03 enabled

4.7.12 Log

Log

Logging

- DLog=Default: Default Logging
- DLog=Verbose: Very Verbose logging
- DLog=Silent: Totally silent logging

4.7.13 CMAKE_BUILD_TYPE

CMAKE_BUILD_TYPE

See https://cmake.org/cmake/help/latest/variable/CMAKE_BUILD_TYPE.html

For embedded builds, this choices sets optimization levels. For MSVC builds, build type is selected from IDE As well

-DCMAKE_BUILD_TYPE=Debug: For developer

-DCMAKE_BUILD_TYPE=Release: Optimization enabled and debug symbols removed

-DCMAKE_BUILD_TYPE=RelWithDebInfo: Optimization enabled but with debug symbols

-DCMAKE_BUILD_TYPE=: Empty Allowed

4.7.14 Feature Control

Using these options, you can enable/disable individual features.

See Section 3.8.4 *Using feature file to reduce code size* for details on it's usage and relevance.

SSSFTR_SE05X_AES

SE05X Secure Element : Symmetric AES

SSSFTR_SE05X_ECC

SE05X Secure Element : Elliptic Curve Cryptography

SSSFTR_SE05X_RSA

SE05X Secure Element : RSA

SSSFTR_SE05X_KEY_SET

SE05X Secure Element : KEY operations : SET Key

SSSFTR_SE05X_KEY_GET

SE05X Secure Element : KEY operations : GET Key

SSSFTR_SE05X_AuthECKey

SE05X Secure Element : Authenticate via ECKey

SSSFTR_SE05X_AuthSession

SE05X Secure Element : Allow creation of user/authenticated session.

If the intended deployment only uses Platform SCP Or it is a pure session less integration, this can save some code size.

SSSFTR_SE05X_CREATE_DELETE_CRYPTOOBJ

SE05X Secure Element : Allow creation/deletion of Crypto Objects

If disabled, new Crypto Objects are neither created and old/existing Crypto Objects are not deleted. It is assumed that during provisioning phase, the required Crypto Objects are pre-created or they are never going to be needed.

SSSFTR_SW_AES

Software : Symmetric AES

SSSFTR_SW_ECC

Software : Elliptic Curve Cryptography

SSSFTR_SW_RSA

Software : RSA

SSSFTR_SW_KEY_SET

Software : KEY operations : SET Key

SSSFTR_SW_KEY_GET

Software : KEY operations : GET Key

SSSFTR_SW_TESTCOUNTERPART

Software : Used as a test counterpart

e.g. Major part of the mebdTLS SSS layer is purely used for testing of Secure Element implementation, and can be avoided fully during many production scenarios.

4.7.15 Deprecated Defines

Keep and for time being for backwards compatibility. They will be removed in some future release.

- WithApplet_SE05X is renamed to SSS_HAVE_APPLET_SE05X_IOT
- WithApplet_SE050_A is renamed to SSS_HAVE_APPLET_SE05X_A
- WithApplet_SE050_B is renamed to SSS_HAVE_APPLET_SE05X_B
- WithApplet_SE050_C is renamed to SSS_HAVE_APPLET_SE05X_C
- SSS_HAVE_SE050_A is renamed to SSS_HAVE_APPLET_SE05X_A
- SSS_HAVE_SE050_B is renamed to SSS_HAVE_APPLET_SE05X_B
- SSS_HAVE_SE050_C is renamed to SSS_HAVE_APPLET_SE05X_C
- SSS_HAVE_SE05X is renamed to SSS_HAVE_APPLET_SE05X_IOT
- SSS_HAVE_SE is renamed to SSS_HAVE_APPLET
- SSS_HAVE_LOOPBACK is renamed to SSS_HAVE_APPLET_LOOPBACK
- SSS_HAVE_ALT is renamed to SSS_HAVEMBEDTLS_ALT
- WithApplet_None is renamed to SSS_HAVE_APPLET_NONE
- SSS_HAVE_None is renamed to SSS_HAVE_APPLET_NONE
- WithApplet_A71CH is renamed to SSS_HAVE_APPLET_A71CH
- SSS_HAVE_A71CH is renamed to SSS_HAVE_APPLET_A71CH
- WithApplet_A71CL is renamed to SSS_HAVE_APPLET_A71CL
- SSS_HAVE_A71CL is renamed to SSS_HAVE_APPLET_A71CL
- WithApplet_A71CH_SIM is renamed to SSS_HAVE_APPLET_A71CH_SIM
- SSS_HAVE_A71CH_SIM is renamed to SSS_HAVE_APPLET_A71CH_SIM
- WithApplet_SE05X_A is renamed to SSS_HAVE_APPLET_SE05X_A
- SSS_HAVE_SE05X_A is renamed to SSS_HAVE_APPLET_SE05X_A
- WithApplet_SE05X_B is renamed to SSS_HAVE_APPLET_SE05X_B
- SSS_HAVE_SE05X_B is renamed to SSS_HAVE_APPLET_SE05X_B
- WithApplet_SE05X_C is renamed to SSS_HAVE_APPLET_SE05X_C
- SSS_HAVE_SE05X_C is renamed to SSS_HAVE_APPLET_SE05X_C
- WithApplet_SE05X_L is renamed to SSS_HAVE_APPLET_SE05X_L
- SSS_HAVE_SE05X_L is renamed to SSS_HAVE_APPLET_SE05X_L
- WithApplet_LoopBack is renamed to SSS_HAVE_APPLET_LOOPBACK

- SSS_HAVE_LoopBack is renamed to SSS_HAVE_APPLET_LOOPBACK
- SSS_HAVEMBEDTLS is renamed to SSS_HAVE_HOSTCRYPTOMBEDTLS
- SSS_HAVEMBEDCRYPTO is renamed to SSS_HAVE_HOSTCRYPTOMBEDCRYPTO
- SSS_HAVEOPENSSL is renamed to SSS_HAVE_HOSTCRYPTOOPENSSL
- SSS_HAVEUSER is renamed to SSS_HAVE_HOSTCRYPTOUSER
- SSS_HAVENONE is renamed to SSS_HAVE_HOSTCRYPTONONE
- SSS_HAVEALT_SSS is renamed to SSS_HAVEMBEDTLSALT_SSS
- SSS_HAVEALT_A71CH is renamed to SSS_HAVEMBEDTLSALT_A71CH
- SSS_HAVEALTNONE is renamed to SSS_HAVEMBEDTLSALTNONE
- SSS_HAVESE05XAuthNone is renamed to SSS_HAVESE05XAUTHNONE
- SSS_HAVESE05XAuthUserID is renamed to SSS_HAVESE05XAUTHUSERID
- SSS_HAVESE05XAuthPlatfSCP03 is renamed to SSS_HAVESE05XAUTHPLATFSCP03
- SSS_HAVESE05XAuthAESKey is renamed to SSS_HAVESE05XAUTHAESKEY
- SSS_HAVESE05XAuthECKey is renamed to SSS_HAVESE05XAUTHECKEY
- SSS_HAVESE05XAuthUserIDPlatfSCP03 is renamed to SSS_HAVESE05XAUTHUSERIDPLATFSCP03
- SSS_HAVESE05XAuthAESKeyPlatfSCP03 is renamed to SSS_HAVESE05XAUTHAESKEYPLATFSCP03
- SSS_HAVESE05XAuthECKeyPlatfSCP03 is renamed to SSS_HAVESE05XAUTHECKEYPLATFSCP03

WithNXPNFCRdLib

- Compile in NXP NFC RdLib support
- Default is OFF
- Use NXP NFC RdLib. This is used mainly for RC663 + SAM Use Cases. Package available under NDA is needed to use this feature

WithOPCUA_open62541

- Compile With open62541 Support
- Default is OFF
- Compile with OPC UA. By default it is disabled from compilation.

WithSharedLIB

- Create and use shared libraries
- Default is OFF
- Create shared libraries. Applicable for Engine DLL and other use cases.

4.7.16 NXP Internal Options

These options are not supported outside NXP.

NXPInternal

- NXP Internal
- Default is OFF. (ON only within NXP)

Note: For deliveries outside NXP, this option is disabled.

WithCodeCoverage

- Compile with Code Coverage
- Default is OFF

4.7.17 Other Variables

WithExtCustomerCode

- Include code from ../customer
- Default is OFF
- Include code from external folder. This way, experimental code can be included in build from outside the simw-top repository.

SIMW_INSTALL_INC_DIR

- Location where library header files are installed for linux based targets. (Used for iMX Linux)
- Default location is </usr/local/>include/se05x

SIMW_INSTALL_SHARE_DIR

- Location where miscellaneous scripts get copied for linux based targets. (Used for iMX Linux)
- e.g. cmake_options.mak which has current cmake build settings.
- Default location is </usr/local/>share/se05x

CHAPTER
FIVE

DEMO AND EXAMPLES

Some of the examples below can be run on windows or raspberry-pi with optional connection string (VCOM or I2C address) as command line argument. When running examples on raspberry pi connection string of secured element should be passed in the format <i2c_port>:<i2c_addr>

Example Raspberry Pi:

```
./ex_ecc "/dev/i2c-1:0x48"
```

On Windows with VCOM:

```
ex_ecc.exe COM1
```

5.1 Demo List

5.1.1 DEMO List

Platforms List

KSDK Embedded platforms like FRDM K64F, i.MX RT1060, LPC55S

KSDK-CLOUD Embedded platforms like FRDM K64F, i.MX RT1060, LPC55S, that can connect to cloud.

LINUX Linux based platforms/systems like iMX6, iMX8, Raspberry Pi

PC Windows PC

ALL KSDK, LINUX, PC

SSS APIs Examples

Demo	Description	Platforms supported	SE supported	Authentication required
Section 5.2.1	<i>ECC Example</i> Inject ECC Key and use it for sign and verify operation	ALL	SE05X (A and C), A71CH	
Section 5.2.1	<i>RSA Example</i> Generate RSA key and use it for signin and verify operation	ALL	SE05X (B and C)	
Section 5.2.1	<i>Symmetric AES Example</i> Inject AES key, encrypt and decrypt data with it	ALL	SE05X	
Section 5.2.1	<i>HKDF Example</i> HMAC Key derivation operation based on the info and salt. Inject HMAC key into SE and derive a key using HMAC from the SE into the host keystore	ALL	SE05X, A71CH	
Section 5.2.1	<i>Message Digest Example</i> Message Digest hashing operation. Calculate SHA256 over data.	ALL	SE05X, A71CH	
Section 5.2.1	<i>HMAC Example</i> Inject HMAC key and calculate a HMAC	ALL	SE05X, A71CH	
Section 5.2.1	<i>ECDH Example</i> Inject ECC key into SE and derive a key using ECDH from the SE into the host keystore.	ALL	SE05X, A71CH	
Section 5.2.1	<i>ECDAE Example</i> Generate ECC Barreto-Naehrig key into SE and perform sign operation (ECDAE).	ALL	SE05X (A and C)	

Cloud connectivity Examples

Demo	Description	Platforms supported	SE supported	Authentication required
Section 5.3.1	AWS Demo for KSDK Connect to Amazon Web Services IoT Core	KSDK-CLOUD	SE05X, A71CH	
Section 5.3.2	AWS Demo for iMX Linux / Raspberry Pi Connect to Amazon Web Services	LINUX	SE05X, A71CH	
Section 5.3.3	GCP Demo for KSDK Connect to Google Cloud	KSDK-CLOUD	SE05X, A71CH	
Section 5.3.4	GCP Demo for iMX Linux / Raspberry Pi Connect to Google Cloud	LINUX	SE05X, A71CH	
Section 5.3.5	IBM Watson Demo for KSDK Connect to IBM Watson	KSDK-CLOUD	SE05X, A71CH	
Section 5.3.6	IBM Watson Demo for iMX Linux / Raspberry Pi Connect to IBM Watson	LINUX	SE05X, A71CH	
Section 5.3.7	Azure Demo for KSDK Connect to Microsoft Azure	KSDK-CLOUD	SE05X, A71CH	
Section 5.3.8	Azure Demo for iMX Linux / Raspberry Pi Connect to Microsoft Azure	LINUX	SE05X, A71CH	
Section 5.4.1	Greengrass Demo for Linux Connect as AWS Greengrass Core	Raspberry PI	SE05X	

OpenSSL Engine Examples

Demo	Description	Platforms supported	SE supported	Authentication required
Section 5.4.2	OpenSSL Engine: TLS Client example for iMX/Rpi3 Setting up a TLS Link using OpenSSL Engine	LINUX	SE05X, A71CH	

mbedTLS Examples

Demos regarding the mbedTLS ALT implementation. See [Introduction on mbedTLS ALT Implementation](#)

Demo	Description	Platforms supported	SE supported	Authentication required
SSL2 Client	Use extended SSL Client 2 & SSL Server 2 from mbedTLS	PC	SE05X, A71CH	
DTLS Client	Use extended dtls_client & dtls_server from mbedTLS	PC	SE05X, A71CH	

OPC UA Examples

Demo	Description	Platforms supported	SE supported	Authentication required
Section 5.5.1	<i>OPC UA (Open62541) Demo</i> OPC UA Server	PC, iMX6	SE05X	

PSA / TF-M Examples

Demo	Description	Platforms supported	Authentication required
Section 5.6.1	<i>PSA Non Secure Example</i> PSA Secure Non-secure example	LPC55S	

SE05X Specific Examples

Demo	Description	Platforms supported	SE supported	Authentication required
Section 5.7.1	<i>SE05X Minimal example</i> Showcase usage of SE05X low level APIs	ALL	SE05X	
Section 5.7.2	<i>SE05X Get Info example</i> Showcase Platform details of SE05X	ALL	SE05X	
Section 5.7.3	<i>APDU Player Demo</i> Send RAW APDUs to SE050	PC, LINUX	SE05X	None / PlatformSCP03
Section 5.7.4	<i>Using policies for secure objects</i> Showcase usage of policies	ALL	SE05X	
Section 5.7.5	<i>Get Certificate from the SE</i> Read the certificate from the SE and store it on the file system.	ALL (With mbedTLS Only)	SE05X	
Section 5.7.6	<i>SE05X Rotate PlatformSCP Keys Demo</i> Showcase Rotation of SE05X PlatformSCP03 Keys	ALL	SE05X	PlatformSCP03
Section 5.7.7	<i>I2C Master Example</i> Showcase usage of I2CM interface of SE050	ALL	SE05X	
Section 5.7.8	<i>SE05X WiFi KDF Example</i> Showcase usage of PBKDF	ALL	SE05X	
Section 5.7.9	<i>SE05X Export Transient objects</i> Export transient objects	PC, LINUX	SE05X	
Section 5.7.10	<i>SE05X Import Transient objects</i> Import transient objects	PC, LINUX	SE05X	
Section 5.7.11	<i>Import External Object Prepare</i> Create ImportExternlObject raw APDU	PC, LINUX	SE05X	ECKey
Section 5.7.12	<i>SE05X Mandate SCP example</i>	ALL	SE05X	
Section 5.7.13	<i>Read object with Attestation</i> Demonstrate how to read object with attestation	ALL	SE05X	
Section 5.7.14	<i>SE05X Transport Lock example</i> Show transport lock feature	PC, LINUX	SE05X	None / PlatformSCP03
Section 5.7.15	<i>SE05X Transport UnLock example</i> Show transport unlock feature	PC, LINUX	SE05X	None / PlatformSCP03
Section 5.7.16	<i>SE05X Timestamp</i> Demonstrate increment of timestamp inside SE	ALL	SE05X	
Section 5.7.17	<i>SE05X PCR example</i> Demonstrate PCR feature as Policy	ALL	SE05X	
Section 5.7.18	<i>Configuring Applet Features</i> Demonstrate how to configure applet features	PC, LINUX	SE05X	ECKey / ECKey-PlatformSCP03 (FEATURE ID)
Section 5.7.19	<i>Write APDU to buffer</i> Demonstrate how to write APDU to buffer	ALL	SE05X	
Section 5.7.20	<i>Inject Certificate into SE</i> Example to showcase injection of certificates into SE	ALL	SE05X	
Section 5.7.21	<i>SE05X Read State example</i> Example to Read the LockState, Restrict-	ALL	SE051	
142	Mode and PlatformSCPRequest of SE		Chapter 5. Demo and Examples	
Section 5.7.22	<i>SE05X Personalization Remove RSA Key Generation Module</i> Example to showcase to delete rsa key	ALL	SE051	

Examples that use OpenSSL

Demo	Description	Platforms supported	SE supported	Authentication required
Section 5.8.1	<i>Tool to create Reference key file</i> Native example to generate refKeys. (Only for NIST-P256 curve).	LINUX, PC	SE05X, A71CH	
Section 5.8.2	<i>Building a self-signed certificate</i> Create self signed certificates	LINUX, PC	SE05X	

NFC (DESFire) Examples

Demos that interact with DESFire card via RC663. These examples can be run from:

- From **KSDK** with RC663
- From PC with FRDM-K64F & RC663

Warning: These examples are only included in a separate MW package (including nxpnfcrdlib). Please contact your NXP FAE or sales for access

Demo	Description	Authentication required
Section 5.10.1	<i>MIFARE DESFire EV2 : Prepare Secure Element</i> Prepare/Provision SE050 with reference Keys. This example does not use RC663	
Section 5.10.2	<i>MIFARE DESFire EV2 : Prepare MDFEV2</i> Prepare/Provision DESFireEv2 with reference Keys. This example does not use SE050.	
Section 5.10.3	<i>MIFARE DESFire EV2 : Authentication</i> Authenticate MIFARE DESFire EV2 using SE050 & RC663	
Section 5.10.4	<i>MIFARE DESFire EV2 : Change Key</i> MIFARE DESFire EV2 Change Key using SE050 & RC663	
Section 5.10.5	<i>MIFARE DESFire EV2 : Diversified Change Key</i> MIFARE DESFire EV2 Diversified Change Key using SE050 & RC663	

Ease of Use Configuration Examples

Seps for using the Ease Of Use Configuration of SE050.

Number	Description
Section 5.11.1	<i>Ease of Use configuration - IBM Watson</i>
Section 5.11.2	<i>Ease of Use configuration - Google Cloud Platform</i>
Section 5.11.3	<i>Ease of Use configuration - Azure IoT Hub</i>
Section 5.11.4	<i>Ease of Use configuration - AWS IoT Console</i>

SEMS Demos

See [Applet](#). You need to compile with `-DSE05X_Ver=06_00 -DSE05X_Auth=None`

Demo	Description	Platforms supported	SE Supported
Section 5.12.1	SEMS Lite Agent Demo (sems_lite_ex_update)	ALL	SE051
Section 5.12.2	SEMS Lite CLI APP	PC, LINUX	SE051

LPC55S-PUF Based examples

Demo	Description	Platforms supported	SE supported	Authentication required
Section 5.13.1	Key Injection to PUF Example to demonstrate inject PlatformSCP keys into PUF	LPC55S	SE05X	
Section 5.13.2	Key Rotation using PUF Example to demonstrate PlatformSCP key rotation using PUF	LPC55S	SE05X	PlatformSCP03

5.2 SSS API Examples

5.2.1 SSS API Examples

ECC Example

This project demonstrates Elliptic Curve Cryptography sign and verify operation using SSS APIs

Refer - `simw-top/sss/ex/ecc/ex_sss_ecc.c`

Prerequisites

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))

About the Example

This example does a elliptic curve cryptography signing and verify operation.

It uses the following APIs and data types:

- `sss_asymmetric_context_init()`
- `kAlgorithm_SSS_SHA256` from `sss_algorithm_t`
- `kMode_SSS_Sign` from `sss_mode_t`
- `sss_asymmetric_sign_digest()`
- `kMode_SSS_Verify` from `sss_mode_t`
- `sss_asymmetric_verify_digest()`

Console output

If everything is successful, the output will be similar to:

```

App  :INFO :Running Elliptic Curve Cryptography Example ex_sss_ecc.c
App  :INFO :Do Signing
App  :INFO :digest (Len=32)
    48 65 6C 6C    6F 20 57 6F    72 6C 64 00    00 00 00 00
    00 00 00 00    00 00 00 00    00 00 00 00    00 00 00 00
App  :INFO :signature (Len=72)
    30 46 02 21    00 C8 4C 40    74 35 42 D7    37 64 03 D9
    B1 1B 9C 0B    44 50 DC 70    1E 92 07 92    78 BC 0E C5
    A4 07 FC 95    09 02 21 00    CA 70 02 36    13 65 47 72
    0F 60 78 59    EA 59 81 82    DF 80 FD 89    2D FC 3E 7D
    B2 FC 51 17    30 9B C4 15
App  :INFO :Signing Successful !!!
App  :INFO :Do Verify
App  :INFO :digest (Len=32)
    48 65 6C 6C    6F 20 57 6F    72 6C 64 00    00 00 00 00
    00 00 00 00    00 00 00 00    00 00 00 00    00 00 00 00
App  :INFO :signature (Len=72)
    30 46 02 21    00 C8 4C 40    74 35 42 D7    37 64 03 D9
    B1 1B 9C 0B    44 50 DC 70    1E 92 07 92    78 BC 0E C5
    A4 07 FC 95    09 02 21 00    CA 70 02 36    13 65 47 72
    0F 60 78 59    EA 59 81 82    DF 80 FD 89    2D FC 3E 7D
    B2 FC 51 17    30 9B C4 15
App  :INFO :Verification Successful !!!
App  :INFO :ex_sss_ecc Example Success !!!...
App  :INFO :ex_sss Finished

```

RSA Example

This project demonstrates RSA sign and verify operations using SSS APIs.

Refer - simw-top/sss/ex/rsa/ex_sss_rsa.c

Prerequisites

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)

About the Example

This example does a RSA signing and verify operation.

It uses the following APIs and data types:

- `sss_asymmetric_context_init()`
- `kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA256` from `sss_algorithm_t`
- `kMode_SSS_Sign` from `sss_mode_t`
- `kSSS_CipherType_RSA` from `:cpp:enumerator: sss_cipher_type_t`
- `sss_asymmetric_sign_digest()`
- `kMode_SSS_Verify` from `sss_mode_t`

- *sss_asymmetric_verify_digest()*

Note: This example tries to delete key first. Deletion would be successful, if the key already exists. Otherwise it would return an error message which is perfectly alright and the example could be successfully executed.

Console output

If everything is successful, the output will be similar to:

```

App :INFO :Running RSA Example ex_sss_rsa.c
sss :WARN :nxEnsure:'ret == SM_OK' failed. At Line:5612 Function:sss_se05x_TXn
sss :WARN :Could not delete Key id EF000046
App :INFO :Delete key succeeds only if key exists, ignore error message if any
App :INFO :Do Signing
App :INFO :digest (Len=32)
  00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F
  10 11 12 13 14 15 16 17 18 19 1A 1B 1C 1D 1E 1F
App :INFO :Signing successful !!!
App :INFO :signature (Len=512)
  60 64 F1 3B DE 72 F7 91 05 29 A4 1D AC 48 47 D6
  25 E6 D4 35 67 32 78 37 45 90 03 56 1E B4 97 F5
  2A 09 26 CE 9A 81 4E 24 07 31 1E B4 18 04 BD B8
  88 42 6F 95 C6 3A 8A 6F 09 7B 80 35 4A F6 1D 9F
  19 6F 99 66 F9 61 47 6E D0 52 8F 80 C5 E4 D3 F6
  A2 37 B0 3A 8B 34 32 A0 00 2D 0D B7 BA 10 19 C9
  58 EB 7D D0 7E E9 47 4E E1 E7 2C 96 44 0E D5 BF
  4A F4 16 4A 8E BB C0 1C 8F A5 AD C4 64 3A 13 89
  B0 08 03 00 19 1C BD 7C E1 4A 69 AC C7 1D B2 A9
  DB 80 68 34 EA B9 96 1C D8 DE F0 E2 09 CA A0 4D
  35 38 6B FC 88 A3 A2 B8 E9 15 18 7B 5D 81 B4 C6
  53 2D 92 12 5E 7D 84 D1 7A 2E C1 C4 72 6D 5F 29
  95 4E 21 EE 47 AC 29 80 4E D4 03 DE 98 1B 6C 82
  55 D2 61 47 29 CD D1 AE B8 C4 89 85 89 FB 3E BE
  20 30 BE A7 AB DA 5B 42 1C 10 F8 3B 5E 8A C9 23
  4F DE 8F 3A 01 D1 ED 4C 79 CF D8 2A 47 4D FD 7E
  12 20 D4 B1 49 4A 27 A9 3A 72 34 B7 35 39 4F 87
  0D C8 C2 D1 91 E7 93 E5 54 D3 1B 0D D6 30 97 CD
  56 33 9F 54 03 43 E9 44 0A 22 4D D2 27 5C 42 BD
  82 40 F7 D8 83 3E 10 A8 31 43 A2 0D 8A 1F 27 FE
  66 7A 12 63 2F DC F5 9F 6C 83 B1 C3 AC F1 A9 2F
  96 EE 94 00 5C 57 9D AB D3 3F A0 EB F0 6B E1 33
  95 AB 14 5D 07 87 C0 14 18 70 51 A2 EF 0E 1B C4
  92 07 CC 18 3F 0F 48 80 FA 85 55 BD B9 86 F3 C2
  DC 61 84 A6 84 19 4E 9D 60 99 2A A9 84 43 38 42
  08 61 5E 53 43 06 C4 BB 72 42 8D 41 A3 3D 64 3D
  22 2B 11 1D 13 88 1D CF 03 9C C2 C7 71 DB 4A FA
  58 B1 AF 13 8C 86 55 16 3E 15 BB EF CD 2F EC CD
  A8 CA F7 7C E9 B4 1B ED FE A1 89 A3 AF 03 7B 38
  2F B5 AE 30 0F 88 41 D4 2A E1 F8 4E 25 88 4C B2
  2B FD 6A 98 60 B9 F8 A9 A3 5E A2 68 A1 C9 11 F1
  BB 06 67 2F 8E B0 5A A6 55 C7 1E 3A FC 71 CC 1A
App :INFO :Do Verification
App :INFO :Verification successful !!!
App :INFO :ex_sss_RSA Example Success !!!...
App :INFO :ex_sss Finished

```

Symmetric AES Example

This project demonstrates symmetric cryptography - AES encryption and decryption operations.

Refer - `simw-top/sss/ex/symmetric/ex_sss_symmetric.c`

Prerequisites

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)

About the Example

This example does a symmetric cryptography AES encryption and decryption operation.

It uses the following APIs and data types:

- `sss_symmetric_context_init()`
- `kAlgorithm_SSS_AES_CBC` from `sss_algorithm_t`
- `kSSS_CipherType_AES` from `sss_cipher_type_t`
- `kMode_SSS_Encrypt` from `sss_mode_t`
- `sss_cipher_one_go()`
- `kMode_SSS_Decrypt` from `sss_mode_t`

Console output

If everything is successful, the output will be similar to:

```
App :INFO :Running AES symmetric Example ex_sss_symmetric.c
App :INFO :Do Encryption
App :INFO :iv (Len=16)
 00 00 00 00    00 00 00 00    00 00 00 00    00 00 00 00
App :INFO :srcData (Len=16)
 48 45 4C 4C    4F 48 45 4C    4C 4F 48 45    4C 4C 4F 31
App :INFO :Encryption successful !!!
App :INFO :encrypted data (Len=16)
 32 A6 04 88    C5 B3 FF 40    50 AF 56 A5    68 AE D1 05
App :INFO :Do Decryption
App :INFO :iv (Len=16)
 00 00 00 00    00 00 00 00    00 00 00 00    00 00 00 00
App :INFO :Encrypted data (Len=16)
 32 A6 04 88    C5 B3 FF 40    50 AF 56 A5    68 AE D1 05
App :INFO :Decryption successful !!!
App :INFO :decrypted data (Len=16)
 48 45 4C 4C    4F 48 45 4C    4C 4F 48 45    4C 4C 4F 31
App :INFO :ex_sss_symmetric Example Success !!!!.
App :INFO :ex_sss Finished
```

HKDF Example

This project demonstrates an HMAC Key derivation operation based on info and salt using SSS APIs.

Refer - simw-top/sss/ex/hkdf/ex_sss_hkdf.c

Prerequisites

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)

About the Example

This example does a HMAC Key derivation operation based on the info and salt.

It uses the following APIs and data types:

- `sss_derive_key_context_init()`
- `kAlgorithm_SSS_HMAC_SHA256` from `sss_algorithm_t`
- `kMode_SSS_ComputeSharedSecret` from `sss_mode_t`
- `kSSS_CipherType_HMAC` from `sss_cipher_type_t`
- `sss_derive_key_go()`

Console output

If everything is successful, the output will be similar to:

```
App :INFO :Running HMAC Key Derivation Function Example ex_sss_hkdf.c
App :INFO :Do Key Derivation
App :INFO :salt (Len=32)
AA 1A 2A E3      B2 76 15 4D      67 F9 D8 4C      B9 35 54 56
BB 1B 2B 03      04 05 06 07      08 09 0A 0B      0C 0D 0E 0F
App :INFO :info (Len=192)
00 01 02 03      04 05 06 07      08 09 0A 0B      0C 0D 0E 0F
10 11 12 13      14 15 16 17      18 19 1A 1B      1C 1D 1E 1F
20 21 22 23      24 25 26 27      28 29 2A 2B      2C 2D 2E 2F
30 31 32 33      34 35 36 37      38 39 3A 3B      3C 3D 3E 3F
40 41 42 43      44 45 46 47      48 49 4A 4B      4C 4D 4E 4F
50 51 52 53      54 55 56 57      58 59 5A 5B      5C 5D 5E 5F
60 61 62 63      64 65 66 67      68 69 6A 6B      6C 6D 6E 6F
70 71 72 73      74 75 76 77      78 79 7A 7B      7C 7D 7E 7F
80 81 82 83      84 85 86 87      88 89 8A 8B      8C 8D 8E 8F
90 91 92 93      94 95 96 97      98 99 9A 9B      9C 9D 9E 9F
A0 A1 A2 A3      A4 A5 A6 A7      A8 A9 AA AB      AC AD AE AF
B0 B1 B2 B3      B4 B5 B6 B7      B8 B9 BA BB      BC BD BE BF
App :INFO : Key Derivation successful !!!
App :INFO :hkdfOutput (Len=128)
6E 69 25 DB      1D D7 37 64      3C 9F F5 02      0D 54 B1 0A
97 FF 80 78      36 A6 86 80      6D B5 77 5C      89 DD 61 53
E3 69 58 67      6B 41 EB 4A      8B 10 01 F6      BB 67 7C A4
26 F7 87 DE      03 A1 18 B1      D3 ED 11 38      CA 0A AA 02
0A C2 A0 B1      65 7D 80 83      23 7C 8B EA      58 EE E4 DF
DF 17 49 59      8B 66 62 7F      C7 EE 63 87      5A 1A F4 C3
```

(continues on next page)

(continued from previous page)

BB 97 3F 35	47 06 4A EA	15 DA 15 21	5B 87 DA AA
81 1F 1F B0	D7 95 4E F4	25 5D C6 75	34 2B 0C 40
App :INFO :ex_sss_hkdf Example Success !!!...			
App :INFO :ex_sss Finished			

Message Digest Example

This project demonstrates a Message Digest / hashing operation using SSS APIs.

Refer - simw-top/sss/ex/md/ex_sss_md.c

Prerequisites

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)

About the Example

This example does a Message Digest hashing operation.

It uses the following APIs and data types:

- *sss_digest_context_init()*
- *kAlgorithm_SSS_SHA1* from *sss_algorithm_t*
- *kMode_SSS_Digest* from *sss_mode_t*
- *sss_digest_one_go()*

Console output

If everything is successful, the output will be similar to:

App :INFO :Running Message Digest Example ex_sss_md.c			
App :INFO :Do Digest			
App :INFO :input (Len=10)			
48 65 6C 6C 6F 57 6F 72 6C 64			
App :INFO :Message Digest successful !!!			
App :INFO :digest (Len=32)			
87 2E 4E 50 CE 99 90 D8 B0 41 33 0C 47 C9 DD D1			
1B EC 6B 50 3A E9 38 6A 99 DA 85 84 E9 BB 12 C4			
App :INFO :ex_sss_digest Example Success !!!...			
App :INFO :ex_sss Finished			

HMAC Example

This project demonstrates a HMAC operation on a message using SSS APIs.

Refer - `simw-top/sss/ex/hmac/ex_sss_hmac.c`

Prerequisites

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)

About the Example

This example does a HMAC operation on input data.

It uses the following APIs and data types:

- `sss_mac_context_init()`
- `kAlgorithm_SSS_HMAC_SHA256` from `sss_algorithm_t`
- `kMode_SSS_Mac` from `sss_mode_t`
- `sss_mac_one_go()`

Console output

If everything is successful, the output will be similar to:

```
App :INFO :Running HMAC (SHA256) Example ex_sss_hmac.c
App :INFO :Do HMAC
App :INFO :input (Len=10)
48 65 6C 6C      6F 57 6F 72      6C 64
App :INFO :hmac key (Len=16)
48 65 6C 6C      6F 48 65 6C      6C 6F 48 65      6C 6C 6F 48
App :INFO :HMAC (SHA256) successful !!!
App :INFO :hmac (Len=32)
68 7A 26 95      49 67 9D 6E      FA 11 19 5E      96 CB BA C2
6B 50 A5 09      10 8A D1 48      B5 FC A0 94      2C BD 10 21
App :INFO :ex_sss_hmac Example Success !!!...
App :INFO :ex_sss Finished
```

ECDH Example

This project demonstrates generating a ECDH key using SSS APIs.

Refer - `simw-top/sss/ex/ecdh/ex_sss_ecdh.c`

Prerequisites

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))

About the Example

This example generates a ECDH key.

It uses the following APIs and data types:

- `sss_derive_key_context_init()`
- `kAlgorithm_SSS_ECDH` from `sss_algorithm_t`
- `kMode_SSS_ComputeSharedSecret` from `sss_mode_t`
- `sss_derive_key_dh()`

Console output

If everything is successful, the output will be similar to:

```
App :INFO :Running ECDH Example ex_sss_ecdh.c
App :INFO :ECDH successful !!!
App :INFO :ECDH derive Key (Len=32)
      C2 EA 1C 13    7D 30 F7 DA    65 1E B3 DB    7A F1 CF 42
      DF 38 B2 E6    22 41 2B 5B    BB DC F5 10    8E D5 69 CB
App :INFO :ex_sss_ecdh Example Success !!!...
App :INFO :ex_sss Finished
```

ECDA Example

This project demonstrates Elliptic Curve Cryptography ECDA sign operation using SSS APIs.

Refer - `simw-top/sss/ex/ecdaa/ex_sss_ecdaa.c`

Prerequisites

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))

About the Example

This example does a elliptic curve cryptography signing and verify operation.

It uses the following APIs and data types:

- `sss_asymmetric_context_init()`
- `kAlgorithm_SSS_ECDA` from `sss_algorithm_t`
- `kMode_SSS_Sign` from `sss_mode_t`
- `sss_asymmetric_sign_digest()`

Console output

If everything is successful, the output will be similar to:

```
App :INFO :Running Elliptic Curve Cryptography Example ex_sss_ecdaa.c
App :INFO :Do Signing
App :INFO :digest (Len=32)
    00 01 02 03    04 05 06 07    08 09 0A 0B    0C 0D 0E 0F
    10 11 12 13    14 15 16 17    18 19 1A 1B    1C 1D 1E 1F
App :INFO :signature (Len=70)
    30 44 02 20    00 01 02 03    04 05 06 07    08 09 0A 0B
    0C 0D 0E 0F    10 11 12 13    14 15 16 17    18 19 1A 1B
    1C 1D 1E 1F    02 20 C7 2B    67 E4 09 FA    22 0E E5 9C
    22 3B CB 2C    E2 9C 78 76    DB 1D F3 C3    4B E4 83 D4
    42 79 92 50    74 39
App :INFO :Signing Successful !!!
App :INFO :ex_sss_ecdaa Example Success !!!...
App :INFO :ex_sss Finished
```

ECC NIST256 Key Attestation Example

This project demonstrates ecc nist256 key attestation and verification with another ecc nist256 key using SSS API

Refer - simw-top/sss/ex/attest_ecc/ex_sss_ecc_attest.c

Prerequisites

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)

About the Example

This example reads a nist256 public key with attestation.

It uses the following APIs and data types:

- *sss_key_store_set_key()*
- *sss_key_store_generate_key()*
- *sss_se05x_key_store_get_key_attst()*
- *kAlgorithm_SSS_ECDSA_SHA256* from *sss_algorithm_t*
- *kMode_SSS_Verify* from *sss_mode_t*
- *sss_asymmetric_verify_digest()*

Console output

If everything is successful, the output will be similar to:

ECC MONTGOMERY-25519 Key Attestation Example

This project demonstrates ecc montgomery25519 key attestation and verification with ecc nist256 key using SSS API. Signing on montgomery public key is done with key in the big endian format inside secure element.

Refer - `simw-top/sss/ex/attest_mont/ex_sss_mont_attest.c`

Note: For twisted edward curve and montgomery 448 curve also the attestation signing is done with public key in big endian format.

Prerequisites

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)

About the Example

This example reads a montgomery-25519 public key with attestation.

It uses the following APIs and data types:

- `sss_key_store_set_key()`
- `sss_key_store_generate_key()`
- `sss_se05x_key_store_get_key_attst()`
- `kAlgorithm_SSS_ECDSA_SHA256` from `sss_algorithm_t`
- `kMode_SSS_Verify` from `sss_mode_t`
- `sss_asymmetric_verify_digest()`

Console output

If everything is successful, the output will be similar to:

5.3 Cloud Demos

5.3.1 AWS Demo for KSDK

This demo demonstrates connection to AWS IoT Console using pre-provisioned device credentials and publish/subscribe procedure using MQTT.

Prerequisites

- Active AWS account
- MCUXpresso installed (for running aws demo on k64)
- Any Serial communicator
- Flash VCOM binary on the device. VCOM binary can found under <PROJECT>binaries folder.
- Refer to [CLI Tool](#) for ssscli tool setup

Using WiFi with LPC55S

WiFi shield Silex-2401 is supported with LPCS55S. Mount the WiFi shield on to the arduino stackable headers.

Creating a device on AWS account

TO BE UPDATED,

Creating and updating device keys and certificates to SE

- 1) Complete [Section 9.3 Steps needed before running ssscli tool](#)
- 2) Check the vcom port number
- 3) To create certificates on windows and provision, go to simw-top/pycli directory and call:

```
call venv\Scripts\activate.bat
cd Provisioning
python GenerateAWSCredentials.py <COM_PORT>
python ResetAndUpdate_AWS.py <COM_PORT>
```

- 4) Certificates and Keys are generated at simw-top/pycli/Provisioning/aws

Running the Demo

- 1) Open frdmk64f_mbedtls_sss_aws_demo project found under <PROJECT>projects in MCUXPRESSO IDE
- 2) Open a serial terminal on PC for OpenSDA serial device with these settings:

```
- 115200 baud rate
- 8 data bits
- No parity
- One stop bit
- No flow control
- change Setup->Terminal->New-line->Receive->AUTO
```

- 3) Connect the boards's RJ45 to network with Internet access (IP address to the board is assigned by the DHCP server). Make sure the connection on port 8883 is not blocked.
- 4) Download the program to the target board.
- 5) Either press the reset button on your board or launch the debugger in your IDE to begin running the demo.
- 6) The BLUE LED is turned ON during boot
- 7) Persistent RED LED ON indicates error

- 8) First time during connection, the device certificate needs to be
 - Activated
 - Attached with a policy that allows usage of this certificate
- 9) All lights off along with the following message indicates readiness to subscribe messages from AWS:

```
Subscribing...
-->sleep
-->sleep
Publish done
```

In AWS IOT shadow, the following indicates the state of the LED:

```
{
  "desired": {
    "COLOR": "RED",
    "MODE": "OFF"
  }
}
```

MODE can be ON or OFF and COLOR can be RED, GREEN or BLUE

5.3.2 AWS Demo for iMX Linux / RaspberryPi

This demo demonstrates connection to AWS IoT Console using pre-provisioned device credentials and publish/subscribe procedure using MQTT.

Prerequisites

- AWS account
- SD Card image with SE050 Middleware pre-installed. The application is built on the iMX platform.
- IMX6UL-EVK platform or Raspberry pi connected to the Internet

Preparing the credentials and Provisioning the secure element

Use ssscli tool from iMX/Rpi platform

- 1) Complete Section 9.3 *Steps needed before running ssscli tool*
- 2) To create certificates on imx and Raspberry Pi, call:

```
cd simw-top/pycli/Provisioning/
python3 GenerateAWSCredentials.py
python3 ResetAndUpdate_AWS.py
```

- 3) Certificates and Keys are generated at simw-top/pycli/Provisioning/aws

Build the OpenSSL engine [Optional]

Note: This step is optional in case you are using a prepared SD card image from NXP.

The OpenSSL engine uses the sss abstraction layer to access the crypto services of the secure element, the implementation remains dependent on the secure element attached. The following illustrates compiling the OpenSSL engine for SE050 connected over I2C.

```
cd simw-top
python scripts/create_cmake_projects.py
cd ../simw-top_build/imx_native_se050_t1oi2c
cmake --build .
make install
ldconfig /usr/local/lib
```

Note: Replace imx_native_se050_t1oi2c with raspbian_native_se050_t1oi2c when building for Raspberry Pi.

Run the example

- 1) Clone the Code

```
cd /simw-top/demos/linux/aws/
git clone https://github.com/aws/aws-iot-device-sdk-cpp.git
```

Note: If curl is not installed - run sudo apt-get install libcurl4-openssl-dev

- 1) Modify the CMakeLists.txt file under samples/PubSub so it ensures OPENSSL_LOAD_CONF is defined (see excerpt below):

```
if (UNIX AND NOT APPLE)
    ADD_DEFINITIONS (-DOPENSSL_LOAD_CONF)
    # Prefer pthread if found
    set (THREADS_PREFER_PTHREAD_FLAG ON)
    set (CUSTOM_COMPILER_FLAGS "-fno-exceptions -Wall -Werror")
elseif (APPLE)
    set (CUSTOM_COMPILER_FLAGS "-fno-exceptions -Wall -Werror")
elseif (WIN32)
    set (CUSTOM_COMPILER_FLAGS "/W4")
endif ()
```

- 1) Use ‘buildScript.sh’ script at simw-top/demos/linux/aws/ to build the mqtt application for aws call:

```
./buildScript.sh
```

- 1) **Adapt the PubSub example specific configuration file so that it refers to the reference key and the device certificate.**

- Update the endpoint to match your AWS account
- Ensure the AmazonRootCA1.pem certificate is in place (it is used by the iMX/rpi to validate the AWS IoT counterpart)

- Update the configuration file (/simw-top/demos/linux/aws/aws-iot-device-sdk-cpp/build/bin/config/SampleConfig.json) with endpoint, device_certificate_relative_path, device_private_key_relative_path (Ensure the value for “endpoint” matches your setup, you must replace “xxxxiukfoyyyy-ats.iot.eu-central-1.amazonaws.com”)
- Sample Json file

```
{
  "endpoint": "xxxxiukfoyyyy-ats.iot.eu-central-1.amazonaws.com",
  "mqtt_port": 8883,
  "https_port": 443,
  "greengrass_discovery_port": 8443,
  "root_ca_relative_path": "certs/AmazonRootCA1.pem",
  "device_certificate_relative_path": "<UID>_device_certificate.crt",
  "device_private_key_relative_path": "<UID>_device_reference_key.pem",
  "tls_handshake_timeout_msecs": 60000,
  "tls_read_timeout_msecs": 2000,
  "tls_write_timeout_msecs": 2000,
  "aws_region": "",
  "aws_access_key_id": "",
  "aws_secret_access_key": "",
  "aws_session_token": "",
  "client_id": "CppSDKTesting",
  "thing_name": "CppSDKTesting",
  "is_clean_session": true,
  "mqtt_command_timeout_msecs": 20000,
  "keepalive_interval_secs": 600,
  "minimum_reconnect_interval_secs": 1,
  "maximum_reconnect_interval_secs": 128,
  "maximum acks_to_wait_for": 32,
  "action_processing_rate_hz": 5,
  "maximum_outgoing_action_queue_length": 32,
  "discover_action_timeout_msecs": 300000
}
```

- 1) Search for *default_algorithms* in /simw-top/demos/linux/common/openssl_sss_se050.cnf file and set it as

```
default_algorithms = RSA,RAND,ECDSA,ECDH      ----- For openssl 1.0.0
default_algorithms = RSA,RAND,EC                ----- For openssl 1.1.1
```

- 1) Set the openssl config path as call:

```
$ export OPENSSL_CONF=/simw-top/demos/linux/common/openssl_sss_se050.cnf
```

- 2) Upload the root certificate (/simw-top/pycli/Provisioning/aws/rootCA_certificate.cer) to AWS account. Refer *Creating a device on AWS account*

- 3) Run the application:

```
cd /simw-top/demos/linux/aws/aws-iot-device-sdk-cpp/build/bin
./pub-sub-sample
```

Note:

- 1) Export the OpenSSL conf path to the exact location of the file. The above example is for illustrative purpose

5.3.3 GCP Demo for KSDK

This demo demonstrates connection to Google Cloud Platform using pre-provisioned device credentials and publish/subscribe procedure using MQTT.

Prerequisites

- Active azure account
- MCUXpresso installed (for running azure demo on k64)
- Any Serial communicator
- Flash VCOM binary on the device. VCOM binary can found under <PROJECT>binaries folder.
- Refer to [CLI Tool](#) for ssscli tool setup

Using WiFi with LPC55S

WiFi shield Silex-2401 is supported with LPCS55S. Mount the WiFi shield on to the arduino stackable headers.

Creating and updating device keys and certificates to SE

- 1) Complete [Section 9.3 Steps needed before running ssscli tool](#)
- 2) Check the vcom port number
- 3) To create certificates on windows and provision, go to simw-top/pycli directory and call:

```
call venv\Scripts\activate.bat
cd Provisioning
python GenerateGCP_credentials.py <COM_PORT>
python ResetAndUpdate_GCP.py <COM_PORT>
```

- 4) Certificates and Keys are generated at simw-top/pycli/Provisioning/gcp

Preparing the Cloud

- 1) Updating cloud over command line. Set up gcloud command line utility availabe at <https://cloud.google.com/pubsub/docs/quickstart-cli>
 - Assuming the project name is pgh-cloud-iot the following commands sets up the code.

Create a new events pub/sub topic:

```
,-----
|
|  gcloud pubsub topics create a71ch-demo-events \
|      --project=pgh-cloud-iot
|-----
```

- Create a registry:

```
,-----
| gcloud iot registries create nxp-se-demo-reg \
|   --project=pgh-cloud-iot \
|   --region=us-central1 \
|   --event-notification-config=topic=projects/pgh-cloud-iot/topics/a71ch-demo-
|   ↵events \
|
\-----
```

- Create a device and attach the certificate `tls_client.cer`:

```
,-----
| gcloud iot devices create nxp-ecc-dev-01 \
|   --project=pgh-cloud-iot \
|   --region=us-central1 \
|   --registry=nxp-se-demo-reg \
|   --public-key=path=/simw-top/pycli/Provisioning/gcp/<UID>_device_certificate.
|   ↵cer,type=es256-pem
|
\-----
```

2) Updating cloud using the Web Interface

- Sign up for Google Cloud Platform - IoT (If you have not done that already)
- Create Registry & Device in the cloud platform.
- Copy For the device, add public key in ES256_X509 format Copy `hostLibmbedtlssecctl_client.cer` and paste in the web-dialogue box.

Running the Demo

- Open `frdmk64f_mbedtls_sss_azure_demo` project found under `<PROJECT>projects` in MCUXPRESSO IDE
- Build the project and flash the binary on FRDM-K64F board
- Connect your board to open network
- Open a serial terminal on PC for OpenSDA serial device with these settings:**
 - 115200 baud rate
 - 8 data bits
 - No parity
 - One stop bit
 - No flow control
 - change Setup->Terminal->New-line->Receive->AUTO
- Console output - If everything is setup correctly the output would be as follows

```
,-----
| GCP JWT NXP Secure Element example
|
```

(continues on next page)

(continued from previous page)

```

| selectResponseDataLen: 2
| 0x01:0x31:
| Associating ECC key-pair '0'.
| Connecting to network
| Getting IP address from DHCP ...
|
|   IPv4 Address      : 192.168.1.55
| DHCP OK
| Current EPOCH = 1520599186
| Using ECC key '0' for signing.
| JWT TOKEN = eyJhbGciOiJFUzI1NiIsInR5cCI6IkpXVCJ9.
| -eyJhdWQiOiJwZ2gtY2xvdWQtaW90IiwiWF0IjoxNTIwNTk5MTg2LCJleHAiOjE1MjA2MzUxODZ9.
| -pZK9NjzD2rMdsU9H6bLPHNTsjHE77zHTMNhxVDVR3fYo39ttM2gYrhvJBR2Ct-9a2o8FwFqWjR8YY_
| -lDwGjYyg
| GAE subscribe publish example
|
| Connecting...
| Associating ECC key-pair '0'.
| Using ECC key '0' to compute shared secret.
| Subscribing...
| -->sleep
| -->sleep
| Publish done
|
| Subscribe callback
|
| ...
| ...
|
`-----

```

- 6) You can update device config with following messages to toggle on-board keys. Using the below command, we can toggle LEDs:

```

,-----
|
| gcloud iot devices configs update \
|   --project=pgh-cloud-iot \
|   --region=us-central1 \
|   --registry=nxp-se-demo-reg \
|   --device=nxp-ecc-dev-01 \
|   --config-data='{"red": "off"}'
|
`-----

```

User can toggle individual LEDs:

```

,-----
| {"green": "toggle", "user": "test1"}
| {"green": "on",      "user": "test1"}
| {"red":  "off",     "user": "test1"}
`-----

```

For DOS Batch files, the commands can be like below (with escaping):

```

,-----

```

(continues on next page)

(continued from previous page)

```

| gcloud iot devices configs update ^
|   --project=pgh-cloud-iot ^
|   --region=us-central1 ^
|   --registry=nxp-se-demo-reg ^
|   --device=nxp-ecc-dev-01 ^
|   --config-data='{"red":"on","blue":"off","green":"off"}'
|
| gcloud iot devices configs update ^
|   --project=pgh-cloud-iot ^
|   --region=us-central1 ^
|   --registry=nxp-se-demo-reg ^
|   --device=nxp-ecc-dev-01 ^
|   --config-data='{"red":"off","blue":"on","green":"off"}'
|
| gcloud iot devices configs update ^
|   --project=pgh-cloud-iot ^
|   --region=us-central1 ^
|   --registry=nxp-se-demo-reg ^
|   --device=nxp-ecc-dev-01 ^
|   --config-data='{"red":"off","blue":"off","green":"on"}'
|
`-----

```

Appendix

1. For more information, refer to <https://github.com/GoogleCloudPlatform/cpp-docs-samples/tree/master/iot/mqtt-cioc>

5.3.4 GCP Demo for iMX Linux / Raspberry Pi

This demo demonstrates connection to Google Cloud Platform using pre-provisioned device credentials and publish/subscribe procedure using MQTT.

Prerequisites

- GCP account
- SD Card image with SE050 Middleware pre-installed. The application is built on the iMX platform.
- IMX6UL-EVK/RPi platform connected to the Internet
- Install autoconf and libtool. Execute - `sudo apt-get install autoconf libtool`

For additional information:

- Refer to *Development Platforms* for hardware setup and iMX setup
- Refer to *CLI Tool* for ssscli tool setup

Preparing the credentials and Provision the SE

- 1) Complete [Section 9.3 Steps needed before running ssscli tool](#)
- 2) To create certificates on imx and Raspberry Pi, call:

```
cd simw-top/pycli/Provisioning  
python3 GenerateGCP_credentials.py  
python3 ResetAndUpdate_GCP.py
```

- 3) Certificates and Keys are generated at simw-top/pycli/Provisioning/gcp

Build the OpenSSL engine [Optional]

Note: This step is optional in case you are using a prepared SD card image from NXP.

The OpenSSL engine uses the sss abstraction layer to access the crypto services of the secure element, the implementation remains dependent on the secure element attached. The following illustrates compiling the OpenSSL engine for SE050 connected over I2C.

```
cd simw-top  
python scripts/create_cmake_projects.py  
cd ../simw-top_build/imx_native_se050_t1oi2c  
cmake --build .  
make install  
ldconfig /usr/local/lib
```

Note: Replace imx_native_se050_t1oi2c with raspbian_native_se050_t1oi2c when building for Raspberry Pi.

Building the application

- 1) Use ‘buildScript.sh’ script at simw-top/demos/linux/gcp/ to download all dependencies and build the mqtt application for gcp call:

```
cd /simw-top/demos/linux/gcp/  
./buildScript.sh
```

- 2) Search for *default_algorithms* in /simw-top/demos/linux/common/openssl_sss_se050.cnf file and set it as

```
default_algorithms = RSA,RAND,ECDSA,ECDH      ----- For openssl 1.0.0  
default_algorithms = RSA,RAND,EC                 ----- For openssl 1.1.1
```

- 3) Set the openssl config path. Skip if already done:

```
$ export OPENSSL_CONF=/simw-top/demos/linux/common/openssl_sss_se050.cnf
```

- 4) Upload the root certificate (/simw-top/pycli/Provisioning/gcp/rootCA_certificate.cer) and device certificate (/simw-top/pycli/Provisioning/gcp/<UID>_device_certificate.cer) to GCP account. Refer [Preparing the Cloud](#). Skip if already done.

5) Run the application call:

```
cd /simw-top/demos/linux/gcp/gcp/cpp-docs-samples/iot/mqtt-cioc
$ ./mqtt_cioc --deviceid "nxp-ecc-dev-01" --region "us-central1" --registryid=
  ↵"nxp-se-demo-reg" --projectid "pgm-cloud-iot" --keypath /simw-top/pycli/
  ↵Provisioning/gcp/<UID>_device_reference_key.pem --rootpath /simw-top/demos/
  ↵linux/gcp/keys/roots.pem --algorithm ES256
```

Note:

1. The above example is for illustrative purpose
2. Export the open ssl conf path to the exact location of the file.
3. While executing the application, use the appropriate values for registryid, projectid, keypath, rootpath and algorithm

Appendix

1. For more information, refer to <https://github.com/GoogleCloudPlatform/cpp-docs-samples/tree/master/iot/mqtt-cioc>

5.3.5 IBM Watson Demo for KSDK

This demo demonstrates connection to IBM Watson IoT platform using pre-provisioned device credentials and publish/subscribe procedure using MQTT

Prerequisites

- Active IBM Watson account
- MCUXpresso installed (for running azure demo on k64)
- Any Serial communicator
- Flash VCOM binary on the device. VCOM binary can found under <PROJECT>binaries folder.
- Refer to *CLI Tool* for ssscli tool setup

Using WiFi with LPC55S

WiFi shield Silex-2401 is supported with LPC55S. Mount the WiFi shield on to the arduino stackable headers.

Setting up IBM Watson IoT Platform

1. Create an IBM ID which enables you to create a service instance for the Watson IoT platform (<https://idaas.iam.ibm.com/idaas/mtfim/sps/authsvc?PolicyId=urn:ibm:security:authentication:ASF:basicldapuser>)
2. Create an instance of Internet of Things Platform in the Watson IoT after logging in.
3. Register the Root CA certificate (and Intermediate CA certificates if applicable) by following the below link https://console.bluemix.net/docs/services/IoT/reference/security/set_up_certificates.html#set_up_certificates
 - i) Click on ‘Launch’ button to access to the IoT dashboard
 - ii) Click on ‘Settings’ tab
 - iii) Click on ‘CA Certificates’
 - iv) Click on ‘Add Certificate’
 - v) A new pop-up appears. Click on ‘Select a file’ option and select the certificate
 - vi) Click on ‘Save’
4. Configure the security policies of the service by following steps
 - i) Click on ‘Security’ tab
 - ii) Click on the pencil of ‘Connection Security’ to edit the preferences
 - iii) A new window is loaded, ‘Connection Security’. In the Security Level field, select ‘TLS with Client Certificate Authentication’.
 - iv) click on ‘Save’
5. Register Device type
 - i) In the service, Click on ‘Devices’ tab and ‘Device Types’
 - ii) Click on ‘Add device type’.
 - iii) Select the ‘Device’ type and write a name. Device type shall be registered as ‘NXP-SE050-EC-D’ and Optionally, add a description.
 - iv) Click ‘Next’
 - v) Optionally, add information to the rest of the fields. In this guide all the fields have been intentionally left empty. Finally, click ‘Done’.
 - vi) For more information, refer to https://console.bluemix.net/docs/services/IoT/iotplatform_task.html#iotplatform_task
6. Register device
 - i) Click on ‘Devices’ tab.
 - ii) Click on ‘Add Device’
 - iii) In the ‘Identity’ tab, select as ‘Device Type’ the one created in ‘Register Device type’ and the ‘Device ID’ the one retrieved using the pycli tool (UID of the device)
 - iv) Click on ‘Next’ button
 - v) Click Done button to create the device
7. Configure the application.
 - i) In the ‘watson_iot_config.h’ file, update the org details in the macro “WATSON_IOT_MQTT_BROKER_ENDPOINT” which we get from the URL of the dashboard https://org_id.internetofthings.ibmcloud.com/dashboard/#/overview

- ii) update the org details and UID of the device in the macro ‘WatsonEchoCLIENT_ID’ which is available in ‘watson_iot_config.h’
- 8. Configuring the publish application

Create API key and authentication pair token

- i) In the Watson IoT Platform dashboard, go to Apps > API Keys.
- ii) Click Generate API Key.

Note: Important: Make a note of the API key and token pair. Authentication tokens are non-recoverable. If you lose or forget this token, you will need to re-register the API key to generate a new authentication token.

An example of an API key is a-organization_id-a84ps90Ajs

An example of a token is MP\$08VKz!8rXwnR-Q*

- iii) Add a comment to identify the API key in the dashboard, for example: Key to connect my application.
- iv) Click Finish

Creating and updating device keys and certificates to SE

- 1) Complete [Section 9.3 Steps needed before running ssscli tool](#)
- 2) Check the vcom port number
- 3) To create certificates on windows and provision, go to simw-top/pycli directory and call:

```
call venv\Scripts\activate.bat
cd Provisioning
python GenerateIBMCredentials.py <COM_PORT>
python ResetAndUpdate_IBM.py <COM_PORT>
```

- 4) Certificates and Keys are generated at simw-top/pycli/Provisioning/ibm

Running the Demo

1. Open <board>_mbedtls_sss_watson_demo project found under <PROJECT>/projects in MCUXPRESSO IDE
2. In the ‘watson_iot_config.h’ file, update the org details in the macro “WATSON_IOT_MQTT_BROKER_ENDPOINT” which we get from the URL of the dashboard https://org_id.internetofthings.ibmcloud.com/dashboard/#/overview
3. Update the org details and UID of the device in the macro ‘WatsonEchoCLIENT_ID’ which is available in ‘watson_iot_config.h’
4. In OrgDetails.cfg file, update the Org details which we got from the previous step in the ‘org’ section
5. In OrgDetails.cfg file, update the auth-key which we got from the above sections in to the ‘auth-key’ section
6. Update the UID of the device in the application test.py (at Line 40)
7. Build the project and flash the binary on FRDM-K64F board
8. Connect your board to open network
9. **Open a serial terminal on PC for OpenSDA serial device with these settings:**

- 115200 baud rate
- 8 data bits
- No parity
- One stop bit
- No flow control
- change Setup->Terminal->New-line->Receive->AUTO

10. Press reset button on the board

11. To see the event coming in to device and event going out of the device, login to the Watson IoT platform and launch the service: i) Click ‘Devices’ #) Click the registered device id #) Click ‘Recent Events’ #) Events will be displayed in portal

12. Persistent RED LED ON indicates error

13. All lights off along with the following message indicates readiness to subscribe messages from AWS:

```
Subscribing...
-->sleep
-->sleep
Publish done
```

14. Run the Publish application to publish events to the device.

To do that, run:

```
python test.py OrgDetails.cfg GREEN ON
```

The above command ensures that the green LED is turned ON. Similarly RED and BLUE LED can be turned ON and OFF

15. Events that are published shall be verified in the Watson Platform Dashboard(Refer to section 15)

Appendix

1. For more information, refer to https://cloud.ibm.com/docs/services/IoT?topic=iot-platform-about_iotplatform

5.3.6 IBM Watson Demo for iMX Linux / Raspberry Pi

This demo demonstrates connection to IBM Watson IoT platform using pre-provisioned device credentials and publish/subscribe procedure using MQTT

Prerequisites

- IBM Cloud account
- SD Card image with SE050 Middleware pre-installed. The application is built on the iMX platform.
- IMX6UL-EVK platform connected to the Internet

For additional information:

- Refer to *Development Platforms* for hardware setup and iMX setup
- Refer to *CLI Tool* for ssscli tool setup

Preparing the credentials

- 1) Complete [Section 9.3 Steps needed before running ssscli tool](#)
- 2) To create certificates on imx and Raspberry Pi, call:

```
cd simw-top/pycli/Provisioning
python3 GenerateIBMCredentials.py
python3 ResetAndUpdate_IBM.py
```

- 3) Certificates and Keys are generated at simw-top/pycli/Provisioning/ibm
 - The subject and subject alternative name of the device certificate must adhere to specific conventions. Both subject and subject alternative name contain the 10 byte UID value. In addition the Subject Alternative Name contains the device type.

Build the OpenSSL engine [Optional]

Note: This step is optional in case you are using a prepared SD card image from NXP.

The OpenSSL engine uses the sss abstraction layer to access the crypto services of the secure element, the implementation remains dependent on the secure element attached. The following illustrates compiling the OpenSSL engine for SE050 connected over I2C.

```
cd simw-top
python scripts/create_cmake_projects.py
cd .. /simw-top_build/imx_native_se050_t1oi2c
cmake --build .
make install
ldconfig /usr/local/lib
```

Note: Replace imx_native_se050_t1oi2c with raspbian_native_se050_t1oi2c when building for Raspberry Pi.

Running the Demo on iMX/Raspberry Pi

- 1) Use ‘buildScript.sh’ script at <MW_SRC_DIR>/simw-top/demos/linux/ibm_watson_iot to download all dependencies and build the mqtt application for ibm_watson call:

```
cd /simw-top/demos/linux/ibm_watson_iot
./buildScript.sh
```

- 2) Based on OpenSSL version and applicable Secure Element, select the appropriate configuration file in <MW_SRC_DIR>/simw-top/demos/linux/common directory:

openssl111_sss_a71ch.cnf	----- OpenSSL 1.1.1 and A71CH
openssl111_sss_se050.cnf	----- OpenSSL 1.1.1 and SE050
openssl_sss_a71ch.cnf	----- OpenSSL 1.0.0 and A71CH
openssl_sss_se050.cnf	----- OpenSSL 1.0.0 and SE050

- 3) Set the openssl config path. Skip if already done:

```
$ export OPENSSL_CONF=<MW_SRC_DIR>/simw-top/demos/linux/common/<appropriate-cnf->  
file>
```

- 4) Upload the root certificate (<MW_SRC_DIR>/simw-top/pycli/Provisioning/ibm/rootCA_certificate.crt) to your IBM account. Refer to [Setting up IBM Watson IoT Platform](#) for instructions on uploading the Root CA certificate and registering the device. Skip if already done.
 - 5) Run the application in either of the following two ways:

- Parameters via commandline:

```
./watson_imx_linux --org <ORG> --keypath <MW_SRC_DIR>/simw-top/pycli/  
- Provisioning/ibm/<UID>_device_reference_key.pem --devcert simw-top/pycli/  
- Provisioning/ibm/<UID>_device_certificate.cer --topic_  
- "iot-2/evt/status/fmt/json" --payload "{\"d\":{  
- {\"SensorID\": \"Test\", \"Reading\": 7}}}"
```

where *ORG* is the organization ID, *keypath* is the path to reference key corresponding to the device key and *devcert* is the path to device certificate.

- Parameters via json file:

```
./watson_imx_linux --json <input.txt>
```

Sample JSON file:

Note:

- 1) The above example invocation is for illustrative purpose.
 - 2) Export the open ssl conf path to the exact location of the file.
 - 3) While executing the application, use the appropriate values for org, keypath and devcert.

Appendix

1. For more information, refer to https://cloud.ibm.com/docs/services/IoT?topic=iot-platform-about_iotplatform
2. <MW_SRC_DIR> is a placeholder for the path to the Plug & Trust MW. It would typically be /home/root/se050_mw_v02.08.00 (or a later version) on i.MX.

5.3.7 Azure Demo for KSDK

This demo demonstrates connection to Azure IoT Hub using pre-provisioned device credentials and demonstrates publish/subscribe procedure using MQTT.

Prerequisites

- Active azure account with iot hub created
- MCUXpresso installed (for running azure demo on k64)
- Any Serial communicator
- Flash VCOM binary on the device. VCOM binary can found under <PROJECT>/binaries folder.
- Refer to [CLI Tool](#) for ssscli tool setup

Using WiFi with LPC55S

WiFi shield Silex-2401 is supported with LPCS55S. Mount the WiFi shield on to the arduino stackable headers.

Creating a device on azure IoT Hub portal

1. Navigate to the Dashboard -> <Your IoT Hub> -> “IoT Devices”
2. Add a new device (e.g. device1), and for its authentication type choose X.509 CA Signed

Note: Creating a new device For large deployment of device, creating a device on azure iot hub can be done using Azure IoT service SDK

Creating and updating device keys and certificates to SE

- 1) Complete [Section 9.3 Steps needed before running ssscli tool](#)
- 2) Check the vcom port number
- 3) To create certificates on windows and provision, go to simw-top/pycli directory and call:

```
call venv\Scripts\activate.bat
cd Provisioning
python GenerateAZURECredentials.py <COM_PORT>
python ResetAndUpdate_AZURE.py <COM_PORT>
```

- 4) Certificates and Keys are generated at simw-top/pycli/Provisioning/azure

Uploading root certificates to IoT Hub

- 1) On Azure IoT Hub portal, Navigate to Dashboard --> <Your IoT Hub> --> Certificates. Click on Add
- 2) Enter a friendly name and upload the root certificate created in the previous step. Location - simw-top/pycli/Provisioning/azure/RootCA.cer -> Save
- 3) Your certificate will show in the Certificate Explorer list. Click on certificate added
- 4) In Certificate Details, click Generate Verification Code
- 5) The provisioning service creates a Verification Code that you can use to validate the certificate ownership. Copy the code to your clipboard
- 6) Use the verification_certificate.py to generate a verify certificate (verifyCert4.cer)

```
cd simw-top/pycli/Provisioning
python verification_certificate.py <RootCA_Certificate> <RootCA_Keypair>
˓-<Verification Code>
```

- 7) On Azure portal -> Certificate Details, upload the verifyCert4.cer file generated and click Verify.
STATUS of your certificate should change to Verified in the Certificate Explorer list

Running the Demo

- 1) Open frdmk64f_mbedtls_sss_azure_demo project found under <PROJECT>projects in MCUXPRESSO IDE
- 2) Update AZURE_IOT_HUB_NAME and AZURE_DEVICE_NAME in <PROJECT>\demo\azure_demo\azure_iot_config.h with your details
- 3) Build the project and flash the binary on FRDM-K64F board
- 4) Connect your board to open network
- 5) **Open a serial terminal on PC for OpenSDA serial device with these settings**
 - 115200 baud rate
 - 8 data bits
 - No parity
 - One stop bit
 - No flow control
 - change Setup->Terminal->New-line->Receive->AUTO
- 6) Console Output
 - Press reset button on the board If everything is setup correctly, the output would be as follows:

```
,-----
|
| Connecting to network
| Getting IP address from DHCP ...
|
| IPv4 Address      : 192.168.0.68
| DHCP OK
```

(continues on next page)

(continued from previous page)

```

| MQTT attempting to connect to 'dev2'...
|
| Signing using key 1X
| MQTT Echo demo subscribed to devices/dev2/messages/devicebound/#
| -->sleepEcho successfully published
| Echo successfully published
| -->sleepEcho successfully published
| Echo successfully published
|
| ...
|
`-----

```

- You can use device explorer tool to control the on-board LEDs. Open device explorer tool and update the IoT Hub connection string to connect to azure IoT hub, IoT Hub connection string is found at Azure IoT Hub -> Shared access policies -> iothubowner -> Connection String Primary key
- In the “Message To Devices” tab, select the device and send the message as:

```

`-----
| {"green": "toggle"}, {"green": "on"}, {"red": "off"}
`-----

```

Appendix

1. for more information, refer to <https://docs.microsoft.com/en-us/azure/iot-hub/iot-hub-mqtt-support>

5.3.8 Azure Demo for iMX Linux / Raspberry Pi

This demo demonstrates connection to Azure IoT Hub using pre-provisioned device credentials and demonstrates publish/subscribe procedure using MQTT.

Prerequisites

- Azure account
- SD Card image with SE050 Middleware pre-installed. The application is built on the iMX platform.
- IMX6UL-EVK platform or Raspberry pi connected to the Internet

Preparing the credentials and Provisioning the secure element

Use ssscli tool from iMX/Rpi platform

- 1) Complete Section 9.3 *Steps needed before running ssscli tool*
- 2) To create certificates on imx and Raspberry Pi, call:

```

cd simw-top/pycli/Provisioning
python3 GenerateAZURECredentials.py
python3 ResetAndUpdate_AZURE.py

```

- 3) Certificates and Keys are generated at simw-top/pycli/Provisioning/azure

Registering Device

To register the device onto the IoT Hub portal, we can either upload Root credentials manually or we can register an individual device using `azure_imx_register` application. If you wish to upload Root credentials, skip the next steps and proceed to [Uploading root certificates to IoT Hub](#).

Create device enrollment in azure IoT Hub portal

This step is only for individual device enrollment.

Prerequisite: Azure IOT hub and Azure IOT HUB DPS account which are linked.

Refer: <https://docs.microsoft.com/en-us/azure/iot-dps/tutorial-set-up-cloud>

<https://docs.microsoft.com/en-us/azure/iot-dps/quick-setup-auto-provision>

Once required accounts exist we can enroll the devices. For this we only need device certificate which we created in above steps.

Follow the steps to enroll the device: <https://docs.microsoft.com/en-us/azure/iot-dps/tutorial-provision-device-to-hub>

Note: When creating device certificates be sure to use only lower-case alphanumerics and hyphens in your device name.

Run `azure_imx_register` application to register the device onto your IoT Hub.

`azure_imx_register` application can take parameters either via JSON file or via command line. The required parameters are:

- `registerid`: Registration id of the device (common name of device certificate)
- `keypath`: Path to reference key pem file
- `devcert`: Path to device certificate
- `rootpath`: Path to azure root CA certificate
- `idscope`: IDScope (can found in Azure IoT-DPS account - Overview)

Run via command line as:

```
./azure_imx_register --registerid test-device --keypath keyref.pem --rootpath  
azureRootCA.pem --devcert cert.pem --idscope 0ne00068F95
```

Or pass JSON file as:

```
./azure_imx_register --json json_register_config.json
```

Sample JSON file:

```
{  
  "devcert": "cert.pem",  
  "keypath": "keyref.pem",  
  "id_scope": "0ne00068F95",  
  "registration_id": "test-device",  
  "rootpath": "azureRootCA.pem"  
}
```

Upon successful registration, “DeviceID”.txt file is created with DeviceID, assigned hub along with keyref, device certificate and root certificate path. This file can be given as input to connect to device and send messages.

The device is now registered and appears on IoT Azure hub under devices tab

We can pass this JSON file to `azure_imx_connect` application to connect to IoT Hub. You can skip the next step and proceed to [Build the OpenSSL engine \[Optional\]](#).

Uploading root certificates to IoT Hub

- 1) On Azure IoT Hub portal, Navigate to Dashboard --> <Your IoT Hub> --> Certificates. Click on Add
- 2) Enter a friendly name and upload the root certificate created in the previous step. Location - `simw-top/pycli/Provisioning/azure/RootCA.cer` -> Save
- 3) Your certificate will show in the Certificate Explorer list. Click on certificate added
- 4) In Certificate Details, click Generate Verification Code
- 5) The provisioning service creates a Verification Code that you can use to validate the certificate ownership. Copy the code to your clipboard
- 6) Use the `verification_certificate.py` to generate a verify certificate (`verifyCert4.cer`)

```
cd simw-top/pycli/Provisioning
python verification_certificate.py <RootCA_Certificate> <RootCA_Keypair>
↪<Verification Code>
```

- 7) On Azure portal -> Certificate Details, upload the `verifyCert4.cer` file generated and click Verify.

STATUS of your certificate should change to Verified in the Certificate Explorer list

Build the OpenSSL engine [Optional]

Note: This step is optional in case you are using a prepared SD card image from NXP.

The OpenSSL engine uses the sss abstraction layer to access the crypto services of the secure element, the implementation remains dependent on the secure element attached. The following illustrates compiling the OpenSSL engine for SE050 connected over I2C.

```
cd simw-top
python scripts/create_cmake_projects.py
cd ..//simw-top_build/imx_native_se050_t1oi2c
cmake --build .
make install
ldconfig /usr/local/lib
```

Note: Replace `imx_native_se050_t1oi2c` with `raspbian_native_se050_t1oi2c` when building for Raspberry Pi.

Run the example

- 1) Use ‘buildScript.sh’ script at simw-top/demos/linux/azure/ to download all dependencies and build the mqtt application for azure call:

```
cd /simw-top/demos/linux/azure  
./buildScript.sh
```

- 2) Based on OpenSSL version and applicable Secure Element, select the appropriate configuration file in <MW_SRC_DIR>/simw-top/demos/linux/common directory:

```
openssl111_sss_a71ch.cnf      ----- OpenSSL 1.1.1 and A71CH  
openssl111_sss_se050.cnf      ----- OpenSSL 1.1.1 and SE050  
openssl_sss_a71ch.cnf        ----- OpenSSL 1.0.0 and A71CH  
openssl_sss_se050.cnf        ----- OpenSSL 1.0.0 and SE050
```

- 3) Set the openssl config path as call:

```
$ export OPENSSL_CONF=/simw-top/demos/linux/common/<appropriate-cnf-file>
```

- 4) To run the application, call:

```
$ ./azure_imx_connect --deviceid "<devive_name>" --keypath simw-top/pycli/  
↳ Provisioning/azure/<UID>_device_reference_key.pem --rootpath simw-top/demos/  
↳ linux/azure/azureRootCA.pem --devcert simw-top/pycli/Provisioning/azure/<UID>_  
↳ device_certificate.cer --hubname <IoTHubName>.azure-devices.net --username  
↳ <IoTHubName> --payload "<MESSAGE>"
```

Or pass JSON file as:

```
./azure_imx_connect --json json_connect_config.json
```

Sample json_connect_config.json:

```
{  
  "assignedHub": "ABCD.azure-devices.net",  
  "deviceId": "test-device",  
  "registration_id": "test-device",  
  "status": "assigned",  
  "keypath": "keyref.pem",  
  "devcert": "cert.pem",  
  "rootpath": "azureRootCA.pem",  
  "payload": "hello message from device test-device"  
}
```

Note: If you have used azure_imx_register application, json_connect_config.json is same as "DeviceID".txt

Note:

- 1) Export the OpenSSL conf path to the exact location of the file. The above example is for illustrative purpose
 - 2) While executing the application, use the appropriate values for device cert, Device id, Path, hubname and user-name
-

5.4 Linux Specific Demos

5.4.1 Greengrass Demo for Linux

AWS IoT Greengrass is a software provided by AWS to extend cloud capabilities to locally connected devices. This allows local devices to publish/subscribe to a topic even if there is no connectivity with AWS IoT console. A Greengrass group consists of a Greengrass core, multiple Greengrass devices connected to that core, and lambda functions and other services running on that core. In this, the Greengrass core performs the functions of AWS IoT console.

Also see [What Is AWS IoT Greengrass](#) for more details about AWS IoT Greengrass.

This demo is to demonstrate how to integrate SE050 with AWS IoT Greengrass core and RaspberryPi as hardware security to store core specific credentials for IoT client and MQTT server.

Note: Hardware security feature is available only for AWS IoT Greengrass Core v1.7 and later. We have used Greengrass core v1.10.0 for integration

Prerequisites

- AWS Greengrass account (Also see supported regions for Greengrass)
- RaspberryPi 3 Model B+ or Model B. The architecture of your Pi must be armv7l or later
- Raspbian Buster operating system
- Python 2.7
- ssscli Tool. Refer to [CLI Tool](#)

Preparing the Greengrass group

- 1) Follow the modules 1 and 2 as described in [Environment Setup for Greengrass](#) to set up Greengrass group and Greengrass core.

Note: In Module 2, if you choose Easy Group Creation, AWS will create credentials for Greengrass IoT core and provision in the registry. Skip the next step if you choose Easy Group Creation. You could otherwise create your own credentials and provision AWS registry as explained in the next step.

- 2) If you wish to use your own credentials, upload the your RootCA and verification certificate in Secure->CAs tab under IoT Core.
 - While creating Greengrass group, choose Advanced group creation.
 - You can either assign IAM role or skip it for later.
 - Under Set up your security, choose Advanced setup and then choose Use my certificate.
 - Select your active RootCA certificate and upload corresponding device certificate
- 3) If you used your own credentials, download sample config.json file for greengrass available at [AWS IoT Greengrass Core Configuration File](#)

After completing Module 2, store your device certificate under certs directory where you have extracted AWS IoT Greengrass core software (by default /greengrass directory) and the downloaded config.json under config directory.

- 4) Do **NOT** run the daemon yet.

Provisioning SE050 and Building PKCS#11 library

- 1) Before running the Greengrass daemon, you would need to provision your SE050 and build PKCS#11 library.
- 2) Complete [Section 9.3 Steps needed before running ssscli tool](#) for ssscli tool setup
- 3) Run the following steps to provision your SE050 with Greengrass core keypair:

```
ssscli connect se050 t1oi2c none
ssscli se05x reset
ssscli set ecc pair 0x20181001 <path-to-core-keypair>
ssscli disconnect
```

Note: Greengrass uses labels to address objects on tokens. To make the PKCS#11 library use a specific keyID, the label should start with `sss:` followed by 32-bit keyID in hexadecimal format. For example, the label for the command used above would be `sss:20181001`.

- 4) Build and install PKCS#11 library for Greengrass core. Refer to [Section 8.7 PKCS#11 Standalone Library](#)

Updating Greengrass configuration

If you have successfully completed [Preparing the Greengrass group](#), you would have `config.json` under config directory of AWS IoT Greengrass core software (by default as `/greengrass` directory). A sample of `config.json` is:

```
{
  "coreThing" : {
    "caPath" : "root.ca.pem",
    "certPath" : "hash.cert.pem",
    "keyPath" : "hash.private.key",
    "thingArn" : "arn:partition:iot:region:account-id:thing/core-thing-name",
    "iotHost" : "host-prefix-ats.iot.region.amazonaws.com",
    "ggHost" : "greengrass-ats.iot.region.amazonaws.com",
    "keepAlive" : 600
  },
  "runtime" : {
    "cgroup" : {
      "useSystemd" : "yes"
    }
  },
  "managedRespawn" : false,
  "crypto" : {
    "principals" : {
      "SecretsManager" : {
        "privateKeyPath" : "file:///greengrass/certs/hash.private.key"
      },
      "IoTCertificate" : {
        "privateKeyPath" : "file:///greengrass/certs/hash.private.key",
        "certificatePath" : "file:///greengrass/certs/hash.cert.pem"
      }
    },
    "caPath" : "file:///greengrass/certs/root.ca.pem"
  }
}
```

(continues on next page)

(continued from previous page)

```

    }
}
```

Remove the `caPath`, `certPath`, and `keyPath` values from the `coreThing` object.

Update the `certificatePath` property of `IoTCertificate` object to the path of device certificate.

Note: Currently AWS IoT Greengrass core does not support loading certificates from hardware. These have to be provided as a path to a file on filesystem.

Update the values of `privateKeyPath` under `SecretsManager` and `IoTCertificate` objects with `pkcs11:object=sss:20181001;type=private`.

Add the following `MQTTServerCertificate` object under `principals` object:

```
"MQTTServerCertificate": {
    "privateKeyPath": "pkcs11:object=sss:20181001;type=private"
}
```

Add the following `PKCS11` object under `crypto` object:

```
"PKCS11": {
    "P11Provider": "/path/to/libsss_pkcs11.so",
    "slotLabel": "SSS_PKCS11",
    "slotUserPin": "1234"
}
```

Add commas where needed to create a valid JSON document.

In this file, we have used a shared key for `MQTTServerCertificate`, `IoTCertificate` and `SecretsManager` components. In `PKCS11` object, we specify which PKCS#11 module to load and which slot to use in that module. All PKCS#11 objects specified for different components will refer to the same token.

Running Greengrass Core

Start the Greengrass daemon by running the following command in `ggc/core` directory under AWS IoT Greengrass core software directory:

```
sudo ./greengrassd start
```

The Daemon should start successfully. If you face any problem while starting the Greengrass daemon, refer to Troubleshooting section below. Also see runtime logs under `/greengrass/ggc/var/log/system` directory.

Connecting Devices to Greengrass Core

Follow steps mentioned from Module 3 to test Greengrass connectivity: [Lambda Functions on AWS IoT Greengrass](#)

Over-The-Air (OTA) Updates

To configure your device for OTA updates, you also need additional PKCS#11 engine for OpenSSL. You can use OpenSC's libp11 as the engine. It is recommended that you build the engine manually.

Run the following commands:

```
git clone https://github.com/OpenSC/libp11.git
cd libp11
sudo apt install pkgconf libssl-dev libtool
autoreconf --verbose --install --force
./configure && make && sudo make install
```

This will build the PKCS#11 engine for OpenSSL. Next, you have to specify the paths to the engine in your OpenSSL configuration file. Instead of editing default OpenSSL configuration file, you can maintain two separate files.

Place this line at the top, before any sections are defined:

```
openssl_conf = openssl_init
```

At the end of the file add the following configuration:

```
[openssl_init]
engines=engine_section

[engine_section]
pkcs11 = pkcs11_section

[pkcs11_section]
engine_id = pkcs11
dynamic_path = /usr/lib/arm-linux-gnueabihf/engines-1.1/pkcs11.so
MODULE_PATH = /usr/local/lib/libssss_pkcs11.so
init = 0
```

Here, `dynamic_path` is the path to PKCS#11 engine `.so` file. This is installed in `/usr/lib/arm-linux-gnueabihf/` directory. This path will also be printed out while installing `libp11` library.

`MODULE_PATH` is the path to the PKCS#11 library installed in [Section 8.7 PKCS#11 Standalone Library](#).

You can also test if OpenSSL is able to load the PKCS#11 library by executing the following command:

```
openssl engine dynamic -pre SO_PATH:/usr/lib/arm-linux-gnueabihf/engines-1.1/pkcs11.
→so -pre ID:pkcs11 -pre LOAD -pre MODULE_PATH:/usr/local/lib/libssss_pkcs11.so
```

You should be able to see the following output:

```
(dynamic) Dynamic engine loading support
[Success]: SO_PATH:/usr/lib/arm-linux-gnueabihf/engines-1.1/pkcs11.so
[Success]: ID:pkcs11
[Success]: LOAD
[Success]: MODULE_PATH:/usr/local/lib/libssss_pkcs11.so
Loaded: (pkcs11) pkcs11 engine
```

Follow the steps listed in [OTA Updates of AWS IoT Greengrass Core Software](#) to configure the backend for OTA updates.

Troubleshooting

1) Error message **greengrass deployment failed too many levels of symbolic links**

Check if your linux supports OverlayFS. Also confirm that the Raspberry Pi image version matches the version specified in [Setting Up a Raspberry Pi](#). Currently, AWS IoT Greengrass Core has been tested on **2019-07-10-raspbian-buster** image. Greengrass core might not work with other images like Raspbian Stretch.

2) Error message **connection reset by peer**.

Add properties `iotHttpPort` and `ggHttpPort` to `coreThing` object as:

```
"iotHttpPort" : 443,
"ggHttpPort" : 443
```

If you face any other issue, refer to Troubleshooting AWS IoT Greengrass.

5.4.2 OpenSSL Engine: TLS Client example for iMX/Rpi3

- DocRevision : 0.94
- Date : 2020-01-14

This section explains how to set-up a TLS link using the SE050 OpenSSL Engine on the client side. A note at the bottom of this page ([Section 5.4.2](#)) highlights the changes in case one uses an A71CH secure element.

Summary

The TLS demo demonstrates setting up a mutually authenticated and encrypted link between a client and a server system. The keypair used to identify the client is stored in the Secure Element. The keypair used to identify the server is simply available as a pem file.

The public keys associated with the respective key pairs are contained in respectively a client and a server certificate.

The CA is a self-signed certificate. The same CA is used to sign client and server certificate.

One can choose the keymaterial (CA, Client and Server) to be either RSA (4096 CA - 2048 client/server) or EC (prime256v1).

The TLS demo comes in two flavours:

1. **Flavour-A:** The standard OpenSSL tools `s_server` and `s_client` are used to set-up and demonstrate the TLS link. The certificates used are simply stored on the file system of the host. The client uses the keypair stored inside the SE050.
2. **Flavour-B:** A TLS client program - included in source code (`tlsSe050Client.cpp`) - retrieves the client certificate from the SE050 and uses the keypair stored inside the SE050. It establishes a TLS connection with the server process `s_server`.

Steps in [Section 5.4.2](#) to [Section 5.4.2](#) are identical for the two demo flavours.

Credential preparation (execute once) [Optional]

```
> cd demos/linux/tls_client  
> ./scripts/createTlsCredentials_Optional.sh <ECC|RSA>
```

Note: The Host SW package comes bundled with the required credentials. The *createTlsCredentials_Optional.sh* script will re-create equivalent credentials (but with new/different keypairs)

The script creates all demo required client and server credentials on the client platform. One must transfer the server credentials to the server platform.

Secure Element preparation (client side)

For the purpose of the demo one MUST inject the TLS client key pair and certificate into the Secure Element and create a reference pem file referring to the provisioned key pair:

```
> cd demos/linux/tls_client/scripts  
> python3 provisionTlsClient.py --key_type <ecc|rsa>
```

Further details on using these scripts can be found in the following:

provisionTlsClient.py

usage: provisionTlsClient.py [-h] -key_type KEY_TYPE [-connection_data CONNECTION_DATA] [-connection_type CONNECTION_TYPE] [-subsystem SUBSYSTEM]

Provision attached secure element with ECC/RSA keys

Preconditions:

- Secure element attached
- Virtual environment should be activated (not for iMX platform. Refer ssscli installation steps: Plug & Trust MW, Section 8.3 *Steps needed before running ssscli tool*)

Postconditions:

- Key pair injected on id referred by KEYPAIR_INDEX_CLIENT_PRIVATE variable
- Ref pem created
- Client certificate injected on id referred by CERTIFICATE_INDEX variable.

optional arguments:

-h, --help show this help message and exit

required arguments:

--key_type KEY_TYPE Supported key types => ecc, rsa

optional arguments:

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

--connection_type CONNECTION_TYPE Supported connection types => t1oi2c, sci2c, vcom, jrcpv1, jrcpv2, pcsc. Default: t1oi2c

--subsystem SUBSYSTEM Supported subsystem => se050, a71ch. Default: se050

Example invocation:

```
python provisionTlsClient.py --key_type ecc
python provisionTlsClient.py --key_type ecc --connection_data 169.254.0.1:8050
python provisionTlsClient.py --key_type rsa --connection_data 127.0.0.1:8050 --
  ↪connection_type jrcpv2
python provisionTlsClient.py --key_type rsa --connection_data COM3
python provisionTlsClient.py --key_type ecc --subsystem a71ch
```

Server side preparation

Note: The Host SW package comes bundled with the required server credentials.

Ensure the default server credentials or those created under ([Section 5.4.2](#)) are available on the server platform.

Start up the server

Note: The server can run e.g. on a PC. The server must be reachable over the TCP/IP network for the Client. Choose either a server using EC based credentials or a server using RSA based credentials.

Execute the following command on the server platform to use the EC based server credentials, make a note on the IP address of the server:

```
> cd demos/linux/tls_client/scripts
> ./tlsServer.sh <ECDHE|ECDHE_SHA256|max>
```

Execute the following command on the server platform to use the RSA based server credentials, make a note on the IP address of the server:

```
> cd demos/linux/tls_client/scripts
> ./tlsServer.sh RSA
```

Establish a TLS link from the client to the server

The client process establishing the TLS connection comes in two flavours: either *s_client* or a program provided in source code (tlsSe050Client.cpp). Invoke either example through a bash shell script.

Using *s_client*

Invoke the script using the IP address of the server as the first argument and ECDHE or ECDHE_SHA256 as the second argument (ECDHE corresponding to ECDH ephemeral) when connecting to a server using EC based credentials:

```
> ./tlsSeClient.sh <server-IP-address> <ECDHE|ECDHE_256>
```

Invoke the script using the IP address of the server as the first argument and RSA as the second argument when connecting to a server using RSA based credentials:

```
> ./tlsSeClient.sh <server-IP-address> RSA
```

In case OpenSSL 1.1.1 is available on *both* Client (i.MX or Raspberry Pi) and Server side, it's possible to request the usage of the TLS1.3 protocol (by default TLS1.2 is used). This is achieved by setting the environment variable REQ_TLS to tls1_3:

```
> REQ_TLS=tls1_3 ./tlsSeClient.sh <server-IP-address> ECDHE
```

Using `tlsSe050Client.cpp`

First compile the client program. Ensure all required SE050 specific libraries and header files have been installed on the linux system. By default this example links to static libraries:

```
> cd demos/linux/tls_client/build  
> cmake ..  
> cmake --build .
```

Invoke the script using the IP address of the server as argument:

```
> ./tlsExtendedSeClient.sh <server-IP-address> <EC|RSA>
```

Note: The environment variable REQ_TLS is not applicable to this example. In case OpenSSL 1.1.1 is available on the client, the actual TLS protocol version used will be negotiated to the highest version supported by both client and server. Otherwise TLS1.2 will be used.

TLS client example using A71CH

Introduction

The TLS client example can also be used in combination with an A71CH secure element (in EC mode only). The following steps are different:

- secure element preparation
- client program invocation

Secure Element preparation (client side)

Specify an additional option --subsystem a71ch:

```
> python3 provisionTlsClient.py --key_type ecc --subsystem a71ch
```

Invocation of client program

Set the environment variable REQ_SE to a71ch when invoking the client program:

```
> REQ_SE=a71ch ./tlsSeClient.sh 192.168.1.190 ECDHE
> ... or ...
> REQ_SE=a71ch ./tlsExtendedSeClient.sh 192.168.1.190 EC
```

5.4.3 Access Manager: Manage access from multiple (Linux) processes to an SE05x IoT Applet

- DocRevision : 0.93
- Date : 2020-10-20

Summary

The Access Manager supports concurrent access from multiple linux processes to an SE05x IoT applet. The Access Manager can establish a connection to the SE05x either as a plain connection or as an SCP03 platform connection. Client processes connect over the JRCPv1 protocol to the accessManager. Refer to *Concepts & Features* for more details.

Usage

```
The accessManager takes two optional arguments 'plain' & 'any'
'accessManager':
    Platform SCP03: ON.
    Incoming connection: localhost.
'accessManager plain':
    Platform SCP03: OFF.
    Incoming connection: localhost.
'accessManager any':
    Platform SCP03: ON.
    Incoming connection: any supported address.
'accessManager plain any':
    Platform SCP03: OFF.
    Incoming connection: any supported address.
```

Note:

Product Deployment => Enable Platform SCP03 & restrict incoming connection to localhost

In case STREAM sockets are used (currently the only socket type supported) client processes must connect to port 8040.

As an example:

- The Access Manager is running on iMX and opens a listening STREAMING socket. Incoming connections can be restricted to client processes connecting over localhost.

Example invocation. Notice that the Platform SCP03 keys are passed through an environment variable:

```
root@imx8mqevk:~/mnt/git/simw-top_build_imx8_5_4_24/imx_native_se050_t1oi2c# \
EX_SSS_BOOT SCP03_PATH=/home/root/plain_scp03.txt bin/accessManager
Starting accessManager (Rev.0.9).
Protect Link between accessManager and SE: YES.
accessManager JRCPv1 (T1oI2C SE side)
*****
Server: waiting for connections on port 8040.
Server: only localhost based processes can connect.
```

- client process connects via JRCPv1 to 127.0.0.1:8040

Example invocation. Notice that the server address is set through an environment variable. In a product deployment the default server:port address can also be hard-coded to the proper value:

```
root@imx8mqevk:~/home/root# EX_SSS_BOOT_SSS_PORT=127.0.0.1:8040 se05x_
˓ ConcurrentEcc
```

Build

- The Access Manager must be built as a statically linked executable as its communication and authentication layer is different from the client processes that connect to it.

Build settings to support access to SE05x on iMX host platform (to be applied on top of a configured host build area):

```
cmake -DSCP:STRING=SCP03_SSS -DSE05X_Auth:STRING=PlatformSCP03 -DSMCOM:STRING=T1oI2C_
˓ \
- DWithSharedLIB:BOOL=OFF -DPAHO_BUILD_SHARED:BOOL=FALSE -DPAHO_BUILD_
˓ STATIC:BOOL=TRUE .
cmake --build . --target accessManager
```

- The client processes that connect to the Access Manager must be built in a separate build environment. All session authentication mechanisms are supported, platform SCP03 must be off (platform SCP03 is handled by the Access Manager).

Build settings for client processes connecting via Access Manager, in the example no session authentication is used (to be applied on top of a configured host build area):

```
cmake -DSE05X_Auth:STRING=None -DSMCOM:STRING=JRCP_V1 .
cmake --build .
```

Demo: concurrent access from 2 processes using OpenSSL engine

- The example requires an embedded Linux platform (e.g. an iMX8) with an attached SE05X. Interaction with the iMX8 is over 3 different shells. These shells can e.g. be established via ssh from a PC on the same network.
- Build the Access Manager in a dedicated workarea, follow build instructions as above. Select static linking, enable Platform SCP03 and use T1oI2C as communication protocol.
- Build the Plug&Trust package in a dedicated workarea, follow build instructions as above. Select None as authentication mode and use JRCPv1 as communication protocol.
- Start the Access Manager from a dedicated shell (to simplify the demo, Platform SCP03 is not enabled):

```
./accessManager plain
```

- Open another shell and configure the attached Secure Element once using the ssscli tool (ensure the installed ssscli tool uses JCRPv1 as communication protocol, refer to *Communication interface (cmake SMCOM setting)*):

```
cd <plug_and_trust>/simw-top/sss/plugin/openssl/scripts
python3 openssl_provisionEC.py --key_type prime256v1 --connection_data 127.0.0.1:8040
```

- From the same shell invoke the OpenSSL Engine to perform various sign/verify operations using the provisioned EC key pairs:

```
python3 openssl_EccSign.py --key_type prime256v1 --connection_data 127.0.0.1:8040
```

- Open another shell and invoke the OpenSSL Engine to perform various sign/verify operations using the provisioned EC key pairs:

```
cd <plug_and_trust>/simw-top/sss/plugin/openssl/scripts
python3 openssl_EccSign.py --key_type prime256v1 --connection_data 127.0.0.1:8040
  ↵ --output_dirname output3
```

- The respective ‘openssl_EccSign.py’ invocations can be repeated, ensure both process invocations run in parallel.

Example programs prepared for concurrent access

The demo folder of the Plug&Trust MW package contains two SSS API based example programs that are compatible with concurrent access requirements like:

- ability to select a specific (optional) authentication object ID
- provisioned content of secure element is not erased at project start-up


For more details on these examples refer to:

- [Section 5.7.27 ECC Concurrent Example](#)
- [Section 5.7.28 Symmetric Multi Step Concurrent Example](#)

Concepts & Features


- The Access Manager uses plain communication or platform SCP03 in the communication with the SE. Select the mode at start-up.
- Client processes connect to the accessManager using the JRCPv1 protocol
- The user session authentication type is determined at the client build time. User session authentication is transparent to the Access Manager.
- The Access Manager ensures APDU command / response pairs associated with a client process are executed without interference from another client process.
- The Access Manager does not connect to the SE05x at start up. It waits until a client process initiates a connection.
- When a client process selects the SE05x IoT applet the applet response is cached by the Access Manager, a subsequent SE05x IoT applet select by a client process will simply return the cached applet response.
- A card manager select command is intercepted by the Access Manager and a pre-cooked response is provided to the initiating client process. No interaction with the secure element takes place.

The following figure illustrates the Access Manager is an independent process on the Embedded System providing indirect access to the Secure Element for client processes.

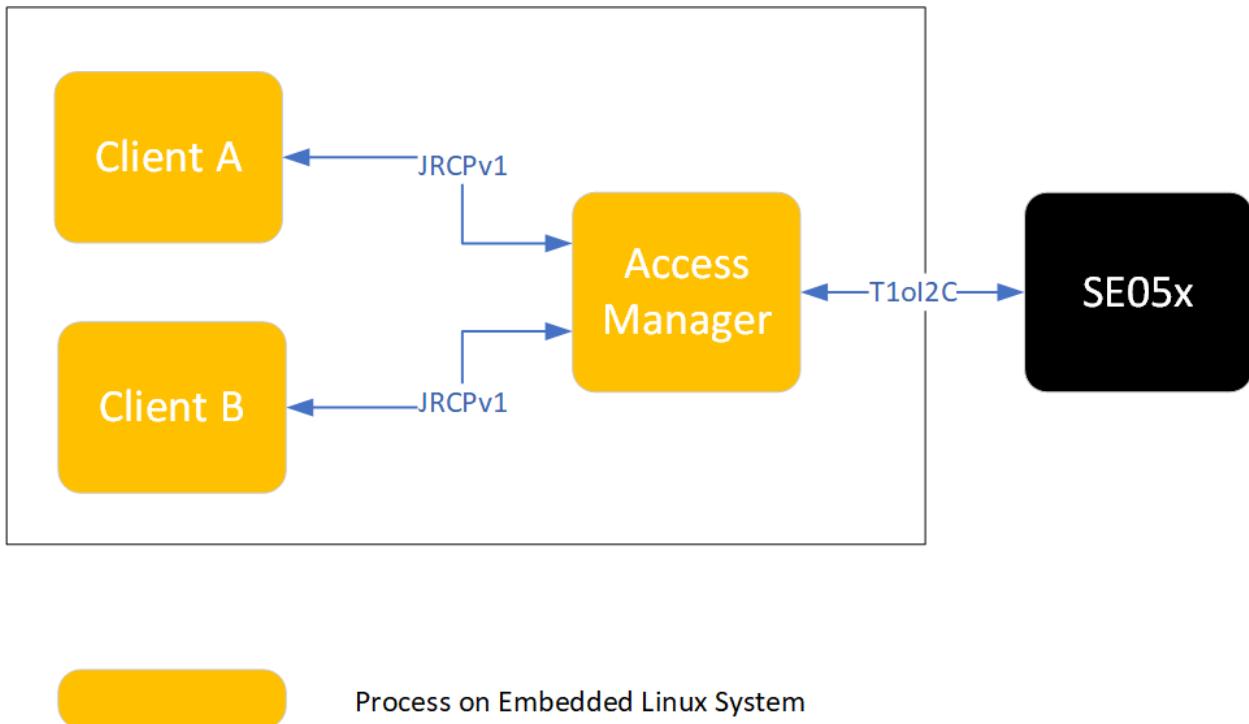

The following sequence diagram illustrates two processes connecting through the Access Manager to the Secure Element.

2 clients using no session, accessManager uses plain communication to SE

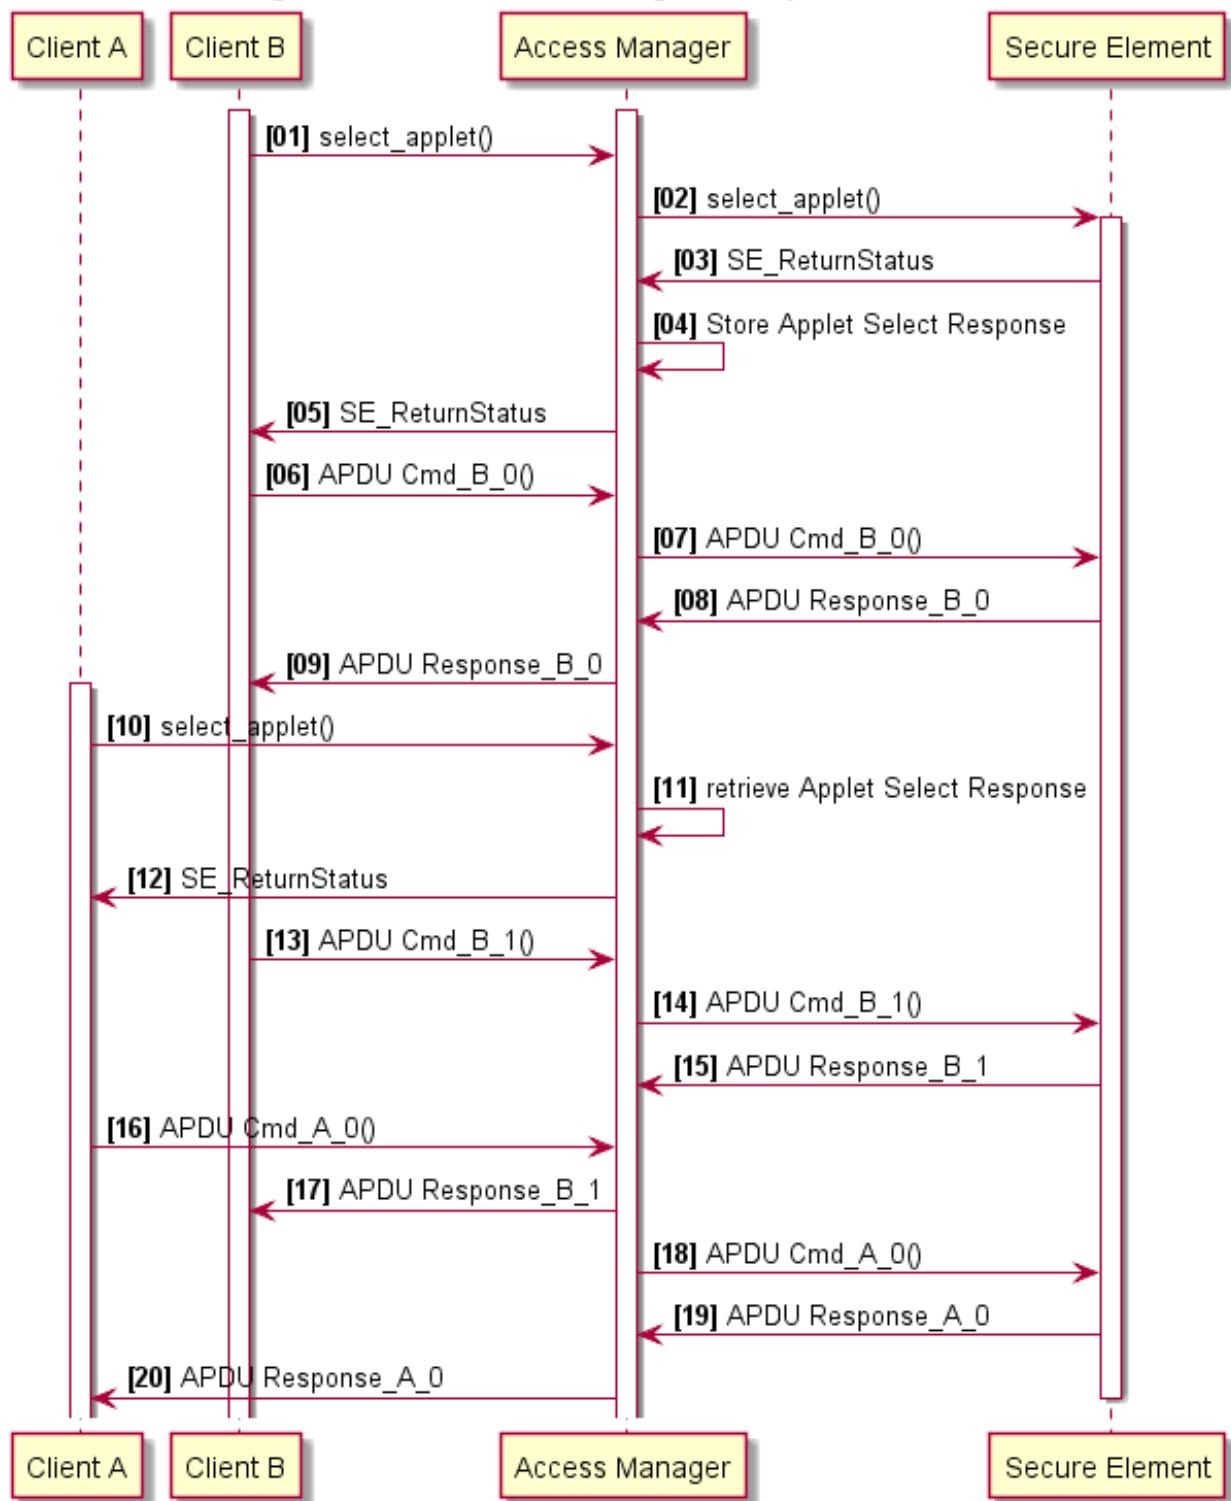

Restrictions

- Each user session needs to have a different authentication object; i.e. one Authentication Object cannot be used to open multiple sessions in parallel. This limitation is inherent to the SE05x user session concept.
- The SE05x does not support more than two active user sessions (based upon either a User ID, AES Key or EC Key authentication object). The Access Manager does not and - conceptually - cannot monitor the number of active user sessions.
- The Access Manager only supports concurrent access to the SE05x IoT applet. Do not access other applets than the SE05x applet through the Access Manager.
- The Access Manager does not attempt to re-establish a broken connection to the SE05x. To recognize and recover from a broken connection, a system integrator must monitor failure to communicate to the Secure Element by the client processes. As and if required the Access Manager must be restarted and the affected client processes must reconnect to the Access Manager.
- A client process establishing a user session with the SE05x applet must always close the user session prior to disconnecting from the Access Manager.
- Selecting another applet than the SE05x IoT applet is possible but strongly discouraged and not supported.
- The Access Manager **does not** :
 - Handle power management
 - Keep track of Secure Element resources
- In a typical deployment the Access Manager and client processes are controlled by another – product specific – entity on the Embedded System:
 - In case of an applet update, the Access Manager must be shut down and control of the secure element must be handed over to the SEMS Lite update manager.
 - A credential update must be coordinated between the consuming processes and the updating process. Such coordination is out-of-scope of the Access Manager
- Transparent usage of the OpenSSL Engine from different applications implies either no user session (Auth=None) or using the OpenSSL Engine from isolated environments (with different authentication settings). This restriction does not apply to applications built directly on top of the SSS API.
- The SSS layer's implementation of multistep symmetric ciphers does not allow concurrent execution of ciphers with the same cipher mode (e.g. twice kAlgorithm_SSS_AES_CBC).

5.5 OPC-UA Example

5.5.1 OPC UA (Open62541) Demo

Supported Platforms

- Server Platform
 - Windows – JRCPv2 – SE050
 - iMX6 / RaspberryPi - t1oi2c – SE050
- Client Platform
 - UaExpert on Windows
 - Open62541 client on Windows


- Open62541 client on iMX6 / RaspberryPi

Introduction

OPC UA (Open Platform Communications Unified Architecture) is an application layer protocol specific to Industrial IoT. It can run on top of TCP, TCP + Web services or TCP + HTTPS. In this client - server demo, the Open62541 open source OPC UA stack is used for integration with SE050. The server certificate and key are provisioned inside the SE050, the access to the SE050 is performed using the SSS APIs. The OPC UA server example source code is available in directory `demos\opc_ua\opc_ua_server`. The Open62541 specific adaptation layer to the SE050 is available in directory `sss\plugin\open62541`. The source code of the Open62541 stack is available in directory `ext\open62541`.

OPC UA stack:


OPC UA Security

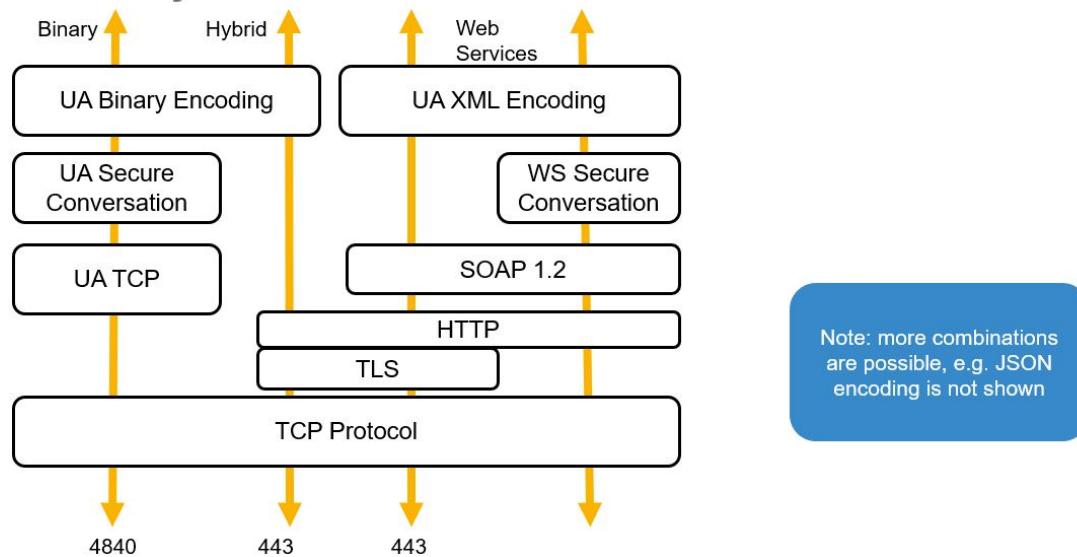

In reference to the above image the demo matches the left arrow:

- UA binary encoding is used
- UA Secure conversation with security policy Basic256Sha256 and Sign and Encrypt mode
- on top of TCP

OPC-UA and SSS Integration

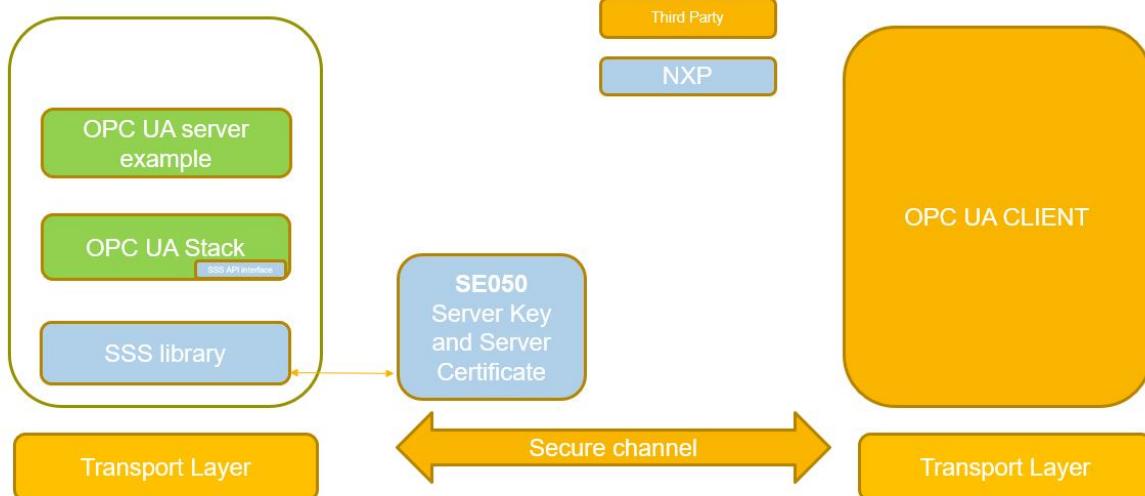

The crypto functionality (as defined by Basic256Sha256) is handled as follows:

- AsymmetricSignatureAlgorithm_RSA-PKCS15-SHA2-256: RSA Sign operation done by SE050
- AsymmetricEncryptionAlgorithm_RSA-OAEP-SHA: RSA Decrypt operation done by SE050
- Symmetric crypto operations are handled by the OPC UA stack on the host micro

Build Open62541 server and client examples

1) Build server and client example

```
cd simw-top
python3 scripts/create_cmake_projects.py
cd ../../simw-top_build/imx_native_se050_t1oi2c
cmake -DWithOPCUA_open62541:BOOL=ON -DHostCrypto:STRING=MBEDTLS -
      -DWithSharedLIB:BOOL=OFF .
cmake --build .
make install
ldconfig /usr/local/lib
```

Note: Replace imx_native_se050_t1oi2c with raspbian_native_se050_t1oi2c when building for Raspberry Pi.

1) Server and client binaries are copied to the simw-top/tools folder

Test Open62541 server and client examples

- 1) Client/Server keys are available in simw-top\demos\opc_ua\credentials\. Optionally you can regenerate the client/server keys with the following command

```
cd simw-top/demos/opc_ua/scripts
python3 createOPCUACredentials_Optional.py

OPU UA mandates the host name to be part of the subjectAltName in the server_
certificate.
The default server certificate provided with the package uses hostname 'localhost'
'.
To create a completely new set of credentials with a specific server hostname /_
ip-address run
createOPCUACredentials_Optional.py script as

python3 createOPCUACredentials_Optional.py <server_hostname>      # Default <server_
<hostname> = localhost
```

- 2) Refer to *CLI Tool* for ssscli tool setup. Using ssscli tool, provision server certificate and key into SE050 and create a reference pem file for server key

```
cd simw-top/demos/opc_ua/scripts

python3 provisionOPCUAServer.py 127.0.0.1:8050 jrcpv2      #On Windows
OR
python3 provisionOPCUAServer.py                                #On iMX6 / RaspberryPi
```

- 3) Start opc ua server

```
cd simw-top/demos/opc_ua/scripts

python3 open62541Server.py jrcpv2 127.0.0.1:8050 <certificate>  #On Windows
OR
python3 open62541Server.py <certificate>                      #On iMX6 /_
RaspberryPi

When using Open62541 client:
    <certificate> is located at simw-top\demos\opc_ua\credentials\open62541_
client_cert.der
When using UAexpert client:
    <certificate> is located at uaexpert\PKI\own\certs\uaexpert.der

Passing "none" for <certificate>, will make the server accept all client_
certificates.
```

- 4) Start opc ua client

```
cd simw-top/demos/opc_ua/scripts
python3 open62541Client.py opc.tcp://127.0.0.1:4840

On successful connection, value of the object "Sensor1" is read from server and_
displayed.
```

- 5) UaExpert client can also be used to test the Open62541 server.

- For testing with UaExpert client, root certificate needs to be copied to UaExpert trusted list of certificates,

- Go to UaExpert -> Settings -> Manage Certificates -> Trusted (Tab) -> Open Certificate Location and copy the file simw-top\demos\opc_ua\credentials\open62541_rootCA_cert.der
- **Also disable following errors in UaExpert configurations.**
 - i. UaExpert -> Settings -> Configure UaExpert -> General.DisableError.CertificateIssuerRevocationUnknown -> true
 - ii. UaExpert -> Settings -> Configure UaExpert -> General.DisableError.CertificateRevocationUnknown -> true
- **Add the server details to connect. UaExpert -> Server -> Add -> Advanced (Tab). Add details in**
 - i. EndPoint Url (opc.tcp://<SERVER_IP>:4840/)
 - ii. Security Policy as Basic256Sha256
 - iii. Message Security Mode as Sign & Encrypt
- Added server will appear in project tab. Right click on server -> Connect.
- On successful connection, the client objects should appear in UaExpert address space.
- To change the value of object “Sensor1”, select the object “Sensor1” in address space. In the Attribute section, select “value” attribute and enter the new value.

Known Limitations

- 1) Client certificates are self signed certificates. Not tested with root ca signed.
- 2) No root certificate can be given as input to command line Open62541 client. So any server certificate is accepted.

5.6 ARM PSA Example

5.6.1 PSA Non Secure Example

This example is to demonstrate how to use PSA library APIs to perform a Sign/Verify operations.

Pre-requisites

You need to build PSA-ALT library for TrustZone before compiling this application code.

Refer to [Section 8.3 Platform Security Architecture](#).

PSA Operation Examples

- Generating asymmetric keys.

```
psa_key_id_t key_id = PSA_ALT_ITS_SE_FLAG | 0x00181001;
psa_key_attributes_t attributes = PSA_KEY_ATTRIBUTES_INIT;
psa_set_key_usage_flags(&attributes,
    PSA_KEY_USAGE_ENCRYPT | PSA_KEY_USAGE_DECRYPT | PSA_KEY_USAGE_EXPORT | PSA_
    KEY_USAGE_SIGN_HASH |
    PSA_KEY_USAGE_VERIFY_HASH);
psa_set_key_algorithm(&attributes, alg);
psa_set_key_type(&attributes, PSA_KEY_TYPE_RSA_KEY_PAIR);
```

(continues on next page)

(continued from previous page)

```

psa_set_key_bits(&attributes, key_bits);
psa_set_key_lifetime(&attributes, lifetime);
psa_set_key_id(&attributes, key_id);

LOG_I("Generating RSA-%d key", key_bits);

status = psa_generate_key(&attributes, &key_handle);

```

- Performing Sign-Verify operations.

```

uint8_t hash[32]          = {1};
size_t hashLen           = sizeof(hash);
uint8_t signature[256]    = {0};
size_t sigLen            = sizeof(signature);

status = psa_sign_hash(
    key_handle, PSA_ALG_RSA_PKCS1V15_SIGN(PSA_ALG_SHA_256), hash, hashLen,
    signature, sizeof(signature), &sigLen);
if (status != 0) {
    LOG_E("Signing failed");
    goto cleanup;
}
else {
    LOG_I("Signing success");
}

status = psa_verify_hash(key_handle, PSA_ALG_RSA_PKCS1V15_SIGN(PSA_ALG_SHA_256),
    hash, hashLen, signature, sigLen);
if (status != 0) {
    LOG_E("Verification failed");
    goto cleanup;
}
else {
    LOG_I("Verification success");
}

```

Building Example

This example would run in normal world and must link with the secure world PSA library so that definitions for veneer APIs can be found. Build this example with the following CMake configurations:

- Host=lpcxpresso55s_ns
- HostCrypto=MBEDCRYPTO
- RTOS=Default
- SMCOM=T1oI2C
- PROJECT=psa_nonsecure

5.7 SE05X Examples

5.7.1 SE05X Minimal example

This project gets available memory from secure element. This is a good starting point to work with SE05X at low level.

Building the Demo

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)
- Project: se05x_Minimal

Running the Example

If you have built a binary, flash the binary on to the board and reset the board.

If you have built an *exe* to be run from Windows using VCOM, run as:

```
se05x_Minimal.exe <PORT NAME>
```

Where <PORT NAME> is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_Minimal
```

Console output

If everything is successful, the output will be similar to:

```
App    :INFO :mem=32767
App    :INFO :ex_sss Finished
```

5.7.2 SE05X Get Info example

This project can be used to get SE05X platform information with or without applet installed.

Building the Demo

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)
- Project: se05x_GetInfo

Running the Example

If you have built a binary, flash the binary on to the board and reset the board.

If you have built an *exe* to be run from Windows using VCOM, run as:

```
se05x_GetInfo.exe <PORT NAME>
```

Where <PORT NAME> is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_GetInfo
```

Console output

If everything is successful, the output will be similar to:

```
App :WARN :#####
App :INFO :uid (Len=18)
      A0 A1 A2 A3    A4 A5 A6 A7    A8 A9 AA AB    AC AD AE AF
      B0 B1
App :INFO :Running    se05x_GetInfo.exe
App :INFO :Using PortName='127.0.0.1:8050' (gszSocketPortDefault)
App :INFO :If you want to over-ride the selection, use ENV=EX_SSS_BOOT_SSS_PORT or_
→pass in command line arguments.
smCom :INFO :Opening connection to JRCP server on 127.0.0.1:8050
sss :WARN :Communication channel is Plain.
sss :WARN :!!!Not recommended for production use.!!!
App :WARN :#####
App :INFO :Applet Major = 5
App :INFO :Applet Minor = 12
App :INFO :Applet patch = 0
App :INFO :AppletConfig = 3FFF
App :INFO :With     ECDA
App :INFO :With     ECDSA_ECDH_ECDHE
App :INFO :With     EDDSA
App :INFO :With     DH_MONT
App :INFO :With     HMAC
App :INFO :With     RSA_PLAIN
App :INFO :With     RSA_CRT
App :INFO :With     AES
App :INFO :With     DES
App :INFO :With     PBKDF
App :INFO :With     TLS
App :INFO :With     MIFARE
App :INFO :With     I2CM
App :INFO :Internal = FFFF
App :WARN :#####
App :INFO :Tag value - proprietary data 0xFE = 0xFE
App :INFO :Length of following data 0x45 = 0x45
App :INFO :Tag card identification data (Len=2)
      DF 28
App :INFO :Length of card identification data = 0x42
App :INFO :Tag configuration ID (Must be 0x01) = 0x01
App :INFO :Configuration ID (Len=12)
      00 02 A4 A4    71 66 0B 13    B9 F3 AA DE
```

(continues on next page)

(continued from previous page)

```

App :INFO :OEF ID (Len=2)
A4 A4
App :INFO :Tag patch ID (Must be 0x02) = 0x02
App :INFO :Patch ID (Len=8)
00 00 00 00 00 00 00 00
App :INFO :Tag platform build ID1 (Must be 0x03) = 0x03
App :INFO :Platform build ID (Len=24)
4A 33 52 33 35 31 30 32 39 42 34 31 31 31 30 30
30 30 30 30 30 30 30 30
App :INFO :JCOP Platform ID = J3R351029B411100
App :INFO :Tag FIPS mode (Must be 0x05) = 0x05
App :INFO :FIPS mode var = 0x00
App :INFO :Tag pre-perso state (Must be 0x07) = 0x07
App :INFO :Bit mask of pre-perso state var = 0x00
App :INFO :Tag ROM ID (Must be 0x08) = 0x08
App :INFO :ROM ID (Len=8)
52 4F 4D 5F 5F 49 44
App :INFO :Status Word (SW) (Len=2)
90 00
App :INFO :se05x_GetInfoPlainApplet Example Success !!!...
App :WARN :#####
App :INFO :cplc_data.IC_fabricator (Len=2)
47 90
App :INFO :cplc_data.IC_type1 (Len=2)
D3 21
App :INFO :cplc_data.Operating_system_identifier (Len=2)
47 00
App :INFO :cplc_data.Operating_system_release_date (Len=2)
00 00
App :INFO :cplc_data.Operating_system_release_level (Len=2)
00 00
App :INFO :cplc_data.IC_fabrication_date (Len=2)
74 74
App :INFO :cplc_data.IC_Serial_number (Len=4)
6E 6E 6E 62
App :INFO :cplc_data.IC_Batch_identifier (Len=2)
62 62
App :INFO :cplc_data.IC_module_fabricator (Len=2)
00 00
App :INFO :cplc_data.IC_module_packaging_date (Len=2)
00 00
App :INFO :cplc_data.ICC_manufacturer (Len=2)
00 00
App :INFO :cplc_data.IC_embedding_date (Len=2)
00 00
App :INFO :cplc_data.IC_OS_initializer (Len=2)
57 58
App :INFO :cplc_data.IC_OS_initialization_date (Len=2)
59 4E
App :INFO :cplc_data.IC_OS_initialization_equipment (Len=4)
4E 4E 4E 4E
App :INFO :cplc_data.IC_personalizer (Len=2)
00 00
App :INFO :cplc_data.IC_personalization_date (Len=2)
00 00
App :INFO :cplc_data.IC_personalization_equipment_ID (Len=4)
00 00 00 00

```

(continues on next page)

(continued from previous page)

```
App :INFO :cplc_data.SW (Len=2)
90 00
App :INFO :ex_sss Finished
Press any key to continue . . .
```

5.7.3 APDU Player Demo

This demo is to transceive raw APDUs to the SE. It takes a command line argument as the input file containing APDUs to be sent, followed by the response. An example of command to be in the file is /send 00A4040000 6F108408A00000015100000A5049F6501FF9000

In this, the 00A4040000 is the command to be transmitted and 6F108408A00000015100000A5049F6501FF9000 is the expected response.

Note: Ensure that authentication with the SE is either plain or platform SCP This demo only supports only SE05x devices

How to use

Run the demo as apdu_player_demo [Input-file] <Port>

5.7.4 Using policies for secure objects

This demo is to demonstrate the use of policies for secure objects. Object policies such as can_Sign or can_Encrypt can be used to restrict operations other than the given policies. Objects inside the secure element are linked to a particular authentication object, based on communication authentication type selected. Objects inside the secure element linked with one authentication object cannot be used when session is open with another authentication type.

Authentication Object ID to be linked with secure object can be selected as

```
#if (SSS_HAVE_SE05X_AUTH_USERID) || (SSS_HAVE_SE05X_AUTH_USERID_PLATFSCP03) //UserID_
→Session
#define EX_LOCAL_OBJ_AUTH_ID EX_SSS_AUTH_SE05X_UserID_AUTH_ID
#elif (SSS_HAVE_SE05X_AUTH_NONE) || (SSS_HAVE_SE05X_AUTH_PLATFSCP03) //No auth
#define EX_LOCAL_OBJ_AUTH_ID EX_SSS_AUTH_SE05X_NONE_AUTH_ID
#elif (SSS_HAVE_SE05X_AUTH_AESKEY) || (SSS_HAVE_SE05X_AUTH_AESKEY_PLATFSCP03) //AESKey
#define EX_LOCAL_OBJ_AUTH_ID EX_SSS_AUTH_SE05X_APPLETSCP_AUTH_ID
#elif (SSS_HAVE_SE05X_AUTH_ECKEY) || (SSS_HAVE_SE05X_AUTH_ECKEY_PLATFSCP03) //ECKey_
→session
#define EX_LOCAL_OBJ_AUTH_ID EX_SSS_AUTH_SE05X_ECKEY_ECDSA_AUTH_ID
#endif
```

Note: Ensure that the authentication object ID in policy set matches the authentication type.

Sign Policy

Create a policy set using the authentication object ID

```

/*Logic to pass sign & verifypolicy*/
const int allow_sign = 1;
const int allow_verify = 0;

/* doc:start:allow-policy-sign-part1 */
/* Policies for key */
const sss_policy_u key_withPol = {
    .type = KPolicy_Asym_Key,
    /*Authentication object based on SE05X_AUTH*/
    .auth_obj_id = EX_LOCAL_OBJ_AUTH_ID,
    .policy = {
        /*Asymmetric key policy*/
        .asymkey = {
            /*Policy for sign*/
            .can_Sign = allow_sign,
            /*Policy for verify*/
            .can_Verify = allow_verify,
            /*Policy for encrypt*/
            .can_Encrypt = 1,
            /*Policy for decrypt*/
            .can_Decrypt = 1,
            /*Policy for Key Derivation*/
            .can_KD = 1,
            /*Policy for wrapped object*/
            .can_Wrap = 1,
            /*Policy to re-write object*/
            .can_Write = 1,
            /*Policy for reading object*/
            .can_Read = 1,
            /*Policy to use object for attestation*/
            .can_Attest = 1,
        }
    }
};

/* Common rules */
const sss_policy_u common = {
    .type = KPolicy_Common,
    /*Authentication object based on SE05X_AUTH*/
    .auth_obj_id = EX_LOCAL_OBJ_AUTH_ID,
    .policy = {
        .common = {
            /*Secure Messaging*/
            .req_Sm = 0,
            /*Policy to Delete object*/
            .can_Delete = 1,
            /*Forbid all operations on object*/
            .forbid_All = 0,
        }
    }
};

/* create policy set */

```

(continues on next page)

(continued from previous page)

```

sss_policy_t policy_for_ec_key = {
    .nPolicies = 2,
    .policies = { &key_withPol, &common }
};

/* doc:end:allow-policy-sign-part1 */

status = sss_key_object_init(&object, &pCtx->ks);
if (status != kStatus_SSS_Success) {
    LOG_E("sss_key_object_init Failed!!!!");
    goto exit;
}

status = sss_key_object_allocate_handle(
    &object, keyId, kSSS_KeyPart_Pair, kSSS_CipherType_EC_NIST_P, keylen, kKeyObject_
    ↵Mode_Persistent);
if (status != kStatus_SSS_Success) {
    LOG_E("key_object_allocate_handle Failed!!!!");
    goto exit;
}

/* doc:start:allow-policy-sign-part2 */
status = sss_key_store_generate_key(
    &pCtx->ks,
    &object,
    ECC_KEY_BIT_LEN,
    &policy_for_ec_key);
/* doc:end:allow-policy-sign-part2 */

```

Using PCR Object

PCR is a special secure object which stores 32-byte data. A PCR object can be used to ensure that secure objects inside the SE cannot be used if the PCR object value is altered.

We can assign a PCR policy to a secure object as given in the following sample code

```

SSS_HAVE_SE05X_VER_GTE_06_00
uint8_t pcr_expected_value[] = { 0x87, 0xD3, 0xE3, 0x93, 0x19, 0x8F, 0x5C, 0x80, 0xE0,
    ↵ 0xBC, 0x9B, 0xC9, 0x82, 0x00, 0x1F, 0xB0, 0xEE, 0x20, 0x1C, 0x27, 0x0B, 0x6D, 0xC8,
    ↵ 0x84, 0x52, 0xE4, 0x13, 0xA3, 0x25, 0x56, 0x81, 0x75 };
e
uint8_t pcr_expected_value[] = { 0x89, 0x51, 0x56, 0x9f, 0x41, 0x5f, 0xeb, 0x4f, 0xb6,
    ↵ 0x37, 0x02, 0x86, 0xe7, 0xdd, 0xa0, 0x99, 0x33, 0x6c, 0x46, 0x36, 0xbc, 0xbb, 0x4c,
    ↵ 0x11, 0x04, 0x10, 0xa, 0x86, 0x0d, 0x0c, 0xa4, 0x14 };
if

size_t pcr_expected_value_size = sizeof(pcr_expected_value);
LOG_I("Setting PCR Expected value as:");
LOG_AU8_I(pcr_expected_value, pcr_expected_value_size);

const sss_policy_u common = {
    .type = KPolicy_Common,
    .auth_obj_id = TST_LOCAL_OBJ_AUTH_ID,
    .policy = {
        .common = {

```

(continues on next page)

(continued from previous page)

```

        .req_Sm = 0,
        .can_Delete = 1
    }
}

};

const sss_policy_u file = {
    .type = KPolicy_File,
    .auth_obj_id = TST_LOCAL_OBJ_AUTH_ID,
    .policy = {
        .file = {
            .can_Read = 1,
            .can_Write = 1
        }
    }
};

sss_policy_u pcr1 = {
    .type = KPolicy_Common_PCR_Value,
    .auth_obj_id = TST_LOCAL_OBJ_AUTH_ID,
    .policy = {
        .common_pcr_value = {
            .pcrObjId = 0x7fffffff,
        }
    }
};
memset(pcr1.policy.common_pcr_value.pcrExpectedValue,
       0x00,
       sizeof(pcr1.policy.common_pcr_value.pcrExpectedValue));
memcpy(pcr1.policy.common_pcr_value.pcrExpectedValue, pcr_expected_value, pcr_
       ↪expected_value_size);

sss_policy_t policy_for_binary_object = {
    .nPolicies = 3,
    .policies = { &common, &pcr1, &file }
};

/* clang-format on */
NVM_RESET();

status = sss_key_store_set_key(&gtCtx.ks,
                               &gtCtx.key,
                               binary_object,
                               sizeof(binary_object),
                               sizeof(binary_object),
                               &policy_for_binary_object,
                               sizeof(policy_for_binary_object));

```

Note: Ensure that the pcrObjID in PCR policy is the same object ID at which the PCR is stored.

Console output

If everything is successful, the output will be similar to:

```
App :INFO :This example is to demonstrate the use of policies for secure objects
App :INFO :Signing was succesful
App :INFO :Example Success
App :INFO :ex_sss Finished
```

5.7.5 Get Certificate from the SE

This tool is to retrieve Trust provisioned certificates from the SE. It will read the certificate and store it on the file system. It takes as argument, the keyID at which certificate is stored and the file path where to save the certificate on the file system.

Note: It can only be compiled when Host Crypto is mbedTLS.

Building the example

Use the following CMake configurations to compile the example

- CMake configurations: `WithHostCrypto_MBEDTLS: ON`
- Project: `se05x_GetCertificate`

How to use

Run the tool as:

```
se05x_GetCertificate <32-bit keyID> </path/to/file> <port>
```

- The keys ID has to be in HEX format.
- For systems connecting with T=1 over I2C, the port parameter can be skipped.
- The certificate will be stored in *PEM* format at the specified path on the file system.

5.7.6 SE05X Rotate PlatformSCP Keys Demo

This project is to demonstrate rotation of Platform SCP03 keys for IOT SSD. The Platform SCP03 keys used during initial authentication can be replaced using this example. In this example, we will rotate existing SCP03 keys to new keys and then revert back to the old keys.

Once the key rotation is successful on the IC a file is created `plain_scp.txt`. This file contains updated key values written to IC. For the next authentication if the above file is available, the keys are taken from the file. If the file is not present, the keys which are pre-compiled are picked up for authentication.

Following are the file paths for different platforms:

For Android

```
#define EX_SSS_SCP03_FILE_DIR "/data/vendor/SE05x/"
#define EX_SSS_SCP03_FILE_PATH EX_SSS_SCP03_FILE_DIR "plain_scp.txt"
```

For Linux

```
#define EX_SSS SCP03 FILE DIR "/tmp/SE05X/"
#define EX_SSS SCP03 FILE PATH EX_SSS SCP03 FILE DIR "plain_scp.txt"
```

For Windows

```
#define EX_SSS SCP03 FILE DIR "C:\\nxp\\SE05X\\"
#define EX_SSS SCP03 FILE PATH EX_SSS SCP03 FILE DIR "plain_scp.txt"
```

Note: For Android based platforms, it is important that the keymaster service has access to the PlatfSCP03 keys file while system boot. Be sure to update sepolicy accordingly.

Prerequisites

Since this example is portable across various platforms, the needs are different.

See Build Plug & Trust middleware stack. (Refer *Building / Compiling*)

Configuring the Demo

New Platform SCP03 keys are defined as following. Update your keys here.

```
#define EX_SSS_AUTH_NEW_ENC_KEY
    \
    {
        \
        \
            0x40, 0x41, 0x42, 0x43, 0x44, 0x45, 0x46, 0x47, 0x48, 0x49, 0x4A, 0x4B, 0x4C,
    ↵0x4D, 0x4E, 0x4F \
    }

#define EX_SSS_AUTH_NEW_MAC_KEY
    \
    {
        \
        \
            0x40, 0x41, 0x42, 0x43, 0x44, 0x45, 0x46, 0x47, 0x48, 0x49, 0x4A, 0x4B, 0x4C,
    ↵0x4D, 0x4E, 0x4F \
    }

#define EX_SSS_AUTH_NEW_DEK_KEY
    \
    {
        \
        \
            0x40, 0x41, 0x42, 0x43, 0x44, 0x45, 0x46, 0x47, 0x48, 0x49, 0x4A, 0x4B, 0x4C,
    ↵0x4D, 0x4E, 0x4F \
    }
```

Old Platform SCP03 keys are defined as following. Make sure these match the ones in SE05X.

```
uint8_t OLD_KEY_ENC[] = EX_SSS_AUTH_SE05X_KEY_ENC;
uint8_t OLD_KEY_MAC[] = EX_SSS_AUTH_SE05X_KEY_MAC;
uint8_t OLD_KEY_DEK[] = EX_SSS_AUTH_SE05X_KEY_DEK;
```

The following code reverts to old Platform SCP03 keys. If you do not wish to revert to old keys and want to use the new keys, comment out the following line from the example. For development testing, we rollback to original keys. It is left to customer to comment out this line.

```
status = tp_PlatformKeys(OLD_KEY_ENC, OLD_KEY_MAC, OLD_KEY_DEK, pCtx);
```

Building the Demo

Use the following configurations in CMake:

- SE05X_Auth_PlatformSCP03: ON

Build project: se05x_RotatePlatformSCP03Keys

Running the Example

If you have built a binary, flash the `se05x_RotatePlatformSCP03Keys` binary on to the board and reset the board.

If you have built an *exe* to be run from PC using VCOM, run as:

```
se05x_RotatePlatformSCP03Keys.exe <PORT NAME>
```

Where **<PORT NAME>** is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_RotatePlatformSCP03Keys
```

Console output

If everything is setup correctly the output would be as follows


```
App:INFO :Congratulations !!! Key Rotation Successful!!!!
App:INFO :Congratulations !!! Key Rotation Successful!!!!
App:INFO :ex_sss Finished
```

5.7.7 I2C Master Example


This page is regarding the documentation on I2CM, for more information on I2CM Transaction, See [Section 3.6 I2CM / Secure Sensor](#)

Prerequisites

- Bring Up Hardware. (Refer *Development Platforms*)
- Connection to be done for I2C Master example.

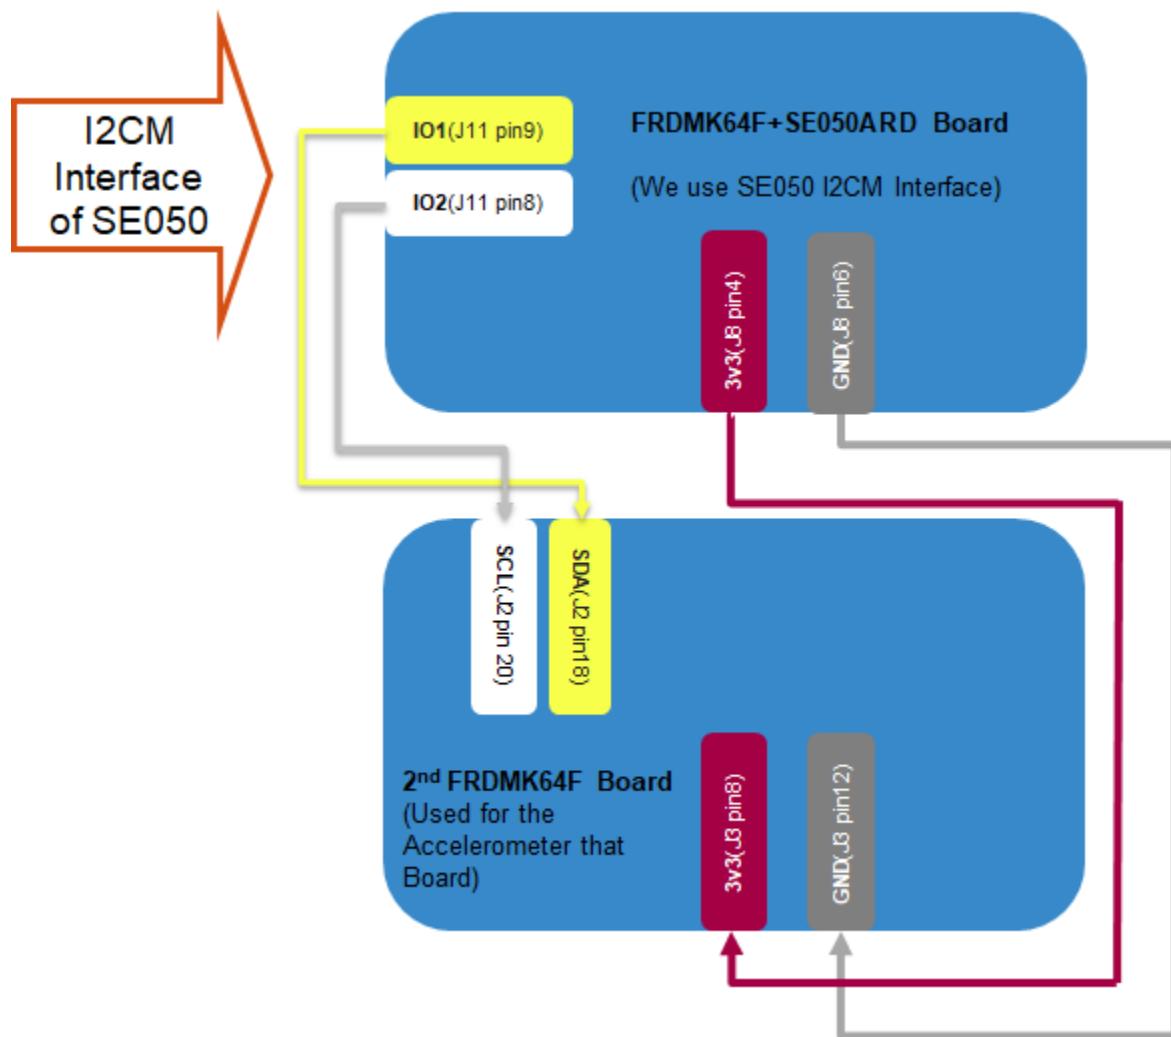

Here is a photograph of above wiring diagram.

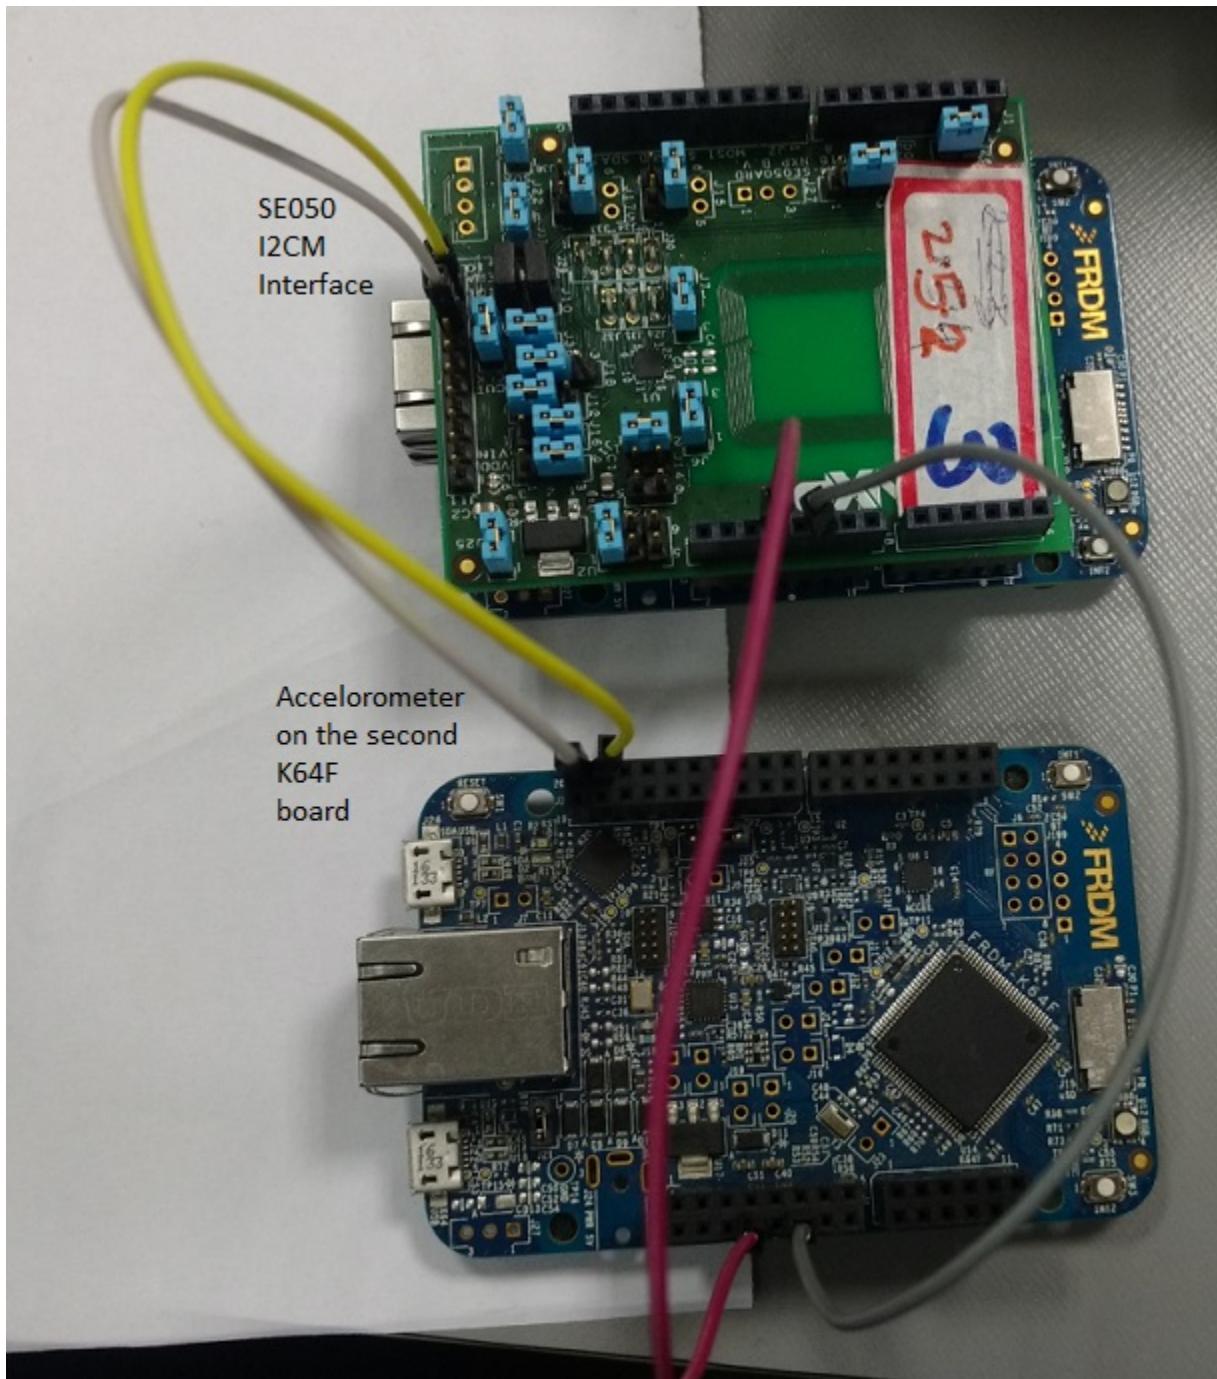

Note:

- We are using 2nd freedom K64F board only for connecting Accelerometer device to I2CM.
- Short Jumper J9 & J10 of se050ARD board.

Disable K64F on board 2

Warning: If the K64F of the 2nd board doing some operations on I2C Pins, this demo would not work.

Follow below steps to make this demo work.

- Flash `frdmk64f_nop_wfi.bin` binary located at `demos/se05x/se05x_I2cMaster` directory to K64F board.
- This binary will put K64F in unoperation state and we will have easy access to Accelerometer through I2C pins.

Below is the c code


```
int main(void)
{
    /* Init board hardware. */
    BOARD_InitPins();
    BOARD_BootClockRUN();
    BOARD_InitDebugConsole();

    __disable_irq();
    while (1)
    {
        __disable_irq();
        __WFI();
    }
}
```

About the Example

This example reads Accelerometer data via the I2C master interface.

The Accelerometer on other K64F is used as an I2C Slave.

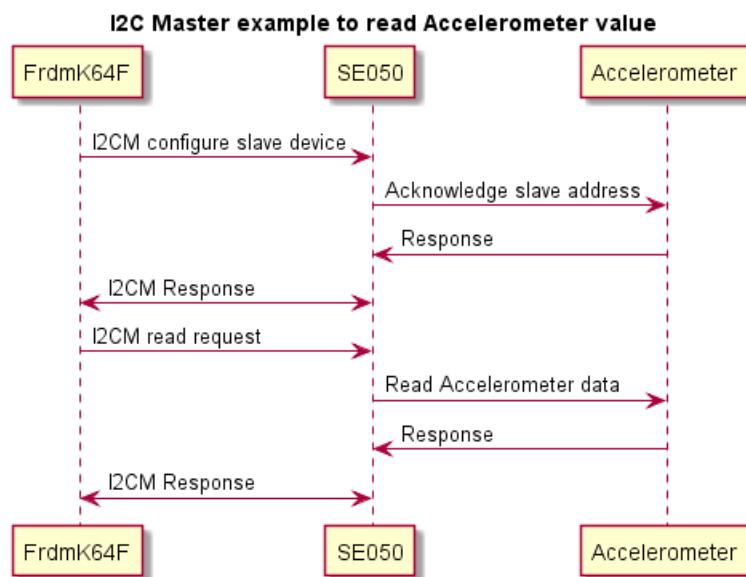

It uses the following APIs and data types:

- `Se05x_i2c_master_txn()`
- `Se05x_i2c_master_attst_txn()`
- `kSE05x_I2CM_Configure` from `SE05x_I2CM_TLV_type_t`
- `kSE05x_I2CM_Write` from `SE05x_I2CM_TLV_type_t`
- `kSE05x_I2CM_Read` from `SE05x_I2CM_TLV_type_t`
- `kSE05x_I2CM_Baud_Rate_400Khz` from `SE05x_I2CM_Baud_Rate_t`

Running the Demo

- 1) Import project `cmake_project_frdmk64f` from `simw-top/projects` directory.
- 2) Mention `BUILD_TARGET` as `se05x_I2cMaster` or `se05x_I2cMasterWithAttestation` in `Debug/Makefile`.
- 3) Build the project and flash binary inside `FRDMK64F_SE050ARD` board.
- 4) Either press the reset button on your board or launch the debugger in your IDE to begin running the demo.
- 5) Rotate second K64F in any direction.

If everything is setup correctly the output would be as follows:

```
App:INFO :I2CM example to read Accelerometer value
App:INFO :x =    113 , y =    -73 , z =   2118
App:INFO :x =    109 , y =    -67 , z =   2103
App:INFO :x =    108 , y =    -68 , z =   2120
App:INFO :x =    117 , y =    -69 , z =   2109
App:INFO :x =    117 , y =    -71 , z =   2105
App:INFO :x =    111 , y =    -71 , z =   2108
App:INFO :x =    115 , y =    -72 , z =   2104
App:INFO :x =    117 , y =    -69 , z =   2122
App:INFO :x =    115 , y =    -73 , z =   2120
App:INFO :x =    115 , y =    -74 , z =   2114
App:INFO :I2CM test completed !!!...
```

5.7.8 SE05X WiFi KDF Example

This project is to demonstrate Password based KDF (PBKDF) operation using SE05X. This operation is used in deriving Pre-Shared key (PSK) for WiFi ssid using stored passwords.

Building the Demo

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))
- Project: `ex_se05x_WiFiKDF_inject`
- Project: `ex_se05x_WiFiKDF_derive`

Running the Example

If you have built a binary, first flash the `ex_se05x_WiFiKDF_inject` binary on to the board and reset the board. Then flash `ex_se05x_WiFiKDF_derive` binary and reset the board.

If you have built an *exe* to be run from PC using VCOM, run as:

```
ex_se05x_WiFiKDF_inject.exe <PORT NAME>
ex_se05x_WiFiKDF_derive.exe -s <ssid_name> <PORT NAME>
```

Where **<PORT NAME>** is the VCOM COM port and **<ssid_name>** is the name of SSID for which you want to derive the PSK.

Console output

During injection, if everything is successful, the output will be similar to:

```
App :INFO :Injecting wifi_password='some-wifi-password'
App :INFO :ex_sss Finished
```

While deriving the key, if everything is successful, the output will be similar to:

```
App :INFO :Deriving PBKDF2 for wifi_ssid='some-wifi-ssid', WIFI_COUNT='4096'
App :INFO :wifi_derivedKey (Len=32)
C9 A6 69 F9      6D A2 74 A1      41 43 A9 ED      D1 8F 68 1B
B1 3E 6B 8B      F0 16 02 7A      7D 72 BF 0E      0C 53 CD 7C

# Data for /etc/wpa_supplicant/wpa_supplicant.conf
network={
    ssid="some-wifi-ssid"
    psk=c9a669f96da274a14143a9edd18f681bb13e6b8bf01627a7d72bfec53cd7c
}
App :INFO :Done
App :INFO :ex_sss Finished
```

5.7.9 SE05X Export Transient objects

This example does following steps:

- Generate a Transient ECC Key
- Export that to a blob
- Sign some dummy data with that key
- Store the signature in local file for future use.

After running this example, you can run [Section 5.7.10 SE05X Import Transient objects](#)

Note: This example needs File system access and hence it is not applicable for embedded platforms.

The exported files are current working directory.

Visual Studio - Debug settings

Kindly set debug Working Directory to \$(TargetDir) in project's debug stettings. This ensures that the examples [SE05X Export Transient objects](#) and [SE05X Import Transient objects](#) work seamlessly.

Console output

If everything is successful, the output will be similar to:

```
App :INFO :Running Example ex_sss_export.c
App :INFO :Export ec key to 'export_serializedECKey.bin'!!!
App :INFO :Signing Successful !!!
App :INFO :Export signature key to 'export_serializedSignedData.bin'.
App :INFO :ex_sss_export Example Success !!!...
App :INFO :ex_sss Finished
```

5.7.10 SE05X Import Transient objects

Before running this example, please run [Section 5.7.9 SE05X Export Transient objects](#)

This example does following steps:

- Re-Generates a Transient ECC Key at the same location as created by [SE05X Export Transient objects](#)
- Tries to verify previously signed data. (This must fail, because key is over-written)
- Imports previously exported key inside the SE.
- Tries to verify previously signed data. (This must be seccessful, because it is the same key)

Note: This example needs File system access and hence it is not applicable for embedded platforms.

The exported files are current working directory.

Visual Studio - Debug settings

Kindly set debug Working Directory to \$(TargetDir) in project's debug stettings. This ensures that the examples [SE05X Export Transient objects](#) and [SE05X Import Transient objects](#) work seamlessly.

Console output

If everything is successful, the output will be similar to:

```
App :INFO :Running Example ex_sss_import.c
App :INFO :Object exists!!!
App :INFO :This verify must fail, because keys are different
App :INFO :Reading contents form 'export_serializedSignedData.bin'
App :WARN :Verification Failed!
App :WARN :nxEnsure:'status == kStatus_SSS_Success' failed. At Line:196
  ↵Function:ExampleDoVerify
App :INFO :Reading contents form 'export_serializedECKey.bin'
App :INFO :This verify must pass, because keys are same
App :INFO :Reading contents form 'export_serializedSignedData.bin'
```

(continues on next page)

(continued from previous page)

```
App :INFO :Verification Successful.
App :INFO :ex_sss_import Example Success !!!...
App :INFO :ex_sss Finished
```

5.7.11 Import External Object Prepare

Import External Object command allows the user to import an external object wrapped with a secure ECKey_Auth context. A session is not required to execute this command, the ECKey_Auth parameters are provided with the wrapped WriteSecureObject command. The applet will use ECKey_Auth parameters and derive session keys to unwrap the command and execute it. ImportExternalObject command works in its own session. It will open an ECKey session, write the secure object and close the session.

In this example, we prepare a complete raw APDU to be sent to SE05x. A WriteSecureObject command needs to be prepared which will be wrapped and sent as a part of ImportExternalObject command. For an example we are preparing WriteSymmKey command as :

```
/* Symmetric Key */
/* clang-format off */
uint8_t keyValue[] = {0x48, 0x45, 0x4C, 0x4C, 0x4F, 0x48, 0x45, 0x4C, 0x4C, 0x4F,_
↪0x48, 0x45, 0x4C, 0x4C, 0x4F, 0x31};
/* clang-format on */
/* API to create buffer */
pse05xWriteBufferSessionCtx->fp_TXn = &se05x_ImportExtObjCreateAPDU;
int index
    = 0;

sm_status = Se05x_API_WriteSymmKey(pse05xWriteBufferSessionCtx,
    NULL,
    SE05x_MaxAttempts_NA,
    __LINE__,
    SE05x_KeyID_KEK_NONE,
    keyValue,
    sizeof(keyValue),
    kSE05x_INS_NA,
    kSE05x_SymmKeyType_AES);
if (sm_status != SM_OK) {
    LOG_E("Failed to create buffer");
    status = kStatus_SSS_Fail;
    goto exit;
}

/* WriteSecureObject API will prepare complete APDU.
 * We need to skip initial CLA INS P1 P2 and use just the TLVs
 *
 * The length is determined by the first length byte. If it
 * is 0x00, the next two bytes are the length, otherwise that
 * byte is the length.
 *
 * Determine the length here and accordingly determine the TLV.
 */
if (gTxBuffer[4] == 0x00) {
    WriteSymmKeyAPDU_len = ((gTxBuffer[5] << 8) && 0xFF00) | ((gTxBuffer[6]) && 0xFF);
    index
        = 7;
}
else {
    WriteSymmKeyAPDU_len = gTxBuffer[4];
```

(continues on next page)

(continued from previous page)

```

    index          = 5;
}
if (WriteSymmKeyAPDU_len > sizeof(WriteSymmKeyAPDU)) {
    LOG_E("Insufficient buffer");
    status = kStatus_SSS_Fail;
    goto exit;
}
memcpy(WriteSymmKeyAPDU, &gTxBuffer[index], WriteSymmKeyAPDU_len);

```

```

/* This API creates an APDU buffer of the object stores it to the global buffer */
smStatus_t se05x_ImportExtObjCreateAPDU(Se05xSession_t *pwrite_apdubufferctx,
    const tlvHeader_t *hdr,
    uint8_t *cmdBuf,
    size_t cmdBufLen,
    uint8_t *rsp,
    size_t *rspLen,
    uint8_t hasle)
{
    memset(gTxBuffer, 0, sizeof(gTxBuffer));
    size_t i = 0;
    memcpy(&gTxBuffer[i], hdr, sizeof(*hdr));
    smStatus_t ret = SM_OK;
    i += sizeof(*hdr);
    if (cmdBufLen > 0) {
        // The Lc field must be extended in case the length does not fit
        // into a single byte (Note, while the standard would allow to
        // encode 0x100 as 0x00 in the Lc field, nobody who is sane in his mind
        // would actually do that).
        if ((cmdBufLen < 0xFF) && !hasle) {
            gTxBuffer[i++] = (uint8_t)cmdBufLen;
        }
        else {
            gTxBuffer[i++] = 0x00;
            gTxBuffer[i++] = 0xFFu & (cmdBufLen >> 8);
            gTxBuffer[i++] = 0xFFu & (cmdBufLen);
        }
        memcpy(&gTxBuffer[i], cmdBuf, cmdBufLen);
        i += cmdBufLen;
    }
    if (hasle) {
        gTxBuffer[i++] = 0x00;
        gTxBuffer[i++] = 0x00;
    }
    ret      = SM_OK;
    gTxBufferLen = i;

    LOG_AU8_I(gTxBuffer, gTxBufferLen);

    return ret;
}

```

```

/* This API transforms buffer to APDU and internally calls transmit and Decrypt */
smStatus_t se05x_ImportExtObjTransformBuffer(Se05xSession_t *pSe05xSession,
    const tlvHeader_t *hdr,
    uint8_t *cmdBuf,
    size_t cmdBufLen,

```

(continues on next page)

(continued from previous page)

```

    uint8_t *rsp,
    size_t *rspLen,
    uint8_t hasle)
{
    memset(gTxBuffer, 0, sizeof(gTxBuffer));
    size_t i = 0;
    memcpy(&gTxBuffer[i], hdr, sizeof(*hdr));
    smStatus_t ret = SM_NOT_OK;
    i += sizeof(*hdr);
    if (cmdBufLen > 0) {
        // The Lc field must be extended in case the length does not fit
        // into a single byte (Note, while the standard would allow to
        // encode 0x100 as 0x00 in the Lc field, nobody who is sane in his mind
        // would actually do that).
        if ((cmdBufLen < 0xFF) && !hasle) {
            gTxBuffer[i++] = (uint8_t) cmdBufLen;
        }
        else {
            gTxBuffer[i++] = 0x00;
            gTxBuffer[i++] = 0xFFu & (cmdBufLen >> 8);
            gTxBuffer[i++] = 0xFFu & (cmdBufLen);
        }
        ENSURE_OR_GO_EXIT(cmdBufLen <= sizeof(gTxBuffer) - i);
        memcpy(&gTxBuffer[i], cmdBuf, cmdBufLen);
        i += cmdBufLen;
    }
    if (hasle) {
        gTxBuffer[i++] = 0x00;
        gTxBuffer[i++] = 0x00;
    }
    gTxBufferLen = i;

    LOG_D("Here is the buffer of Object needs to be Import");
    LOG_AU8_D(gTxBuffer, gTxBufferLen);

    ret = pSe05xSession->fp_RawTXn(
        pgSe05xSessionCtx->conn_ctx, NULL, kSSS_AuthType_None, hdr, cmdBuf, cmdBufLen,
        ↳ rsp, rspLen, hasle);
    ENSURE_OR_GO_EXIT(ret == SM_OK);
    ret = pSe05xSession->fp_DeCrypt(pSe05xSession, cmdBufLen, rsp, rspLen, hasle);
exit:
    return ret;
}

```

```

/* This API transmit the buffer in default session */
static smStatus_t se05x_ImportExtObjTransmitBuffer(void *conn_ctx,
    struct _sss_se05x_tunnel_context *pChannelCtx,
    SE_AuthType_t currAuth,
    const tlvHeader_t *hdr,
    uint8_t *cmdBuf,
    size_t cmdBufLen,
    uint8_t *rsp,
    size_t *rspLen,
    uint8_t hasle)
{
    uint8_t txBuf[SE05X_MAX_BUF_SIZE_CMD] = {0};

```

(continues on next page)

(continued from previous page)

```

size_t i = 0;
memcpy(&txBuf[i], hdr, sizeof(*hdr));
smStatus_t ret = SM_NOT_OK;
i += sizeof(*hdr);
if (cmdBufLen > 0) {
    // The Lc field must be extended in case the length does not fit
    // into a single byte (Note, while the standard would allow to
    // encode 0x100 as 0x00 in the Lc field, nobody who is sane in his mind
    // would actually do that).
    if ((cmdBufLen < 0xFF) && !hasle) {
        txBuf[i++] = (uint8_t)cmdBufLen;
    }
    else {
        txBuf[i++] = 0x00;
        txBuf[i++] = 0xFFu & (cmdBufLen >> 8);
        txBuf[i++] = 0xFFu & (cmdBufLen);
    }
    memcpy(&txBuf[i], cmdBuf, cmdBufLen);
    i += cmdBufLen;
}
else {
    if (cmdBufLen == 0) {
        txBuf[i++] = 0x00;
    }
}

if (hasle) {
    txBuf[i++] = 0x00;
    txBuf[i++] = 0x00;
}

uint32_t U32rspLen = (uint32_t)*rspLen;
ret = (smStatus_t)smCom_TransceiveRaw(conn_ctx, txBuf, (U16)i, rsp,
→ &U32rspLen);
*rspLen = U32rspLen;
return ret;
}

```

```

/* This API decrypts the response buffer */
smStatus_t se05x_ImportExtObjDecryptResponse(
    struct Se05xSession *pSessionCtx, size_t cmd_cmacLen, uint8_t *rsp, size_t_
→ *rspLength, uint8_t hasle)
{
    U16 rv = SM_NOT_OK;

    if (*rspLength >= 2) {
        rv = rsp[(*rspLength) - 2] << 8 | rsp[(*rspLength) - 1];
        if ((rv == SM_OK) && (pSessionCtx->pdynScp03Ctx != NULL)) {
#if SSS_HAVE_SCP_SCP03_SSS
            rv = nxpSCP03_Decrypt_ResponseAPDU(pSessionCtx->pdynScp03Ctx, cmd_cmacLen,
→ rsp, rspLength, hasle);
#else
            LOG_W("Decrypting without SSS_HAVE_SCP_SCP03_SSS");
            rv = SM_NOT_OK;
#endif
        }
    }
}

```

(continues on next page)

(continued from previous page)

```

#ifndef SSS_HAVE_SCP_SCP03_SSS
    else { /*Counter to be increment only in case of authentication is all kind
            ↪of SCP
                and response is not 9000 */
        if ((rv != SM_OK) && (pSessionCtx->pdynScp03Ctx != NULL)) {
            if (((pSessionCtx->pdynScp03Ctx->authType == kSSS_AuthType_AESKey) ||
                 (pSessionCtx->pdynScp03Ctx->authType == kSSS_AuthType_ECKey)) ||
            ↪ ||
                ((pSessionCtx->pdynScp03Ctx->authType == kSSS_AuthType_SCP03) &&
            ↪(cmd_cmacLen - 8) > 0)) {
                    nxpSCP03_Inc_CommandCounter(pSessionCtx->pdynScp03Ctx);
                }
            }
        }
#endif
    }
else {
    rv = SM_NOT_OK;
}

return rv;
}

```

You can call any of the `WriteSecureObject` API with your data and create the buffer.

Building

Build the project with the following configurations.

se05x_ImportExternalObjectPrepare

- Project = `se05x_ImportExternalObjectPrepare`
- SCP=SCP03_SSS
- SE05x_Auth=ECKey

How to use

Generate the raw APDU file by running the executable. Run `se05x_ImportExternalObjectPrepare` as

```
se05x_ImportExternalObjectPrepare.exe -keyid 0x7DA00003 -file eckey_ecdsa.der
↪<portName>
```

where,

- *keyid* is the authentication keyId at which ECDSA public key is stored.
- *file* is the input ECDSA keypair file (in binary format)
- *portName* is the name of the port over which to connect (COMPORT in case running over VCOM)

5.7.12 SE05X Mandate SCP example

This project demonstrates how to configure SE05X to mandate platform SCP. This can be used if you always want the communication with SE05X to be encrypted.

Note: After this example runs successfully, further communication would require Platform SCP03 encryption.

Building the Demo

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))
 - Project: se05x_MandatePlatformSCP
 - CMake configuration
- SE05X_Auth:None

Running the Example

If you have built a binary, flash the binary on to the board and reset the board.

If you have built an *exe* to be run from Windows using VCOM, run as:

```
se05x_MandatePlatformSCP.exe <PORT NAME>
```

Where <PORT NAME> is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_MandatePlatformSCP
```

5.7.13 Read object with Attestation

This example demonstrates how to read an object with attestation and parse the attested data to check various object attributes.

In this example, we use an EC NIST-P 256 keypair as the attestation key and a binary object which will be attested.

Note: The maximum size of a binary object that can be attested at a time is 500 bytes. The API available will only work on binary objects with size up to 500 bytes. To perform attestation on an object of greater size, we need to call corresponding Se05x API in a loop, verifying the obtained signature every time.

A reference implementation is available at [Reading large binary objects with attestation](#)

Building

Build the project with the following configurations.

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)
- Project: se05x_ReadWithAttestation

Running

On running the example, you would be able to see object attributes logged on the screen like:

```
App :INFO :Key att data (Len=28)
      00 F5 EF FA    0B 01 00 00    00 00 00 00    00 00 08 00
      00 00 00 00    34 00 00 01    00 00 00 00
App :INFO :Object Id 0xF5EFFA
App :INFO :Object Type 0xB
App :INFO :Type:
App :INFO : BINARY_FILE
App :INFO :Object Auth Attribute 0x1
App :INFO :Auth:
App :INFO : Not Set
App :INFO :Auth Object:
App :INFO : No authentication required
App :INFO :Policies:
App :INFO : POLICY_OBJ_ALLOW_READ
App :INFO : POLICY_OBJ_ALLOW_WRITE
App :INFO : POLICY_OBJ_ALLOW_DELETE
App :INFO :tagLen for AEAD:0x00
App :INFO :RFU bytes:0x00
App :INFO :Owner:0x0000
App :INFO :Object origin : 0x1
App :INFO :Origin:
App :INFO : EXTERNAL
App :INFO :Object Version : 0x0000
App :INFO :se05x_ReadWithAttestation Example Success !!!
App :INFO :ex_sss Finished
```

You can see the various attributes associated with the object such as object type, authentication mechanism, origin and policies.

An example of how to perform read with attestation is given below

```
/* Prepare/init attestation data structure */

sss_se05x_attst_comp_data_t comp_data[2] = {0};
sss_se05x_attst_data_t att_data = {.valid_number = 2};
/* Random data from the host to check if SE
 * answers to current attestation request and
 * not an older response is used */

/* clang-format off */
uint8_t freshness[16] = { 0x00, 0x01, 0x02, 0x03, 0x04, 0x05, 0x06, 0x07, 0x08, 0x09, 0x0a, 0x0b,
                         0x0c, 0x0d, 0x0e, 0x0f };
```

The data received in att_data variable can be parsed to read the object attributes.

Reading large binary objects with attestation

Following is an example code on how to read a large binary file with attestation.

Note: This is required only when reading binary objects of size larger than 500 bytes. For any other case, you should use SSS API as above

```
sss_status_t read_large_object_with_attestation(ex_sss_boot_ctx_t *pCtx,
    sss_se05x_key_store_t *keyStore,
    sss_se05x_object_t *keyObject,
    uint8_t *key,
    size_t *keylen,
    size_t *pKeyBitLen,
    sss_se05x_object_t *keyObject_attst,
    sss_algorithm_t algorithm_attst,
    uint8_t *random_attst,
    size_t randomLen_attst,
    sss_se05x_attst_data_t *attst_data)
{
    smStatus_t status      = SM_NOT_OK;
    sss_status_t sss_status = kStatus_SSS_Fail;
    uint16_t rem_data     = 0;
    uint16_t offset        = 0;
    uint16_t size          = 0;
    size_t max_buffer     = 0;
    size_t signatureLen   = 0;
    uint32_t attestID;
    SE05x_AttestationAlgo_t attestAlgo = kSE05x_AttestationAlgo_EC_SHA_256;
    attestID                 = keyObject_attst->keyId;
    /* Variables for verification */
    sss_object_t verification_object = {0};
    uint8_t plainData[2500]           = {0};
    size_t plainDataLen              = sizeof(plainData);
    uint8_t digest[64]                = {0};
    size_t digestLen                 = sizeof(digest);
    sss_digest_t digest_ctxt;
    sss_algorithm_t algorithm       = kAlgorithm_SSS_ECDSA_SHA256;
    sss_algorithm_t digest_algorithm = kAlgorithm_SSS_SHA256;
    sss_asymmetric_t verify_ctxt;

    if (kStatus_SSS_Success != create_host_public_key(pCtx, attestID, EC_KEY_BIT_LEN, &verification_object)) {
        goto cleanup;
    }

    status = Se05x_API_ReadSize(&keyStore->session->s_ctx, keyObject->keyId, &size);
    ENSURE_OR_GO_CLEANUP(status == SM_OK);

    if (*keylen < size) {
        LOG_E("Insufficient buffer ");
        goto cleanup;
    }

    rem_data = size;
    *keylen  = size;
    while (rem_data > 0) {

```

(continues on next page)

(continued from previous page)

```

    uint16_t chunk = (rem_data > BINARY_WRITE_MAX_LEN) ? BINARY_WRITE_MAX_LEN :_
→rem_data;
    rem_data      = rem_data - chunk;
    max_buffer   = chunk;

    signatureLen           = attst_data->data[0].signatureLen;
    attst_data->data[0].timeStampLen = sizeof(SE05x_TimeStamp_t);
    status                 = Se05x_API_ReadObject_W_Attst(&keyStore->
→session->s_ctx,
                keyObject->keyId,
                offset,
                chunk,
                attestID,
                attestAlgo,
                random_attst,
                randomLen_attst,
                (key + offset),
                &max_buffer,
                attst_data->data[0].attribute,
                &(attst_data->data[0].attributeLen),
                &(attst_data->data[0].timeStamp),
                attst_data->data[0].outrandom,
                &(attst_data->data[0].outrandomLen),
                attst_data->data[0].chipId,
                &(attst_data->data[0].chipIdLen),
                attst_data->data[0].signature,
                &signatureLen);

    attst_data->data[0].signatureLen -= signatureLen;
    attst_data->valid_number = 1;

    ENSURE_OR_GO_CLEANUP(status == SM_OK);

    /* Perform verification operation here on the following data
     *      (key + offset) +
     *      attst_data->data[0].attribute +
     *      attst_data->data[0].timestamp +
     *      attst_data->data[0].outrandom +
     *      attst_data->data[0].chipId
     * with signature
     *      attst_data->data[0].signature
     *
     * We perform signature verification on host.
     * First we digest the data then pass it to verify API
     */
}

memcpy(plainData, (key + offset), max_buffer);
memcpy(plainData + max_buffer, attst_data->data[0].attribute, attst_data->
→data[0].attributeLen);
memcpy(plainData + max_buffer + attst_data->data[0].attributeLen,
       &(attst_data->data[0].timeStamp),
       attst_data->data[0].timeStampLen);
memcpy(plainData + max_buffer + attst_data->data[0].attributeLen + attst_data-
→data[0].timeStampLen,
       attst_data->data[0].outrandom,
       attst_data->data[0].outrandomLen);
memcpy(plainData + max_buffer + attst_data->data[0].attributeLen + attst_data-
→data[0].timeStampLen +
       (continues on next page)

```

(continued from previous page)

```

        attst_data->data[0].outrandomLen,
        attst_data->data[0].chipId,
        attst_data->data[0].chipIdLen);
    plainDataLen = max_buffer + attst_data->data[0].attributeLen + attst_data->
    ↵data[0].timeStampLen +
                    attst_data->data[0].outrandomLen + attst_data->data[0].
    ↵chipIdLen;

    sss_status = sss_digest_context_init(&digest_ctx, &pCtx->host_session, digest_
    ↵algorithm, kMode_SSS_Digest);
    ENSURE_OR_GO_CLEANUP(sss_status == kStatus_SSS_Success);

    sss_status = sss_digest_one_go(&digest_ctx, plainData, plainDataLen, digest, &
    ↵digestLen);
    ENSURE_OR_GO_CLEANUP(sss_status == kStatus_SSS_Success);

    sss_digest_context_free(&digest_ctx);

    /* Verify signature */
    sss_asymmetric_context_init(
        &verify_ctx, &pCtx->host_session, &verification_object, algorithm, kMode_-
    ↵SSS_Verify);

    sss_status =
        sss_asymmetric_verify_digest(&verify_ctx, digest, digestLen, attst_data->
    ↵data[0].signature, signatureLen);

    sss_asymmetric_context_free(&verify_ctx);

    ENSURE_OR_GO_CLEANUP(sss_status == kStatus_SSS_Success);

    offset = offset + chunk;
}

cleanup:
    return sss_status;
}

```

5.7.14 SE05X Transport Lock example

This demo Locks SE05x applet.

During transportation of the secure element, this lock can be enforced to avoid malicious access to the SE during transport.

Warning: This demo is just for reference for the usage of APIs, it should not be used for production.

See the corresponding demo [Section 5.7.15 SE05X Transport UnLock example](#)

Both the lock and unlock demo use same key and common logic from `se05x_TransportAuth.c`

5.7.15 SE05X Transport UnLock example

This demo UnLocks SE05x applet, after it is locked by [Section 5.7.14 SE05X Transport Lock example](#)

Warning: This demo is just for reference for the usage of APIs, it should not be used for production.

See the corresponding demo [Section 5.7.14 SE05X Transport Lock example](#)

Both the lock and unlock demo use same key and common logic from `se05x_TransportAuth.c`

5.7.16 SE05X Timestamp

The timestamp is a 12-byte value. The most significant 4 bytes are persistent and the least significant 8 bytes are transient. The persistent value is incremented at every session open and the transient 8 bytes are incremented every 100ms and reset at every session open.

So every time the timestamp is read, the newer value will always be greater than the previous value.

This example demonstrates that the timestamp value is incremented internally. Timestamp is used by the applet during attestation. We initially read the timestamp value and then perform attestation operation. We compare the initial timestamp with the timestamp received during attestation. The newer value must be greater than the older value.

Building

Build the project with the following configuration.

- Applet=SE05X_C
- Project = se05x_TimeStamp

Running

On successful execution, you would be able to see the timestamp printed out:

```
App :INFO :timestamp.ts (Len=12)
      00 00 00 08    00 00 00 00    00 1F BD 00
App :INFO :new_timestamp.ts (Len=12)
      00 00 00 08    00 00 00 00    00 20 B7 00
App :INFO :ex_sss Finished
```

As you can see in the above logs, the timestamp value received during attestation operation is larger than the previous value.

5.7.17 SE05X PCR example

This project can be used to demonstrate PCR as Policy.

Building the Demo

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)
- Project: se05x_PCR

Running the Example

If you have built a binary, flash the binary on to the board and reset the board.

If you have built an *exe* to be run from Windows using VCOM, run as:

```
se05x_PCR.exe <PORT NAME>
```

Where <PORT NAME> is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_PCR
```

Console output

If everything is successful, the output will be similar to:

```
APDU :DEBUG:CheckObjectExists []
APDU :DEBUG:kSE05x_TAG_1 [object id] = 0xEF000040
smCom :DEBUG:Tx> (Len=11)
  80 04 00 27 06 41 04 EF 00 00 40
smCom :DEBUG:<Rx (Len=5)
  41 01 02 90 00
sss :DEBUG:sss_key_store_generate_key(@EF000040, cipherType=kSSS_CipherType_EC_NIST_
→P, keyBitLen=256)

APDU :DEBUG:ReadECCurveList []
smCom :DEBUG:Tx> (Len=5)
  80 02 0B 25 00
smCom :DEBUG:<Rx (Len=23)
  41 82 00 11 01 01 02 01 01 01 01 01 01 01 01 01
  01 01 01 01 01 90 00

APDU :DEBUG:CheckObjectExists []
APDU :DEBUG:kSE05x_TAG_1 [object id] = 0xEF000040
smCom :DEBUG:Tx> (Len=11)
  80 04 00 27 06 41 04 EF 00 00 40
smCom :DEBUG:<Rx (Len=5)
  41 01 02 90 00

APDU :DEBUG:WriteECKey []
APDU :DEBUG:kSE05x_TAG_POLICY
APDU :DEBUG:policy (Len=45)
  2C 00 00 00 00 1F FD 90 00 7F FF FF FF 87 D3 E3
  93 19 8F 5C 80 E0 BC 9B C9 82 00 1F B0 EE 20 1C
  27 0B 6D C8 84 52 E4 13 A3 25 56 81 75
APDU :DEBUG:kSE05x_TAG_MAX_ATTEMPTS [maxAttempt] = 0x0
APDU :DEBUG:kSE05x_TAG_1 [object id] = 0xEF000040
APDU :DEBUG:kSE05x_TAG_2 [curveID] = 0x3
```

(continues on next page)

(continued from previous page)

```

APDU :DEBUG:kSE05x_TAG_3 [privKey] (Len=0)
APDU :DEBUG:kSE05x_TAG_4 [pubKey] (Len=0)
smCom :DEBUG:Tx> (Len=61)
  80 01 61 00 38 11 2D 2C 00 00 00 00 1F FD 90 00
  7F FF FF FF 87 D3 E3 93 19 8F 5C 80 E0 BC 9B C9
  82 00 1F B0 EE 20 1C 27 0B 6D C8 84 52 E4 13 A3
  25 56 81 75 41 04 EF 00 00 40 42 01 03
smCom :DEBUG:<Rx (Len=2)
  90 00

APDU :DEBUG:ECDSASign []
APDU :DEBUG:kSE05x_TAG_1 [objectID] = 0xEF000040
APDU :DEBUG:kSE05x_TAG_2 [ecSignAlgo] = 0x21
APDU :DEBUG:kSE05x_TAG_3 [inputData] (Len=32)
  48 65 6C 6C 6F 20 57 6F 72 6C 64 00 00 00 00 00
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
smCom :DEBUG:Tx> (Len=48)
  80 03 0C 09 2B 41 04 EF 00 00 40 42 01 21 43 20
  48 65 6C 6C 6F 20 57 6F 72 6C 64 00 00 00 00 00
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
smCom :DEBUG:<Rx (Len=2)
  69 85
sss :WARN :nxEnsure:'ret == SM_OK' failed. At Line:5601 Function:sss_se05x_TxN
App :INFO :Sign failed due to PCR expected value mismatch!!!

APDU :DEBUG:CheckObjectExists []
APDU :DEBUG:kSE05x_TAG_1 [object id] = 0x7FFFFFFF
smCom :DEBUG:Tx> (Len=11)
  80 04 00 27 06 41 04 7F FF FF FF
smCom :DEBUG:<Rx (Len=5)
  41 01 02 90 00

APDU :DEBUG:WritePCR []
APDU :INFO :Policy is NULL
APDU :DEBUG:kSE05x_TAG_1 [object id] = 0x7FFFFFFF
APDU :DEBUG:kSE05x_TAG_2 [initialValue] (Len=32)
  12 A1 49 82 32 00 00 00 00 00 00 00 00 00 00 00
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
APDU :DEBUG:kSE05x_TAG_3 [inputData] (Len=0)
smCom :DEBUG:Tx> (Len=45)
  80 01 09 00 28 41 04 7F FF FF FF 42 20 12 A1 49
  82 32 00 00 00 00 00 00 00 00 00 00 00 00 00 00
  00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
smCom :DEBUG:<Rx (Len=2)
  90 00

APDU :DEBUG:WritePCR []
APDU :INFO :Policy is NULL
APDU :DEBUG:kSE05x_TAG_1 [object id] = 0x7FFFFFFF
APDU :DEBUG:kSE05x_TAG_2 [initialValue] (Len=0)
APDU :DEBUG:kSE05x_TAG_3 [inputData] (Len=5)
  12 A1 49 82 32
smCom :DEBUG:Tx> (Len=18)
  80 01 09 00 0D 41 04 7F FF FF FF 43 05 12 A1 49
  82 32
smCom :DEBUG:<Rx (Len=2)
  90 00

```

(continues on next page)

(continued from previous page)

```

APDU :DEBUG:ECDSASign []
APDU :DEBUG:kSE05x_TAG_1 [objectID] = 0xEF000040
APDU :DEBUG:kSE05x_TAG_2 [ecSignAlgo] = 0x21
APDU :DEBUG:kSE05x_TAG_3 [inputData] (Len=32)
  48 65 6C 6C    6F 20 57 6F    72 6C 64 00    00 00 00 00
  00 00 00 00    00 00 00 00    00 00 00 00    00 00 00 00
smCom :DEBUG:Tx> (Len=48)
  80 03 0C 09    2B 41 04 EF    00 00 40 42    01 21 43 20
  48 65 6C 6C    6F 20 57 6F    72 6C 64 00    00 00 00 00
  00 00 00 00    00 00 00 00    00 00 00 00    00 00 00 00
smCom :DEBUG:<Rx (Len=76)
  41 82 00 46    30 44 02 20    50 06 84 FF    D1 CE 87 E7
  F6 89 BE 6C    5B 93 EE EB    26 FB 9D 86    01 25 4F C5
  CE EF 4E 0D    68 9A 64 D9    02 20 6A 4F    27 D0 95 CC
  BD D4 20 66    60 B2 9E 52    26 96 A1 31    3C 1F 7D 77
  E3 16 02 AA    B2 E3 36 61    05 70 90 00
APDU :DEBUG:ECDSAVerify []
APDU :DEBUG:kSE05x_TAG_1 [objectID] = 0xEF000040
APDU :DEBUG:kSE05x_TAG_2 [ecSignAlgo] = 0x21
APDU :DEBUG:kSE05x_TAG_3 [inputData] (Len=32)
  48 65 6C 6C    6F 20 57 6F    72 6C 64 00    00 00 00 00
  00 00 00 00    00 00 00 00    00 00 00 00    00 00 00 00
APDU :DEBUG:kSE05x_TAG_5 [signature] (Len=70)
  30 44 02 20    50 06 84 FF    D1 CE 87 E7    F6 89 BE 6C
  5B 93 EE EB    26 FB 9D 86    01 25 4F C5    CE EF 4E 0D
  68 9A 64 D9    02 20 6A 4F    27 D0 95 CC    BD D4 20 66
  60 B2 9E 52    26 96 A1 31    3C 1F 7D 77    E3 16 02 AA
  B2 E3 36 61    05 70
smCom :DEBUG:Tx> (Len=120)
  80 03 0C 0A    73 41 04 EF    00 00 40 42    01 21 43 20
  48 65 6C 6C    6F 20 57 6F    72 6C 64 00    00 00 00 00
  00 00 00 00    00 00 00 00    00 00 00 00    00 00 00 00
  45 46 30 44    02 20 50 06    84 FF D1 CE    87 E7 F6 89
  BE 6C 5B 93    EE EB 26 FB    9D 86 01 25    4F C5 CE EF
  4E 0D 68 9A    64 D9 02 20    6A 4F 27 D0    95 CC BD D4
  20 66 60 B2    9E 52 26 96    A1 31 3C 1F    7D 77 E3 16
  02 AA B2 E3    36 61 05 70
smCom :DEBUG:<Rx (Len=5)
  41 01 01 90    00
App :INFO :Sign & Verify is Success with Expected PCR value!!!
APDU :DEBUG:DeleteSecureObject []
APDU :DEBUG:kSE05x_TAG_1 [object id] = 0xEF000040
smCom :DEBUG:Tx> (Len=11)
  80 04 00 28    06 41 04 EF    00 00 40
smCom :DEBUG:<Rx (Len=2)
  90 00
APDU :DEBUG:DeleteSecureObject []
APDU :DEBUG:kSE05x_TAG_1 [object id] = 0x7FFFFFFF
smCom :DEBUG:Tx> (Len=11)
  80 04 00 28    06 41 04 7F    FF FF FF
smCom :DEBUG:<Rx (Len=2)
  90 00
App :INFO :ex_sss Finished

```

(continues on next page)

(continued from previous page)

```
Press any key to continue . . .
```

5.7.18 Configuring Applet Features

This tool is used to configure the applet for different variants, i.e. Variant A, Variant B and Variant C. Note that this tool only enables or disables the features according to the configured variant, it **does not alter the variant itself**. The tool should be compiled with ECKey encryption, and optionally PlatfSCP03 encryption also. You would need to provide a command line parameter for ECKey key to be used, and an environment variable for your own Platform SCP03 keys, if required.

Configuring ECKey key for command line

This example takes as a command-line input, the filename in which ECDSA key is stored. The key should be stored in *.der* (binary) format only. If the available key is in *.pem* format, it can be converted into binary format using OpenSSL command-line utility. Refer to [OpenSSL Commands](#) for more information on how to convert *.pem* formatted file to *.der* formatted file.

Configuring Environment for PlatfSCP03 Keys

If you do not wish to use Platform SCP03 encryption, skip to the next step.

To use your own platform SCP03 keys, refer to [Section 11.10 Using own Platform SCP03 Keys](#) on details on setting up your environment.

Using with PC as host

- 1) Flash the VCOM binary present in `binaries` directory on to the target board.
- 2) Note the VCOM *COMPORT* from device manager.
- 3) Build the project `se05x_setAppletFeatures`. Configure the tool with `SE050_A`, `SE050_B` or `SE050_C`, to enable the applet specific features.
- 4) Run the executable for desired variant as:

```
cd tools
set EX_SSS_BOOT_SCP03_PATH_ENV=\path\to\platfscp03\keys
se05x_setAppletFeatures.exe -file <filename> <COMPORT>
```

Where `EX_SSS_BOOT_SCP03_PATH_ENV` is set to the path of file containing Platform SCP03 keys as described in [Configuring Environment for PlatfSCP03 Keys](#).

COMPORT is the port obtained from step 2.

filename is the path to file containing ECDSA keypair provisioned at `RESERVED_ID_FEATURE` in binary format as described in [Configuring ECKey key for command line](#)

Using with iMX-6 as host

- 1) Build the project `se05x_setAppletFeatures`. Configure the tool with `SE050_A`, `SE050_B` or `SE050_C`, to enable the applet specific features.
- 2) Run the executable for desired variant as:

```
cd tools
export EX_SSS_BOOT_SCOP3_PATH_ENV=\path\to\platfscp03\keys
./se05x_setAppletFeatures -file <filename>
```

Where `EX_SSS_BOOT_SCOP3_PATH_ENV` is set to the path of file containing Platform SCP03 keys as described in [Configuring Environment for PlatfSCP03 Keys](#).

`filename` is the path to file containing ECDSA keypair provisioned at `RESERVED_ID_FEATURE` in binary format as described in [Configuring ECKey key for command line](#)

5.7.19 Write APDU to buffer

Normally, when we create an APDU, we also perform transceive operation and return the result to the application. Optionally, the user may want to just create the APDU and not perform the transceive operation.

This can be done by creating your own transaction function. All SE05x APIs call a common transaction function in which the complete APDU is created and then transmitted.

The following function can be used as reference.

```
smStatus_t fLogTransmitBuffer(Se05xSession_t *pwrite_apdubufferctx,
    const tlvHeader_t *hdr,
    uint8_t *cmdBuf,
    size_t cmdBufLen,
    uint8_t *rsp,
    size_t *rspLen,
    uint8_t hasle)
{
    memset(gTxBuffer, 0, sizeof(gTxBuffer));
    size_t i = 0;
    memcpy(&gTxBuffer[i], hdr, sizeof(*hdr));
    smStatus_t ret = SM_OK;
    i += sizeof(*hdr);
    if (cmdBufLen > 0) {
        // The Lc field must be extended in case the length does not fit
        // into a single byte (Note, while the standard would allow to
        // encode 0x100 as 0x00 in the Lc field, nobody who is sane in his mind
        // would actually do that).
        if ((cmdBufLen < 0xFF) && !hasle) {
            gTxBuffer[i++] = (uint8_t)cmdBufLen;
        }
        else {
            gTxBuffer[i++] = 0x00;
            gTxBuffer[i++] = 0xFF & (cmdBufLen >> 8);
            gTxBuffer[i++] = 0xFF & (cmdBufLen);
        }
        memcpy(&gTxBuffer[i], cmdBuf, cmdBufLen);
        i += cmdBufLen;
    }
    if (hasle) {
```

(continues on next page)

(continued from previous page)

```

    gTxBuffer[i++] = 0x00;
    gTxBuffer[i++] = 0x00;
}
ret      = SM_OK;
gTxBufferLen = i;

return ret;
}

```

Assign this function to session context and use as following

```

Se05xSession_t write_apdubufferctx = {0};
write_apdubufferctx.fp_TXn      = &fLogTransmitBuffer;

Se05x_API_WriteBinary(&write_apdubufferctx, &policy, objectID, offset, length,
                     →inputData, inputDataLen);

```

After this, whichever SE05x API you call with `write_apdubufferctx`, it will just create the APDU and write it to the buffer. No transceive operation will be performed.

Building

Build the project with the following configurations.

se05x_GetAPDUBuffer

- SCP = None
- Project = se05x_GetAPDUBuffer

Running

On successful execution you can see the APDU buffer printed out:

```

App :INFO :Policy for ReadOnly File:
App :INFO :Locked = READ
App :INFO :Excluded = DELETE, WRITE.
App :INFO :pPolicyBuffer (Len=9)
  08 00 00 00    00 00 20 00    00
App :INFO :gTxBuffer (Len=38)
  80 01 06 00    21 11 09 08    00 00 00 00    00 20 00 00
  41 04 11 22    33 44 43 02    00 0A 44 0A    01 02 03 04
  05 06 07 08    09 0A

```

5.7.20 Inject Certificate into SE

This tool is to demonstrate how to inject certificates into the SE. The keyIDs where certificates are injected are defined in `se05x.InjectCertificate.h`:

```

#define ECC_CERTIFICATE_KEYID 0x00000014
#define RSA_CERTIFICATE_KEYID 0x00000011

```

Note: Certificates to be injected are also defined in `se05x.InjectCertificate.h` file. These can be changed as required.

Building the example

Use the following CMake configurations to compile the example

- Project: `se05x.InjectCertificate`

How to use

Run the tool as:

```
se05x.InjectCertificate <port>
```

- For systems connecting with T=1 over I2C, the port parameter can be skipped.

5.7.21 SE05X Read State example

This project can be used to get SE05X state information. The state information is w.r.t

- 1) LockState
- 2) Restriction on Object Creation
- 3) Platform SCP mandate state

Refer to `SE05x.LockState_t` Refer to `SE05x.RestrictMode_t` Refer to `SE05x.PlatformSCPRequest_t`

```
SE05x.LockState_t lockState;
SE05x.RestrictMode_t restrictMode;
SE05x.PlatformSCPRequest_t platformSCPRequest;
```

Building the Demo

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))
- Project: `se05x.ReadState`

Running the Example

If you have built a binary, flash the binary on to the board and reset the board.

If you have built an *exe* to be run from Windows using VCOM, run as:

```
se05x.ReadState.exe <PORT NAME>
```

Where **<PORT NAME>** is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_ReadState
```

Console output

If everything is successful, the output will be similar to:

```
APDU :DEBUG:ReadState []
smCom :DEBUG:Tx> (Len=5)
 80 02 00 5B 00
smCom :DEBUG:<Rx (Len=9)
 41 82 00 03 02 00 02 90 00
App :INFO :SE05x Read State Successfully!!!
App :INFO :Following is the SE05x Read State status
App :INFO :SE05x Lock State = 0x2 i.e. SE05x is Unlocked!!!
App :INFO :SE05x Restrict Mode = 0x0 i.e. No Restriction is applied for object creation!!!
App :INFO :SE05x Platform SCP Request = 0x2 i.e. Platform SCP is not required for Communication!!!
App :INFO :ex_sss Finished
Press any key to continue . . .
```

5.7.22 SE05X Personalization Remove RSA Key Generation Module

This project permanently deletes rsa key generation module from secure element. Running this example will restrict the generation of rsa keys inside the secure element.

Building the Demo

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))
- Project: se05x_Perso_Delete_Mod_RSAKeyGen

Running the Example

If you have built a binary, flash the binary on to the board and reset the board.

If you have built an *exe* to be run from Windows using VCOM, run as:

```
se05x_Perso_Delete_Mod_RSAKeyGen.exe <PORT NAME>
```

Where **<PORT NAME>** is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_Perso_Delete_Mod_RSAKeyGen
```

Console output

If everything is successful, the output will be similar to:

```
App :INFO :# Running Remove Module RSAKEYGEN : On chip generation of RSA keys.
App :INFO :# Remove Module RSAKEYGEN is complete.
App :INFO :ex_sss Finished
```

5.7.23 Test non deletion of desfire CRC module without Features

This tool is used to verify that desfire CRC module cannot be deleted without auth with FEATURE ID. The tool should be compiled with ECKey encryption, and optionally PlatfSCP03 encryption also. You would need to provide a command line parameter for ECKey key to be used, and an environment variable for your own Platform SCP03 keys, if required.

Configuring ECKey key for command line

This example takes as a command-line input, the filename in which ECDSA key is stored. The key should be stored in *.der* (binary) format only. If the available key is in *.pem* format, it can be converted into binary format using OpenSSL command-line utility. Refer to [OpenSSL Commands](#) for more information on how to convert *.pem* formatted file to *.der* formatted file.

Configuring Environment for PlatfSCP03 Keys

If you do not wish to use Platform SCP03 encryption, skip to the next step.

To use your own platform SCP03 keys, refer to [Section 11.10 Using own Platform SCP03 Keys](#) on details on setting up your environment.

Using with PC as host

- 1) Flash the VCOM binary present in *binaries* directory on to the target board.
- 2) Note the VCOM *COMPORT* from device manager.
- 3) Build the project *se05x_setAppletFeatures*. Configure the tool with *SE050_A*, *SE050_B* or *SE050_C*, to enable the applet specific features.
- 4) Run the executable for desired variant as:

```
cd tools
set EX_SSS_BOOT_SCP03_PATH_ENV=\path\to\platfscp03\keys
desfire_CRC.exe -file <filename> <COMPORT>
```

Where *EX_SSS_BOOT_SCP03_PATH_ENV* is set to the path of file containing Platform SCP03 keys as described in [Configuring Environment for PlatfSCP03 Keys](#).

COMPORT is the port obtained from step 2.

filename is the path to file containing ECDSA keypair provisioned at **RESERVED_ID_FEATURE** in binary format as described in [Configuring ECKey key for command line](#)

Using with iMX-6 as host

- 1) Build the project se05x_setAppletFeatures. Configure the tool with SE050_A, SE050_B or SE050_C, to enable the applet specific features.
- 2) Run the executable for desired variant as:

```
cd tools
export EX_SSS_BOOT_SCOP3_PATH_ENV=\path\to\platfscp03\keys
./desfire_CRC -file <filename>
```

Where EX_SSS_BOOT_SCOP3_PATH_ENV is set to the path of file containing Platform SCP03 keys as described in [Configuring Environment for PlatfSCP03 Keys](#).

filename is the path to file containing ECDSA keypair provisioned at **RESERVED_ID_FEATURE** in binary format as described in [Configuring ECKey key for command line](#)

5.7.24 DEMO for Personalization of SE051

This demo can be used to personalize some of the parameters for SE051.

The demo is self explanatory:

```
se05x_Personalization.exe <operation> [operation] <port_name>
```

Where, 'operation': one or sequence of the following:

```
    HELP : Prints list of APIs
    I2C_DisableClockStretching : I2C: Disables clock stretching
    I2C_EnableClockStretching : I2C: Enables clock stretching
        I2C_ProtocolGP : I2C: Use GP Mode for I2C
        I2C_ProtocolUM : I2C: Use UM Mode like SE050 for I2C
    I2C_ProtocolAutoDetect : I2C: Automatically detect I2C Protocol
        I2C_ProtocolManual : I2C: Manually use fixed Protocol
        I2C_EnablePowerSave : I2C: Go to power save after last APDU
        I2C_DisablePowerSave : I2C: DO not go to power save after last APDU
        I2C_SemiBlocking : I2C: SEMI Blocking I2C
        I2C_NonBlocking : I2C: Non Blocking I2C
    RM_MOD_IOT_EXTENDED : Delete: Extension to Elliptic Curve Cryptography.
        RM_MOD_IOT_BASE : Delete: Collection of crypto algorithms often used
            in IoT devices.
    RM_MODX_EGOVACCELERATORS : Delete: Secure Messaging Accelerators for
        eGovernment applications and modular arithmetic math API.
    RM_MOD_RSAKEYGEN : On chip generation of RSA keys.
```

For further details, please see product user manual.

Note: You can add more operations in a single command.

Warning: These values are effective only after IC Reset.

Compatible settings from host and SE

Some parameters need compatible settings at both sides, from host and SE. Else it leaves system in a non-operable state.

e.g. If the SE is configured to be in `ProtocolGP`, and host is using `ProtocolUM`, there can't be any further communication with the SE without re-compiling the middleware/demo at the host. And since the communication between Host and SE is not function, there is no direct/easy way to re-configure the SE Back.

5.7.25 SE05X MultiThread demo

This project demonstrates two threads, opening two sessions with the se05x using tunneling api's. Each thread performing ecc sign and verify operations.

If we use user sessions then at least two authentication objects need to be provisioned in se05x using the `delete` and `test provision` utility before running the demo:

- For an overview of authentication objects refer to [Auth Objects](#)
- For a provisioning example refer to [Delete and Test Provision](#)

In Multistep operations the concurrent execution with same cipher mode is not allowed. (Refer [Known limitations](#))

Note: This demo can be build for FreeRTOS on embedded platforms or for pthread on POSIX systems (e.g. Linux).

Prerequisites

- Micro USB cable
- FRDM-K64F/imx-RT1060/Raspberry-Pi/iMX board
- Personal Computer
- SE05x Arduino shield

Building the Demo

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))
- Project: `se05x_MultiThread`

Running the Example

If you have built a binary, flash the binary on to the board and reset the board.

If you have built an `exe` to be run from Windows using VCOM, run as:

```
se05x_Multithread.exe <PORT NAME>
```

Where `<PORT NAME>` is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_Multithread
```

Console output

If everything is successful, the output will be similar to:

```
sss :WARN :Communication channel is with Plain.  
sss :WARN :!!!Not recommended for production use.!!!  
sss :WARN :Communication channel is with Plain.  
sss :WARN :!!!Not recommended for production use.!!!  
App :INFO :Key Store Generate Key success user 2!!!  
App :INFO :Key Store Generate Key success user 1!!!  
App :INFO :sss_asymmetric_sign_digest success user 2  
App :INFO :sss_asymmetric_sign_digest success user 1  
App :INFO :Set public key success user 2  
App :INFO :Set public key success user 1  
App :INFO :sss_asymmetric_verify_digest success user 2  
App :INFO :Done User 2  
App :INFO :sss_asymmetric_verify_digest success user 1  
App :INFO :Done User 1  
App :INFO :SE05x Multithreaded example finished
```

5.7.26 SE05X Invoke Garbage Collection Example

The example will trigger the garbage collection in SE05X. Invoking CM_InvokeGarbageCollection api will close the existing session to SE05X. To use SE05X, open session again.

Warning: Excessive calls to CM_InvokeGarbageCollection API will impact the device durability

Building the Demo

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)
- Project: se05x_InvokeGarbageCollection

Running the Example

If you have built a binary, flash the binary on to the board and reset the board.

If you have built an *exe* to be run from Windows using VCOM, run as:

```
se05x_InvokeGarbageCollection.exe <PORT NAME>
```

Where <PORT NAME> is the VCOM COM port.

On Raspberry-Pi or iMX board, run as:

```
./se05x_InvokeGarbageCollection
```

Console output

If everything is successful, the output will be similar to:

```
hostLib:WARN :Invoking this api will close the existing session to SE05X.
hostLib:WARN :To use SE05X, open session again.
hostLib:INFO :Sending Select command
hostLib:INFO :Command Successful!!!
hostLib:INFO :Command Response (Len=18)
    6F 10 84 08      A0 00 00 01      51 00 00 00      A5 04 9F 65
    01 FF
hostLib:INFO :Sending 'Invoke Garbage Collection' Command
hostLib:INFO :Command Successful!!!
hostLib:INFO :Command Response (Len=5)
    FE 03 DF 25      00
App   :INFO :se05x_InvokeGarbageCollection Success !!!...
App   :INFO :ex_sss Finished
```

5.7.27 ECC Concurrent Example

This project demonstrates Elliptic Curve Cryptography sign and verify operations using SSS APIs. On a multiprocess OS it can be run as multiple instances. Before running an instance ensure the secure element is properly provisioned. The utility [Delete and Test Provision](#) can be used to provision the authentication objects used by this example. Invoke `se05x_Delete_and_test_provision` once during the preparation of the demo. The authentication objects are required for user sessions of type UserID/AESKey/ECKey.

Building the Demo

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))
- When used in combination with Access Manager compile for SMCOM = JRCPv1

Restrictions

- Each user session needs to have a different authentication object

Running the Example in combination with the Access Manager

For additional information on the AccessManager refer to [Access Manager: Manage access from multiple \(Linux\) processes to an SE05x IoT Applet](#).

Usage

The client process opens an authenticated user session (None/UserID/AESkey/ECkey) configured at build time. The user session must be without platform SCP03. Platform SCP03 is handled by the Access Manager.

The client process connects to the AccessManager over JRCPv1.

Two concurrent client processes (establishing a user session) can connect to the AccessManager.

This program takes 4 command line arguments:

- authid: Authentication object id with which the session can be opened. It can be of type UserID/AESkey/ECkey (or authentication type 'None'). In case the user session authentication is of type 'None' pass '0' as argument

- keyid: The id at which the functional Ec key pair will be stored, use a unique value per process.
- count (optional argument): Number of times the Ec Sign Verify operation will be repeated
- port: Connection port to AccessManager. e.g. 127.0.0.1:8040

An example invocation of the program (passing the Authentication Id of a UserID object) is:

```
./se05x_ConcurrentEcc -authid 0x7DA00001 -keyid 0xEF001234 -cnt 100 -port 127.0.0.  
→ 1:8040
```

Concurrent Usage

The following command invocations illustrate how two processes connect to the AccessManger using different Authentication Id's and (functional) key Id's.

The following Authentication Id's are provisioned in SE using the “delete & provision” utility

AuthId	1	2
UserID	0x7DA00001	0x7DA00011
AESkey	0x7DA00002	0x7DA00012
ECKey	0x7DA00003	0x7DA00013

KeyId can be anything above 0xEF000000, choose a different value for each client process.

- Ec Sign / Verify Auth=ID_1 Auth=ID_2
 - ./se05x_ConcurrentEcc -authid 0x7DA00001 -keyid 0xEF001234 -cnt 100 -port 127.0.0.1:8040
 - ./se05x_ConcurrentEcc -authid 0x7DA00011 -keyid 0xEF001244 -cnt 100 -port 127.0.0.1:8040
- Ec Sign / Verify Auth=None Auth=EC
 - ./se05x_ConcurrentEcc -authid 0 -keyid 0xEF001236 -cnt 100 -port 127.0.0.1:8040
 - ./se05x_ConcurrentEcc -authid 0x7DA00003 -keyid 0xEF001246 -cnt 100 -port 127.0.0.1:8040
- Ec Sign / Verify Auth=AES_1 Auth=AES_2
 - ./se05x_ConcurrentEcc -authid 0x7DA00002 -keyid 0xEF001238 -cnt 100 -port 127.0.0.1:8040
 - ./se05x_ConcurrentEcc -authid 0x7DA00012 -keyid 0xEF001248 -cnt 100 -port 127.0.0.1:8040

5.7.28 Symmetric Multi Step Concurrent Example

This project demonstrates Symmetric Multi step operations. using SSS APIs. On a multiprocess OS it can be run as multiple instances. Before running an instance ensure the secure element is properly provisioned. The block cipher mode to apply (ECB or CBC) can be chosen by the user. The utility *Delete and Test Provision* can be used to provision the authentication objects used by this example. Invoke `se05x_Delete_and_test_Provision` once during the preparation of the demo. The authentication objects are required for user sessions of type UserID/AESKey/ECKey.

Building the Demo

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))
- When used in combination with Access Manager compile for SMCOM = JRCPv1

Restrictions

- Each user session needs to have a different authentication object
- The same block cipher mode cannot be used for two concurrent client processes. If one process uses ECB the other must use CBC. This is a restriction from the SSS layer.

Running the Example in combination with the Access Manager

For additional information on the AccessManager refer to [Access Manager: Manage access from multiple \(Linux\) processes to an SE05x IoT Applet](#).

Usage

The client process opens an authenticated user session (None/UserID/AESkey/ECkey) configured at build time. The user session must be without platform SCP03. Platform SCP03 is handled by the Access Manager.

The client process connects to the AccessManager over JRCPv1.

Two concurrent client processes (establishing a user session) can connect to the AccessManager.

This program takes 5 command line arguments:

- authid: Authentication object id with which the session can be opened. It can be of type UserID/AESkey/ECkey (or authentication type ‘None’). In case the user session authentication is of type ‘None’ pass ‘0’ as argument
- keyid: The id at which the symmetric key has to be stored, use a unique value per process.
- algo: Block cipher mode, use 1 for ECB and 2. for CBC
- count (optional argument): Number of times the crypto operation will be repeated.
- port: Connection port to AccessManager. e.g. 127.0.0.1:8040

An example invocation of the program is:

```
./se05x_ConcurrentSymm -authid 0x7DA00001 -keyid 0xEF002234 -algo 1 -cnt 100 -port
→127.0.0.1:8040
```

Concurrent Usage

The following command invocations illustrate how two processes connect to the AccessManger using different Authentication Id’s and (functional) key Id’s.

The following Authentication Id’s are provisioned in SE using the “delete & provision” utility

AuthId	1	2
UserID	0x7DA00001	0x7DA00011
AESkey	0x7DA00002	0x7DA00012
ECKey	0x7DA00003	0x7DA00013

KeyId can be anything above 0xEF000000, choose a different value for each client process.

- ECB Enc/Dec CBC Enc/Dec Auth=ID Auth=AES
 - ./se05x_ConcurrentSymm -authid 0x7DA00001 -keyid 0xEF002234 -algo 1 -cnt 100 -port 127.0.0.1:8040
 - ./se05x_ConcurrentSymm -authid 0x7DA00002 -keyid 0xEF002235 -algo 2 -cnt 100 -port 127.0.0.1:8040
- ECB Enc/Dec CBC Enc/Dec Auth=ID_1 Auth=ID_2
 - ./se05x_ConcurrentSymm -authid 0x7DA00001 -keyid 0xEF002236 -algo 1 -cnt 100 -port 127.0.0.1:8040
 - ./se05x_ConcurrentSymm -authid 0x7DA00011 -keyid 0xEF002237 -algo 2 -cnt 100 -port 127.0.0.1:8040
- ECB Enc/Dec; CBC Enc/Dec Auth=EC Auth=AES
 - ./se05x_ConcurrentSymm -authid 0x7DA00003 -keyid 0xEF002238 -algo 1 -cnt 100 -port 127.0.0.1:8040
 - ./se05x_ConcurrentSymm -authid 0x7DA00002 -keyid 0xEF002239 -algo 2 -cnt 100 -port 127.0.0.1:8040

5.7.29 Delete and Test Provision

'Delete and Test Provision' is a utility that deletes a subset of the crypto objects stored on the secure element. Next it provisions different types of key objects (as documented in the table below). These key objects enable various use cases with the secure element. As an example: the authentication objects for session based authentication (UserID/AESkey/ECKey) are provisioned through this utility.

To enable concurrent (up to the maximum of two) authenticated user sessions, two authentication objects of each type (UserID/AESkey/ECKey) are provisioned.

Note: Authentication objects - of the same object type - are provisioned on Ids with an offset of +0x10.

Warning: This utility provisions the same value for both authentication object type instances. In a product deployment different values must be used, do not re-use any of the values provisioned by this test utility in a product deployment.

Object IDs provisioned

Object ID	Object Type	Usage
0x7DA00001	User ID	Allows the user to Open User ID Auth Session to SE.
0x7DA00002	Symm Key	Allows the user to Open AES Key Auth Session to SE.
0x7DA00003	EC Key	Allows the user to Open EC Key Auth Session to SE.
0x7DA00011	User ID	Allows the user to Open additional User ID Auth Session to SE.
0x7DA00012	Symm Key	Allows the user to Open additional AES Key Auth Session to SE.
0x7DA00013	EC Key	Allows the user to Open additional EC Key Auth Session to SE.
0x7FFF0200	Symm Key	Allows the user to switch transport LockState of the SE.
0x7FFF0201	EC Key	Provisions ECKA pair at SE for EC key Session Authentication.
0x7FFF0202	EC Key	Provisions ECKA pair at SE for EC key Session Authentication.
0x7FFF0203	EC Key	Provisions ECKA pair at SE for EC key Session Authentication.
0x7FFF0204	EC Key	Used for applet personalization.
0x7FFF0205	User ID	Allows the user to delete all objects. Except those provisioned by NXP.
0x7FFF0206	Binary	Holds the device unique ID.
0x7FFF0207	User ID	Allows the user to make platform SCP mandatory or not.

Warning: Some of the object Ids here are provisioned with same values. This is for test, example and demo purpose only.

Authentication Keys

Warning: These values are just for demonstration. The user **MUST** modify these values in the secure element and the application for real world use cases.

User ID

```
#define EX_SSS_AUTH_SE05X_UserID_AUTH_ID kEX_SSS_ObjID.UserID_Auth

#define EX_SSS_AUTH_SE05X_UserID_VALUE \
{ \
    0xC0, 0x01, 0x02, 0x03, 0x04 \
} /* COOL 234 */
```

Applet SCP

```
#define EX_SSS_AUTH_SE05X_APPLETSCP_AUTH_ID kEX_SSS_ObjID_APPLETSCP03_Auth

#define EX_SSS_AUTH_SE05X_APPLETSCP_VALUE \
{ \
    0x40, 0x41, 0x42, 0x43, 0x44, 0x45, 0x46, 0x47, 0x48, 0x49, 0x4A, \
    0x4B, 0x4C, 0x4D, 0x4E, 0x4F \
}
```

EC Key

```
#define EX_SSS_AUTH_SE05X_ECKEY_ECDSA_AUTH_ID kEX_SSS_ObjID_ECKEY_Auth

#define EX_SSS_AUTH_SE05X_KEY_HOST_ECDSA_KEY \
{ \
    0x30, 0x81, 0x87, 0x02, 0x01, 0x00, 0x30, 0x13, \
    0x06, 0x07, 0x2A, 0x86, 0x48, 0xCE, 0x3D, 0x02, \
    0x01, 0x06, 0x08, 0x2A, 0x86, 0x48, 0xCE, 0x3D, \
    0x03, 0x01, 0x07, 0x04, 0x6D, 0x30, 0x6B, 0x02, \
    0x01, 0x01, 0x04, 0x20, \
    0x6D, 0x2F, 0x43, 0x2F, 0x8A, 0x2F, 0x45, 0xEC, \
    0xD5, 0x82, 0x84, 0x7E, 0xC0, 0x83, 0xBB, 0xEB, \
    0xC2, 0x3F, 0x1D, 0xF4, 0xF0, 0xDD, 0x2A, 0x6F, \
    0xB8, 0x1A, 0x24, 0xE7, 0xB6, 0xD5, 0x4C, 0x7F, \
    0xA1, 0x44, 0x03, 0x42, 0x00, \
    0x04, 0x3C, 0x9E, 0x47, 0xED, 0xF0, 0x51, 0xA3, \
    0x58, 0x9F, 0x67, 0x30, 0x2D, 0x22, 0x56, 0x7C, \
    0x2E, 0x17, 0x22, 0x9E, 0x88, 0x83, 0x33, 0x8E, \
    0xC3, 0xB7, 0xD5, 0x27, 0xF9, 0xEE, 0x71, 0xD0, \
    0xA8, 0x1A, 0xAE, 0x7F, 0xE2, 0x1C, 0xAA, 0x66, \
    0x77, 0x78, 0x3A, 0xA8, 0x8D, 0xA6, 0xD6, 0xA8, \
    0xAD, 0x5E, 0xC5, 0x3B, 0x10, 0xBC, 0x0B, 0x11, \
    0x09, 0x44, 0x82, 0xF0, 0x4D, 0x24, 0xB5, 0xBE, \
    0xC4 \
}
```

Building the Demo

- Build Plug & Trust middleware stack. (Refer [Building / Compiling](#))
- SE05X_Auth=None
- Project: se05x_Delete_and_test_provision

5.8 OpenSSL Examples

5.8.1 Tool to create Reference key file

This tool is to demonstrate how to implement a command-line utility for native systems. This utility can be used to generate/inject keypair and create reference key files.

This is beneficial for environments which do not have python installed.

Note: This example is implemented only for NIST-P256 curve. It can only be compiled when Host Crypto is OpenSSL.

Building the example

Use the following CMake configurations to compile the example

- CMake configurations: WithHostCrypto_OPENSSL: ON
- Project: seTool

How to use

This example provides four command-line parameters to select the operation to perform.

- 1) To **generate** a keypair, run the tool as:

```
seTool genECC <keyId>
```

Where:

- *keyId* is the keypair index at which we want to generate the keypair.

- 2) To **inject** a keypair, run the tool as:

```
seTool setECC <keyId> <filename>
```

Where:

- *keyId* is the keypair index at which we want to inject the keypair
- *filename* is the path of the file in which keypair is stored in PEM format.

- 3) To **retrieve the public key**, run the tool as:

```
seTool getPublic <keyId> <filename>
```

Where:

- *keyId* is the keypair index from which we want to retrieve the public key
- *filename* is the path of the file in which we want to store the key in PEM format.

4) To **create a reference key** for an injected keypair, run the tool as:

```
seTool getRef <keyId> <filename>
```

Where:

- *keyId* is the keypair index at which we keypair is stored and
- *filename* is the path of the file in which we want to store the reference key in PEM format.

The generated reference key can be used by OpenSSL Engine.

5.8.2 Building a self-signed certificate

This demo is to demonstrate how we can use provisioned keys to create a self-signed certificate to communicate with cloud platforms. In this example, we use two binaries, one to generate a keypair inside the secure element and another to use the generated keypair to create a self-signed certificate.

Note: We use OpenSSL in this example to create the certificate.

How to use

1. Run the binary `generate_certificate_key` to generate an ECC-256 keypair inside the secure element.
2. Run the binary `generate_certificate` to create a self-signed certificate. This demo provisions the the generated certificate into the secure element.
3. You can read-out the certificate using SSS-APIs from `keyId CERTIFICATE_KEY_ID + 1` as defined in `certificate.h` file.

5.9 Tests for User Crypto

5.9.1 Tests for User Crypto

- Tests are implemented based on pre-computed data.
- Validates cryptographic results against test vectors.
- The User Crypto can be validate with this test suite.
- The tests to be used during User Crypto development.

List of Crypto Algorithms

Following Crypto Algorithms for which tests are available

- Get Random Number
- AES_CBC_Encrypt
- AES_CBC_Decrypt
- MAC_One_Go
- MAC_Multistep

Building the Demo

- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)
- Project: test_Crypto

5.10 NXPNFCRDLIB examples

5.10.1 MIFARE DESFire EV2 : Prepare Secure Element

Prerequisites

- Bring Up Hardware. (Refer *Development Platforms*)
- Connect RC663 to your microcontroller. (Refer mifarekdf-rc663)

About the Example

This is an example project for provisioning the SE05x for running other SE05x MIFARE DESFire EV2 examples. This example Creates and sets 2 SE05x secure objects for further use by other examples.

It uses the following APIs and data types:

- `sss_key_store_set_key()`

The two AES key storage for NFC application in SE05x

We create two AES Keys in SE05x

This example calls the - `InitialSetupSe050()` : which inits, allocates and sets 2 AES keys.

The keyIDs are as below

```
#define MDFEV2_KEYID (EX_SSS_OBJID_DEMO_MFDF_START)
#define MDFEV2_CHANGED_KEYID (EX_SSS_OBJID_DEMO_MFDF_START +1)

#define EX_SSS_OBJID_DEMO_MFDF_START 0x7D5DF000u
```

Key values

The key that is provisioned into SE05x is called the oldKey and newKey and it takes the values as below.

```
const uint8_t oldKeyValue[KEY_BIT_LEN / 8] = { 0x00, 0x00, 0x00, 0x00,
                                              0x00, 0x00, 0x00, 0x00,
                                              0x00, 0x00, 0x00, 0x00,
                                              0x00, 0x00, 0x00, 0x00 };

const uint8_t newKeyValue[KEY_BIT_LEN / 8] = { 0x00, 0x00, 0x00, 0x00,
                                              0x00, 0x00, 0x00, 0x00,
                                              0x00, 0x00, 0x00, 0x00,
                                              0x00, 0x00, 0x00, 0x01 };
```

Running the Demo

- 1) Either press the reset button on your board or launch the debugger in your IDE to begin running the demo

If everything is setup correctly the output would be as follows:

```
sss:INFO :atr (Len=35)
 00 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 08
 01 00 00 00      00 64 00 00      0A 4A 43 4F      50 34 20 41
 54 50 4F
sss:WARN :Communication channel is Plain.
sss:WARN :!!!Not recommended for production use.!!!
App:INFO :SE050 prepared successfully for MIFARE DESFire EV2 examples
App:INFO :ex_sss Finished
```

5.10.2 MIFARE DESFire EV2 : Prepare MFDFEV2

Warning: To run this example, you would need the nxpnfcrdlib component for which a Non-Disclosure Agreement(NDA) needs to be signed. Please contact your FAE for additional details.

Prerequisites

- Bring Up Hardware. (Refer *Development Platforms*)
- Connect RC663 to your microcontroller. (Refer mifarekdf-rc663)

About the Example

This is an example project for preparing the MIFARE DESFire EV2 card for running other SE05x MIFARE DESFire EV2 examples. This example formats the card creates app, keys and file for running the other examples.

This does not make use of any SE05X APIs. It make use of nxpNfcrdLib apis for:

- formatting the card
- Creating an AFC application
- Selecting the application
- Creating a value file

Creation of application

creation of application with application ID happens in - phEx_Personalize_AFCApp ():

The application ID is

```
uint8_t bAfcApp[3] = {0x11, 0x22, 0x33};
```

AES Keys provisioned in card

We create One key in the card, This key is set when we are creating the transaction mac file. The key value is

```
uint8_t bTMKey[16] = { 0x00, 0x00, 0x00, 0x00,
                      0x00, 0x00, 0x00, 0x00,
                      0x00, 0x00, 0x00, 0x00,
                      0x00, 0x00, 0x00, 0x00 };
```

Running the Demo

- 1) Either press the reset button on your board or launch the debugger in your IDE to begin running the demo

If everything is setup correctly the output would be as follows:

```
App:INFO :PlugAndTrust_v02.09.00_20190607
      sss:INFO :atr (Len=35)
          00 A0 00 00    03 96 04 03    E8 00 FE 02    0B 03 E8 08
          01 00 00 00    00 64 00 00    0A 4A 43 4F    50 34 20 41
          54 50 4F
      sss:WARN :Communication channel is Plain.
      sss:WARN :!!!Not recommended for production use.!!!
Tx> 26
Rx< 04 03
Tx> 93 20
Rx< 08 4B 3F 8A F6
Tx> 93 70 08 4B 3F 8A F6
Rx< 20
UID after L3 Activation 08 4B 3F 8A 00 00 00 00 00 00 00 00
Tx> E0 80
Rx< 06 75 77 81 02 80
ATS after L4 Activation 06 75 77 81 02 80
Performing Pre Personalization .....
Tx> 0A 00
Tx> 0A 00
Rx< 0A 00 AF CB 25 7E C2 10 CE 82 78
Tx> 0B 00
Tx> AF 04 B9 B6 CE 0D 73 DE 3F 4D 9F 70 01 F0 12 53 B7
Rx< 0B 00 00 88 CC 75 06 D0 EA FE F2
Tx> 0A 00
Tx> FC
Rx< FA 00 01
Tx> FA 00 01
Rx< 0A 00 00
Formatting the card Successful
Tx> 0B 00
Tx> 5C 01
```

(continues on next page)

(continued from previous page)

5.10.3 MIFARE DESFire EV2 : Authentication

Warning: To run this example, you would need the nxpnfcrdlib component for which a Non-Disclosure Agreement(NDA) needs to be signed. Please contact your FAE for additional details.

Prerequisites

- *MIFARE DESFire EV2 : Prepare MDFEV2* must have been executed, so that the MIFARE DESFire EV2 card has the required credentials. For relevant platforms, a KSDK package is available. Please import and execute the example *MIFARE DESFire EV2 : Prepare MDFEV2*.

- *MIFARE DESFire EV2 : Prepare Secure Element* must have been executed, so that the Secure element has the required credentials. For relevant platforms, a KSDK package is available. Please import and execute the example *MIFARE DESFire EV2 : Prepare Secure Element*.
- Bring Up Hardware. (Refer *Development Platforms*)
- Connect RC663 to your microcontroller. (Refer mifarekdf-rc663)

About the Example

This project is an example demonstrating the Mifare Desfire EV2 authentication using Seo50. After authentication it performs encrypted communication with the desfire EV2 card.

It uses the following APIs and data types:

- *Se05x_API_DFAuthenticateFirstPart1()*
- *Se05x_API_DFAuthenticateNonFirstPart1()*
- *Se05x_API_DFAuthenticateFirstPart2()*
- *Se05x_API_DFAuthenticateNonFirstPart2()*
- *Se05x_API_DFKillAuthentication()*

Running the Demo

- 1) Either press the reset button on your board or launch the debugger in your IDE to begin running the demo

If everything is setup correctly the output would be as follows:

```

App:INFO :PlugAndTrust_v02.09.00_20190607
      sss:INFO :atr (Len=35)
                  00 A0 00 00          03 96 04 03          E8 00 FE 02 ↴
      ↵      0B 03 E8 08          01 00 00 00          00 64 00 00          0A 4A 43 4F ↴
      ↵      50 34 20 41          54 50 4F
                  54 50 4F
      sss:WARN :Communication channel is Plain.
      sss:WARN :!!!Not recommended for production use.!!!
Tx> 26
Rx< 04 03
Tx> 93 20
Rx< 08 7D 6B 96 88
Tx> 93 70 08 7D 6B 96 88
Rx< 20
UID after L3 Activation 08 7D 6B 96 00 00 00 00 00 00
Tx> E0 80
Rx< 06 75 77 81 02 80
ATS after L4 Activation 06 75 77 81 02 80
Tx> 0A 00
Tx> 5A 11 22 33
Rx< 0A 00 00
      App:INFO :Select the AFC Application Successful

      App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = ↴
      ↵2103308288
Tx> 0B 00
Tx> 71 00 06 00 00 00 00 00 00 00

```

(continues on next page)

(continued from previous page)

```

Rx< 0B 00 AF 35 58 48 3C 62 54 DE 34 F5 78 03 24 14 53 13 7C
    App:INFO :
    CARD =====> SE050  16-byte Ek(RndB)  =
    (Len=16)
        35 58 48 3C           62 54 DE 34           F5 78 03 24  ↴
    ↵     14 53 13 7C
        App:INFO :
        CARD <===== SE050  E(Kx, RandA || RandB')  =
        (Len=32)
            1B 45 77 91           64 D2 57 B5           20 40 95 FD  ↴
    ↵     40 B8 D8 D4           74 C4 51 5D           5F A4 07 2C           0D 6F 8F 6B  ↴
    ↵     EF 15 4F 62
Tx> 0A 00
Tx> AF 1B 45 77 91 64 D2 57 B5 20 40 95 FD 40 B8 D8 D4 74 C4 51 5D 5F A4 07 2C 0D 6F  ↴
    ↵ 8F 6B EF 15 4F 62
Rx< 0A 00 00 78 4A 85 D0 4A 30 F5 B4 48 B6 EC 98 1F F8 43 62 BE 6E B9 03 2C 24 EF 19  ↴
    ↵ 5D A4 95 2B D8 B7 C6 8A
        App:INFO :
        CARD =====> SE050  32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2)  =
        (Len=32)
            78 4A 85 D0           4A 30 F5 B4           48 B6 EC 98  ↴
    ↵     1F F8 43 62           BE 6E B9 03           2C 24 EF 19           5D A4 95 2B  ↴
    ↵     D8 B7 C6 8A
        App:INFO :
        CARD <===== SE050  E(Kx, RandA || RandB')  =
        (Len=12)
            00 00 00 00           00 00 00 00           00 00 00 00
            App:INFO :Dumped Session Key is (Len=16)
                41 39 2E 7D           09 3E 19 DD           17 8B 0E 73  ↴
    ↵     E5 1E 12 B9
            App:INFO :Dumped Session Mac is (Len=16)
                9D 15 63 F3           2D 66 1F 4B           D6 3A 16 15  ↴
    ↵     E1 3F A6 97
            App:INFO :Dumped TI is (Len=4)
                95 E5 18 5D
            App:INFO :pDataParams->wCmdCtr=0
            App:INFO : EV2 First Authenticate Successful

Tx> 0B 00
Tx> 77 00
Rx< 0B 00 AF 50 5C 0C 05 50 7D BC 3A 8E 6B 6C 88 B1 E2 A5 B0
    App:INFO :
    CARD =====> SE050  16-byte Ek(RndB)  =
    (Len=16)
        50 5C 0C 05           50 7D BC 3A           8E 6B 6C 88  ↴
    ↵     B1 E2 A5 B0
    App:INFO :
    CARD <===== SE050  E(Kx, RandA || RandB')  =
    (Len=32)
        11 F3 C6 A4           44 EF A1 85           2F 37 AF 64  ↴
    ↵     8F 6F 51 12           6E BD E7 B5           5B E6 B1 38           9A 4F 7D A7  ↴
    ↵     8F 65 40 20
Tx> 0A 00
Tx> AF 11 F3 C6 A4 44 EF A1 85 2F 37 AF 64 8F 6F 51 12 6E BD E7 B5 5B E6 B1 38 9A 4F  ↴
    ↵ 7D A7 8F 65 40 20

```

(continues on next page)

(continued from previous page)

```

Rx< 0A 00 00 19 D9 C9 E8 4E 52 DE 9E C5 41 02 C7 80 68 76 A1
    App:INFO :
    CARD =====> SE050  32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
                    19 D9 C9 E8          4E 52 DE 9E          C5 41 02 C7  ↴
↳     80 68 76 A1
    App:INFO :Dumped Session Key is (Len=16)
                    12 EF F8 40          59 61 99 DA          B8 C4 08 3D  ↴
↳     90 8B 73 51
    App:INFO :Dumped Session Mac is (Len=16)
                    FF 23 11 DC          17 A9 7A 0B          5C D0 45 AF  ↴
↳     86 F1 87 3E
    App:INFO :Dumped TI is (Len=4)
                    95 E5 18 5D
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 Following Authenticate Successful

    App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308288
Tx> 0B 00
Tx> 51 D8 49 E7 5E F0 9B 7A 0F
Rx< 0B 00 00 B0 1F 31 B1 91 54 B6 14 42 72 B7 CD BA 24 13 66 63 CF D9 A4 F0 1B B4 00
    App:INFO :CARD UID is as below (Len=7)
                    04 40 40 42          4D 4D 80
phEx_Use_ValueFile...
Performing Accreditation in AFC App....
Performing Accreditation in AFC App Successful
(Plain Communicatioon) Trying to Get the Current Value. Plain Communicatioon
Tx> 0A 00
Tx> 6C 03
Rx< 0A 00 00 14 00 00 00
Getting current value Successful
(Enc Communication using session Key) Trying to Add money to the account
Tx> 0B 00
Tx> 0C 03
Tx> 78 E3 12 67 90 96 56 EA 91 88 6A B8 08 46 A2 14 49 37 CE 63 E2 27 7C 1B
Rx< 0B 00 00 E2 CE 37 F1 09 D8 E1 EA
Add money to the account successful
Tx> 0A 00
Tx> C7 01 8A 66 56 AC 96 BA B6 2E
Rx< 0A 00 00 01 00 00 00 71 76 A5 CC 92 DA 07 A4 C2 23 23 28 FC EF 11 C7
Tx> 0B 00
Tx> 6C 03
Rx< 0B 00 00 17 00 00 00
The amount in your account After credit is 0 0 0 17
    Accreditation DONE!
    App:INFO : Auth session is reset in software
    App:INFO : Auth session is killed in SE
    App:INFO :ex_sss Finished

```

5.10.4 MIFARE DESFire EV2 : Change Key

Warning: To run this example, you would need the nxpnfcrdlib component for which a Non-Disclosure Agreement(NDA) needs to be signed. Please contact your FAE for additional details.

Prerequisites

- *MIFARE DESFire EV2 : Prepare MDFEV2* must have been executed, so that the MIFARE DESFire EV2 card has the required credentials. For relevant platforms, a KSDK package is available. Please import and execute the example *MIFARE DESFire EV2 : Prepare MDFEV2*.
- *MIFARE DESFire EV2 : Prepare Secure Element* must have been executed, so that the Secure element has the required credentials. For relevant platforms, a KSDK package is available. Please import and execute the example *MIFARE DESFire EV2 : Prepare Secure Element*.
- Bring Up Hardware. (Refer *Development Platforms*)
- Connect RC663 to your microcontroller. (Refer mifarekdf-rc663)

About the Example

This project demonstrates the Mifare Desfire EV2 ChangeKeyEv2 using Se05x. After Changing Keys, it performs encrypted communication with the desfire EV2 card using the changed key. If enabled, It also reverts back the changed key.

It uses the following APIs and data types:

- *Se05x_API_DFChangeKeyPart1()*
- *Se05x_API_DFChangeKeyPart2()*
- *Se05x_API_DFAuthenticateFirstPart1()*
- *Se05x_API_DFAuthenticateNonFirstPart1()*
- *Se05x_API_DFAuthenticateFirstPart2()*
- *Se05x_API_DFAuthenticateNonFirstPart2()*
- *Se05x_API_DFKillAuthentication()*

Running the Demo

- 1) Either press the reset button on your board or launch the debugger in your IDE to begin running the demo

If everything is setup correctly the output would be as follows:

```

App:INFO :PlugAndTrust_v02.09.00_20190607
sss:INFO :atr (Len=35)
 00 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 08
 01 00 00 00      00 64 00 00      0A 4A 43 4F      50 34 20 41
 54 50 4F
sss:WARN :Communication channel is Plain.
sss:WARN :!!!Not recommended for production use.!!!
Tx> 26
Rx< 04 03
Tx> 93 20

```

(continues on next page)

(continued from previous page)

```

Rx< 08 00 FD 08 FD
Tx> 93 70 08 00 FD 08 FD
Rx< 20
UID after L3 Activation 08 00 FD 08 00 00 00 00 00 00 00 00 00 00 00 00 00
Tx> E0 80
Rx< 06 75 77 81 02 80
ATS after L4 Activation 06 75 77 81 02 80
Tx> 0A 00
Tx> 5A 11 22 33
Rx< 0A 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = 2103308288
Tx> 0B 00
Tx> 71 00 06 00 00 00 00 00 00 00
Rx< 0B 00 AF B4 BF 4B CE F5 D6 B4 A8 78 7B 67 48 E2 9A 69 E2
    App:INFO :
CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
    B4 BF 4B CE      F5 D6 B4 A8      78 7B 67 48      E2 9A 69 E2
    App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
    EF A9 8E BA      7A F6 29 E3      09 26 5C 2D      15 09 72 C1
    5B D3 8B FA      35 97 D4 74      C0 CC E9 3D      2C FC 0F B0
Tx> 0A 00
Tx> AF EF A9 8E BA 7A F6 29 E3 09 26 5C 2D 15 09 72 C1 5B D3 8B FA 35 97 D4 74 C0 CC E9
3D 2C FC 0F B0
Rx< 0A 00 00 AA 21 3F 9C E2 93 74 37 96 7A 4B 2E E5 25 D0 6C A6 D2 95 03 56 05 51 E6 D8
76 BF 26 13 1A 54 E9
    App:INFO :
CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=32)
    AA 21 3F 9C      E2 93 74 37      96 7A 4B 2E      E5 25 D0 6C
    A6 D2 95 03      56 05 51 E6      D8 76 BF 26      13 1A 54 E9
    App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=12)
    00 00 00 00      00 00 00 00      00 00 00 00
    App:INFO :Dumped Session Key is (Len=16)
    C0 F5 21 9F      2C 30 E6 A8      59 F8 91 3E      F5 8B D5 E8
    App:INFO :Dumped Session Mac is (Len=16)
    0B 69 27 1D      5F 13 EA 2D      5B 7A 96 7A      52 D7 78 26
    App:INFO :Dumped TI is (Len=4)
    A2 27 15 FA
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 First Authenticate Successful

Tx> 0B 00
Tx> 77 00
Rx< 0B 00 AF AA 90 E0 4D EA CA 82 06 CF BD 71 EC CC D4 13 EA
    App:INFO :
CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
    AA 90 E0 4D      EA CA 82 06      CF BD 71 EC      CC D4 13 EA
    App:INFO :

```

(continues on next page)

(continued from previous page)

```

CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
  2D AC 96 1B      3D 9D 1D A9      FB A5 50 C3      D9 77 B1 AD
  6B E8 A1 1A      3A B9 70 59      4D DC 97 0E      43 FF 4E 1B
Tx> 0A 00
Tx> AF 2D AC 96 1B 3D 9D 1D A9 FB A5 50 C3 D9 77 B1 AD 6B E8 A1 1A 3A B9 70 59 4D DC
  ↵ 97 0E 43 FF 4E 1B
Rx< 0A 00 00 C2 EA 3C CD 57 5A B5 BA 28 E1 ED 9F 5A 25 43 54
  App:INFO :
  CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
  C2 EA 3C CD      57 5A B5 BA      28 E1 ED 9F      5A 25 43 54
    App:INFO :Dumped Session Key is (Len=16)
    63 BD 6A 50      20 21 B7 75      37 60 E2 20      FB 8C AE 16
    App:INFO :Dumped Session Mac is (Len=16)
    23 8F 24 BE      C0 3B BA 91      BB CB 4C 5B      35 AE F7 2B
    App:INFO :Dumped TI is (Len=4)
    A2 27 15 FA
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 Following Authenticate Successful

    App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308288
    App:INFO :attempting to change cardkey = 2 from Old Se050ObjID= 2103308288 to
  ↵ new Se050ObjID= 2103308289
Tx> 0B 00
Tx> C6 00 02 1A 76 EC 43 C7 84 68 A3 9B 6F 48 89 3F 28 0E B3 84 88 1A B8 04 45 0C 93
  ↵ 98 B3 EF E7 69 81 BC A5 00 C9 71 35 A0 DF 8B D8
Rx< 0B 00 00 05 5E 90 58 DB D5 33 95
  App:INFO : Change Key for card key 2 is Successful to Se050ObjID= 2103308289

  App:INFO :Checking that the previous auth session is still valid by trying an
  ↵ encrypted communication
Tx> 0A 00
Tx> 51 57 8B 91 0C E6 28 06 A0
Rx< 0A 00 00 5D 03 C2 BB 05 1D 51 D1 91 F9 88 01 E4 F9 27 D2 69 F3 B4 67 D0 FA 65 D4
  App:INFO :CARD UID is as below (Len=7)
  04 40 40 42      4D 4D 80
  App:INFO :Previous auth session is still valid
  App:INFO :Auth with the changed cardkey 2
Tx> 0B 00
Tx> 5A 11 22 33
Rx< 0B 00 00
  App:INFO :Select the AFC Application Successful

  App:INFO :attempting to authenticate with cardkey = 2 and Se0Obj ID =
  ↵ 2103308289
Tx> 0A 00
Tx> 71 02 06 00 00 00 00 00 00
Rx< 0A 00 AF E5 9E 5D E4 DB OF 51 D7 79 46 18 7A CB 06 D5 0E
  App:INFO :
  CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
  E5 9E 5D E4      DB OF 51 D7      79 46 18 7A      CB 06 D5 0E
  App:INFO :
  CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
  D6 C5 48 6C      C8 60 58 CC      D5 8A 6D 80      3A DD DF 32

```

(continues on next page)

(continued from previous page)

```

A3 CA FD AF      8A BA 71 B6      F6 7C 51 71      AA D6 46 AA
Tx> 0B 00
Tx> AF D6 C5 48 6C C8 60 58 CC D5 8A 6D 80 3A DD DF 32 A3 CA FD AF 8A BA 71 B6 F6 7C
→51 71 AA D6 46 AA
Rx< 0B 00 00 8A 86 8C AF ED F4 DB 56 68 81 71 1E 96 AD EF E6 5A A0 DD DA C5 BB 2E 9F
→BE 0F 7F 39 1F OC 4B BF

App:INFO :
CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=32)
  8A 86 8C AF      ED F4 DB 56      68 81 71 1E      96 AD EF E6
  5A A0 DD DA      C5 BB 2E 9F      BE 0F 7F 39      1F 0C 4B BF

App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=12)
  00 00 00 00      00 00 00 00      00 00 00 00
  App:INFO :Dumped Session Key is (Len=16)
  6E B1 6E 85      61 F3 B6 23      6D CD 72 66      35 A9 30 0A
  App:INFO :Dumped Session Mac is (Len=16)
  31 2D 73 1C      F6 90 66 AA      60 B4 C0 34      D5 03 54 6D
  App:INFO :Dumped TI is (Len=4)
  36 D6 43 CB
  App:INFO :pDataParams->wCmdCtr=0
  App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 02
Rx< 0A 00 AF 68 01 92 38 38 81 DB EE EB 9C 49 05 EA AD 1C B5
  App:INFO :
  CARD =====> SE050 16-byte Ek(RndB) =
  (Len=16)
    68 01 92 38      38 81 DB EE      EB 9C 49 05      EA AD 1C B5
  App:INFO :
  CARD <===== SE050 E(Kx, RandA || RandB') =
  (Len=32)
    01 A7 15 73      7F C3 34 4D      6C C7 43 9B      BB 1C 44 DE
    28 78 DE 4B      69 43 53 02      C9 85 A6 21      6F F5 73 E0

Tx> 0B 00
Tx> AF 01 A7 15 73 7F C3 34 4D 6C C7 43 9B BB 1C 44 DE 28 78 DE 4B 69 43 53 02 C9 85
→A6 21 6F F5 73 E0
Rx< 0B 00 00 8F 15 A7 DB DE 7F 4B D7 AD C4 B6 4C E4 BD 37 BD
  App:INFO :
  CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
  (Len=16)
    8F 15 A7 DB      DE 7F 4B D7      AD C4 B6 4C      E4 BD 37 BD
    App:INFO :Dumped Session Key is (Len=16)
    BD 61 A3 45      2F 91 FA E4      87 7A 0A 6C      33 B7 29 B8
    App:INFO :Dumped Session Mac is (Len=16)
    87 87 14 42      F4 16 E5 74      F0 12 5F AA      B8 2C 70 86
    App:INFO :Dumped TI is (Len=4)
    36 D6 43 CB
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 Following Authenticate Successful

  App:INFO :Authenticated with cardkey = 2 and Se0Obj ID = 2103308289
  App:INFO :Checking that the auth session with changed key is valid by trying
→an encrypted communication
Tx> 0A 00

```

(continues on next page)

(continued from previous page)

```

Tx> 51 DA FA 27 73 68 30 43 16
Rx< 0A 00 00 F3 40 C6 9E 11 23 4C A5 22 A7 35 30 D2 DB CD B3 D4 3D 89 66 CA 3D 57 7D
    App:INFO :CARD UID is as below (Len=7)
        04 40 40 42      4D 4D 80
    App:INFO :Encrypted communication with changed key successful
    App:INFO :Reverting the changed cardkey 2
Tx> 0B 00
Tx> 5A 11 22 33
Rx< 0B 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = 2103308288
Tx> 0A 00
Tx> 71 00 06 00 00 00 00 00 00
Rx< 0A 00 AF 41 EB 4E 85 BB A2 31 85 F6 8F 4B 7D FD 55 02 BC
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
    (Len=16)
        41 EB 4E 85      BB A2 31 85      F6 8F 4B 7D      FD 55 02 BC
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=32)
        7F 08 80 7A      AD 97 69 12      95 C3 F5 5C      72 03 D6 D4
        F6 22 D4 ED      43 44 72 E2      C2 99 82 52      57 1D 80 57
Tx> 0B 00
Tx> AF 7F 08 80 7A AD 97 69 12 95 C3 F5 5C 72 03 D6 D4 F6 22 D4 ED 43 44 72 E2 C2 99 82 52 57 1D 80 57
Rx< 0B 00 00 E3 73 4F F3 50 65 30 02 2F B0 B6 0A 49 57 43 E0 75 49 3C 5D C1 DE B4 78 84 8D 00 9A 67 85 33 EA
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
    (Len=32)
        E3 73 4F F3      50 65 30 02      2F B0 B6 0A      49 57 43 E0
        75 49 3C 5D      C1 DE B4 78      84 8D 00 9A      67 85 33 EA
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=12)
        00 00 00 00      00 00 00 00      00 00 00 00
    App:INFO :Dumped Session Key is (Len=16)
        B3 44 56 9F      04 11 40 DF      5C DF 1A 24      82 E6 24 C7
    App:INFO :Dumped Session Mac is (Len=16)
        16 18 AA 95      F0 E9 40 0A      DA 22 FF 76      02 7B D6 8F
    App:INFO :Dumped TI is (Len=4)
        0D AC 1D F2
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO :EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 00
Rx< 0A 00 AF E0 7B AA 84 C9 44 56 DE 96 72 FD 80 7C 27 31 D9
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
    (Len=16)
        E0 7B AA 84      C9 44 56 DE      96 72 FD 80      7C 27 31 D9
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =

```

(continues on next page)

(continued from previous page)

```
(Len=32)
    D7 76 C8 85      E4 A1 5B 43      F0 8B F5 E5      30 FE 1C 24
    EA 93 A5 AB      78 D9 82 D2      1A 59 E5 D3      25 8A CA D2
Tx> 0B 00
Tx> AF D7 76 C8 85 E4 A1 5B 43 F0 8B F5 E5 30 FE 1C 24 EA 93 A5 AB 78 D9 82 D2 1A 59
    ↳E5 D3 25 8A CA D2
Rx< 0B 00 00 0C A8 D5 4E FB F5 87 00 F3 2F 27 E5 4F 9A 8A 39
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
    0C A8 D5 4E      FB F5 87 00      F3 2F 27 E5      4F 9A 8A 39
    App:INFO :Dumped Session Key is (Len=16)
    00 8E 4C DE      33 20 50 4C      52 23 CC BF      15 BD E2 27
    App:INFO :Dumped Session Mac is (Len=16)
    00 AE 0D 01      C1 4D 47 86      57 04 60 6D      3F DD A5 A0
    App:INFO :Dumped TI is (Len=4)
    0D AC 1D F2
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 Following Authenticate Successful

    App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308288
    App:INFO :attempting to change cardkey = 2 from Old Se050ObjID= 2103308289 to
    ↳new Se050ObjID= 2103308288
Tx> 0A 00
Tx> C6 00 02 0B 44 52 C6 A9 EE 58 C1 9B 03 4F 64 58 DA 86 AA DE DE 68 03 8A AC F4 E2
    ↳8A E5 B1 F3 84 F5 87 F5 3D DC CC 01 DF D8 E7 68
Rx< 0A 00 00 9E C3 E2 37 5E 2D 40 E6
    App:INFO : Change Key for card key 2 is Successful to Se050ObjID= 2103308288

    App:INFO :Reverting Successful
Tx> 0B 00
Tx> 5A 11 22 33
Rx< 0B 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID =
    ↳2103308288
Tx> 0A 00
Tx> 71 00 06 00 00 00 00 00 00 00
Rx< 0A 00 AF 28 5A 92 39 D1 81 2E 77 92 07 5D C6 B2 8E 57 20
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
    28 5A 92 39      D1 81 2E 77      92 07 5D C6      B2 8E 57 20
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
    DE E0 70 04      F2 E8 55 7C      83 D7 D0 B0      EA 4B AA 60
    F5 4F B5 AF      9E 73 A0 DD      E6 EF 77 2C      BD 6D 99 BE
Tx> 0B 00
Tx> AF DE E0 70 04 F2 E8 55 7C 83 D7 D0 B0 EA 4B AA 60 F5 4F B5 AF 9E 73 A0 DD E6 EF
    ↳77 2C BD 6D 99 BE
Rx< 0B 00 00 B7 55 91 A4 03 DA 29 3B ED 0D 63 E4 21 17 DC 86 D8 2C 62 39 4E EC B3 A0
    ↳31 82 64 BD 51 A1 D1 A0
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=32)
```

(continues on next page)

(continued from previous page)

```

B7 55 91 A4      03 DA 29 3B      ED 0D 63 E4      21 17 DC 86
D8 2C 62 39      4E EC B3 A0      31 82 64 BD      51 A1 D1 A0
App:INFO :
CARD <===== SE050  E(Kx, RandA || RandB') =
(Len=12)
00 00 00 00      00 00 00 00      00 00 00 00
App:INFO :Dumped Session Key is (Len=16)
1C 92 1F 77      EC A4 26 FD      20 67 3C C0      63 62 20 15
App:INFO :Dumped Session Mac is (Len=16)
64 B2 DA 8B      05 8C 8B 24      1E AC 5E 31      CF B7 76 5D
App:INFO :Dumped TI is (Len=4)
40 77 24 27
App:INFO :pDataParams->wCmdCtr=0
App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 00
Rx< 0A 00 AF C8 F3 B0 76 49 C6 BF C3 43 F5 62 67 CF BF 4D CC
App:INFO :
CARD =====> SE050  16-byte Ek(RndB) =
(Len=16)
C8 F3 B0 76      49 C6 BF C3      43 F5 62 67      CF BF 4D CC
App:INFO :
CARD <===== SE050  E(Kx, RandA || RandB') =
(Len=32)
52 5A 01 9E      B3 F2 5E 42      6F 0A 61 70      46 C2 81 54
C4 22 67 87      99 07 49 EA      B0 12 DB A3      69 24 38 4B
Tx> 0B 00
Tx> AF 52 5A 01 9E B3 F2 5E 42 6F 0A 61 70 46 C2 81 54 C4 22 67 87 99 07 49 EA B0 12DB
A3 69 24 38 4B
Rx< 0B 00 00 18 58 A0 DF 76 76 BB A3 F8 96 97 B7 0A DD 8C FD
App:INFO :
CARD =====> SE050  32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
18 58 A0 DF      76 76 BB A3      F8 96 97 B7      0A DD 8C FD
App:INFO :Dumped Session Key is (Len=16)
2A A1 EA B5      1D 7A F1 AB      B7 3D 00 31      D1 26 2C 7A
App:INFO :Dumped Session Mac is (Len=16)
91 E9 3B CA      3D C1 53 C8      4C 13 28 28      C2 3F C9 6B
App:INFO :Dumped TI is (Len=4)
40 77 24 27
App:INFO :pDataParams->wCmdCtr=0
App:INFO : EV2 Following Authenticate Successful

App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308288
App:INFO :attempting to change cardkey = 0 from Old Se050ObjID= 2103308288 tonew
Se050ObjID= 2103308289
Tx> 0A 00
Tx> C6 00 00 A8 60 79 3E 01 31 C9 91 16 BC 07 F4 85 2D BC 7D 8B D7 CD 34 4B B4 F5 A3BD
97 AD 02 89 9B 47 00 FA C8 63 0F 97 E9 55 8A
Rx< 0A 00 00
App:INFO : Change Key for card key 0 is Successful to Se050ObjID= 2103308289

App:INFO :The previous auth session is not valid anymore.
App:INFO :So.....
App:INFO :Auth with the changed cardkey 0
Tx> 0B 00

```

(continues on next page)

(continued from previous page)

```

Tx> 5A 11 22 33
Rx< 0B 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = ↵
    ↵2103308289
Tx> 0A 00
Tx> 71 00 06 00 00 00 00 00 00 00
Rx< 0A 00 AF 96 E8 80 35 41 30 37 A7 24 8B 73 42 44 43 13 BC
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
    (Len=16)
        96 E8 80 35      41 30 37 A7      24 8B 73 42      44 43 13 BC
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=32)
        C5 FA 74 68      B0 D8 B4 31      B6 FA 76 EF      1E 21 F4 ED
        07 74 8C 1D      7C F7 5F 0F      63 24 28 7F      95 09 EF C8
Tx> 0B 00
Tx> AF C5 FA 74 68 B0 D8 B4 31 B6 FA 76 EF 1E 21 F4 ED 07 74 8C 1D 7C F7 5F OF 63 24 ↵
    ↵28 7F 95 09 EF C8
Rx< 0B 00 00 F5 3D 5C 3D 95 9D A1 54 9B F8 BE 42 C0 BA EE 06 80 6F 29 91 79 89 46 FA ↵
    ↵34 5C 82 C0 66 A5 CE AE
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
    (Len=32)
        F5 3D 5C 3D      95 9D A1 54      9B F8 BE 42      C0 BA EE 06
        80 6F 29 91      79 89 46 FA      34 5C 82 C0      66 A5 CE AE
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=12)
        00 00 00 00      00 00 00 00      00 00 00 00
        App:INFO :Dumped Session Key is (Len=16)
        1B CA B6 46      6B 97 17 D0      A9 FA F4 DC      0B 01 59 CE
        App:INFO :Dumped Session Mac is (Len=16)
        06 B0 72 C5      8E 71 88 C0      44 51 DC 45      14 7A 42 AB
        App:INFO :Dumped TI is (Len=4)
        AD AB 0E F3
        App:INFO :pDataParams->wCmdCtr=0
        App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 00
Rx< 0A 00 AF AF CA 35 37 D2 96 8B FA F5 06 CD 1E 6B D8 6E E0
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
    (Len=16)
        AF CA 35 37      D2 96 8B FA      F5 06 CD 1E      6B D8 6E E0
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=32)
        C2 72 DA 88      02 5E A0 5C      04 CC E7 86      AD 21 07 D3
        A8 74 9C 99      51 9C 62 00      00 C9 BE C9      AD FD DA 50
Tx> 0B 00
Tx> AF C2 72 DA 88 02 5E A0 5C 04 CC E7 86 AD 21 07 D3 A8 74 9C 99 51 9C 62 00 00 C9 ↵
    ↵BE C9 AD FD DA 50
Rx< 0B 00 00 68 C1 89 4B C1 C0 E0 20 ED 66 D1 6C D3 BE 28 99

```

(continues on next page)

(continued from previous page)

```

App:INFO :
CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
  68 C1 89 4B      C1 C0 E0 20      ED 66 D1 6C      D3 BE 28 99
  App:INFO :Dumped Session Key is (Len=16)
  36 96 A4 26      4B 8F FC C3      46 A9 57 79      A7 1D 12 D3
  App:INFO :Dumped Session Mac is (Len=16)
  B8 21 B9 B6      6E 13 4F 99      E3 C7 07 89      17 09 FF 0E
  App:INFO :Dumped TI is (Len=4)
  AD AB 0E F3
  App:INFO :pDataParams->wCmdCtr=0
  App:INFO : EV2 Following Authenticate Successful

  App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308289
  App:INFO :Checking that the auth session with changed key is valid by trying ↴
  ↪an encrypted communication
Tx> 0A 00
Tx> 51 DE C0 9D 65 2B 8A 37 96
Rx< 0A 00 00 AD 6F 30 A2 17 04 F6 4B 0A BC 56 B1 0C 27 04 ED 87 FE 88 49 11 44 4E 94
  App:INFO :CARD UID is as below (Len=7)
  04 40 40 42      4D 4D 80
  App:INFO :Encrypted communication with changed key successful
  App:INFO :Reverting the changed cardkey 0
Tx> 0B 00
Tx> 5A 11 22 33
Rx< 0B 00 00
  App:INFO :Select the AFC Application Successful

  App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = ↴
  ↪2103308289
Tx> 0A 00
Tx> 71 00 06 00 00 00 00 00 00
Rx< 0A 00 AF 13 41 E7 9C 31 3E 03 7F 84 46 DC 32 6A F0 81 61
  App:INFO :
  CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
  13 41 E7 9C      31 3E 03 7F      84 46 DC 32      6A F0 81 61
  App:INFO :
  CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
  2A 23 A4 C9      8F D9 42 FA      8E E2 2B 6E      5C E2 0B 63
  37 F7 D7 ED      68 33 0D 8F      84 8B 14 F7      7E 76 09 4A
Tx> 0B 00
Tx> AF 2A 23 A4 C9 8F D9 42 FA 8E E2 2B 6E 5C E2 0B 63 37 F7 D7 ED 68 33 0D 8F 84 8B ↴
  ↪14 F7 7E 76 09 4A
Rx< 0B 00 00 E6 93 12 92 02 B1 64 90 3F 85 3C 65 C0 F7 32 81 6E C8 34 3F 00 59 60 AA ↴
  ↪48 DD 94 DC 48 AF C2 25
  App:INFO :
  CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=32)
  E6 93 12 92      02 B1 64 90      3F 85 3C 65      C0 F7 32 81
  6E C8 34 3F      00 59 60 AA      48 DD 94 DC      48 AF C2 25
  App:INFO :
  CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=12)
  00 00 00 00      00 00 00 00      00 00 00 00
  App:INFO :Dumped Session Key is (Len=16)

```

(continues on next page)

(continued from previous page)

```

22 78 6D 20      7D B1 0D 50      0D 95 B9 97      0C 0B 72 4D
  App:INFO :Dumped Session Mac is (Len=16)
7A AD D3 1A      3B 3D DA 6A      7D 76 F5 64      26 A8 C4 97
  App:INFO :Dumped TI is (Len=4)
48 3D F6 3C
  App:INFO :pDataParams->wCmdCtr=0
  App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 00
Rx< 0A 00 AF A6 60 13 9E 79 C2 5B 8A 12 E6 93 1B 84 BD C9 31
  App:INFO :
CARD =====> SE050  16-byte Ek(RndB)  =
(Len=16)
  A6 60 13 9E      79 C2 5B 8A      12 E6 93 1B      84 BD C9 31
  App:INFO :
CARD <===== SE050  E(Kx, RandA || RandB')  =
(Len=32)
  B8 95 BC 94      58 81 1D 8D      20 E4 F1 FB      EE 3A 68 27
  F0 BA B4 19      A6 5F 45 9A      F9 A4 04 D4      3B 19 E9 6F
Tx> 0B 00
Tx> AF B8 95 BC 94 58 81 1D 8D 20 E4 F1 FB EE 3A 68 27 F0 BA B4 19 A6 5F 45 9A F9 A4 ↴
  ↪04 D4 3B 19 E9 6F
Rx< 0B 00 00 11 5F BE 3E 3E 3F A7 D3 3F 55 7E 44 05 C3 FC 72
  App:INFO :
CARD =====> SE050  32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2)  =
(Len=16)
  11 5F BE 3E      3E 3F A7 D3      3F 55 7E 44      05 C3 FC 72
  App:INFO :Dumped Session Key is (Len=16)
  8F C6 94 CF      AF 83 63 3B      A8 44 40 D7      18 19 39 BC
  App:INFO :Dumped Session Mac is (Len=16)
  C0 FF 0B A2      18 CD 33 8C      25 C5 24 E1      72 D2 F9 FB
  App:INFO :Dumped TI is (Len=4)
  48 3D F6 3C
  App:INFO :pDataParams->wCmdCtr=0
  App:INFO : EV2 Following Authenticate Successful

  App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308289
  App:INFO :attempting to change cardkey = 0 from Old Se050ObjID= 2103308289 to ↴
  ↪new Se050ObjID= 2103308288
Tx> 0A 00
Tx> C6 00 00 09 C9 09 2E 8F 81 40 6C EB B8 9C 0D 49 92 B6 C7 D2 18 87 B2 D8 EA 42 79 ↴
  ↪D1 99 AA 6B 56 9D 01 89 47 55 A9 8B 66 2B 51 D8
Rx< 0A 00 00
  App:INFO : Change Key for card key 0 is Successful to Se050ObjID= 2103308288

  App:INFO :Reverting Successful
  App:INFO : Auth session is reset in software
  App:INFO : Auth session is killed in SE
  App:INFO :ex_sss Finished

```

5.10.5 MIFARE DESFire EV2 : Diversified Change Key

Warning: To run this example, you would need the nxpnfcrdlib component for which a Non-Disclosure Agreement(NDA) needs to be signed. Please contact your FAE for additional details.

Prerequisites

- *MIFARE DESFire EV2 : Prepare MDFEV2* must have been executed, so that the MIFARE DESFire EV2 card has the required credentials. For relevant platforms, a KSDK package is available. Please import and execute the example *MIFARE DESFire EV2 : Prepare MDFEV2*.
- *MIFARE DESFire EV2 : Prepare Secure Element* must have been executed, so that the Secure element has the required credentials. For relevant platforms, a KSDK package is available. Please import and execute the example *MIFARE DESFire EV2 : Prepare Secure Element*.
- Bring Up Hardware. (Refer *Development Platforms*)
- Connect RC663 to your microcontroller. (Refer mifarekdf-rc663)

About the Example

This project demonstrates the Mifare Desfire EV2 Diversified ChangeKeyEv2 using Seo50. The Key is diversified using the card UID. After changing Keys, it performs encrypted communication with the desfire EV2 card using the diversified changed key. If enabled, It also reverts back the changed key.

It uses the following APIs and data types:

- *Se05x_API_DFDiversifyKey()*
- *Se05x_API_DFChangeKeyPart1()*
- *Se05x_API_DFChangeKeyPart2()*
- *Se05x_API_DFAuthenticateFirstPart1()*
- *Se05x_API_DFAuthenticateNonFirstPart1()*
- *Se05x_API_DFAuthenticateFirstPart2()*
- *Se05x_API_DFAuthenticateNonFirstPart2()*
- *Se05x_API_DFKillAuthentication()*

Running the Demo

- 1) Either press the reset button on your board or launch the debugger in your IDE to begin running the demo

If everything is setup correctly the output would be as follows:

```

App:INFO :PlugAndTrust_v02.09.00_20190607
sss:INFO :atr (Len=35)
00 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 08
01 00 00 00      00 64 00 00      0A 4A 43 4F      50 34 20 41
54 50 4F
sss:WA          App:INFO :PlugAndTrust_v02.09.00_20190607
sss:INFO :atr (Len=35)
00 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 08

```

(continues on next page)

(continued from previous page)

```

01 00 00 00      00 64 00 00      0A 4A 43 4F      50 34 20 41
54 50 4F
sss:WARN :Communication channel is Plain.
sss:WARN :!!!Not recommended for production use.!!!
Tx> 26
Rx< 04 03
Tx> 93 20
Rx< 08 04 4D 8D CC
Tx> 93 70 08 04 4D 8D CC
Rx< 20
UID after L3 Activation 08 04 4D 8D 00 00 00 00 00 00 00 00
Tx> E0 80
Rx< 06 75 77 81 02 80
ATS after L4 Activation 06 75 77 81 02 80
App:INFO :Auth with the cardkey 0 and getting the card UID for diversification
Tx> 0A 00
Tx> 5A 11 22 33
Rx< 0A 00 00
App:INFO :Select the AFC Application Successful

App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = 2103308288
Tx> 0B 00
Tx> 71 00 06 00 00 00 00 00 00 00
Rx< 0B 00 AF CB 39 4E 26 F8 1E 1D CE 4B 66 2B E7 64 2D 5D 89
App:INFO :
CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
CB 39 4E 26      F8 1E 1D CE      4B 66 2B E7      64 2D 5D 89
App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
9A 2F 8D 8C      2F 4E 1B C3      F3 D0 ED 84      36 9E DC 03
79 A5 27 2A      66 91 F0 6D      EC 4F 90 C7      E5 25 EA 51
Tx> 0A 00
Tx> AF 9A 2F 8D 8C 2F 4E 1B C3 F3 D0 ED 84 36 9E DC 03 79 A5 27 2A 66 91 F0 6D EC 4F 90 C7 E5 25 EA 51
Rx< 0A 00 00 A1 F9 0D 31 3A 6F 32 F2 06 69 25 1A E7 4E 3F 8C 20 EF B3 14 C5 0F DD A1 80 E3 13 43 C1 18 14 5D
App:INFO :
CARD =====> SE050 32-byte E(Kx, TI || RandA' || PDCap2 || PCDcap2) =
(Len=32)
A1 F9 0D 31      3A 6F 32 F2      06 69 25 1A      E7 4E 3F 8C
20 EF B3 14      C5 0F DD A1      80 E3 13 43      C1 18 14 5D
App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=12)
00 00 00 00      00 00 00 00      00 00 00 00
App:INFO :Dumped Session Key is (Len=16)
4E 55 15 1D      F5 6C F5 B4      27 2E D1 4E      50 5C C7 22
App:INFO :Dumped Session Mac is (Len=16)
36 5C C9 22      F2 F7 67 7A      47 71 12 5E      79 3F D5 43
App:INFO :Dumped TI is (Len=4)
1F C1 6F CF
App:INFO :pDataParams->wCmdCtr=0
App:INFO :EV2 First Authenticate Successful

```

(continues on next page)

(continued from previous page)

```

Tx> 0B 00
Tx> 77 00
Rx< 0B 00 AF 87 4A 81 2F 50 F1 44 55 5F E6 B0 31 AB AD 3B B0
    App:INFO :
CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
    87 4A 81 2F      50 F1 44 55      5F E6 B0 31      AB AD 3B B0
    App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
    0D D4 AA 86      A4 CA 79 9B      F3 9D 2E 1F      C1 64 F9 3F
    47 EF 29 F9      0E 6F F1 C0      1E 0F E4 4E      BB 2D D0 1F
Tx> 0A 00
Tx> AF 0D D4 AA 86 A4 CA 79 9B F3 9D 2E 1F C1 64 F9 3F 47 EF 29 F9 0E 6F F1 C0 1E OF 
  E4 4E BB 2D D0 1F
Rx< 0A 00 00 CE 33 17 C3 41 7A 8F DF 04 F9 04 E3 CB 2D 2E BC
    App:INFO :
CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
    CE 33 17 C3      41 7A 8F DF      04 F9 04 E3      CB 2D 2E BC
    App:INFO :Dumped Session Key is (Len=16)
    38 54 53 76      E8 15 A5 DD      32 28 EB D5      1F 15 87 25
    App:INFO :Dumped Session Mac is (Len=16)
    1C A4 94 0C      63 4C E6 63      FB F3 48 A1      8D D9 34 9B
    App:INFO :Dumped TI is (Len=4)
    1F C1 6F CF
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 Following Authenticate Successful

    App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308288
Tx> 0B 00
Tx> 51 61 14 F1 85 4C 47 DE 42
Rx< 0B 00 00 25 D5 5B 00 6B F0 5D A9 C5 15 26 DF C2 96 D3 F3 A6 6B 4C 8E 80 E1 3D 24
    App:INFO :CARD UID will be used for diversification
Tx> 0A 00
Tx> 5A 11 22 33
Rx< 0A 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = 
  2103308288
Tx> 0B 00
Tx> 71 00 06 00 00 00 00 00 00 00
Rx< 0B 00 AF 6A E9 E5 F3 4C E3 58 E5 DB 1A DE 6B A7 C6 79 68
    App:INFO :
CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
    6A E9 E5 F3      4C E3 58 E5      DB 1A DE 6B      A7 C6 79 68
    App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
    54 6B B9 B4      41 F0 3D E6      37 40 28 DA      61 ED 81 97
    37 50 E0 F2      86 5D E7 E5      A2 F5 1F B5      0B 1A E7 7C
Tx> 0A 00
Tx> AF 54 6B B9 B4 41 F0 3D E6 37 40 28 DA 61 ED 81 97 37 50 E0 F2 86 5D E7 E5 A2 F5 
  1F B5 0B 1A E7 7C
Rx< 0A 00 00 46 24 4B 15 7C 8F D5 19 56 32 6F 11 F1 77 4B 91 59 4D CB 02 26 42 49 22 
  C0 77 8F 67 15 68 74 D4

```

(continues on next page)

(continued from previous page)

```

App:INFO :
CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=32)
 46 24 4B 15      7C 8F D5 19      56 32 6F 11      F1 77 4B 91
 59 4D CB 02      26 42 49 22      C0 77 8F 67      15 68 74 D4

App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=12)
 00 00 00 00      00 00 00 00      00 00 00 00
  App:INFO :Dumped Session Key is (Len=16)
 73 DE FB 5D      7C 78 E3 1A      BF 97 53 35      C9 2F F4 12
  App:INFO :Dumped Session Mac is (Len=16)
  CB B3 14 4E     D8 15 4E 7D      A2 A1 F9 B4      35 ED E2 4C
  App:INFO :Dumped TI is (Len=4)
 8D 19 52 6A
  App:INFO :pDataParams->wCmdCtr=0
  App:INFO : EV2 First Authenticate Successful

Tx> 0B 00
Tx> 77 00
Rx< 0B 00 AF 6C 35 C4 E2 0D C8 CC 44 69 7C 75 44 7B CA 3F 36
  App:INFO :
  CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
  6C 35 C4 E2     0D C8 CC 44      69 7C 75 44      7B CA 3F 36
  App:INFO :
  CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
  42 96 EF CB     C9 41 DD B2      F8 D5 4B 36      7F 7E F1 F0
  A5 BD E7 FB     46 D1 39 EF      1F 91 61 F4      71 B0 2D BE

Tx> 0A 00
Tx> AF 42 96 EF CB C9 41 DD B2 F8 D5 4B 36 7F 7E F1 F0 A5 BD E7 FB 46 D1 39 EF 1F 91_
→61 F4 71 B0 2D BE
Rx< 0A 00 00 3F 69 5E 84 B8 F5 04 F9 3B C3 63 07 67 BE 07 9E
  App:INFO :
  CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
  3F 69 5E 84     B8 F5 04 F9      3B C3 63 07      67 BE 07 9E
  App:INFO :Dumped Session Key is (Len=16)
  4D 43 63 4D     95 98 F9 92      EB F5 AA 3C      7C 42 EE 4C
  App:INFO :Dumped Session Mac is (Len=16)
  10 91 B7 3A     B1 B4 2C 74      A2 71 EE 4B      C8 45 94 74
  App:INFO :Dumped TI is (Len=4)
  8D 19 52 6A
  App:INFO :pDataParams->wCmdCtr=0
  App:INFO : EV2 Following Authenticate Successful

  App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308288
  App:INFO :attempting to change cardkey = 2 from Old Se050ObjID= 2103308288 to_
→new Se050ObjID= 2103308289

Tx> 0B 00
Tx> C6 00 02 9A 7A DA 24 18 56 CB C8 65 92 52 07 AF 5C 31 19 EB AF BF 06 CA 98 41 94_
→9F EE A5 C8 60 86 D5 67 FD 22 6D 6B 75 E4 56 5B
Rx< 0B 00 00 CA 57 0A F4 56 2C F9 7F
  App:INFO : Change Key for card key 2 is Successful to Se050ObjID= 2103308289

  App:INFO :Checking that the previous auth session is still valid by trying an_
→encrypted communication
```

(continues on next page)

(continued from previous page)

```

Tx> 0A 00
Tx> 51 CA 0E C5 B7 E8 4D BA ED
Rx< 0A 00 00 CF 11 48 4D 32 34 D9 FE BF B9 F4 24 65 7B EC BC AD 65 93 C8 03 B7 AE 95
    App:INFO :CARD UID is as below (Len=7)
    04 40 40 42        4D 4D 80
    App:INFO :Previous auth session is still valid
    App:INFO :Auth with the changed cardkey 2
Tx> 0B 00
Tx> 5A 11 22 33
Rx< 0B 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 2 and Se0Obj ID = 2103308289
Tx> 0A 00
Tx> 71 02 06 00 00 00 00 00 00
Rx< 0A 00 AF 75 51 82 DB 46 CA A3 B5 C8 1C 3F 16 50 46 0A D4
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
    75 51 82 DB      46 CA A3 B5      C8 1C 3F 16      50 46 0A D4
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
    6F F3 1E C6      D4 B9 A6 72      DB C6 98 54      6B E8 F4 7F
    38 E3 CC 2A      34 D2 51 96      B0 D7 D4 A8      A3 30 76 4B
Tx> 0B 00
Tx> AF 6F F3 1E C6 D4 B9 A6 72 DB C6 98 54 6B E8 F4 7F 38 E3 CC 2A 34 D2 51 96 B0 D7 D4
A8 A3 30 76 4B
Rx< 0B 00 00 40 93 D2 A1 6B DD B2 1F 6E F4 FA 75 15 28 22 62 18 FD 68 CF AF 1C EC B0 41
4D 08 2E E8 13 4B A1
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=32)
    40 93 D2 A1      6B DD B2 1F      6E F4 FA 75      15 28 22 62
    18 FD 68 CF      AF 1C EC B0      41 4D 08 2E      E8 13 4B A1
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=12)
    00 00 00 00      00 00 00 00      00 00 00 00
    App:INFO :Dumped Session Key is (Len=16)
    4A 69 72 BB      62 62 06 2F      02 7E 53 C2      B8 E9 F5 ED
    App:INFO :Dumped Session Mac is (Len=16)
    47 AA 13 45      A4 6C 6F 5B      D0 D8 22 C4      F2 75 DD 2C
    App:INFO :Dumped TI is (Len=4)
    19 3D B7 F6
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 02
Rx< 0A 00 AF C3 38 BF 4F E5 13 7E 02 2B 8E 21 34 2F 6C 7F 6D
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
    C3 38 BF 4F      E5 13 7E 02      2B 8E 21 34      2F 6C 7F 6D
    App:INFO :

```

(continues on next page)

(continued from previous page)

```

CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
    42 76 C2 05      F8 D5 37 1D      38 9C B3 95      A9 2A 19 5D
    75 81 7C 66      7A 53 E0 6D      3C 25 B7 3D      FD C7 38 16
Tx> 0B 00
Tx> AF 42 76 C2 05 F8 D5 37 1D 38 9C B3 95 A9 2A 19 5D 75 81 7C 66 7A 53 E0 6D 3C 25
    ↪B7 3D FD C7 38 16
Rx< 0B 00 00 12 CA C1 C4 BB B7 23 74 36 D4 17 00 4B FB 44 1F
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
    12 CA C1 C4      BB B7 23 74      36 D4 17 00      4B FB 44 1F
        App:INFO :Dumped Session Key is (Len=16)
        A2 46 74 CE      9C 90 99 2F      60 04 07 FC      9C B7 E5 3A
        App:INFO :Dumped Session Mac is (Len=16)
        1F D2 94 A3      9F AC E6 57      51 9F C1 BC      84 B9 FA 99
        App:INFO :Dumped TI is (Len=4)
        19 3D B7 F6
        App:INFO :pDataParams->wCmdCtr=0
        App:INFO : EV2 Following Authenticate Successful

        App:INFO :Authenticated with cardkey = 2 and Se0Obj ID = 2103308289
        App:INFO :Checking that the auth session with changed key is valid by trying
    ↪an encrypted communication
Tx> 0A 00
Tx> 51 87 B0 70 A8 75 FC FA 04
Rx< 0A 00 00 0A 31 4B 0C 44 BB 70 EA 61 31 00 E3 A3 E6 4E 1C 8E 6D 70 2F 86 08 A0 CD
    App:INFO :CARD UID is as below (Len=7)
    04 40 40 42      4D 4D 80
    App:INFO :Encrypted communication with changed key successful
    App:INFO :Reverting the changed cardkey 2
Tx> 0B 00
Tx> 5A 11 22 33
Rx< 0B 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID =
    ↪2103308288
Tx> 0A 00
Tx> 71 00 06 00 00 00 00 00 00
Rx< 0A 00 AF 95 85 6E 37 62 3C C5 16 A4 C7 A8 D2 6D A5 08 09
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
    95 85 6E 37      62 3C C5 16      A4 C7 A8 D2      6D A5 08 09
        App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
    9A C1 0D 08      D6 7F FC 05      3C 2E 7B 9B      5B 8B 98 36
    29 0E 57 8D      A7 BF 17 61      EB 81 CD 5C      79 2D 98 7B
Tx> 0B 00
Tx> AF 9A C1 0D 08 D6 7F FC 05 3C 2E 7B 9B 5B 8B 98 36 29 0E 57 8D A7 BF 17 61 EB 81
    ↪CD 5C 79 2D 98 7B
Rx< 0B 00 00 CF 77 E6 A9 D0 03 A7 C5 C2 D1 26 20 17 0C 05 8F E0 65 3D AA 3C F6 5D 5C
    ↪A2 8E 06 97 0B E6 73 BB
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =

```

(continues on next page)

(continued from previous page)

```

(Len=32)
CF 77 E6 A9      D0 03 A7 C5      C2 D1 26 20      17 0C 05 8F
E0 65 3D AA      3C F6 5D 5C      A2 8E 06 97      0B E6 73 BB
App:INFO :
CARD <===== SE050  E(Kx, RandA || RandB') =
(Len=12)
00 00 00 00      00 00 00 00      00 00 00 00
App:INFO :Dumped Session Key is (Len=16)
B5 0C 47 C4      C4 86 DA EC      E7 D4 C1 9C      09 92 C5 86
App:INFO :Dumped Session Mac is (Len=16)
C0 36 09 35      9E 9D 00 C5      CC CF 8C 0A      C6 AA 84 93
App:INFO :Dumped TI is (Len=4)
EE 5C D1 02
App:INFO :pDataParams->wCmdCtr=0
App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 00
Rx< 0A 00 AF 47 D5 AD E6 D8 9F 13 06 2C F8 32 CE A3 68 61 3A
App:INFO :
CARD =====> SE050  16-byte Ek(RndB) =
(Len=16)
47 D5 AD E6      D8 9F 13 06      2C F8 32 CE      A3 68 61 3A
App:INFO :
CARD <===== SE050  E(Kx, RandA || RandB') =
(Len=32)
71 83 22 6F      AD FC F8 89      F5 7F 63 15      85 87 EB 29
7A 24 30 7F      C7 D1 03 27      0A 93 EE 3F      40 68 A3 1D
Tx> 0B 00
Tx> AF 71 83 22 6F AD FC F8 89 F5 7F 63 15 85 87 EB 29 7A 24 30 7F C7 D1 03 27 0A 93
→EE 3F 40 68 A3 1D
Rx< 0B 00 00 FF 26 85 C1 A3 96 A2 92 F5 D8 D2 98 A3 56 09 44
App:INFO :
CARD =====> SE050  32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
FF 26 85 C1      A3 96 A2 92      F5 D8 D2 98      A3 56 09 44
App:INFO :Dumped Session Key is (Len=16)
6A E0 C5 B9      C6 4F C2 75      C9 65 49 D8      91 FC A6 78
App:INFO :Dumped Session Mac is (Len=16)
A3 1F 10 92      43 D9 D2 63      1E 0C 7C A3      DC 3C 26 EC
App:INFO :Dumped TI is (Len=4)
EE 5C D1 02
App:INFO :pDataParams->wCmdCtr=0
App:INFO : EV2 Following Authenticate Successful

App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308288
App:INFO :attempting to change cardkey = 2 from Old Se050ObjID= 2103308289 to
→new Se050ObjID= 2103308288
Tx> 0A 00
Tx> C6 00 02 E4 9B D3 FD 14 74 15 DC B2 D9 28 3A C5 9F BD 77 8B 12 78 3E CB 0D 4C 92
→66 84 C8 EB 91 0E BA A2 E0 6F 53 AC 51 FC 42 A1
Rx< 0A 00 00 37 FD 0F 81 21 25 CB 3C
App:INFO : Change Key for card key 2 is Successful to Se050ObjID= 2103308288

App:INFO :Reverting Successful
Tx> 0B 00
Tx> 5A 11 22 33

```

(continues on next page)

(continued from previous page)

```

Rx< 0B 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = ↳
    ↲2103308288
Tx> 0A 00
Tx> 71 00 06 00 00 00 00 00 00 00
Rx< 0A 00 AF A0 64 12 F1 64 01 26 09 9B 74 F6 84 4E AA DA B1
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
    (Len=16)
        A0 64 12 F1      64 01 26 09      9B 74 F6 84      4E AA DA B1
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=32)
        B7 19 71 EE      F0 43 C8 CF      93 C2 9A 9A      E2 22 E3 6C
        00 93 7E 42      C0 25 16 55      86 78 30 A5      83 DE EB 88
Tx> 0B 00
Tx> AF B7 19 71 EE F0 43 C8 CF 93 C2 9A 9A E2 22 E3 6C 00 93 7E 42 C0 25 16 55 86 78 ↳
    ↲30 A5 83 DE EB 88
Rx< 0B 00 00 06 EF 22 A6 93 17 9D 14 50 C0 B9 34 E7 EA B5 16 3F 2E 8C FE CB 4D 49 1A ↳
    ↲C5 93 A6 42 6A 01 14 16
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
    (Len=32)
        06 EF 22 A6      93 17 9D 14      50 C0 B9 34      E7 EA B5 16
        3F 2E 8C FE      CB 4D 49 1A      C5 93 A6 42      6A 01 14 16
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=12)
        00 00 00 00      00 00 00 00      00 00 00 00
    App:INFO :Dumped Session Key is (Len=16)
        07 25 BD 23      62 1F B6 B4      AC 19 EF AC      19 BD DA C1
    App:INFO :Dumped Session Mac is (Len=16)
        3B 7F 15 CD      91 9C 11 A6      79 E0 34 FC      78 E1 62 89
    App:INFO :Dumped TI is (Len=4)
        03 55 8B AB
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 00
Rx< 0A 00 AF F8 AF 69 A2 31 62 00 75 FB 3F 80 DF AE 3C 2E 4C
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
    (Len=16)
        F8 AF 69 A2      31 62 00 75      FB 3F 80 DF      AE 3C 2E 4C
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=32)
        CB 08 4D F4      AA D1 42 AB      89 12 22 CA      C4 50 26 39
        C5 AA 0C 0B      22 46 34 02      BE 41 26 07      A1 26 3A AB
Tx> 0B 00
Tx> AF CB 08 4D F4 AA D1 42 AB 89 12 22 CA C4 50 26 39 C5 AA 0C 0B 22 46 34 02 BE 41 ↳
    ↲26 07 A1 26 3A AB
Rx< 0B 00 00 23 D9 43 F1 D1 3D 8C B0 24 C4 1C EC E1 5F B4 CC
    App:INFO :

```

(continues on next page)

(continued from previous page)

```

CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
  23 D9 43 F1      D1 3D 8C B0      24 C4 1C EC      E1 5F B4 CC
    App:INFO :Dumped Session Key is (Len=16)
  3C DB CC D7      9F A1 EB BD      A7 79 A7 5C      20 53 B8 E0
    App:INFO :Dumped Session Mac is (Len=16)
  98 CF 64 9A      98 09 5B D4      E3 1E 1B D8      D6 E3 A9 34
    App:INFO :Dumped TI is (Len=4)
  03 55 8B AB
    App:INFO :pDataParams->wCmdCtr=0
    App:INFO : EV2 Following Authenticate Successful

    App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308288
    App:INFO :attempting to change cardkey = 0 from Old Se050ObjID= 2103308288 to ↴new Se050ObjID= 2103308289
Tx> 0A 00
Tx> C6 00 00 C0 A4 C0 2A 1C 5E 6C 81 EB 86 97 E6 ED EA A4 56 00 30 3F 72 3E 87 7F 1B ↴E7 05 8E 5C 83 A3 42 8F B0 2A 05 5C C2 1F F5 95
Rx< 0A 00 00
    App:INFO : Change Key for card key 0 is Successful to Se050ObjID= 2103308289

    App:INFO :The previous auth session is not valid anymore.
    App:INFO :So.....
    App:INFO :Auth with the changed cardkey 0
Tx> 0B 00
Tx> 5A 11 22 33
Rx< 0B 00 00
    App:INFO :Select the AFC Application Successful

    App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = ↴2103308289
Tx> 0A 00
Tx> 71 00 06 00 00 00 00 00 00
Rx< 0A 00 AF 2C 85 14 8C FB B8 77 28 04 40 21 3B FA F3 4A A9
    App:INFO :
CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
  2C 85 14 8C      FB B8 77 28      04 40 21 3B      FA F3 4A A9
    App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
  96 70 F8 24      67 30 ED 30      98 AF 2A EC      3F A1 23 32
  37 B4 03 7D      E9 A3 8D 3E      E2 46 91 04      26 CD A0 26
Tx> 0B 00
Tx> AF 96 70 F8 24 67 30 ED 30 98 AF 2A EC 3F A1 23 32 37 B4 03 7D E9 A3 8D 3E E2 46 ↴91 04 26 CD A0 26
Rx< 0B 00 00 6B 86 58 E8 EA 62 B8 FC 13 7F 05 CC 57 38 5B 4E 2F D0 A7 DF 45 02 29 96 ↴42 2C 07 D3 E1 F6 B8 3D
    App:INFO :
CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=32)
  6B 86 58 E8      EA 62 B8 FC      13 7F 05 CC      57 38 5B 4E
  2F D0 A7 DF      45 02 29 96      42 2C 07 D3      E1 F6 B8 3D
    App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=12)
  00 00 00 00      00 00 00 00      00 00 00 00

```

(continues on next page)

(continued from previous page)

```

App:INFO :Dumped Session Key is (Len=16)
C7 98 D4 C6 89 4A CB 9C 7C 7E 4C 2C 3B 19 D5 D1
App:INFO :Dumped Session Mac is (Len=16)
7D 9A F9 AA DB A2 BC 68 4F 98 A6 92 7D 92 C4 0C
App:INFO :Dumped TI is (Len=4)
17 33 24 D0
App:INFO :pDataParams->wCmdCtr=0
App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 00
Rx< 0A 00 AF CF C0 D0 8F CE C0 26 BE 40 31 0B 0E 3F C2 18 B6
App:INFO :
CARD =====> SE050 16-byte Ek(RndB) =
(Len=16)
CF C0 D0 8F CE C0 26 BE 40 31 0B 0E 3F C2 18 B6
App:INFO :
CARD <===== SE050 E(Kx, RandA || RandB') =
(Len=32)
D5 47 2E 21 4A CD 7F 95 A9 0E 82 E1 34 AB 30 3E 96 B6 4D 0A 32 B2 9C 7D DB 83 ↴
96 B6 4D 0A 32 B2 9C 7D DB 83 07 7D 74 E8 11 20
Tx> 0B 00
Tx> AF D5 47 2E 21 4A CD 7F 95 A9 0E 82 E1 34 AB 30 3E 96 B6 4D 0A 32 B2 9C 7D DB 83 ↴
↪ 07 7D 74 E8 11 20
Rx< 0B 00 00 49 CF 34 0C 90 9D 1A 8D FF 2C 73 48 2A 41 88 19
App:INFO :
CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
(Len=16)
49 CF 34 0C 90 9D 1A 8D FF 2C 73 48 2A 41 88 19
App:INFO :Dumped Session Key is (Len=16)
34 40 1C 99 E3 5A 4E CD 1A CF 7A 92 4D 73 F6 28
App:INFO :Dumped Session Mac is (Len=16)
D3 48 4D 4B 17 4E C0 20 D3 6A 24 7C FC E3 42 DF
App:INFO :Dumped TI is (Len=4)
17 33 24 D0
App:INFO :pDataParams->wCmdCtr=0
App:INFO : EV2 Following Authenticate Successful

App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308289
App:INFO :Checking that the auth session with changed key is valid by trying ↴
↪ an encrypted communication
Tx> 0A 00
Tx> 51 D6 09 AF C6 31 06 8A 65
Rx< 0A 00 00 98 2B 05 82 82 E6 B4 BB E2 84 13 93 84 EF A7 68 F3 AA D6 08 8E E4 EA 93
App:INFO :CARD UID is as below (Len=7)
04 40 40 42 4D 4D 80
App:INFO :Encrypted communication with changed key successful
App:INFO :Reverting the changed cardkey 0
Tx> 0B 00
Tx> 5A 11 22 33
Rx< 0B 00 00
App:INFO :Select the AFC Application Successful

App:INFO :attempting to authenticate with cardkey = 0 and Se0Obj ID = ↴
↪ 2103308289
Tx> 0A 00
Tx> 71 00 06 00 00 00 00 00 00 00

```

(continues on next page)

(continued from previous page)

```

Rx< 0A 00 AF 1B 65 22 92 28 22 2E 39 FB BB AF 5F 92 02 0B 48
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
    (Len=16)
        1B 65 22 92      28 22 2E 39      FB BB AF 5F      92 02 0B 48
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=32)
        05 FF AE E6      71 6B 12 CF      7A FF B1 AB      7A B0 CF F0
        14 0D A2 CD      70 74 04 09      B8 EB EF 7F      3C 3E 5E FC
Tx> 0B 00
Tx> AF 05 FF AE E6 71 6B 12 CF 7A FF B1 AB 7A B0 CF F0 14 0D A2 CD 70 74 04 09 B8 EB_
    ↳EF 7F 3C 3E 5E FC
Rx< 0B 00 00 BE 19 7B F2 D4 16 7B 3F 6A D3 9B 8A 6A E4 61 D5 BE BE 49 8B 52 56 CA ED_
    ↳FA 4C 43 4D CE 68 ED 62
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
    (Len=32)
        BE 19 7B F2      D4 16 7B 3F      6A D3 9B 8A      6A E4 61 D5
        BE BE 49 8B      52 56 CA ED      FA 4C 43 4D      CE 68 ED 62
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=12)
        00 00 00 00      00 00 00 00      00 00 00 00
        App:INFO :Dumped Session Key is (Len=16)
        B9 A0 DF 3F      F5 AF 09 AB      DB E5 F2 8C      95 D6 B3 02
        App:INFO :Dumped Session Mac is (Len=16)
        BC BE C7 49      26 D2 C2 0D      12 2B A9 D9      8C 86 44 76
        App:INFO :Dumped TI is (Len=4)
        3D 06 B4 0F
        App:INFO :pDataParams->wCmdCtr=0
        App:INFO : EV2 First Authenticate Successful

Tx> 0A 00
Tx> 77 00
Rx< 0A 00 AF A9 AA 26 E3 BE 9E 1F 08 05 18 F2 18 BB BC C8 8C
    App:INFO :
    CARD =====> SE050 16-byte Ek(RndB) =
    (Len=16)
        A9 AA 26 E3      BE 9E 1F 08      05 18 F2 18      BB BC C8 8C
    App:INFO :
    CARD <===== SE050 E(Kx, RandA || RandB') =
    (Len=32)
        C6 7D DD FE      93 2C 1B 1D      AE 73 E9 55      57 21 5B 67
        EB 77 CC CB      88 BD FD C2      D1 C6 63 79      8F 56 D6 C1
Tx> 0B 00
Tx> AF C6 7D DD FE 93 2C 1B 1D AE 73 E9 55 57 21 5B 67 EB 77 CC CB 88 BD FD C2 D1 C6_
    ↳63 79 8F 56 D6 C1
Rx< 0B 00 00 50 1F 48 BB 26 A9 33 96 F8 F0 F6 34 63 83 FE 0A
    App:INFO :
    CARD =====> SE050 32-byte E(Kx, TI||RndA'||PDCap2||PCDcap2) =
    (Len=16)
        50 1F 48 BB      26 A9 33 96      F8 F0 F6 34      63 83 FE 0A
        App:INFO :Dumped Session Key is (Len=16)
        08 C2 12 46      4F 51 3C A9      15 36 9F 4A      61 97 BA C2
        App:INFO :Dumped Session Mac is (Len=16)
        91 1E E8 D8      88 58 E4 0A      BB F6 93 B5      FA B5 C9 0B

```

(continues on next page)

(continued from previous page)

```

App:INFO :Dumped TI is (Len=4)
3D 06 B4 0F
App:INFO :pDataParams->wCmdCtr=0
App:INFO : EV2 Following Authenticate Successful

App:INFO :Authenticated with cardkey = 0 and Se0Obj ID = 2103308289
App:INFO :attempting to change cardkey = 0 from Old Se050ObjID= 2103308289 to ↵
new Se050ObjID= 2103308288
Tx> 0A 00
Tx> C6 00 00 42 A7 99 85 84 E2 CA 46 3F D0 E5 12 59 62 F3 17 5E D6 C4 16 E5 09 49 8B ↵
0D AD AD 73 75 20 A1 E7 43 06 EC 4D BC 1A 07 D1
Rx< 0A 00 00
App:INFO : Change Key for card key 0 is Successful to Se050ObjID= 2103308288

App:INFO :Reverting Successful
App:INFO : Auth session is reset in software
App:INFO : Auth session is killed in SE
App:INFO :ex_sss Finished

```

5.11 Ease-of-Use examples

5.11.1 Ease of Use configuration - IBM Watson

Configuring Device type and Device name

Follow steps given in [How to get SE Platform Information and UID](#) to get the device unique ID.

The device name to be registered on the cloud is the 18-byte UID output in uppercase. In this case, 04005001F5EA9CC8CA7B33042C0559550000.

Device type would change based on which type of keys are being used (EC/RSA2K/RSA4K). Device type is set as NXP-SE050-<type>-D, where type is EC, RSA2K or RSA4K based on the type of key. Refer to section [Trust provisioned KeyIDs](#) for keyIDs of trust provisioned keys and certificates. On your IoT platform, create a new device type and create a new device under it with names as obtained in the previous step.

Note: If you wish to create a gateway on IoT platform, change Device type as NXP-SE050-<type>-G, where type is EC, RSA2K or RSA4K based on the type of key.

Uploading certificate chain

Certificate chain for cloud connection can be found under demos/Certificate_Chains/0004_A1F4 directory.

Also see [Certificate Chains : DEV Kit](#) for details about certificate chain.

Note: A1F4 is the OEF number. The directory name may change based on your OEF configuration.

The certificate chain for ECC from RootCA to Device certificate is as:

```
IOT_NXP-01-CERT_IOT_CA_KEY-IoTRootCAvE305-01-20190320162439-EC_SEC_P384R1-4B7E5A.
crt -> IOT_NXP-01-CERT_IOT_4LAYER_CA_KEY-IoTInt4LayerCAvE205-01-20190320164314-EC_SEC_P256R1
crt -> CloudConn-Intermediate-ECC_OEF_A1F4.crt -> ECC Device/Gateway Certificate
```

The certificate chain for RSA from RootCA to Device certificate is as:

```
IOT_NXP-01-CERT_IOT_CA_KEY-IoTRootCAvR406-01-20190425163255-RSA4096-BAB872.crt
-> IOT_NXP-01-CERT_IOT_4LAYER_CA_KEY-IoTInt4LayerCAvR406-01-20190425163534-RSA4096-540F19.
crt -> CloudConn-Intermediate-RSA_OEF_A1F4.crt -> RSA Device/Gateway Certificate
```

In your IoT platform, go to settings → CA Certificates section and upload the certificate chain (RootCA and Intermediate CA certificates) for the device certificate.

Running the Demo

This step is only for Linux platforms. If you wish to use an embedded microcontroller, continue to the next step

- Create a reference key file to be used with OpenSSL engine:

```
ssscli connect se05x t1oi2c none
ssscli refpem ecc/rsa pair <trust_provisioned_keyid> keyref.pem
ssscli disconnect
```

- Build the OpenSSL engine:

```
cd simw-top
python scripts/create_cmake_projects.py
cd ..simw-top_build/<board>_native_se050_t1oi2c
cmake --build .
make install
ldconfig /usr/local/lib
```

- Based on OpenSSL version, select the appropriate configuration file in <MW_SRC_DIR>/simw-top/demos/linux/common directory:

openssl11_sss_se050.cnf	----- OpenSSL 1.1.1 and SE050
openssl_sss_se050.cnf	----- OpenSSL 1.0.0 and SE050

- Set the openssl config path as:

```
$ export OPENSSL_CONF=/simw-top/demos/linux/common/<appropriate-cnf-file>
```

- To run the demo, see *Running the Demo on iMX/Raspberry Pi*

Update cloud example

In file demos/ksdk/ibm_watson/ibm_watson_iot_config.h, update the **broker endpoint** and **client ID** according to your account, and **keyIDs** of Trust provisioned keys and certificates used (as obtained from *Trust provisioned KeyIDs*):

```
#define WATSONIOT_MQTT_BROKER_ENDPOINT "leohx6.messaging.internetofthings.ibmcloud.com
↳"
```

```
#define WatsonEchoCLIENT_ID \
    "d:leohx6:NXP-SE050-EC-D:377813914287991534125055" //;< MQTT client ID should be_
↳unique for every device
```

```
#define SSS_KEYPAIR_INDEX_CLIENT_PRIVATE 0x20181003 //keyID of device keypair
#define SSS_CERTIFICATE_INDEX 0x20181004 //keyID of device certificate
```

Build and run the demo.

Build and run demo_ibm_watson.

CMake configurations:

- RTOS_FreeRTOS: ON
- WithHostCryptoMBEDTLS: ON
- WithmbedTLS_ALT_SSS: ON
- IOT_IBM: ON

5.11.2 Ease of Use configuration - Google Cloud Platform

Pre-requisites

- Google Cloud Platform Account
- ssscli Tool. Refer to [CLI Tool](#)

Creating Registry and Devices

- If you are using an embedded microcontroller, flash VCOM binary present in binaries folder onto the board.
- Read out the device certificate from the SE using ssscli Tool
 - Refer to section [Trust provisioned KeyIDs](#) for keyIDs of trust provisioned certificates.
 - Read out the trust provisioned certificate as:

```
ssscli connect se05x <conn-type> COMxx
ssscli get cert <trust_provisioned_keyid> <filename>
ssscli disconnect
```

Note: Give connection parameters according to your board. Refer to [List of ssscli commands](#) for details on supported parameters.

- Device certificate will be stored at the file location provided.

Note: Give extension of the filename as .cer to store in PEM format

- Create a registry on Google Cloud Platform and upload the intermediate certificate:
 - Intermediate certificates are located in demos/Certificate_Chains/0004_A1F4 directory. Based on device certificate, ECC or RSA, the intermediate certificates are CloudConn-Intermediate-ECC_OEF_A1F4.crt or CloudConn-Intermediate-RSA_OEF_A1F4.crt respectively.
- Create a device in that registry and upload the device certificate obtained in the second step.

Also see *Certificate Chains : DEV Kit* for details about certificate chain.

Running the Demo

This step is only for Linux platforms. If you wish to use an embedded microcontroller, continue to the next step

- Create a reference key file to be used with OpenSSL engine:

```
ssscli connect se05x t1oi2c none
ssscli refpem ecc/rsa pair <trust_provisioned_keyid> keyref.pem
ssscli disconnect
```

- Build the OpenSSL engine:

```
cd simw-top
python scripts/create_cmake_projects.py
cd ../../simw-top_build/<board>_native_se050_t1oi2c
cmake --build .
make install
ldconfig /usr/local/lib
```

- Based on OpenSSL version, select the appropriate configuration file in <MW_SRC_DIR>/simw-top/demos/linux/common directory:

openssl111_sss_se050.cnf	----- OpenSSL 1.1.1 and SE050
openssl_sss_se050.cnf	----- OpenSSL 1.0.0 and SE050

- Set the openssl config path as:

```
$ export OPENSSL_CONF=/simw-top/demos/linux/common/<appropriate-cnf-file>
```

- To run the demo, see *Building the application*

Update cloud example

In file demos/ksdk/gcp/gcp_iot_config.h, update the **project name**, **location name**, **registry name** and **device name** according to your account, and **keyIDs** of Trust provisioned keys and certificates used (as obtained from *Trust provisioned KeyIDs*):

```
#define GCP_PROJECT_NAME "pgh-cloud-iot"
#define GCP_LOCATION_NAME "us-central1"
#define GCP_REGISTRY_NAME "nxp-se-demo-reg"

#if (SSS_HAVE_SE050_C || SSS_HAVE_SE050_A)
#define GCP_DEVICE_NAME "nxp-ecc-dev-01"
#elif SSS_HAVE_SE050_B
#define GCP_DEVICE_NAME "nxp-rsa-dev-01"
#else
#define GCP_DEVICE_NAME "a71ch-dev-04"
#endif
```

```
#define SSS_KEYPAIR_INDEX_CLIENT_PRIVATE 0x20181001
#define SSS_CERTIFICATE_INDEX 0x20181002
```

Build and run the demo.

Build and run demo_gcp.

CMake configurations:

- RTOS_FreeRTOS: ON
- WithHostCryptoMBEDTLS: ON
- WithmbedtlsALT_SSS: ON
- IOT_GCP: ON

5.11.3 Ease of Use configuration - Azure IoT Hub

Creating Device on Azure DPS

Follow [Raspberry Pi Build](#) or [i.MX Linux Build](#) to prepare your board.

You will need to read-out the device certificates using ssscli tool.

If you wish to use an embedded microcontroller, follow the steps given below.

- Flash vcom binary present in binaries folder onto the board.
- Read out the device certificate from the SE using ssscli.exe present in binaries/pySSSCLI directory.

Refer to section [Trust provisioned KeyIDs](#) for keyIDs of trust provisioned certificates.

- Read out the trust provisioned certificate as:

```
ssscli connect se05x vcom COMxx
ssscli get cert <trust_provisioned_keyid> <filename>
ssscli disconnect
```

Note: Give connection parameters according to your board. Refer to [List of ssscli commands](#) for details on supported parameters.

- Device certificate will be stored at the file location provided.

Note: Give extension of the filename as .cer to store in PEM format

- Parse the extracted certificate using a cryptography tool such as OpenSSL to see the subject common name. This common name should be the name of the device registered on the Azure DPS.
- On your Azure portal, go to Azure DPS and create an *Individual Enrollment*. Enter the **DeviceID** as the subject name extracted in the previous step and in **Primary Certificate**, upload the extracted device certificate. You do not need to upload secondary certificate.

Note: Ensure that your DPS is linked to IoT Hub.

Select the device as an **Edge device** and save the configuration.

Registering Device to IoT Hub

- To register the saved device to IoT Hub, you would need a Linux platform. Run the following command to create a reference key file to be used with OpenSSL engine:

```
ssscli connect se05x t1oi2c none
ssscli refpem ecc/rsa pair <trust_provisioned_keyid> keyref.pem
ssscli disconnect
```

- Build the OpenSSL engine:

```
cd simw-top
python scripts/create_cmake_projects.py
cd ..//simw-top_build/<board>_native_se050_t1oi2c
cmake --build .
make install
ldconfig /usr/local/lib
```

- Based on OpenSSL version, select the appropriate configuration file in <MW_SRC_DIR>/simw-top/demos/linux/common directory:

openssl111_sss_se050.cnf	----- OpenSSL 1.1.1 and SE050
openssl_sss_se050.cnf	----- OpenSSL 1.0.0 and SE050

- Set the openssl config path as:

```
$ export OPENSSL_CONF=/simw-top/demos/linux/common/<appropriate-cnf-file>
```

Follow the steps listed in [Create device enrollment in azure IoT Hub portal](#) to register your device to the linked IoT Hub.

If you do not have a linux platform, follow the steps listed in <https://docs.microsoft.com/en-us/azure/iot-dps/tutorial-provision-device-to-hub> to register your device to IoT Hub.

Running Azure Demo

This step is only for Linux platforms. If you wish to use an embedded microcontroller, continue to the next step

Running Azure registration application successfully would have generated a JSON file to connect to your device. Use this JSON file to connect to Azure as:

```
./azure_imx_connect --json <JSON-file>
```

Where **JSON-file** is the generated file.

Update cloud example

In file demos/ksdk/azure/azure_iot_config.h, update AZURE_IOT_HUB_NAME, AZURE_LOCATION_NAME and AZURE_DEVICE_NAME according to your credentials and update **keyIDs** of Trust Provisioned keys and certificates used (as obtained from [Trust provisioned KeyIDs](#)):

```
#define AZURE_IOT_HUB_NAME "SIMW-JENKINS-HUB"
#define AZURE_LOCATION_NAME "bengaluru"
#define AZURE_DEVICE_NAME "377813914287991534125055"
```

```
#define AZURE_IOT_KEY_INDEX_SM 0x223344           //Index where client key is kept
↳      //Decimal - 2241348
#define AZURE_IOT_CLIENT_CERT_INDEX_SM 0x223345 //Index where client certificate
↳is kept    //Decimal - 2241349
```

Build and run the demo.

Build and run `azure_demo`.

CMake configurations:

- RTOS_FreeRTOS: ON
- WithHostCryptoMBEDTLS: ON
- WithmbedTLS_ALT_SSS: ON
- IOT_AZURE: ON

5.11.4 Ease of Use configuration - AWS IoT Console

Pre-requisites

- AWS IoT Console Account
- AWS CLI installed and configured (linked to your AWS account)
- `sscli` Tool

Extracting Device Certificate

Using `sscli` Tool, read out the device certificate. Refer to [Trust provisioned KeyIDs](#) for keyIDs of trust provisioned keys and certificates.

Note: If you wish to use an embedded microcontroller, flash the VCOM binary on your board first. VCOM binaries are available in `binaries` directory.

Extract the device certificate as:

```
sscli connect se05x <conn-type> <port>
sscli get cert <certificate-keyId> <certificate-filename>
sscli disconnect
```

Note: Give connection parameters according to your board. Refer to [List of sscli commands](#) for details on supported parameters.

Registering Device Certificate

Use AWS CLI Tool to register the extracted device certificate on to your AWS IoT Console:

```
aws iot register-certificate-without-ca --certificate-pem file://<certificate-
˓→filename> --status ACTIVE
aws iot attach-policy --target <certificate ARN> --policy-name <policy name>
```

Note: Certificate ARN will be printed out after execution of the first command

Run the following command to print out the SNI string. This will be used later:

```
aws iot describe-endpoint --endpoint-type iot:Data-ATS
```

Note: Additionally, you can create and attach policies using **aws create-policy** and **aws attach-policy** commands. Although this is not required for this demo as we test only publish and subscribe functionalities, you would need to use policies to allow/restrict access to any resource. For more information on policies, refer to [AWS CLI CreatePolicy](#) and [AWS CLI AttachPolicy](#)

Running on Linux

This step is only for Linux platforms. If you wish to use an embedded microcontroller, continue to the next step

- Run the following commands to build OpenSSL engine for SE050:

```
cd simw-top
python scripts/create_cmake_projects.py
cd ../simw-top_build/<board>_native_se050_t1oi2c
cmake --build .
make install
ldconfig /usr/local/lib
```

- Navigate to `demos/linux/aws_eou` directory and execute the `buildScript.sh` as:

```
chmod +x buildScript.sh
./buildScript.sh
```

This will build the project `iot_demo_mqtt`.

- Based on OpenSSL version, select the appropriate configuration file in `<MW_SRC_DIR>/simw-top/demos/linux/common` directory:

<code>openssl111_sss_se050.cnf</code>	----- OpenSSL 1.1.1 and SE050
<code>openssl_sss_se050.cnf</code>	----- OpenSSL 1.0.0 and SE050

- Set the openssl config path as:

```
$ export OPENSSL_CONF=<absolute-path-to-MW>/demos/linux/common/<appropriate-cnf-
˓→file>
```

- Create a reference file of device keypair for OpenSSL engine:

```
ssscli connect se05x <conn-type> <port>
ssscli refpem ecc/rsa pair <keypair-keyId> <ref-filename>
ssscli disconnect
```

Note: Make sure that the device keypair used corresponds to the device certificate

- Run the demo:

```
cd output/bin
./iot_demo_mqtt -i "ThingName" -h <endpoint> -r AmazonRootCA1.pem -c <certificate-
˓→filename> -k <ref-filename>
```

where endpoint is the SNI string obtained in step *Registering Device Certificate*, certificate-filename is the device certificate extracted in step *Extracting Device Certificate* and ref-filename is the reference key created in the previous step.

Running on MCU

- Update the clientcredentialMQTT_BROKER_ENDPOINT variable in demos/ksdk/common/aws_clientcredential.h file with the SNI string obtained in previous step.
- Update SSS_KEYPAIR_INDEX_CLIENT_PRIVATE and SSS_CERTIFICATE_INDEX_CLIENT in file demos/ksdk/common/aws_iot_config.h with KeyIDs of device keypair and device certificate respectively. Refer to trust provisioned keyIDs listed in [Section 3.16 Trust provisioned KeyIDs](#).

```
#define SSS_KEYPAIR_INDEX_CLIENT_PRIVATE 0x20181005
#define SSS_CERTIFICATE_INDEX_CLIENT 0x20181007
```

- Build and run project aws_demo.

CMake configurations:

- RTOS_FreeRTOS: ON
- WithHostCryptoMBEDTLS: ON
- Withmbedtls_ALT_SSS: ON
- IOT_AWS: ON

5.12 Semslite examples

5.12.1 SEMS Lite Agent Demo (sems_lite_ex_update)

This application will update Applet through SEMS Lite agent.

In this demo, an update package, is pre-compiled into the example binary. See SEMS_Lite_UpgradeTo_iotDev-6_1_0-20200729-01_A397.h. This file contains a byte array that is encoded in protobuf format. This demo will call API `sems_lite_agent_load_package()` which will decode the stream and send update commands command to SE.

Note: This demo is used for OEF A397. If you use it for another OEF, you should update the header file with correct one.

Prerequisites

- Micro USB cable
- Kinetis FRDM-K64F/imx-RT1050 board
- Personal Computer
- SE051 Board
- Build Plug & Trust middleware stack. (Refer *Building / Compiling*)
- Build Project: `sems_lite_ex_update`

Running the Example

- In case the a new update package is available or the IC is a new OEF, replace `SEMS_Lite_UpgradeTo_iotDev-6_1_0-20200729-01_A397.h`
- Recompile the example for your platform
- If you have built a binary for an embedded target, flash the `sems_lite_ex_update` binary on to the board and reset the board.
- If you have built an *exe* to be run from PC using VCOM, run as:

```
sems_lite_ex_update.exe <PORT NAME>
```

Where `<PORT NAME>` is the VCOM COM port.

5.12.2 SEMS Lite CLI APP

This example, is more advanced than Section 5.12.1 *SEMS Lite Agent Demo (sems_lite_ex_update)*.

This example is takes command line parameters to talk to the SEMS Lite Applet and

Warning: This application is alpha status and would keep evolving/changing.

CLI Parameters

- `--loadpkg <path-to-SEMS-Lite-applet-package-binary-file>`

Load a binary file.

- `--getuid`

Get UID

- `--getappcontents [optional-app-aid]`

Store contents of card to File-Name-to-store-card-contents

e.g. `--getappcontents out_contents_file.bin 01030011`

- `--getpkgcontents [optional-pkg-aid]`

- `--semslitegetversion`

Print version of the SEMS Lite Applet

- --getsignature <File-Name-to-store-signature>

Get signature of last script

- --checkTear

Check if tearing has happened

- --checkUpgradeProgress

Check upgrade progress

- --getENCIIdentifier

Get SK.SEMS.ENC Identifier

- --getCAIdentifier

Get CA-SEMS Identifier

- --getCAKeyIdentifier

Get CA-SEMS signature verification key identifier

- --getpkgversion

Get Package Version

- --getFreePHeap

Get PHeap Information

- --getECParameter

Get configured EC domain parameter type

- --getFIPSInfo

Get configured FIPS Information

- --testapplet <applet-aid> <apdu-command>

Used to select test applet and send dummy APDU Command

Usage - K64F

- Ensure VCOM interface is setup for K64.
- SET EX_SSS_BOOT_SSS_PORT=<COM Port>
- Run application with applicable commandline parameters

Usage - Raspberry Linux

- Run application with applicable commandline parameters

Version Compatibility

SEMS Lite cli application from SEMS Lite 2.0.0 can support binary file generated by tools of SEMS Lite 2.0.0 and those of SEMS Lite 1.0.0. But SEMS Lite cli application from SEMS Lite 1.0.0 can not support binary file generated by tools of SEMS Lite 2.0.0.

	Bin file from SEMS Lite 1.0.0	Bin file from SEMS Lite 2.0.0
Cli app from SEMS Lite 1.0.0	Supported	Not supported
Cli app from SEMS Lite 2.0.0	Supported	Supported

5.13 PUF examples

5.13.1 Key Injection to PUF

This example demonstrates how to enroll PUF on LPC55S, inject PlatformSCP keys into PUF and retrieve key codes. This example can be used as a starting point to inject default SCP03 keys into PUF.

Note: After running this example, update `ex_scp03_puf.h` file with the new Activation code and keyCodes.

Replace the following keys with the keys to be provisioned into PUF:

```
/** New key material
 * These will be the static platform SCP03 keys
 * which will be provisioned on the SE and in PUF.
 */
uint8_t PROV_KEY_ENC[PUF_INTRINSIC_KEY_SIZE] = {
    0x40, 0x41, 0x42, 0x43, 0x44, 0x45, 0x46, 0x47, 0x48, 0x49, 0x4A, 0x4B, 0x4C,
    ↪0x4D, 0x4E, 0x4F
};
uint8_t PROV_KEY_MAC[PUF_INTRINSIC_KEY_SIZE] = {
    0x50, 0x51, 0x52, 0x53, 0x54, 0x55, 0x56, 0x57, 0x58, 0x59, 0x5A, 0x5B, 0x5C,
    ↪0x5D, 0x5E, 0x5F
};
uint8_t PROV_KEY_DEK[PUF_INTRINSIC_KEY_SIZE] = {
    0x60, 0x61, 0x62, 0x63, 0x64, 0x65, 0x66, 0x67, 0x68, 0x69, 0x6A, 0x6B, 0x6C,
    ↪0x6D, 0x6E, 0x6F
};
```

For information on PUF, refer [SCP03 with PUF](#).

Injecting keys into PUF

Refer to the below implementation on how to implement a simple function to inject SCP03 keys into PUF.

```
static status_t puf_insert_scp03_keys(uint8_t *PROV_KEY_ENC, uint8_t *PROV_KEY_MAC,
                                     uint8_t *PROV_KEY_DEK)
{
    status_t result = kStatus_Fail;
    uint8_t activationCode[PUF_ACTIVATION_CODE_SIZE];

    srand(0xbababeda);

    puf_config_t conf;
    PUF_GetDefaultConfig(&conf);
    PUF_Deinit(PUF, &conf);

    result = PUF_Init(PUF, &conf);
    ENSURE_OR_GO_CLEANUP(result == kStatus_Success);

    result = PUF_Enroll(PUF, activationCode, sizeof(activationCode));
    ENSURE_OR_GO_CLEANUP(result == kStatus_Success);
    LOG_MAU8_I("ActivationCode", activationCode, sizeof(activationCode));
    PUF_Deinit(PUF, &conf);

    result = PUF_Init(PUF, &conf);
    ENSURE_OR_GO_CLEANUP(result == kStatus_Success);

    result = PUF_Start(PUF, activationCode, PUF_ACTIVATION_CODE_SIZE);
    ENSURE_OR_GO_CLEANUP(result == kStatus_Success);

    result = PUF_SetUserKey(PUF,
                           kPUF_KeyIndex_00,
                           PROV_KEY_ENC,
                           PUF_INTRINSIC_KEY_SIZE,
                           keyCodeENC_01,
                           PUF_GET_KEY_CODE_SIZE_FOR_KEY_SIZE(PUF_INTRINSIC_KEY_SIZE));
    ENSURE_OR_GO_CLEANUP(result == kStatus_Success);
    LOG_MAU8_I("KeyCode_ENC", keyCodeENC_01, PUF_GET_KEY_CODE_SIZE_FOR_KEY_SIZE(PUF_
                           INTRINSIC_KEY_SIZE));
    result = PUF_SetUserKey(PUF,
                           kPUF_KeyIndex_00,
                           PROV_KEY_MAC,
                           PUF_INTRINSIC_KEY_SIZE,
                           keyCodeMAC_01,
                           PUF_GET_KEY_CODE_SIZE_FOR_KEY_SIZE(PUF_INTRINSIC_KEY_SIZE));
    ENSURE_OR_GO_CLEANUP(result == kStatus_Success);
    LOG_MAU8_I("KeyCode_MAC", keyCodeMAC_01, PUF_GET_KEY_CODE_SIZE_FOR_KEY_SIZE(PUF_
                           INTRINSIC_KEY_SIZE));
    result = PUF_SetUserKey(PUF,
                           kPUF_KeyIndex_00,
                           PROV_KEY_DEK,
                           PUF_INTRINSIC_KEY_SIZE,
                           keyCodeDEK_01,
                           PUF_GET_KEY_CODE_SIZE_FOR_KEY_SIZE(PUF_INTRINSIC_KEY_SIZE));
    ENSURE_OR_GO_CLEANUP(result == kStatus_Success);
    LOG_MAU8_I("KeyCode_DEK", keyCodeDEK_01, PUF_GET_KEY_CODE_SIZE_FOR_KEY_SIZE(PUF_
                           INTRINSIC_KEY_SIZE));
```

(continues on next page)

(continued from previous page)

```
cleanup:
    return result;
}
```

How to use

Compile and run the example with the following CMake options:

- Host=lpcxpresso55s
- Project:puf_inject_scp03

On successful execution, you will be able to see the ActivationCode and KeyCodes printed out.

5.13.2 Key Rotation using PUF

This example demonstrates how to use PUF to manage PlatformSCP keys and rotate the keys using PUF. For details on PUF and usage with LPC55S, refer to [SCP03 with PUF](#).

Before running this example, be sure that correct PlatformSCP keys are already provisioned in PUF. For details on how to provision keys in PUF, refer [Injecting keys into PUF](#).

In this example, we first open a session with default PlatformSCP keys and perform an RNG operation, then we rotate the keys in SE and PUF, reopen session with new keys and perform RNG operation again to demonstrate that the keys have been rotated. Finally, we revert to the old keys.

How to build

Make sure that you compile the secure example first. The non-secure example links to the secure example.

Compile the secure example with the following CMake options:

- Host=lpcxpresso55s_s
- SCP=SCP03_SSS
- SE05X_Auth=PlatfSCP03
- Project:puf_rotate_scp03_s


Compile the non-secure example with the following CMake options:

- Host=lpcxpresso55s_ns
- SCP=SCP03_SSS
- SE05X_Auth=PlatfSCP03
- Project:puf_rotate_scp03_ns


How to run

Follow the steps given below to flash secure and non-secure binaries on LPC55S board.


1) Import secure and non-secure projects into MCUXpresso IDE

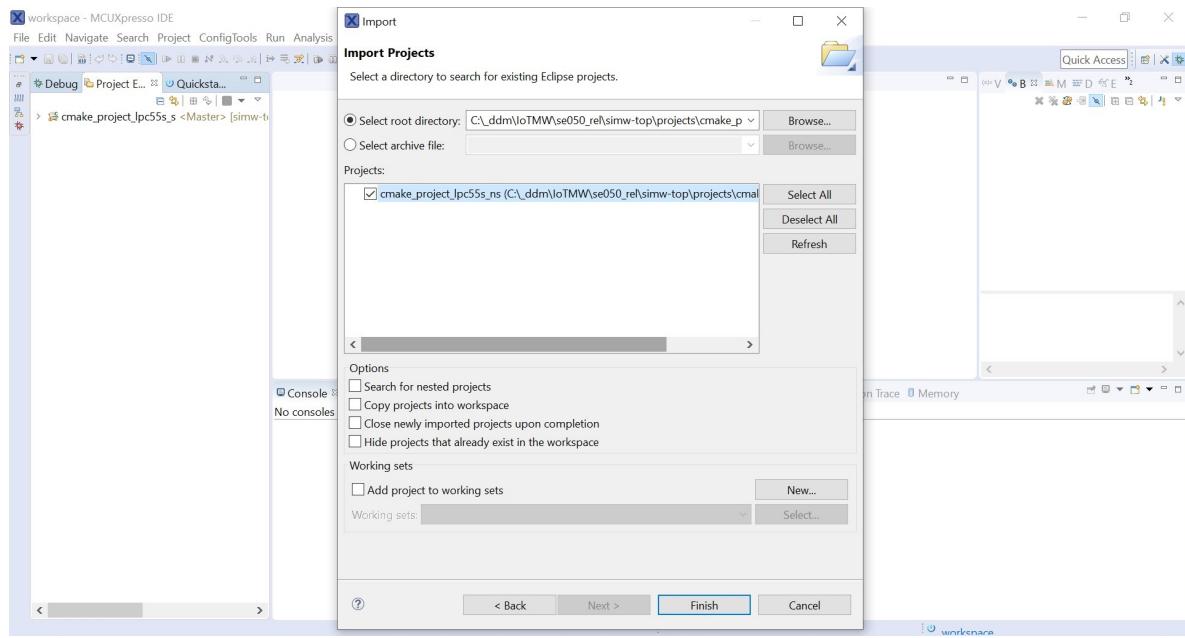

2) Update Makefile target for both projects

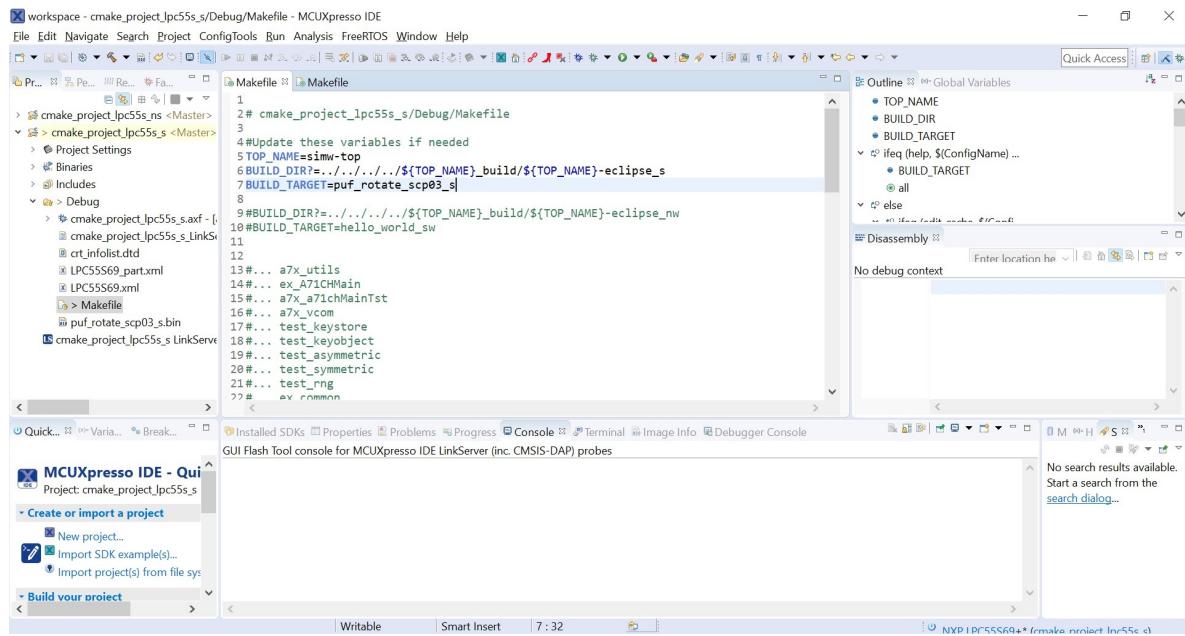


3) Build the projects.

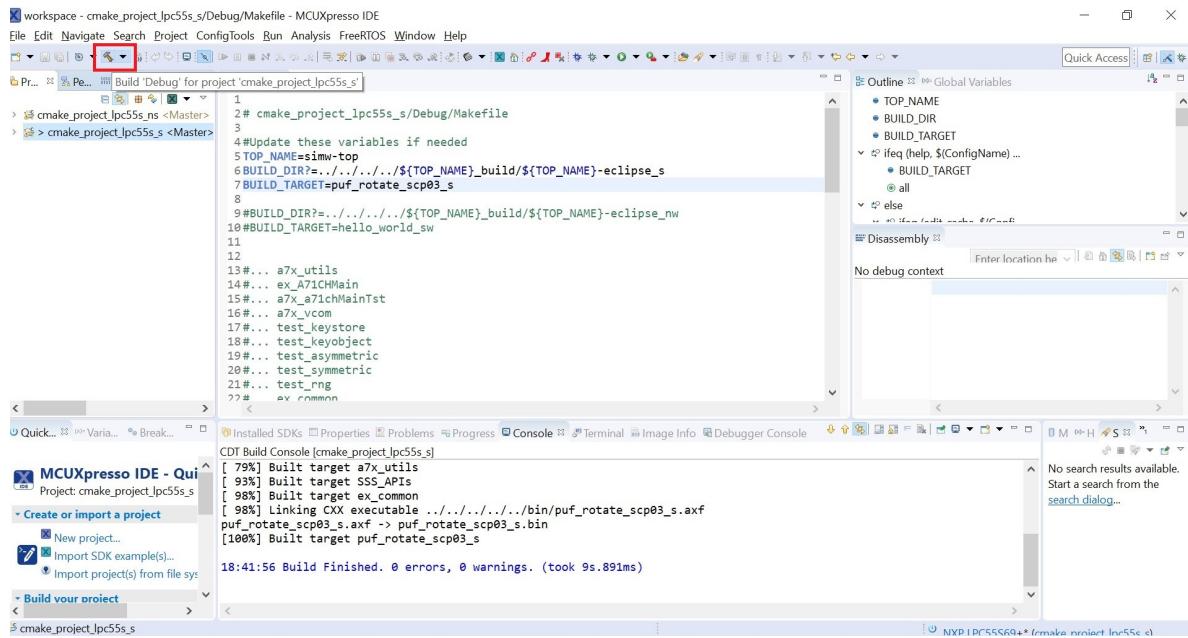


Note: Be sure that you build the secure project first and then the non-secure project.

4) Start GUI Flash Tool


Note: You can program the binary by debugging the project also. If you want to debug, go to step 6.

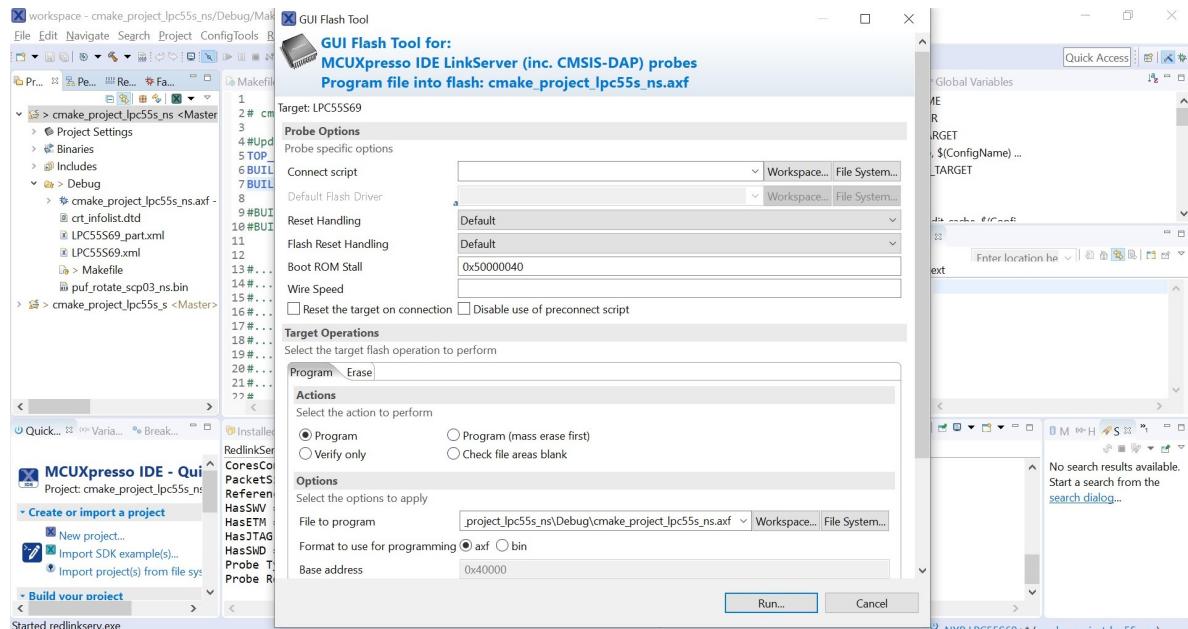


5) On successful operation you should see the following message

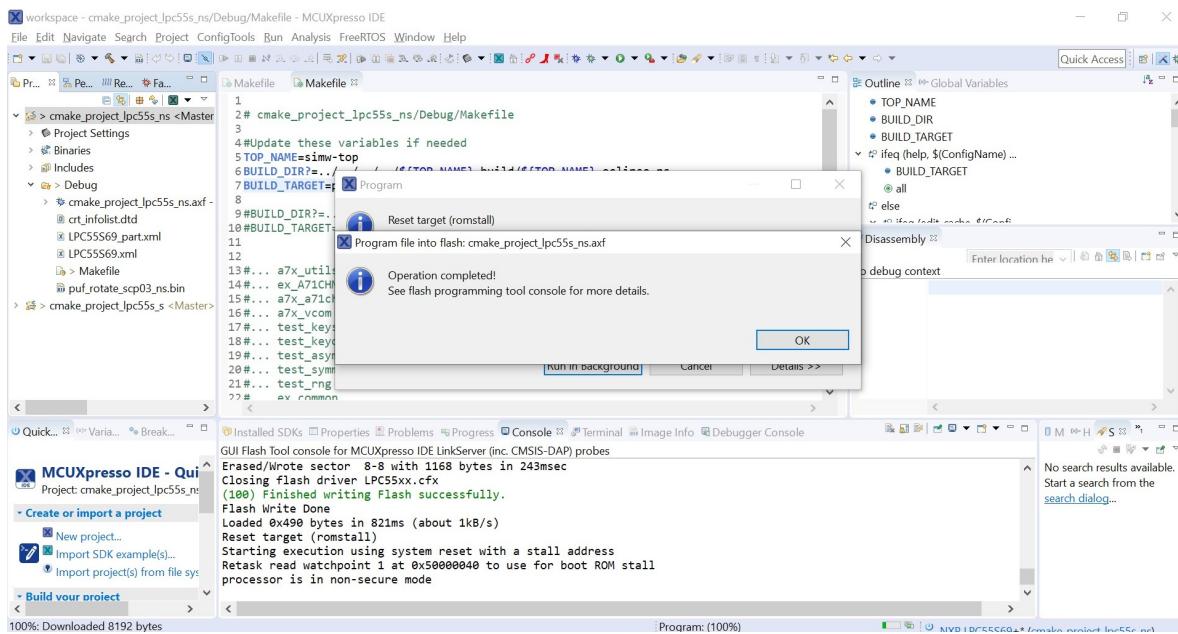

- 6) To start debugging into the project, simply select the project that you want to debug and press the Debug button in QuickStart Menu.

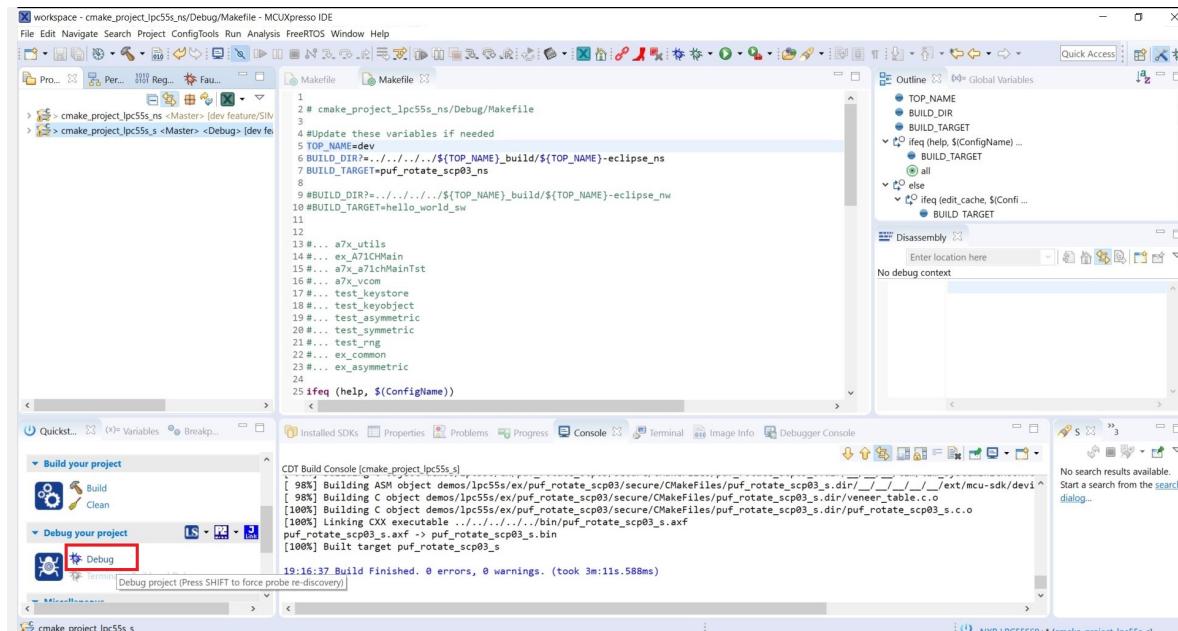

- 7) Make sure that in the Debug Configuration under GUI Flash Tool tab, you have selected **Program**.

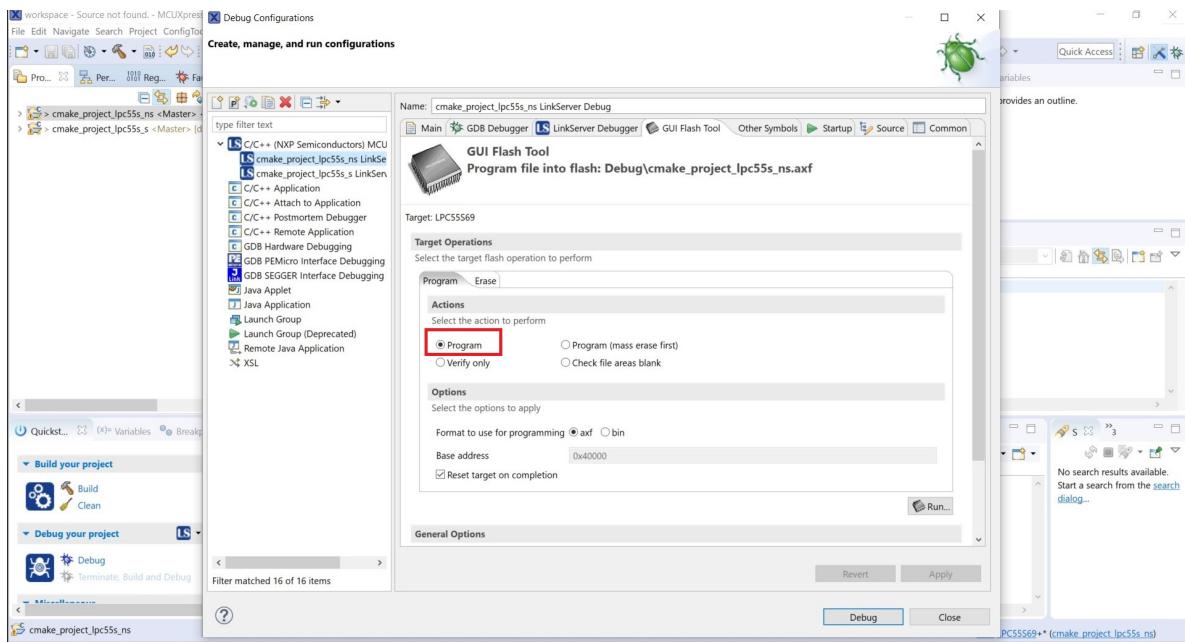

Perform the last two steps for both the projects (order does not matter). While debugging, flash the program that you want to debug second.

When you have flashed both the projects, reset the board. On successful execution you would be able to see the following log in terminal

```

App :INFO :PlugAndTrust_v02.15.00_20200522
sss :INFO :atr (Len=35)
      01 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 00
      01 00 00 00      00 64 13 88      0A 00 65 53      45 30 35 31
      00 00 00
sss :INFO :atr (Len=35)
      01 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 00
      01 00 00 00      00 64 13 88      0A 00 65 53      45 30 35 31
      00 00 00
App :INFO :Applet selection successful!
App :INFO :Random test 1 was successful, with default SCP03 keys!
sss :INFO :atr (Len=35)
      01 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 00
      01 00 00 00      00 64 13 88      0A 00 65 53      45 30 35 31
      00 00 00
App :INFO :Applet deselection successful!
App :INFO :Key Rotation was successful!
sss :INFO :atr (Len=35)
      01 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 00
      01 00 00 00      00 64 13 88      0A 00 65 53      45 30 35 31
      00 00 00
App :INFO :Applet selection successful!
App :INFO :Applet is now using PUF keys!
App :INFO :Random test 2 was successful, with new PUF keys!
sss :INFO :atr (Len=35)
      01 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 00
      01 00 00 00      00 64 13 88      0A 00 65 53      45 30 35 31
      00 00 00
App :INFO :Applet deselection successful!
App :INFO :Key Rotation was successful!

```

(continues on next page)

(continued from previous page)

```
App :INFO :Rotation back to default keys was successful!  
App :INFO :Entering normal world.
```

```
Welcome in normal world (SIMW) !
```

NXP EDGELOCK 2GO AGENT

6.1 Introduction

EdgeLock 2GO is a cloud service by NXP for provisioning keys and credentials into devices equipped with SE050 and for easily onboarding the device into the cloud services of the user. Please visit <https://www.nxp.com/edgelock2go> for more information.

The EdgeLock 2GO agent is the on-device counterpart of the EdgeLock 2GO cloud service. Its purpose is to establish a secure connection to the EdgeLock 2GO service, report status of the device and update the device with up-to-date credentials and configuration data. It handles credentials for authentication at customer cloud services in cooperation with a secure keystore and manages configuration data/connection information for these the cloud services.

6.2 Building and running the EdgeLock 2GO agent

6.2.1 Building / Compiling the EdgeLock 2GO agent

The build instructions for the EdgeLock 2GO agent do not deviate from the build instructions already introduced in section *Building / Compiling*. For convenience, the script <SE05X_root_folder>/simw-top/scripts/create_cmake_projects.py will generate bespoke CMake configurations with all CMake options set correctly for building the EdgeLock2 GO agent for KSDK (FRDMK64F, LPC55S69), and i.MX:

- KSDK: <SE05X_root_folder>/simw-top_build/simw-top-eclipse_arm_el2go
- i.MX (native compilation): <SE05X_root_folder>/simw-top_build/imx_native_se050_t1oi2c_openssl_el2go

6.2.2 Registering the device to the EdgeLock 2GO service

In order to connect your device to EdgeLock 2GO and provision the keys and credentials that you have configured, you first need to register your device to your EdgeLock 2GO account. This can be done in different ways including:

- Registering your device UUID into your EdgeLock 2GO account. You must first read-out the UUID of your device. This can be achieved for example by executing the se05x_Get_Info executable that is part of this release. How to do this is described in more detail in *SE05X Get Info example*.
- Injecting a claim code on the device, see *Claim Codes*.

For more details, please refer to the EdgeLock 2GO documentation.

6.2.3 Connecting the device to the EdgeLock 2GO service

Once you have registered your device or installed a claim code, you can simply connect your device to the EdgeLock 2GO service by calling the EdgeLock 2GO Agent API. See [Usage Examples](#) for an example. When your device connects to EdgeLock 2GO and if you have configured your device in your EdgeLock 2GO account, then the device will retrieve the credentials that you have configured. For more details, please refer to the EdgeLock 2GO documentation.

6.3 Datastore / Keystore

For storage of credentials and configuration data two types of storage entities are available. A keystore is used for storing sensitive information, typically private keys for a client authentication, whereas a datastore is used for storing configuration data required for connecting to a cloud service. Both are managed remotely from the EdgeLock 2GO cloud service. From the point of view of the EdgeLock 2GO cloud service datastores and keystores are considered endpoints. The EdgeLock 2GO cloud service sends messages to endpoints to set them up according to the desired configuration.

After the device is configured/provisioned for a cloud service by the EdgeLock 2GO cloud service, the relevant information can be extracted for usage in client software from the storages. The access to the credentials is abstracted by using the [SSS APIs](#), configuration data is accessed using a service descriptor struct object.

One keystore implementation is included for supporting the SE050. The EdgeLock 2GO cloud service uses a direct APDU channel to read out from and insert objects into the secure element.

For the sake of demonstration, also two datastore implementations are part of this package. A filesystem based datastore which uses files for storing the data delivered by the EdgeLock 2GO cloud service is present in `<SE05X_root_folder>/simw-top/nxp_iot_agent/*/nxp_iot_agent_datastore_fs.*`, one that uses raw memory can be found in `<SE05X_root_folder>/simw-top/nxp_iot_agent/*/nxp_iot_agent_datastore_plain.*`.

When writing contents to a datastore, EdgeLock 2GO cloud service protects the data with a checksum. This allows the EdgeLock 2GO agent to check whether the data that is found inside a datastore is valid/uncorrupted.

6.4 Connection to the EdgeLock 2GO cloud service

This section gives a short overview of the communication channel between the EdgeLock 2GO agent and the EdgeLock 2GO cloud service. The connection to the EdgeLock 2GO cloud service is always initiated from the EdgeLock 2GO agent.

6.4.1 Transport layer security

Communication between client and server is protected in a mutually authenticated TLS channel. The TLS protocol versions TLS 1.2 and TLS 1.3 are supported. The supported ciphersuites are:

For TLS 1.2:

- TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256
- TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384
- TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
- TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384
- TLS_DHE_RSA_WITH_AES_128_GCM_SHA256

- TLS_DHE_RSA_WITH_AES_256_GCM_SHA384

For TLS 1.3:

- TLS_AES_128_GCM_SHA256
- TLS_AES_256_GCM_SHA384

6.4.2 Client authentication

When using SE050 for authenticating at the EdgeLock 2GO cloud service, the client's private key as well as the client certificate are stored on the secure element. SE050 comes with those credentials already pre-installed from the NXP production site with predefined object identifiers.

There are two crypto libraries available to do the TLS handshake in combination with the SE050. It is possible to use OpenSSL with an custom crypto engine (see [Introduction on OpenSSL engine](#)). Alternatively mbedTLS with an alternative implementation for the SE050 can be used (see [Introduction on mbedTLS ALT Implementation](#)).

6.4.3 Server authentication

The server is authenticated by using a certificate chain ultimately signed by an NXP root CA. There are two different certificate chains available, one using ECC with the NIST P-384 curve, the other chain uses RSA with 4096 bit keys. The trusted root CA certificates are included with the distributed package of the NXP Plug & Trust Middleware (see also [Parameters for the connection to EdgeLock 2GO cloud service](#)).

The EdgeLock 2GO cloud service provides certificate revocation lists (CRLs) for the CA signing the server certificates. The CRLs are transferred via TLS channel in order to avoid having to implement another protocol (typically http) for retrieving the CRL. When using openssl as crypto library, the CRL processing is skipped for openssl versions < 1.1.1.

6.4.4 Application layer protocol

On the application layer, the EdgeLock 2GO cloud service sends protobuf messages (requests) to individual endpoints which are handled by those. Depending on the endpoint type, different requests are used. Requests to the EdgeLock 2GO agent itself are used for querying the presence of endpoints and their supported features and managing the communication channel. Other requests directly address reading data or writing contents of keystores and datastores.

For configuring an SE050 keystore, the EdgeLock 2GO cloud service uses APDU commands that are directly forwarded to the secure element. If sensitive information is included or integrity protection is required, APDUs can be encrypted. This way a secure end-to-end channel between the EdgeLock 2GO cloud service and the secure element can be established.

For datastores the EdgeLock 2GO cloud service is able to perform read operations to retrieve the current contents. Should it be necessary, an update of the datastore contents can be performed. The EdgeLock 2GO cloud service always replaces the complete contents of the datastore. The first request is an allocate operation, allowing the datastore to make sure memory for the contents is available. It is followed by one or more write operations. If the datastore supports transactions, after the last write, an additional commit operation is done to trigger an atomic update of the datastore contents.

The definition of the protobuf application layer protocol can be found in <SE05X_root_folder>/simw-top/nxp_iot_agent/doc/protobuf.

6.4.5 Parameters for the connection to EdgeLock 2GO cloud service

The EdgeLock 2GO agent attempts to take hostname, port, a reference to the client key and client certificate as well as a collection of trusted root ca certificates from a datastore that is registered with a particular id. If a datastore with this id is registered and contains valid data (checksum verification), then the EdgeLock 2GO agent uses its contents. If this is not the case, it falls back to compile-time constants defined in <SE05X_root_folder>/simw-top/nxp_iot_agent/inc/nxp_iot_agent_config.h.

For demonstration purposes, in the demo application in <SE05X_root_folder>/simw-top/nxp_iot_agent/ex/src/iot_agent_demo.c, a datastore for the EdgeLock 2GO cloud service connection parameters is registered. It is filled at the first boot with the compile-time constants from the configuration file.

In order to be able to mitigate a potential corruption of the keys of the trusted root certificates, in case the connection parameters are taken from the datastore, the EdgeLock 2GO cloud service has the opportunity to update the connection parameters remotely.

6.5 Claim Codes

A claim code allows registering the device into the user account automatically. Claim codes are created and managed from the EdgeLock 2GO service. Please refer to the EdgeLock 2GO documentation for more details.

To facilitate injection of claim code into device, a simple application capable of injecting and deleting claim codes (claimcode_inject) is delivered in combination with the EdgeLock 2GO agent. This application reads a claim code from a text file.

To inject a claim code that is present in a file `claim.txt`, the following command can be used:

```
./claimcode_inject claim.txt
```

Application also supports deleting existing claim code from with the following command:

```
./claimcode_inject --delete
```

6.6 API

6.6.1 EdgeLock 2GO Main

group edgelock2go_agent_main

Main API for registering keystores, datastores and connecting to the cloud to update provisionings.

Defines

`EDGELOCK2GO_ATTESTATION_KEY_ECC`

The attestation keyid on the SSS API to use for the attestation.

`EDGELOCK2GO_ATTESTATION_KEY_RSA`

`EDGELOCK2GO_CERTID_ECC`

The certid on the SSS API to use for the keystore to use for connecting to EdgeLock 2GO cloud service.

`EDGELOCK2GO_CERTID_RSA`

`EDGELOCK2GO_KEYID_ECC`

The keyid on the SSS API to use for the keystore and keypair to use for connecting to EdgeLock 2GO cloud service.

EDGELOCK2GO_KEYID_RSA**EDGELOCK2GO_KEYSTORE_ID**

The keystore that stores the credentials for the EdgeLock 2GO cloud service.

When connecting to the EdgeLock 2GO cloud service, for the client authentication a private key is required. This key is expected to be in a keystore which is registered to the EdgeLock 2GO agent.

In case there is a datastore which holds the information how to connect to the EdgeLock 2GO cloud service this datastore also holds the information where to get the private key.

In case the EdgeLock 2GO agent needs to fall back to compile-time constant connection information, it does assume that the private key for the client authentication is stored in a keystore that is registered with this ID.

EDGELOCK2GO_MANAGED_SERVICE_KEY_MAX

@ brief End of the range of keys to use for keys of cloud services provisioned by EdgeLock 2GO.

EDGELOCK2GO_MANAGED_SERVICE_KEY_MIN

@ brief Start of the range of keys to use for keys of cloud services provisioned by EdgeLock 2GO.

Typedefs

```
typedef struct _nxp_iot_UpdateStatusReport nxp_iot_UpdateStatusReport
typedef struct pb_field_s pb_field_t
typedef struct pb_istream_s pb_istream_t
typedef struct pb_ostream_s pb_ostream_t
```

Functions

void iot_agent_free_service_descriptor (nxp_iot_ServiceDescriptor *service_descriptor)
Free all FT_POINTER fields of a service descriptor.

When selecting a service, a service descriptor is read from a datastore. A service descriptor can contain fields of variable length (binary data (certificates, etc.) or text (hostname, etc.)). Those fields use dynamically allocated memory. The memory is freed by calling this function.

Parameters

- [in] service_descriptor: Reference to service descriptor

void iot_agent_free_update_status_report (nxp_iot_UpdateStatusReport *status_report)
Free all FT_POINTER fields of a update status report.

When a status report is filled during updating a device configuration, it contains pointer fields which use dynamically allocated memory. The memory is freed by calling this function.

Parameters

- [in] status_report: Reference to status_report

```
iot_agent_status_t iot_agent_get_datastore_by_id (const iot_agent_context_t *ctx, const
uint32_t id, iot_agent_datastore_t **datastore)
```

Get a reference to a datastore based on its identifier.

Return Value

- IOT_STATUS_SUCCESS: A datastore with the `id` was found in the agent's context and a pointer to it is returned in `datastore`.

```
iot_agent_status_t iot_agent_get_datastore_index_by_id(const iot_agent_context_t *ctx, const uint32_t id, size_t *index)
```

Get the index of a datastore based on its identifier.

Return Value

- IOT_STATUS_SUCCESS: A datastore with the `id` was found in the agent's context and its index is returned in `index`.

```
bool iot_agent_get_endpoint_info(void *context, void *endpoint_information)
```

Get an endpoint information of the endpoint.

Parameters

- [in] `context`: Reference to end point context
- [in] `endpoint_information`: Reference to end point information

```
iot_agent_status_t iot_agent_get_keystore_by_id(const iot_agent_context_t *ctx, const uint32_t id, iot_agent_keystore_t **keystore)
```

Get a reference to a keystore based on its identifier.

Return Value

- IOT_STATUS_SUCCESS: A keystore with the `id` was found in the agent's context and a pointer to it is returned in `keystore`.

```
iot_agent_status_t iot_agent_get_keystore_index_by_id(const iot_agent_context_t *ctx, const uint32_t id, size_t *index)
```

Get the index of a keystore based on its identifier.

Return Value

- IOT_STATUS_SUCCESS: A keystore with the `id` was found in the agent's context and its index is returned in `index`.

```
size_t iot_agent_get_number_of_services(const iot_agent_context_t *ctx)
```

Returns total number of services of all registered datastores.

Parameters

- [in] `ctx`: Context for the `iot_agent`.

Return Value

- `Total`: number of services of all registered datastores

```
iot_agent_status_t iot_agent_get_service_descriptor(const iot_agent_context_t *ctx, nxp_iot_ServiceDescriptor *service_descriptor)
```

Get the service descriptor of the currently selected service.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling `iot_agent_free_service_descriptor`. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

Parameters

- [in] ctx: The context of the agent.
- [out] service_descriptor: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

```
bool iot_agent_handle_request(pb_istream_t *istream, pb_ostream_t *ostream, const
pb_field_t *message_type, void *context)
handle request by end point
```

Parameters

- [in] istream: Input stream
- [in] ostream: Output stream
- [in] message_type: a pointer to the message type fields array
- [in] context: End point context

```
iot_agent_status_t iot_agent_init(iot_agent_context_t *ctx)
Initialize EdgeLock 2GO agent context memory with zeros.
```

Parameters

- [inout] ctx: EdgeLock 2GO agent context

Return Value

- IOT_AGENT_SUCCESS: Upon success

```
iot_agent_status_t iot_agent_init_dispatcher(iot_agent_dispatcher_context_t *dispatcher_context,
                                             iot_agent_context_t *agent_context,
                                             nxp_iot_ServiceDescriptor *service_descriptor,
                                             nxp_iot_UpdateStatusReport *status_report)
```

Initialize Dispatcher.

Parameters

- [in] dispatcher_context: Context for the dispatcher
- [in] agent_context: Context for the agent
- [in] service_descriptor: The service descriptor containing the connection parameters to connect to the EdgeLock 2GO cloud service.
- [out] status_report: A pointer to a structure that gets filled with a status report after the update is complete. If NULL is given, no status report is created.

```
bool iot_agent_is_service_configuration_data_valid(const iot_agent_context_t *ctx)
```

Checks whether service configuration data of all registered datastores is valid.

Parameters

- [in] ctx: Context for the iot_agent.

Return Value

- true: Service configuration data of all registered datastores is valid
- false: Service configuration data of a registered datastores is invalid

```
iot_agent_status_t iot_agent_register_datastore(iot_agent_context_t *ctx, iot_agent_datastore_t *datastore)
```

Register datastore endpoint.

Note that the ownership for the datastore is not transferred. The caller is responsible that the datastore is freed at the appropriate time.

It is not possible to register two endpoints with the same identifier.

Parameters

- [in] ctx: Context for the iot_agent.
- [in] datastore: Datastore that is registered.

Return Value

- IOT_AGENT_SUCCESS: Upon success

```
iot_agent_status_t iot_agent_register_keystore(iot_agent_context_t *ctx, iot_agent_keystore_t *keystore)
```

Register a keystore endpoint.

Note that the ownership for the keystore is not transferred. The caller is responsible that the keystore is freed at the appropriate time.

It is not possible to register two endpoints with the same identifier.

Parameters

- ctx: Context for the iot_agent.
- [in] keystore: Keystore that is registered.

Return Value

- IOT_AGENT_SUCCESS: Upon success

```
iot_agent_status_t iot_agent_select_service_by_id(iot_agent_context_t *ctx, uint64_t service_id, nxp_iot_ServiceDescriptor *service_descriptor)
```

Select service by given ID.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling *iot_agent_free_service_descriptor*. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

See *iot_agent_is_service_configuration_data_valid*

Parameters

- [in] ctx: Context for the iot_agent.
- [in] service_id: ID of the service
- [out] service_descriptor: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

```
iot_agent_status_t iot_agent_select_service_by_index(iot_agent_context_t *ctx, size_t  
index, nxp_iot_ServiceDescriptor  
*service_descriptor)
```

Select service by given index.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling *iot_agent_free_service_descriptor*. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

See *iot_agent_is_service_configuration_data_valid*

Parameters

- [in] ctx: Context for the iot_agent.
- [in] index: Index of the service
- [out] service_descriptor: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

```
iot_agent_status_t iot_agent_set_edgelock2go_datastore(iot_agent_context_t *ctx,  
iot_agent_datastore_t *data-  
store)
```

Set the datastore that is used to hold the information to connect to the EdgeLock 2GO cloud service.

Note that the ownership for the datastore is not transferred. The caller is responsible that the datastore is freed at the appropriate time.

```
iot_agent_status_t iot_agent_update_device_configuration(iot_agent_context_t *ctx,  
nxp_iot_UpdateStatusReport  
*status_report)
```

Update device configuration Reach out to EdgeLock 2GO cloud service for checking and (if applicable) fetching configuration updates for the device.

Post In case of success, the status_report structure is filled using dynamically allocated fields and needs to be freed after usage by calling #iot_agent_free_status_report.

Parameters

- [in] ctx: Context for the iot_agent.

- [out] status_report: Provides a more detailed view on the operations performed during the update and its outcomes. If the argument is NULL, no detailed status is reported.

Return Value

- IOT_AGENT_SUCCESS: Upon success
- IOT_AGENT_FAILURE: Upon failure

```
iot_agent_status_t iot_agent_update_device_configuration_from_constants(iot_agent_context_t
*agent_context,
uint32_t
client_key_object_id,
uint32_t
client_cert_object_id,
nxp_iot_UpdateStatusReport
*status_report)
```

Update device configuration.

Reach out to EdgeLock 2GO cloud service for checking and (if applicable) fetching configuration updates for the device.

The connection details (hostname/port/server root certificates, etc.) are taken from the configuration constants in `nxp_iot_agent_config.h`.

It is necessary that an sss keystore that contains credentials (client key and client certificate) for connecting to the EdgeLock 2GO cloud service. The object ids to those credentials are settable via function arguments.

Post In case of success, the status_report structure is filled using dynamically allocated fields and needs to be freed after usage by calling `#iot_agent_free_status_report`.

Parameters

- [in] ctx: Context for the iot_agent.
- [out] status_report: Provides a more detailed view on the operations performed during the update and its outcomes. If the argument is NULL, no detailed status is reported.

Return Value

- IOT_AGENT_SUCCESS: Upon success
- IOT_AGENT_FAILURE: Upon failure

6.6.2 EdgeLock 2GO Datastore

Warning: doxygengroup: Cannot find namespace “edgelock2go_agent_datastore” in doxygen xml output for project “simw” from directory: ../../../../../../_docs_build_simw/xml

6.6.3 EdgeLock 2GO Keystore

group edgelock2go_agent_keystore

Functions to interact with a keystore. There are concrete implementations of this API for different SEs.

Typedefs

```
typedef iot_agent_status_t (*iot_agent_keystore_destroyer_t) (void *context)
typedef void (*iot_agent_keystore_session_closer_t) (void *context)
typedef iot_agent_status_t (*iot_agent_keystore_session_opener_t) (void *context)
typedef struct pb_field_s pb_field_t
typedef struct pb_istream_s pb_istream_t
typedef struct pb_ostream_s pb_ostream_t
```

Functions

void iot_agent_keystore_close_session (iot_agent_keystore_t *keystore)
Close a session/connection to a keystore.

iot_agent_status_t iot_agent_keystore_free (iot_agent_keystore_t *keystore)
Destroy the keystore.

Depending on the type of the keystore this is triggering actions on the keystore's context itself by calling the _destroy() function of the keystore interface.

This does not free the context of the keystore.

The keystore is not usable after a call to iot_agent_keystore_free.

iot_agent_status_t iot_agent_keystore_open_session (iot_agent_keystore_t *keystore)
Open a session/connection to a keystore.

struct iot_agent_keystore_interface_t
#include <nxp_iot_agent_keystore.h> The interface any keystore needs to implement.

struct iot_agent_keystore_t
#include <nxp_iot_agent_keystore.h> A structure binding a keystore interface and a keystore context to a keystore instance.

6.6.4 EdgeLock 2GO Session

group edgelock2go_agent_session

Session handling functions for the EdgeLock 2GO agent. When interacting with the OpenSSL engine, the agent session needs to be closed before and opened after OpenSSL is active.

Functions

iot_agent_status_t iot_agent_session_connect (ex_sss_boot_ctx_t *pSeBootCtx)
Re-create an open a session with secure element

Parameters

- [in] pCtx: pointer to session context

Return Value

- IOT_AGENT_SUCCESS: upon success
- IOT_AGENT_FAILURE: upon failure

```
void iot_agent_session_disconnect(ex_sss_boot_ctx_t *pSeBootCtx)
    Disconnect and close session with secure element
```

Parameters

- [in] pCtx: pointer to session context

```
iot_agent_status_t iot_agent_session_init(int argc, const char *argv[], ex_sss_boot_ctx_t
                                         *pCtx)
    Create an open a session with secure element
```

Parameters

- [in] argc: arguments from command-line if any
- [in] argv: arguments from command-line if any
- [in] pCtx: pointer to session context

Return Value

- IOT_AGENT_SUCCESS: upon success
- IOT_AGENT_FAILURE: upon failure

6.6.5 EdgeLock 2GO Service

group edgelock2go_agent_service

Functionality to work with service descriptors. A service descriptor represents all information from a single cloud provisioning.

Defines

```
IOT_AGENT_CONFIGURATION_DATA_VERSION
```

TypeDefs

```
typedef configuration_data_header_t
    The header of configuration data stored in a datastore.

typedef struct iot_agent_datastore_t iot_agent_datastore_t
typedef uint8_t public_key_identifier_t[16]
typedef uint8_t service_identifier_t[32]
```

Functions

```
void iot_agent_service_free_service_descriptor(nxp_iot_ServiceDescriptor *service_descriptor)
```

Free all FT_POINTER fields of a service descriptor.

When selecting a service, a service descriptor is read from a datastore. A service descriptor can contain fields of variable length (binary data (certificates, etc.) or text (hostname, etc.)). Those fields use dynamically allocated memory. The memory is freed by calling this function.

Parameters

- [in] service_descriptor: Reference to service descriptor

```
size_t iot_agent_service_get_number_of_services(const iot_agent_datastore_t *ctx)
Get the number of services that are available.
```

Return The number of services that are available.

Parameters

- [in] ctx: Context for the iot_agent.

```
iot_agent_status_t iot_agent_service_get_protocol_of_service_as_string(const
nxp_iot_ServiceDescriptor
*service_descriptor,
const
char
**buffer)
```

Get a textual description of the protocol.

Protocol strings are internal constant c-strings. This function returns a pointer to such a string, ownership remains with the iot_agent.

Parameters

- [in] service_descriptor: The service descriptor to get the protocol for.
- [out] buffer: A pointer to a c-string that is changed to point to the textual representation of the protocol.

Return Value

- IOT_AGENT_SUCCESS: The service type could be resolved.
- IOT_AGENT_FAILURE: The service type is invalid.

```
iot_agent_status_t iot_agent_service_get_service_descriptor_of_service(const
iot_agent_datastore_t
*data-
store,
size_t
offset,
nxp_iot_ServiceDescriptor
*ser-
vice_descriptor)
```

Get the service descriptor of a service specified by offset.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling *iot_agent_free_service_descriptor*. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

See *iot_agent_is_service_configuration_data_valid*

Parameters

- [in] ctx: The datastore to query for the service.
- [in] offset: The offset of the service - the memory location in the given datastore.

- [out] `service_descriptor`: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the `service_descriptor` of the selected service.

Return Value

- `IOT_AGENT_SUCCESS`: Upon success

```
iot_agent_status_t iot_agent_service_get_service_offset_by_id(const  
                           iot_agent_datastore_t  
                           *ctx, uint64_t ser-  
                           vice_id, size_t *offset,  
                           nxp_iot_ServiceDescriptor  
                           *service_descriptor)
```

Get the offset and the service descriptor of a service specified by `service_id`.

Pre The configuration data associated to the context is valid.

Post In case of success, the `service_descriptor` structure is filled and needs to be freed after usage by calling `iot_agent_free_service_descriptor`. In case of failure no freeing is required. Also in case of failures, the contents of `service_descriptor` are not guaranteed to remain intact.

See [iot_agent_is_service_configuration_data_valid](#)

Parameters

- [in] `ctx`: The datastore to query for the service.
- [in] `service_id`: ID of the service
- [out] `offset`: The offset of the service descriptor within the datastore.
- [out] `service_descriptor`: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the `service_descriptor` of the selected service.

Return Value

- `IOT_AGENT_SUCCESS`: Upon success

```
iot_agent_status_t iot_agent_service_get_service_offset_by_index(const  
                           iot_agent_datastore_t  
                           *datastore,  
                           size_t index,  
                           size_t *offset,  
                           nxp_iot_ServiceDescriptor  
                           *ser-  
                           vice_descriptor)
```

Get the offset and the service descriptor of a service specified by index.

Pre The configuration data associated to the context is valid.

Post In case of success, the `service_descriptor` structure is filled and needs to be freed after usage by calling `iot_agent_free_service_descriptor`. In case of failure no freeing is required. Also in case of failures, the contents of `service_descriptor` are not guaranteed to remain intact.

See [iot_agent_is_service_configuration_data_valid](#)

Parameters

- [in] `ctx`: The datastore to query for the service.

- [in] index: The index of the service (within the given datastore).
- [out] service_descriptor: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

```
iot_agent_status_t iot_agent_service_get_service_type_as_string(const
                                                               nxp_iot_ServiceDescriptor
                                                               *service_descriptor,
                                                               const     char
                                                               **buffer)
```

Get a textual description of the service type.

Service type strings are internal constant c-strings. This function returns a pointer to such a string, ownership remains with the iot_agent.

Parameters

- [in] service_descriptor: The service descriptor to get the type for.
- [out] buffer: A pointer to a c-string that is changed to point to the textual representation of the service type.

Return Value

- IOT_AGENT_SUCCESS: The service type could be resolved.
- IOT_AGENT_FAILURE: The service type is invalid.

```
bool iot_agent_service_is_configuration_data_valid(const iot_agent_datastore_t
                                                 *ctx)
```

Checks service configuration data of all registered datastores are valid.

Parameters

- [in] ctx: Context for the iot_agent.

Return Value

- true: Service configuration data of all registered datastores are valid
- false: Service configuration data of a registered datastores is invalid

Variables

uint32_t length

Total length of the stored data (incl. all fields of configuration_data_header_t).

uint32_t number_of_services

Number of stored service configurations.

uint32_t version

Version number of the structure of the configuration data.

6.6.6 EdgeLock 2GO Dispatcher

Warning: doxygengroup: Cannot find namespace “edgelock2go_agent_dispatcher” in doxygen xml output for project “simw” from directory: ../../../../../../_docs_build_simw/xml

6.6.7 EdgeLock 2GO Utils

group `edgelock2go_agent_utils`

Utility functions for the EdgeLock 2GO agent for writing and generating key references and certificates.

Defines

`NXP_IOT_AGENT_EDGELOCK2GO_CLIENT_CERTIFICATE_BUFFER_SIZE`

The size of the buffer to reserve for the EdgeLock 2GO cloud service client certificate.

Typedefs

```
typedef struct iot_agent_context_t iot_agent_context_t
typedef struct iot_agent_datastore_t iot_agent_datastore_t
```

Functions

`iot_agent_status_t iot_agent_keystore_file_existence(const char *filename, bool forceCreation)`

Checks existence of a file. If required it forces creation of file.

Parameters

- [in] filename: Name of the file
- [in] forceCreation: Switch to force creation of the file

Return Value

- IOT_AGENT_SUCCESS: upon success
- IOT_AGENT_FAILURE: upon failure

`iot_agent_status_t iot_agent_utils_convert_service2key_id(uint64_t service_id, uint32_t *key_id)`

Maps a given service id to the range of keys that are managed by the EdgeLock 2GO cloud service.

Parameters

- [in] service_id: Service ID
- [out] key_id: Key ID

Return Value

- IOT_AGENT_SUCCESS: upon success
- IOT_AGENT_FAILURE: upon failure

```
iot_agent_status_t iot_agent_utils_get_edgelock2go_certificate_id(sss_key_store_t
                                                               *keystore,
                                                               uint32_t *object_id)
```

Checks whether a keystore contains the object with the defined certificate to use for authenticating at the EdgeLock 2GO cloud service.

The keystore might contain keys using ECC and/or RSA. If available, it will return the object id of the ECC certificate, otherwise the object id of the RSA certificate.

When neither is found or in case of other issues with the keystore, the function does not return IOT_AGENT_SUCCESS.

```
iot_agent_status_t iot_agent_utils_get_edgelock2go_key_id(sss_key_store_t *keystore,
                                                       uint32_t *object_id)
```

Checks whether a keystore contains the object with the defined key to use for authenticating at the EdgeLock 2GO cloud service.

The keystore might contain keys using ECC and/or RSA. If available, it will return the object id of the ECC key, otherwise the object id of the RSA key.

When neither is found or in case of other issues with the keystore, the function does not return IOT_AGENT_SUCCESS.

```
iot_agent_status_t iot_agent_utils_write_edgelock2go_datastore(iot_agent_keystore_t
                                                               *keystore,
                                                               iot_agent_datastore_t
                                                               *datastore, const
                                                               char *host-
                                                               name, uint32_t
                                                               port, const
                                                               pb_bytes_array_t
                                                               *trusted_root_ca_certificates)
```

Assemble a service descriptor for the connection to EdgeLock 2GO cloud service and write it to a datastore.

It is assumed that credentials (either ECC or RSA) for client certificate authentication are stored in keystore.

```
iot_agent_status_t iot_agent_utils_write_edgelock2go_datastore_from_env(iot_agent_keystore_t
                                                               *key-
                                                               store,
                                                               iot_agent_datastore_t
                                                               *data-
                                                               store)
```

Assemble a service descriptor for the connection to EdgeLock 2GO cloud service and write it to a datastore.

Per default this function takes the hostname and port from the defines

- EDGELOCK2GO_HOSTNAME and
- EDGELOCK2GO_PORT

For testing purposes, it is possible to set-up the connection parameters to the EdgeLock 2GO cloud service from externally by passing in information via environment variables.

The following env variables are considered:

- IOT_AGENT_TEST_EDGELOCK2GO_HOSTNAME
- IOT_AGENT_TEST_EDGELOCK2GO_PORT

It is assumed that credentials (either ECC or RSA) for client certificate authentication are stored in keystore.

6.7 Usage Examples

The usage of EdgeLock 2GO agent is demonstrated with the following example demo source code.

Initialization of contexts of EdgeLock 2GO agent its keystores and datastores:

```

agent_status = iot_agent_init(&iot_agent_context);
AGENT_SUCCESS_OR_EXIT();

/*
***** Register keystore*****
agent_status = iot_agent_keystore_sss_se05x_init(&keystore, EDGELOCK2GO_
KEYSTORE_ID, pCtx, true);
AGENT_SUCCESS_OR_EXIT();

agent_status = iot_agent_register_keystore(&iot_agent_context, &keystore);
AGENT_SUCCESS_OR_EXIT();

/*
***** Register datastore*****
// This is the datastore that holds connection information on how to connect_
to
// the EdgeLock 2GO cloud service itself. Typically this would be a_
persistent
// datastore which supports transactions to allow for atomic updates of
// the URL/port/etc. If a filesystem is available, here, we use a file-based
// datastore.
// Note, that the ID of the datastore is a given.
#if DS_FS
    agent_status = iot_agent_datastore_fs_init(&edgelock2go_datastore,
                                                nxp_iot_DatastoreIdentifiers_DATASTORE_EDGELOCK2GO_ID,
                                                gszEdgeLock2GoDatastoreFilename,
                                                &iot_agent_service_is_configuration_data_valid);
#elif DS_PLAIN
    agent_status = iot_agent_datastore_plain_init(&edgelock2go_datastore,
                                                nxp_iot_DatastoreIdentifiers_DATASTORE_EDGELOCK2GO_ID);
#endif
AGENT_SUCCESS_OR_EXIT();

// If the contents of the datastore for the connectin to the EdgeLock 20_
datastore
// are not valid (e.g. on the first boot), fill the datastore with contents
// from the settings contained in nxp_iot_agent_config.h
if (!iot_agent_service_is_configuration_data_valid(&edgelock2go_datastore)) {
    iot_agent_utils_write_edgelock2go_datastore(&keystore, &edgelock2go_
datastore,
                                                EDGELOCK2GO_HOSTNAME, EDGELOCK2GO_PORT, iot_agent_trusted_
root_ca_certificates);
}

// For connecting to the EdgeLock 2GO cloud service, we also need to register_
the
// datastore that contains the information on how to connect there.
agent_status = iot_agent_set_edgelock2go_datastore(&iot_agent_context, &
edgelock2go_datastore);
AGENT_SUCCESS_OR_EXIT();

```

(continues on next page)

(continued from previous page)

```
#if DS_FS
    agent_status = iot_agent_datastore_fs_init(&datastore, 0U,_
→g_szDatastoreFilename,
        &iot_agent_service_is_configuration_data_valid);
    AGENT_SUCCESS_OR_EXIT();
#endif
#if DS_PLAIN
    agent_status = iot_agent_datastore_plain_init(&datastore, 0U);
    AGENT_SUCCESS_OR_EXIT();
#endif
    agent_status = iot_agent_register_datastore(&iot_agent_context, &datastore);
    AGENT_SUCCESS_OR_EXIT();
```

Update device configuration:

```
agent_status = iot_agent_update_device_configuration(&iot_agent_context, &
→status_report);

    // We have a status report which can have some details on the operations that happened.
    // This gives the opportunity to programmatically react on errors/failures.
→For demonstration
    // purpose, print that information to the console here.
    if ((agent_status == IOT_AGENT_SUCCESS || agent_status == IOT_AGENT_UPDATE_FAILED) && status_report.has_status) {
        print_status_report(&status_report);
    }

AGENT_SUCCESS_OR_EXIT();
```


Iterate over configured services and access credentials and service configuration data:

SEMS LITE AGENT

7.1 SEMS Lite Overview (Only for SE051)

SEMSLite enables the deployment and update of applets on SE in the field. When the applets are being upgraded, the data of previous/new applet remains inside the secure element only. Thus it securely preserves the device applet data.

Note: SEMS Lite is only supported for SE051.

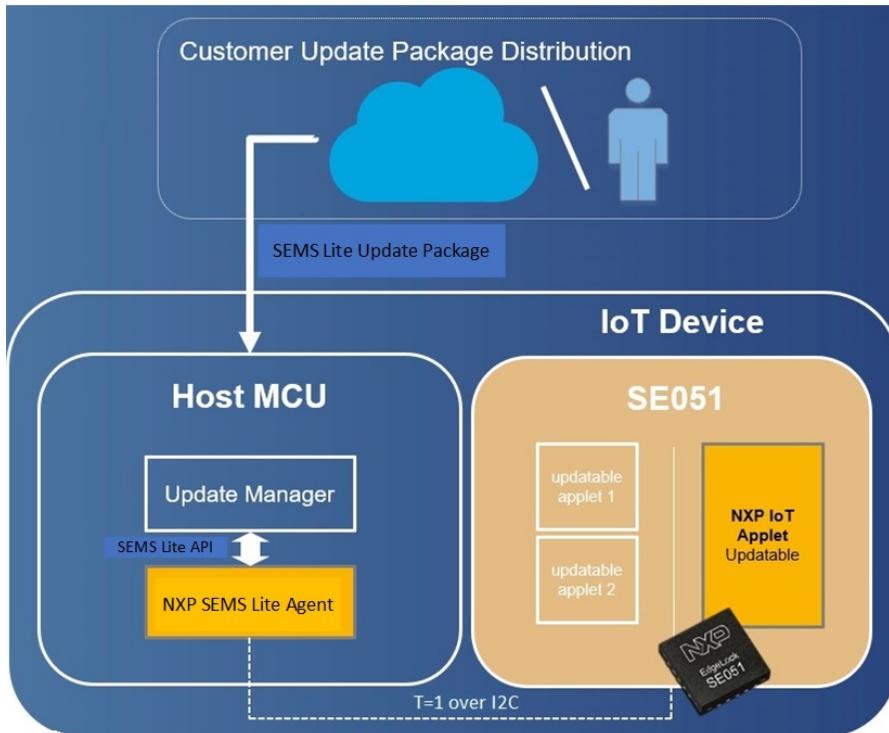

7.1.1 Update Manager (from customer)

The role of update manager is as under:

- Securely downloading *update package* from its back-end
- Defining right time for update (depending on context: battery status, IoT device usage profile, etc.)
- Managing switching between current and new applet
- Optionally reporting update status to back-end

We provide some examples for update manager ([Section 5.1.1 SEMS Demos](#))

7.1.2 SEMS Lite Agent (from NXP)


The role of SEMS Lite Agent is an under:

- Provide functional APIs to Update Manager
- It is a library/module that helps the *Update Manager* to query/know the state of the system
- Use the *update package* as received by the *Update Manager*, and update the Applet
- Track the update progress / interrupted updates
- Optionally retrieve loading receipt from the secure element.

7.2 Update Package

SEMS Lite agent gets an *update package* from the *update manager*. The upgrade package contains package meta data header and set of APDUs(MulticastCommands) to be sent to the SE for update. It may optionally also contain host control commands (e.g. Reset the secure element).

Format of the *update package*:

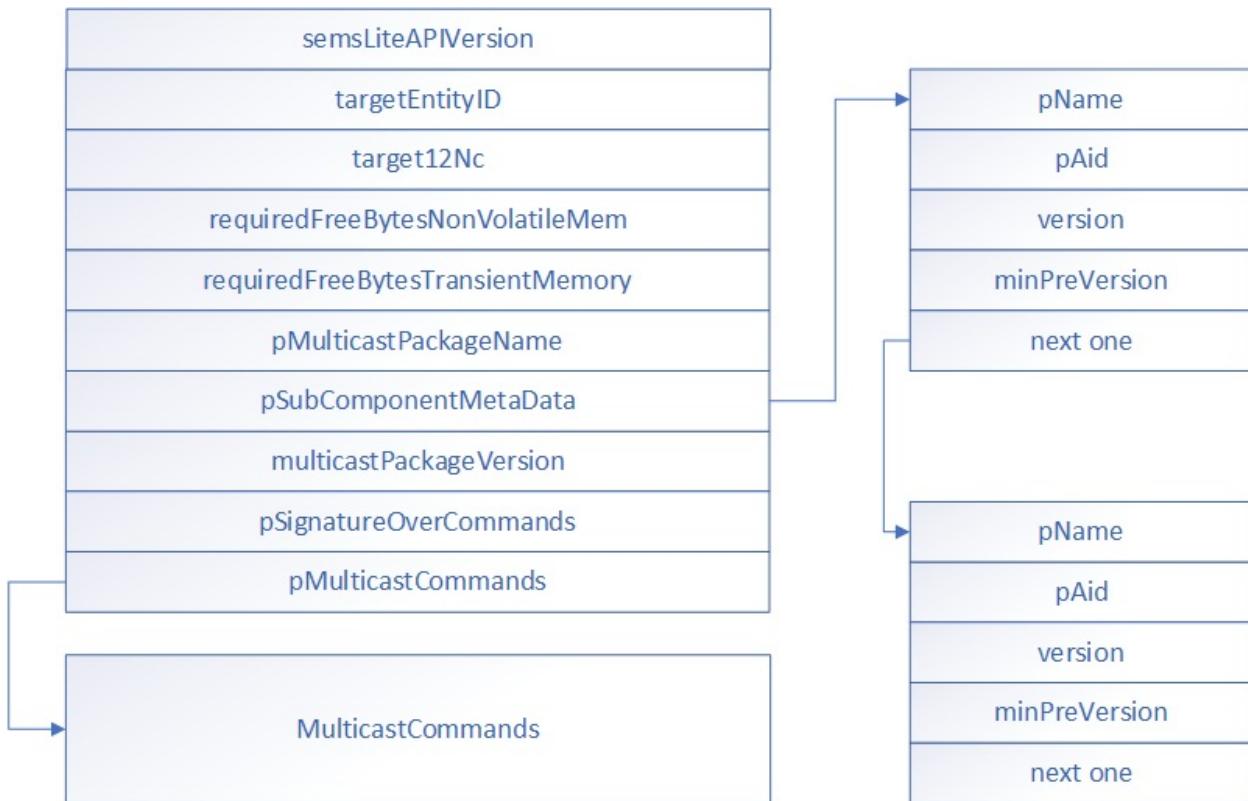

NXP provides customer package meta data and Multicast commands in JSON file. NXP also provides generator tool to turn the JSON file to binary file and .c/.h files. Customer can decide which one to be used by *update manager* according to their platform. *Update manager* should create *update package* from these files. This chapter has provided examples for the use of generator. It also provides links to the demos which will use the generated files to create *update package*.

7.2.1 Package Meta Data

Package meta data includes information such as version and memory requirement. These information will help SEMS Lite agent to preprocess package before loading APDU commands to SE.

- MulticastPackageFormatVersion: Version information of this json Format for MulticastPackages.
- TargetEntityID: Entity ID, 16bytes long Binary Coded Decimal, of the target device where this MulticastPackage is intended to be executed on. It is an identifier of the key-set of the Multicast Applet Loader.
- Target12nc: Target 12nc is a 12 digit numerical code identifying the target device where this MulticastPackage is intended to be executed on, as known to customers and used on EdgeLock2Go to identify device types.
- requiredFreeBytesNonVolatileMemory: Minimum required free Non Volatile memory in bytes that have to be available on the target device before execution of this MulticastPackage.
- requiredFreeBytesTransientMemory: Minimum required free transient (RAM) memory in bytes that have to be available on the target device before execution of this MulticastPackage.
- MulticastPackageName: Giving a descriptive name to the complete Multicast Package.
- MulticastPackageVersion: Version information of this MulticastPackage, describing the sum version over all contained content.

- SubComponentMetaData: A list of subcomponents of this MulticastPackage, designating all Executable Load Files (ELFs) Contained. It usually contains one entry, but can have multiple in the case multiple dependent ELF's get modified. This list can be empty, e.g. for a KeyRotation or deletion of content.
- SubComponentMetaData name: A human readable name for this subcomponent.
- SubComponentMetaData aid: The Application Identifier (AID) of the Executable Load File (ELF) which makes up the content of this subcomponent. This is stored as string to have it formatted in upper-case hexadecimal and therefore recognizable form.
- SubComponentMetaData version: Version information of this subcomponent.
- SubComponentMetaData minimumPreviousVersion: Minimum version number of this subcomponent as installed on the secure element before this script is executed. If this field is omitted there is no minimum version requirement, e.g. initial Installation of an applet.
- SignatureOverCommands: The signature over the multicast commands in an machine readable form. So it does not have to be parsed from the script commands. String encoding (upper-case hexadecimal) is chosen here, as many json parsers can not handle such large integer values.
- MulticastCommands: The complete Multicast Applet Loader Script (certificate, signature, encrypted and signed commands) in ls-cgt format, encoded in base64.

7.2.2 MulticastCommands In Protocol Buffer Format

Note: Advanced information

The information below is for advanced users and kept here for the sake of completeness of information. This section can be skipped.

Technically, the APDUS(MulticastCommands) in *update package* is encoded in Protocol Buffers format (<https://developers.google.com/protocol-buffers/>) as defined below

```
/* Full request from cloud/host to the agent */
message Requests {
    /* An array of RequestPayload */
    repeated RequestPayload payload = 1;
}

/* Consolidated response from the agent to the cloud/host */
message Responses {
    /* An array of ResponsePayload */
    repeated ResponsePayload responses = 1;
}

/* The request payload would be either of these */
message RequestPayload {
    oneof payload {
        /* Hello from EdgeLock 2GO cloud service to the EdgeLock 2GO agent.
         *
         * Used only by EdgeLock 2GO agent. */
        AgentHelloRequest hello = 1;
        /* Good Bye from EdgeLock 2GO cloud service to the EdgeLock 2GO agent.
         *
         * Used only by EdgeLock 2GO agent. */
        AgentGoodbyeRequest goodbye = 2;
    }
}
```

(continues on next page)

(continued from previous page)

```

AgentCrlRequest crl = 3;
/* An APDU to a SE.
 *
 * Used both by EdgeLock 2GO agent and SEMS Lite agent. */
ApduRequest apdu = 20;
/* Message to read and write configuration data.
 *
 * Used only by EdgeLock 2GO agent. */
DatastoreRequest datastore = 30;
/* Message to control the host software on the device.
 *
 * Not implemented. */
RpcRequest rpc = 40;
/*
 *
 * Used only by SEMS Lite Agent */
HostControlCmdRequest hostCmd = 50;
}
}

```

```

message ApduRequest {
    /* Array of bytes to be sent to the SE */
    optional bytes message = 100;

    /* What response is expected from the SE for this APDU?
     *
     * If this field is skipped from protobuf, then,
     * only 0x9000 is expected from the SE
     *
     * There are potentially multiple distinct values
     * are expected from the SE, then this
     * can be an array of those values.
     *
     * e.g. expectation: [ 0x9000, 0x6A82 ]
     *
     * For complex schemes where every big range/mask
     * is expected, e.g. 6AXX, 6DXX then the upper
     * 16 bits are treated as mask.
     *
     * e.g. expectation: [ 0x00FF6A00, 0x00FF6D00 ]
     *
     * This field is unused by EdgeLock 2GO cloud service.
     */
    repeated uint32 expectation = 101;
}

/* Response from the SE to host */
message ApduResponse {
    /* Byte array */
    optional bytes message = 100;
}

```

7.2.3 Generator Tools


NXP provides 2 generator tools in `semslit/tools/sems-lite-generator` directory:

- JSON Generator:

A tool to convert the output of CGT tool to a JSON format output

- SEMS Lite generator:

A tool to convert JSON output to binary file and .c/.h files which will be used by *update manager*

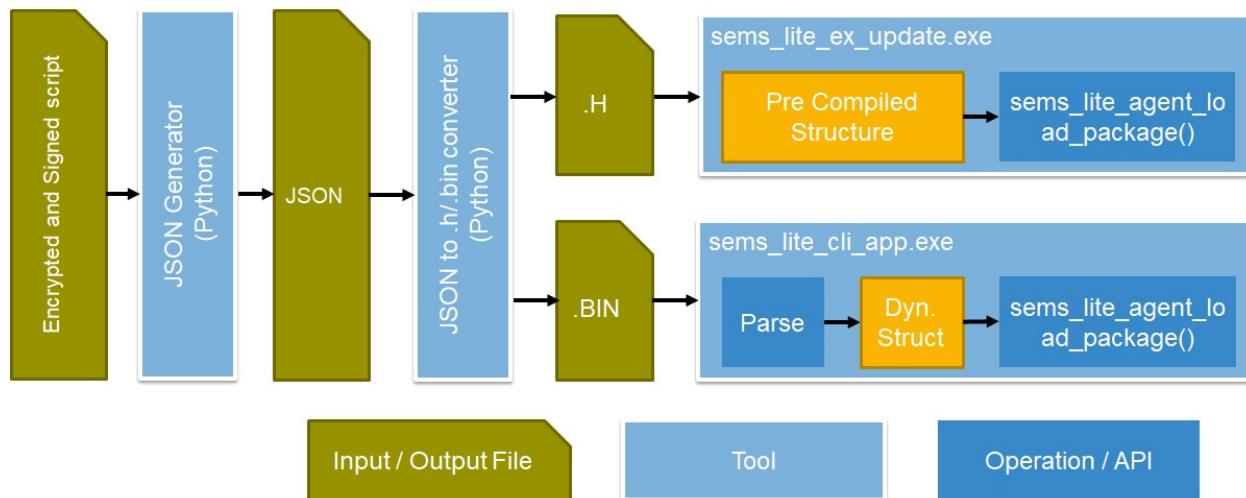

JSON Generator

Usage: `MulticastPackageCli.py [-h] -config_file [CONFIG_FILE] -script_file [SCRIPT_FILE] -out [OUT]`

Arguments:

- **-config_file [CONFIG_FILE]** Config File for MulticastPackage generation. It should follow the format defined in `semslit/tools/sems-lite-generator/schema/MulticastPackage.jsonschema`. NXP provides an example in `semslit/tools/sems-lite-generator/config/ExampleConfig.json`
- **-script_file [SCRIPT_FILE]** Encrypted and Signed script as output by the ls-cgt tool.
- **-out [OUT]** Output MulticastPackage json file.

Example:

```
python ./MulticastPackageCli.py -config_file .config.json -script_file .encrypted.txt -out .Upgrade_IoTApplet.json
```

SEMS Lite Generator

Usage: generate.py [-h] [-i INPUT_JSON] [-o OUTPUT_PATH] [-n NAME] [-p PROTOC_PATH]

Process sems-lite-generator arguments

Arguments:

- h, --help** show this help message and exit
- i, --input_json INPUT_JSON** input json file
- o, --output_path OUTPUT_PATH** output folder path
- n, --name NAME** stem name of output files. By default, it would use the same name as input json file.
- p, --protoc_path PROTOC_PATH** protoc file path. Use tools/mw_onverter/protoc.exe by default

Example:

```
python ./generate.py -i ./Upgrade_NXP-IoTApplet-6.0.json -o ./
```

The generated files:

- Upgrade_NXP-IoTApplet-6.0.bin: Binary file. It can be used for platforms that have a file system (Windows, Linux, etc). It is encoded in TLV as following:

0x21	Len		multicastPackage
- 0x22	Len	Major Minor	MulticastPackageFormatVersion
- 0x23	Len	Binary	TargetEntityID
- 0x2f	Len	Binary	Target12nc
- 0x24	Len	u32/u16	requiredFreeBytesNonVolatileMemory
- 0x25	Len	u32/u16	requiredFreeBytesTransientMemory
- 0x26	Len	String	MulticastPackageName
- 0x27	Len	Major Minor	MulticastPackageVersion
- 0x28	Len	SubComponentMetaDataTable	
- - 0x2B	Len	String	SubComponentMetaDataTable.name
- - 0x2C	Len	Binary	SubComponentMetaDataTable.aid
- - 0x2D	Len	Major Minor	SubComponentMetaDataTable.version
- - 0x2E	Len	Major Minor	SubComponentMetaDataTable.minimumPreviousVersion
- - 0x2B	Len	String	SubComponentMetaDataTable2.name
- - 0x2C	Len	Binary	SubComponentMetaDataTable2.aid
- - 0x2D	Len	Major Minor	SubComponentMetaDataTable2.version
- - 0x2E	Len	Major Minor	SubComponentMetaDataTable2.minimumPreviousVersion
...			
- - 0x2B	Len	String	SubComponentMetaDataTableN.name
- - 0x2C	Len	Binary	SubComponentMetaDataTableN.aid
- - 0x2D	Len	Major Minor	SubComponentMetaDataTableN.version
- - 0x2E	Len	Major Minor	SubComponentMetaDataTableN.minimumPreviousVersion
- 0x29	Len	Binary	SignatureOverCommands
- 0x2A	Len	Binary	MulticastCommands

- Upgrade_NXP-IoTApplet-6.0.c and .h: These 2 files instantiate *update package*. They can be integrated into customer tools and can be used for all platforms.

We provide examples for how to use the generated files: Section 5.1.1 *SEMS Demos*

Generator Tool Version Compatibility

NXP provides both SEMS Lite generate tool and JSON format in semslite\tools folder. Generate tool should only work with the JSON schema in the same release. For example, in SEMS Lite 2.0.0 (Refer to semslite\version_info.txt) the JSON package format version is 1.2. Generate tool should only use this JSON schema.


	JSON package format 1.1	JSON package format 1.2
SEMS Lite 1.0.0	Supported	Not supported
SEMS Lite 2.0.0	Not supported	Supported

7.3 SEMS Lite Agent Usage

7.3.1 Case 1: Basic Usage

Basic API usage documentation for using SEMS Lite agent is as under.


1. Call `sems_lite_agent_init_context()` to do context initialization.
2. Call `sems_lite_agent_session_open()` to open channel to SE and select SEMS Lite applet.
3. Call `sems_lite_agent_load_package()` to load upgrade script.
4. SEMS Lite agent would internally query the tear status from SE051, if there was a power interrupt during upgradation(tearing event).
5. SEMS Lite agent load the script from package to SE051 and get response from SE051.
6. SEMS Lite agent checking the response and return “Success” to user.
7. User call `sems_lite_agent_session_close()` to close channel.

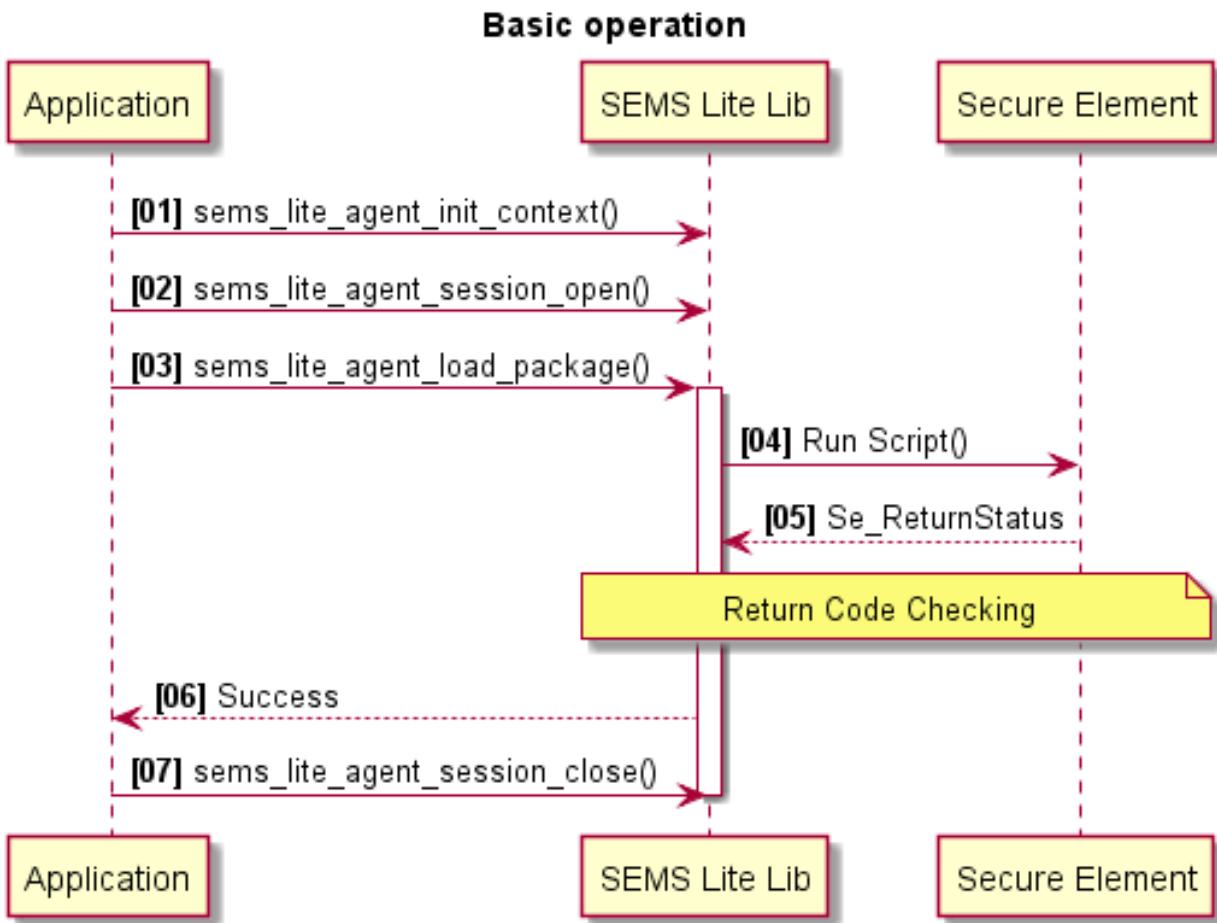

7.3.2 Case 2: In case there was a tearing

In case of tear which is due to system power off during uploading, user would receive return code “DoRerun” when he try to load new package. User must load the torn again.


1. Call `sems_lite_agent_init_context()`, `sems_lite_agent_session_open()` and `sems_lite_agent_load_package()` as those in [Case 1: Basic Usage](#).
2. SEMS Lite agent would query tear status from SE.
3. In case tear happens, SEMS Lite agent would get signature of tear script from SE and compare it to the signature of loaded script.
4. If these 2 signatures are same, it means the loaded script is the re-run script. SEMS Lite agent load it to SE.
5. If the signatures are different, SEMS Lite agent would inform user to load script again.
6. User must find the correct script by signature and load it again.

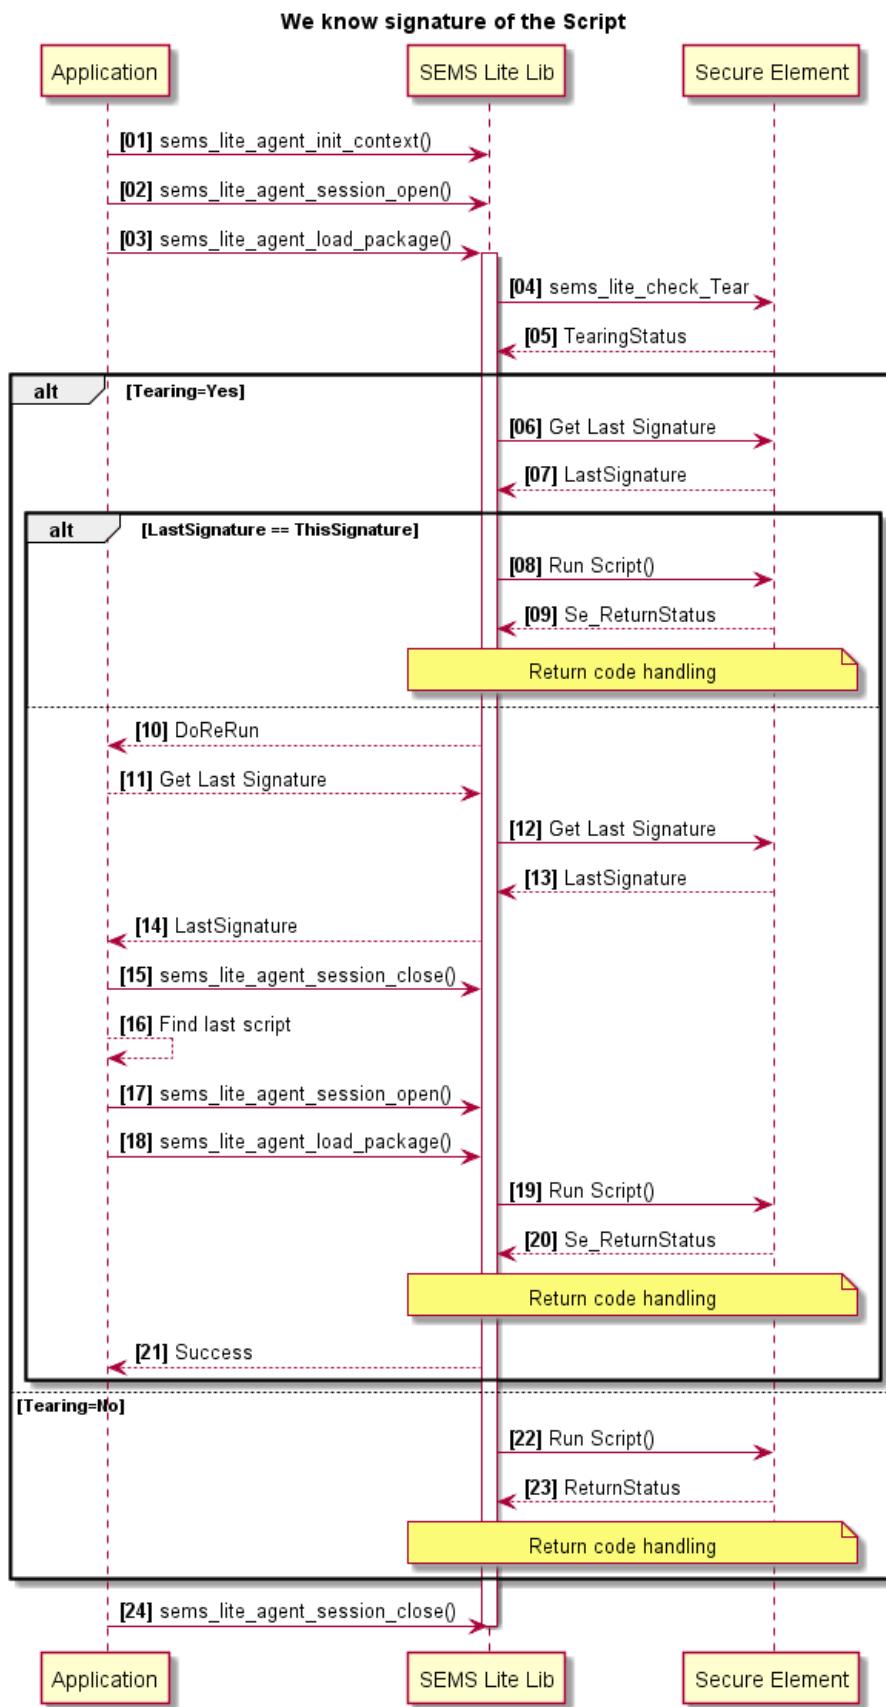


7.3.3 Case 3: Doing a recovery after a failed update


In case the upgrade can not complete, user would receive return code “Do Recovery”. User must load recovery script to resume SE to old Applet.

1. Call `sems_lite_agent_init_context()`, `sems_lite_agent_session_open()` and `sems_lite_agent_load_package()` as those in [Case 1: Basic Usage](#).
2. SEMS Lite agent would query tear status from SE as in [Case 2: In case there was a tearing](#).
3. SEMS Lite agent load the script from package to SE. SE can't complete upgrade and inform SEMS Lite agent to do recovery by response.
4. SEMS Lite agent checking the response and return “DoRecovery” to user.
5. User must find the recovery script which is used to load the old Applet.
6. User load the recovery script and get response from SEMS Lite agent.

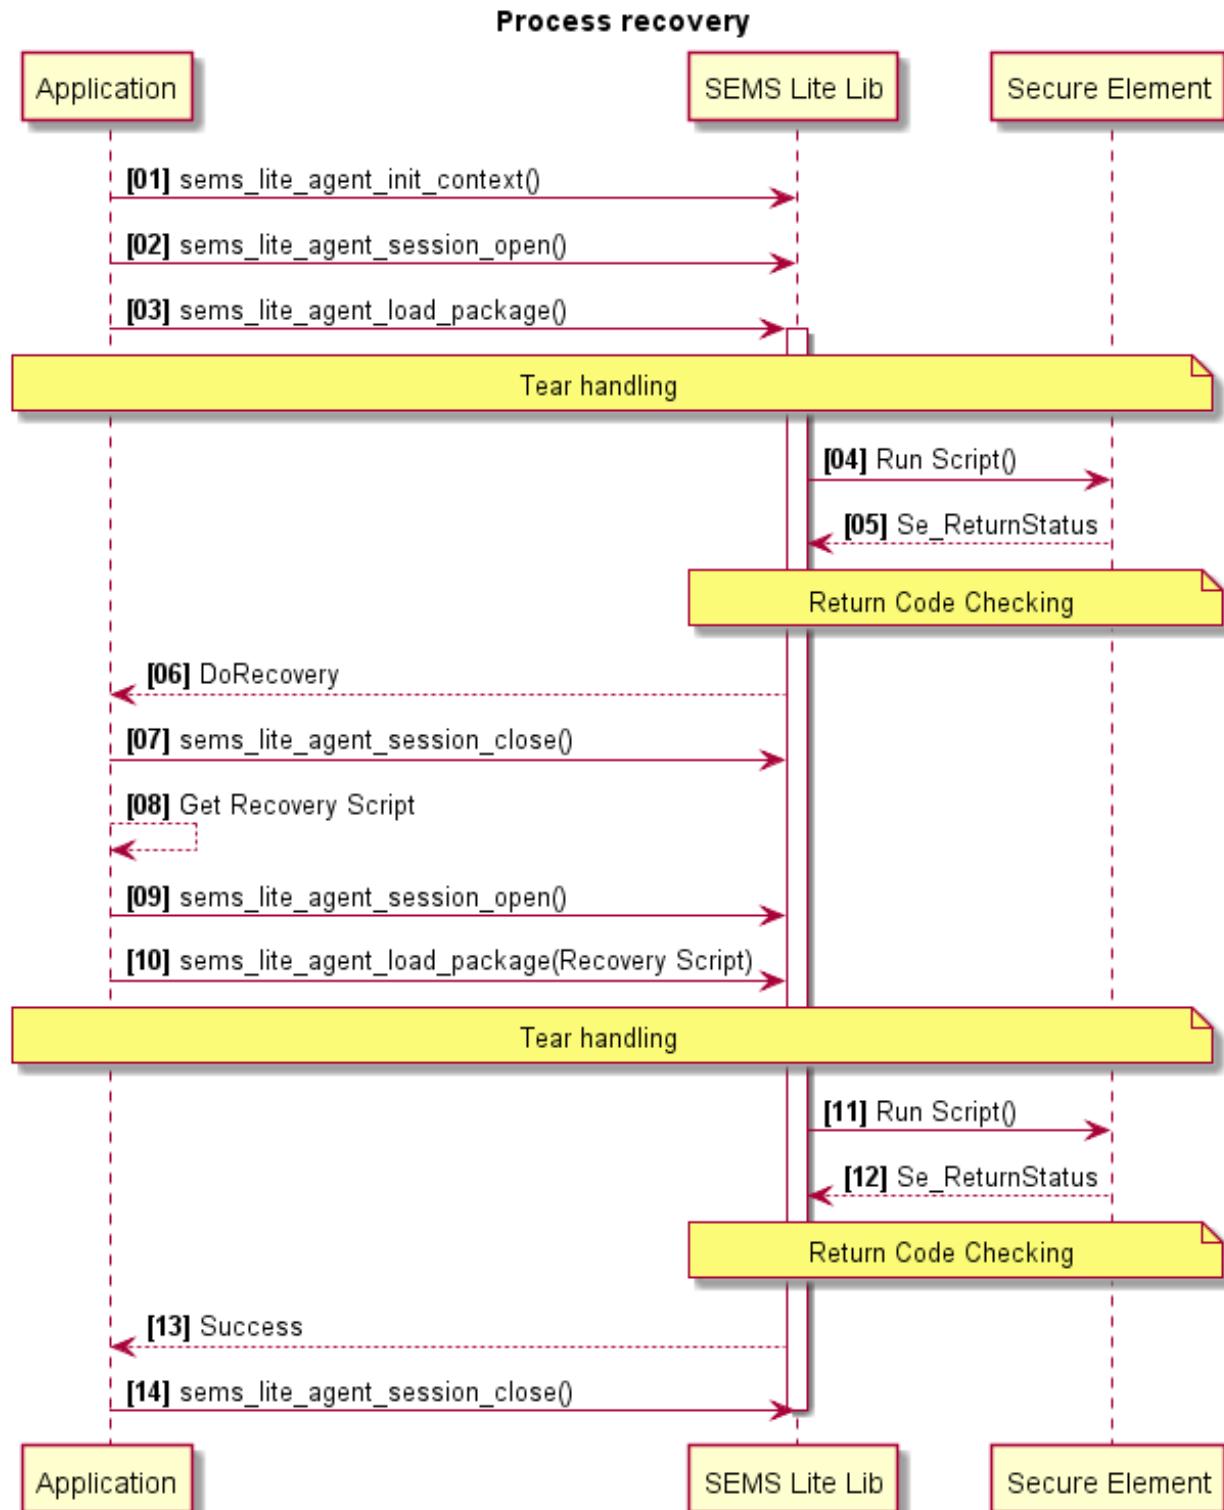


Details for SE to report “Do Recovery” can be found in following:

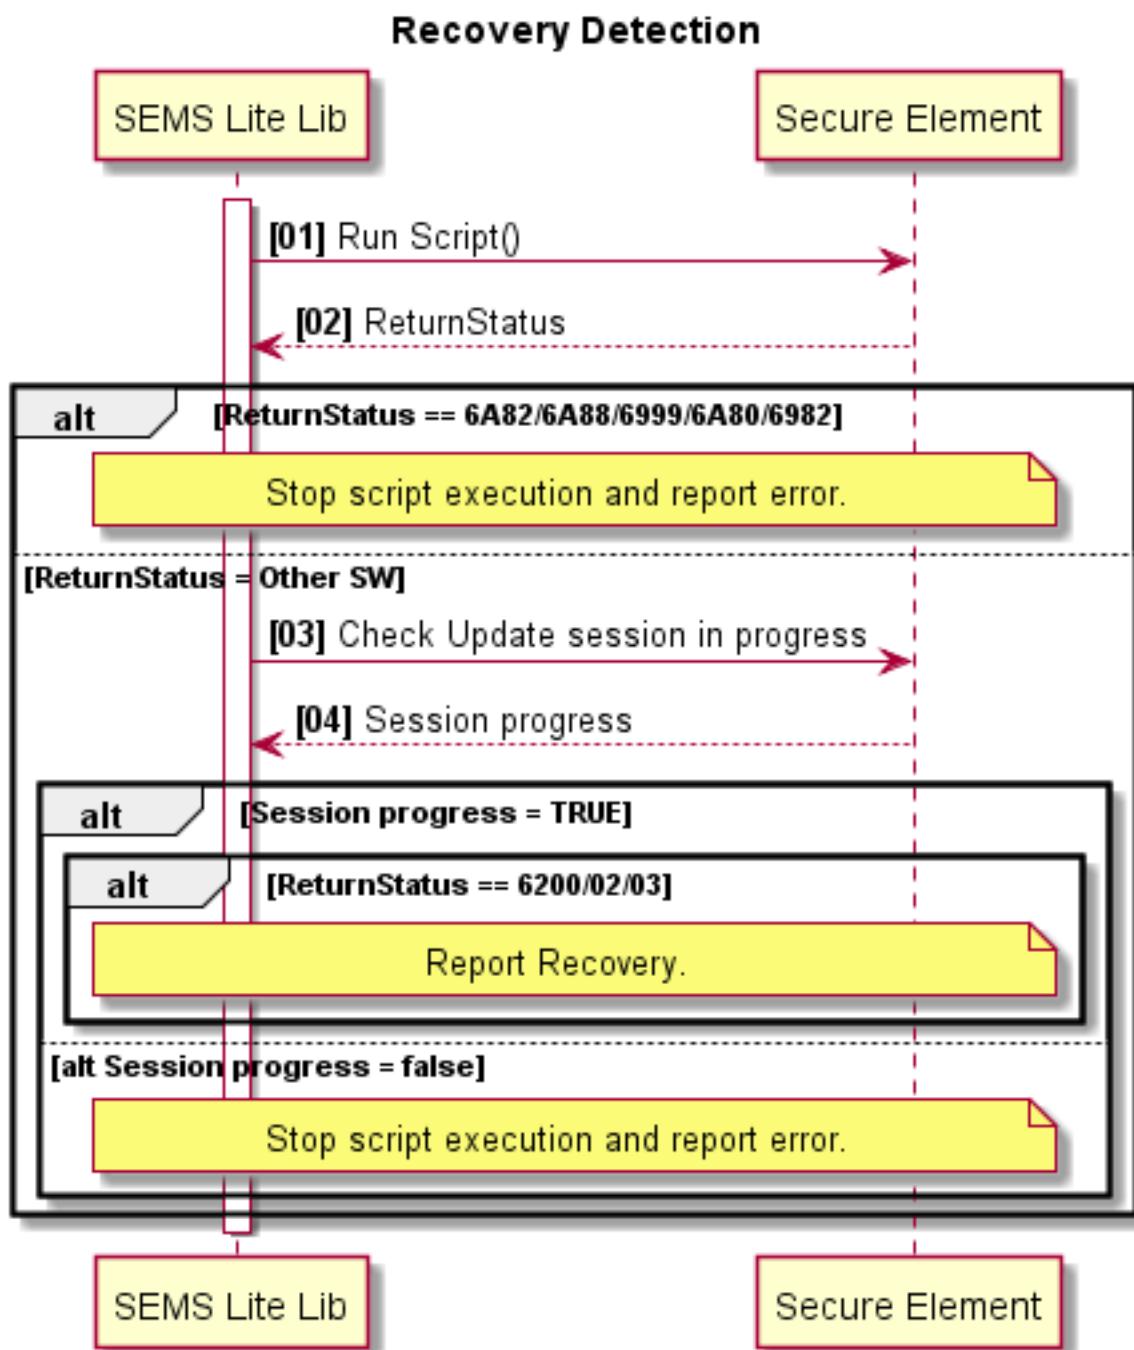

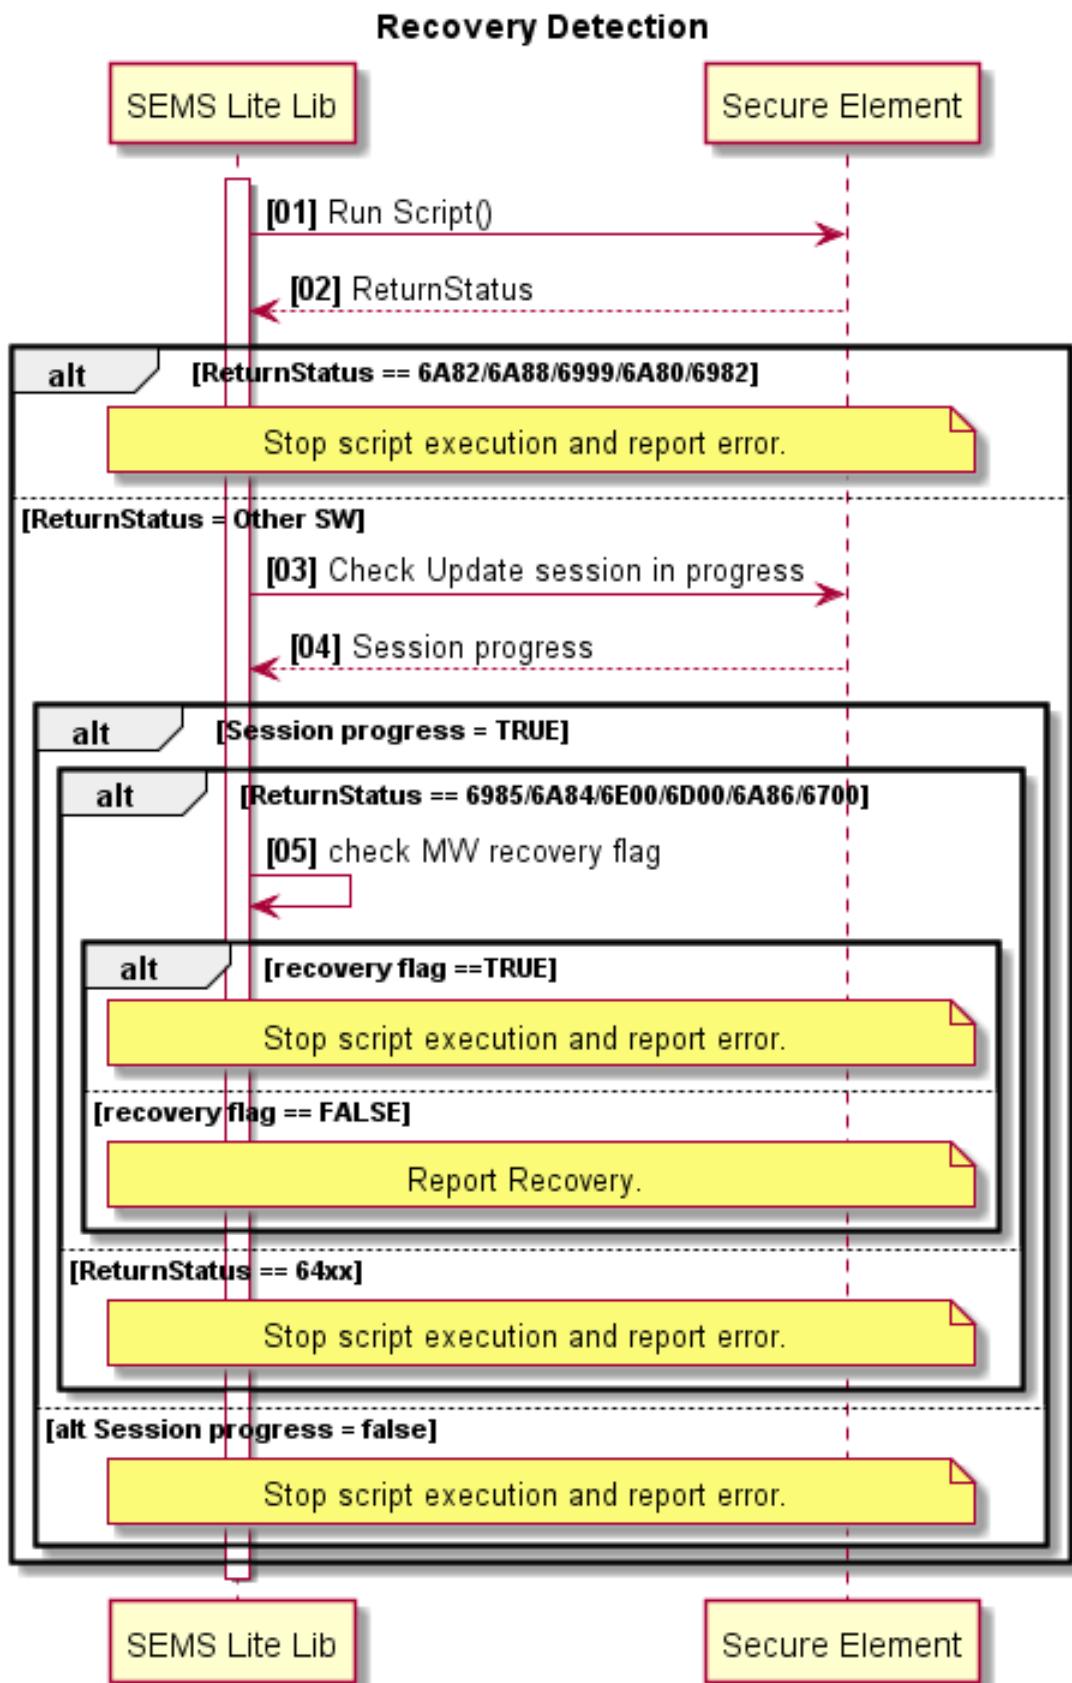

7.3.4 Case 4: Tearing during recovery


Case 4: In case tear happens when loading recovery package, User should re-run the script in the same way described in *Case 2: In case there was a tearing*.

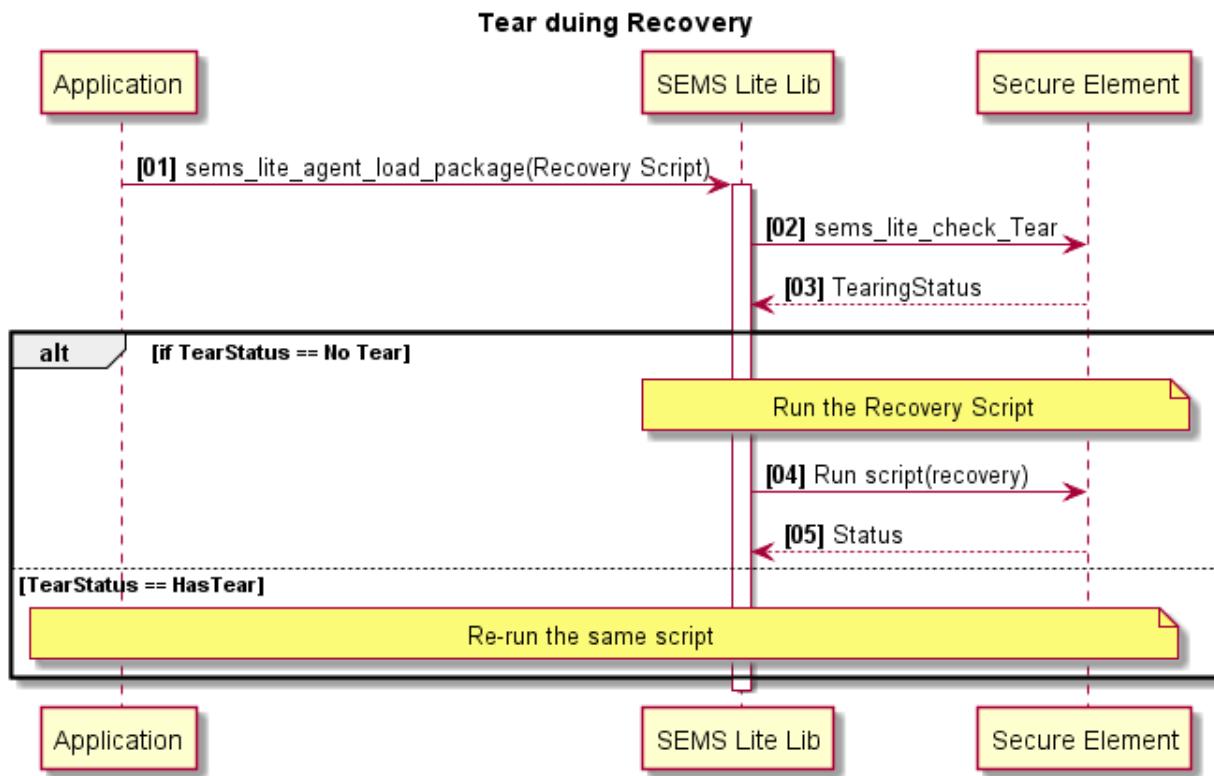

7.3.5 Case 5: Load Key rotate script encounter SE unexpected power off

In case the SE is powered off unexpectedly during uploading key rotate script, user would receive return code "COM_FAILURE" which means communication failure. User has 2 choices:

1. Load next script. SEMS Lite agent will check tear status and inform user if it's required to re-run last script. It's same to *Case 2: In case there was a tearing*.
2. User software checks tear status and then decides whether to re-load the broken script as following:
 - i) Call `sems_lite_agent_init_context()` and `sems_lite_agent_session_open()` as those in *Case 1: Basic Usage*.
 - ii) Call `sems_lite_check_Tear()` to decide if tear happens for last upgrade.
 - iii) In case tear happens, call `sems_lite_get_SignatureofLastScript()` to get last script signature
 - iv) Find the correct script by signature and load the tear script again with `sems_lite_agent_load_package()`.

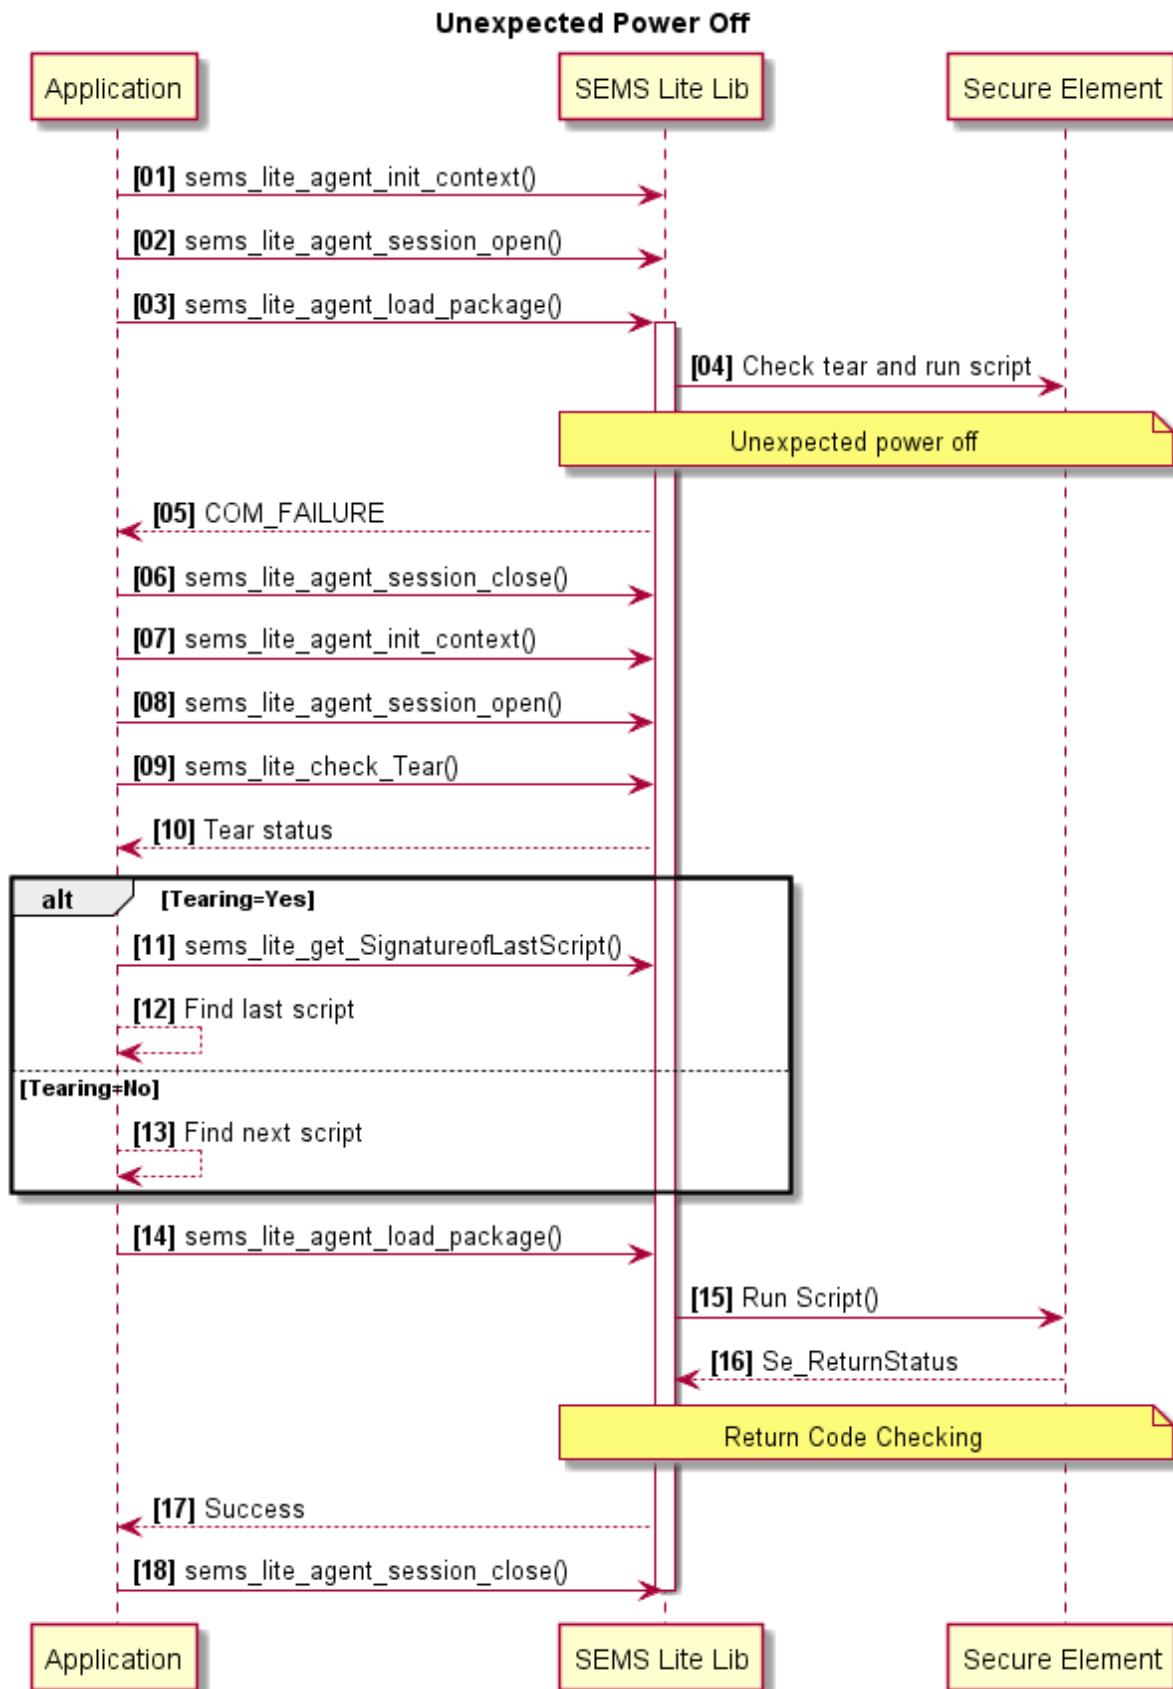

7.3.6 API Calls for Usage of SEMS Lite Agent

```
#include "sems_lite_api.h"
```

Declare a SEMS Lite input buffer: SEMS Lite input buffer is hex file converted from protobuf file

Declare SEMS Lite context: SEMS Lite context holds flags and variables used through the whole loading process

```
sems_lite_agent_ctx_t s_sems_lite_agent_ctx = {0};
```

Initialize the context:

```
rv = sems_lite_agent_init_context(&s_sems_lite_agent_ctx, &pCtx->session);
```

Open session:

```
rv = sems_lite_agent_session_open(&s_sems_lite_agent_ctx);
```

Load Package:

```
status = sems_lite_agent_load_package(
    &s_sems_lite_agent_ctx, &multicast_package);
```

Close the session:


```
rv = sems_lite_agent_session_close(&s_sems_lite_agent_ctx);
```

7.4 SEMS Lite management APIs

SEMS Lite management API request data to SE. TODO To be received from SEMS Lite Applet interface documentation.


7.4.1 Get UUID

See `sems_lite_get_UUID`

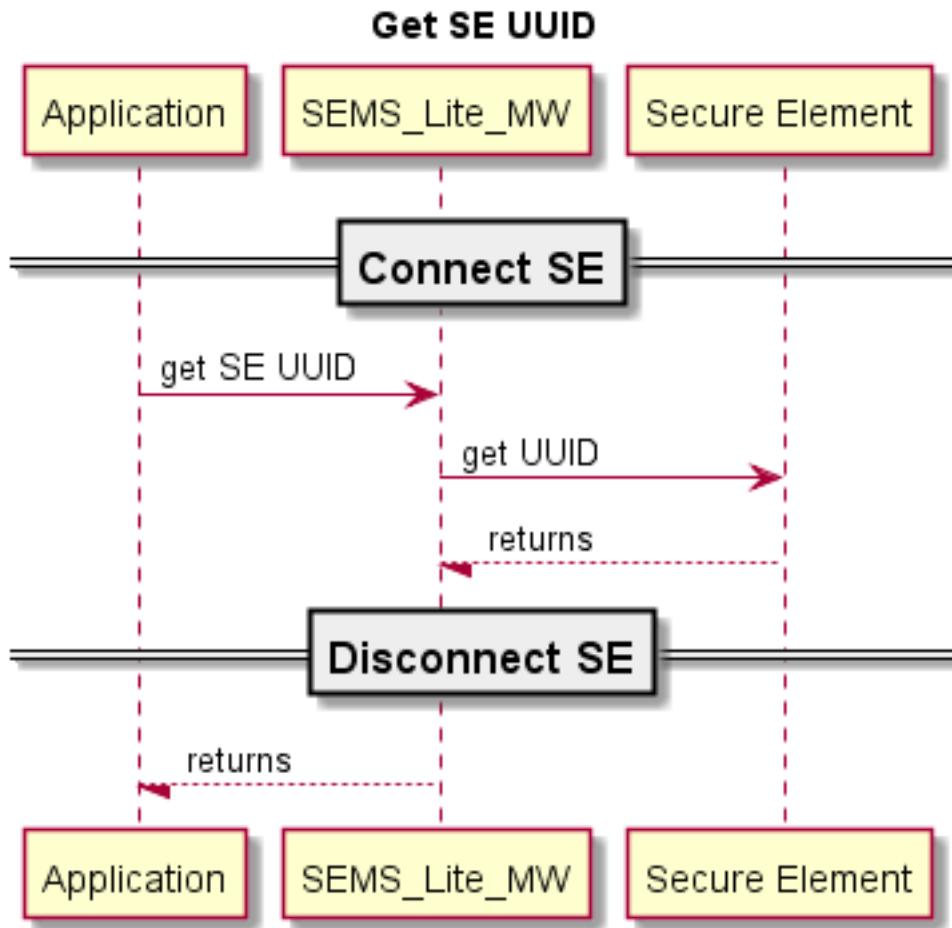


7.4.2 Get Public Key

See `sems_lite_get_Publickey`

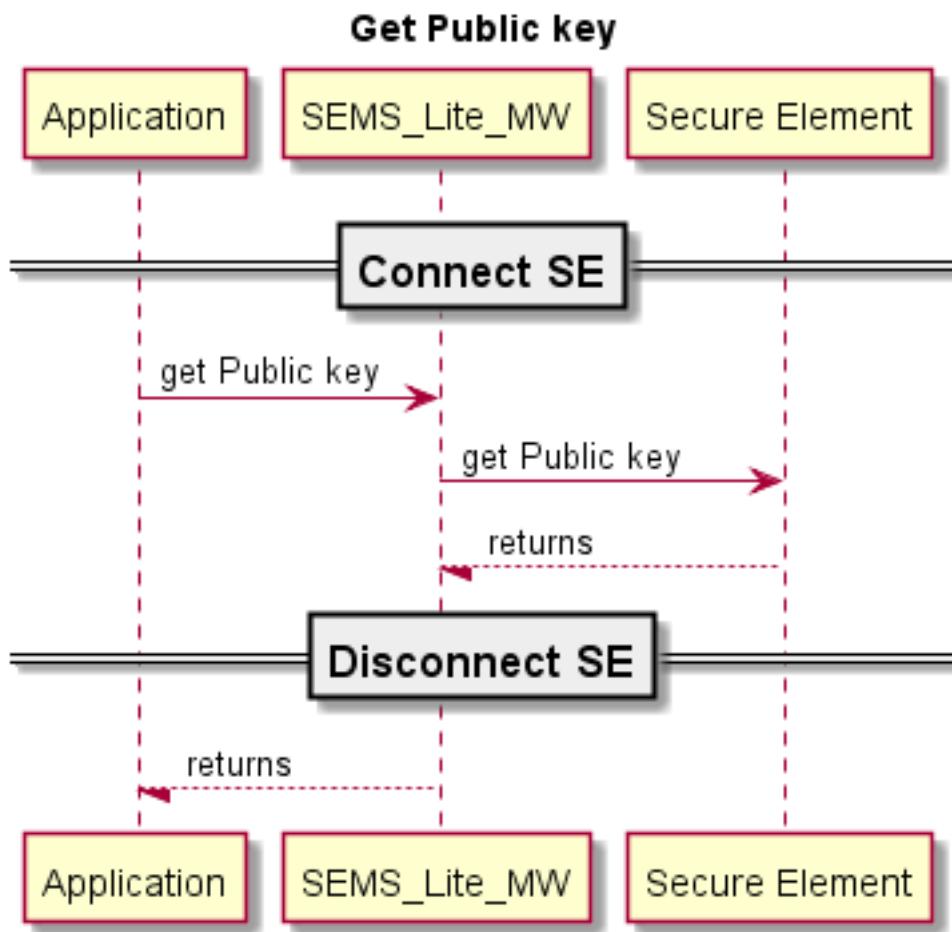

7.4.3 Get Card contents

- See `sems_lite_get_SEAppInfoRAW`
- See `sems_lite_get_SEAppInfo`
- See `sems_lite_get_SEPkgInfoRAW`
- See `sems_lite_get_SEPkgInfo`

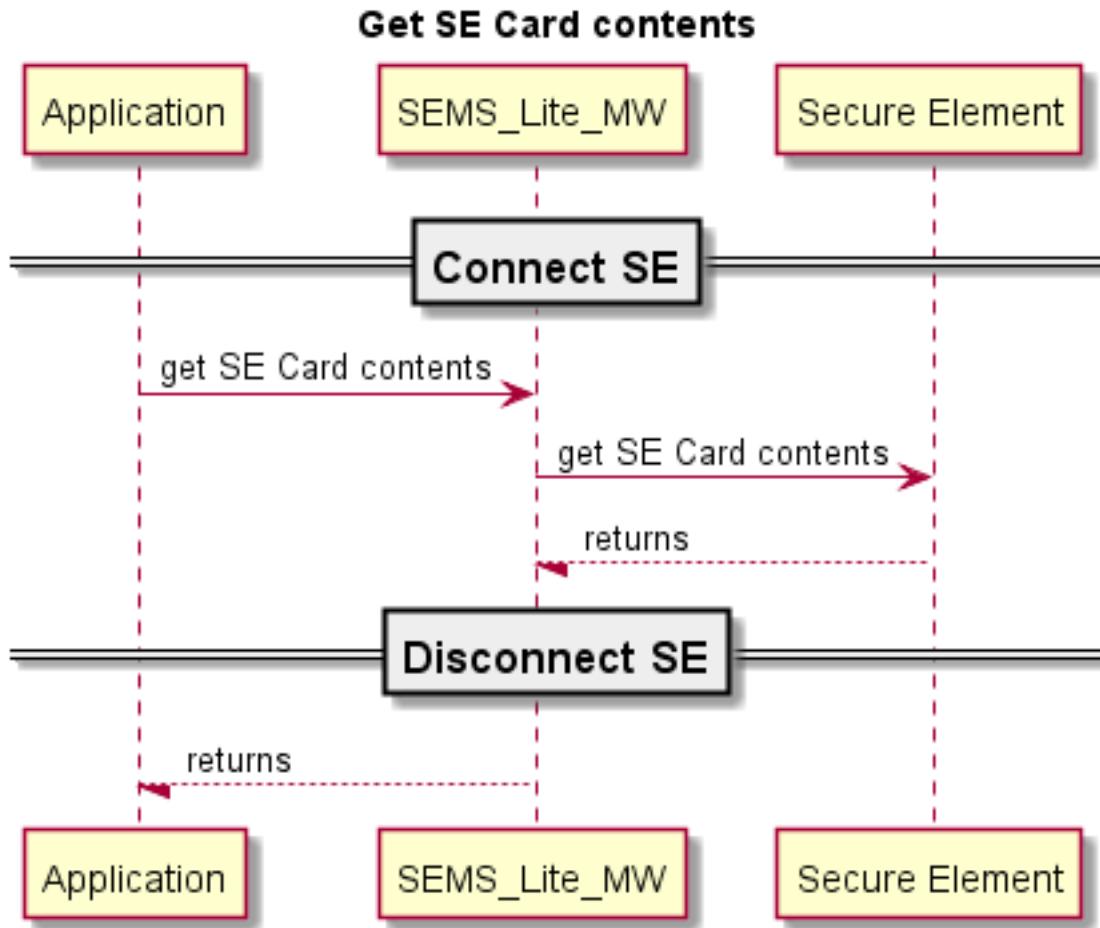


7.5 SEMS Lite Agent Package Load Process

When SE update package is loaded to SEMS Lite agent, SEMS Lite agent executes following steps to load package (offline) to the SE.


1. Check if target entity ID match.
2. Check tear status which indicate if last load operation succeed. If not, SEMS Lite agent will indicate user to re-run the tear script.
3. Check if recovery has started and record flag accordingly. This flag is used later in error code handling.
4. Check if meet minimum previous version and version request.
5. Decode the protobuf stream to find valid SEMS Lite agent package.
6. If the package includes host command, take relative actions (reset SE, etc).
7. If the package includes APDU command, send the APDU command to SE.
8. Get the status word from SE. Tranlate the status word to customer friendly return value.
9. Check tear status which indicate if this load operation succeed. If not, SEMS Lite agent will indicate user to re-run the tear script.

Refer to following flowchart for detail:


- Flowchart Part 1:

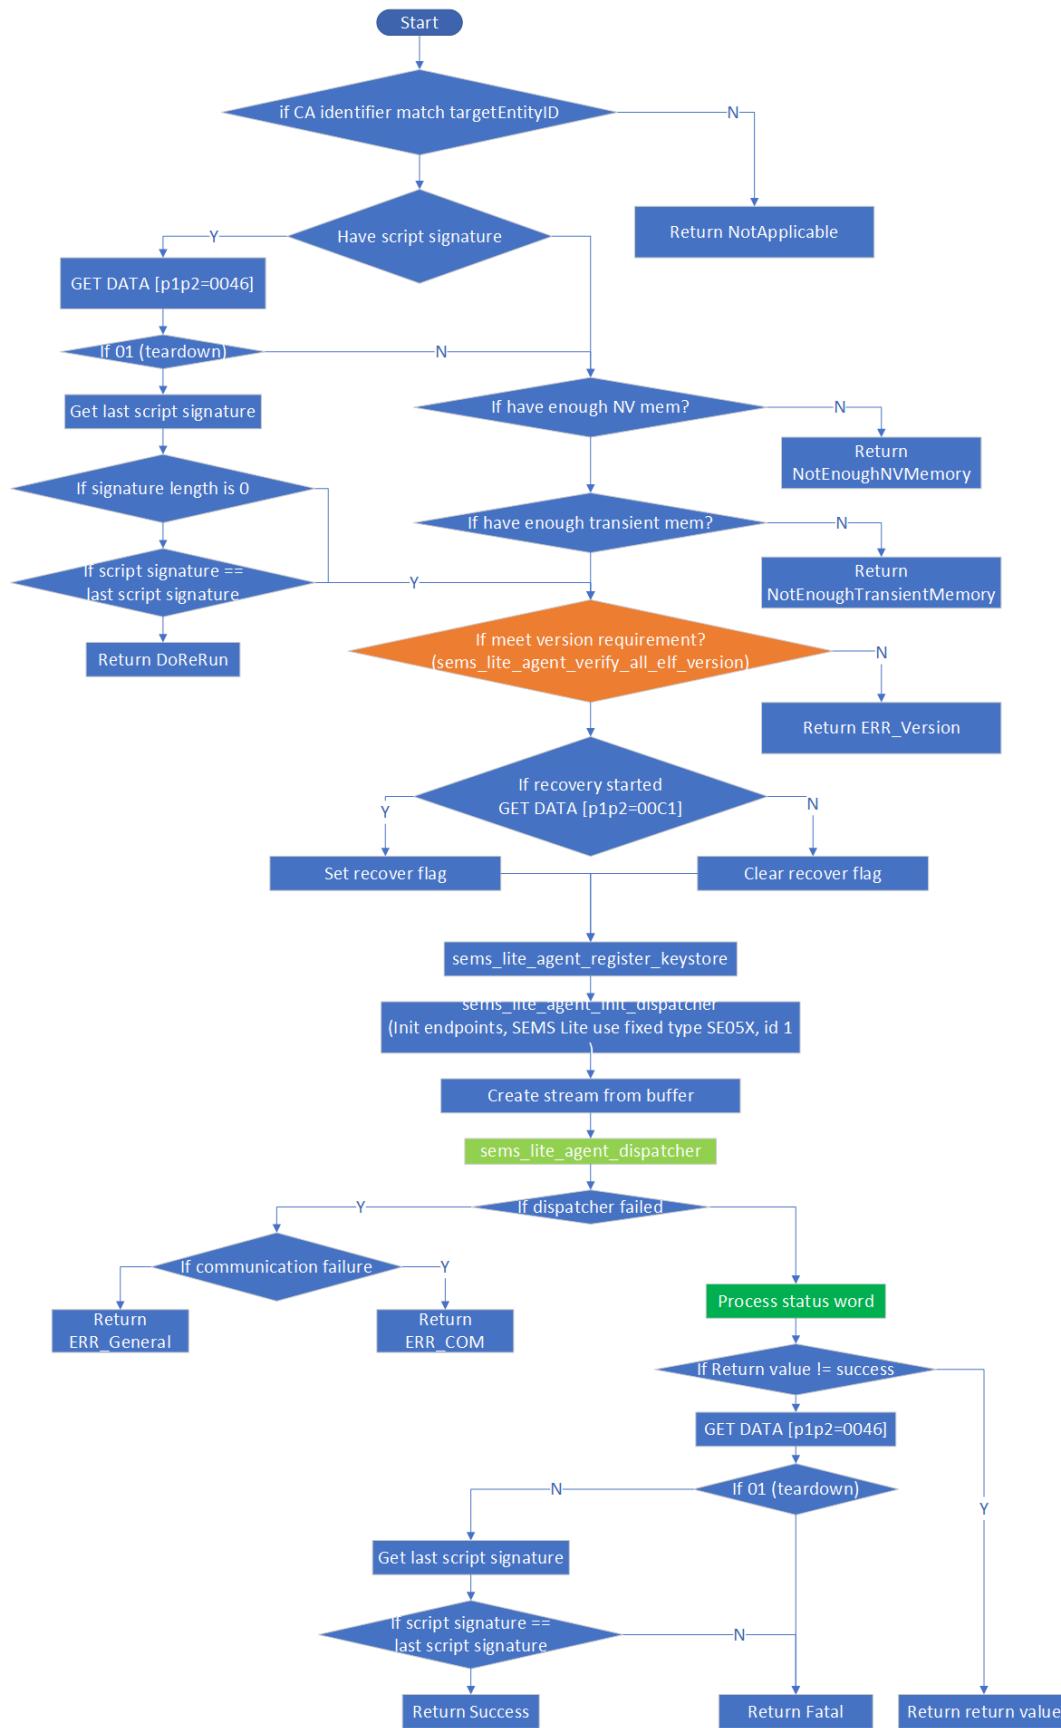


- Flowchart Part 2:

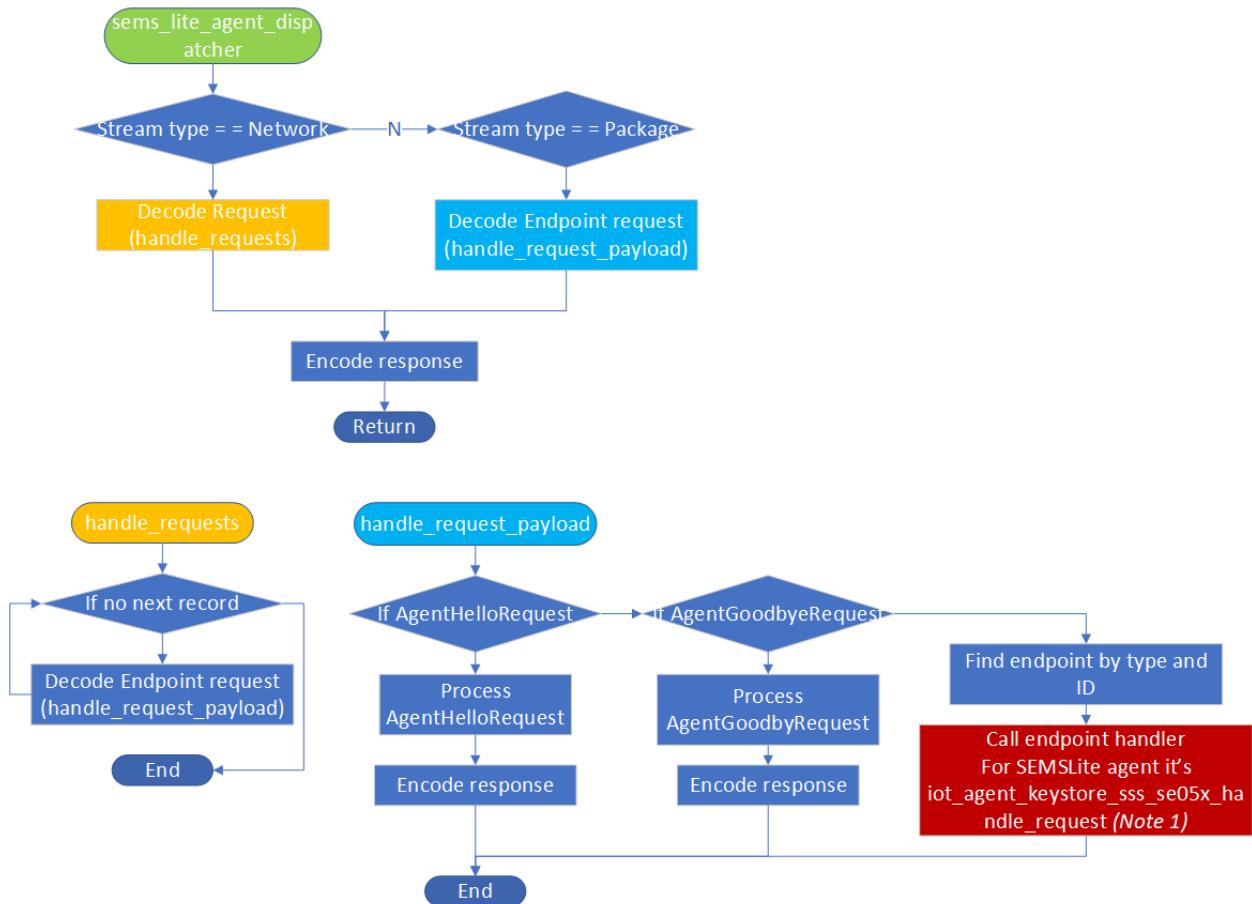


- Flowchart Part 3:

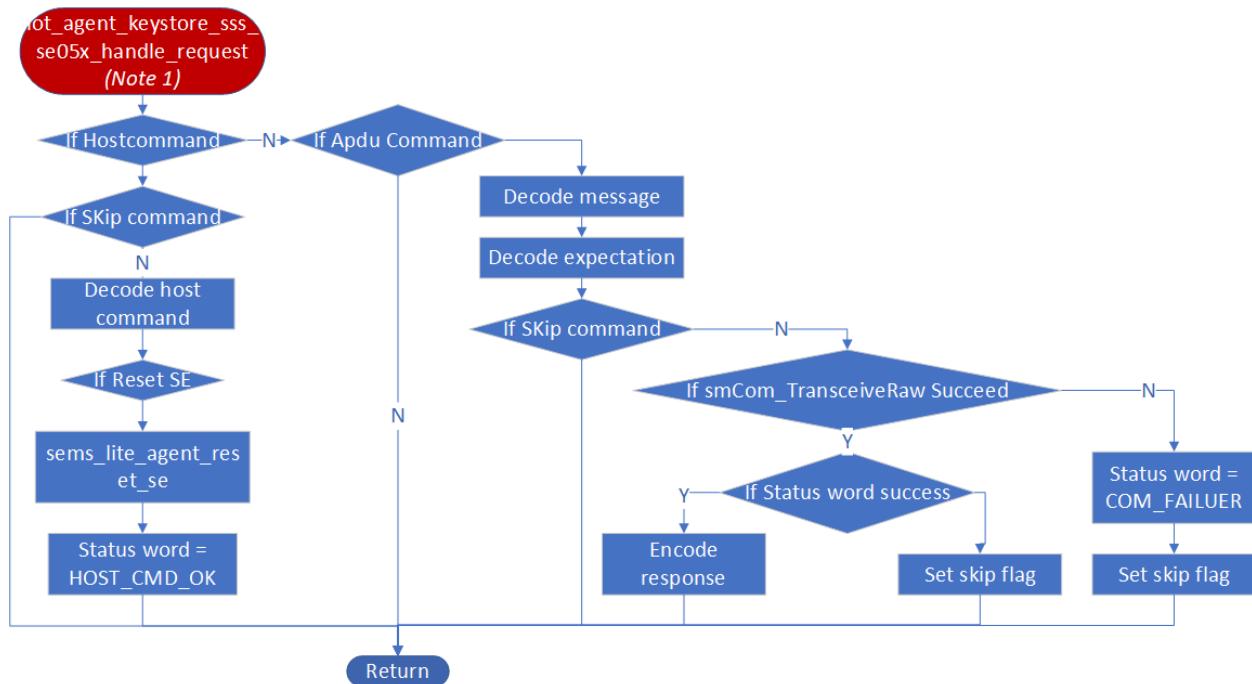

- Flowchart Part 4:

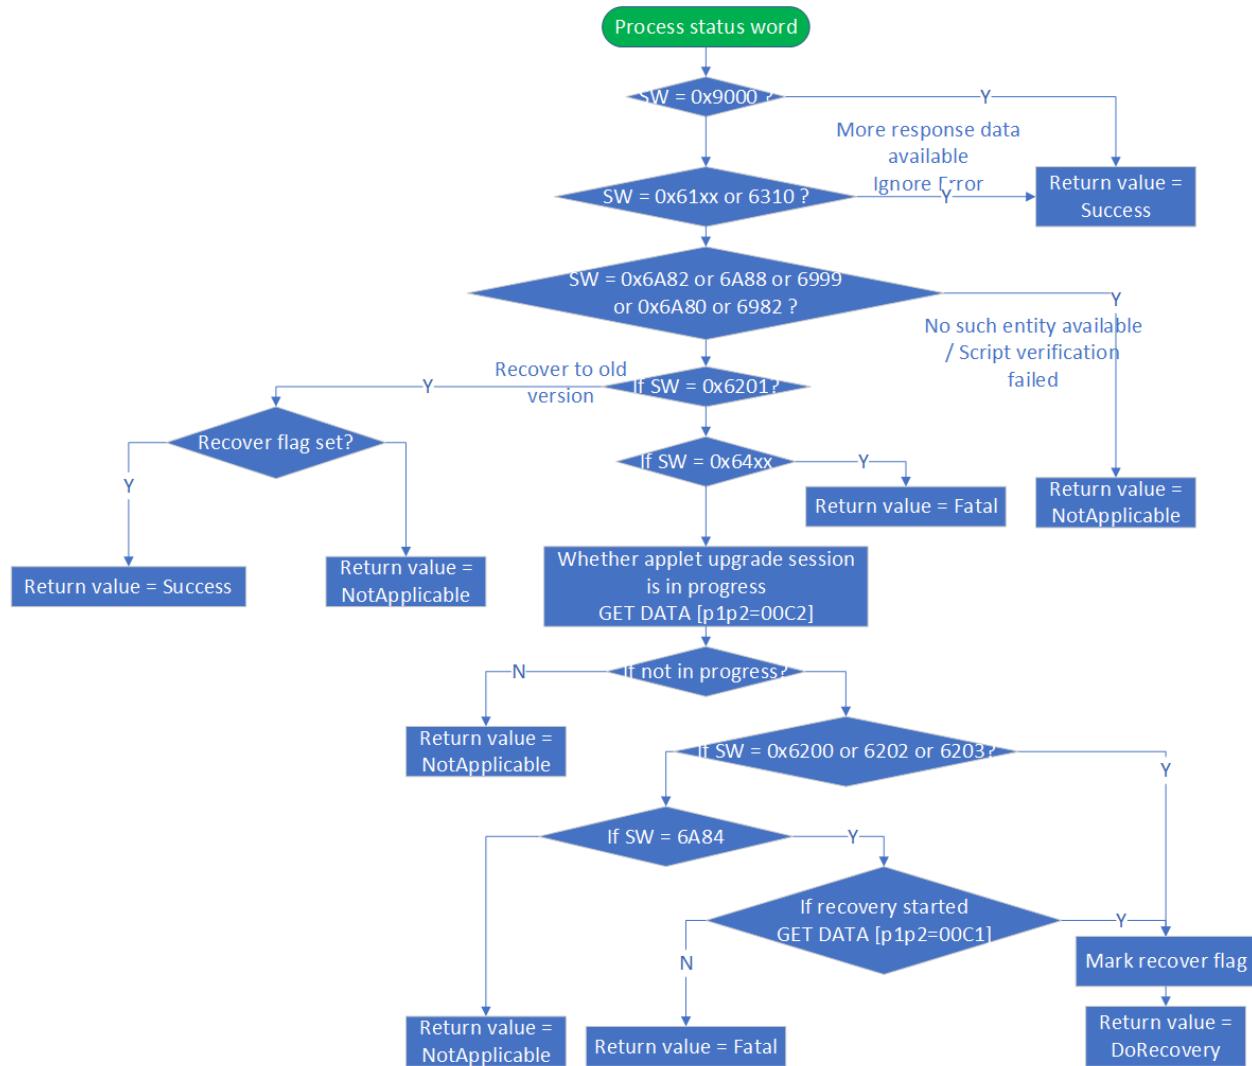

- Flowchart Part 5:

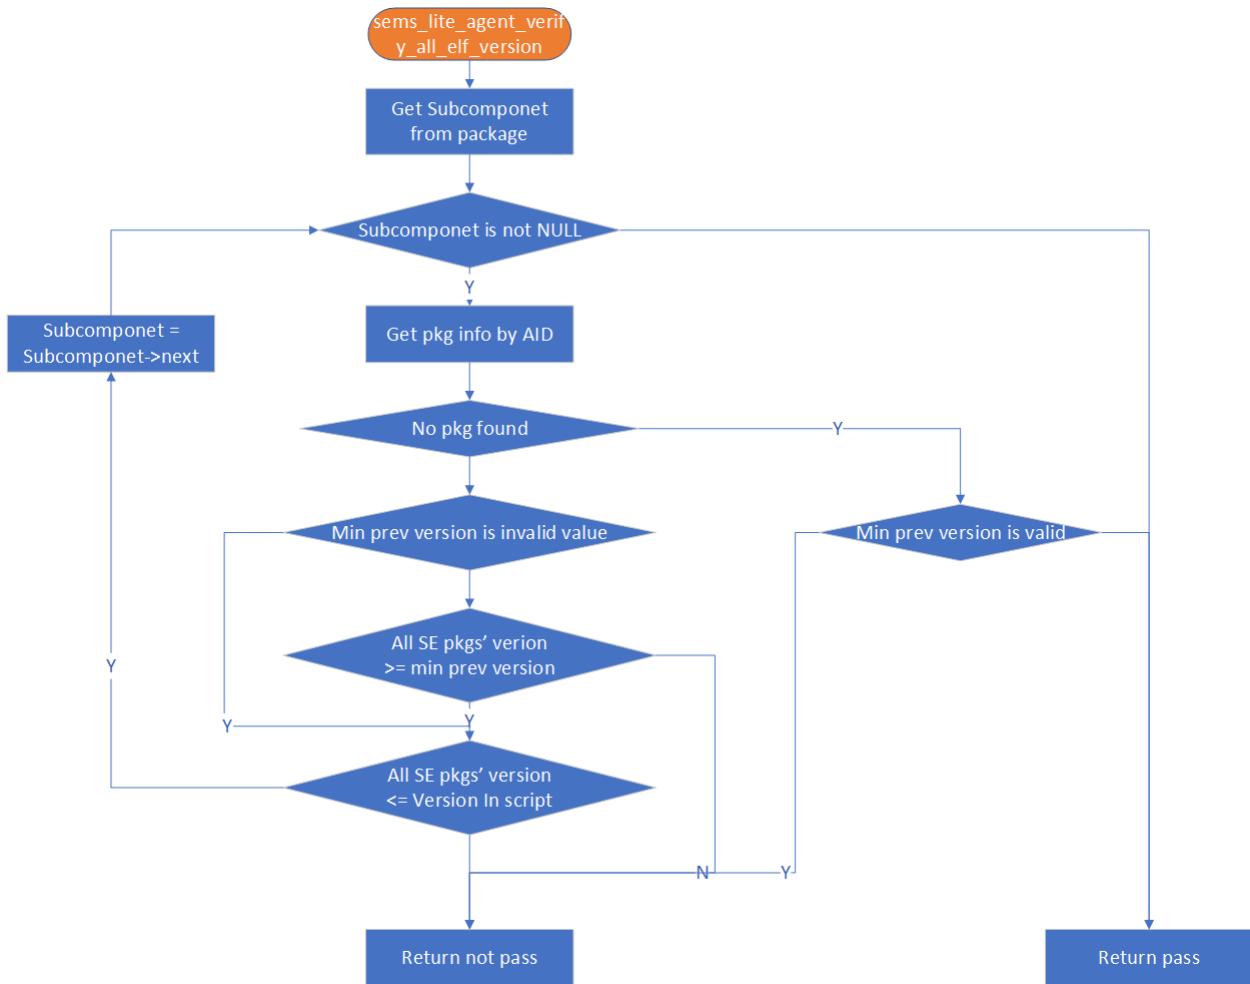

Note 1: SEMS Lite agent and iot hub module share protobuf stream processing function. In this function, several keystore endpoints could attach to the dispatcher. But in SEMS Lite agent case, there is only one keystore endpoint which is sems lite agent.

7.6 APIs

group sems_lite_agent
API to load an available update package on the SE.

Typedefs

typedef *sems_lite_SEAppInfoList_t* **sems_lite_PKGInfoList_t**
Same as *sems_lite_SEAppInfoList_t* for list of installed packages

Functions

`sss_status_t sems_lite_agent_init_context (sems_lite_agent_ctx_t *context, sss_session_t *boot_ctx)`

Initialize SEMS Lite agent context.

This function is used to initialize SEMS Lite agent context.

Return Status of the operation

Parameters

- `context`: Pointer to sems lite agent context.
- `boot_ctx`: Pointer to sss session context

Return Value

- `kStatus_SEMS_Lite_Success`: The operation has completed successfully.
- `kStatus_SEMS_Lite_ERR_General`: The operation has failed.

`sems_lite_status_t sems_lite_agent_load_package (sems_lite_agent_ctx_t *context, multicast_package_t *multiPkgBuf)`

Load Applet package.

This function load an available update package on the SE and assure the tearing safe update of the SE.

Return Status of the operation

Note More return codes would be added to request host to either retry or install older package.

Parameters

- `context`: Pointer to sems lite agent context.
- `pkgBuf`: Pointer to package. It must follow the format defined in `multicast_package_t`.

Return Value

- `kStatus_SEMS_Lite_Success`: The operation has completed successfully.
- `kStatus_SEMS_Lite_ERR_COM`: Communication to SE failed.
- `kStatus_SEMS_Lite_ERR_DoReRun`: Update not completed please provide update package again.
- `kStatus_SEMS_Lite_ERR_NotApplicable`: Update not applicable on this Chip/type.
- `kStatus_SEMS_Lite_ERR_DoRecovery`: Update can not be completed. Please provide recovery package, to roll back to last working version.
- `kStatus_SEMS_Lite_ERR_Fatal`: Unresolvable error. (This category of errors can only appear in testing of an update package, in the case of NXP updates this is testes before by NXP)
- `kStatus_SEMS_Lite_ERR_NotEnoughNVMemory`: Don't have has enough NV memory for the SEMS Lite Script.
- `kStatus_SEMS_Lite_ERR_NotEnoughTransientMemory`: Don't have enough transient memory for the SEMS Lite Script .

`sss_status_t sems_lite_agent_session_close (sems_lite_agent_ctx_t *context)`

Close the connection to SEMS Lite Applet.

Return The api status.

Parameters

- context: The context

Return Value

- *kStatus_SEMS_Lite_Success*: Could close connection 1.
- *kStatus_SEMS_Lite_ERR_General*: Could not close connection 1.

`sss_status_t sems_lite_agent_session_open (sems_lite_agent_ctx_t *context)`
Open a Physical connection to SEMS Lite Applet.

Calling this API opens Local Connection 1 and selects the SEMS Lite applet.

Return The api status.

Parameters

- context: SEMS Lite Agent Context

Return Value

- *kStatus_SEMS_Lite_Success*: Could connect to SEMS Lite Applet.
- *kStatus_SEMS_Lite_ERR_General*: Could not connect to SEMS Lite Applet.

`sss_status_t sems_lite_check_AppletRecoveryStatus (sems_lite_agent_ctx_t *pContext, sems_lite_recovery_status_t *pRecoveryStatus)`

Check Applet Recovery Status.

This API will return the status of applet recovery status

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRecoveryStatus: Pointer to recovery status.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

`sss_status_t sems_lite_check_AppletUpgradeProgress (sems_lite_agent_ctx_t *pContext, sems_lite_upgradeProgress_status_t *pUpgradeStatus)`

Check Applet Upgrade Progress.

This API will return the status of applet upgrade progress status

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pUpgradeStatus: Pointer to upgrade status.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

`sss_status_t sems_lite_check_Tear (sems_lite_agent_ctx_t *pContext, sems_lite_teardown_status_t *pTearStatus)`

Check Tear during script execution.

This API will check whether there was tear during script execution

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pTearStatus: Pointer to tear status.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

`sss_status_t sems_lite_get_AgentVersion (uint8_t *pRspBuf, size_t *pRspBufLen)`

Get the SEMS Lite Agent version.

This API will return the SEMS Lite Agent Version no.

Return Status of the operation

Parameters

- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

`sss_status_t sems_lite_get_AppletVersion (sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf, size_t *pRspBufLen)`

Get the Applet version.

This API will return the SEMS Lite Applet Version no.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

`sss_status_t sems_lite_get_available_mem (sems_lite_agent_ctx_t *pContext, uint8_t *pAvailableMem)`

{ function_description }

Return The sss status.

Parameters

- context: The context
- pAvailableMem: Available Memory Space Information

`sss_status_t sems_lite_get_CA_identifier (sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf, size_t *pRspBufLen)`

Get the CA Identifier.

This API will return the CA Identifier.

Return Status of the operation**Parameters**

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

`sss_status_t sems_lite_get_ENCIdentifier (sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf, size_t *pRspBufLen)`

Get the ENC Identifier.

This API will return the ENC Identifier.

Return Status of the operation**Parameters**

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

`sss_status_t sems_lite_get_FIPS_EC_parameter_type (sems_lite_agent_ctx_t *pContext, uint8_t *pParamType)`

Get Configured EC domain parameter type.

This API will return Configured EC domain parameter type

Return Status of the operation**Parameters**

- pContext: Pointer to sems lite agent context.
- pParamType: Pointer to parameter type.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.

- *kStatus_SSS_Fail*: The operation has failed.

`sss_status_t sems_lite_get_FIPS_info (sems_lite_agent_ctx_t *pContext, uint8_t *pFIPSInfo)`
Get Configured FIPS Information.

This API will return Configured FIPS Information

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pFIPSInfo: Pointer to FIPS Info.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

`sss_status_t sems_lite_get_Publickey (sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf, size_t *pRspBufLen)`

Read Public Key.

This API will read root certificates public key of the device.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

`sss_status_t sems_lite_get_SEAppInfo (sems_lite_agent_ctx_t *pContext, const uint8_t *searchAID, uint8_t searchAidLen, sems_lite_SEAppInfoList_t *pAppInfo, size_t *pAppInfoLen)`

Low level API to get App INFO from the SE according to format mentioned in - Table 11-36: GlobalPlatform Registry Data (TLV), GPCardSpc_v2.2.pdf.

This API will read the currently present Applications ELF/ELM AIDs and versions as well as the present instances from the SE.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- [in] searchAID: The search aid
- [in] searchAidLen: The search aid length
- pAppInfo: Parsed structures
- [inout] pAppInfoLen: Length of parsed structures.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

```
sss_status_t sems_lite_get_SEAppInfoRAW(sems_lite_agent_ctx_t *pContext, const uint8_t *searchAID, uint8_t searchAidLen, uint8_t *pRspBuf, size_t *pRspBufLen)
```

Low level API to get Raw App INFO from the SE.

This API will read the currently present Applications ELF/ELM AIDs and versions as well as the present instances from the SE.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- [out] pRspBuf: Pointer to response Buffer.
- [in] searchAID: The search aid
- [in] searchAidLen: The search aid length
- [inout] pRspBufLen: Pointer to length of the response Buffer.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

```
sss_status_t sems_lite_get_SEPkgInfo(sems_lite_agent_ctx_t *pContext, const uint8_t *searchAID, uint8_t searchAidLen, sems_lite_SEAppInfoList_t *pAppInfo, size_t *pAppInfoLen)
```

Low level API to get PKG INFO from the SE according to format mentioned in - Table 11-36: GlobalPlatform Registry Data (TLV), GPCardSpc_v2.2.pdf.

This API will read the currently present Applications ELF/ELM AIDs and versions as well as the present instances from the SE.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- [in] searchAID: The search aid
- [in] searchAidLen: The search aid length
- pAppInfo: Parsed structures
- [inout] pAppInfoLen: Length of parsed structures.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

```
sss_status_t sems_lite_get_SEPkgInfoRAW(sems_lite_agent_ctx_t *pContext, const uint8_t
                                         *searchAID, uint8_t searchAidLen, uint8_t *pRsp-
                                         Buf, size_t *pRspBufLen)
```

Low level API to get RAW PKG INFO from the SE.

This API will read the currently present Applications ELF/ELM AIDs and versions as well as the present instances from the SE.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- [in] searchAID: The search aid
- [in] searchAidLen: The search aid length
- [out] pRspBuf: Pointer to response Buffer.
- [inout] pRspBufLen: Pointer to length of the response Buffer.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

```
sss_status_t sems_lite_get_SignatureofLastScript(sems_lite_agent_ctx_t *pContext,
                                                uint8_t *pRspBuf, size_t *pRspBu-
                                                fLen)
```

Get the signature of last executed script.

This API will called in case there is tear down

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

```
sss_status_t sems_lite_get_UUID(sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf, size_t
                                *pRspBufLen)
```

Retrieve UUID from SE.

This API read UUID of the SE.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

```
struct multicast_package_t
```

Public Members

```
size_t multicastCommandsLen
size_t multicastPackageNameLen
uint8_t multicastPackageVersion[2]
const uint8_t *pMulticastCommands
const char *pMulticastPackageName
const uint8_t *pSignatureOverCommands
const sub_component_metaData_t *pSubComponentMetaData
uint32_t requiredFreeBytesNonVolatileMemory
uint32_t requiredFreeBytesTransientMemory
uint32_t semsLiteAPIVersion
size_t signatureOverCommandsLen
uint8_t target12Nc[6]
uint8_t targetEntityID[16]
```

```
struct sems_lite_available_mem_t
```

Public Members

```
uint32_t availableCODMemory
uint32_t availableCORMemory
uint32_t availableIDX
uint32_t availablePersistentMemory
uint32_t freePHeapCentralGap
uint32_t freeTransient
```

```
struct sems_lite_SEAppInfoList_t
#include <sems_lite_api.h> Information of about Applet/Package
```

See Table 11-36: GlobalPlatform Registry Data (TLV), GPCardSpc_v2.2.pdf

The response from Applet is put to rspBuf

After parsing that response, the pointers to respective members is set and it points to relevant part in rspBuf, this way saving memory. However, the Length is updated so that application use this information.

Public Members

```
uint8_t AIDLen
Length of the Applet ID

uint8_t LifeCycleState
Life-cycle state

uint8_t LoadFileAIDLen
Length of LoadFileAID.

uint8_t LoadFileVersionNumberLen
Length of pLoadFileVersionNumber.

uint8_t *pAID
Applet ID

uint8_t *pLoadFileAID
Application's Executable Load File AID.

uint8_t *pLoadFileVersionNumber
Executable Load File Version Number.

uint8_t *pPrivileges
Privileges.

uint8_t PrivilegesLen
Length of Privileges

uint8_t *pSecurityDomainAID
Associated Security Domain's AID.

uint8_t rspBuf[(256 + 5)]
Response from Applet.

size_t rspBufLen
Length of response from Applet.

uint8_t SecurityDomainAIDLen
Length of SecurityDomainAID.

struct sub_component_metaData_t
```

Public Members

```
size_t aidLen
uint8_t minimumPreviousVersion[2]

size_t nameLen

const uint8_t *pAid
char *pName

struct _sub_component_metaData_t *pNextSubComponentMetaData

uint8_t version[2]
```

7.7 SEMS Lite Known Issue

7.7.1 Signature for rerun script is incorrect occasionally

- Issue description: In case of tear (e.g. unexpected power off when upgrading SE), when user tries to load new script, SEMS Lite agent will only allow the re-run script. This script should be the one that is interrupted. But in special case of very early tearing, SEMS Lite agent may expect the user to re-run the script that's already existed in SE before upgrade start.
- Issue workaround: Using `sems_lite_get_SignatureofLastScript()` to get the signature of the expected script. Find the script and load it.

7.8 SEMS Lite DEMOs

The DEMOs applicable to SEMS Lite are listed at [Section 5.1.1 SEMS Demos](#)

PLUGINS / ADD-INS

Plugins / Add-ins for other platforms

8.1 Introduction on OpenSSL engine

Starting with OpenSSL 0.9.6 an ‘Engine interface’ was added to OpenSSL allowing support for alternative cryptographic implementations. This Engine interface can be used to interface with external crypto devices. The key injection process is secure module specific and is not covered by the Engine interface.

Depending on the capabilities of the attached secure element (e.g. SE050_C, A71CH, ...) the following functionality can be made available over the OpenSSL Engine interface:

- EC crypto
 - EC sign/verify
 - ECDH compute key
 - Montgomery ECDH
- RSA crypto
 - RSA sign/verify
 - RSA priv_key_decrypt/pub_key_encrypt
- Fetching random data

8.1.1 General

OpenSSL versions

The OpenSSL Engine is compatible with OpenSSL versions 1.0.2 or 1.1.1.

OpenSSL Configuration file

It's possible to add OpenSSL engine specific extensions to the OpenSSL configuration file. Using these extensions one can control whether the supported crypto functionality is delegated to the Secure Element or whether it is handled by the OpenSSL SW implementation.

The actual contents of the configuration file depends on the OpenSSL version and the attached secure element (SE050 or A71CH). The `demos/linux/common` folder of this SW package contains 4 reference configuration files covering both SE050 and A71CH for the two supported OpenSSL versions.

The following configuration file fragment (extracted from `openssl111_sss_se050.cnf`) highlights the required changes to enable the full functionality of the SE050_C OpenSSL Engine on an iMX Linux system:

```
...
# System default
openssl_conf = nxp_engine
...

...
[nxp_engine]
engines = engine_section

[engine_section]
e4sss_se050 = e4sss_se050_section

[e4sss_se050_section]
engine_id = e4sss
dynamic_path = /usr/local/lib/libsss_engine.so
init = 1
default_algorithms = RAND,RSA,EC
```

One overrules the default OpenSSL configuration file by setting the environment variable `OPENSSL_CONF` to the path of the custom configuration file.

Platforms

The OpenSSL engine can be used on iMX boards (running Linux) or on Raspberry Pi (running Raspbian).

8.1.2 Keys

Key Management

The cryptographic functionality offered by the OpenSSL engine requires a reference to a key stored inside the Secure Element (exception is RAND_Method). These keys are typically inserted into the Secure Element in a secured environment during production.

OpenSSL requires a key pair, consisting of a private and a public key, to be loaded before the cryptographic operations can be executed. This creates a challenge when OpenSSL is used in combination with a secure element as the private key cannot be extracted out from the Secure Element.

The solution is to populate the OpenSSL Key data structure with only a reference to the Private Key inside the Secure Element instead of the actual Private Key. The public key as read from the Secure Element can still be inserted into the key structure.

OpenSSL crypto API's are then invoked with these data structure objects as parameters. When the crypto API is routed to the Engine, the OpenSSL engine implementation decodes these key references and invokes the SSS API with correct Key references for a cryptographic operation.

EC Reference key format

The following provides an example of an EC reference key. The value reserved for the private key has been used to contain:

- a pattern of 0x10..00 to fill up the datastructure MSB side to the desired key length
- a 32 bit key identifier (in the example below 0x7DCCBBAA)
- a 64 bit magic number (always 0xA5A6B5B6A5A6B5B6)
- a byte to describe the key class (0x10 for Key pair and 0x20 for Public key)
- a byte to describe the key index (use a reserved value 0x00)

```
Private-Key: (256 bit)
priv:
    10:00:00:00:00:00:00:00:00:00:00:00:00:00:00:00:
    00:00:00:7D:CC:BB:AA:A5:A6:B5:B6:A5:A6:B5:B6:
    kk:ii
pub:
    04:1C:93:08:8B:26:27:BA:EA:03:D1:BE:DB:1B:DF:
    8E:CC:87:EF:95:D2:9D:FC:FC:3A:82:6F:C6:E1:70:
    A0:50:D4:B7:1F:F2:A3:EC:F8:92:17:41:60:48:74:
    F2:DB:3D:B4:BC:2B:F8:FA:E8:54:72:F6:72:74:8C:
    9E:5F:D3:D6:D4
ASN1 OID: prime256v1
```

Note:

- The key identifier 0x7DCCBBAA (stored in big-endian convention) is in front of the magic number 0xA5A6B5B6A5A6B5B6
 - The padding of the private key value and the magic number make it unlikely a normal private key value matches a reference key.
 - Ensure the value reserved for public key and ASN1 OID contain the values matching the stored key.
-

Note:

- For EC montgomery curves, openssl allows only the private key to be set. So the reference key created will not have the valid public key.
-

RSA Reference key format

The following provides an example of an RSA reference key.

- The value reserved for ‘p’ (aka ‘prime1’) is used as a magic number and is set to ‘1’
- The value reserved for ‘q’ (aka ‘prime2’) is used to store the 32 bit key identifier (in the example below 0x6DCCBB11)
- The value reserved for ‘(inverse of q) mod p’ (aka ‘IQMP’ or ‘coefficient’) is used to store the magic number 0xA5A6B5B6

```
Private-Key: (2048 bit)
modulus:
    00:b5:48:67:f8:84:ca:51:ac:a0:fb:d8:e0:c9:a7:
    72:2a:bc:cb:bc:93:3a:18:6a:0f:a1:ae:d4:73:e6:
    ...
publicExponent: 65537 (0x10001)
privateExponent:
    58:7a:24:39:90:f4:13:ff:bf:2c:00:11:eb:f5:38:
    b1:77:dd:3a:54:3c:f0:d5:27:35:0b:ab:8d:94:93:
    ...
prime1: 1 (0x1)
prime2: 1842133777(0x6DCCBB11)
exponent1:
    00:c1:c9:0a:cc:9f:1a:c5:1c:53:e6:c1:3f:ab:09:
    db:fb:20:04:38:2a:26:d5:71:33:cd:17:a0:94:bd:
    ...
exponent2:
    24:95:f0:0b:b0:78:a9:d9:f6:5c:4c:e0:67:d8:89:
    c1:eb:df:43:54:74:a0:1c:43:e3:6f:d5:97:88:55:
    ...
coefficient: 2779166134 (0xA5A6B5B6)
```

Note:

- Ensure keylength, the value reserved for (private key) modulus and public exponent match the stored key.
 - The mathematical relation between the different key components is not preserved.
 - Setting prime1 to ‘1’ makes it impossible that a normal private key matches a reference key.
-

8.1.3 Building the OpenSSL engine

The cmake build system will create an OpenSSL engine for supported platforms. The resulting OpenSSL engine will be copied to the SW tree in directory simw-top/sss/plugin/openssl/bin.

A subsequent make install will copy the OpenSSL engine to a standard directory on the file system, in case of iMX Linux e.g. /usr/local/lib.

Note: Ensure the following flag is defined when building an application that will be linked against the engine:
-DOPENSSL_LOAD_CONF

8.1.4 Sample scripts to demo OpenSSL Engine

The directory simw-top/sss/plugin/openssl/scripts contains a set of python scripts. These scripts use the OpenSSL Engine in the context of standard OpenSSL utilities. They illustrate using the OpenSSL Engine for fetching random data, EC or RSA crypto operations. The scripts that illustrate EC or RSA crypto operations depend on prior provisioning of the secure element.

As an example, the following set of commands first creates and provisions EC key material. Then it invokes the OpenSSL Engine for ECDSA sign / verify operations and ECDH calculations. It assumes an SE050 is connected via I2C to an iMX6UL-EVK board:

```
python3 openssl_provisionEC.py --key_type prime256v1
python3 openssl_EccSign.py --key_type prime256v1
python3 openssl_Ecdh.py --key_type prime256v1
```

Further details on using these scripts can be found in the following:

openssl_rnd.py

usage: openssl_rnd.py [-h] [-connection_data CONNECTION_DATA]

Generate few random numbers from the attached secure element.

optional arguments:

- h, --help show this help message and exit
- connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

Example invocation:

```
python openssl_rnd.py --connection_data 127.0.0.1:8050
```

openssl_provisionEC.py

usage: openssl_provisionEC.py [-h] --key_type KEY_TYPE [-connection_type CONNECTION_TYPE] [-connection_data CONNECTION_DATA] [-subsystem SUBSYSTEM] [-auth_type AUTH_TYPE] [-scpkey SCP-KEY]

Provision attached secure element with EC keys

This example generates a complete set of ECC key files (*.pem) (existing ones overwritten). Performs debug reset the attached secure element. Attached secure element provisioned with EC key. Creates reference key from the injected EC key.

optional arguments:

- h, --help show this help message and exit

required arguments:

- key_type KEY_TYPE Supported key types => prime192v1, secp224r1, prime256v1, secp384r1, secp521r1, brainpoolP160r1, brainpoolP192r1, brainpoolP224r1, brainpoolP256r1, brainpoolP320r1, brainpoolP384r1, brainpoolP512r1, secp160k1, secp192k1, secp224k1, secp256k1

optional arguments:

```
--connection_type CONNECTION_TYPE Supported connection types => t1oi2c, sci2c,
vcom, jrcpv1, jrcpv2, pcsc. Default: t1oi2c
--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.
0.0.1:8050, none. Default: none
--subsystem SUBSYSTEM Supported subsystem => se050, a71ch, mbedtls. Default:
se050
--auth_type AUTH_TYPE Supported subsystem => None, PlatformSCP, UserID,
ECKey, AESKey. Default: None
-scpkey SCPKEY
```

Example invocation:

```
python openssl_provisionEC.py --key_type prime256v1
python openssl_provisionEC.py --key_type prime256v1 --connection_data 169.254.0.1:8050
python openssl_provisionEC.py --key_type secp224k1 --connection_type jrcpv2 --
connection_data 127.0.0.1:8050
python openssl_provisionEC.py --key_type brainpoolP256r1 --connection_data COM3
python openssl_provisionEC.py --key_type prime256v1 --subsystem a71ch
```

openssl_EccSign.py

usage: openssl_EccSign.py [-h] --key_type KEY_TYPE [-connection_data CONNECTION_DATA] [-disable_sha1 DISABLE_SHA1]

Validation of Sign Verify with OpenSSL engine using EC Keys

This example showcases sign using reference key, then verify using openssl and vice versa.

Precondition:

- Inject keys using openssl_provisionEC.py.

optional arguments:

-h, --help show this help message and exit

required arguments:

--key_type KEY_TYPE Supported key types => prime192v1, secp224r1,
prime256v1, secp384r1, secp521r1, brainpoolP160r1,
brainpoolP192r1, brainpoolP224r1, brainpoolP256r1,
brainpoolP320r1, brainpoolP384r1, brainpoolP512r1,
secp160k1, secp192k1, secp224k1, secp256k1

optional arguments:

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.
0.0.1:8050, none. Default: none

--disable_sha1 DISABLE_SHA1 Parameter to disable SHA1 => eg. True, False. Default:
False

Example invocation:

```
python openssl_EccSign.py --key_type prime256v1
python openssl_EccSign.py --key_type secp160k1 --connection_data 127.0.0.1:8050
```

openssl_Ecdh.py

usage: openssl_Ecdh.py [-h] --key_type KEY_TYPE [-connection_data CONNECTION_DATA] [-disable_sha1 DISABLE_SHA1]

Validation of ECDH with OpenSSL engine using EC keys

This example showcases ECDH between openssl engine and openssl.

Precondition:

- Inject keys using openssl_provisionEC.py.

optional arguments:

-h, --help show this help message and exit

required arguments:

--key_type KEY_TYPE Supported key types => prime192v1, secp224r1, prime256v1, secp384r1, secp512r1, brainpoolP160r1, brainpoolP192r1, brainpoolP224r1, brainpoolP256r1, brainpoolP320r1, brainpoolP384r1, brainpoolP512r1, secp160k1, secp192k1, secp224k1, secp256k1

optional arguments:

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

--disable_sha1 DISABLE_SHA1 Parameter to disable SHA1 => eg. True, False. Default: False

Example invocation:

```
python openssl_Ecdh.py --key_type prime256v1
python openssl_Ecdh.py --key_type secp160k1 --connection_data 127.0.0.1:8050
```

ecc_all.py

usage: ecc_all.py [-h] [-connection_type CONNECTION_TYPE] [-connection_data CONNECTION_DATA] [-subsystem SUBSYSTEM] [-auth_type AUTH_TYPE] [-scpkey SCPKEY] [-disable_sha1 DISABLE_SHA1] [-fips FIPS]

Validation of OpenSSL Engine using EC keys

This example injects keys with different supported EC Curves, then showcases ECDH & ECDSA using those keys.

optional arguments:

-h, --help show this help message and exit

--connection_type CONNECTION_TYPE Supported connection types => t1oi2c, sci2c, vcom, jrcpv1, jrcpv2, pcsc. Default: t1oi2c

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

--subsystem SUBSYSTEM Supported subsystem => se050, a71ch. Default: se050

--auth_type AUTH_TYPE Supported subsystem => None, PlatformSCP, UserID, ECKey, AESKey. Default: None

-scpkey SCPKEY -**disable_sha1 DISABLE_SHA1**

Parameter to disable SHA1 => eg. True, False. Default: False

--fips FIPS

FIPS Testing => eg. True, False. Default: False

Example invocation:

```
python ecc_all.py
python ecc_all.py --connection_data 169.254.0.1:8050
python ecc_all.py --connection_data 127.0.0.1:8050 --connection_type jrcpv2
python ecc_all.py --connection_data COM3
```

openssl_provisionRSA.py

usage: openssl_provisionRSA.py [-h] -key_type KEY_TYPE [-connection_type CONNECTION_TYPE] [-connection_data CONNECTION_DATA] [-subsystem SUBSYSTEM] [-auth_type AUTH_TYPE] [-scpkey SCPKEY]

Provision attached secure element with RSA keys

This example generates a complete set of RSA key files (*.pem) (existing ones overwritten). Performs debug reset the attached secure element. Attached secure element provisioned with RSA key. Creates reference key from the injected RSA key.

optional arguments:

-h, --help show this help message and exit

required arguments:

--key_type KEY_TYPE Supported key types => rsa1024, rsa2048, rsa3072, rsa4096

optional arguments:

--connection_type CONNECTION_TYPE Supported connection types => t1oi2c, sci2c, vcom, jrcpv1, jrcpv2, pcsc. Default: t1oi2c

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

--subsystem SUBSYSTEM Supported subsystem => se050, mbedtls. Default: se050

--auth_type AUTH_TYPE Supported subsystem => None, PlatformSCP, UserID, ECKey, AESKey. Default: None

-scpkey SCPKEY

Example invocation:

```
python openssl_provisionRSA.py --key_type rsa1024
python openssl_provisionRSA.py --key_type rsa2048 --connection_data 169.254.0.1:8050
python openssl_provisionRSA.py --key_type rsa2048 --connection_data 127.0.0.1:8050 --connection_type jrcpv2
python openssl_provisionRSA.py --key_type rsa2048 --connection_data COM3
```

openssl_RSA.py

usage: openssl_RSA.py [-h] --key_type KEY_TYPE [-connection_data CONNECTION_DATA] [-disable_sha1 DISABLE_SHA1]

Validation of OpenSSL Engine using RSA keys

This example showcases crypto operations and sign verify operations using RSA keys.

optional arguments:

-h, --help show this help message and exit

required arguments:

--key_type KEY_TYPE Supported key types => rsa1024, rsa2048, rsa3072, rsa4096

optional arguments:

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

--disable_sha1 DISABLE_SHA1 Parameter to disable SHA1 => eg. True, False. Default: False

Example invocation:

```
python openssl_RSA.py --key_type rsa2048
python openssl_RSA.py --key_type rsa4096 --connection_data 127.0.0.1:8050
```

rsa_all.py

usage: rsa_all.py [-h] [-connection_data CONNECTION_DATA] [-connection_type CONNECTION_TYPE] [-subsystem SUBSYSTEM] [-auth_type AUTH_TYPE] [-scpkey SCPKEY] [-disable_sha1 DISABLE_SHA1] [-fips FIPS]

Validation of OpenSSL Engine using RSA keys

This example injects keys with different supported RSA keys, then showcases Crypto & sign verify operations using those keys.

optional arguments:

-h, --help show this help message and exit

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

--connection_type CONNECTION_TYPE Supported connection types => t1oi2c, sci2c, vcom, jrcpv1, jrcpv2, pcsc. Default: t1oi2c

--subsystem SUBSYSTEM Supported subsystem => se050. Default: se050

--auth_type AUTH_TYPE Supported subsystem => None, PlatformSCP, UserID, ECKey, AESKey. Default: None

--scpkey SCPKEY --disable_sha1 DISABLE_SHA1

Parameter to disable SHA1 => eg. True, False. Default: False

--fips FIPS FIPS Testing => eg. True, False. Default: False

Example invocation:

```
python rsa_all.py
python rsa_all.py --connection_data 169.254.0.1:8050
python rsa_all.py --connection_data 127.0.0.1:8050 --connection_type jrcpv2
python rsa_all.py --connection_data COM3
```

openssl_provisionEC_mont.py

usage: **openssl_provisionEC_mont.py [-h] --key_type KEY_TYPE** [-connection_type CONNECTION_TYPE]
[-connection_data CONNECTION_DATA] [-subsystem SUBSYSTEM] [-auth_type AUTH_TYPE] [-scpkey SCPKEY]

Provision attached secure element with EC montgomery keys

This example generates EC montgomery key files (*.pem) (existing ones overwritten). Performs debug reset the attached secure element. Attached secure element provisioned with EC montgomery key. Creates reference key from the injected EC montgomery key.

optional arguments:

-h, --help show this help message and exit

required arguments:

--key_type KEY_TYPE Supported key types => x25519, x448

optional arguments:

--connection_type CONNECTION_TYPE Supported connection types => t1oi2c, sci2c, vcom, jrcpv1, jrcpv2, pcsc. Default: t1oi2c

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

--subsystem SUBSYSTEM Supported subsystem => se050, a71ch, mbedtls. Default: se050

--auth_type AUTH_TYPE Supported subsystem => None, PlatformSCP, UserID, ECKey, AESKey. Default: None

-scpkey SCPKEY

Example invocation:

```
python openssl_provisionEC_mont.py --key_type x25519
python openssl_provisionEC_mont.py --key_type x25519 --connection_data 169.254.0.1:8050
python openssl_provisionEC_mont.py --key_type x448 --connection_type jrcpv2 --
python openssl_provisionEC_mont.py --key_type x448 --connection_data COM3
```

openssl_Ecdh_mont.py

usage: openssl_Ecdh_mont.py [-h] --key_type KEY_TYPE [-connection_data CONNECTION_DATA]

Validation of Montgomery ECDH with OpenSSL engine using EC mont keys

This example showcases montgomery ECDH between openssl engine and openssl.

Precondition:

- Inject keys using openssl_provisionEC_mont.py.

optional arguments:

-h, --help show this help message and exit

required arguments:

--key_type KEY_TYPE Supported key types => x25519, x448

optional arguments:

--connection_data CONNECTION_DATA Parameter to connect to SE => eg. COM3, 127.0.0.1:8050, none. Default: none

Example invocation:

```
python openssl_Ecdh_mont.py --key_type x448
python openssl_Ecdh_mont.py --key_type x25519 --connection_data 127.0.0.1:8050
```

8.2 Introduction on mbedTLS ALT Implementation

MbedTLS ALT implementation allows mbedTLS stack use the secure element access using SSS layer. Crypto operations performed during TLS handshake between client and server are performed using the secure element.

8.2.1 Using mbedTLS ALT

For reference, let's look at the `sss/ex/mbedtls/ex_sss_ssl12.c`. The important sections of the file are.

Here we initialize the keys and relevant objects.

```
/* pex_sss_demo_tls->obj will have the private key handle */
status = sss_key_object_init(&pex_sss_demo_tls->obj, &pCtx->ks);
if (status != kStatus_SSS_Success) {
    printf(" sss_key_object_init for keyPair Failed...\n");
    return kStatus_SSS_Fail;
}

status = sss_key_object_get_handle(&pex_sss_demo_tls->obj, SSS_KEYPAIR_INDEX_
    ↲CLIENT_PRIVATE);
if (status != kStatus_SSS_Success) {
    printf(" sss_key_object_get_handle for keyPair Failed...\n");
    return kStatus_SSS_Fail;
}

/* pex_sss_demo_tls->pub_obj will have the root CA public key */
status = sss_key_object_init(&pex_sss_demo_tls->pub_obj, &pCtx->ks);
```

(continues on next page)

(continued from previous page)

```

if (status != kStatus_SSS_Success) {
    printf(" sss_key_object_init for Pub key Failed...\n");
    return kStatus_SSS_Fail;
}

status = sss_key_object_get_handle(&pex_sss_demo_tls_ctx->pub_obj, SSS_PUBKEY_INDEX_
    ↪CA);
if (status != kStatus_SSS_Success) {
    printf(" sss_key_object_get_handle for extPubkey Failed...\n");
    return kStatus_SSS_Fail;
}

/* pex_sss_demo_tls_ctx->dev_cert will have the our device certificate */
status = sss_key_object_init(&pex_sss_demo_tls_ctx->dev_cert, &pCtx->ks);
if (status != kStatus_SSS_Success) {
    printf(" sss_key_object_init for Pub key Failed...\n");
    return kStatus_SSS_Fail;
}

status = sss_key_object_get_handle(&pex_sss_demo_tls_ctx->dev_cert, SSS_CERTIFICATE_
    ↪INDEX);
if (status != kStatus_SSS_Success) {
    printf(" sss_key_object_get_handle for client Cert Failed...\n");
    return kStatus_SSS_Fail;
}

```

Here, we tell mbedTLS to use the root CA public key from the SE.

```

mbedtls_pk_free(&cacert.pk);
ret = sss_mbedtls_associate_pubkey(&cacert.pk, &pex_sss_demo_tls_ctx->pub_obj);

```

Here, get certificate in DER format from the SE, and then convert it to PEM and share it with the mbedTLS stack.

```

size_t KeyBitLen = SIZE_CLIENT_CERTIFICATE * 8;
size_t KeyByteLen = SIZE_CLIENT_CERTIFICATE;

ret_code = sss_key_store_get_key(
    &pCtx->ks, &pex_sss_demo_tls_ctx->dev_cert, aclient_cer, &KeyByteLen, &KeyBitLen);

ret = mbedtls_x509_crt_parse_der(&clicert,
    (const unsigned char *)aclient_cer,
    sizeof(aclient_cer));
if ((ret_code == kStatus_SSS_Success) && (ret == 0)) {
    client_certificate_loaded = 1;
}

```

Here, we tell mbedTLS to use the device private key from the SE, generally for signing any contents.

```

sss_mbedtls_associate_keypair(&pkey, &pex_sss_demo_tls_ctx->obj);

```

Here, we tell mbedTLS to use the private key from the SE for ECDH handshake.

```

sss_mbedtls_associate_ecdhctx(ssl.handshake, &pex_sss_demo_tls_ctx->obj, &pCtx->host_
    ↪ks);

```

8.2.2 Testing

Building mbedTLS SSL/DTLS server for testing

Build mbedTLS server using the VS solution: CMake configurations: - RTOS_Default: ON - WithHostCryptoMBEDTLS: ON - Withmbedtls_ALT_SSS: ON

- Project: mbedtls_ex_orig_ssl_server2 / mbedtls_ex_orig_dtls_server

Building mbedTLS SSL/DTLS client (with SSS-APIs integration)

Build mbedTLS client using the VS solution: CMake configurations: - RTOS_Default: ON - WithHostCryptoMBEDTLS: ON - Withmbedtls_ALT_SSS: ON

- Project: mbedtls_ex_sss_ssl2_client / mbedtls_ex_sss_dtls_client

Testings mbedTLS ALT

Directory simw-top\sss\plugin\mbedtls\scripts contains test scripts for starting mbedTLS server and client applications with different cipher suites. Before executing some test scripts, the secure element must first be provisioned.

- 1) Complete [Section 9.3 Steps needed before running ssscli tool](#)
- 2) Provision secure element using python scripts in directory simw-top\sss\plugin\mbedtls\scripts. Run the following commands in virtual environment:

To provision secure element for ECC python3 create_and_provision_ecc_keys.py
 <keyType> <connection_type> <connection_string> <iot_se (optional. Default - se050)> <auth (optional. Default - None)> <auth_key>

To configure secure element for RSA python3 create_and_provision_rsa_keys.py
 <keyType> <connection_type> <connection_string> <auth (optional. Default - None)> <auth_key>

To see possible values of input arguments, run without any parameters create_and_provision_ecc_keys.py . or create_and_provision_rsa_keys.py

Note: Once provisioning is done the virtual environment is not needed anymore.

- 3) Starting mbedTLS SSL client and server applications:

```
python3 start_ssl2_server.py <ec_curve>/<rsa_type>
python3 start_ssl2_client.py <ec_curve>/<rsa_type> <cipher suite> <connection_string>
```

- 4) Starting mbedTLS DTLS client and server applications:

```
python3 start_dtls_server.py <ec_curve>/<rsa_type>
python3 start_dtls_client.py <ec_curve>/<rsa_type> <cipher suite> <connection_string>
```

Note: Ensure that ec_curve/rsa_type used in server and client applications is the same as used while provisioning the SE in step 2.

8.2.3 mbedTLS ALT APIs

group **ax_mbed_tls**
mbedTLS ALT implementation.

Unnamed Group

int **sss_mbedtls_associate_keypair** (mbedtls_pk_context **pkey*, *sss_object_t* **pkeyObject*)
Associate a keypair provisioned in the secure element for subsequent operations.

Description Implementation of key association between NXP Secure Element and mbedtls.

History 1.0 30-jan-2018 : Initial version

Return 0 if successful, or 1 if unsuccessful

Parameters

- [out] *pkey*: Pointer to the mbedtls_pk_context which will be associated with data corresponding to the key_index
- [in] *pkeyObject*: The object that we are going to be use.

int **sss_mbedtls_associate_pubkey** (mbedtls_pk_context **pkey*, *sss_object_t* **pkeyObject*)
Associate a pubkey provisioned in the secure element for subsequent operations.

Return 0 if successful, or 1 if unsuccessful

Parameters

- [out] *pkey*: Pointer to the mbedtls_pk_context which will be associated with data corresponding to the key index
- [in] *pkeyObject*: The object that we are going to be use.

int **sss_mbedtls_associate_ecdhctx** (mbedtls_ssl_handshake_params **handshake*,
sss_object_t **pkeyObject*, *sss_key_store_t* **hostKs*)
Update ECDSA HandShake key with given inded.

Return 0 if successful, or 1 if unsuccessful

Parameters

- [inout] *handshake*: Pointer to the mbedtls_ssl_handshake_params which will be associated with data corresponding to the key index
- [in] *pkeyObject*: The object that we are going to be use.
- [in] *hostKs*: Keystore to host for session key.

8.3 Platform Security Architecture

The Platform Security Architecture (PSA) by ARM is a holistic set of threat models, security analyses, hardware and firmware architecture specifications, and an open source firmware reference implementation.

ARMmbed provides an interface for PSA APIs as a part of its mbed-crypto project. Also, it supports SE driver interface which allows the user to use its own implementation for PSA cryptographic functions. This is useful for integrating Secure Element with mbed-crypto provided PSA interface.

For details on PSA specification, refer to [ARMmbed PSA Specification](#).

8.3.1 PSA SE Driver Interface

The SE Driver interface allows the user to register Secure Element drivers for various cryptographic operations. It is not necessary that one driver should offer all cryptographic functionalities, we can register up to 4 drivers which may offer different functionalities.

Cryptographic APIs are split in to the following :

- SE_KEY_MANAGEMENT - Key management APIs like import/generate/destroy
- SE_MAC - Mac operations
- SE_CIPHER - Symmetric encrypt/decrypt operations
- SE_AEAD - AEAD/GCM operations
- SE_ASYMMETRIC - Asymmetric sign/verify/encrypt/decrypt operations
- SE_KEY_DERIVATION - Key derivation operations

The driver may support any subset of cryptographic functionalities, mbed-crypto offers software fall-back for APIs unavailable from SE.

Note: For SE interface, currently only SE_KEY_MANAGEMENT APIs, and asymmetric sign and asymmetric verify APIs are supported.

8.3.2 PSA Concepts

Lifetime The lifetime of an object refers to its persistence. An object can either be PERSISTENT or VOLATILE. However, for SE based PSA implementation, it refers to the module ID of SE Driver. Lifetime identifies the scope of an object (where the object is stored and which operations are available for it). This is used while performing any operation on an object. We can use different lifetimes while performing operations with the same object as long as different drivers can access the object.

Slot ID This is a 64-bit ID indicating where the object is loaded in the library. PSA offers a maximum of 31 slots, which indicates that at a time, a maximum of 31 objects can be used for any operation. If an object is not being used, the object handle can be closed to free the slot. Since there is no concept of an object being loaded for SE, the Slot ID will refer to the Key ID of the object. Any application will remain unaware of Slot ID and this should be managed internally. PSA library should use this value to refer to any object.

For SSS based PSA implementation, we have a 1:1 mapping of Slot ID from Key ID.

Also see [Managing KeyIDs](#).

Key ID This is a 32-bit ID indicating the file name of the object which will be stored on the file system. Apart from the actual object, PSA also maintains an object file which will store metadata of the object such as policies and supported algorithms. Before performing any operation, these values are validated. The applications will use this value to refer to any object.

For SSS based PSA implementation, the contents of this file may also be stored on SE.

Also see [Managing KeyIDs](#).

PSA Objects

- **LIFETIME_FILE** - This is SE specific file which can contain SE(driver) specific persistent data
- **TRANSACTION_FILE** - This is a temporary file created at the time of any operation. It will be deleted after the operation. This is also used to continue a pending operation if, in case, the system reboots.
- **OBJECT_FILE** - This file corresponds to any object we create inside the SE. It will store data about policy, supported algorithms, etc.
(keyID range is 0x20000000 - 0x2FFFFFFF)
- **OBJECT** - This is the actual object created inside the SE.
(keyID range is 0x30000000 - 0x3FFFFFFF)

For any provided Key ID, the most significant nibble is masked out. The effective Key ID is 28-bit long. Also see [Managing KeyIDs](#).

Warning: This logic of managing KeyIDs of various PSA objects is temporary and it will be changed in the future.

8.3.3 Managing KeyIDs

Application can provide any keyID to be used with SE. This will be mapped directly (1:1) with the slotID. For internal usage, it is mapped to a 28-bit ID, masking out the most significant nibble. Of all PSA objects, **lifetime file**, **transaction file** and **secure objects** will always be stored in secure element. The application has an option to choose the storage for object metadata files.

Providing the mask `#define PSA_ALT_ITS_SE_FLAG ((0x1) << 28)` in the keyID will ensure that object file is stored in secure element. If this flag is not set, object file will be stored in flash memory.

Flash storage currently has support to store only up to 8 object files.

8.3.4 Building PSA for TrustZone

PSA library is intended to run in ARM TrustZone. All examples will run in normal world and link to PSA library to perform cryptographic operations. Build the library for TrustZone with the following CMake configurations:

- Host=lpcxpresso55s_s
- HostCrypto=MBEDCRYPTO
- RTOS=Default
- SMCOM=T1oI2C
- PROJECT=PSA_ALT

8.4 Android Key master

See *Android: Hikey960*

8.5 Introduction on Open62541 (OPC UA stack)

Open62541 is an open source C implementation of OPC UA stack. Open62541 supports binary encoding of messages with the following security profiles and modes.

Security Profiles

- 1) None
- 2) Basic256
- 3) Basic256SHA256

Security Modes

- 1) None
- 2) Sign
- 3) Sign and Encrypt

8.5.1 Integrating SE050 in Open62541

Open62541 stack uses mbedtls for all crypto operations in security profile plugins by default. For integrating with SE050, in the security profile plugins of Open62541 (`simw-top\ext\open62541\plugins\securityPolicies`), specific mbedtls functions used for private key operations, are replaced by calls to SSS APIs. Only the Basic256SHA256 security profile (uses RSA2048 keys) has been updated to support SE050 integration: private key operations - RSA Sign and RSA Decrypt - are now performed using SE050. The modified security profile plugin files are placed at `simw-top\sss\plugin\open62541`.

For the server application, a reference key file is used to pass the key id information to the security profile plugins layer.

Note: Please refer to the demonstrator built on top of the Open62541 OPC UA stack for further details (*OPC UA (Open62541) Demo*)


8.6 WiFi EAP Demo with Raspberry Pi3

8.6.1 Prerequisites

- Raspberry pi3 with raspbian OS installed.
- Ubuntu machine to run freeRadius
- Access point (WPA/WPA2 Enterprise capable)

8.6.2 Introduction

The image shows the wifi EAP demo set up

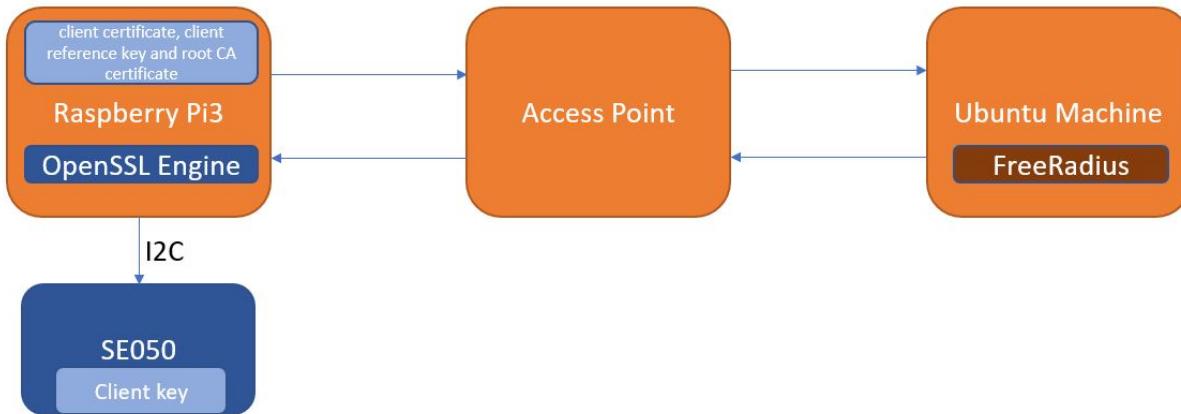

8.6.3 Setting up Access point

- 1) Connect Access point (WPA/WPA2 Enterprise capable) and Linux machine over a ethernet cable,
- 2) Log in to access point
- 3) Under wireless settings change security to WPA/WPA2 Enterprise and give the ip address of Ubuntu machine to RADIUS Server IP
- 4) RADIUS Server Port - 1812
- 5) Enter any password in RADIUS Server password field

8.6.4 Setting up freeradius Server on Ubuntu

- 1) **Install freeradius server on ubuntu machine.** `sudo apt-get install freeradius`
Freeradius is installed at `/etc/freeradius`
- 2) Now add the access point ip address and radius password to client configuration file - `/etc/freeradius/clients.conf`

```

For freeradius 2.2.8 add,
client 192.168.2.1/16 {
    secret      = <radius server password mentioned in previous section>
    shortname   = <Any short name>
}

For freeradius 3.0 add,
client router {
    ipaddr      = 192.168.2.1
    secret      = <radius server password mentioned in previous section>
}

```

- 3) Generate client and server keys. Scripts to generate keys and certificates are available in freeradius source code

```
git clone https://github.com/FreeRADIUS/freeradius-server.git
cd freeradius-server
```

- 4) Add client email address and common name in /freeradius-server/raddb/certs/client.cnf

```
41 prompt      = no
42 distinguished_name = client
43 default_bits      = 2048
44 input_password    = whatever
45 output_password   = whatever
46
47 [client]
48 countryName      = FR
49 stateOrProvinceName = Radius
50 localityName     = Somewhere
51 organizationName = Example Inc.
52 emailAddress     = user3@example.org
53 commonName       = user3
54
```

- 5) Execute bootstrap script at /freeradius-server/raddb/certs

```
./bootstrap
```

- 6) Keys and certificates are generated in folder /freeradius-server/raddb/certs

- 7) Copy root ca cert, server key and server certificate to installed freeradius path

```
cp /freeradius-server/raddb/certs/ca.pem /etc/freeradius/certs/
cp /freeradius-server/raddb/certs/server.key /etc/freeradius/certs/
cp /freeradius-server/raddb/certs/server.pem /etc/freeradius/certs/
cp /freeradius-server/raddb/certs/dh /etc/freeradius/certs/
```

- 8) Add client details to user configuration file

```
For freeradius 2.2.8, add details in /etc/freeradius/users file

<user_name> Cleartext-password := <user_password>
Reply-Message = "<message>"


For freeradius 3.0 add details in /etc/freeradius/mods-config/files/authorize file

<user_name> Auth-Type := Accept, Cleartext-password := <user_password>
Reply-Message = "<message>"
```

- 9) Make the following changes to freeradius conf file at

For freeradius 2.2.8 - /etc/freeradius/eap.conf.

For freeradius 3.0 - /etc/freeradius/mods-available/eap.

```

@@ -199,6 +199,7 @@ eap {
    # *one* CA certificate.
    #
    # ca_file = /etc/ssl/certs/ca-certificates.crt
+   ca_file = /etc/freeradius/3.0/certs/ca.pem

    # OpenSSL will automatically create certificate chains,
    # unless we tell it to not do that. The problem is that
@@ -498,7 +499,7 @@ eap {
    #
    # You should also delete all of the files
    # in the directory when the server starts.
-   # tmpdir = /tmp/radiusd
+   tmpdir = /tmp/radiusd

    # The command used to verify the client cert.
    # We recommend using the OpenSSL command-line
@@ -703,7 +704,8 @@ eap {
    # client certificate with EAP-TTLS, so this option is unlikely
    # to be usable for most people.
    #
-   # require_client_cert = yes
+   EAP-TLS-Require-Client-Cert = Yes
+   require_client_cert = yes
}

```

- 10) Create a radiusd directory in /tmp and assign permission for freerad user

```

mkdir tmp/radiusd
sudo chown freerad:freerad tmp/radiusd

```

- 11) Start free radius server as

```

sudo freeradius -X

```

8.6.5 Setting up Raspberry Pi3

- 1) Copy plug and trust middleware package to rpi3 at /home/pi location
- 2) Modify the openssl engine id to pkcs11 in openssl engine header file ax_embSeEngine.h.
Location: simw-top/sss/plugin/openssl/engine/inc/ax_embSeEngine.h
- 3) Build openssl engine

```

cd simw-top
python scripts/create_cmake_projects.py
cd ..../simw-top_build/raspbian_native_se050_t1oi2c
make install
ldconfig /usr/local/lib

```

- 4) Copy client key (client.key), client certificate (client.crt), Root CA certificate (ca.pem) from ubuntu machine (freeradius-server/certs/) to raspberry pi at location /home/pi/wifiEAP
- 5) Refer to *CLI Tool* for ssscli tool setup. Using ssscli tool, create a reference pem file for client key

```
cd /home/pi/wifiEAP
openssl rsa -in client.key -out client.pem
sscli connect se05x t1oi2c none
sscli set rsa pair 0x1234 client.pem
sscli refpm rsa pair 0x1234 client_ref.pem
```

- 6) Add folowing network configuration to wpa_supplicant.conf file (/etc/wpa_supplicant)

```
pkcs11_engine_path=/usr/local/lib/libssss_engine.so
pkcs11_module_path=/usr/local/lib/libssss_engine.so

network={
    ssid=""
    priority=1
    engine=1
    key_mgmt=WPA-EAP
    pairwise=CCMP TKIP
    auth_alg=OPEN
    eap=TTLS
    identity="" # When using freeradius 2.2.8, use TLS
    password="" # from user configuration file
    ca_cert="/home/pi/wifiEAP/<ROOT_CA_CERT_FILE>" # from user configuration file
    client_cert="/home/pi/wifiEAP/<CLIENT_CERT_FILE>" # from user configuration file
    private_key="/home/pi/wifiEAP/<CLIENT_KEY_REFERENCE_FILE>" # from user configuration file
    private_key_passwd="" # If key file is not encrypted

    ca_cert2="/home/pi/wifiEAP/<ROOT_CA_CERT_FILE>" # If key file is not encrypted
    client_cert2="/home/pi/wifiEAP/<CLIENT_CERT_FILE>" # If key file is not encrypted
    private_key2="/home/pi/wifiEAP/<CLIENT_KEY_REFERENCE_FILE>" # If key file is not encrypted
    private_key_passwd2="" # If key file is not encrypted
}
```

- 7) Change the engine_id to pkcs11 in openssl configuration file (/simw-top/demos/linux/common/openssl11_sss_se050.cnf)

```
[e4sss_se050_section]
engine_id = pkcs11
dynamic_path = /usr/local/lib/libssss_engine.so
init = 1
default_algorithms = RAND, RSA, EC
```

- 8) Set the openssl config path as call:

```
$ export OPENSSL_CONF=/simw-top/demos/linux/common/openssl11_sss_se050.cnf
```

- 9) kill wpa_supplicant process as

```
pkill wpa_supplicant
```

- 10) Restart wpa_supplicant process as

```
wpa_supplicant -c/etc/wpa_supplicant/wpa_supplicant.conf -iwlan0 -Dwext
```

- 11) On successful TLS handshake, Rpi should be assigned with a valid IP address.

Note:

- 1) Tested with openssl version of 1.1.0j on raspberry pi.
 - 2) Ip address mentioned above is for illustrative purpose.
-

8.7 PKCS#11 Standalone Library

PKCS#11 is a Public-Key Cryptography Standard for cryptographic data manipulation. It is mainly used with Hardware Security Modules and smart cards.

PKCS#11 standalone library is supported with SE05x for Linux based platforms.

8.7.1 Building on Linux/Raspberry Pi3

PKCS#11 standalone shared library can be built on Linux platforms and Raspberry Pi3.

Build PKCS#11 library for Raspberry pi 3 with the following CMake configurations:

- RTOS_Default: ON
- WithHostCryptoMBEDTLS: ON
- Withmbedtls_ALT_SSS: ON
- WithSharedLIB: OFF
- Project: sss_pkcs11

Note: The PKCS#11 library is not completely standalone as mbedtls library is also used for parsing data.

8.7.2 PKCS#11 specifications

Token Label SSS_PKCS11

Pin Not required

Supported Mechanisms

- RSA Mechanisms

- CKM_RSA_PKCS
- CKM_SHA1_RSA_PKCS
- CKM_SHA224_RSA_PKCS
- CKM_SHA256_RSA_PKCS
- CKM_SHA384_RSA_PKCS
- CKM_SHA512_RSA_PKCS
- CKM_RSA_PKCS_PSS
- CKM_SHA1_RSA_PKCS_PSS
- CKM_SHA224_RSA_PKCS_PSS
- CKM_SHA256_RSA_PKCS_PSS

- CKM_SHA384_RSA_PKCS_PSS
- CKM_SHA512_RSA_PKCS_PSS
- CKM_RSA_PKCS_OAEP
- **AES Mechanisms**
 - CKM_AES_ECB
 - CKM_AES_CBC
 - CKM_AES_CTR
- **Digest Mechanisms**
 - CKM_SHA_1
 - CKM_SHA224
 - CKM_SHA256
 - CKM_SHA384
 - CKM_SHA512
- **ECDSA Mechanisms**
 - CKM_ECDSA
 - CKM_ECDSA_SHA1
- **Key Generation Mechanisms**
 - CKM_EC_KEY_PAIR_GEN
 - CKM_RSA_PKCS_KEY_PAIR_GEN
 - CKM_AES_KEY_GEN
 - CKM_DES2_KEY_GEN
 - CKM_DES3_KEY_GEN
- **Key Derivation Mechanisms**
 - CKM_ECDH1_DERIVE

8.7.3 Using with pkcs11-tool

Install pkcs11-tool by running:

```
sudo apt-get install opensc-pkcs11
```

Set environment variable to the installed PKCS#11 shared library:

```
export PKCS11_MODULE=/usr/local/lib/libsss_pkcs11.so
```

The .so file is available in binaries/pkcs11 directory.

Generating new keypair:

```
pkcs11-tool --module $PKCS11_MODULE --keypairgen --key-type rsa:1024 --label "sss:20202020"
```

Signing:

```
pkcs11-tool --module $PKCS11_MODULE --sign --label sss:20181001 -m SHA256-RSA-PKCS --
↪slot 1 -i in.der -o signature.der
```

Decryption:

```
pkcs11-tool --module $PKCS11_MODULE --decrypt --label sss:20202020 -m SHA256-RSA-PKCS --
↪slot 1 -i in.der -o decrypt.der
```

Hashing:

```
pkcs11-tool --module $PKCS11_MODULE --hash -m SHA256 -i in.der -o hash.der
```

See also [Android: Hikey960](#)

CLI TOOL

9.1 Introduction


The `ssscli` tool is a Python based tool to manipulate the SE050 Secure Element.

It can be used to:

- Insert Keys, Certificates
- Generate Keys
- Attach policies to objects
- Control Cloud for CLI (To Be Done)

It's written in Python to enable the tool and corresponding scripts to be run on Windows/Linux/OS X and other embedded devices. Because of Python language, the tool also enables us to generate complex provisioning scripts and schemas for testing various provisioning scenarios.

9.2 Block Diagram

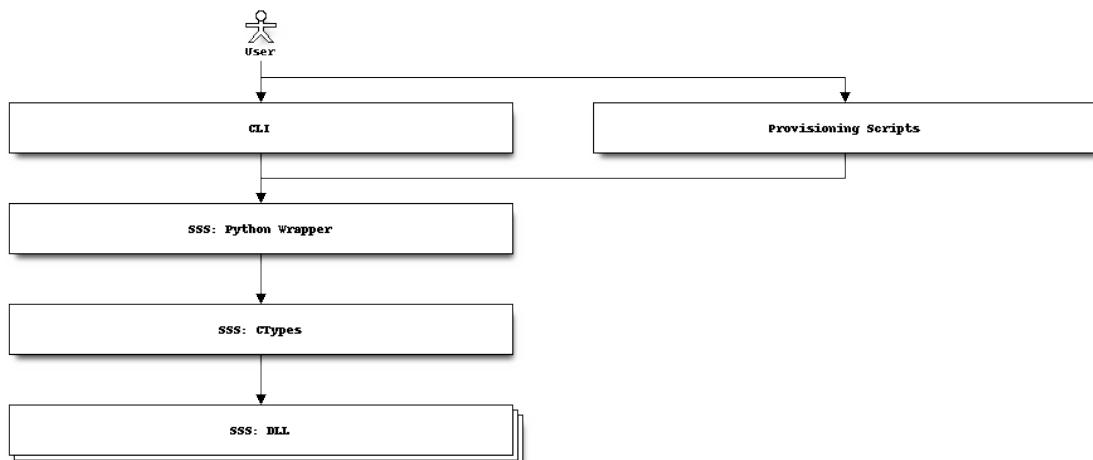

Name	Description
User	User who runs the scripts
CLI	CLI Interface. Simple commands to interact with the SE.
Provisioning Scripts	Provisioning scripts for various use cases.
SSS: Python Wrapper	Python middleware for SSS features. This is a functional abstraction layer over the raw CTypes wrapper.
SSS: CTypes	CTypes wrapper for SSS APIs. The wrapper is machine generated from SSS Header files.
SSS: DLL	Native DLL on top of the SSS Layer. See Plug & Trust MW : Block Diagram . Based on the selection of the platform/interface, this DLL needs to be re-compiled.

9.3 Steps needed before running `ssscli` tool

9.3.1 Once per installation

The following steps are needed once per installation.

Windows

- 1) Ensure 32 bit PYTHON 3 is installed.

You can download it from <https://www.python.org/downloads/>.

- 2) Environment to build host library is setup (GCC/MinGW/Visual Studio)

Note: This is required so that DLL/.SO can be prepared to be used by the CLI Tool.

- 3) Follow Section 4.1 *Windows Build* and build the `sssapisw`.

- 4) It is recommended to install the cli tool via virtualenv.

See <https://virtualenv.pypa.io/en/latest/> and <https://docs.python-guide.org/dev/virtualenvs/#lower-level-virtualenv> to understand more about virtualenv

Run:

```
pip3 install virtualenv
```

- 5) Once virtualenv is installed, create a new virtual environemnt:

```
python -m virtualenv venv
```

- 6) To activate the new created virtual ENV Run:

```
call venv\Scripts\activate.bat
```

- 7) In the new installed virtualenv, install required packages. This includes click, cryptography and func-timeout.

- click: To parse command line parameter.
- cryptography: Load keys, certificates and generate reference keys.
- func-timeout: ssscli recovery mechanism in case of no response from hardware.

Change directory to <SE05X_root_folder>/simw-top/pycli and run:

```
pip install -r requirements.txt
```

- 8) To install ssscli tool, run the following commands:

```
cd src
pip install --editable .
```

- 9) Alternately can install ssscli tool, by running following commands:

```
cd src
python setup.py develop
```

i.MX

- 1) Ensure PYTHON 3 is installed.

refer to Section 11.5.1 *platform-imx-linux*

- 2) Ensure func-timeout module is installed:

```
pip3 install func-timeout
```

- 3) Follow Section 4.4 *i.MX Linux Build* and build the sssapisw.

- 4) To install ssscli tool, change directory to <SE05X_root_folder>/simw-top/pycli/src and run the following command:

```
python3 setup.py develop
```

Raspberry Pi

- 1) Ensure PYTHON 3 is installed.

- 2) Ensure python3-pip and libffi-dev are installed:

```
sudo apt-get install python3-pip
sudo apt-get install libffi-dev
```

- 3) Follow Section 4.5 *Raspberry Pi Build* and build the sssapisw.

- 4) Ensure click, cryptography and func-timeout modules are installed. To install these modules, change directory to <SE05X_root_folder>/simw-top/pycli and run the following command:

```
pip3 install -r requirements.txt
```

- 5) To install ssscli tool, run the following commands:

```
cd src
sudo python3 setup.py develop
```

9.3.2 Communication interface (cmake SMCOM setting)

The communication interface to the secure element used by the `ssscli` tool is determined by the native shared library used. The communication interface supported by the shared library is controlled by the `cmake SMCOM` value.

To change the communication interface only the native `ssscli` DLL / .so needs to be rebuilt.

The shared library can be compiled with MSVC/MinGW/XCode/GCC based on the selected platform.

9.4 Running the `ssscli` tool - Windows

- 1) To activate the new created virtual ENV Run:

```
call venv\Scripts\activate.bat
```

- 2) To connect to the SE, call:

```
ssscli connect se05x vcom COM13
```

- 3) To dis-connect to the SE, call:

```
ssscli disconnect
```

9.5 CLI Provisioning

9.5.1 Generating keys and certificates

For generating keys and certificates, following scripts generates using `openssl`.

- `GenerateAWSCredentials.py`
- `GenerateAZURECredentials.py`
- `GenerateGCP Credentials.py`
- `GenerateIBMCredentials.py`

The generated keys and certificates shall be available in `pycli/Provisioning/gcp`, `pycli/Provisioning/ibm`, `pycli/Provisioning/azure` and `pycli/Provisioning/aws` directories.

9.5.2 Provisioning for the demo

Generated keys and certificates are used to provision the secure element using `ResetAndUpdate_GCP.py`, `ResetAndUpdate_IBM.py`, `ResetAndUpdate_AZURE.py` and `ResetAndUpdate_AWS.py` scripts for gcp, ibm, azure and aws cloud demo respectively.

Note: Default auth type in provisioning script is always None

9.5.3 Steps to provision your device for demo on Windows

Provisioning on windows can be done in two ways.

- Using precompiled binaries
- Using python scripts

Using precompiled binaries

Precompiled binaries available in `binaries/pySSSCLI` directory. Can generate certificates and provision the secure element by simply running these binaries.

- 1) For GCP, create certificate and provision, call:

```
Provision_GCP.exe <COM_PORT>
```

- 2) For IBM, create certificate and provision, call:

```
Provision_IBM.exe <COM_PORT>
```

- 3) For AWS, create certificate and provision, call:

```
Provision_AWS.exe <COM_PORT>
```

- 4) For AZURE, create certificate and provision, call:

```
Provision_AZURE.exe <COM_PORT>
```

The generated keys and certificates shall be available in `binaries/pySSSCLI/gcp`, `binaries/pySSSCLI/ibm`, `binaries/pySSSCLI/aws` and `binaries/pySSSCLI/azure` directories.

Using Python scripts

- 1) Complete Section 9.3 *Steps needed before running ssscli tool*

- 2) from `pycli` directory, run:

```
call venv\Scripts\activate.bat
cd Provisioning
```

- 3) Check the vcom port number

- 4) For GCP, create certificate and provision, call:

```
python GenerateGCP_credentials.py <COM_PORT>
python ResetAndUpdate_GCP.py <COM_PORT>
```

- 5) For IBM, create certificate and provision, call:

```
python GenerateIBMCredentials.py <COM_PORT>
python ResetAndUpdate_IBM.py <COM_PORT>
```

- 6) For AWS, create certificate and provision, call:

```
python GenerateAWSCredentials.py <COM_PORT>
python verification_certificate.py <interCA_Certificate> <interCA_Keypair>
  ↳<verification_code>
python ResetAndUpdate_AWS.py <COM_PORT>
```

- 7) For AZURE, create certificate and provision, call:

```
python GenerateAZURECredentials.py <COM_PORT>
python verification_certificate.py <interCA_Certificate> <interCA_Keypair>
  ↳<verification_code>
python ResetAndUpdate_AZURE.py <COM_PORT>
```

- 8) Flash the demo on to the board

9.5.4 Steps to provision your device for demo on iMX or Raspberry Pi

- 1) Complete Section 9.3 *Steps needed before running ssscli tool*
- 2) from pycli directory, run:

```
cd Provisioning
```

- 3) For GCP, create certificate and provision, call:

```
python3 GenerateGCPCredentials.py
python3 ResetAndUpdate_GCP.py
```

- 4) For IBM, create certificate and provision, call:

```
python3 GenerateIBMCredentials.py
python3 ResetAndUpdate_IBM.py
```

- 5) For AWS, create certificate and provision, call:

```
python3 GenerateAWSCredentials.py
python3 verification_certificate.py <interCA_Certificate> <interCA_Keypair>
  ↳<verification_code>
python3 ResetAndUpdate_AWS.py
```

- 6) For AZURE, create certificate and provision, call:

```
python3 GenerateAZURECredentials.py
python3 verification_certificate.py <interCA_Certificate> <interCA_Keypair>
  ↳<verification_code>
python3 ResetAndUpdate_AZURE.py
```

- 7) Flash the demo on to the board

9.6 Usage Examples

9.6.1 SE05X: VCOM Interface

Provisioning ECC Pair and Certificate:

```
ssscli connect se05x vcom COM5
ssscli se05x reset
ssscli set ecc pair 0x20181001 testData\tls_client_key.pem
ssscli set cert 0x20181002 testData\tls_client.cer
ssscli disconnect
```

Generating ecc key and retrive public key:

```
ssscli connect se05x vcom COM5
ssscli se05x reset
ssscli generate ecc 0x20181006 NIST_P256
ssscli get ecc pair 0x20181006 data\tls_key.pem
ssscli disconnect
```

Inject and retrieve certificate:

```
ssscli connect se05x vcom COM5
ssscli set cert 0x20181004 testData\tls_client.cer
ssscli get cert 0x20181004 data\extracted_certificate.cer
ssscli disconnect
```

Erase key, Inject ecc Key and Sign certificate:

```
ssscli connect se05x vcom COM5
ssscli erase 0x20181001
ssscli set ecc pair 0x20181001 testData\tls_client_key.pem
ssscli sign 0x20181001 testData\tls_client.cer data\signed_data.pem
ssscli disconnect
```

Inject and Retrieve AES key:

```
ssscli connect se05x vcom COM5
ssscli se05x reset
ssscli set aes 0x40100000 testData\aes.der
ssscli get aes 0x40100000 data\extracted_aes_key.cer
ssscli disconnect
```

Inject ECC Public Key:

```
ssscli connect se05x vcom COM5
ssscli set ecc pub 0x20181010 testData\tls_client_key_pub.pem
ssscli disconnect
```

Generate RSA Key and Get public key in DER format:

```
ssscli connect se05x vcom COM5
ssscli generate rsa 0x20182001 2048
ssscli get rsa pub 0x20182001 data\rsa_pub_2048.der --format DER
ssscli disconnect
```

Generate ecc Koblitz 256 Key, Sign Binary data and verify:

```
ssscli connect se05x vcom COM5
ssscli generate ecc 12E41001 Secp256k1
ssscli sign 12E41001 tstData\binary_data.bin signed_data_ecc_secp256k1.pem
ssscli verify 12E41001 tstData\binary_data.bin signed_data_ecc_secp256k1.pem
ssscli disconnect
```

Generate ecc Brainpool192 Key and Sign and verify certificate using SHA512 has algorithm:

```
ssscli connect se05x vcom COM5
ssscli generate ecc 0xE101501 Brainpool192
ssscli sign 0xE101501 tstData\tls_client.cer data\signed_data.pem --hashalgo=SHA512
ssscli verify 0xE101501 tstData\tls_client.cer data\signed_data.pem --hashalgo=SHA512
ssscli disconnect
```

Read Cert UID of 10 bytes long:

```
ssscli connect se05x vcom COM5
ssscli se05x certuid
```

Read UID of 18 bytes long:

```
ssscli connect se05x vcom COM5
ssscli se05x uid
```

Session open with auth type as Platform SCP, generate ecc Brainpool192 Key:

```
ssscli connect se05x vcom COM5 --auth_type PlatformSCP --scpkey "c:/_ddm/scpkey.txt"
ssscli se05x reset
ssscli generate ecc 2E10D532 Brainpool192
ssscli disconnect
```

Generate ecc Koblitz256 key and create reference key:

```
ssscli connect se05x vcom COM5
ssscli generate ecc 7A10D838 Secp256k1
ssscli refpem ecc pair 7A10D838 data\refkey_secp256k1.pem
ssscli disconnect
```

Generate rsa 4096 key and create reference key in pkcs12 format:

```
ssscli connect se05x vcom COM5
ssscli generate rsa 0x70102040 4096
ssscli refpem rsa pair 0x70102040 rsa_4096_rekey.pfx --password nxp
ssscli disconnect
```

Generate ecc Brainpool 256 key and create pkcs12 format reference key extracted to pem format:

```
ssscli connect se05x vcom COM5
ssscli generate ecc 70102050 Brainpool256
ssscli refpem ecc pair 70102050 ecc_bp256_rekey.pem --format PKCS12 --password nxp
ssscli disconnect
```

Generate ecc ED25519 key and sign certificate:

```
ssscli connect se05x vcom COM5
ssscli generate ecc 70102060 ED25519
ssscli sign 70102060 tstData\tls_client.cer data\signed_data_using_ed25519.pem
ssscli disconnect
```

Generate ecc MONTH DH 25519 key:

```
ssscli connect se05x vcom COM5
ssscli generate ecc 70102080 ED25519
ssscli sign 70102080 testData\tls_client.cer data\signed_data_using_ed25519.pem
ssscli disconnect
```

Perform Encrypt and Decrypt using RSA 2048:

```
ssscli connect se05x vcom COM5
ssscli generate rsa 0x20182001 2048
ssscli get rsa pub 0x20182001 rsa_pub_2048.pem
ssscli set rsa pub 0x20184120 rsa_pub_2048.pem
ssscli encrypt 0x20184120 "Welcome to NXP" rsa_2048_encrypted_data.pem
ssscli decrypt 0x20182001 rsa_2048_encrypted_data.pem decrypted_data.txt
ssscli disconnect
```

9.6.2 SE05X: PCSC interface

Provisioning ECC Pair and Certificate:

```
ssscli connect se05x pcsc NXP
ssscli se05x reset
ssscli set ecc pair 0x20181001 testData\tls_client_key.pem
ssscli set cert 0x20181002 testData\tls_client.cer
ssscli disconnect
```

Inject ECC Public Key:

```
ssscli connect se05x pcsc NXP
ssscli set ecc pub 0x20181010 testData\tls_client_key_pub.pem
ssscli disconnect
```

9.6.3 se05x: JRCPV2 interface

Provisioning ECC Pair and Certificate:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli se05x reset
ssscli set ecc pair 0x20181001 testData\tls_client_key.pem
ssscli set cert 0x20181002 testData\tls_client.cer
ssscli disconnect
```

Generating ecc key and retrive public key:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli se05x reset
ssscli generate ecc 0x40100000 NIST_P256
ssscli get ecc pair 0x40100000 data\tls_key.pem
ssscli disconnect
```

Set and retrieve certificate:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli set cert 0x20181002 tstData\tls_client.cer
ssscli get cert 0x20181002 data\extracted_certificate.cer
ssscli disconnect
```

Erase a key, Inject ecc Key and Sign certificate:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli erase 0x20181001
ssscli set ecc pair 0x20181001 tstData\tls_client_key.pem
ssscli sign 0x20181001 tstData\tls_client.cer data\signed_data.pem
ssscli disconnect
```

Inject and Retrieve AES key:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli se05x reset
ssscli set aes 0x40200000 tstData\aes.der
ssscli get aes 0x40200000 data\extracted_aes_key.cer
ssscli disconnect
```

Inject ECC Public Key:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli set ecc pub 0x20181010 tstData\tls_client_key_pub.pem
ssscli disconnect
```

Generate RSA Key and Get public key in PEM format:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate rsa 0x20182001 2048
ssscli get rsa pub 0x20182001 data\rsa_pub_2048.pem --format PEM
ssscli disconnect
```

Generate ecc Koblitz 256 Key, Sign Binary data and verify:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate ecc 12E41001 Secp256k1
ssscli sign 12E41001 tstData\binary_data.bin signed_data_ecc_secp256k1.pem
ssscli verify 12E41001 tstData\binary_data.bin signed_data_ecc_secp256k1.pem
ssscli disconnect
```

Generate ecc Brainpool192 Key and Sign and verify certificate using SHA512 has algorithm:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate ecc 0x2E101501 Brainpool192
ssscli sign 0x2E101501 tstData\tls_client.cer data\signed_data.pem --hashalgo=SHA512
ssscli verify 0x2E101501 tstData\tls_client.cer data\signed_data.pem --hashalgo=SHA512
ssscli disconnect
```

Read Cert UID of 10 bytes long:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli se05x certuid
```

Read UID of 18 bytes long:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli se05x uid
```

Session open with auth type as Platform SCP, generate ecc Brainpool192 Key:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050 --auth_type PlatformSCP --scpkey_
→ "c:/_ddm/scpkey.txt"
ssscli se05x reset
ssscli generate ecc 2E10D532 Brainpool192
ssscli disconnect
```

Generate ecc Koblitz256 key and create reference key:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate ecc 7A10D838 Secp256k1
ssscli refpem ecc pair 7A10D838 data\refkey_secp256k1.pem
ssscli disconnect
```

Generate rsa 4096 key and create reference key in pkcs12 format:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate rsa 0x70102040 4096
ssscli refpem rsa pair 0x70102040 rsa_4096_rekey.pfx --password nxp
ssscli disconnect
```

Generate ecc Brainpool 256 key and create pkcs12 format reference key extracted to pem format:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate ecc 70102050 Brainpool256
ssscli refpem ecc pair 70102050 ecc_bp256_rekey.pem --format PKCS12 --password nxp
ssscli disconnect
```

Generate ecc ED25519 key and sign certificate:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate ecc 70102060 ED25519
ssscli sign 70102060 testData\tls_client.cer data\signed_data_using_ed25519.pem
ssscli disconnect
```

Generate ecc MONTH DH 25519 key:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate ecc 70102080 ED25519
ssscli sign 70102080 testData\tls_client.cer data\signed_data_using_ed25519.pem
ssscli disconnect
```

Perform Encrypt and Decrypt using RSA 2048:

```
ssscli connect se05x jrcpv2 127.0.0.1:8050
ssscli generate rsa 0x20182001 2048
ssscli get rsa pub 0x20182001 rsa_pub_2048.pem
ssscli set rsa pub 0x20184120 rsa_pub_2048.pem
ssscli encrypt 0x20184120 "Welcome to NXP" rsa_2048_encrypted_data.pem
ssscli decrypt 0x20182001 rsa_2048_encrypted_data.pem decrypted_data.txt
ssscli disconnect
```

9.6.4 A71CH: VCOM Interface

Provisioning ECC Pair and Certificate:

```
ssscli connect a71ch vcom COM7
ssscli a71ch reset
ssscli set ecc pair 0x20181003 testData\tls_client_key.pem
ssscli set cert 0x20181004 testData\tls_client.cer
ssscli disconnect
```

Generating ecc key and retrive public key:

```
ssscli connect a71ch vcom COM7
ssscli a71ch reset
ssscli generate ecc 0x20181003 NIST_P256
ssscli get ecc pair 0x20181003 data\tls_key.pem
ssscli disconnect
```

Set certificate and retrieve certificate:

```
ssscli connect a71ch vcom COM7
ssscli set cert 0x20181004 testData\tls_client.cer
ssscli get cert 0x20181004 data\extracted_certificate.cer
ssscli disconnect
```

Erase a key, Inject ecc Key and Sign certificate:

```
ssscli connect a71ch vcom COM7
ssscli erase 0x20181005
ssscli set ecc pair 0x20181005 testData\tls_client_key.pem
ssscli sign 0x20181005 testData\tls_client.cer data\signed_data.pem
ssscli disconnect
```

9.6.5 A71CH: SCI2C interface

Provisioning ECC Pair and Certificate:

```
ssscli connect a71ch sci2c none
ssscli a71ch reset
ssscli set ecc pair 0x20181005 testData/tls_client_key.pem
ssscli set cert 0x20181002 testData/tls_client.cer
ssscli disconnect
```

Generating ecc key and retrive public key:

```
ssscli connect a71ch sci2c none
ssscli a71ch reset
ssscli generate ecc 0x40100000 NIST_P256
ssscli get ecc pair 0x40100000 data/tls_key.pem
ssscli disconnect
```

Set certificate and retrieve certificate:

```
ssscli connect a71ch sci2c none
ssscli set cert 0x20181002 testData/tls_client.cer
ssscli get cert 0x20181002 data/extracted_certificate.cer
ssscli disconnect
```

Erase a key, Inject ecc Key and Sign certificate:

```
ssscli connect a71ch sci2c none
ssscli erase 0x20181001
ssscli set ecc pair 0x20181001 testData\tls_client_key.pem
ssscli sign 0x20181001 testData\tls_client.cer data\signed_data.pem
ssscli disconnect
```

9.6.6 MBEDTLS

Provisioning ECC Pair and Certificate:

```
ssscli connect mbedtls none data
ssscli set ecc pair 0x20181005 testData\tls_client_key.pem
ssscli set cert 0x20181002 testData\tls_client.cer
ssscli disconnect
```

Generating ecc key and retrive public key:

```
ssscli connect mbedtls none data
ssscli generate ecc 0x20181003 NIST_P256
ssscli get ecc pair 0x20181003 data\tls_key.pem
ssscli disconnect
```

Set certificate and retrieve certificate:

```
ssscli connect mbedtls none data
ssscli set cert 0x20181004 testData\tls_client.cer
ssscli get cert 0x20181004 data\extracted_certificate.cer
ssscli disconnect
```

Erase key, provisioning ecc Key and Sign certificate:

```
ssscli connect mbedtls none data
ssscli erase 0x20181005
ssscli set ecc pair 0x20181005 testData\tls_client_key.pem
ssscli sign 0x20181005 testData\tls_client.cer data\signed_data.pem
ssscli disconnect
```

9.7 List of ssscli commands

ssscli uses PEM, DER and HEX data formats for keys and certificates. Refer *CLI Data formats*.

Note: Linux Environment

You can source `pycli/ssscli-bash-completion.sh` for auto-completion on bash with linux posix based environemnt.

9.7.1 ssscli Commands

These are the top level commands accepted by the ssscli Tool.

1) ssscli:

```
Usage: ssscli [OPTIONS] COMMAND [ARGS]...

Command line interface for SE050

Options:
  -v, --verbose    Enables verbose mode.
  --version        Show the version and exit.
  --help           Show this message and exit.

Commands:
  a71ch          A71CH specific commands
  cloud           (Not Implemented) Cloud Specific utilities.
  connect         Open Session.
  decrypt         Decrypt Operation
  disconnect      Close session.
  encrypt         Encrypt Operation
  erase         Erase ECC/RSA/AES Keys or Certificate (contents)
  generate        Generate ECC/RSA Key pair
  get             Get ECC/RSA/AES Keys or certificates
  policy          Create/Dump Object Policy
  refpem          Create Reference PEM/DER files (For OpenSSL Engine).
  se05x           SE05X specific commands
  set            Set ECC/RSA/AES Keys or certificates
  sign            Sign Operation
  verify        verify Operation
```

2) ssscli connect:

```
Usage: ssscli connect [OPTIONS] subsystem method port_name

Open Session.

subsystem = Security subsystem is selected to be used. Can be one of
"se05x, a71ch, mbedtls, openssl"

method = Connection method to the system. Can be one of "none, sci2c,
vcom, t1oi2c, jrcpv1, jrcpv2, pcsc"

port_name = Subsystem specific connection parameters. Example: COM6,
127.0.0.1:8050. Use "None" where not applicable. e.g. SCI2C/T1oI2C.
Default i2c port (i2c-1) will be used for port name = "None".

Options:
  --auth_type [None|PlatformSCP|UserID|ECKey|AESKey|UserID_PlatformSCP|ECKey_-
  ↵PlatformSCP|AESKey_PlatformSCP]                                Authentication type. Default is "None". Can
                                                               be one of "None, UserID, ECKey, AESKey,
                                                               PlatformSCP, UserID_PlatformSCP,
                                                               ECKey_PlatformSCP, AESKey_PlatformSCP"
  --scpkey TEXT                                              File path of the platformscp keys for
                                                               platformscp session
```

(continues on next page)

(continued from previous page)

--help	Show this message and exit.
--------	-----------------------------

3) ssscli disconnect:

Usage: ssscli disconnect [OPTIONS]
Close session.
Options:
--help Show this message and exit.

4) ssscli set:

Usage: ssscli set [OPTIONS] COMMAND [ARGS]...
Set ECC/RSA/AES Keys or certificates
Options:
--help Show this message and exit.
Commands:
aes Set AES Keys
cert Set Certificate
ecc Set ECC Keys
hmac Set HMAC Keys
rsa Set RSA Keys

5) ssscli get:

Usage: ssscli get [OPTIONS] COMMAND [ARGS]...
Get ECC/RSA/AES Keys or certificates
Options:
--help Show this message and exit.
Commands:
aes Get AES Keys
cert Get Certificate
ecc Get ECC Keys
rsa Get RSA Keys

6) ssscli generate:

Usage: ssscli generate [OPTIONS] COMMAND [ARGS]...
Generate ECC/RSA Key pair
Options:
--help Show this message and exit.
Commands:
ecc Generate ECC Key
pub Generate ECC Public Key to file
rsa Generate RSA Key

7) ssscli erase:

```
Usage: ssscli erase [OPTIONS] keyid

Erase ECC/RSA/AES Keys or Certificate (contents)

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

Options:
--help Show this message and exit.
```

8) ssscli cloud:

```
Usage: ssscli cloud [OPTIONS] COMMAND [ARGS]...

(Not Implemented) Cloud Specific utilities.

This helps to handle GCP/AWS/Watson specific settings.

Options:
--help Show this message and exit.

Commands:
aws (Not Implemented) AWS (Amazon Web Services) Specific utilities This...
gcp (Not Implemented) GCP (Google Cloud Platform) Specific utilities
This...

ibm (Not Implemented) IBM Watson Specific utilities This helps to handle...
```

9) ssscli a71ch:

```
Usage: ssscli a71ch [OPTIONS] COMMAND [ARGS]...

A71CH specific commands

Options:
--help Show this message and exit.

Commands:
reset Debug Reset A71CH
uid Get A71CH Unique ID
```

10) ssscli se05x:

```
Usage: ssscli se05x [OPTIONS] COMMAND [ARGS]...

SE05X specific commands

Options:
--help Show this message and exit.

Commands:
certuid Get SE05X Cert Unique ID (10 bytes)
readidlist Read contents of SE050
reset Reset SE05X
uid Get SE05X Unique ID (18 bytes)
```

11) ssscli refpem:

```
Usage: ssscli refpem [OPTIONS] COMMAND [ARGS]...

Create Reference PEM/DER files (For OpenSSL Engine).

Options:
--help Show this message and exit.

Commands:
ecc Refpem ECC Keys
rsa Refpem RSA Keys
```

12) ssscli sign:

```
Usage: ssscli sign [OPTIONS] keyid input_file signature_file

Sign Operation

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

input_file = Input file to sign. By default filename with extension .pem
and .cer considered as PEM format, others as DER/BINARY format.

signature_file = File name to store signature data. By default filename
with extension .pem in PEM format and others in DER format.

Options:
--informat TEXT Input format. TEXT can be "DER" or "PEM".
--outformat TEXT Output file format. TEXT can be "DER" or "PEM"
--hashalgo TEXT Hash algorithm. TEXT can be one of "SHA1", "SHA224", "SHA256",
"SHA384", "SHA512", "RSASSA_PKCS1_V1_5_SHA1",
"RSASSA_PKCS1_V1_5_SHA224", "RSASSA_PKCS1_V1_5_SHA256",
"RSASSA_PKCS1_V1_5_SHA384", "RSASSA_PKCS1_V1_5_SHA512",
"RSASSA_PKCS1_PSS_MGF1_SHA1", "RSASSA_PKCS1_PSS_MGF1_SHA224",
"RSASSA_PKCS1_PSS_MGF1_SHA256",
"RSASSA_PKCS1_PSS_MGF1_SHA384",
"RSASSA_PKCS1_PSS_MGF1_SHA512"

--help Show this message and exit.
```

13) ssscli verify:

```
Usage: ssscli verify [OPTIONS] keyid input_file signature_file

verify operation

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

input_file = Input file to verify. By default filename with extension .pem
and .cer considered as PEM format, others as DER/BINARY format.

filename = signature_file data file for verification. By default filename
with extension .pem in PEM format and others in DER format.

Options:
--format TEXT input_file and signature file format. TEXT can be "DER" or
"PEM"
```

(continues on next page)

(continued from previous page)

```
--hashalgo TEXT Hash algorithm. TEXT can be one of "SHA1, SHA224, SHA256,
SHA384, SHA512, RSASSA_PKCS1_V1_5_SHA1,
RSASSA_PKCS1_V1_5_SHA224, RSASSA_PKCS1_V1_5_SHA256,
RSASSA_PKCS1_V1_5_SHA384, RSASSA_PKCS1_V1_5_SHA512,
RSASSA_PKCS1_PSS_MGF1_SHA1, RSASSA_PKCS1_PSS_MGF1_SHA224,
RSASSA_PKCS1_PSS_MGF1_SHA256, RSASSA_PKCS1_PSS_MGF1_SHA384,
RSASSA_PKCS1_PSS_MGF1_SHA512"

--help Show this message and exit.
```

14) ssscli encrypt:

```
Usage: ssscli encrypt [OPTIONS] keyid input_data filename

Sign Operation

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

input_data = Input data to Encrypt. can be raw string or in file.

filename = Output file name to store encrypted data. Encrypted data will
be stored in DER format.

Options:
--algo TEXT Algorithm. TEXT can be one of "oaep", "rsaes"
--help Show this message and exit.
```

15) ssscli decrypt:

```
Usage: ssscli decrypt [OPTIONS] keyid encrypted_data filename

Sign Operation

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

encrypted_data = Encrypted data to Decrypt. can be raw data or in file.
Input data should be in DER format.

filename = Output file name to store Decrypted data.

Options:
--algo TEXT Algorithm. TEXT can be one of "oaep", "rsaes"
--help Show this message and exit.
```

16) ssscli policy:

```
Usage: ssscli policy [OPTIONS] COMMAND [ARGS]...

Create/Dump Object Policy

Options:
--help Show this message and exit.

Commands:
asymkey      Create Asymmetric Key Object Policy
common       Create Common Object Policy
commonpcrvalue Create Common PCR Value Object Policy
```

(continues on next page)

(continued from previous page)

counter	Create Counter Object Policy
dump	Display Created Object Policy
file	Create Binary file Object Policy
pcr	Create PCR Object Policy
symkey	Create Symmetric Key Object Policy
userid	Create User ID Object Policy

9.7.2 Set Commands

These commands are used to set/put objects/keys to the target secure subsystem.

- 1) ssscli set aes:

```
Usage: ssscli set aes [OPTIONS] keyid key

Set AES Keys

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

key = Can be in file or raw key in DER or HEX format

Options:
--policy_name TEXT  File name of the policy to be applied
--help              Show this message and exit.
```

- 2) ssscli set hmac:

```
Usage: ssscli set hmac [OPTIONS] keyid key

Set HMAC Keys

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

key = Can be in file or raw key in DER or HEX format

Options:
--help  Show this message and exit.
```

- 3) ssscli set cert:

```
Usage: ssscli set cert [OPTIONS] keyid key

Set Certificate

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

key = Can be raw certificate (DER format) or in file. For file, by default
filename with extension .pem and .cer considered as PEM format and others
as DER format.

Options:
--format TEXT      Input certificate format. TEXT can be "DER" or "PEM"
--policy_name TEXT  File name of the policy to be applied
--help              Show this message and exit.
```

- 4) ssscli set ecc pair:

```
Usage: ssscli set ecc pair [OPTIONS] keyid key
```

Set ECC Key pair

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

key = Can be raw key (DER format) or in file. For file, by default filename with extension .pem considered as PEM format and others as DER format.

Options:

--format TEXT	Input key format. TEXT can be "DER" or "PEM"
--policy_name TEXT	File name of the policy to be applied
--help	Show this message and exit.

5) ssscli set ecc pub:

```
Usage: ssscli set ecc pub [OPTIONS] keyid key
```

Set ECC Public Keys

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

key = Can be raw key (DER format) or in file. For file, by default filename with extension .pem considered as PEM format and others as DER format.

Options:

--format TEXT	Input key format. TEXT can be "DER" or "PEM"
--policy_name TEXT	File name of the policy to be applied
--help	Show this message and exit.

6) ssscli set rsa pair:

```
Usage: ssscli set rsa pair [OPTIONS] keyid key
```

Set RSA Key Pair

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

key = Can be raw key (DER format) or in file. For file, by default filename with extension .pem considered as PEM format and others as DER format.

Options:

--format TEXT	Input key format. TEXT can be "DER" or "PEM"
--policy_name TEXT	File name of the policy to be applied
--help	Show this message and exit.

7) ssscli set rsa pub:

```
Usage: ssscli set rsa pub [OPTIONS] keyid key
```

Set RSA Public Keys

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

(continues on next page)

(continued from previous page)

```
key = Can be raw key (DER format) or in file. For file, by default
filename with extension .pem considered as PEM format and others as DER
format.
```

Options:

--format TEXT	Input key format. TEXT can be "DER" or "PEM"
--policy_name TEXT	File name of the policy to be applied
--help	Show this message and exit.

9.7.3 Get Commands

These commands are used to retrieve/get objects/keys from the target secure subsystem.

1) ssscli get aes:

```
Usage: ssscli get aes [OPTIONS] keyid filename

Get AES Keys

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

filename = File name to store key. Data can be in PEM or DER format based
on file extension. By default filename with extension .pem in PEM format
and others in DER format.

Options:
--format TEXT Output file format. TEXT can be "DER" or "PEM"
--help Show this message and exit.
```

2) ssscli get cert:

```
Usage: ssscli get cert [OPTIONS] keyid filename

Get Certificate

keyid = 32bit Key ID. Should be in hex format. Example: 401286E6

filename = File name to store certificate. Data can be in PEM or DER
format based on file extension. By default filename with extension .pem
and .cer in PEM format and others in DER format.

Options:
--format TEXT Output file format. TEXT can be "DER" or "PEM"
--help Show this message and exit.
```

3) ssscli get ecc pair:

```
Usage: ssscli get ecc pair [OPTIONS] keyid filename

Get ECC Pair

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

filename = File name to store key. Data can be in PEM or DER format based
on file extension. By default filename with extension .pem in PEM format
```

(continues on next page)

(continued from previous page)

and others in DER format.

Options:

```
--format TEXT Output file format. TEXT can be "DER" or "PEM"  
--help Show this message and exit.
```

4) ssscli get ecc pub:

```
Usage: ssscli get ecc pub [OPTIONS] keyid filename  
  
Get ECC Pub  
  
keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001  
  
filename = File name to store key. Data can be in PEM or DER format based  
on file extension. By default filename with extension .pem in PEM format  
and others in DER format.  
  
Options:  
--format TEXT Output file format. TEXT can be "DER" or "PEM"  
--help Show this message and exit.
```

5) ssscli get rsa pair:

```
Usage: ssscli get rsa pair [OPTIONS] keyid filename  
  
Get RSA Pair  
  
keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001  
  
filename = File name to store key. Data can be in PEM or DER format based  
on file extension. By default filename with extension .pem in PEM format  
and others in DER format.  
  
Options:  
--format TEXT Output file format. TEXT can be "DER" or "PEM"  
--help Show this message and exit.
```

6) ssscli get rsa pub:

```
Usage: ssscli get rsa pub [OPTIONS] keyid filename  
  
Get RSA Pub  
  
keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001  
  
filename = File name to store key. Data can be in PEM or DER format based  
on file extension. By default filename with extension .pem in PEM format  
and others in DER format.  
  
Options:  
--format TEXT Output file format. TEXT can be "DER" or "PEM"  
--help Show this message and exit.
```

9.7.4 Generate Commands

These commands are used to generate objects/keys inside the target secure subsystem.

- 1) ssscli generate ecc:

```
Usage: ssscli generate ecc [OPTIONS] keyid [NIST_P192|NIST_P224|NIST_P256|NIST_P384|NIST_P521|Brainpool160|Brainpool192|Brainpool224|Brainpool1256|Brainpool320|Brainpool384|Brainpool512|Secp160k1|Secp192k1|Secp224k1|Secp256k1|ED_25519|MONT_DH_25519|MONT_DH_448]

Generate ECC Key

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

curvetype = ECC Curve type. can be one of "NIST_P192, NIST_P224, NIST_P256, NIST_P384, NIST_P521, Brainpool160, Brainpool192, Brainpool224, Brainpool1256, Brainpool320, Brainpool384, Brainpool512, Secp160k1, Secp192k1, Secp224k1, Secp256k1, ED_25519, MONT_DH_25519, MONT_DH_448"

Options:
--policy_name TEXT  File name of the policy to be applied
--help              Show this message and exit.
```

- 2) ssscli generate rsa:

```
Usage: ssscli generate rsa [OPTIONS] keyid [1024|2048|3072|4096]

Generate RSA Key

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

bits = Number of bits. can be one of "1024, 2048, 3072, 4096"

Options:
--policy_name TEXT  File name of the policy to be applied
--help              Show this message and exit.
```

9.7.5 Refpem Commands

These commands are used to get Reference/masked Keys usable by openssl engines.

- 1) ssscli refpem ecc pair:

```
Usage: ssscli refpem ecc pair [OPTIONS] keyid filename

Create reference PEM file for ECC Pair

keyid = 32bit Key ID. Should be in hex format. Example: 0x20E8A001

filename = File name to store key. Can be in PEM or DER or PKCS12 format based on file extension. By default filename with extension .pem in PEM format, .pfx or .p12 in PKCS12 format and others in DER format.

Options:
--format TEXT      Output file format. TEXT can be "DER" or "PEM" or "PKCS12"
```

(continues on next page)

(continued from previous page)

```
--password TEXT Password used for PKCS12 format.
--help Show this message and exit.
```

2) ssscli refpem ecc pub:

```
Usage: ssscli refpem ecc pub [OPTIONS] keyid filename

Create reference PEM file for ECC Pub

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

filename = File name to store key. Data Can be in PEM or DER format or
PKCS12 format based on file extension. By default filename with extension
.pem in PEM format, .pfx or .p12 in PKCS12 format and others in DER
format.

Options:
--format TEXT Output file format. TEXT can be "DER" or "PEM" or "PKCS12"
--password TEXT Password used for PKCS12 format.
--help Show this message and exit.
```

3) ssscli refpem rsa pair:

```
Usage: ssscli refpem rsa pair [OPTIONS] keyid filename

Create reference PEM file for RSA Pair

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

filename = File name to store key. Data Can be in PEM or DER format or
PKCS12 format based on file extension. By default filename with extension
.pem in PEM format, .pfx or .p12 in PKCS12 format and others in DER
format.

Options:
--format TEXT Output file format. TEXT can be "DER" or "PEM" or "PKCS12"
--password TEXT Password used for PKCS12 format.
--help Show this message and exit.
```

9.7.6 Se05x Commands

These are the SE05x specific commands.

1) ssscli se05x uid:

```
Usage: ssscli se05x uid [OPTIONS]

Get 18 bytes Unique ID from the SE05X Secure Module.

Options:
--help Show this message and exit.
```

2) ssscli se05x certuid:

Usage: ssscli se05x certuid [OPTIONS]

Get 10 bytes Cert Unique ID from the SE05X Secure Module. The cert uid is a subset of the Secure Module Unique Identifier

Options:

--help Show this message and exit.

3) ssscli se05x reset:

Usage: ssscli se05x reset [OPTIONS]

Resets the SE05X Secure Module to the initial state.

This command uses ``Se05x_API_DeleteAll_Iterative`` API of the SE05X MW to iterately delete objects provisioned inside the SE. Because of this, some objects are purposefully skipped from deletion.

It does not use the low level SE05X API ``Se05x_API_DeleteAll``

For more information, see documentation/implementation of the ``Se05x_API_DeleteAll_Iterative`` API.

Options:

--help Show this message and exit.

4) ssscli se05x readidlist:

Usage: ssscli se05x readidlist [OPTIONS]

Read contents of SE050

Options:

--help Show this message and exit.

9.7.7 A71CH Commands

These are the A71CH specific commands.

1) ssscli a71ch uid:

Usage: ssscli a71ch uid [OPTIONS]

Get uid from the A71CH Secure Module.

Options:

--help Show this message and exit.

2) ssscli a71ch reset:

Usage: ssscli a71ch reset [OPTIONS]

Resets the A71CH Secure Module to the initial state.

Options:

--help Show this message and exit.

9.7.8 POLICY Commands

These are Policy commands.

- 1) ssscli policy asymkey:

```
Usage: ssscli policy asymkey [OPTIONS] policy_name auth_obj_id

Create Asymmetric key object policy.

policy_name = File name of the policy to be created. This policy name
should be given as input while provisioning.

auth_obj_id = Auth object id for each Object Policy.

Options:
  --sign BOOLEAN          Object policy Allow Sign. Enabled by Default
  --verify BOOLEAN         Object policy Allow Verify. Enabled by
                           Default

  --encrypt BOOLEAN        Object policy Allow Encryption. Enabled by
                           Default

  --decrypt BOOLEAN        Object policy Allow Decryption. Enabled by
                           Default

  --key_derive BOOLEAN     Object policy Allow Key Derivation. Enabled
                           by Default

  --wrap BOOLEAN           Object policy Allow Wrap. Enabled by Default
  --generate BOOLEAN        Object policy Allow Generate. Enabled by
                           Default

  --write BOOLEAN          Object policy Allow Write. Enabled by
                           Default

  --read BOOLEAN           Object policy Allow Read. Enabled by Default
  --import_export BOOLEAN   Object policy Allow Import Export. Enabled
                           by Default

  --key_agreement BOOLEAN  Object policy Allow Key Agreement. Enabled
                           by Default

  --attest BOOLEAN          Object policy Allow attestation. Enabled by
                           Default

  --forbid_derived_output BOOLEAN
                           Object policy Forbid Derived Output.
                           Disabled by Default

  --help                   Show this message and exit.
```

- 2) ssscli policy symkey:

```
Usage: ssscli policy symkey [OPTIONS] policy_name auth_obj_id

Create Symmetric key object policy.
```

(continues on next page)

(continued from previous page)

```

policy_name = File name of the policy to be created. This policy name
should be given as input while provisioning.

auth_obj_id = Auth object id for each Object Policy.

Options:
--sign BOOLEAN          Object policy Allow Sign. Enabled by Default
--verify BOOLEAN         Object policy Allow Verify. Enabled by
                        Default

--encrypt BOOLEAN        Object policy Allow Encryption. Enabled by
                        Default

--decrypt BOOLEAN        Object policy Allow Decryption. Enabled by
                        Default

--key_derive BOOLEAN     Object policy Allow Key Derivation. Enabled
                        by Default

--wrap BOOLEAN           Object policy Allow Wrap. Enabled by Default
--generate BOOLEAN        Object policy Allow Generate. Enabled by
                        Default

--write BOOLEAN          Object policy Allow Write. Enabled by
                        Default

--import_export BOOLEAN   Object policy Allow Import Export. Enabled
                        by Default

--desfire_auth BOOLEAN    Object policy Allow to perform DESFire
                        authentication. Enabled by Default

--desfire_dump BOOLEAN    Object policy Allow to dump DESFire session
                        keys. Enabled by Default

--forbid_derived_output BOOLEAN
                        Object policy Forbid Derived Output.
                        Disabled by Default

--kdf_ext_random BOOLEAN  Object policy Allow key derivation ext
                        random. Enabled by Default

--help                   Show this message and exit.

```

3) ssscli policy file:

```

Usage: ssscli policy file [OPTIONS] policy_name auth_obj_id

Create Binary file object policy.

policy_name = File name of the policy to be created. This policy name
should be given as input while provisioning.

auth_obj_id = Auth object id for each Object Policy.

Options:
--write BOOLEAN  Object policy Allow Write. Enabled by Default

```

(continues on next page)

(continued from previous page)

```
--read BOOLEAN Object policy Allow Read. Enabled by Default
--help Show this message and exit.
```

4) ssscli policy counter:

```
Usage: ssscli policy counter [OPTIONS] policy_name auth_obj_id

Create Counter object policy.

policy_name = File name of the policy to be created. This policy name
should be given as input while provisioning.

auth_obj_id = Auth object id for each Object Policy.

Options:
--write BOOLEAN Object policy Allow Write. Enabled by Default
--read BOOLEAN Object policy Allow Read. Enabled by Default
--help Show this message and exit.
```

5) ssscli policy userid:

```
Usage: ssscli policy userid [OPTIONS] policy_name auth_obj_id

Create user id object policy.

policy_name = File name of the policy to be created. This policy name
should be given as input while provisioning.

auth_obj_id = Auth object id for each Object Policy.

Options:
--write BOOLEAN Object policy Allow Write. Enabled by Default
--help Show this message and exit.
```

6) ssscli policy common:

```
Usage: ssscli policy common [OPTIONS] policy_name auth_obj_id

Create common object policy.

policy_name = File name of the policy to be created. This policy name
should be given as input while provisioning.

auth_obj_id = Auth object id for each Object Policy.

Options:
--forbid_all BOOLEAN Object policy forbid all. Disabled by Default
--delete BOOLEAN Object policy Allow Delete. Enabled by Default
--req_sm BOOLEAN Object policy Allow req_sm. Disabled by Default
--help Show this message and exit.
```

7) ssscli policy commonpcrvalue:

```
Usage: ssscli policy commonpcrvalue [OPTIONS] policy_name auth_obj_id

Create Common PCR Value object policy.
```

(continues on next page)

(continued from previous page)

```

policy_name = File name of the policy to be created. This policy name
should be given as input while provisioning.

auth_obj_id = Auth object id for each Object Policy.

Options:
--pcr_obj_id TEXT          Object policy PCR object ID. Zero by Default
--pcr_expected_value TEXT   Object policy PCR Expected Value. Zero by Default
--help                      Show this message and exit.

```

8) ssscli policy dump:

```

Usage: ssscli policy dump [OPTIONS] policy_name

Display Created object policy.

policy_name = File name of the policy to be displayed.

Options:
--help  Show this message and exit.

```

9.8 CLI Data formats

9.8.1 DER

DER or Distinguished Encoding Rules files are digital certificates in binary format, instead of the ASCII PEM format. DER files may end with .der or .cer, so to differentiate between DER.cer and PEM.cer files, you may need to use a text editor to read the file. A DER file should not have any BEGIN/END statements and will show garbled binary content.

The file as seen in *hexl-mode* of emacs would look as below:

```

00000000: 3081 8702 0100 3013 0607 2a86 48ce 3d02 0.....0....*.H=.
00000010: 0106 082a 8648 ce3d 0301 0704 6d30 6b02 ....*.H.=....m0k.
00000020: 0101 0420 084f 2d70 eee4 09b9 5546 462e .... .O-p....UFF.
00000030: 2cca 12e0 a046 90a3 3bea 8252 eeb5 4ff5 ,....F...;...R..O.
00000040: a4e9 b2d6 a144 0342 0004 633e 938a 67a7 .....D.B..c>..g.
00000050: a9e6 f35f c369 3b51 3c88 6a0d c260 16f3 ...._.i;Q<.j...`...
00000060: 5e8c 2c0b 491b 2392 7af0 371d 28b1 1bfb ^.,.I.#.z.7.(...
00000070: e8f4 2e9c 5b0f 2897 c516 ec3e 7d62 97e4 ....[.({....>}b..
00000080: c06f 936d ba9d ac8a bcd8 .o.m.....
-UU=:----F1  ecc_NIST_P256_prv_pkcs8.der    All L1      (Hexl) -----

```

9.8.2 PEM

PEM or [Privacy Enhanced Mail](#) is a Base64 encoded DER certificate. PEM certificates are frequently used for web servers as they can easily be translated into readable data using a simple text editor. PEM file extension may contain .pem or .cer, so to differentiate when a PEM encoded file is opened in a text editor, it contains very distinct headers and footers.

Example:

```
-----BEGIN PRIVATE KEY-----
MIGHAgEAMBMGByqGSM49AgEGCCqGSM49AwEHBG0wawIBAQgCE8tcO7kCblVRkYu
LMoS4KBGkKM76oJS7rVP9aTpstahRANCAArjPpOKZ6ep5vNfw2k7UTyIag3CYBbz
XowsC0kbI5J68DcdKLEb++j0LpxbDyiXxRbsPn1il+TAb5Ntup2sirzY
-----END PRIVATE KEY-----
```

9.8.3 HEX

Hex or [Hexadecimal](#) (base 16) is a positional system that represents numbers using a base of 16.

Example:

```
308187020100301306072a8648ce3d020106082a8648ce3d030107046d306b02
01010420084f2d70eee409b95546462e2cca12e0a04690a33bea8252eeb54ff5
a4e9b2d6a14403420004633e938a67a7a9e6f35fc3693b513c886a0dc26016f3
5e8c2c0b491b23927af0371d28b11bfbe8f42e9c5b0f2897c516ec3e7d6297e4
c06f936dba9dac8abcd8
```

9.8.4 REFERENCE KEY

- Refer to Section 8.1.2 [EC Reference key format](#) for EC reference key format.
- Refer to Section 8.1.2 [RSA Reference key format](#) for RSA reference key format.

9.9 Object Policies Through ssscli

Applying policy to objects through ssscli shall be done in two steps.

- Create object policy
- Attach policy to object

9.9.1 Create object policy

Object policy shall be created using following command:

```
ssscli policy
```

The create command has symkey, asymkey, userid, file, counter, pcr, common and commonpcrvalue sub commands.

- symkey -> Symmetric key object policy (AES, DES, HMAC)
- asymkey -> Asymmetric key object policy (RSA, EC)

- `userid` -> User ID Object Policy
- `file` -> Binary file Object Policy
- `counter` -> Counter Object Policy
- `pcr` -> PCR Object Policy
- `common` -> Common Object Policy
- `commonpcrvalue` -> Common PCR Value Object Policy

Each command has mandatory arguments for `policy_name` and `auth_object_id`.

- `policy_name` -> Name of the policy to be created. This policy name should be given as input while provisioning.
- `auth_object_id` -> Auth object id for each Object Policy

Create policy command shall have following optional arguments based on the sub command selected:

- `--sign` -> Object policy Allow Sign. Enabled by Default. Parameter type is boolean.
- `--verify` -> Object policy Allow Verify. Enabled by Default. Parameter type is boolean.
- `--encrypt` -> Object policy Allow Encryption. Enabled by Default. Parameter type is boolean.
- `--decrypt` -> Object policy Allow Decryption. Enabled by Default. Parameter type is boolean.
- `--key_derive` -> Object policy Allow Key Derivation. Enabled by Default. Parameter type is boolean.
- `--wrap` -> Object policy Allow Wrap. Enabled by Default. Parameter type is boolean.
- `--generate` -> Object policy Allow Generate. Enabled by Default. Parameter type is boolean.
- `--write` -> Object policy Allow Write. Enabled by Default. Parameter type is boolean.
- `--read` -> Object policy Allow Read. Enabled by Default. Parameter type is boolean.
- `--import_export` -> Object policy Allow Import Export. Enabled by Default. Parameter type is boolean.
- `--key_agreement` -> Object policy Allow Key Agreement. Enabled by Default. Parameter type is boolean.
- `--attest` -> Object policy Allow attestation. Enabled by Default. Parameter type is boolean.
- `--desfire_auth` -> Object policy Allow to perform DESFire authentication. Enabled by Default. Parameter type is boolean.
- `--desfire_dump` -> Object policy Allow to dump DESFire session keys. Enabled by Default. Parameter type is boolean.
- `--forbid_all` -> Object policy forbid all. Disabled by Default. Parameter type is boolean.
- `--delete` -> Object policy Allow Delete. Enabled by Default. Parameter type is boolean.
- `--req_sm` -> Object policy Allow req_sm. Enabled by Default. Parameter type is boolean.
- `--pcr_obj_id` -> Object policy PCR object ID. Zero by Default. Parameter type is hexdecimal.
- `--pcr_expected_value` -> Object policy PCR Expected Value. Zero by Default. Parameter type is hexdecimal.
- `--forbid_derived_output` -> Object policy forbid derived output. Disabled by Default. Parameter type is boolean.
- `--kdf_ext_random` -> Object policy key derivation external random. Enabled by Default. Parameter type is boolean.

The created object policy stored in the system in pickle file format.

Command Sample:

```
(venv) C:\_ddm\simw-top\pycli>ssscli policy asymkey --help
Usage: ssscli policy asymkey [OPTIONS] policy_name auth_obj_id

  Create Asymmetric key object policy.

  policy_name = File name of the policy to be created. This policy name
  should be given as input while provisioning.

  auth_obj_id = Auth object id for each Object Policy.

Options:
  --sign BOOLEAN          Object policy Allow Sign. Enabled by Default
  --verify BOOLEAN         Object policy Allow Verify. Enabled by
                           Default
  --encrypt BOOLEAN        Object policy Allow Encryption. Enabled by
                           Default
  --decrypt BOOLEAN        Object policy Allow Decryption. Enabled by
                           Default
  --key_derive BOOLEAN     Object policy Allow Key Derivation. Enabled
                           by Default
  --wrap BOOLEAN           Object policy Allow Wrap. Enabled by Default
  --generate BOOLEAN        Object policy Allow Generate. Enabled by
                           Default
  --write BOOLEAN          Object policy Allow Write. Enabled by
                           Default
  --read BOOLEAN           Object policy Allow Read. Enabled by Default
  --import_export BOOLEAN   Object policy Allow Import Export. Enabled
                           by Default
  --key_agreement BOOLEAN  Object policy Allow Key Agreement. Enabled
                           by Default
  --attest BOOLEAN          Object policy Allow attestation. Enabled by
                           Default
  --forbid_derived_output BOOLEAN
                           Object policy Forbid Derived Output.
                           Disabled by Default
  --help                   Show this message and exit.
```

Usage example:

```
ssscli policy asymkey ecc_sign_policy 0x7DA00001 --sign 0
ssscli policy common ecc_sign_policy 0x7DA00001
```

Created object policy shall be displayed using following command:

```
ssscli policy dump <policy_name>
```

Usage example:

```
(venv) C:\_ddm\simw-top\pycli>ssscli policy dump ecc_sign_policy
Reading policy from file path:
c:\_ddm\simw-top\pycli\policy\ssscli_obj_policy_ecc_sign_policy.pkl

Created object policy:

Key_type          : Asymmetric_Key
Auth Obj ID       : 0x7DA00001
Sign              : False
Verify             : True
Encrypt            : True
Decrypt            : True
Key Derive         : True
Wrap               : True
Generate           : True
Write              : True
Read               : True
Import Export      : True
Key Agreement      : True
Attestation        : True
forbid_derived_output : False

Key_type          : common
Auth Obj ID       : 0x7DA00001
forbid_all         : False
Delete             : True
req_sm             : False

Policy in hex:

08 7D A0 00 01 0F FC 10 00
```

9.9.2 Attach policy to object

Created object policy shall be applied it to the object along with generate or set command using --policy_name optional parameter.

Command Sample:

```
(venv) C:\workspace\iot\simw-top\pycli>ssscli generate ecc --help
Usage: ssscli generate ecc [OPTIONS] keyid [NIST_P192|NIST_P224|NIST_P256|NIST
                           _P384|NIST_P521|Brainpool160|Brainpool192|Brainpool
                           224|Brainpool256|Brainpool320|Brainpool384|Brainpoo
                           l512|Secp160k1|Secp192k1|Secp224k1|Secp256k1|ED_255
                           19|MONT_DH_25519|MONT_DH_448]

Generate ECC Key

keyid = 32bit Key ID. Should be in hex format. Example: 20E8A001

curvetype = ECC Curve type. can be one of "NIST_P192, NIST_P224,
NIST_P256, NIST_P384, NIST_P521, Brainpool160, Brainpool192, Brainpool224,
Brainpool256, Brainpool320, Brainpool384, Brainpool512, Secp160k1,
Secp192k1, Secp224k1, Secp256k1, ED_25519, MONT_DH_25519, MONT_DH_448"

Options:
--policy_name TEXT  File name of the policy to be applied
--help              Show this message and exit.
```

Usage example:

```
ssscli generate ecc 0x20181001 NIST_P256 --policy_name ecc_sign_policy
ssscli set ecc pair 0x20182010 nistp521_key.pem --policy_name ecc_sign_policy
```

9.10 Upload keys and certificates to SE05X using ssscli tool

- 1) Refer to [CLI Tool](#) for ssscli tool setup
- 2) Keys and Certificates can be uploaded to SE05X using the ssscli tool

```
ssscli connect se05x vcom <COMPORT>
ssscli se05x reset
ssscli set ecc pair <KEYID> path-to-key/<KEY_FILE>.pem
ssscli set cert <KEYID> path-to-certificate/<CERTIFICATE_FILE>.crt
ssscli disconnect
```

Note: ssscli se05x reset will delete all the existing keys and certificates

10.1 A71CH and SSS API

10.1.1 Introduction

The Plug&Trust Middleware provides support for the A71CH secure element through the SSS API. The full scope of the A71CH legacy API or the HLSE API is not covered by the SSS API. For use cases where this applies it's possible to use both SSS and A71CH API's (*Mixing SSS API and A71CH API*).

The A71CH support as included in the Plug&Trust Middleware, is derived from the A71CH Host Software package as available on www.nxp.com/a71ch. The `hostlib` directory contains refactored code that was previously published on www.nxp.com/a71ch.

This Plug&Trust Middleware provides the following additional functionality related to the A71CH:

- Compatibility with OpenSSL 1.1
- Support for the SSS API
- Cloud demos using SSS API
- OpenSSL Engine using SSS API

The following - as previously contained in the A71CH Host Software package - is no longer supported:

- Cloud demos using A71CH API (replaced by SSS API based cloud demos)

The SW build system is based upon cmake.

10.1.2 A71CH API to SSS API mapping

The following table provides an overview of the A71CH API's that can be replaced by SSS API's. As the usage of the SSS API is conceptually different from the A71CH API, there is no one-to-one replacement of API calls. Please consult *SSS APIs* for an introduction on using the SSS API and the applicable examples in [Section 5.2.1 SSS API Examples](#).

The SSS Session concept - as applicable to A71CH - is restricted to establishing a connection between Host and Secure Element. Establishing an SCP03 session is orthogonal to the Session concept.

SSS specific policies are not applicable to A71CH.

A71CH or HLSE API	SSS equivalent available	
a71ch_crypto_derive		
A71_HkdfExpandSymKey	YES	sss_derive_key_*

Continued on next page

Table 1 – continued from previous page

A71_HkdfSymKey	YES	sss_derive_key_*
A71_PskDeriveMasterSecret	NO	
A71_EcdhPskDeriveMasterSecret	NO	
A71_GetHmacSha256	YES	sss_mac_*
A71_HmacSha256Init	YES	sss_mac_*
A71_HmacSha256Update	YES	sss_mac_*
A71_HmacSha256Final	YES	sss_mac_*
a71ch_crypto_ecc		
A71_GenerateEccKeyPair	YES	sss_key_store_generate_key
A71_GenerateEccKeyPairWithChallenge	NO	
A71_GenerateEccKeyPairWithCode	NO	
A71_EccSign	YES	sss_asymmetric_sign_digest
A71_EccNormalizedAsnSign	NO	
A71_EccRestrictedSign	NO	
A71_EccVerify	YES	sss_asymmetric_verify_digest
A71_EcdhGetSharedSecret	YES	sss_derive_key_*
a71ch_module		
A71_GetCredentialInfo	NO	
A71_GetModuleInfo	NO	
A71_GetUniqueID	YES	sss_session_prop_get_ae8
A71_GetCertUid	YES	sss_session_prop_get_ae9
A71_GetUnlockChallenge	NO	
A71_GetKeyPairChallenge	NO	
A71_GetPublicKeyChallenge	NO	
A71_GetRandom	YES	sss_rng_get_random
A71_CreateClientHelloRandom	NO	
A71_GetRestrictedKeyPairInfo	NO	
A71_GetSha256	YES	sss_digest_one_go
A71_Sha256Init/Update/Final	YES	sss_digest_*
A71.InjectLock	NO	
A71_LockModule	NO	
A71_UnlockModule	NO	
A71_SetTlsLabel	NO	
A71_EccVerifyWithKey	NO	
a71ch_sst		
A71_Erase_*_WithChallenge	NO	
A71_Erase_*_WithCode	NO	
A71_EraseEccKeyPair	YES	sss_key_store_erase_key
A71_EraseEccPublicKey	YES	sss_key_store_erase_key
A71_EraseSymKey	NO	
A71_Freeze_*_WithChallenge	NO	
A71_Freeze_*_WithCode	NO	
A71_FreezeEccKeyPair	YES	sss_key_store_freeze_key
A71_FreezeEccPublicKey	YES	sss_key_store_freeze_key
A71_FreezeGpData	NO	
A71_FreezeSymKey	NO	
A71_GetCounter	NO	

Continued on next page

Table 1 – continued from previous page

A71_GetEccKeyPairUsage	NO	
A71_GetEccPublicKey	YES	sss_key_store_get_key
A71_GetGpData	NO	
A71_GetPublicKeyEccKeyPair	YES	sss_key_store_get_key
A71_IncrementCounter	NO	
A71_SetConfigKey	NO	
A71_SetCounter	NO	
A71_SetEccKeyPair	YES	sss_key_store_set_key
A71_SetEccPublicKey	YES	sss_key_store_set_key
A71_SetGpData	NO	
A71_SetGpDataWithLockCheck	NO	
A71_SetRfc3394WrappedAesKey	NO	
A71_SetRfc3394WrappedConfigKey	NO	
A71_SetSymKey	YES	sss_key_store_set_key
HLSE		
HLSE_GetObjectAttribute		
HLSE_SetObjectAttribute		
HLSE_EraseObject		
HLSE_CreateObject		

10.1.3 Mixing SSS API and A71CH API

The Plug&Trust Middleware contains two examples illustrating how to use both the SSS API and the A71CH API from the same application.

ECC Example

The example uses the SSS API to sign and verify the digest. The example is available at `.../simw-top/demos/a71ch/ex_a71ch_sss_ecc.c`.

```

status = sss_asymmetric_context_init(&ctx_asymm, &pCtx->session, &keyPair,
→kAlgorithm_SSS_SHA256, kMode_SSS_Sign);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

signatureLen = sizeof(signature);
/* Do Signing */
LOG_I("Do Signing");
LOG_MAU8_I("digest", digest, digestLen);
status = sss_asymmetric_sign_digest(&ctx_asymm, digest, digestLen, signature, &
→signatureLen);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);
LOG_MAU8_I("signature", signature, signatureLen);
LOG_I("Signing Successful !!!");
sss_asymmetric_context_free(&ctx_asymm);

```

Next the example uses an A71CH API (A71_GetPublicKeyEccKeyPair) to retrieve the public key from the A71CH. The A71CH specific key index is retrieved from the SSS object matching the key pair.

```

/* Access the A71CH with the (legacy) Host API */
SST_Index_t keyIdx = (((sss_sscp_object_t *)&keyPair)->slotId) & 0x0F;

```

(continues on next page)

(continued from previous page)

```

U8 pubEccKeyScratch[128];
U16 pubEccKeyScratchLen = 0;

LOG_I ("A71_GetPublicKeyEccKeyPair(0x%02x)", keyIdx);
pubEccKeyScratchLen = sizeof(pubEccKeyScratch);
sw = A71_GetPublicKeyEccKeyPair(keyIdx, pubEccKeyScratch, &
→pubEccKeyScratchLen);
status = ((sw == SW_OK) ? kStatus_SSS_Success : kStatus_SSS_Fail);

```

AES key wrapping Example

The example uses the SSS API to set the AES key and the A71CH API to set the same AES key which is wrapped. Further to verify if the wrapped key is injected properly, a hkdf key is derived using both AES keys. The example is available at `.../simw-top/demos/a71ch/ex_a71ch_sss_aes_wrap_key`.

Injecting wrapped AES key starts with setting AES key which is used as KEK,

```

status = sss_key_object_init(&aesObj1, &pCtx->ks);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

status = sss_key_object_allocate_handle(&aesObj1,
    MAKE_TEST_ID(__LINE__),
    kSSS_KeyPart_Default,
    kSSS_CipherType_AES,
    sizeof(aesKey),
    kKeyObject_Mode_Persistent);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

status = sss_key_store_set_key(&pCtx->ks, &aesObj1, aesKey, sizeof(aesKey), ↵
→sizeof(aesKey) * 8, NULL, 0);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

```

Now inject the wrapped AES key using the A71CH API - `A71_SetRfc3394WrappedAesKey`. Wrapped key length should be 24 bytes. Large keys can be set by calling the `A71_SetRfc3394WrappedAesKey` API multiple times and by incrementing the key index every time.

```

keyIdx = (((sss_sscp_object_t *)&aesObj1)->slotId) & 0x0F;

/* Set wrapped aes key - aesKey1 */
sw = A71_SetRfc3394WrappedAesKey(keyIdx, wapped_AesKey1_0, sizeof(wapped_
→AesKey1_0));
status = ((sw == SW_OK) ? kStatus_SSS_Success : kStatus_SSS_Fail);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

sw = A71_SetRfc3394WrappedAesKey(keyIdx + 1, wapped_AesKey1_1, sizeof(wapped_
→AesKey1_1));
status = ((sw == SW_OK) ? kStatus_SSS_Success : kStatus_SSS_Fail);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

```

Now verify if wrapped key injected is set correctly.

```

/* 1 - Calculate HKDF key with wrapped AES key injected - aesKey1 */
status = calculate_hkdf_key(pCtx, aesObj1, MAKE_TEST_ID(__LINE__), HkdfKey1, &
→HkdfKey1Len);

```

(continues on next page)

(continued from previous page)

```

/* 2 - Inject aesKey1 AES key and calculate HKDF key */
status = sss_key_object_init(&aesObj2, &pCtx->ks);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

status = sss_key_object_allocate_handle(&aesObj2,
    MAKE_TEST_ID(__LINE__),
    kSSS_KeyPart_Default,
    kSSS_CipherType_AES,
    sizeof(aesKey1),
    kKeyObject_Mode_Persistent);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

status = sss_key_store_set_key(&pCtx->ks, &aesObj2, aesKey1, sizeof(aesKey1),
    sizeof(aesKey1) * 8, NULI, 0);
ENSURE_OR_GO_CLEANUP(status == kStatus_SSS_Success);

status = calculate_hkdf_key(pCtx, aesObj2, MAKE_TEST_ID(__LINE__), HkdfKey2, &
    HkdfKey2Len);

/* 3 - compare both hkdf keys generated */
if (0 != memcmp(HkdfKey1, HkdfKey2, HkdfKey1Len)) {
    status = kStatus_SSS_Fail;
}

```

10.1.4 SSS Object Identifier to A71CH Internal storage mapping

The SSS API uses a 32 bit unsigned value as key (object) identifier. The A71CH GP Storage contains the mapping between these key identifiers and A71CH internal storage as a dedicated data object of 160 byte.

The resulting A71CH KeyStore can contain upto:

- 4 ECC Key Pairs
- 3 ECC Public Keys
- 8 Symmetric Keys
- 4 Certificates

Any additional data object storage is only available through HLSE API calls (*A71CH Legacy HLSE (Generic) API*).

10.2 Miscellaneous

10.2.1 Demos and examples supported on A71CH

Refer to *DEMO List* to see the list of demo applications supported on A71CH. Make the following changes when testing with A71CH.

- 1) Set the Applet to A71CH and SMCOM to SCI2C in the build configuration and rebuild the middleware.
- 2) To provision A71CH for cloud application, change the *subsystem* to *a71ch* in .../simw-top/pycli/src/Provision/Provision_config.py file.

```
SUBSYSTEM = "a71ch"
```

- 3) When testing cloud application on linux platform, set the OPENSSL_CONF to A71CH specific openssl config files - openssl_sss_a71ch.cnf (for openssl 1.0) / openssl111_sss_a71ch.cnf (for openssl 1.1).

10.2.2 OpenSSL Engine

The Plug&Trust MW comes with two OpenSSL Engine implementations, both implementations support OpenSSL 1.1.1:

- SSS API based (A71CH SSS OpenSSL Engine)
- A71CH Legacy API based (A71CH Legacy OpenSSL Engine)

The reference key format and the tools supporting the reference keys are **different and incompatible**.

The implementation using the SSS API is documented in *Introduction on OpenSSL engine* and resides in `.../sss/plugin/openssl`. The functionality of the engine is restricted to EC NIST P-256 keys.

The implementation using the A71CH Legacy API resides in `.../hostlib/hostlib/embSeEngine`.

The reference key format used by the SSS OpenSSL Engine refers to the stored EC key by SSS Object Identifier. It relies upon the SSS Object Identifier to A71CH Internal storage mapping table (*A71CH and SSS API*) to locate the stored EC key in the attached A71CH.

The reference key format used by the A71CH Legacy OpenSSL Engine refers to the stored EC key by key class and key index. Both key class and index are specific to the A71CH secure element. The following provides an example of reference key format used by the A71CH Legacy OpenSSL Engine. The value reserved for the private key has been used to contain:

- a pattern of `0x10..00` to fill up the datastructure MSB side to the desired key length
- a 64 bit magic number (always `0xA5A6B5B6A5A6B5B6`)
- a byte (`0xkk`) to contain the key class (`0x10` for key pair and `0x20` for public key)
- a byte (`0xii`) to contain the key index (`0x00` to `0x03` for key pair and `0x00` to `0x02` for public key)

```
Private-Key: (256 bit)
priv:
    10:00:00:00:00:00:00:00:00:00:00:00:00:00:00:00:
    00:00:00:00:00:00:A5:A6:B5:B6:A5:A6:B5:B6:
    kk:ii
pub:
    04:1C:93:08:8B:26:27:BA:EA:03:D1:BE:DB:1B:DF:
    8E:CC:87:EF:95:D2:9D:FC:FC:3A:82:6F:C6:E1:70:
    A0:50:D4:B7:1F:F2:A3:EC:F8:92:17:41:60:48:74:
    F2:DB:3D:B4:BC:2B:F8:FA:E8:54:72:F6:72:74:8C:
    9E:5F:D3:D6:D4
ASN1 OID: prime256v1
```

10.2.3 A71CH and SCP03

Enabling SCP03 channel encryption on the A71CH is a two step process:

- [Phase-0] First the SCP03 keys must be set on the A71CH. The SCP03 keys can only be set once!
- [Phase-1] Once the SCP03 keys are set on the A71CH an SCP03 channel can be established between Host and A71CH. In case an SCP03 channel has been established successfully, the use of SCP03 becomes mandatory for all subsequent communication between Host and A71CH.

In the SSS API based example applications, two utility functions are used to support SCP03 channel encryption:

- `ex_a71ch_SetSeScp03Keys` is used to set the keys as required for [Phase-0]
- `SCP_Authenticate` is used to establish the SCP03 channel [Phase-1]

The example code (`sss/ex/inc/ex_sss_main_inc.h`) always combines these two steps and depends on the ‘Debug Reset’ command for this. In a product deployment the two phases must be distinct. [Phase-0] is only executed once. Ensure that the SCP03 keys are securely and persistently stored on the host.

To enable SCP03 in the SSS API examples one must set the following Cmake options:

```
-DA71CH_AUTH=SCP03
-DSCP=SCP03_HostCrypto
```

Please refer to [CMake Options](#) for more details and an overview of all available Cmake options.

Note: The Plug&Trust MW also contains example code illustrating the setting up of an SCP03 channel between Host and Secure Element for applications based upon the A71CH API: please refer to `hostlib/a71ch/ex/mainA71CH.c`

10.2.4 A71CH on Raspberry Pi

When building the stack for A71CH on Raspberry Pi, set the following cmake options

```
cmake -DApplet=A71CH -DSMCOM=SCI2C .
```

The default i2c master of Raspberry Pi doesn’t support the SMBUS ‘block read’ feature required for the sci2c protocol. As a workaround a software implementation of an i2c master must be used.

Add the following line to `/boot/config.txt` on the Raspberry Pi SD card and reboot:

```
dtoverlay=i2c-gpio,bus=4,i2c_gpio_delay_us=1,_i2c_gpio_sda=23,i2c_gpio_scl=24
```

This will create a `/dev/i2c-4` i2c port on Raspberry Pi.

Modify `.../simw-top/hostlib/hostLib/platform/linux/i2c_a7.c` for correct i2c port

```
static char* default_axSmDevice_name = "/dev/i2c-4";
```

The following table illustrates the connections to make between the Raspberry Pi Header and the A71CH.

Table 2: A71CH pin connections

Raspberry Pi Header	A71CH
Pin# 1	Power
Pin# 6	Ground
Pin# 16	I2C Data
Pin# 18	I2C Clock

10.3 A71CH Legacy API

10.3.1 Introduction

The A71CH Legacy API encapsulates the APDU calls supported by the A71CH security module. The standard A71CH security module supports the following functionality:

- Secure storage, generation, insertion or deletion of ECC key pairs (ECC NIST P-256).
- Secure storage, insertion or deletion of ECC public keys.
- Signature generation and verification (ECDSA)
- Shared secret calculation for Key Agreement (ECDH or ECDH-E)
- Secure storage and use of monotonic counters (32 bits each)
- Secure storage, insertion or deletion of symmetric keys (128 bits); symmetric keys can be concatenated to form longer keys
- Retrieval of unique chip ID.
- HKDF using the symmetric secrets as key, Extract & Expand or Expand only.
- HMAC SHA256 calculation
- Freezing of credentials (= OTP behavior)
- An optional secure channel with the host MCU (conform Global Platform SCP03).

The Debug Mode variant of the A71CH security module, which can be ordered on evaluation kits, supports the following additional functionality:

- A set of debug commands to facilitate integration of the A71CH in a host application.
- Possibility to permanently disable these debug commands

Note: In the remainder of this document the A71CH Legacy API is simply called A71CH API

10.3.2 A71CH API


The A71CH API is made up of four parts:

- A71CH specific functionality (`.../hostlib/inc/a71ch_api.h`)
 - *Crypto Derive API* deals with deriving secrets, hmacs etc. from stored secrets
 - *Ecc Key API* deals with ECC crypto building blocks as ECDSA signing and verification and ECDH
 - *Module API* deals with functions not related to stored crypto credentials
 - *Secure Storage (SST) API* deals with storing, retrieving, erasing and locking credentials
- Data link communication functionality (`sm_connect.c`)
- Secure channel functionality (`ax_scp.h`). The implementation resides in `ax_scp.c` and `scp_a7x.c`.
- A71CH Debug Mode variant functionality (`a71_debug.c`)

10.3.3 SW structure


OpenSSL

The following picture illustrates the Host Library in the context of the Host SW with OpenSSL

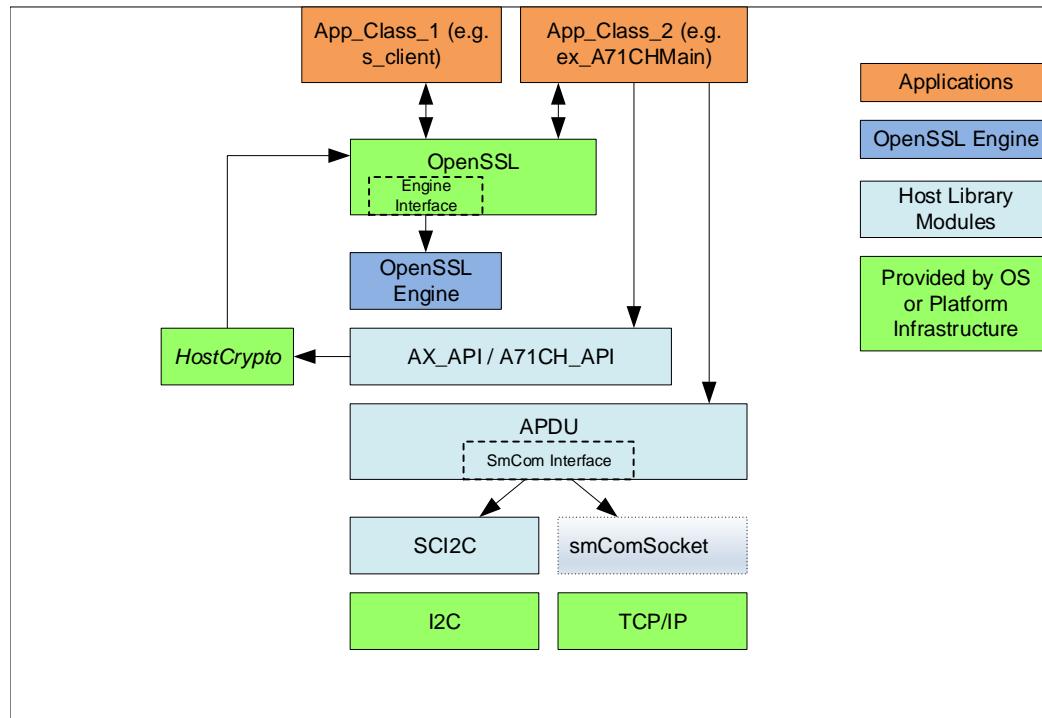

mbed TLS

The following picture illustrates the Host Library in the context of the Host SW with mbed TLS

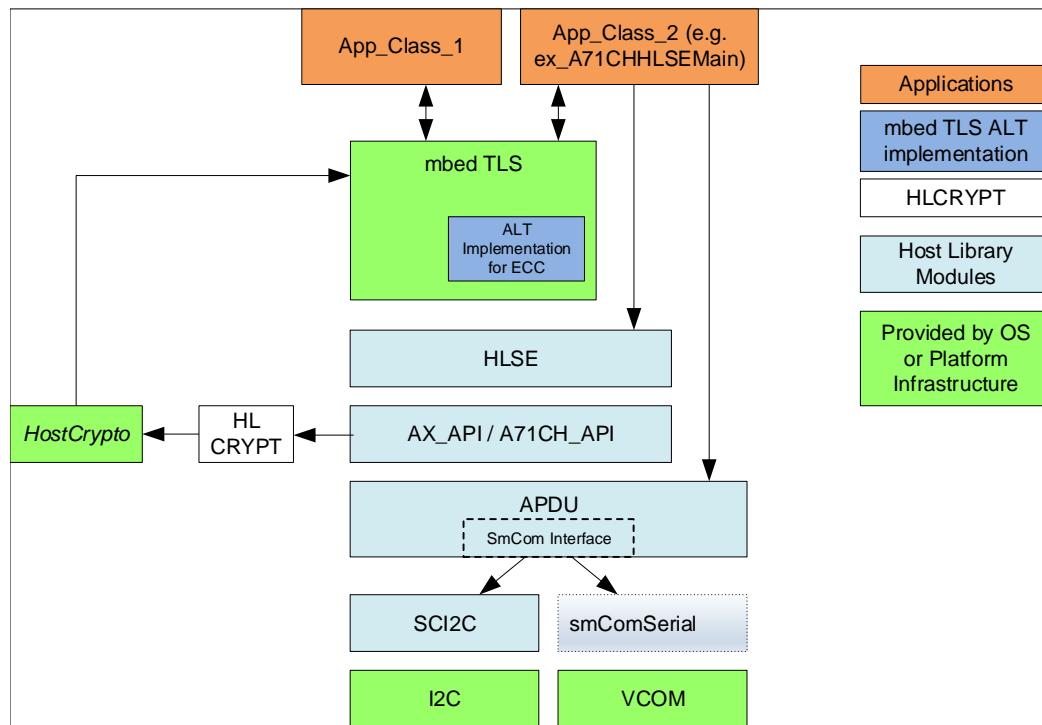

10.3.4 API details

Module API

Description Wrap module centric APDU functionality of the A71CH

Functions

U16 **A71_GetCredentialInfo** (U8 **map*, U16 **mapLen*)

Get credential info from Module (in raw format)

Parameters

- [inout] *map*:
- [inout] *mapLen*:

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_GetModuleInfo** (U16 **selectResponse*, U8 **debugOn*, U8 **restrictedKpIdx*, U8 **transportLockState*, U8 **scpState*, U8 **injectLockState*, U16 **gpStorageSize*)

Get info on Module

Parameters

- [out] *selectResponse*: Encodes applet revision and whether Debug Mode is available
- [out] *debugOn*: Equals 0x01 when the Debug Mode is available

- [out] restrictedKpIdx: Either the index of the restricted keypair or A71CH_NO_RESTRICTED_KP
- [out] transportLockState: The value retrieved is one of A71CH_TRANSPORT_LOCK_STATE_LOCKED, A71CH_TRANSPORT_LOCK_STATE_UNLOCKED or A71CH_TRANSPORT_LOCK_STATE_ALLOW_LOCK
- [out] scpState: The value retrieved is one of A71CH_SCP_MANDATORY, A71CH_SCP_NOT_SET_UP or A71CH_SCP_KEYS_SET
- [out] injectLockState: The value retrieved is one of A71CH_INJECT_LOCK_STATE_LOCKED or A71CH_INJECT_LOCK_STATE_UNLOCKED
- [out] gpStorageSize: Total storage size (in byte) of the General Purpose data store

Return Value

- ::SW_OK: Upon successful execution

U16 A71_GetUniqueId (U8 *uid, U16 *uidLen)
Get Unique Identifier from the Secure Module

Parameters

- [inout] uid: IN: buffer to contain uid; OUT: uid retrieved from Secure Module
- [inout] uidLen: IN: Size of buffer provided (at least A71CH_MODULE_UNIQUE_ID_LEN byte); OUT: length of retrieved unique identifier (expected to be A71CH_MODULE_UNIQUE_ID_LEN byte)

Return Value

- ::SW_OK: Upon successful execution
- ::ERR_WRONG_RESPONSE: In case an identifier with a length different from A71CH_MODULE_UNIQUE_ID_LEN was retrieved

U16 A71_GetCertUid (U8 *certUid, U16 *certUidLen)
Get cert uid from the Secure Module. The cert uid is a subset of the Secure Module Unique Identifier

Parameters

- [inout] certUid: IN: buffer to contain cert uid; OUT: cert uid retrieved from Secure Module
- [inout] certUidLen: IN: Size of buffer provided (at least A71CH_MODULE_CERT_UID_LEN byte); OUT: length of retrieved unique identifier (expected to be A71CH_MODULE_CERT_UID_LEN byte)

Return Value

- ::SW_OK: Upon successful execution
- ::ERR_WRONG_RESPONSE: In case the Secure Module Unique Identifier (i.e. the base uid) did not have the expected length

U16 A71_GetUnlockChallenge (U8 *challenge, U16 *challengeLen)
Get Unlock challenge from the Secure Module

Parameters

- [inout] challenge: IN: buffer to contain challenge; OUT: challenge retrieved from Secure Module
- [inout] challengeLen: IN: Size of buffer provided (at least A71CH_MODULE_UNLOCK_CHALLENGE_LEN byte); OUT: length of retrieved unique identifier (must be A71CH_MODULE_UNLOCK_CHALLENGE_LEN byte)

Return Value

- ::SW_OK: Upon successful execution
- ::ERR_WRONG_RESPONSE: In case an identifier with a length different from A71CH_MODULE_UNLOCK_CHALLENGE_LEN was retrieved

U16 A71_GetKeyPairChallenge (U8 *challenge, U16 *challengeLen)

Get Unlock challenge for a Keypair

Parameters

- [inout] challenge: IN: buffer to contain challenge; OUT: challenge retrieved from Secure Module
- [inout] challengeLen: IN: Size of buffer provided (at least A71CH_MODULE_UNLOCK_CHALLENGE_LEN byte); OUT: length of retrieved unique identifier (must be A71CH_MODULE_UNLOCK_CHALLENGE_LEN byte)

Return Value

- ::SW_OK: Upon successful execution
- ::ERR_WRONG_RESPONSE: In case an identifier with a length different from A71CH_MODULE_UNLOCK_CHALLENGE_LEN was retrieved

U16 A71_GetPublicKeyChallenge (U8 *challenge, U16 *challengeLen)

Get Unlock challenge for a Public Key

Parameters

- [inout] challenge: IN: buffer to contain challenge; OUT: challenge retrieved from Secure Module
- [inout] challengeLen: IN: Size of buffer provided (at least A71CH_MODULE_UNLOCK_CHALLENGE_LEN byte); OUT: length of retrieved unique identifier (must be A71CH_MODULE_UNLOCK_CHALLENGE_LEN byte)

Return Value

- ::SW_OK: Upon successful execution
- ::ERR_WRONG_RESPONSE: In case an identifier with a length different from A71CH_MODULE_UNLOCK_CHALLENGE_LEN was retrieved

U16 A71_GetRandom (U8 *random, U8 randomLen)

Retrieves a random byte array of size randomLen from the Secure Module. The maximum amount of data that can be retrieved depends on whether an authenticated channel (SCP03) has been set up. In case SCP03 has been set up, this (worst-case) maximum is A71CH_SCP03_MAX_PAYLOAD_SIZE

Parameters

- [inout] random: IN: buffer to contain random value (at least of size randomLen); OUT: retrieved random data
- [in] randomLen: Amount of byte to retrieve

Return Value

- ::SW_OK: Upon successful execution

U16 A71_CreateClientHelloRandom (U8 *clientHello, U8 clientHelloLen)

Updates a 32 byte random value inside the A71CH and returns this value to the caller.

Post A71CH is in a state it will accept A71_PskDeriveMasterSecret or A71_EcdhPskDeriveMasterSecret as an API call.

Parameters

- [inout] clientHello: IN: buffer to contain random value (at least of size randomLen); OUT: retrieved random data
- [in] clientHelloLen: Amount of byte to retrieve (must be equal to AX_TLS_PSK_HELLO_RANDOM_LEN)

Return Value

- ::SW_OK: Upon successful execution

U16 A71_GetRestrictedKeyPairInfo (U8 *idx, U16 *nBlocks, U8 *blockInfo, U16 *blockInfoLen)

Get the index of the restricted key pair (idx) together with the number of modifiable blocks (nBlocks) in the locked GP storage area that is associated with the restricted key pair. Detailed info on block offset and block length is contained in the blockInfo byte array. Per block 2 bytes indicate the offset into GP storage and two bytes indicate the length of the modifiable block.

Parameters

- [out] idx: Index of restricted key pair. A71CH_NO_RESTRICTED_KP in case there is no restricted key pair
- [out] nBlocks: Number of modifiable blocks
- [inout] blockInfo: IN: Storage to contain blockInfo; OUT: Raw info on block offset and block lenght per block.
- [inout] blockInfoLen: IN: Size of blockInfo (in byte); OUT: effective size of blockInfo

Return Value

- ::SW_OK: Upon successful execution

U16 A71_GetSha256 (U8 *data, U16 dataLen, U8 *sha, U16 *shaLen)

Calculates the SHA256 value of the data provided as input.

Parameters

- [in] data: Data buffer for which the SHA256 must be calculated
- [in] dataLen: The length of data passed as argument
- [inout] sha: IN: caller passes a buffer of at least 32 byte; OUT: contains the calculated SHA256
- [inout] shaLen: IN: length of the sha buffer passed; OUT: because SHA256 is used this is 32 byte exact

Return Value

- ::SW_OK: Upon successful execution

U16 A71_Sha256Init (void)

Initialise multistep SHA256.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_Sha256Update (U8 *data, U16 dataLen)

Update the data for calculating SHA256 value (in multistep).

Parameters

- [in] data: Data buffer for which the SHA256 must be calculated
- [in] dataLen: The length of data passed as argument

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_Sha256Final** (U8 *sha, U16 *shaLen)
calculating SHA256 value (in multistep).

Parameters

- [inout] sha: IN: caller passes a buffer of at least 32 byte; OUT: contains the calculated SHA256
- [inout] shaLen: IN: length of the sha buffer passed; OUT: because SHA256 is used this is 32 byte exact

Return Value

- ::SW_OK: Upon successful execution

U16 **A71.InjectLock** ()

This function disables - at device level - the ability to

- Set symmetric keys without prior wrapping
- Erase symmetric keys
- Set ECC key pairs (private key part) without prior wrapping
- Set ECC public key without prior wrapping

Return Value

- ::SW_OK: Upon successful execution

U16 **A71.LockModule** ()

This function locks the module (typically to protect the module during transport to production facilities). When the A71CH is locked the functionality is reduced to the following subset:

- A71_GetUniqueID
- A71_GetUnlockChallenge
- A71_UnlockModule
- A71_GetModuleInfo

Return Value

- ::SW_OK: Upon successful execution

U16 **A71.UnlockModule** (U8 *code, U16 codeLen)

This function unlocks the module provided the correct code is provided as input argument. The A71CH can only be unlocked once: if the device is already unlocked, the device cannot be locked or unlocked again (it will remain unlocked).

The unlock code is calculated as follows:

- Request a challenge from A71CH using A71_GetUnlockChallenge.
- Decrypt the challenge in ECB mode using the appropriate configuration key value (the same as stored at index A71CH_CFG_KEY_IDX_MODULE_LOCK).
- The decrypted value is the unlock code

Parameters

- [in] code: Value of unlock code

- [in] codeLen: Length of unlock code (must be 16)

Return Value

- ::SW_OK: Upon successful execution

U16 A71_SetTlsLabel (const U8 *label, U16 labelLen)

Sets the label that is used when calling A71_EcdhPskDeriveMasterSecret or A71_PskDeriveMasterSecret. Calling this function is optional. By default the label used by the A71CH is 'master secret' (no quotes) as applicable for TLS 1.2. The maximum size of the label that can be set is 24 byte.

Parameters

- [in] label: Value to be stored and used as 'label' in TLS 1.2 protocol
- [in] labelLen: Length of label (less than or equal to A71CH_TLS_MAX_LABEL)

Return Value

- ::SW_OK: Upon successful execution

U16 A71_EccVerifyWithKey (const U8 *pKeyData, U16 keyDataLen, const U8 *pHash, U16 hashLen, const U8 *pSignature, U16 signatureLen, U8 *pResult)

Verifies whether pSignature is the signature of pHash using pKeyData as the verifying public key.

As opposed to function A71_EccVerify the public key value is passed as an argument to the A71CH.

Parameters

- [in] pKeyData: Public key passed as byte array in ANSI X9.62 uncompressed format
- [in] keyDataLen: Length of public key passed as argument
- [in] pHash: Pointer to the provided hash (or any other bytestring).
- [in] hashLen: Length of the provided hash.
- [in] pSignature: Pointer to the provided signature.
- [in] signatureLen: Length of the provided signature.
- [out] pResult: Pointer to the computed result of the verification. Points to a value of 0x01 in case of successful verification

Return Value

- ::SW_OK: Upon successful execution

Ecc Key API

Description Wrap the ECC cryptographic functionality of the A71CH.

Functions

U16 A71_GenerateEccKeyPair (SST_Index_t index)

Generates an ECC keypair at storage location index.

Pre INJECTION_LOCKED has not been set

Parameters

- [in] index: Storage index of the keypair to be created.

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_GenerateEccKeyPairWithChallenge** (SST_Index_t *index*, **const** U8 **configKey*, U16 *configKeyLen*)

Generates an ECC keypair at storage location *index*. This function must be called instead of A71_GenerateEccKeyPair in case INJECTION_LOCKED was set.

To use this function the value of the Key Pair configuration key must be known on the host. If this is not the case use A71_GenerateEccKeyPairWithCode instead.

Parameters

- [in] *index*: Storage index of the keypair to be created.
- [in] *configKey*: Value of Key Pair configuration key. This value has a high level of confidentiality and may not be available to the Host.
- [in] *configKeyLen*: Length of Key Pair configuration key

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_GenerateEccKeyPairWithCode** (SST_Index_t *index*, **const** U8 **code*, U16 *codeLen*)

Generates an ECC keypair at storage location *index*. This function must be called instead of A71_GenerateEccKeyPair in case INJECTION_LOCKED was set.

The assumption is the value of the Key Pair configuration key is not known on the host. If this does not apply use A71_GenerateEccKeyPairWithChallenge instead.

The code is calculated as follows:

- Request a challenge from A71CH using A71_GetUnlockChallenge.
- Decrypt the challenge in ECB mode using the appropriate configuration key value (the same as stored at index ::A71XX_CFG_KEY_IDX_PRIVATE_KEYS).
- The decrypted value is the value of *code*

Parameters

- [in] *index*: Storage index of the keypair to be created.
- [in] *code*: Value of unlock code.
- [in] *codeLen*: Length of unlock code (must be 16)

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_EccSign** (SST_Index_t *index*, **const** U8 **pHash*, U16 *hashLen*, U8 **pSignature*, U16 **pSignatureLen*)

Signs the hash *pHash* using the keypair at the indicated index.

Parameters

- [in] *index*: Storage index of the keypair (private key) to be used.
- [in] *pHash*: Pointer to the provided hash (or any other bytestring).
- [in] *hashLen*: Length of the provided hash.
- [inout] *pSignature*: Pointer to the computed signature.
- [inout] *pSignatureLen*: Pointer to the length of the computed signature.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_EccNormalizedAsnSign (SST_Index_t index, const U8 *pHash, U16 hashLen, U8 *pSignature, U16 *pSignatureLen)

Signs the hash pHash using the keypair at the indicated index.

The integer representation of the ECDSA signatures' r and s component is modified to be in line with ASN.1 (Ensuring an integer value is always encoded in the smallest possible number of octets)

Parameters

- [in] index: Storage index of the keypair (private key) to be used.
- [in] pHash: Pointer to the provided hash (or any other bytestring).
- [in] hashLen: Length of the provided hash.
- [inout] pSignature: Pointer to the computed signature.
- [inout] pSignatureLen: Pointer to the length of the computed signature.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_EccRestrictedSign (SST_Index_t index, const U8 *updateBytes, U16 updateBytesLen, U8 *invocationCount)

Patches a predetermined fixed size memory region in GP storage with the byte array updateBytes Creates a signed certificate - in place in GP storage - using a predetermined block of GP storage data

Parameters

- [in] index: Storage index of the keypair (private key) to be used.
- [in] updateBytes: Byte array to be written into GP storage
- [in] updateBytesLen: Length of the provided byte array (updateBytes).
- [out] invocationCount: Amount of times the underlying APDU has been called successfully.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_EccVerify (SST_Index_t index, const U8 *pHash, U16 hashLen, const U8 *pSignature, U16 signatureLen, U8 *pResult)

Verifies whether pSignature is the signature of pHash using the public key stored under index as the verifying public key.

The index refers to an instance of the PUBLIC_KEY secure storage class on the A71CH.

Note The public key of an ECC key pair cannot be used for a verify operation.

Note A71_EccVerifyWithKey allows to pass the value of the public key rather than use a stored public key.

Parameters

- [in] index: Storage index of the key used for the verification.
- [in] pHash: Pointer to the provided hash (or any other bytestring).
- [in] hashLen: Length of the provided hash (pHash).
- [in] pSignature: Pointer to the provided signature.
- [in] signatureLen: Length of the provided signature (pSignature)

- [out] pResult: Pointer to the computed result of the verification. Points to a value of 0x01 in case of successful verification

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_EcdhGetSharedSecret** (U8 index, **const** U8 *pOtherPublicKey, U16 otherPublicKeyLen, U8 *pSharedSecret, U16 *pSharedSecretLen)

Generates and retrieves a shared secret ECC point pSharedSecret using the private key stored at index and a public key pOtherPublicKey passed as argument.

Parameters

- [in] index: to the key pair (private key to be used)
- [in] pOtherPublicKey: Pointer to the given public key.
- [in] otherPublicKeyLen: Length of the given public key.
- [inout] pSharedSecret: Pointer to the computed shared secret.
- [inout] pSharedSecretLen: Pointer to the length of the computed shared secret.

Return Value

- ::SW_OK: Upon successful execution

Crypto Derive API

Description Wrap the key derivation functionality of the A71CH.

Functions

U16 **A71_HkdfExpandSymKey** (SST_Index_t index, U8 nBlock, **const** U8 *info, U16 infoLen, U8 *derivedData, U16 derivedDataLen)

The HMAC Key Derivation function derives a key from a stored secret using SHA256 as hash function according to [RFC5869]. Only the expand step will be executed.

The secret is stored in the SYM key store. It can be either 16, 32, 48 or 64 byte long. The Most Significant part of the secret resides in the storage location with the lowest index. The subsequent parts reside in the next storage locations. The nBlock parameter is equal to the length of the secret divided by 16. A secret with length 64 can only start at Index 0 of the SYM key store: a secret can not be stored wrapped around in the SYM key store.

Note infoLen must be smaller than 254 byte.

Parameters

- [in] index: Index of the SYM key store containing the MSB part of the pre-shared secret
- [in] nBlock: Amount of blocks, equivalent to the pre-shared secret length when multiplied by 16
- [in] info: Context and application specific information used in expand step
- [in] infoLen: The length of the info data passed as argument
- [inout] derivedData: IN: caller passes a buffer of at least derivedDataLen; OUT: contains the calculated derived data
- [in] derivedDataLen: IN: length of the requested derivedData. Must be smaller than 256 byte.

Return Value

- ::SW_OK: Successfull execution

U16 A71_HkdfSymKey (SST_Index_t index, U8 nBlock, **const U8 *salt, U16 saltLen, **const** U8 *info, U16 infoLen, U8 *derivedData, U16 derivedDataLen)**

The HMAC Key Derivation function derives a key from a stored secret using SHA256 as hash function according to [RFC5869]. Both the extract and expand steps will be executed.

In case a zero length salt value is passed as argument, this function is equivalent to A71_HkdfExpandSymKey: i.e. the extract step is skipped. To enforce the usage of the default salt value (a Bytestring of 32 zeroes) the caller must explicitly pass this default salt value as argument to this function.

The secret is stored in the SYM key store. It can be either 16, 32, 48 or 64 byte long. The Most Significant part of the secret resides in the storage location with the lowest index. The subsequent parts reside in the next storage locations. The nBlock parameter is equal to the length of the secret divided by 16. A secret with length 64 can only start at Index 0 of the SYM key store: a secret can not be stored wrapped around in the SYM key store.

Note The sum of saltLen and infoLen must be smaller than 254 byte.

Parameters

- [in] index: Index of the SYM key store containing the MSB part of the pre-shared secret
- [in] nBlock: Amount of blocks, equivalent to the pre-shared secret length when multiplied by 16
- [in] salt: Salt data used in extract step
- [in] saltLen: The length of the salt data passed as argument
- [in] info: Context and application specific information used in expand step
- [in] infoLen: The length of the info data passed as argument
- [inout] derivedData: IN: caller passes a buffer of at least derivedDataLen; OUT: contains the calculated derived data
- [in] derivedDataLen: IN: length of the requested derivedData. Must be smaller than 256 byte.

Return Value

- ::SW_OK: Successfull execution

U16 A71_PskDeriveMasterSecret (SST_Index_t index, U8 nBlock, **const U8 *serverHelloRnd, U16 serverHelloRndLen, U8 *masterSecret)**

This function calculates the PRF according to TLS1.2 [RFC5246]. The pre-master secret is formed - based upon a pre-shared secret (PSK) stored in the secure module - according to [RFC4279].

The pre-shared secret is stored in the SYM key store. It can be either 16, 32, 48 or 64 byte long. The Most Significant part of the pre-shared secret resides in the storage location with the lowest index. The subsequent parts reside in the next storage locations. The nBlock parameter is equal to the length of the PSK divided by 16.

A PSK cannot be stored wrapped around in the SYM key store.

The PRF creating the masterSecret also takes as parameter the concatenation of label (“master_secret”), ClientHello.random and ServerHello.random. This function only takes ServerHello.random as parameter: ClientHello.random has already been set by a call to A71_CreateClientHelloRandom, the value of the label (default is “master_secret”) can be overruled by a call to A71_SetTlsLabel.

Pre This call must be preceded by a call to A71_CreateClientHelloRandom, no other A71CH API call (implying an APDU exchange between Host and A71CH) may be executed in between the invocation of A71_CreateClientHelloRandom and A71_PskDeriveMasterSecret

Parameters

- [in] index: Index of the SYM key store containing the MSB part of the pre-shared secret
- [in] nBlock: Amount of blocks, equivalent to the pre-shared secret length when multiplied by 16
- [in] serverHelloRnd: ServerHello.random (concatenated with values already contained in A71CH)
- [in] serverHelloRndLen: The length of serverHelloRnd passed as an argument
- [inout] masterSecret: IN: caller passes a buffer of at least 48 byte; OUT: contains the calculated master Secret, TLS 1.2 mandates this to be 48 byte exact

Return Value

- ::SW_OK: Successfull execution

U16 A71_EcdhPskDeriveMasterSecret (SST_Index_t indexKp, const U8 *publicKey, U16 publicKeyLen, SST_Index_t index, U8 nBlock, const U8 *serverHelloRnd, U16 serverHelloRndLen, U8 *masterSecret)

This function calculates the PRF according to TLS1.2 [RFC5246]. The pre-master secret is formed - based upon a pre-shared secret (PSK) stored in the secure module and on an ECDH calculation - according to [RFC5489].

The pre-shared secret is stored in the SYM key store. It can be either 16, 32, 48 or 64 byte long. The Most Significant part of the pre-shared secret resides in the storage location with the lowest index. The subsequent parts reside in the next storage locations. The nBlock parameter is equal to the length of the PSK divided by 16.

A PSK cannot be stored wrapped around in the SYM key store.

The PRF creating the masterSecret also takes as parameter the concatenation of label (“master_secret”), ClientHello.random and ServerHello.random. This function only takes ServerHello.random as parameter: ClientHello.random has already been set by a call to A71_CreateClientHelloRandom, the value of the label (default is “master_secret”) can be overruled by a call to A71_SetTlsLabel.

Pre This call must be preceded by a call to A71_CreateClientHelloRandom, no other A71CH API call (implying an APDU exchange between Host and A71CH) may be executed in between the invocation of A71_CreateClientHelloRandom and A71_EcdhPskDeriveMasterSecret

Parameters

- [in] indexKp: Index of the ECC keypair whose private key is used in the ECDH operation
- [in] publicKey: Value of the public key to be used in ECDH operation
- [in] publicKeyLen: Length of publicKey in byte
- [in] index: Index of the SYM key store containing the MSB part of the pre-shared secret
- [in] nBlock: Amount of blocks, equivalent to the pre-shared secret length when multiplied by 16
- [in] serverHelloRnd: ServerHello.random (concatenated with values already contained in A71CH)
- [in] serverHelloRndLen: The length of serverHelloRnd passed as an argument
- [inout] masterSecret: IN: caller passes a buffer of at least 48 byte; OUT: contains the calculated master Secret, TLS 1.2 mandates this to be 48 byte exact

Return Value

- ::SW_OK: Successfull execution

U16 A71_GetHmacSha256 (SST_Index_t index, U8 nBlock, const U8 *data, U16 dataLen, U8 *hmac, U16 *hmacLen)

Calculates the HMAC on data using SHA256 as Hash Function according to [RFC2104]. The secret is stored in the SYM key store. It can be either 16, 32, 48 or 64 byte long. The Most Significant part of the secret resides

in the storage location with the lowest index. The subsequent parts reside in the next storage locations. The nBlock parameter is equal to the length of the secret divided by 16. A secret with length 64 can only start at Index 0 of the SYM key store: a secret can not be stored wrapped around in the SYM key store.

Parameters

- [in] index: Index of the SYM key store containing the MSB part of the pre-shared secret
- [in] nBlock: Amount of blocks, equivalent to the pre-shared secret length when multiplied by 16
- [in] data: Data buffer for which the HMAC-SHA256 must be calculated
- [in] dataLen: The length of data passed as argument
- [inout] hmac: IN: caller passes a buffer of at least 32 byte; OUT: contains the calculated hmac
- [inout] hmacLen: IN: length of the hmac buffer passed; OUT: because SHA256 is used this is 32 byte exact

Return Value

- ::SW_OK: Successfull execution

U16 A71_HmacSha256Init (SST_Index_t index, U8 nBlock)

Initialise multistep HMACSHA256.

Parameters

- [in] index: Index of the SYM key store containing the MSB part of the pre-shared secret
- [in] nBlock: Amount of blocks, equivalent to the pre-shared secret length when multiplied by 16

Return Value

- ::SW_OK: Upon successful execution

U16 A71_HmacSha256Update (SST_Index_t index, U8 nBlock, U8 *data, U16 dataLen)

Update the data for calulating HMACSHA256 value (in multistep).

Parameters

- [in] index: Index of the SYM key store containing the MSB part of the pre-shared secret
- [in] nBlock: Amount of blocks, equivalent to the pre-shared secret length when multiplied by 16
- [in] data: Data buffer for which the HMACSHA256 must be calculated
- [in] dataLen: The length of data passed as argument

Return Value

- ::SW_OK: Upon successful execution

U16 A71_HmacSha256Final (SST_Index_t index, U8 nBlock, U8 *hmac, U16 *hmacLen)

calulating HMACSHA256 value (in multistep).

Parameters

- [in] index: Index of the SYM key store containing the MSB part of the pre-shared secret
- [in] nBlock: Amount of blocks, equivalent to the pre-shared secret length when multiplied by 16
- [inout] hmac: IN: caller passes a buffer of at least 32 byte; OUT: contains the calculated HMAC-SHA256
- [inout] hmacLen: IN: length of the sha buffer passed; OUT: because HMACSHA256 is used this is 32 byte exact

Return Value

- ::SW_OK: Upon successful execution

Secure Storage (SST) API

Description Wrap the secure storage functionality of the A71CH.

Functions

U16 **A71_SetEccKeyPair** (SST_Index_t *index*, **const** U8 **publicKey*, U16 *publicKeyLen*, **const** U8 **privateKey*, U16 *privateKeyLen*)

Sets an ECC Key pair at storage location *index* with the provided values for public and private key. The private key can optionally be RFC3944 wrapped. Whether wrapping is applied or not is implicit in the length of the private key.

Parameters

- [in] *index*: Storage index of the keypair to be created.
- [in] *publicKey*: Pointer to the byte array containing the public key. The public key must be in ANSI X9.62 uncompressed format (including the leading 0x04 byte).
- [in] *publicKeyLen*: Length of the public key (65 byte)
- [in] *privateKey*: Pointer to the byte array containing the private key. The private key may be RFC3394 wrapped using the config key stored at index A71CH_CFG_KEY_IDX_PRIVATE_KEYS
- [in] *privateKeyLen*: Length of the private key (either 32 byte for keys in plain format or 40 byte for keys in RFC3944 wrapped format)

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_GetPublicKeyEccKeyPair** (SST_Index_t *index*, U8 **publicKey*, U16 **publicKeyLen*)

Retrieves the ECC Public Key - from a key pair - from the storage location *index* into the provided buffer. The public key retrieved is in ANSI X9.62 uncompressed format (including the leading 0x04 byte).

Parameters

- [in] *index*: Storage index of the key pair
- [inout] *publicKey*: IN: buffer to contain public key byte array; OUT: public key
- [inout] *publicKeyLen*: IN: size of provided buffer; OUT: Length of the retrieved public key

Return Value

- ::SW_OK: Upon successful execution
- ::ERR_BUF_TOO_SMALL: *publicKey* buffer is too small

U16 **A71_GetEccKeyPairUsage** (SST_Index_t *index*, U8 **restricted*, U16 **usedCnt*, U16 **maxUseCnt*)

Retrieve the usage counter (i.e. how much times the key pair has been used so far to sign) and the maximum usage counter. If the key pair is NOT restricted, usage counter and maximum usage counter will be set to 0 and the restricted parameter will be 0 (otherwise it is 1)

Parameters

- [in] *index*: Storage index of the key pair
- [out] *restricted*: 0 when the key pair on *index* is not restricted; 1 if it is restricted. A restricted key pair is a key pair that can only be used to sign a dedicated area in GP storage.

- [out] usedCnt: Number of times the key pair at index has been used to sign (assuming it is a restricted key pair)
- [out] maxUseCnt: Indicates the maximum amount of signing operations associated with the key pair at index. In case the value is zero, there is no limit on the amount of signing operations.

U16 A71_FreezeEccKeyPair (SST_Index_t index)

Freezes an ECC key pair at storage location index. This means that the key pair can no longer be erased or its value changed.

Pre INJECTION_LOCKED has not been set

Parameters

- [in] index: Storage index of the key pair to be frozen.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_FreezeEccKeyPairWithChallenge (SST_Index_t index, U8 *configKey, U16 configKeyLen)

Freezes an ECC key pair at storage location index. This means that the key pair can no longer be erased or its value changed. This function must be called instead of A71_FreezeEccKeyPair in case INJECTION_LOCKED was set

The assumption is the value of the Key Pair configuration key is known on the host. If this does not apply use A71_FreezeEccKeyPairWithCode instead.

Parameters

- [in] index: Storage index of the key pair to be frozen.
- [in] configKey: Value of Key Pair configuration key. This value has a high level of confidentiality and may not be available to the Host.
- [in] configKeyLen: Length of Key Pair configuration key

Return Value

- ::SW_OK: Upon successful execution

U16 A71_FreezeEccKeyPairWithCode (SST_Index_t index, U8 *code, U16 codeLen)

Freezes an ECC key pair at storage location index provided the correct code value is passed as argument. Freezing the key pair means that it can no longer be erased or its value changed. This function must be called instead of A71_FreezeEccKeyPair in case INJECTION_LOCKED was set.

The assumption is the value of the Key Pair configuration key is not known on the host. If this does not apply use A71_FreezeEccKeyPairWithChallenge instead.

The code is calculated as follows:

- Request a challenge from A71CH using A71_GetUnlockChallenge.
- Decrypt the challenge in ECB mode using the appropriate configuration key value (the same as stored at index A71CH_CFG_KEY_IDX_PRIVATE_KEYS).
- The decrypted value is the value of code

Parameters

- [in] index: Storage index of the key pair to be frozen.
- [in] code: Value of unlock code
- [in] codeLen: Length of unlock code (must be 16)

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_EraseEccKeyPair** (SST_Index_t *index*)

Erases an ECC key pair at storage location *index*. This means that the key pair can no longer be used before a new value is set.

Pre INJECTION_LOCKED has not been set

Parameters

- [in] *index*: Storage index of the key pair to be frozen.

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_EraseEccKeyPairWithChallenge** (SST_Index_t *index*, U8 **configKey*, U16 *configKeyLen*)

Erases an ECC key pair at storage location *index*. This means that the key pair can no longer be used before a new value is set. This function must be called instead of A71_EraseEccKeyPair in case INJECTION_LOCKED was set.

The assumption is the value of the Key Pair configuration key is known on the host. If this does not apply use A71_EraseEccKeyPairWithCode instead.

Parameters

- [in] *index*: Storage index of the key pair to be frozen.
- [in] *configKey*: Value of Key Pair configuration key. This value has a high level of confidentiality and may not be available to the Host.
- [in] *configKeyLen*: Length of Key Pair configuration key

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_EraseEccKeyPairWithCode** (SST_Index_t *index*, U8 **code*, U16 *codeLen*)

Erases an ECC key pair at storage location *index*. This means that the key pair can no longer be used before a new value is set. This function must be called instead of A71_EraseEccKeyPair in case INJECTION_LOCKED was set.

The assumption is the value of the Key Pair configuration key is not known on the host. If this does not apply use A71_EraseEccKeyPairWithChallenge instead.

The code is calculated as follows:

- Request a challenge from A71CH using A71_GetUnlockChallenge.
- Decrypt the challenge in ECB mode using the appropriate configuration key value (the same as stored at index A71CH_CFG_KEY_IDX_PRIVATE_KEYS).
- The decrypted value is the value of *code*

Parameters

- [in] *index*: Storage index of the key pair to be frozen.
- [in] *code*: Value of unlock code
- [in] *codeLen*: Length of unlock code (must be 16)

Return Value

- ::SW_OK: Upon successful execution

U16 A71_SetEccPublicKey (SST_Index_t index, const U8 *publicKey, U16 publicKeyLen)

Sets an ECC Public Key at storage location `index` with the provided value for public key either in plain ANSI X9.62 uncompressed format or wrapped. Whether RFC3944 wrapping is applied or not is implicit in the length of the public key. In case RFC3944 wrapping is applied the first byte of the public key (the one indicating the public key format) is removed before applying wrapping.

Parameters

- [in] `index`: Storage index of the public key to be set.
- [in] `publicKey`: Pointer to the byte array containing the public key. The public key may be RFC3394 wrapped using the config key stored at index `A71CH_CFG_KEY_IDX_PUBLIC_KEYS`
- [in] `publicKeyLen`: Length of the public key (either 65 byte for keys in plain format or 72 byte for keys in RFC3944 wrapped format)

Return Value

- ::SW_OK: Upon successful execution

U16 A71_GetEccPublicKey (SST_Index_t index, U8 *publicKey, U16 *publicKeyLen)

Retrieves the ECC Public Key from the storage location `index` into the provided buffer. The public key is in ANSI X9.62 uncompressed format (including the leading 0x04 byte).

Parameters

- [in] `index`: Storage index of the public key to be retrieved.
- [inout] `publicKey`: IN: buffer to contain public key byte array; OUT: public key
- [inout] `publicKeyLen`: IN: size of provided buffer; OUT: Length of the retrieved public key

Return Value

- ::SW_OK: Upon successful execution
- ::ERR_BUF_TOO_SMALL: `publicKey` buffer is too small

U16 A71_FreezeEccPublicKeyWithChallenge (SST_Index_t index, U8 *configKey, U16 configKeyLen)

Freezes an ECC public key at storage location `index`. This means that the public key can no longer be erased or its value changed. This function must be called instead of `A71_FreezeEccPublicKey` in case `INJECTION_LOCKED` was set.

The assumption is the value of the Public Key configuration key is known on the host. If this does not apply use `A71_FreezeEccPublicKeyWithCode` instead.

Parameters

- [in] `index`: Storage index of the public key to be frozen.
- [in] `configKey`: Value of Public Key Pair key. This value has a high level of confidentiality and may not be available to the Host.
- [in] `configKeyLen`: Length of Public Key configuration key

Return Value

- ::SW_OK: Upon successful execution

U16 A71_FreezeEccPublicKeyWithCode (SST_Index_t index, U8 *code, U16 codeLen)

Freezes an ECC public key at storage location `index` provided the correct code value is passed as argument. Freezing the public key means that it can no longer be erased or its value changed. This function must be called instead of `A71_FreezeEccPublicKey` in case `INJECTION_LOCKED` was set.

The assumption is the value of the Public Key configuration key is not known on the host. If this does not apply use A71_FreezeEccPublicKeyWithChallenge instead.

The code is calculated as follows:

- Request a challenge from A71CH using A71_GetUnlockChallenge.
- Decrypt the challenge in ECB mode using the appropriate configuration key value (the same as stored at index A71CH_CFG_KEY_IDX_PUBLIC_KEYS).
- The decrypted value is the value of code

Parameters

- [in] index: Storage index of the key pair to be frozen.
- [in] code: Value of unlock code
- [in] codeLen: Length of unlock code (must be 16)

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_FreezeEccPublicKey** (SST_Index_t *index*)

Freezes an ECC public key at storage location *index*. This means that the public key can no longer be erased or its value changed.

Parameters

- [in] index: Storage index of the public key to be frozen.

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_EraseEccPublicKey** (SST_Index_t *index*)

Erases an ECC public key at storage location *index*. This means that the public key can no longer be used before a new value is set.

Pre INJECTION_LOCKED has not been set

Parameters

- [in] index: Storage index of the public key to be frozen.

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_EraseEccPublicKeyWithChallenge** (SST_Index_t *index*, U8 **configKey*, U16 *configKeyLen*)

Erases an ECC public key at storage location *index*. This means that the public key can no longer be used before a new value is set. This function must be called instead of A71_EraseEccPublicKey in case INJECTION_LOCKED was set.

The assumption is the value of the Public Key configuration key is known on the host. If this does not apply use A71_EraseEccPublicKeyWithCode instead.

Parameters

- [in] index: Storage index of the public key to be frozen.
- [in] configKey: Value of Public Key Pair key. This value has a high level of confidentiality and may not be available to the Host.
- [in] configKeyLen: Length of Public Key configuration key

Return Value

- ::SW_OK: Upon successful execution

U16 A71_EraseEccPublicKeyWithCode (SST_Index_t index, U8 *code, U16 codeLen)

Erases an ECC public key at storage location `index`. This means that the public key can no longer be used before a new value is set. This function must be called instead of A71_EraseEccPublicKey in case INJECTION_LOCKED was set.

The assumption is the value of the Public Key configuration key is not known on the host. If this does not apply use A71_EraseEccPublicKeyWithChallenge instead.

The code is calculated as follows:

- Request a challenge from A71CH using A71_GetUnlockChallenge.
- Decrypt the challenge in ECB mode using the appropriate configuration key value (the same as stored at index A71CH_CFG_KEY_IDX_PUBLIC_KEYS).
- The decrypted value is the value of `code`

Parameters

- [in] `index`: Storage index of the key pair to be frozen.
- [in] `code`: Value of unlock code
- [in] `codeLen`: Length of unlock code (must be 16)

Return Value

- ::SW_OK: Upon successful execution

U16 A71_SetSymKey (SST_Index_t index, const U8 *key, U16 keyLen)

Sets a symmetric key at storage location `index` with the key value. The key locations indexed are the same as the one referenced by A71_SetRfc3394WrappedAesKey

Parameters

- [in] `index`: Storage index of the symmetric key to be set.
- [in] `key`: Pointer to the byte array containing the symmetric key
- [in] `keyLen`: Length of the symmetric key (must be 16)

Return Value

- ::SW_OK: Upon successful execution

U16 A71_SetRfc3394WrappedAesKey (SST_Index_t index, const U8 *key, U16 keyLen)

Sets an RFC3394 wrapped AES key in secure storage. The key value being set, must be wrapped with the value already stored at `index`. The key locations indexed are the same as the one referenced by A71_SetSymKey

Parameters

- [in] `index`: index of the key to be set. At the same time the index of the wrapping key.
- [in] `key`: Pointer to the supplied key data.
- [in] `keyLen`: Length of the supplied key data.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_FreezeSymKey (SST_Index_t index)

Freezes a symmetric key at storage location `index`. This means the value of the key at the specified index can no longer be changed.

Parameters

- [in] index: Storage index of the symmetric key to be frozen.

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_EraseSymKey** (SST_Index_t *index*)

Erases the symmetric key at storage location *index*. This means the value of the key at the specified index is cleared. The value must be set anew before the key can be used.

Parameters

- [in] index: Storage index of the symmetric key to be set.

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_IncrementCounter** (SST_Index_t *index*)

Increments the monotonic counter at storage location *index* by one.

Parameters

- [in] index: Storage index of the counter.

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_SetCounter** (SST_Index_t *index*, U32 *value*)

Sets the value of the monotonic counter at storage location ‘*index*’ with the value passed as parameter.

Parameters

- [in] index: Storage index of the counter.
- [in] value: Counter value to be set

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_GetCounter** (SST_Index_t *index*, U32 **pValue*)

Gets the value of the monotonic counter at storage location ‘*index*’.

Parameters

- [in] index: Storage index of the counter.
- [out] pValue: Counter value retrieved

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_DbgeEraseCounter** (SST_Index_t *index*)

Sets the value of the monotonic counter at storage location ‘*index*’ to zero.

Note Only available when the applet is in Debug Mode.

Parameters

- [in] index: Storage index of the counter.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_SetGpData (U16 dataOffset, const U8 *data, U16 dataLen)

Sets a data chunk of General Purpose storage in the security module. Depending on the size of the chunk, this requires one or more APDU exchanges with the security module.

Pre The addressed General Purpose storage is not locked.

Note In case part of the addressed General Purpose storage is locked, only part of the provided data will have been written most likely leading to an inconsistent data set stored in General Purpose storage.

Parameters

- [in] dataOffset: Offset for the data in the GP Storage.
- [in] data: IN: buffer containing data to write
- [in] dataLen: Amount of data to write

Return Value

- ::SW_OK: Upon successful execution

U16 A71_SetGpDataWithLockCheck (U16 dataOffset, const U8 *data, U16 dataLen)

Sets a data chunk of General Purpose storage in the security module. Depending on the size of the chunk, this requires one or more APDU exchanges with the security module.

Pre The addressed General Purpose storage is not locked.

Note In case more than one apdu is required, this function first validates that each of the chunks of the addressed General Purpose storage is not locked, and only in that case try to write the provided data using A71_SetGpData()

Parameters

- [in] dataOffset: Offset for the data in the GP Storage.
- [in] data: IN: buffer containing data to write
- [in] dataLen: Amount of data to write

Return Value

- ::SW_OK: Upon successful execution

U16 A71_GetGpData (U16 dataOffset, U8 *data, U16 dataLen)

Retrieve a chunk of data from general purpose (GP) storage.

Parameters

- [in] dataOffset: Offset for the data in the GP Storage.
- [inout] data: IN: buffer to contain data; OUT: retrieved data
- [in] dataLen: Amount of data to retrieve

Return Value

- ::SW_OK: Upon successful execution

U16 A71_FreezeGpData (U16 dataOffset, U16 dataLen)

Mark a chunk in GP storage as frozen (meaning further modification of the GP storage area is disallowed). Both the dataOffset and dataLen must be aligned on A71CH_GP_STORAGE_GRANULARITY

Parameters

- [in] dataOffset: Offset for the data in the GP Storage.
- [in] dataLen: Amount of data to freeze

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_SetConfigKey** (SST_Index_t *index*, **const** U8 **key*, U16 *keyLen*)

Sets a config key at storage location *index* with the key value. The key locations indexed are the same as the one referenced by A71_SetRfc3394WrappedConfigKey

Parameters

- [in] index: Storage index of the config key to be set.
- [in] key: Pointer to the byte array containing the config key
- [in] keyLen: Length of the config key (must be 16)

Return Value

- ::SW_OK: Upon successful execution

U16 **A71_SetRfc3394WrappedConfigKey** (SST_Index_t *index*, **const** U8 **key*, U16 *keyLen*)

Sets an RFC3394 wrapped config key in secure storage. The key value being set, must be wrapped with the value already stored at the *index*. The key locations indexed are the same as the one referenced by A71_SetConfigKey

Parameters

- [in] index: index of the key to be set. At the same time the index of the wrapping key.
- [in] key: Pointer to the supplied key data.
- [in] keyLen: Length of the supplied key data.

Return Value

- ::SW_OK: Upon successful execution

sm_connect.c

Description Implementation of basic communication functionality between Host and A71CH. (This file was renamed from a71ch_com.c into sm_connect.c.)

Functions

U16 **SM_RjctConnect** (void ***conn_ctx*, **const** char **connectString*, SmCommState_t **commState*, U8 **atr*, U16 **atrLen*)

U16 **SM_I2CConnect** (void ***conn_ctx*, SmCommState_t **commState*, U8 **atr*, U16 **atrLen*, **const** char **pConnString*)

U16 **SM_Connect** (void **conn_ctx*, SmCommState_t **commState*, U8 **atr*, U16 **atrLen*)

Establishes the communication with the Security Module (SM) at the link level and selects the A71CH applet on the SM. The physical communication layer used (e.g. I2C) is determined at compilation time.

Parameters

- [inout] commState:
- [inout] atr:

- [inout] atrLen:

Return Value

- ::SW_OK: Upon successful execution

U16 SM_Close (void *conn_ctx, U8 mode)

Closes the communication with the Security Module A new connection can be established by calling SM_Connect

Parameters

- [in] mode: Specific information that may be required on the link layer

Return Value

- ::SW_OK: Upon successful execution

U16 SM_SendAPDU (U8 *cmd, U16 cmdLen, U8 *resp, U16 *respLen)

Sends the command APDU to the Secure Module and retrieves the response APDU. The latter consists of the concatenation of the response data (possibly none) and the status word (2 bytes).

The command APDU and response APDU are not interpreted by the host library.

The command/response APDU sizes must lay within the APDU size limitations

Parameters

- [in] cmd: command APDU
- [in] cmdLen: length (in byte) of cmd
- [inout] resp: response APDU (response data || response status word)
- [inout] respLen: IN: Length of resp buffer (resp) provided; OUT: effective length of response retrieved.

Return Value

- ::SW_OK: Upon successful execution

ax_scp.c

Description Set up the SCP03 communication channel.

Functions

U16 SCP_HostLocal_GetSessionState (ChannelId_t channelId, Scp03SessionState_t *pSession)

Copy the session state into pSession. Caller must allocate memory of pSession.

Parameters

- [in] channelId: Either ::AX_HOST_CHANNEL or ::AX_ADMIN_CHANNEL. Must be ::AX_HOST_CHANNEL in case of A71CH.
- [inout] pSession: IN: pointer to allocated ::Scp03SessionState_t structure; OUT: retrieved state

Return Value

- ::SW_OK: Upon successful execution

- ::SCP_UNDEFINED_CHANNEL_ID: In case an undefined ::ChannelId_t type was passed as parameter

U16 **SCP_GetScpSessionState** (Scp03SessionState_t **scp03state*)

Retrieve the SCP03 session state of the host - secure module channel from the Host Library.

Return ::SW_OK

Parameters

- [inout] *scp03state*: IN: pointer to allocated structure; OUT: datastructure contains SCP03 session state

void **SCP_SetScpSessionState** (Scp03SessionState_t **scp03state*)

Sets SCP03 session state of the host - secure module channel of the Host Library. Can be used in a scenario where e.g. the bootloader has established the SCP03 link between host and secure module and the Host OS must re-establish the communication with the secure module without breaking the SCP03 session.

Parameters

- [in] *scp03state*: IN: SCP03 session state

U16 **SCP_GP_ExternalAuthenticate** (ChannelId_t *channelId*, U8 **hostCryptogram*)

U16 **SCP_GP_InitializeUpdate** (ChannelId_t *channelId*, U8 **hostChallenge*, U16 *hostChallengeLen*, U8 **keyDivData*, U16 **pKeyDivDataLen*, U8 **keyInfo*, U16 **pKeyInfoLen*, U8 **cardChallenge*, U16 **pCardChallengeLen*, U8 **cardCryptoGram*, U16 **pCardCryptoGramLen*, U8 **seqCounter*, U16 **pSeqCounterLen*)

U16 **SCP_GP_PutKeys** (U8 *keyVersion*, U8 **keyEnc*, U8 **keyMac*, U8 **keyDek*, U8 **currentKeyDek*, U16 *keyBytes*)

Persistently stores the provided SCP03 base key set in the security module.

This method must be called once before the Host - Secure Module SCP channel can be established.

Return ::SW_OK upon success

Parameters

- [in] *keyVersion*:
- [in] *keyEnc*: SCP03 channel encryption base key
- [in] *keyMac*: SCP03 authentication base key
- [in] *keyDek*: SCP03 data encryption base key
- [in] *currentKeyDek*: Value of the data encryption base key already stored in secure module, may be NULL in case no key is currently stored.
- [in] *keyBytes*: Length (in byte) of the keys being set. Typically 16 (corresponding to 128 bits)

U16 **SCP_Authenticate** (U8 **keyEnc*, U8 **keyMac*, U8 **keyDek*, U16 *keyBytes*, U8 **sCounter*, U16 **sCounterLen*)

Performs an SCP03 authentication with the SM and - when successful - computes the SCP03 session keys and initializes the current Session state.

Parameters

- [in] *keyEnc*: SCP03 channel encryption base key (aka static key) (16 bytes)
- [in] *keyMac*: SCP03 authentication base key (aka static key) (16 bytes)
- [in] *keyDek*: SCP03 data encryption base key (aka static key) (16 bytes)

- [in] keyBytes: Must be 16
- [inout] sCounter: SCP03 sequence counter (3 bytes)
- [inout] sCounterLen:

scp_a7x.c

Description Conditionally apply SCP03 channel encryption (This file was renamed from `scp.c` into `scp_a7x.c`.)

a71_debug.c

Description Wrap Debug Mode specific APDU's of A71CH.

Functions

U16 A71_DbReset (void)

Resets the Secure Module to the initial state.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_DbDisableDebug (void)

Permanently disables the Debug API.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_DbGetFreePersistentMemory (S16 *freeMem)

Reports the available persistent memory in the Security Module.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_DbGetFreeTransientMemory (S16 *freeMem)

Reports the available transient memory in the Security Module.

Return Value

- ::SW_OK: Upon successful execution

U16 A71_DbReflect (U8 *sndBuf, U16 sndBufLen, U8 *rcvBuf, U16 *rcvBufLen)

Invokes data reflection APDU (facilitates link testing). No check of data payload returned

Return

Parameters

- [in] sndBuf:
- [in] sndBufLen:
- [inout] rcvBuf:
- [inout] rcvBufLen:

10.4 A71CH Legacy HLSE (Generic) API

10.4.1 HLSE API

The API is designed to be generic for Secure Elements that hold cryptographic information and perform cryptographic functions. It isolates an application from the details of the cryptographic device such that it does not have to change to interface to a different type of cryptographic device.

This generic layer intends to abstract both the different APDU specs of applets, and the ?file system? details, i.e., how each ?object? is stored on the SE. For example, in order to enumerate the certificate objects on the card, the implementation should know where the objects are located, how many there are, what their type is, etc. This abstract layer is important for, e.g. a PKCS#11 layer, and for TLS engines that will have to access objects on the Secure Element.

The HLSE API is written in **C** allowing maximal portability across different platforms.

Each typedef, enum and function starts with the HLSE (=Host Library Secure Element) prefix.

The various Secure Element entities are referred to as Objects. Every Object (e.g. Key) has a unique handle (HLSE_OBJECT_HANDLE) and a set of attributes (HLSE_ATTRIBUTE) whose values can be retrieved (Get) and Set. An HLSE_OBJECT_HANDLE can be obtained in two ways: Either returned by HLSE_EnumerateObjects() if the Object exists on the Secure Element, or returned by HLSE_CreateObject() for a new Object. This is an abstraction of the actual way in which the API implements these handles.

An HLSE_ATTRIBUTE is defined as:

```
typedef struct HLSE_ATTRIBUTE {
    HLSE_ATTRIBUTE_TYPE      type;
    void*                   value;
    U16                     valueLen;
} HLSE_ATTRIBUTE;
```

For example, a Private RSA key may have the HLSE_ATTR_RSA_MODULUS and HLSE_ATTR_RSA_PUBLIC_EXPONENT attributes, and their values can be extracted or set.

Key Generation can be obtained by passing a NULL parameter in the HLSE_ATTR_OBJECT_VALUE attribute. This enables to create the key with a generated random data, or to re-generate an existing key by passing NULL in this attribute's parameter.

A set of functions is responsible for performing cryptographic operations:

- HLSE_Digest()
- HLSE_Sign()
- HLSE_VerifySignature()
- HLSE_DeriveKey()
- HLSE_Encrypt()
- HLSE_Decrypt()

The cryptographic algorithm is controlled by a HLSE_MECHANISM_INFO, defined as:

```
typedef struct HLSE_MECHANISM_INFO {
    HLSE_MECHANISM_TYPE      mechanism;
    void*                   pParameter;
    U16                     ulParameterLen;
} HLSE_MECHANISM_INFO;
```

A list of the supported mechanisms, either by the library or by a specific key, can be obtained by calling `HLSE_GetSupportedMechanisms()` or `HLSE_GetSupportedMechanismsForObject()`, respectively.

The HLSE API is made up of four parts:

- Operations on Objects (*HLSEObjects.h*)
- Cryptographic operations (*HLSECrypto.h*)
- Secure Element Communication and Secure Channel management functions (*HLSEComm.h*)
- Debug Mode variant and miscellaneous functionality (*HLSEMisc.h*)

An additional file `.../hostLib/inc/HLSEAPI.h` serves as an entry point to the full API. The implementation of the API dealing with A71CH specific functionality is in `.../hostLib/api/src/A71HLSEReWrapper.c`.

10.4.2 Logical objects

The HLSE API allows to create logical objects in the GP Storage. They can be of `HLSE_CERTIFICATE` or `HLSE_DATA` object type. The abstraction for various objects that reside in the GP Storage area is achieved by maintaining a lookup table (mapping) at the end of the GP Storage area to hold information about the logical objects that exist in the GP Storage. The structure of the table is as follows:

Notes:

`X+1` is the address of the last byte of the GP Storage.
`N` is the object number from 1 to `N`

Address	Value
<hr/>	
<code>X-N*6+0</code>	<code>N</code> 'th Object Class - 1 byte
<code>X-N*6+1</code>	<code>N</code> 'th Object Index - 1 byte
<code>X-N*6+2</code>	<code>N</code> 'th Object Length MSB - 1 byte
<code>X-N*6+3</code>	<code>N</code> 'th Object Length LSB - 1 byte
<code>X-N*6+4</code>	<code>N</code> 'th Object Offset MSB - 1 byte
<code>X-N*6+5</code>	<code>N</code> 'th Object Offset LSB - 1 byte
	?
<code>X-1*6+0</code>	First Object Class - 1 byte
<code>X-1*6+1</code>	First Object Index - 1 byte
<code>X-1*6+2</code>	First Object Length MSB - 1 byte
<code>X-1*6+3</code>	First Object Length LSB - 1 byte
<code>X-1*6+4</code>	First Object Offset MSB - 1 byte
<code>X-1*6+5</code>	First Object Offset LSB - 1 byte
<code>X</code>	Update Counter - 1 byte
<code>X+1</code>	Number of table entries - 1 byte
End of GP Storage	

The table will be written so that the ‘Number of table entries’ byte is the last byte of the GP Data (to allow the map to grow dynamically as long as there is enough free space), preceded by one byte of the Update Counter and then preceded by 6-tuples of entries.

The Class byte is equivalent to the object type using a single byte (0x09 for Certificate, 0x0A for Data).

The order of the 6-tuple entries is not important, as each object is identified by its Class and Index. In cases where the length of an object is not known at the time the lookup table entry is created, the MSBit (0x8000) can be set in the length as an indicator that the data is in TLV format and that the actual length must be obtained by reading the first bytes of the object’s data.

For objects of type ‘Certificate’ the provisioned ‘Object Length’ value must be one of the following:

- The reserved object storage length (allowing for a possible increase in size of the certificate or for die-individual variance of the certificate size).
- The actual certificate length
- In the exceptional case neither a reserved certificate object storage length nor the effective certificate length can be determined one can use the value ‘0x8000’ to indicate the ‘Object Size’ is unknown at the time of provisioning.

When reading a certificate from GP storage with the HLSE API, the size of the certificate is always determined by the length value of the certificate’s initial TL(V) header.

The host library reads the total number of entries in the table from the last byte of the GP Data, followed by parsing/reading the 6-tuple entries. Up to 254 (0xFE) objects are assumed. A value of 0xFF in the number of entries indicates that the table is absent (uninitialized) or invalid.

Class and Index value of 0xFF indicates an invalid entry (i.e. of a deleted object).

The Update Counter is initially set to 0 and it is incremented on each table update. This serves as an indication to a GP Storage’s change when there is more than one application updating the SE concurrently.

The value of ‘object offset’ must be a multiple of 32.

It is not allowed to create a data object of size 0.

Object creation

The library supports a dynamic number of objects in the GP Storage, according to the memory availability.

Creating an object through HLSE_CreateObject() requires the following attributes to be passed:

1. HLSE_ATTR_OBJECT_TYPE ? currently HLSE_CERTIFICATE or HLSE_DATA;
2. HLSE_ATTR_OBJECT_INDEX ? will be the Tag of the object, 1 byte;
3. HLSE_ATTR_OBJECT_VALUE ? the object’s value.

An additional attribute that can only be passed in Create is HLSE_ATTR_READ_ONLY. Setting this value to 1 will lock (‘freeze’) the memory associated with the object (once it has been created) so it cannot be modified. The HLSE_ATTR_READ_ONLY attribute is not explicitly stored in the GP Storage lookup table.

Note that this attribute cannot be set after object creation. If not passed, it has a default value of 0 (can be modified).

Creation fails if there is not enough continuous unlocked space for the new object’s value.

Value Update

It is possible to change the object’s value by calling HLSE_SetObjectAttribute() with HLSE_ATTR_OBJECT_VALUE. If the object needs to be enlarged, it is only permitted if enough memory is available for the object to grow, case as follows:

1. Within the same GP Storage’s chunk size (32 bytes), so that the same amount of storage chunks will be used - For example, if the size was originally 21 bytes then the object occupies 1 chunk, and it is possible to enlarge it up to 32 bytes.
2. Up to the offset of the next allocated object in the GP memory.

If a larger size is required, the object must first be erased and then re-created (assuming a sufficiently large continuous unlocked space is available in GP memory).

Direct Access Value Update

It is possible to change a sub section of a Data object's value by calling HLSE_SetObjectAttribute() with HLSE_ATTR_DIRECT_ACCESS_OBJECT_VALUE, where the value should point to a HLSE_DIRECT_ACCESS_ATTRIBUTE_VALUE structure that passes the offset, number of bytes to read and the buffer. The update is only permitted within the object's GP Storage's chunk boundary.

Erasing an object

To erase an object first fetch its handle with HLSE_EnumerateObjects() and call HLSE_EraseObject(). Erasing an object only invalidates its lookup table entry, it does not erase its value contents in the GP Storage, due to performance reasons.

Interoperability of Object storage and locked chunks

The following defines the behavior of the HLSE API when updating (full/partial) or erasing partially locked objects stored in GP memory:

1. When updating an object (by definition this concerns the complete object) the HLSE API first checks that no chunk of the object is locked before updating the object.
2. When doing a partial update of an object the HLSE API does not check whether the affected memory chunks(s) are locked or unlocked. The partial update will fail or succeed accordingly. Consequently one must only issue a partial update of an object for chunks that are unlocked.
3. When erasing an object, the HLSE_EnumerateObjects() API checks whether the first chunk of the object is locked. If the first chunk is not locked the entry corresponding to the object is removed from the GP lookup table. If the first chunk is locked, the object is considered 'read-only' and the object is not removed from the GP lookup table. As explained above, erasing an object does not erase the value associated with the object.
4. Locking the GP storage chunks containing the lookup table (even a partial lock) will make it impossible to remove, add or update objects.

Notes

1. If the applet is Trust Provisioned prior to being shipped to the user, with e.g. one or more certificate(s), then the lookup table is expected to be in the GP Data.
2. If the lookup table is missing (invalid value), then it is automatically created by the host library upon the first call to CreateObject of such an object.
3. When reading a certificate, the response omits any trailing padding at the end of the certificate. The size of the certificate is determined by the length value of the certificates initial TL(V) header.
4. When updating an Object - the length in the GP table will be kept as the maximum size of the existing and new the object. As a consequence, it's not possible to shrink the size of an object by updating it.
5. Don't use direct A71CH API access in combination with the HLSE Object API as one can damage the lookup table or the value of stored objects.

10.4.3 API details

HLSEObjects.h

Description Host Lib wrapper API: Object Operations

Functions

```
HLSE_RET_CODE HLSE_EnumerateObjects (HLSE_OBJECT_TYPE          objectType,  
                                     HLSE_OBJECT_HANDLE *objectHandles,   U16  
                                     *objectHandlesLen)
```

Enumerates all the Objects that currently exist on the Secure Element and have `objectType` type. A list of object handles is returned in `objectHandles`.

In order to enumerate all the Objects, set `HLSE_ANY_TYPE` in `objectType`.

Each object has a unique `HLSE_OBJECT_HANDLE` value - this value depends on the library implementation.

If `objectHandles` is NULL, then all that the function does is return (in `*objectHandlesLen`) a number of `HLSE_OBJECT_HANDLE` which would suffice to hold the returned list. `HLSE_SW_OK` is returned by the function.

If `objectHandles` is not NULL, then `*objectHandlesLen` must contain the number of handles in the buffer `objectHandles`. If that buffer is large enough to hold number of handles to be returned, then the handles are copied to `objectHandles`, and `HLSE_SW_OK` is returned by the function. If the buffer is not large enough, then `HLSE_ERR_BUF_TOO_SMALL` is returned. In either case, `*objectHandlesLen` is set to hold the exact number of handles to be returned.

Parameters

- [in] `objectType`: The type of the Objects to be enumerated
- [inout] `objectHandles`: IN: caller passes a buffer of at least `*objectHandlesLen`; OUT: contains the handles of the objects
- [inout] `objectHandlesLen`: IN: number of handles in `objectHandles`. OUT: set to hold the exact number of handles in `objectHandles`.

Return Value

- `HLSE_SW_OK`: Successfull execution
- `HLSE_ERR_BUF_TOO_SMALL`: Buffer is too small to return the handles
- `HLSE_ERR_API_ERROR`: Invalid function arguments

```
HLSE_RET_CODE HLSE_CreateObject (HLSE_ATTRIBUTE *attributes,   U16   attributesNum,  
                                 HLSE_OBJECT_HANDLE *hObject)
```

Creates or Generates an Object on the Secure Element, and returns a handle to it.

If the object already exists, it depends on the Secure Element behavior whether this function succeeds (e.g. set a new value) or fail with an error.

`attributes` is an array of attributes that the object should be created with. Some of the attributes may be mandatory, such as `HLSE_ATTR_OBJECT_TYPE` and `HLSE_ATTR_OBJECT_INDEX` (the id of the object), and some are optional.

In case there is a conflict in the attribute list (e.g. 2 differnt object types) it is the responsibility of the library to detect it and return an error.

Parameters

- [in] attributes: The attributes to be used in creating the Object
- [in] attributesNum: The number of attributes in attributes
- [inout] hObject: IN: A pointer to a handle (must not be NULL); OUT: The handle of the created Object

Return Value

- HLSE_SW_OK: Successfull execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE `HLSE_EraseObject` (HLSE_OBJECT_HANDLE *hObject*)

Erases an object from the Secure Element.

This means the object with the specified handle can no longer be used.

Parameters

- [in] hObject: The handle of the Object to be erased

Return Value

- HLSE_SW_OK: Successfull execution

HLSE_RET_CODE `HLSE_SetObjectAttribute` (HLSE_OBJECT_HANDLE *hObject*,

HLSE_ATTRIBUTE **attribute*)

Sets the requested Attribute of the Object.

The parameter attribute may convey additinal information (e.g. a key value), in addition to the attribute's type.

Parameters

- [in] hObject: The handle of the Object that its attribute should be set
- [in] attribute: The attribute to be Set

Return Value

- HLSE_SW_OK: Successfull execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE `HLSE_GetObjectAttribute` (HLSE_OBJECT_HANDLE *hObject*,

HLSE_ATTRIBUTE **attribute*)

Obtains the value of the Object's requested Attribute.

The parameter attribute specifies the Type of the attribute to be returned, and the data is returned in the attribute's value and valueLen members.

If attribute->value is NULL, then all that the function does is return (in *attribute->valueLen) a number of bytes which would suffice to hold the value to be returned. HLSE_SW_OK is returned by the function.

If attribute->value is not NULL, then *attribute->valueLen must contain the number of bytes in the buffer attribute->value. If that buffer is large enough to hold the value be returned, then the data is copied to attribute->value, and HLSE_SW_OK is returned by the function. If the buffer is not large enough, then HLSE_ERR_BSF_TOO_SMALL is returned. In either case, *attribute->valueLen is set to hold the exact number of bytes to be returned.

Parameters

- [in] hObject: The handle of the Object that its attribute's value should be obtained

- [inout] attribute: The attribute to be obtained

Return Value

- HLSE_SW_OK: Successfull execution
- HLSE_ERR_BUF_TOO_SMALL: attribute->value is too small to return the data
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE **Debug_ForceReadGPDataTable** (void)

Debug Utility

Force Read of GPDataTable from gp storage even if already in global memory variable

NOTE! : To be used only for internal testing and Debugging

currently used to test the GP Table manipulation

Return Value

- HLSE_SW_OK: Successfull execution

HLSECrypto.h

Description Host Lib wrapper API: Cryptographic functions

Functions

HLSE_RET_CODE **HLSE_GetSupportedMechanisms** (HLSE_MECHANISM_TYPE *mechanisms,
U16 *mechanismNum)

Enumerates all the Cryptographic Mechanisms that are supported by the library. A list of mechanisms is returned in mechanisms.

If mechanisms is NULL, then all that the function does is return (in *mechanismNum) the number of HLSE_MECHANISM_TYPE which would suffice to hold the returned list. HLSE_SW_OK is returned by the function.

If mechanisms is not NULL, then *mechanismNum must contain the number of mechanisms in the buffer mechanisms. If that buffer is large enough to hold number of mechanisms to be returned, then the mechanisms are copied to mechanisms, and HLSE_SW_OK is returned by the function. If the buffer is not large enough, then HLSE_ERR_BUF_TOO_SMALL is returned. In either case, *mechanismNum is set to hold the exact number of mechanisms to be returned.

Parameters

- [inout] mechanisms: IN: caller passes a buffer of at least *mechanismNum; OUT: contains the mechanisms supported
- [inout] mechanismNum: IN: number of mechanisms in mechanisms; OUT: set to hold the exact number of mechanisms

Return Value

- HLSE_SW_OK: Successfull execution
- HLSE_ERR_BUF_TOO_SMALL: Buffer is too small to return the mechanisms
- HLSE_ERR_API_ERROR: Invalid function arguments

```
HLSE_RET_CODE HLSE_GetSupportedMechanismsForObject (HLSE_OBJECT_HANDLE
                                                    hObject,
                                                    HLSE_MECHANISM_TYPE
                                                    *mechanism,      U16    *mecha-
                                                    nismLen)
```

Enumerates all the Cryptographic Mechanisms that are supported by the Object. A list of mechanisms is returned in mechanisms.

If mechanism is NULL, then all that the function does is return (in *mechanismLen) the number of HLSE_MECHANISM_TYPE which would suffice to hold the returned list. HLSE_SW_OK is returned by the function.

If mechanism is not NULL, then *mechanismLen must contain the number of mechanisms in the buffer mechanisms. If that buffer is large enough to hold number of mechanisms to be returned, then the mechanisms are copied to mechanisms, and HLSE_SW_OK is returned by the function. If the buffer is not large enough, then HLSE_ERR_BUF_TOO_SMALL is returned. In either case, *mechanismLen is set to hold the exact number of mechanisms to be returned.

Parameters

- [in] hObject: The handle of the Object that the Mechanisms it supports should be returned
- [inout] mechanism: IN: caller passes a buffer of at least *mechanismNum; OUT: contains the mechanisms supported
- [inout] mechanismLen: IN: number of mechanisms in mechanisms. OUT: set to hold the exact number of mechanisms

Return Value

- HLSE_SW_OK: Successfull execution
- HLSE_ERR_BUF_TOO_SMALL: Buffer is too small to return the mechanisms
- HLSE_ERR_API_ERROR: Invalid function arguments

```
HLSE_RET_CODE HLSE_Digest (HLSE_MECHANISM_INFO *pMechanismType, U8 *inData, U16 in-
                           DataLen, U8 *outDigest, U16 *outDigestLen)
```

Calculates the Digest (e.g. Sha256) value of the data provided as input.

The Cryptographic Mechanism to be used is passed in the type member of the pMechanismType parameter.

If additional information is required by the specific digest mechanism, is will be conveyed in pMechanismType->pParameter.

If outDigest is NULL, then all that the function does is return (in *outDigestLen) a number of bytes which would suffice to hold the digest value. HLSE_SW_OK is returned by the function.

If outDigest is not NULL, then *outDigestLen must contain the number of bytes in the buffer outDigest. If that buffer is large enough to hold the digest value be returned, then the data is copied to outDigest, and HLSE_SW_OK is returned by the function. If the buffer is not large enough, then HLSE_ERR_BUF_TOO_SMALL is returned. In either case, *outDigestLen is set to hold the exact number of bytes to be returned.

Parameters

- [in] pMechanismType: The Digest Cryptographic Mechanism to be used
- [in] inData: Data buffer for which the digest must be calculated
- [in] inDataLen: The length of data passed as argument

- [inout] outDigest: IN: caller passes a buffer to hold the digest value; OUT: contains the calculated digest
- [inout] outDigestLen: IN: length of the outDigest buffer passed; OUT: the number of bytes returned in outDigest

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_BUF_TOO_SMALL: outDigest is too small to return the digest
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE **HLSE_Sign** (HLSE_MECHANISM_INFO *pMechanismType,
 HLSE_OBJECT_HANDLE hObject, U8 *inData, U16 inDataLen,
 U8 *outSignature, U16 *outSignatureLen)

Signs the data provided using the Object key and the requested mechanism.

The Cryptographic Mechanism to be used is passed in the type member of the pMechanismType parameter. A handle to the key to sign the data with is provided by hObject.

If additional information is required by the specific signing mechanism, is will be conveyed in pMechanismType->pParameter.

If outSignature is NULL, then all that the function does is return (in *outSignatureLen) a number of bytes which would suffice to hold the signature. HLSE_SW_OK is returned by the function.

If outSignature is not NULL, then *outSignatureLen must contain the number of bytes in the buffer outSignature. If that buffer is large enough to hold the signature be returned, then the data is copied to outSignature, and HLSE_SW_OK is returned by the function. If the buffer is not large enough, then HLSE_ERR_BUF_TOO_SMALL is returned. In either case, *outSignatureLen is set to hold the exact number of bytes to be returned.

Parameters

- [in] pMechanismType: The signing Cryptographic Mechanism to be used
- [in] hObject: The handle of the Object key to sign with
- [in] inData: Data buffer for that should be signed (e.g. a digest)
- [in] inDataLen: The length of data passed as argument
- [inout] outSignature: IN: caller passes a buffer to hold the signature; OUT: contains the calculated signature
- [inout] outSignatureLen: IN: length of the outSignature buffer passed; OUT: the number of bytes returned in outSignature

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_BUF_TOO_SMALL: outSignature is too small to return the signature
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE **HLSE_VerifySignature** (HLSE_MECHANISM_INFO *pMechanismType,
 HLSE_OBJECT_HANDLE hObject, U8 *inData,
 U16 inDataLen, U8 *inSignature, U16 inSignatureLen)

Verifies whether inSignature is the signature of inData using the public key object referenced by hObject as the verifying public key.

The Cryptographic Mechanism to be used is passed in the type member of the pMechanismType parameter.

Parameters

- [in] pMechanismType: The signing Cryptographic Mechanism that was used
 - [in] hObject: The handle of the Object public key to verify with
 - [in] inData: The data that was signed (e.g. a digest)
 - [in] inDataLen: The length of data passed as argument
 - [in] inSignature: Pointer to the provided signature.
 - [in] inSignatureLen: Length of the provided signature (pSignature)

Return Value

- `HLSE_SW_OK`: Upon successful execution
 - `HLSE_ERR_GENERAL_ERROR`: if the verification fails

Verifies whether `inSignature` is the signature of `inData` using an external public key object as the verifying public key.

The Cryptographic Mechanism to be used is passed in the type member of the pMechanismType parameter.

Parameters

- [in] pMechanismType: The signing Cryptographic Mechanism that was used
 - [in] inExtKey: The value of the external public key to verify with
 - [in] inExtKeyLen: The length in bytes of the external key
 - [in] inData: The data that was signed (e.g. a digest)
 - [in] inDataLen: The length of data passed as argument
 - [in] inSignature: Pointer to the provided signature.
 - [in] inSignatureLen: Length of the provided signature (pSignature)

Return Value

- HLSE_SW_OK: Upon successful execution
 - HLSE_ERR_GENERAL_ERROR: if the verification fails

```
HLSE_RET_CODE HLSE_DeriveKey(HLSE_MECHANISM_INFO *pMechanismType,  
                             HLSE_OBJECT_HANDLE hObject, U8 *outDerivedKey, U16  
                             *outDerivedKeyLen)
```

Derives the key referenced by the `hObject` handle using the requested mechanism and return the derived key in `outDerivedKey`.

The Cryptographic Mechanism to be used is passed in the type member of the pMechanismType parameter.

If additional information is required by the specific signing mechanism, it will be conveyed in pMechanismType->pParameter.

If `outDerivedKey` is `NULL`, then all that the function does is return (`in *outDerivedKeyLen`) a number of bytes which would suffice to hold the derived key. `HLSE_SW_OK` is returned by the function.

If `outDerivedKey` is not NULL, then `*outDerivedKeyLen` must contain the number of bytes in the buffer `outDerivedKey`. If that buffer is large enough to hold the derived key, then the data is copied to `outDerivedKey`, and `HLSE_SW_OK` is returned by the function. If the buffer is not large enough, then `HLSE_ERR_BUF_TOO_SMALL` is returned. In either case, `*outDerivedKeyLen` is set to hold the exact number of bytes of the derived key.

Parameters

- [in] `pMechanismType`: The signing Cryptographic Mechanism to be used
- [in] `hObject`: The handle of the Object key to be derived
- [inout] `outDerivedKey`: IN: caller passes a buffer to hold the derived key; OUT: contains the derived key
- [inout] `outDerivedKeyLen`: IN: length of the `outDerivedKey` buffer passed; OUT: the number of bytes returned in `outDerivedKey`

Return Value

- `HLSE_SW_OK`: Upon successful execution
- `HLSE_ERR_BUF_TOO_SMALL`: `outDerivedKey` is too small to return the derived key
- `HLSE_ERR_API_ERROR`: Invalid function arguments

`HLSE_RET_CODE HLSE_Encrypt (HLSE_MECHANISM_INFO *pMechanismType,
 HLSE_OBJECT_HANDLE hObject, U8 *inData, U16 inDataLen, U8
 *outData, U16 *outDataLen)`

Encrypts the data provided using the Object key and the requested mechanism.

The Cryptographic Mechanism to be used is passed in the `pMechanismType` member of the `pMechanismType` parameter. A handle to the key to encrypt the data with is provided by `hObject`.

If additional information is required by the specific encryption mechanism, is will be conveyed in `pMechanismType->pParameter`.

If `outData` is NULL, then all that the function does is return (in `*outDataLen`) a number of bytes which would suffice to hold the return value. `HLSE_SW_OK` is returned by the function.

If `outData` is not NULL, then `*outDataLen` must contain the number of bytes in the buffer `outData`. If that buffer is large enough to hold the data be returned, then the data is copied to `outData`, and `HLSE_SW_OK` is returned by the function. If the buffer is not large enough, then `HLSE_ERR_BUF_TOO_SMALL` is returned. In either case, `*outDataLen` is set to hold the exact number of bytes to be returned.

Parameters

- [in] `pMechanismType`: The encryption Cryptographic Mechanism to be used
- [in] `hObject`: The handle of the Object key to encrypt with
- [in] `inData`: Data buffer for that should be encrypted
- [in] `inDataLen`: The length of data passed as argument
- [inout] `outData`: IN: caller passes a buffer to hold the data to be returned; OUT: contains the encrypted data
- [inout] `outDataLen`: IN: length of the `outData` buffer passed; OUT: the number of bytes returned in `outData`

Return Value

- `HLSE_SW_OK`: Upon successful execution

- HLSE_ERR_BUF_TOO_SMALL: outData is too small to return the data
- HLSE_ERR_API_ERROR: Invalid function arguments

```
HLSE_RET_CODE HLSE_Decrypt (HLSE_MECHANISM_INFO *pMechanismType,
                           HLSE_OBJECT_HANDLE hObject, U8 *inData, U16 inDataLen, U8
                           *outData, U16 *outDataLen)
```

Decrypts the data provided using the Object key and the requested mechanism.

The Cryptographic Mechanism to be used is passed in the type member of the pMechanismType parameter. A handle to the key to decrypt the data with is provided by hObject.

If additional information is required by the specific decryption mechanism, is will be conveyed in pMechanismType->pParameter.

If outData is NULL, then all that the function does is return (in *outDataLen) a number of bytes which would suffice to hold the return value. HLSE_SW_OK is returned by the function.

If outData is not NULL, then *outDataLen must contain the number of bytes in the buffer outData. If that buffer is large enough to hold the data be returned, then the data is copied to outData, and HLSE_SW_OK is returned by the function. If the buffer is not large enough, then HLSE_ERR_BUF_TOO_SMALL is returned. In either case, *outDataLen is set to hold the exact number of bytes to be returned.

Parameters

- [in] pMechanismType: The decryption Cryptographic Mechanism to be used
- [in] hObject: The handle of the Object key to decrypt with
- [in] inData: Data buffer for that should be decrypted
- [in] inDataLen: The length of data passed as argument
- [inout] outData: IN: caller passes a buffer to hold the data to be returned; OUT: contains the decrypted data
- [inout] outDataLen: IN: length of the outData buffer passed; OUT: the number of bytes returned in outData

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_BUF_TOO_SMALL: outData is too small to return the data
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSEComm.h

Description Host Lib wrapper API: Communication and Secure Channel functions

Functions

HLSE_RET_CODE **HLSE_Connect** (HLSE_CONNECTION_PARAMS **params*,
 HLSE_COMMUNICATION_STATE **commState*)
Establishes the communication with the Secure Element according to the requested type. Additional parameters required for establishing the communication are passed in *params*.

The physical communication layer used (e.g. SCI2C) is determined at compilation time.

Parameters

- [inout] *params*: Additional parameters for opening the communication
- [inout] *commState*: Points to a HLSE_COMMUNICATION_STATE which returns the communication state (e.g. ATR)

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE **HLSE_CloseConnection** (HLSE_CLOSE_CONNECTION_MODE *mode*)
Closes the communication with the Secure Element.

Parameters

- [in] *mode*: Specific information that may be required on the link layer

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE **HLSE_ResumeConnection** (HLSE_COMMUNICATION_STATE **commState*,
 HLSE_SECURE_CHANNEL_SESSION_STATE **sm-
 State*)

Resumes the communication with the Secure Element including the secure channel from the previously retrieved communication state and secure channel session state.

Parameters

- [in] *commState*: communication state
- [in] *smState*: secure channel session state

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE **HLSE_SendAPDU** (U8 **cmd*, U16 *cmdLen*, U8 **resp*, U16 **respLen*)

Sends the command APDU to the Secure Element and retrieves the response APDU. The latter consists of the concatenation of the response data (possibly none) and the status word (2 bytes).

The command APDU and response APDU are not interpreted by the host library.

The command/response APDU sizes must lay within the APDU size limitations

Parameters

- [in] *cmd*: command APDU

- [in] cmdLen: length (in byte) of cmd
- [inout] resp: response APDU (response data || response status word)
- [inout] respLen: IN: Length of resp buffer (resp) provided; OUT: effective length of response retrieved.

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE `HLSE_SCP_Subscribe` (HLSE_SCP_SignalFunction *callback*, void **context*)
Subscribe a HLSE_SCP_SignalFunction function to receive messages from the Secure Channel.

Parameters

- [in] callback: The function
- [in] context: Optional context information that the function is subscribed with and called with

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE `HLSE_SMChannelAuthenticate` (HLSE_SECURE_CHANNEL_ESTABLISH_PARAMS
 **params*, HLSE_SECURE_CHANNEL_STATE
 **channelState*)

Establishes a Secure Channel with the Secure Element, and when successful initializes the current Session Channel state.

Parameters

- [in] params: Data required to establish the Secure Channel
- [inout] channelState: Returns the Secure Channel state

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE `HLSE_SMChannelGetScpSessionState` (HLSE_SECURE_CHANNEL_SESSION_STATE
 **channelSessionState*)

Retrieve the Secure Channel Session state from the Host Library.

Parameters

- [inout] channelSessionState: IN: pointer to allocated structure; OUT: contains the session state

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE `HLSE_SMChannelSetScpSessionState` (HLSE_SECURE_CHANNEL_SESSION_STATE
 **channelSessionState*)

Sets the Secure Channel Session state of the Host Library. Can be used in a scenario where e.g. the bootloader has established the Secure Channel link between host and secure element and the Host OS must re-establish the communication with the secure element without breaking the session.

Parameters

- [in] channelSessionState: Contains the session state information

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSEMisc.h

Description Host Lib wrapper API: Miscellaneous functions

Functions

HLSE_RET_CODE **HLSE_DisablePlainInjectionMode** (void)

Permanently disables the Plain Injection mode

Return Value

- HLSE_SW_OK: Upon successful execution

HLSE_RET_CODE **HLSE_ResetContents** (void)

Clears all user data.

Return Value

- HLSE_SW_OK: Upon successful execution

HLSE_RET_CODE **HLSE_DbgDisableDebug** (void)

Permanently disables the Debug API.

Return Value

- HLSE_SW_OK: Upon successful execution

HLSE_RET_CODE **HLSE_DbgReflect** (U8 **inData*, U16 *inDataLen*, U8 **outData*, U16 **outDataLen*)

Invokes data reflection APDU (facilitates link testing). No check of data payload returned

Parameters

- [in] *inData*: The data to be sent to the Secure Element
- [in] *inDataLen*: The length of *inData*
- [inout] *outData*: IN: caller passes a buffer to hold the data to be returned; OUT: contains the retruned data
- [inout] *outDataLen*: IN: length of the *outData* buffer passed; OUT: the number of bytes returned in *outData*

Return Value

- HLSE_SW_OK: Upon successful execution
- HLSE_ERR_API_ERROR: Invalid function arguments

HLSE_RET_CODE **HLSE_DbgReset** (void)

Resets the Secure Module to the initial state.

Return Value

- HLSE_SW_OK: Upon successful execution

HLSE_RET_CODE HLSE_NormalizeECCSignature (U8 *signature, U16 signatureLen, U8 *normalizedSignature, U16 *normalizedSignatureLen)

The purpose of this function is to turn the proprietary ECDSA signature format - that may be returned by the applet - into a normalized ASN.1 format.

Parameters

- [in] signature: buffer containing the ECDSA signature in the applet specific format; OUT: Signature compliant to ASN.1
- [in] signatureLen: length of ECDSA signature length
- [inout] normalizedSignature: IN: caller passes a buffer to hold the data to be returned; OUT: contains the retrued data
- [inout] normalizedSignatureLen: IN: length of the outData buffer passed; OUT: the number of bytes returned in outData

Return Value

- HLSE_SW_OK: upon successfull execution
- HLSE_ERR_API_ERROR: Invalid function arguments

10.5 A71CH Legacy Configure Tool

10.5.1 Introduction

The A71CH Configure Tool is a command line tool that supports the insertion of credentials into the A71CH. It can also report on the value and status of the stored credentials and on the status of the device. The tool is provided in source code (`.../hostlib/a71ch/app`) and can be deployed in one of the following configurations:

- Installed on a development PC communicating over TCP/IP with the embedded target
- Standalone on an embedded target

In *Tool deployment* we go into more detail on this.

Simply invoking the tool in standalone mode on an MCIMX6UL-EVKB board results in the following output (some output edited away):

```
root@imx6ulevk:~# ./a71chConfig_i2c_imx
a71chConfig (Rev 1.00) .. connect to A71CH. Chunksize at link layer = 256.
...
Applet-Rev:SecureBox-Rev    : 0x0131:0x0000
*****
Usage: a71chConfig_
→[apdu|debug|erase|gen|info|interactive|lock|rcrt|scp|set|wcrt|help] <OptArg>
  apdu -cmd <hexval> -sw <hexval>
  debug [permanently_disable_debug|reset]
  ecrt -x <int>
  erase [cnt|pair|pub|sym] -x <int>
  gen pair -x <int>
  get pub -c <hex_value> -x <int> -k <keyfile.pem>
  info [all|cnt|device|objects|pair|pub|status]
  info gp -h <hexvalue_offset> -n <segments>
  interactive
```

(continues on next page)

(continued from previous page)

```

lock [pair|pub] -x <int>
lock gp -h <hexvalue_offset> -n <segments>
lock inject_plain
obj erase -x <int>
obj get -x <int> [-h <hexvalue_offset>] [-s <hexvalue_size>] [-f <data.txt> -t ↵
↳ [hex_16|hex_32]]
obj update -x <int> -h <hexvalue_offset> [-f <data.txt> -t [hex_16|hex_32] | -h ↳
↳ <hexvalue_data>]
obj write -x <int> [-f <data.txt> -t [hex_16|hex_32] | -h <hexvalue_data> | -n ↳
↳ <segments>]
rcrt -x <int> [-c <certfile.crt>]
refpem -c <hex_value> -x <int> [-k <keyfile.pem>] -r <ref_keyfile.pem>
script -f <script.txt>
scp [put|auth] -h <hexvalue_keyversion> -k <keyfile>
set gp -h <hexvalue_offset> -h <hexvalue_data>
set pair -x <int> [-k <keyfile.pem> | -h <hexvalue_pub> -h <hexvalue_priv>] [-w ↳
↳ <hexvalue_wrap_key>]
set pub -x <int> [-k <keyfile.pem> | -h <hexvalue>] [-w <hexvalue_wrap_key>]
set [cfg|cnt|sym] -x <int> -h <hexvalue> [-w <hexvalue_wrap_key>]
transport [lock|unlock -h <hexvalue_tpkey>]
ucrt -x <int> [-c <certfile.crt> | -h <hexvalue_data> | -p <certfile.pem>]
wcrt -x <int> [-c <certfile.crt> | -h <hexvalue_data> | -p <certfile.pem>] [-n ↳
↳ <padding-segments>]
*****

```

The tool provides an overview of the available command line options. We'll go into more detail on the syntax in [Command reference](#).

The easiest way to get familiar with the A71CH configure tool is to open it in interactive mode. Be sure to connect to an A71CH with the Debug Mode still available so you can easily revert to the initial state of the component. The following captures a session with a brand new A71CH with the Debug Mode active:

```

root@imx6ulevk:~/axHostSw/linux# ./a71chConfig_i2c_imx interactive
a71chConfig (Rev 1.00) .. connect to A71CH. Chunksize at link layer = 256.
I2CInit: opening /dev/i2c-1
I2C driver: PEC flag cleared
I2C driver supports plain i2c-level commands.
I2C driver supports Read Block.
SCI2C_ATR=0xB8.03.11.01.05.B9.02.01.01.BA.01.01.BB.0C.41.37.30.30.35.43.47.32.34.32.
↳ 52.31.BC.00.
HostLib Version : 0x0130
Applet-Rev:SecureBox-Rev : 0x0131:0x0000
>>> info device
A71CH in Debug Mode Version (SCP03 is not set up)
selectResponse: 0x0131
transportLockState: 0x03 (Transport Lock NOT YET set)
injectLockState: 0x02 (Unlocked)
gpStorageSize: 4096
uid (LEN=18):
47:90:51:68:47:91:12:10:23:41:00:53:66:96:47:51:48:12
>>> info pair
Public Keys from ECC key pairs:
idx=0x00 n.a.
idx=0x01 n.a.
idx=0x02 n.a.
idx=0x03 n.a.
>>> gen pair -x 0

```

(continues on next page)

(continued from previous page)

```
>>> info pair
Public Keys from ECC key pairs:
  idx=0x00 ECC_PUB (LEN=65):
04:0A:81:86:1D:0C:E6:F6:E4:57:65:8B:51:92:E9:D1:CB:AF:96:12:C6:71:FB:79:F1:3D:C9:64:4D:56:CC:87:
2E:8C:32:9B:0A:F8:BB:4B:79:56:7D:F0:9D:C2:D2:B8:96:E0:04:B7:D9:50:F5:EC:C2:50:99:25:6B:5B:4B:E1:
3B
  idx=0x01 n.a.
  idx=0x02 n.a.
  idx=0x03 n.a.
>>> quit
root@imx6ulevk:~/axHostSw/linux#
```

10.5.2 Usage modes

The A71CH Configure Tool can be used in:


- Interactive mode. The tool opens a communication session with the A71CH, the user can issue configure commands in this session. The syntax to be used is identical to the syntax used in the command line mode.
- Command line mode: passing parameters as command line arguments. Each invocation of the tool establishes a new communication session between Host and A71CH.
- Batch file mode: this is a special variant of the command line mode where multiple configure commands are bundled in a file that is passed as a command line argument. All commands contained in the file are handled in the same communication session between Host and A71CH.

Note: On POSIX platforms like LINUX or Cygwin the interactive mode supports simple command line completion and command history (navigateable with the up and down arrows). It also stores a list of executed commands in a file called 'a71chConfigCmdHistory.txt'.

10.5.3 Tool deployment

HW Setup for iMX

The HW setup, when using the Configure tool is illustrated the following figure. In case (1) the A71CH has not been integrated into an end-device yet. In case (2) the A71CH is already integrated into the end-device (e.g. an IoT Appliance)

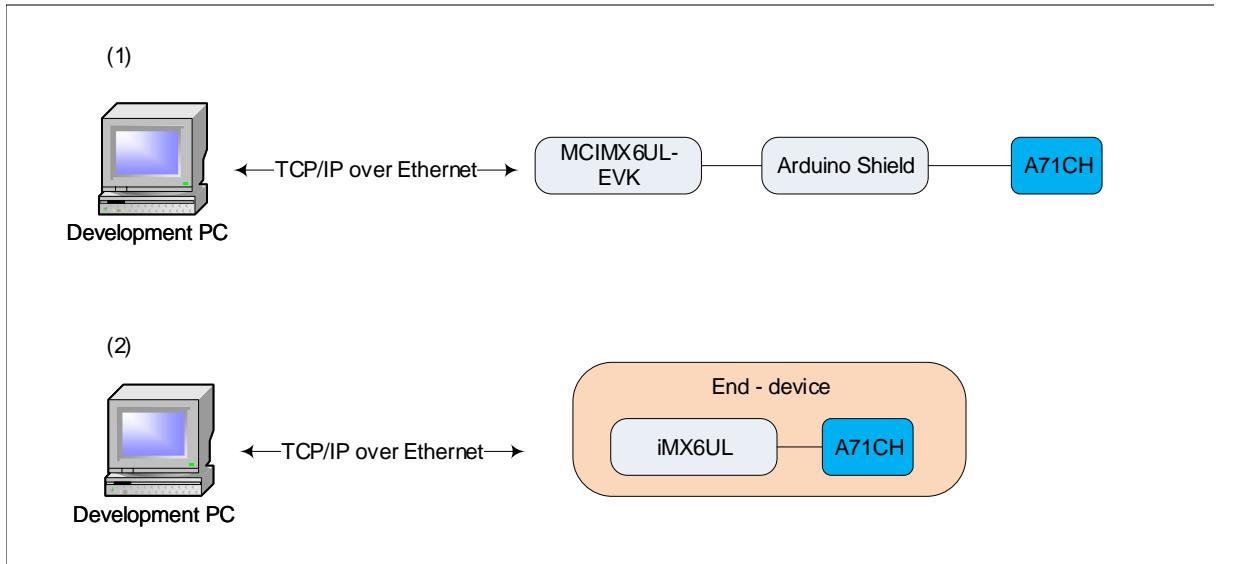


HW Setup for Kinetis

For running the configure tool with a Kinetis system, USB-VCOM Interface to PC is used. In this combination the VCOM Application needs to be running on kinetis. For more information, see [SW layers and communication for Kinetis](#).


SW layers and communication for iMX

In case the Configure Tool is installed on a development PC, the iMX6UL must run an RJCT-server process that will deal with the unpacking of the incoming commands and the communication over SCI2C with the A71CH.

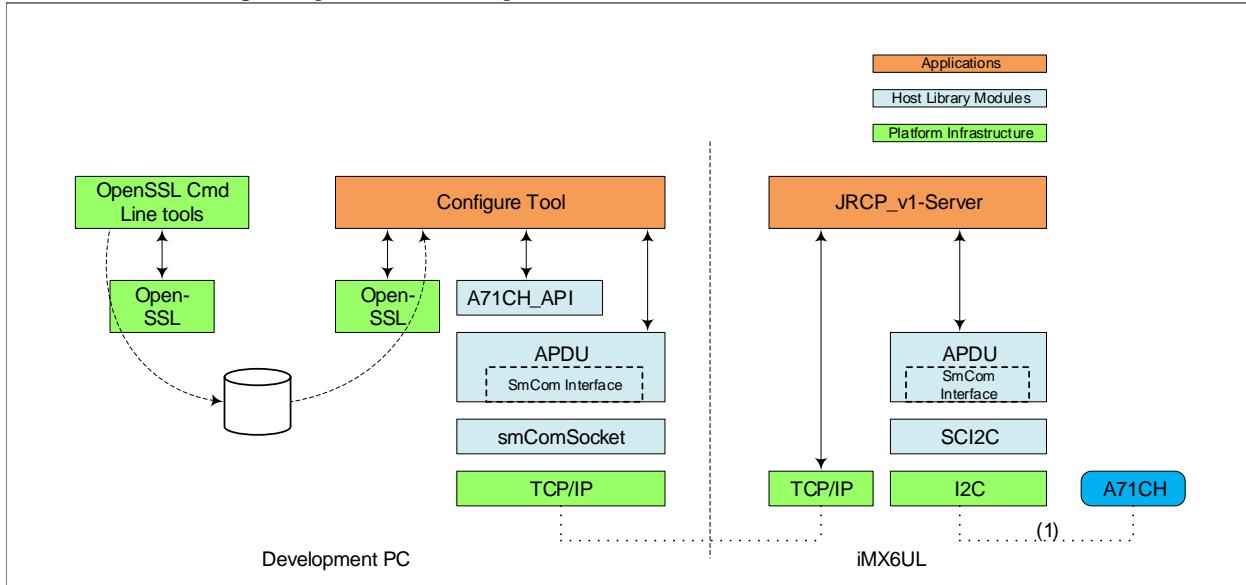

Note: Refer to [JRCP_v1 Server](#) for more information on the RJCT server.


In case the Configure Tool is installed on the embedded target, a development PC will typically be used to run a console that provides access via SSH to the embedded target.

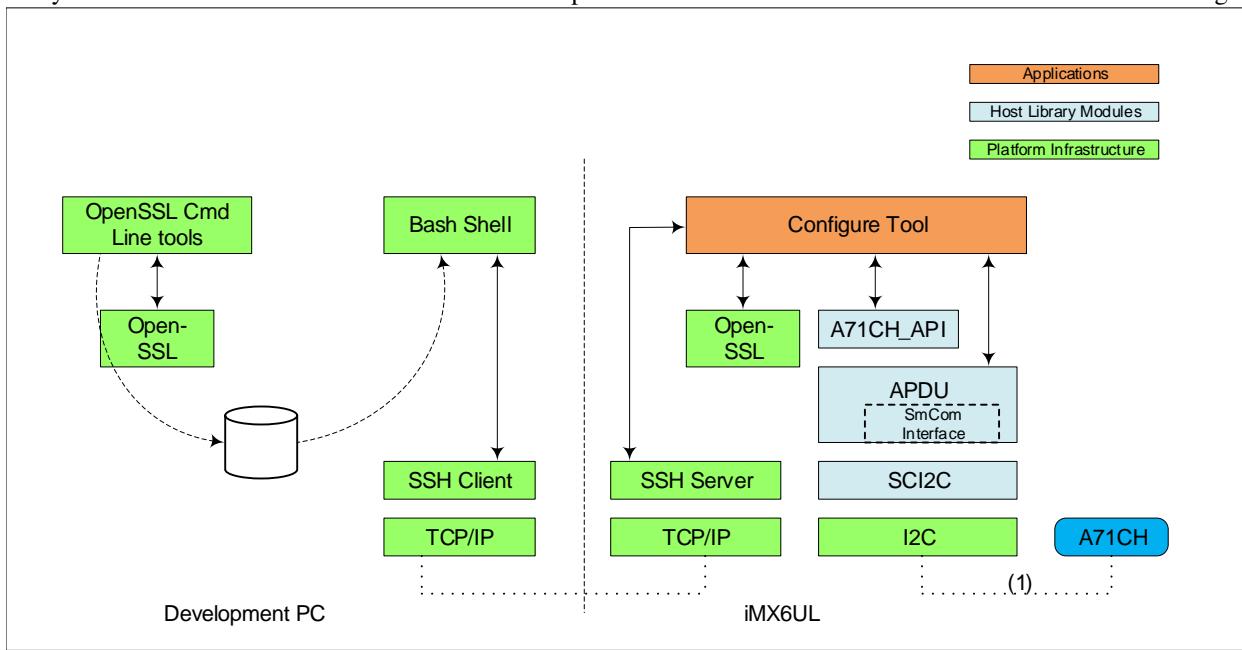

SW layers and communication for Kinetis

For Kinetis based embedded systems, the configuration tool can only be run from the PC. Also, the configuration tool is only compiled with OpenSSL (not with mbedTLS). VCOM needs to be running on the Kinetis platform and the communication between HostPC and Kinetis happens over USB VCOM.

The Kinetis platform will take care of SCI2C protocol communication with the A71CH.

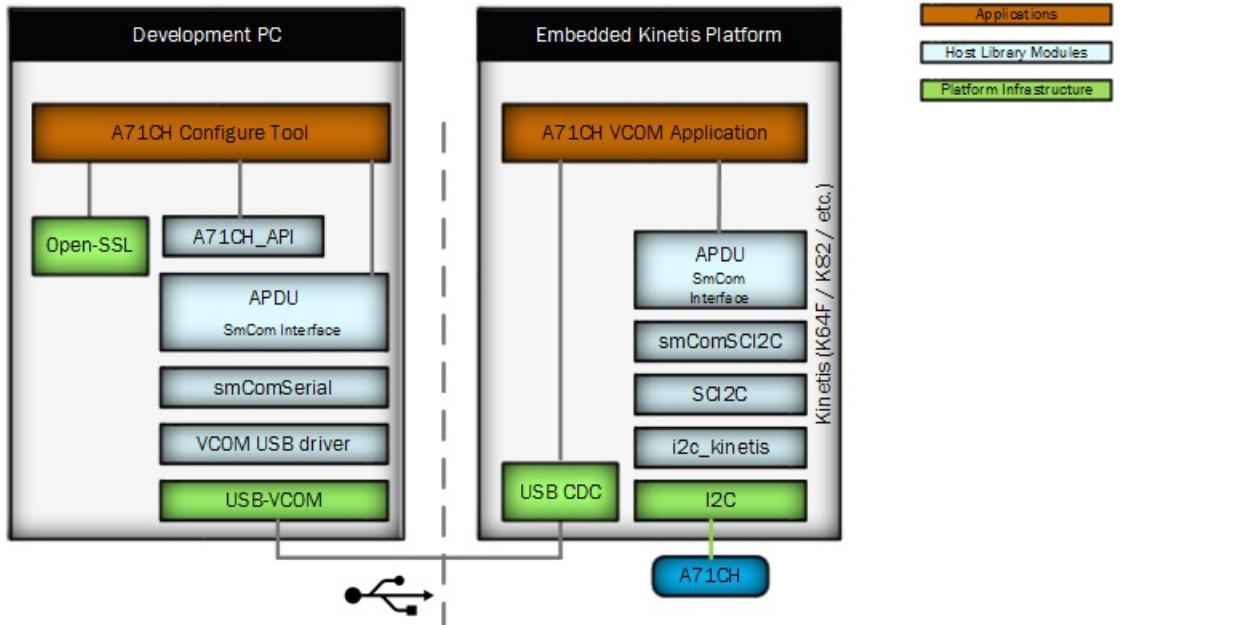

10.5.4 Command reference

Overall introduction

A command has the following general structure: a mandatory command name <cmd-n> is followed by an optional command qualifier <cmd-q>, followed by '0 to n' (option, value) pairs.

```
<cmd-n> [<cmd-q>] [-option <option-value>]*
```

The command names <cmd-n> are further listed and explained in detail in the remainder of this section.

```
<cmd-n> = {apdu, debug, erase, gen, info, ...}
```

Legal values for command qualifiers <cmd-q> depend on the actual command name <cmd-n>.

```
<cmd-q> = {cnt, gp, pair, pub, sym, ...}
cfg = configure key
cnt = monotonic counter
gp = general purpose data
pair = ECC key pair
pub = ECC public key
sym = Symmetric secret
```

```
<cmd-q> = {permanently_disable_debug, reset, all, ...}
```

Legal (option, value) pairs again depend on the preceding <cmd-n> or <cmd-n> <cmd-q>. The order of the (option, value) pairs after the <cmd-n> or <cmd-n> <cmd-q> needs to be strictly respected. The type of the value, can be any of the following

```
<hexvalue> = [0-9A-F][0-9A-F]([0-9A-F][0-9A-F])*  
examples of legal hexvalue's are  
0A0B0C0D  
00112233445566778899AABBCCDDEEFF  
the following hexvalue's are not allowed  
0x0A0B0C0D # leading '0x' decorator is not supported  
0A1          # odd number of ascii characters is not supported  
  
<int> = integer (currently only positive integers are supported)  
  
<filename> = further explained with the individual commands
```

apdu

```
apdu -cmd <hexvalue> -sw <hexvalue>
```

The apdu command allows to exchange an APDU (in 'raw' format) between the Host and the A71CH. It's mandatory to specify the expected status word that will be returned by the A71CH, if the actual returned status word is different this will be flagged as an execution error.

Note: This low level command can be used to extend the functionality of the Config Tool. In order to use this command one needs to consult the A71CH APDU specification. This command is not required for normal provisioning use cases.

In the following example the host requests the A71CH the SHA256 value of “F0F1F2F3”. The APDU command and response are printed on the console. The last two byte contained in the response

```
>>> apdu -cmd 8096000004F0F1F2F300 -sw 9000
cmd (LEN=10):
8096000004F0F1F2F300
rsp (LEN=34):
FEA4CE6719F1FDB6D2E30CFB86C2E797DBD4A3247FF2B0EFC15A814C5B25C75E9000
```

connect

```
connect [close|open]
```

The `connect` command allows to close or re-open the connection with an attached secure element. This command can be used in an interactive workflow where several instance of an A71CH are being configured. Before detaching a configured A71CH one calls `connect close`; after attaching another A71CH one calls `connect open`.

In the following example a connection is opened.

```
>>> connect open
I2CInit: opening /dev/i2c-1
I2C driver: PEC flag cleared
I2C driver supports plain i2c-level commands.
I2C driver supports Read Block.
```

debug

```
debug [permanently_disable_debug|reset]
```

The `debug` command can be used to permanently switch of the Debug Mode of the A71CH (the Debug Mode of the A71CH is a convience mode that can be used during product development). It can also be used - assuming the Debug Mode is still on - to bring the A71CH back to its initial state.

Note: Issuing a debug reset also erases all stored credentials.

In the following example a debug reset is issued.

```
>>> debug reset
```

ecrt

The `ecrt` command erases a certificate from the GP storage area by index.

```
ecrt -x <int>
```

Note: The valid index range for certificates is limited only by memory size.

In the following `ecrt` example the certificate at index 3 is erased from the A71CH.

```
>>> ecrt -x 3
```

erase

The **erase** command erases (deletes the value) of the specified stored credential. A locked credential can not be erased. Erasing a monotonic counter value is only possible when the Debug Mode of the A71CH is available.

```
erase [cnt|pair|pub|sym] -x <int>
```

In the following example the ECC key pair stored on index 0 is erased.

```
erase pair -x 0
```

gen

The **gen** command makes the A71CH create a valid ECC key pair on the indicated index.

```
gen pair -x <int>
```

In the following example a new ECC keypair is created and stored on index 1

```
gen pair -x 1
```

get

The **get** command retrieves the public key value from either a public key or key pair at the index passed as argument and stores it - in pem format - in a file provided as argument.

Note: The parameter passed after the **c** option represents the key type and can be either 0x10 for public pair or 0x20 for public key.

```
get pub -c <hex_value> -x <int> -k <keyfile.pem>
```

In the following example the ECC public key stored at index 0 is stored to PEM file keyfile.pem

```
get pub -c 20 -x 0 -k keyfile.pem
```

info

The **info** command can be used to echo the value and/or status of the A71CH or its stored credentials to the console. Issuing an ‘info all’ will echo the same information as issuing ‘info device’, ‘info cnt’, ‘info pair’, ‘info pub’, ‘info gp -h 0000 -n <all>’ in sequence. The value of secret credentials like the private part of a keypair, a symmetric key or a configuration key can not be retrieved from the A71CH. The ‘info status’ command will report on the Initialized/Empty and Locked/Open status of all credentials. It’s possible to echo the value of consecutive 32 byte data segments from general purpose data storage by specifying the hexadecimal offset (specified with 4 hexadecimal digits) into the data store and the amount of segments to display.

```
info [all|device|cnt|pair|pub|sym|status]
info gp -h <hexvalue_offset> -n <segments>
```

In the following example the credential status is requested. The output corresponds to the status of a new device.

```
>>> info status
SCP03 is Not enabled
Key Pair status:
    Index=0: Empty Open
    Index=1: Empty Open
    Index=2: Empty Open
    Index=3: Empty Open
Public Key status:
    Index=0: Empty Open
    Index=1: Empty Open
    Index=2: Empty Open
Config Key status:
    Index=0: Empty Open
    Index=1: Empty Open
    Index=2: Empty Open
Sym Secret status:
    Index=0: Empty Open
    Index=1: Empty Open
    Index=2: Empty Open
    Index=3: Empty Open
Counter status:
    Index=0: Initialized Open
    Index=1: Initialized Open
Certificate Objects:
    0 Absolute offset = 0x000 Actual Size = 0x313
    1 Absolute offset = 0x320 Actual Size = 0x313
Data Objects:
    0 Absolute offset = 0x640 Actual Size = 0x09
    1 Absolute offset = 0x660 Actual Size = 0x09
General Purpose Storage status:
    Offset=0x0000: Open      Offset=0x0020: Open      Offset=0x0040: Open
    ↵Offset=0x0060: Open      Offset=0x0080: Open      Offset=0x00C0: Open
    ↵Offset=0x00E0: Open      Offset=0x0100: Open      Offset=0x0140: Open
    ↵Offset=0x0160: Open      Offset=0x0180: Open      Offset=0x01C0: Open
    ↵Offset=0x01E0: Open      Offset=0x0200: Open      Offset=0x0240: Open
    ↵Offset=0x0260: Open      Offset=0x0280: Open      Offset=0x02C0: Open
    ↵Offset=0x02E0: Open      Offset=0x0300: Open      Offset=0x0340: Open
    ↵Offset=0x0360: Open      Offset=0x0380: Open      Offset=0x03C0: Open
    ↵Offset=0x03E0: Open
```

In the following example the contents from two 32 byte data segments is requested starting from general purpose storage offset 0x0010:

interactive

Used to start the interactive mode from the command line

lock

The lock commands allows to lock individual credentials (ECC public keys and ECC key pairs). It allows to lock data segments of 32 byte in general purpose storage (on offsets that are multiples of 0x0020). It's also possible to forbid the injection of unwrapped ECC public keys, ECC key pairs and symmetric secrets at the device level.

```
lock [pair|pub] -x <int>
lock gp -h <hexvalue_offset> -n <segments>
lock inject_plain
```

The following example locks the ECC key pair at index 0

```
>>> lock pair -x 0
```

The following example locks 2 data segments of 32 byte in general purpose data storage starting from offset 0x0060

```
>>> lock gp -h 0060 -n 2
```

obj erase

The obj erase command erases the object at the provided index.

```
obj erase -x <int>
```

Note: Upon erasing an object it cannot be reconstructed.

In the following obj erase example the object at index 0 is erased.

```
>>> obj erase -x 0
```

obj get

The obj get command gets the value of a data object, it retrieves the data from a specific offset within the data object (fetching the specified amount of byte). Optionally, the data is written to file. The type file could be 16 or 32 bytes at a line. If no type is specified the default would be 32 bytes.

```
obj get -x <int> [-h <hexvalue_offset>] [-s <hexvalue_size>] [-f <data.txt> -t [hex_
↪16|hex_32]]
```

Note: The offset is relative to the start location of the object and must be specified as a 4 digit hexadecimal value.

In the following obj get example the value of the object at index 0 is read out.

```
>>> obj get -x 0 -h 0000 -s 0009
>>> 112233445566778899
```

obj update

The `obj update` command updates the value of a data object. It updates the data relative to an internal offset passed as a parameter. The data can be passed on the command line or be contained in a file.

```
obj update -x <int> -h <hexvalue_offset> [-f <data.txt> -t [hex_16|hex_32] | -h
↪<hexvalue_data>]
```

Note: The data in the file must be binary and not textual. An object must already exist at the specified index. If data is read from file it can be set with lines in length of 16 or 32 bytes (i.e. hex_16 or hex_32). The default value is lines of 32 bytes.

In the following `obj update` example the value of the object at index 0 is updated.

```
>>> obj update -x 0 -h 0000 -h 998877665544332211
```

obj write

The `obj write` command creates an object. The value of the object to be created can be passed on the command line or contained in a file. When using the `-n` option the requested segments will be reserved for the data object and filled with zeros. If data is read from file it can be set with lines in length of 16 or 32 bytes (i.e. hex_16 or hex_32). The default value is lines of 32 bytes.

```
obj write -x <int> [-f <data.txt> -t [hex_16|hex_32] | -h <hexvalue_data> | -n
↪<segments>]
```

In the following `obj write` example an zero filled object is created at index 0 with a size of 5 segments.

```
>>> obj write -x 0 -n 5
```

rcrt

The `rcrt` command reads a certificate from the GP storage area by index. Optionally, the command can save the certificate read to a CRT file.

```
rcrt -x <int> [-c <certfile.crt>]
```

Note: The certificate data will be presented whether it was written to a file or not. The valid index range for certificates is limited only by memory size.

In the following `rcrt` example the certificate at index 3 is read from the A71CH, upon success it is also written to a CRT file.

```
>>> rcrt -x 3 -c certificate.crt
CER_DATA (LEN=520):
30820204308201A9020900CFD5820FFEC40937300A06082A8648CE3D04030230
8189310B30090603550406130242453116301406035504080C0D566C61616D73
42726162616E74310F300D06035504070C064C657576656E3111300F06035504
0A0C084E58502D44656D6F31163014060355040B0C0D4E58502D44656D6F2D55
6E6974310D300B06035504030C0464656D6F3117301506092A864886F70D0109
```

(continues on next page)

(continued from previous page)

```
01160864656D6F406E7870301E170D3135313230373130353132395A170D3136
313230363130353132395A308188310B30090603550406130242453116301406
035504080C0D566C61616D734272616E74310F300D06035504070C064C65
7576656E310E300C060355040A0C05697063616D31123010060355040B0C0969
7063616D556E69743112301006035504030C09697063616D44656D6F31183016
06092A864886F70D0109011609697063616D406E78703059301306072A8648CE
3D020106082A8648CE3D03010703420004DB4CDB6C5A96C1615895095222AA0E
A3BC6F9E714D6438F0B120D691F18D7E7410EE04BE71D33A2D8B2D3B66F7174A
9654536965AFD2ABADB55269C6A6C0085E300A06082A8648CE3D040302034900
304602210083AA91AE33396825D560390952AEE91C64814C7CA681BA50589558
D681F974270221009BA1CF31A823B96C391E3C4F839666AECE9949639D796B24
A5B987A92E6F1CFA
```

refpem

Note: The reference keys created by the `refpem` command are **only** compatible with the A71CH OpenSSL Engine based upon the A71CH Legacy API. The A71CH OpenSSL Engine based upon the SSS API use a different reference key format, these keys must be created with the `ssscli` tool.

The `refpem` command allows to create A71CH OpenSSL Engine specific reference pem files. It can be used in a mode that fetches the public key value from the attached A71CH:

```
refpem -c <hex_value> -x <int> -r <ref_keyfile.pem>
```

Or it can be used in a ‘not-connected’ mode that fetches the public key value from a pem file (containing an EC key pair) supplied as an argument.

```
refpem -c <hex_value> -x <int> -k <keyfile.pem> -r <ref_keyfile.pem>
```

The value following the `-c` switch must be either 10 (create a reference to a key pair) or 20 (create a reference to a public key). The value following the `-x` switch is the storage index of either key pair or public key.

The following command creates a reference pem file ‘`my_ref_keyfile.pem`’ referring to a keypair stored at index 1.

```
refpem -c 10 -x 1 -r my_ref_keyfile.pem
```

script

The `script` command can be used to issue the Configure tool commands contained in a file.

```
script -f <script.txt>
```

An example of script file (`script_example.txt`)

```
root@imx6ulevk:~# cat script_example.txt
# Simple example script
info pair
gen pair -x 0
info pair      # This will illustrate a key pair was created
```

The following example issues the commands contained in the script file above (`script_example.txt`)

```
>>> script -f script_example.txt
>> # Simple example script

>> info pair

Public Keys from ECC key pairs:
    idx=0x00 n.a.
    idx=0x01 n.a.
>> gen pair -x 0

>> info pair      # This will illustrate a key pair was created

Public Keys from ECC key pairs:
    idx=0x00 ECC_PUB (LEN=65):
04:A4:B3:3B:A3:D4:23:BD:19:C3:CB:20:DB:6F:D3:80:46:73:06:56:2F:83:B2:B1:AE:86:9A:EF:E9:7A:62:A3:
04:E7:C1:42:31:97:D5:19:5A:80:27:74:DC:20:EC:B7:93:9B:E5:C1:22:22:6B:E3:49:A4:FB:3A:5C:26:08:85:
B5
    idx=0x01 n.a.
```

scp

The `scp` command can be used to write a set of SCP03 keys to the A71CH ('`scp put ...`') or to establish an active SCP03 channel between Host and A71CH ('`scp auth ...`'). The '`scp clear_host`' command will force the Host to issue commands in the clear again.

```
scp [put|auth] -h <hexvalue_keyversion> -k <keyfile>
scp clear_host
```

An example of a keyfile containing a set of SCP03 keys:

```
root@imx6ulevk:~# cat scp_keyfile_example.txt
# This is a comment, empty lines and comment lines allowed.
ENC AA112233445566778899AABBCCDDEEFF # Trailing comment
MAC BB112233445566778899AABBCCDDEEFF # Optional trailing comment
DEK CC112233445566778899AABBCCDDEEFF # Optional trailing comment
```

set

The `set` command can be used to set a credential stored on the A71CH to a specific value.

Note: The `set gp` command can only be used to set a maximum of 32 byte of data at a time.

The value of a key pair or public key can either be passed as command line parameters or be contained in a pem-file (containing an EC key pair).

The command line value of the private key (set by the `set pair` command) can be either in the clear or wrapped with the Configuration key stored at index 1. Wrapping is according to [RFC3394](#).

The command line value of the public key (set by the `set pub` command) can be either in the clear or wrapped with the Configuration key stored at index 2. In case [RFC3394](#) wrapping is applied the first byte of the public key (the one indicating the public key format) is removed before applying wrapping.

The value of the configure key, the monotonic counter or the symmetric secret can only be passed explicitly as a command line parameter. The configure and symmetric keys can also be set wrapped (with the stored value of the key) according to [RFC3394](#).

Whether an argument is wrapped is implicit in the length of the provided argument.

```
set gp -h <hexvalue_offset> -h <hexvalue_data>
set pair -x <int> [-k <keyfile.pem> | -h <hexvalue_pub> -h <hexvalue_priv>]
set pub -x <int> [-k <keyfile.pem> | -h <hexvalue>]
set [cfg|cnt|sym] -x <int> -h <hexvalue>
```

The following example writes 5 byte of data at offset 0004 into the General Purpose data store. The data written (4137314348) is the equivalent of the ASCII encoding of the string ‘A71CH’. The command itself is preceded and followed by an info statement covering the general purpose storage segment of interest.

The following example set the key pair at index 1 from the value contained in file keyfile_ecc_nist_256_1.pem. The command itself is preceded and followed by an info statement on the stored key pairs.

```
>>> info pair
Public Keys from ECC key pairs:
    idx=0x00 n.a.
    idx=0x01 n.a.
>>> set pair -x 1 -k keyfile_ecc_nist_256_1.pem
ECCPrivateKey (LEN=32):
21:AF:C1:1E:F5:64:61:3D:2E:96:4D:8B:93:19:CC:AB:38:E0:7A:6E:35:3A:21:A3:D1:69:8B:19:13:DF:1D:FF

ECCPublicKey (LEN=65):
04:74:E2:1E:54:6C:C1:9E:31:58:55:B6:D5:45:D3:0D:3F:48:79:D4:64:5D:3F:67:73:75:FB:0B:2C:80:43:1E:
8D:34:95:71:0E:71:E1:E3:F8:93:62:75:B4:AC:F1:52:E3:DE:55:CC:1D:86:5E:B0:D1:22:A8:CF:35:EC:47:31:
F8
>>> info pair
Public Keys from ECC key pairs:
    idx=0x00 n.a.
    idx=0x01 ECC_PUB (LEN=65):
04:74:E2:1E:54:6C:C1:9E:31:58:55:B6:D5:45:D3:0D:3F:48:79:D4:64:5D:3F:67:73:75:FB:0B:2C:80:43:1E:
8D:34:95:71:0E:71:E1:E3:F8:93:62:75:B4:AC:F1:52:E3:DE:55:CC:1D:86:5E:B0:D1:22:A8:CF:35:EC:47:31:
F8

The value contained in file keyfile\ecc\nist\256\1.pem is
```

```
$ cat keyfile_ecc_nist_256_1.pem
-----BEGIN EC PRIVATE KEY-----
MHcCAQEICGvwR71ZGE9LpZNi5MZZks44HpuNToho9FpixkT3x3/oAoGCCqGSM49
AwEHoQUQDQgAEEdOIEvGzBnjFYVbbVRdMNP0h51GRdP2dzdfsLLIBDHo001XEocehj
+JNidbSs8VLj3lXMHYZesNEiqM817Ecx+A==
-----END EC PRIVATE KEY-----
```

The following example sets the public key at index 0 to the provided public key value (in the clear, ANSI X9.62 uncompressed format). The command itself is preceded and followed by an info statement on the stored public key.

```
>>> info pub
Public Keys:
    idx=0x00 n.a.
    idx=0x01 n.a.
>>> set pub -x 0 -h
→043802B1164C30860AC913F5F997B84158C40CFFCC1D3A4359BC22574A4FC95E628933A9E95820AD6B96A1DA106BDD5D6A
>>> info pub
Public Keys:
    idx=0x00 ECC_PUB (LEN=65):
04:38:02:B1:16:4C:30:86:0A:C9:13:F5:F9:97:B8:41:58:C4:0C:FF:CC:1D:3A:43:59:BC:22:57:4A:4F:C9:5E:
62:89:33:A9:E9:58:20:AD:6B:96:A1:DA:10:6B:DD:5D:6A:8E:55:6A:78:AE:95:9C:59:33:6F:E5:3E:3A:1D:9E:
D4
    idx=0x01 n.a.
```

The following example sets the monotonic counter at index 0 to 00E0. The command itself is preceded and followed by an info statement on the stored monotonic counters.

```
>>> info cnt
Monotonic counter values:
    idx=0x00 0x00000000
    idx=0x01 0x00000000
>>> set cnt -x 0 -h 000000E0
>>> info cnt
Monotonic counter values:
    idx=0x00 0x000000E0
    idx=0x01 0x00000000
```

transport

The `transport lock` command can be used to enable the transport lock on the A71CH. To disable the transport lock one needs to pass the transport key as an option value to the `transport unlock` command.

Note: A precondition to enable the transport lock is that the Transport Configuration key has been set: use '`set cfg -x 0 -h <hexvalue_tpkey>`' to achieve this. Furthermore the transport lock / unlock cycle can only be initiated once.

```
transport [lock|unlock -h <hexvalue_tpkey>]
```

The following example sets the Transport Configuration key, locks the device and finally unlocks the device. The `info device` command is used to illustrate the value of the `transportLockState` of the device.

```
>>> info device
...
transportLockState: 0x03 (Transport Lock NOT YET set)
...
>>> set cfg -x 0 -h AA112233445566778899AABBCCDDEEFF
>>> transport lock
>>> info device
...
transportLockState: 0x01 (Transport Lock is set)
...
>>> transport unlock -h AA112233445566778899AABBCCDDEEFF
>>> info device
A71CH in Debug Mode Version (SCP03 is not set up)
selectResponse: 0x0111
```

(continues on next page)

(continued from previous page)

```
transportLockState: 0x02 (Open device, Transport Lock can no longer be set)
injectLockState: 0x02 (Unlocked)
gpStorageSize: 1024
uid (LEN=18):
47:90:70:02:47:91:12:10:20:89:00:50:36:91:64:23:00:00
```

ucrt

The ucrt command updates a certificate to the GP storage area by index. The certificate can be provided as raw data (-h option), as a file in PEM format (-p option) or as a file in DER format (-c option).

```
ucrt -x <int> [-c <certfile.crt> | -h <hexvalue_data> | -p <certfile.pem>]
```

Note: In case the certificate to be written is in PEM format it will be stored into the A71CH in DER format. The valid index range for certificates is limited only by memory size.

In the following ucrt example a certificate contained in a PEM file (c:\certificate.pem) is stored into the A71CH at index 3.

```
>>> ucrt -x 3 -p c:\certificate.pem
Filename: c:\certificate.pem
Certificate Size (DER format) = 493 byte
```

wcrt

The wcrt command writes a certificate to the GP storage area by index. The certificate can be provided as raw data (-h option), as a file in PEM format (-p option) or as a file in DER format (-c option).

```
wcrt -x <int> [-c <certfile.crt> | -h <hexvalue_data> | -p <certfile.pem>] [-n
→<padding-segments>]
```

Note: Writing to an existing index will fail. Use the ucrt command to update the certificate (taking into account certificate size constraints) or use the ecrt command to erase and then write the new certificate. The valid index range for certificates is limited only by memory size. Using padding segments parameter creates an extra place holder for future updates with larger certificates at the same index without the need for erasing it first.

In case the certificate to be written is in PEM format it will be stored into the A71CH in DER format.

The rcrt command allows to read out a certificate by index.

In the following wcrt example a certificate contained in a PEM file (c:\certificate.pem) is stored into the A71CH at index 3.

```
>>> wcrt -x 3 -p c:\certificate.pem
Filename: c:\certificate.pem
Certificate Size (DER format) = 493 byte
```

10.5.5 Not connected mode

When starting up the A71CH Configure Tool it is possible to indicate no attached A71CH device is required. This is achieved by preceding the command (on the command line only) by the keyword nc (not connected).

Currently the only application of this feature is the creation of Reference Pem files where the public key value is contained in a Pem file (containing an EC key pair) passed as argument.

The following command creates a reference pem file ‘my_ref_keyfile.pem’ referring to a public key (stored or to be stored) at index 0 whose value is contained in ‘kp_keyfile.pem’

```
root@imx6ulevk:~# ./a71chConfig_i2c_imx nc refpem -c 20 -x 0 -k kp_keyfile.pem -r my_
→ref_keyfile.pem
a71chConfig (Rev 0.94) .. NOT connecting to A71CH.
ECCPublicKey (LEN=65):
04:7C:59:16:D4:F5:46:B3:D3:17:20:78:F8:AD:41:84:9A:79:46:6B:5B:0B:FC:39:3D:4C:E1:A8:53:F5:4F:8D:
C2:98:65:F8:84:E9:9E:28:38:09:FF:29:34:B6:97:27:DB:6C:0A:F3:79:B0:D7:2C:16:25:B5:CB:B8:A2:CB:70:
89
```

CHAPTER
ELEVEN

APPENDIX

11.1 Glossary

Table 1: Glossary

Term	Definition
EAR	Early Access Release
SE	Secure Element

11.2 APDU Commands over VCOM

Sending and Receiving Applet APDU Commands on VCOM using a Serial Terminal Emulator.

11.2.1 COM port parameters

Parameter	Value
Baud Rate	115200 bit/s
Data bits	8 Databits
Parity	No Parity
Stop Bits	1 Stop bit
FlowControl	Enable DTR

11.2.2 VCOM Format

Each APDU/command to be sent over the VCOM bridge has a 4 bytes header, the APDU to send follows as payload. The response contains the same header, followed by the response payload.

Byte	Description
1	Command <ul style="list-style-type: none">• 00: SoftReset / Fetch ATR• 01: Other commands
2	Node Address
3	Len MSB
4	Len LSB

11.2.3 Example Commands

The example shows the commands strings to be sent over VCOM and some parsing of the commands/responses

Soft Reset/ATR Response

- Soft Reset / Request ATR .

Field	Bytes in Hex
Command	00 00 00 00
VCOM Header	-
APDU	-
Response	00 00 00 23 00 A0 00 00 03 96 04 03 E8 00 FE 02 0B 03 E8 08 01 00 00 00 00 64 00 00 0A 4A 43 4F 50 34 20 41 54 50 4F
VCOM Header	00 00 00 23
Atr Re- sponse	-- -- -- -- 00 A0 00 00 03 96 04 03 E8 00 FE 02 0B 03 E8 08 01 00 00 00 00 64 00 00 0A 4A 43 4F 50 34 20 41 54 50 4F

Select IOT Applet

Select the SE050 IoT applet

Field	Bytes in Hex
Command	01 00 00 15 00 A4 04 00 0F A0 00 00 03 96 54 53 00 00 00 01 03 00 00 00 00
VCOM Header	01 00 00 15
APDU	-- -- -- -- 00 A4 04 00 0F A0 00 00 03 96 54 53 00 00 00 01 03 00 00 00 00
Response	01 00 00 09 03 01 00 3F FF 01 0B 90 00
VCOM Header	01 00 00 09
APDU Re- sponse	-- -- -- -- 03 01 00 3F FF 01 0B 90 00
applet Ver- sion	appletVersion in TLV with Tag1, (Len=7) -- -- -- -- -- -- 03 01 00 3F FF 01 0B

Get applet Version

Gets the applet version information.

Field	Bytes in Hex
Command	01 00 00 04 80 04 00 20
VCOM Header	01 00 00 04
APDU	-- -- -- 80 04 00 20
Response	01 00 00 0D 41 82 00 07 03 01 00 3F FF 01 0B 90 00
VCOM Header	01 00 00 0D
APDU Response	-- -- -- 41 82 00 07 03 01 00 3F FF 01 0B 90 00
applet Version	appletVersion in TLV with Tag1, (Len=7) -- -- -- -- -- -- 03 01 00 3F FF 01 0B

GetRandom

Gets x(8) byte random data from the SE050.

Field	Bytes in Hex
Command	01 00 00 0D 80 04 00 49 00 00 00 04 41 02 00 08 00 00
VCOM Header	01 00 00 0D
APDU	-- -- -- 80 04 00 49 00 00 00 04 41 02 00 08 00 00
Response	01 00 00 0E 41 82 00 08 B5 47 3C 8C A5 16 AC 31 90 00
VCOM Header	01 00 00 0E
APDU Response	-- -- -- 41 82 00 08 B5 47 3C 8C A5 16 AC 31 90 00
RandomData	-- -- -- -- -- -- B5 47 3C 8C A5 16 AC 31

GetUID

UID is an object with Object ID = 0x7FFF0206.

Field	Bytes in Hex
Command	01 00 00 13 80 02 00 00 00 00 0A 41 04 7F FF 02 06 43 02 00 12 00 00
VCOM Header	01 00 00 13
APDU	-- -- -- 80 02 00 00 00 00 0A 41 04 7F FF 02 06 43 02 00 12 00 00
Response	01 00 00 18 41 82 00 12 04 00 50 01 55 55 55 55 55 55 55 04 FF FF FF FF FF FA 90 00
VCOM Header	01 00 00 18
APDU Response	-- -- -- 41 82 00 12 04 00 50 01 55 55 55 55 55 55 55 55 04 FF FF FF FF FF FA 90 00
UID	UID in TLV with Tag1 -- -- -- -- -- -- 04 00 50 01 55 55 55 55 55 55 55 04 FF FF FF FF FF FA


11.3 Visual Studio 2019 Setup

11.3.1 Prerequisites

Install any edition of Visual Studio 2019, It will install the visual studio installer application.


11.3.2 Installing the components

- 1) Open Visual Studio Installer, click on more and then import configuration.

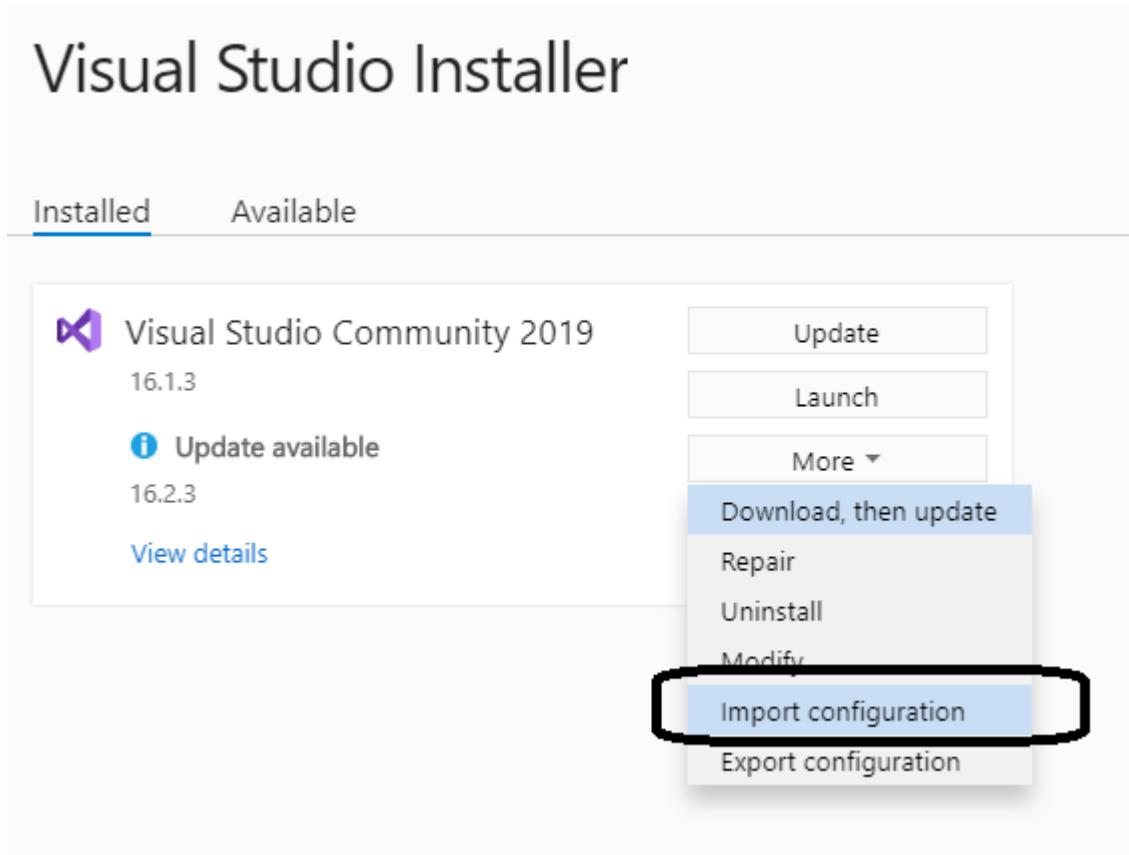


- 2) In the dialogue box give the path to the configuration file present in tools folder.

tools/vs2019Components.vsconfig

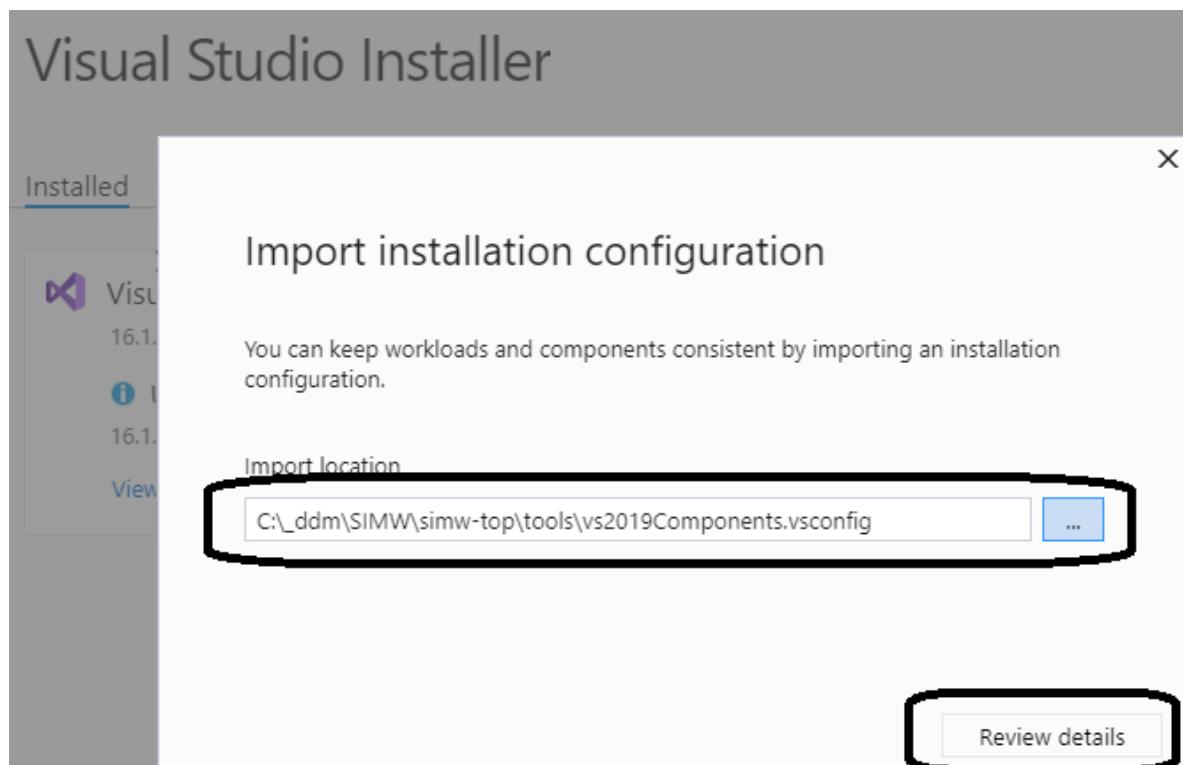

- 3) click on modify.

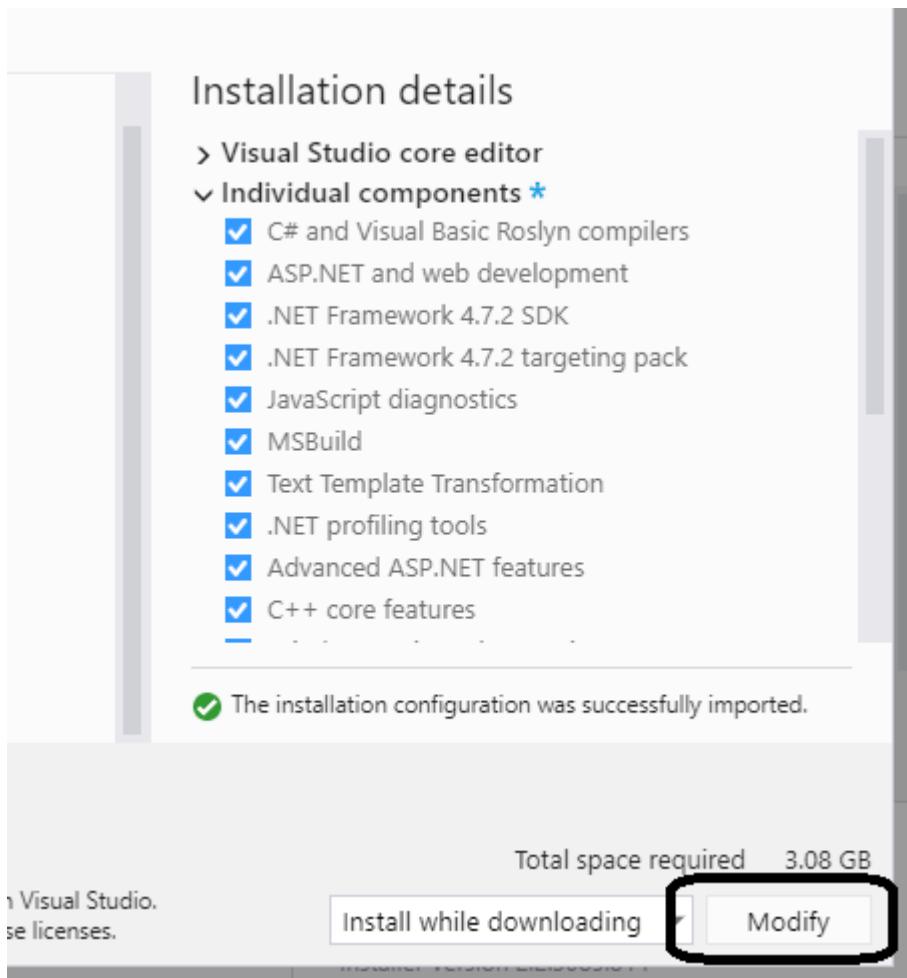

11.4 Setting up MCUXpresso IDE

1. Download MCUXpresso from: <https://www.nxp.com/support/developer-resources/software-development-tools/mcuxpresso-software-and-tools/mcuxpresso-integrated-development-environment-ide-MCUXpresso-IDE>
2. For additional help please refer to: https://www.nxp.com/docs/en/user-guide/MCUXpresso_IDE_User_Guide.pdf

11.4.1 To Download and install MCUXpresso IDE:

To create and install board specific SDK

- Login/create an account on the SDKBuilder website <https://mcuxpresso.nxp.com/en/select>.
- Select your Board i.e. FRDM-K64F or EVK-MIMXRT1060.
- Click on Build MCUXpresso SDK.
- Select Software Components.

Select Software Components

Select optional components from the list below to be added to your SDK.

3 items selected

Selected Middleware


FatFS, USB stack, lwIP

Note: MCUXpresso SDK Builder has a limitation with the components getting selected as on today, So to be on the safer side, all the Middleware components have been selected to generate the SDK.

- Download the SDK

11.4.2 To Install board specific SDK in MCUXpresso

- In MCUXpresso IDE, install the downloaded SDK by dragging and dropping it into the Installed SDK's tab.

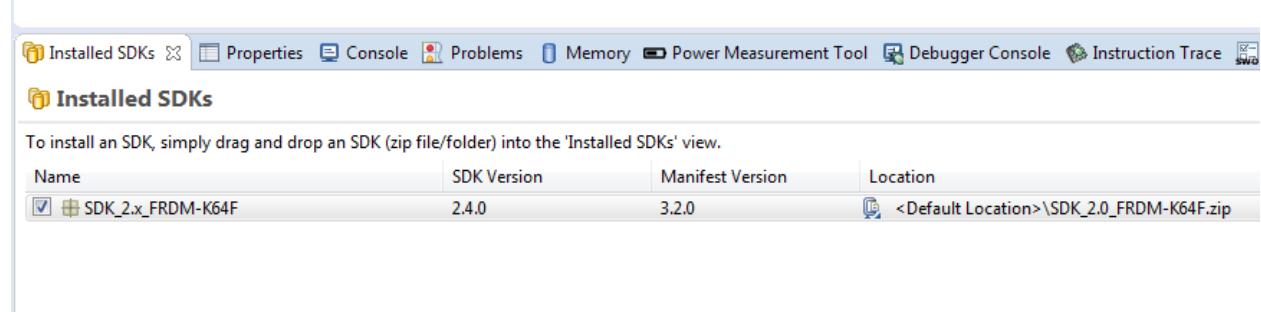

11.5 Development Platforms

11.5.1 Setup i.MX 8MQuad - MCIMX8M-EVK

This section explains how to create an SD card image (including native compilation tools) and a cross-compilation environment for the MCIMX8M-EVK.

Note: Evaluation Board Type

This guidelines refers to the MCIMX8M-EVK evaluation board. Please refer to the bottom of this page for guidelines on connecting the SE050 Arduino shield to the MCIMX8M-EVK

Downloading and Installing Yocto for MCIMX8M-EVK

Please consult first the detailed information that can be found on <https://www.nxp.com>. Download the L5.4.24_2.1.0_LINUX_DOCS documentation package (available on https://www.nxp.com/design/software/embedded-software/i-mx-software/embedded-linux-for-i-mx-applications-processors:IMXLINUX?tab=Documentation_Tab under the **Supporting Information** header) and take the **i.MX Yocto Project User's Guide** as a starting point.

Yocto must be installed on a Linux PC (consult the documentation for the Linux distributions officially supported), it's possible to use a Virtual PC environment as e.g. Virtual Box. The Linux PC must have access to the internet to retrieve additional packages, tools and sources.

Having set-up all tools and packages required by Yocto, initialize a local git repository as follows:

```
mkdir -p ~/projects/imx-yocto-bsp-5-4-24-2-1-0
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0
repo init -u https://source.codeaurora.org/external/imx/imx-manifest -b imx-linux-
→zeus -m imx-5.4.24-2.1.0.xml
repo sync
```

Add a custom Yocto layer. This custom Yocto layer is part of the Plug&Trust SW distribution (`simw_top/scripts/yocto/layers/meta-custom.tgz`) and must be copied and unpacked into the `sources` directory created above. Note: this custom layer adds a Python package (`func-timeout`):

```
cp_
→<PlugTrust>/simw_top/scripts/yocto/layers/meta-custom.tgz ~/projects/imx-yocto-bsp-5-4-24-2-1-0/sources
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0/sources
tar xzvf meta-custom.tgz
```

Prepare an embedded Linux distribution for the MCIMX8M-EVK board

The bitbake target `core-image-full-cmdline` created for MCIMX8M-EVK contains a busybox implementation of the usual Unix command line tools. It assumes you will interact with the embedded system over the command line:

```
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0
DISTRO=fsl-imx-wayland MACHINE=imx8mqevk source imx-setup-release.sh -b build-wayland-
→imx8mqevk
```

Now, before issuing the bitbake command, edit two configuration files.

First edit the `build-wayland-imx8mqevk/conf/bblayers.conf` so it contains a reference to the custom layer. Add the following line at the end of the file:

```
BBLAYERS += " ${BSPDIR}/sources/meta-custom"
```

The resulting `build-wayland-imx8mqevk/conf/bblayers.conf` file will look as follows:

```
LCONF_VERSION = "6"

BBPATH = "${TOPDIR}"
BSPDIR := "${@os.path.abspath(os.path.dirname(dgetVar('FILE', True)) + '/../..')}"
(continues on next page)
```

(continued from previous page)

```

BBFILES ?= ""
BBLAYERS = " \
    ${BSPDIR}/sources/poky/meta \
    ${BSPDIR}/sources/poky/meta-poky \
    \
    ${BSPDIR}/sources/meta-openembedded/meta-oe \
    ${BSPDIR}/sources/meta-openembedded/meta-multimedia \
    \
    ${BSPDIR}/sources/meta-freescale \
    ${BSPDIR}/sources/meta-freescale-3rdparty \
    ${BSPDIR}/sources/meta-freescale-distro \
"
"

# i.MX Yocto Project Release layers
BBLAYERS += " ${BSPDIR}/sources/meta-fsl-bsp-release/imx/meta-bsp "
BBLAYERS += " ${BSPDIR}/sources/meta-fsl-bsp-release/imx/meta-sdk "
BBLAYERS += " ${BSPDIR}/sources/meta-fsl-bsp-release/imx/meta-ml "

BBLAYERS += "${BSPDIR}/sources/meta-browser"
BBLAYERS += "${BSPDIR}/sources/meta-rust"
BBLAYERS += "${BSPDIR}/sources/meta-openembedded/meta-gnome"
BBLAYERS += "${BSPDIR}/sources/meta-openembedded/meta-networking"
BBLAYERS += "${BSPDIR}/sources/meta-openembedded/meta-python"
BBLAYERS += "${BSPDIR}/sources/meta-openembedded/meta-filesystems"
BBLAYERS += "${BSPDIR}/sources/meta-qt5"

# +SIMW
BBLAYERS += " ${BSPDIR}/sources/meta-custom"
# -SIMW

```

Next edit the file `build-wayland-imx8mqevk/conf/local.conf` so it matches the following:

```

MACHINE ??= 'imx8mqevk'
DISTRO ?= 'fsl-imx-wayland'
PACKAGE_CLASSES ?= 'package_rpm'

# EXTRA_IMAGE_FEATURES ?= "debug-tweaks"
# + SIMW: Extended EXTRA_IMAGE_FEATURES
EXTRA_IMAGE_FEATURES ?=_
    "debug-tweaks dev-pkgs tools-debug tools-sdk tools-testapps package-management"

USER_CLASSES ?= "buildstats image-mklibs image-prelink"
PATCHRESOLVE = "noop"
BB_DISKMON_DIRS ??= "\\\
    STOPTASKS,${TMPDIR},1G,100K \
    STOPTASKS,${DL_DIR},1G,100K \
    STOPTASKS,${SSTATE_DIR},1G,100K \
    STOPTASKS,/tmp,100M,100K \
    ABORT,${TMPDIR},100M,1K \
    ABORT,${DL_DIR},100M,1K \
    ABORT,${SSTATE_DIR},100M,1K \
    ABORT,/tmp,10M,1K"
PACKAGECONFIG_append_pn-qemu-system-native = " sdl"
PACKAGECONFIG_append_pn-nativesdk-qemu = " sdl"
CONF_VERSION = "1"

```

(continues on next page)

(continued from previous page)

```

DL_DIR ?= "${BSPDIR}/downloads/"
ACCEPT_FSL_EULA = "1"

# +SIMW
IMAGE_ROOTFS_EXTRA_SPACE = "640000"

IMAGE_INSTALL_append += " rng-tools openssl-bin"
IMAGE_INSTALL_append += " cmake curl git subversion "
# If you want git-submodule
# IMAGE_INSTALL_append += " git-perltools findutils "
IMAGE_INSTALL_append += " python3-pip python3-click python3-cryptography python3-pycparser python3-cffi "
# opcu
IMAGE_INSTALL_append += " python-logging "

IMAGE_INSTALL_append += " e2fsprogs-resize2fs func-timeout "
IMAGE_INSTALL_append += " i2c-tools "
IMAGE_INSTALL_append += " python3-misc"
# -SIMW

```

Note: At this stage it's possible to also include the Plug&Trust package as a Yocto recipe. Refer to [Alternative approach to create SD card: use Yocto recipe for Plug&Trust package](#) on how to do this.

The above local.conf file prepares an embedded Linux distribution with native development tools

After updating the file build-wayland-imx8mqevk/conf/local.conf issue the following command:

```
bitbake core-image-full-cmdline
```

Note: Output Directory

The directory *build-wayland-imx8mqevk* will contain downloaded sources and build artefacts.

When the above bitbake command finished successfully a compressed sdcard image containing bootloader, filesystem and linux kernel is available under *~/projects/imx-yocto-bsp-5-4-24-2-1-0/build-wayland-imx8mqevk/tmp/deploy/images/imx8mqevk/core-image-full-cmdline-imx8mqevk.wic.bz2*.

core-image-full-cmdline-imx8mqevk.wic.bz2 is a symbolic link to the actual file name - which has a timestamp as part of the filename e.g. *core-image-full-cmdline-imx8mqevk-20191204234929.rootfs.wic.bz2*. Copy the **unzipped** sdcard image to a microSD card either with the method described in the 'i.MX Yocto Project User's Guide' or on a Windows PC with e.g. the Win32DiskImager tool.

Note: The embedded linux system prepared has a user *root* that does not require a password. Please define a password at your earliest convenience.

Create and install SDK and Root file system on Host

To populate SDK, run:

```
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0  
MACHINE=imx8mqevk source setup-environment build-wayland-imx8mqevk  
bitbake -c populate_sdk core-image-full-cmdline
```


To install the SDK in the default location /opt/fsl-imx-wayland/4.19-warrior:

```
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0/build-wayland-imx8mqevk/tmp/deploy/sdk/  
. ./fsl-imx-wayland-glibc-x86_64-core-image-full-cmdline-aarch64-toolchain-4.19-warrior.  
sh
```

You have now installed a set of cross-compilation tools for the MCIMX8M-EVK board on the Linux Host PC.

Connecting the MCIMX8M-EVK to the SE050 Arduino shield

The MCIMX8M-EVK does not come with an Arduino connector, the following figure illustrates how to make the connection with jump wires.

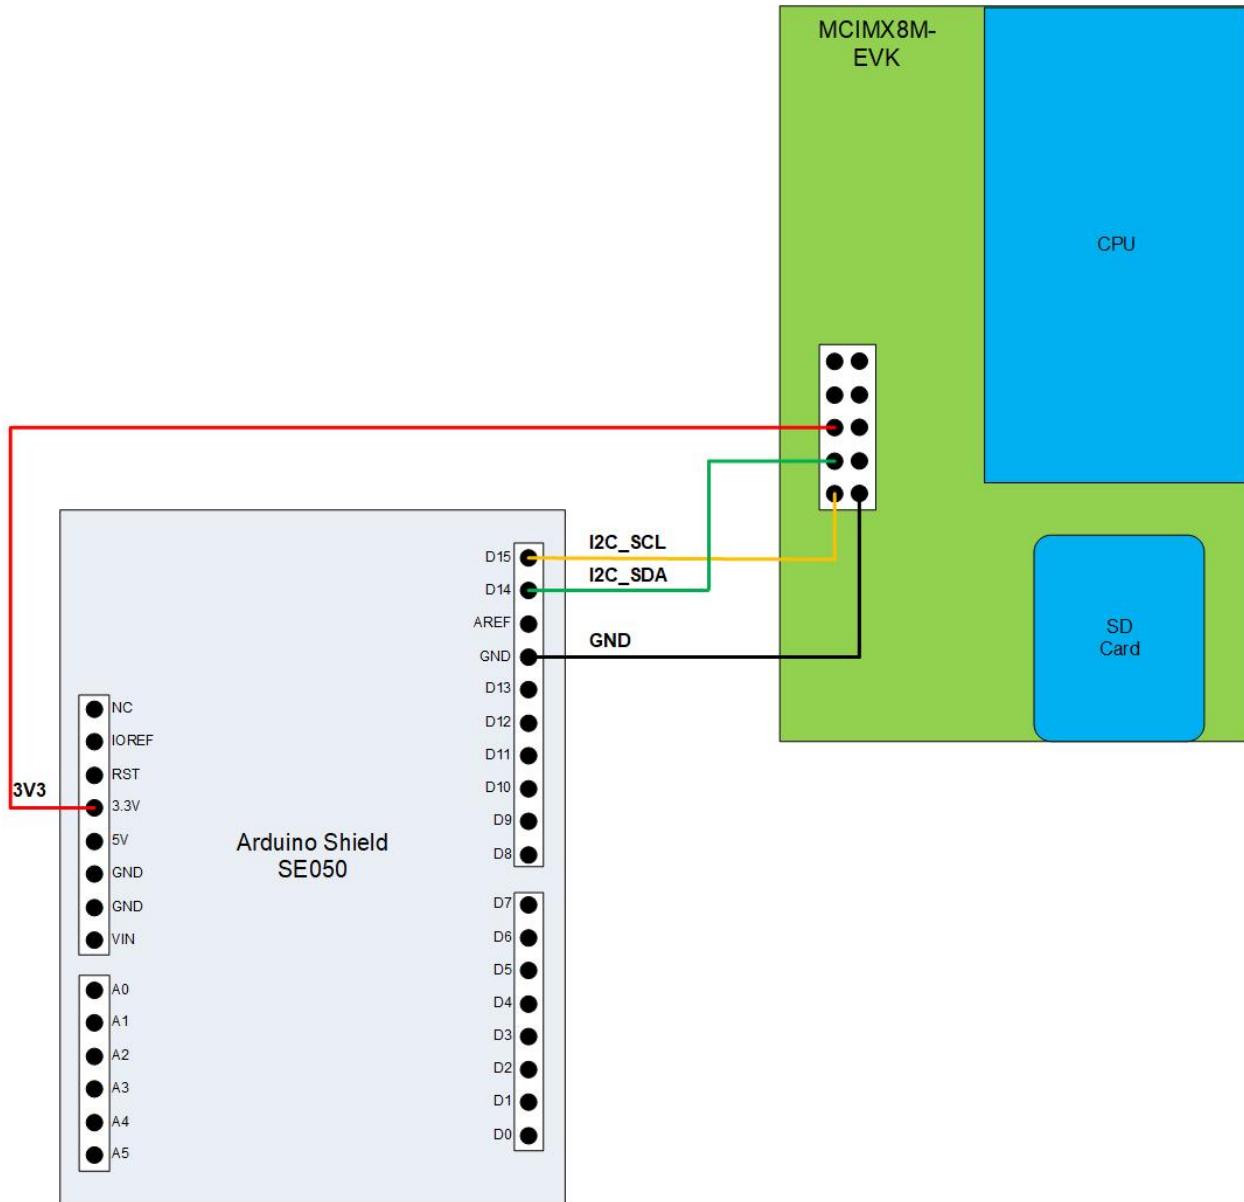

The same information summarized in a table.

Pin Function	OM-SE050ARD pins	MCIMX8M-EVK
I _C _SCL	J2-10	J801-I _C -1
I _C _SDA	J2-9	J801-I _C -3
GND	J2-7	J801-I _C -2
3V3	J8-4	J801-I _C -5

Alternative approach to create SD card: use Yocto recipe for Plug&Trust package

The Plug&Trust MW package also includes a recipe.

- Download the Plug&Trust MW from www.nxp.com/se050 and ensure the package version (e.g. 03.00.01) is appended to the file name. (For example: SE050-PLUG-TRUST-MW-v03.00.01.zip)
- Put the se05x recipe (se05x_3.0.0.bb), the source code package (SE050-PLUG-TRUST-MW-v03.00.01.zip) and (if applicable) patches into the existing .../sources/meta-custom/recipes directory of the Yocto development PC (recipe and patches are available in simw-top/scripts/yocto/v03.00.00)

The resulting imx-yocto-bsp-5-4-24-2-1-0/sources/meta-custom directory on the Yocto development PC should look like:



To add the Plug&Trust MW to the image to be created add the following line at the end of the build-wayland-imx8mqevk/conf/local.conf file:

```
IMAGE_INSTALL_append += " se05x"
```

11.5.2 Setup i.MX6UL - MCIMX6UL-EVK

This section explains how to create an SD card image (including native compilation tools) and a cross-compilation environment for the MCIMX6UL-EVK.

Note: *Setup i.MX 8MQuad - MCIMX8M-EVK* is the current default version of the board used with the Plug & Trust MW.

Downloading and Installing Yocto for MCIMX6UL-EVK

Please consult first the detailed information that can be found on <https://www.nxp.com>. Download the L5.4.24_2.1.0_LINUX_DOCS documentation package (available on https://www.nxp.com/design/software/embedded-software/i-mx-software/embedded-linux-for-i-mx-applications-processors:IMXLINUX?tab=Documentation_Tab under the **Supporting Information** header) and take the **i.MX Yocto Project User's Guide** as a starting point.

Yocto must be installed on a Linux PC (consult the documentation for the Linux distributions officially supported), it's possible to use a Virtual PC environment as e.g. Virtual Box. The Linux PC must have access to the internet to retrieve additional packages, tools and sources.

Having set-up all tools and packages required by Yocto, initialize a local git repository as follows:

```
mkdir -p ~/projects/imx-yocto-bsp-5-4-24-2-1-0
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0
repo init -u https://source.codeaurora.org/external/imx/imx-manifest -b imx-linux-
zeus -m imx-5.4.24-2.1.0.xml
repo sync
```

Add a custom Yocto layer. This custom Yocto layer is part of the Plug&Trust SW distribution (`simw_top/scripts/yocto/layers/meta-custom.tgz`) and must be copied and unpacked into the sources directory created above. Note: this custom layer adds a Python package (`func-timeout`):

```
cp -u
→<PlugTrust>/simw_top/scripts/yocto/layers/meta-custom.tgz ~/projects/imx-yocto-bsp-5-4-24-2-1-0/sources
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0/sources
tar xzvf meta-custom.tgz
```

Prepare an embedded Linux distribution for the MCIMX6UL-EVK board

The bitbake target `core-image-full-cmdline` created for MCIMX6UL-EVK contains a busybox implementation of the usual Unix command line tools. It assumes you will interact with the embedded system over the command line:

```
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0
DISTRO=fsl-imx-fb MACHINE=imx6ulevk source imx-setup-release.sh -b build-fb-6ul
```

Now, before issuing the bitbake command, edit two configuration files.

First edit the `build-fb-6ul/conf/bblayers.conf` so it contains a reference to the custom layer. Add the following line at the end of the file:

```
BBLAYERS += " ${BSPDIR}/sources/meta-custom"
```

The resulting `build-fb-6ul/conf/bblayers.conf` file will look as follows:

```
LCONF_VERSION = "7"

BBPATH = "${TOPDIR}"
BSPDIR := "${@os.path.abspath(os.path.dirname(dgetVar('FILE', True)) + '/../../')}""

BBFILES ?= ""
BBLAYERS = " \
${BSPDIR}/sources/poky/meta \
${BSPDIR}/sources/poky/meta-poky \
\
${BSPDIR}/sources/meta-openembedded/meta-oe \
${BSPDIR}/sources/meta-openembedded/meta-multimedia \
\
${BSPDIR}/sources/meta-freescale \
${BSPDIR}/sources/meta-freescale-3rdparty \
${BSPDIR}/sources/meta-freescale-distro \
"

# i.MX Yocto Project Release layers
BBLAYERS += " ${BSPDIR}/sources/meta-fsl-bsp-release/imx/meta-bsp "
BBLAYERS += " ${BSPDIR}/sources/meta-fsl-bsp-release/imx/meta-sdk "
BBLAYERS += " ${BSPDIR}/sources/meta-fsl-bsp-release/imx/meta-ml "
```

(continues on next page)

(continued from previous page)

```
BBLAYERS += "${BSPDIR}/sources/meta-browser"
BBLAYERS += "${BSPDIR}/sources/meta-rust"
BBLAYERS += "${BSPDIR}/sources/meta-openembedded/meta-gnome"
BBLAYERS += "${BSPDIR}/sources/meta-openembedded/meta-networking"
BBLAYERS += "${BSPDIR}/sources/meta-openembedded/meta-python"
BBLAYERS += "${BSPDIR}/sources/meta-openembedded/meta-filesystems"
BBLAYERS += "${BSPDIR}/sources/meta-qt5"

# +SIMW
BBLAYERS += " ${BSPDIR}/sources/meta-custom"
# -SIMW
```

Next edit the file build-fb-6ul/conf/local.conf so it matches the following:

```
MACHINE ??= 'imx6ulevk'
DISTRO ?= 'fsl-imx-fb'
PACKAGE_CLASSES ?= "package_rpm"

# EXTRA_IMAGE_FEATURES ?= "debug-tweaks"
# + SIMW: Extended EXTRA_IMAGE_FEATURES
EXTRA_IMAGE_FEATURES ?= "debug-tweaks dev-pkgs tools-debug tools-sdk tools-testapps package-management"
USER_CLASSES ?= "buildstats image-mklibs image-prelink"
PATCHRESOLVE = "noop"
BB_DISKMON_DIRS ??= "\\\\
    STOPTASKS,${TMPDIR},1G,100K \
    STOPTASKS,${DL_DIR},1G,100K \
    STOPTASKS,${SSTATE_DIR},1G,100K \
    STOPTASKS,/tmp,100M,100K \
    ABORT,${TMPDIR},100M,1K \
    ABORT,${DL_DIR},100M,1K \
    ABORT,${SSTATE_DIR},100M,1K \
    ABORT,/tmp,10M,1K"
PACKAGECONFIG_append_pn-qemu-system-native = " sdl"
PACKAGECONFIG_append_pn-nativesdk-qemu = " sdl"
CONF_VERSION = "1"

DL_DIR ?= "${BSPDIR}/downloads/"
ACCEPT_FSL_EULA = "1"

# +SIMW
IMAGE_ROOTFS_EXTRA_SPACE = "640000"

IMAGE_INSTALL_append += " rng-tools openssl-bin"
IMAGE_INSTALL_append += " cmake curl git subversion"
IMAGE_INSTALL_append ?= " python3-pip python3-click python3-cryptography python3-pycparser python3-cffi"
IMAGE_INSTALL_append += " e2fsprogs-resize2fs func-timeout i2c-tools"
# -SIMW
```

Note: At this stage it's possible to also include the Plug&Trust package as a Yocto recipe. Refer to [Alternative approach to create SD card: use Yocto recipe for Plug&Trust package](#) on how to do this.

The above local.conf file prepares an embedded Linux distribution with native development tools

After updating the file `build-fb-6ul/conf/local.conf` issue the following command:

```
bitbake core-image-full-cmdline
```

Note: Output Directory

The directory `build-fb-6ul` will contain downloaded sources and build artefacts.

When the above bitbake command finished successfully a compressed sdcard image containing bootloader, filesystem and linux kernel is available under `~/projects/imx-yocto-bsp-5-4-24-2-1-0/build-fb-6ul/tmp/deploy/images/imx6ulevk/core-image-full-cmdline-imx6ulevk.wic.bz2`.

`core-image-full-cmdline-imx6ulevk.wic.bz2` is a symbolic link to the actual file name - which has a timestamp as part of the filename e.g. `core-image-full-cmdline-imx6ulevk-20191204234929.rootfs.wic.bz2`. Copy the **unzipped** sdcard image to a microSD card either with the method described in the ‘i.MX Yocto Project User’s Guide’ or on a Windows PC with e.g. the Win32DiskImager tool.

Note: The embedded linux system prepared has a user `root` that does not require a password. Please define a password at your earliest convenience.

Create and install SDK and Root file system on Host

To populate SDK, run:

```
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0  
MACHINE=imx6ulevk source setup-environment build-fb-6ul  
bitbake -c populate_sdk core-image-full-cmdline
```

To install the SDK in the default location `/opt/fsl-imx-fb/5.4.24-2.1.0`:

```
cd ~/projects/imx-yocto-bsp-5-4-24-2-1-0/build-fb-6ul/tmp/deploy/sdk/  
. ./fsl-imx-fb-glibc-x86_64-core-image-full-cmdline-cortexa7hf-neon-toolchain-5.4.24-2.  
→1.0.sh
```

You have now installed a set of cross-compilation tools for the MCIMX6UL-EVK board on the Linux Host PC.

Alternative approach to create SD card: use Yocto recipe for Plug&Trust package

The Plug&Trust MW package also includes a recipe.

- Download the Plug&Trust MW from www.nxp.com/se050 and ensure the package version (e.g. 03.00.01) is appended to the file name. (For example: SE050-PLUG-TRUST-MW-v03.00.01.zip)
- Put the se05x recipe (`se05x_3.0.0.bb`), the source code package (`SE050-PLUG-TRUST-MW-v03.00.01.zip`) and (if applicable) patches into the existing `.../sources/meta-custom/recipes` directory of the Yocto development PC (recipe and patches are available in `simw-top/scripts/yocto/v03.00.00`)

The resulting `imx-yocto-bsp-5-4-24-2-1-0/sources/meta-custom` directory on the Yocto development PC should look like:

```
++- conf  
?   +- layer.conf  
+- README
```

(continues on next page)

(continued from previous page)

```

+-- recipes
  +-- func-timeout
?  +-- func-timeout_4.3.3.bb
+-- se05x
  +-- files
?  +-- SE050-PLUG-TRUST-MW-v03.00.01.zip
+-- se05x_3.0.0.bb

```

To add the Plug&Trust MW to the image to be created add the following line at the end of the build-wayland-imx8mqevk/conf/local.conf file:

```
IMAGE_INSTALL_append += " se05x"
```

11.5.3 Freedom K64F

See Section 4.2 — *Import MCUXpresso projects from SDK* and Section 4.3 — *Freedom K64F Build (CMake - Advanced)*

11.5.4 i.MX RT 1060

See Section 4.3.2 *Importing the Project.*

MIMXRT1060 Boot Mode and Boot Device Settings

SW7-1	SW7-2	SW7-3	SW7-4	Boot Device
OFF	ON	ON	OFF	Hyper flash
OFF	OFF	ON	OFF	QSPI flash
ON	OFF	ON	OFF	SD card

Note: Default/Current Settings


Boot Device - QSPI flash Flash driver - MIMXRT1060_SFDP_QSPI.cfx

11.5.5 LPC55S69

See Section 4.3.2 *Importing the Project.*

Connecting SE050 Arduino shield to LPC55S

Connect SE050 to LPC55S Arduino stackable headers and change jumper J14 as:

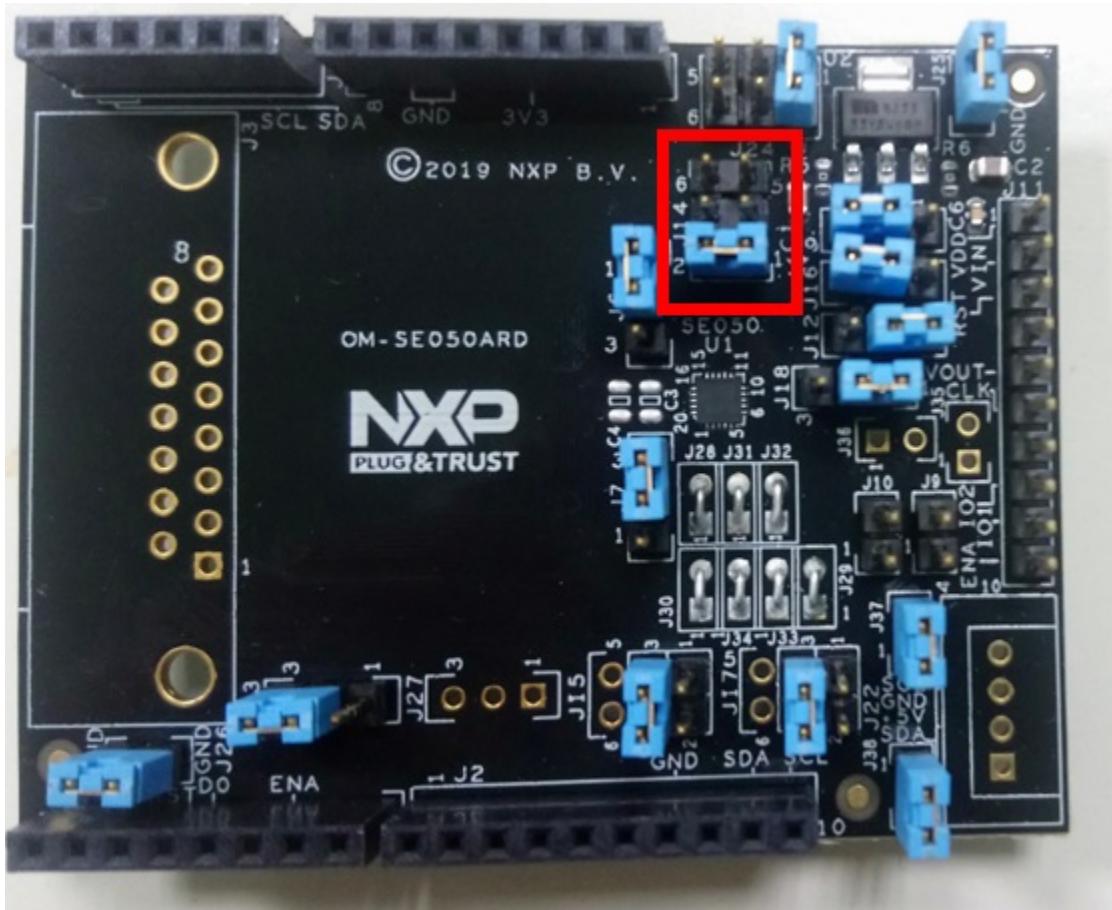

This connects SE_VDD directly to 3V3 and bypasses enable signal. This is required because pin on LPC55S coincides with Silex-2401 SPI pins so we cannot use SE_EN signal to drive SE_VDD.

Connecting WiFi shield Silex-2401 to LPC55S

Connect Silex-2401 WiFi shield with SE050 as:



Memory regions

Secure Zone

Total code size available for secure applications is 0x3FE00 bytes.

Memory area	Origin	Size
m_interrupts	0x10000000	LENGTH = 0x00000200
m_text	0x10000200	LENGTH = 0x0003FC00
m_veneer_table	0x1003FE00	LENGTH = 0x00000200
m_core1_image	0x1007A000	LENGTH = 0x0001E000
m_data	0x30000000	LENGTH = 0x00018000
rpmmsg_sh_mem	0x30033000	LENGTH = 0
m_usb_sram	0x50100000	LENGTH = 0x00004000

Non-secure Zone

Total code size available for non-secure applications is 0x3A000 bytes.

Memory area	Origin	Size
m_interrupts	0x00040000	LENGTH = 0x00000200
m_text	0x00040200	LENGTH = 0x00039E00
m_core1_imag	0x0007A000	LENGTH = 0x0001E000
m_data	0x20018000	LENGTH = 0x0001A800
rpmmsg_sh_mem	0x20033000	LENGTH = 0
m_usb_sram	0x40100000	LENGTH = 0x00004000

Note: While modifying Secure/Non-secure memory regions, be sure that code size is 32kB aligned.

11.5.6 Android: Hikey960

Supported Features

Generate / Import:

- ECC:
 - 224-bit
 - 256-bit
 - 384-bit
 - 521-bit
- RSA:
 - 1024-bit
 - 2048-bit
 - 3072-bit
 - 4096-bit
- AES:
 - 128-bit
 - 192-bit
 - 256-bit
- HMAC
 - 64-bit to 512-bit

Export:

- ECC:
 - 224-bit
 - 256-bit
 - 384-bit
 - 521-bit

- RSA:

- 1024-bit
- 2048-bit
- 3072-bit
- 4096-bit

RNG:

- Get Random number

Sign / Verify:

- Sign / Verify with ECC

- Supported digests:
 - DIGEST:SHA1
 - DIGEST:SHA224
 - DIGEST:SHA256
 - DIGEST:SHA384
 - DIGEST:SHA512

- Sign / Verify with RSA

- Supported paddings:
 - PADDING:NONE
 - PADDING:PKCS1_V1.5 (SHA1, SHA-224, SHA-256, SHA-384, SHA-512)
 - PADDING:PSS (SHA1, SHA-224, SHA-256, SHA-384, SHA-512)

- Sign / Verify with HMAC

- Supported digests:
 - DIGEST:SHA1
 - DIGEST:SHA256
 - DIGEST:SHA384
 - DIGEST:SHA512

Encryption / Decryption:

- Encrypt / Decrypt with RSA

- Supported paddings:
 - PADDING:NONE
 - PADDING:PKCS1_V1.5
 - PADDING:OAEP (SHA1)

- Encrypt / Decrypt with AES

- Supported block modes:
 - ECB (PADDING:NONE)
 - CBC (PADDING:NONE)

- CTR (PADDING:NONE)

Delete:

- Single key
- All keys

Attestation:

- Key attestation

AOSP build Environment Setup

AOSP build Environment for Hikey960

To setup Android build environment for Hikey960 board please follow steps below:

- 1) The build setup file structure should be as below:

```
<ROOT-DIR>
|
|----- android-root/
|
|----- simw-top/
```

- 2) Downloading and building AOSP source code (refer <https://source.android.com/setup/build/devices>).

In the steps below, android-root means \${ROOT_DIR}/android-root/.

For simplicity of scripts, it is assumed that ROOT_DIR variable is set like as below:

```
ROOT_DIR=/opt/_ddm/aospbld
```

- 3) Setup REPO Tool:

```
mkdir ~ /bin
PATH=~/bin:$PATH
curl https://storage.googleapis.com/git-repo-downloads/repo > ~/bin/repo
chmod a+x ~/bin/repo
```

- 4) Download source code using REPO tool:

```
ROOT_DIR=/opt/_ddm/aospbld # For example

mkdir -p ${ROOT_DIR}/android-root
cd ${ROOT_DIR}/android-root

repo init -u https://android.googlesource.com/platform/manifest -b android-p-
↳review-2
repo sync -j$(nproc)
```

All scripts from here on assume ROOT_DIR is set.

- 5) Apply patches from android.googlesource.com:

```
cd ${ROOT_DIR}/android-root/prebuilts/tools
git fetch https://android.googlesource.com/platform/prebuilts/tools refs/changes/
↳02/682002/1 && git cherry-pick      FETCH_HEAD
```

(continues on next page)

(continued from previous page)

```
cd ${ROOT_DIR}/android-root/external/e2fsprogs/
git fetch https://android.googlesource.com/platform/external/e2fsprogs refs/
~changes/05/683305/1 && git cherry-pick FETCH_HEAD

cd ${ROOT_DIR}/android-root/external/f2fs-tools
git fetch https://android.googlesource.com/platform/external/f2fs-tools refs/
~changes/06/683306/1 && git cherry-pick FETCH_HEAD
```

6) Apply patches from host library.

These patches are for Android Keystream 3.0 Board init

Scripts to apply the patches:

```
cp ${ROOT_DIR}/simw-top/akm/src/Board_init/keymaster_sepolicy.patch ${ROOT_DIR}/
~android-root/system/sepolicy/
cd ${ROOT_DIR}/android-root/system/sepolicy/
patch -p1 < keymaster_sepolicy.patch

cp ${ROOT_DIR}/simw-top/akm/src/Board_init/init_rc_file.patch ${ROOT_DIR}/android-
~root/system/core/
cd ${ROOT_DIR}/android-root/system/core/
patch -p1 < init_rc_file.patch
```

- `init_rc_file.patch` is to update system ownership of I2C module and to create `/data/vendor/SE05x` secure directory.
- `keymaster_sepolicy.patch` is to update SE050 Keystream HAL policy for accessing I2C device for communication with SE050 and `/data/vendor/SE05x` secure directory for storing Platform SCP03 keys.

7) Follow below instructions to build source code for hikey960:

```
cd ${ROOT_DIR}/android-root
export ANDROID_ROOT=${pwd}
source build/envsetup.sh
lunch hikey960-userdebug
make -j $(nproc)
```

Note: Based on CPU core, build will take 1-4 hrs.

8) Installing images.

Follow <https://source.android.com/setup/build/devices#960fastboot>

9) Flashing images. Follow <https://source.android.com/setup/build/devices#960images>

Note: “fastboot” and “adb” are required for flashing images.

- 10) If modifications are required to hikey kernel (e.g. add/remove device driver), please refer to <https://source.android.com/setup/build/devices#960kernel> for building hikey kernel and follow the instruction given on link to create new bootimage image.

AOSP build environment for iMX8M (coming soon)

To setup Android build environment for iMX8M board please follow below steps

1. The build setup file structure should be like (your \${ROOT_DIR} dir):

```
<ROOT-DIR>
|
|----- android-root/
|
|----- simw-top/
```

- 1) Downloading and building AOSP source code (refer section 3.2.3 : Build your own Android BSP Image from https://www.nxp.com/support/developer-resources/run-time-software/i.mx-developer-resources/evaluation-kit-for-the-i.mx-8m-applications-processor:MCIMX8M-EVK?tab=In-Depth_Tab). In the steps below, android-root means \${ROOT_DIR}/android-root/.

- 2) Setup REPO Tool:

```
mkdir -p ${ROOT_DIR}/android-root
cd ${ROOT_DIR}/android-root

mkdir ~bin
PATH=~/bin:$PATH
curl https://storage.googleapis.com/git-repo-downloads/repo > ~/bin/repo
chmod a+x ~/bin/repo
```

- 3) Download source code using REPO tool

Get the Android source code from Google repo using the manifest and script provided inside the imx-o8.1.0_1.3.0_8m.tar.gz (Download package from https://www.nxp.com/support/developer-resources/run-time-software/i.mx-developer-resources/evaluation-kit-for-the-i.mx-8m-applications-processor:MCIMX8M-EVK?tab=Design_Tools_Tab).

```
source ~/imx-o8.0.0_1.3.0_8mq-prc/imx_android_setup.sh

# By default, the imx_android_setup.sh script will create the source code build_
# environment
in the folder ~/android_build

# ${MY_ANDROID} will be referred as the i.MX Android source code root directory in_
# all i.MX
Andorid release documentation.

export MY_ANDROID=~/android_build
```

- 4) Building Android images:

```
cd ${MY_ANDROID}
export ANDROID_ROOT=${pwd}
source build/envsetup.sh
lunch evk_8mq-userdebug
make -j$(nproc) 2>&1 | tee build-log.txt
```

Note: Based on CPU core, build will take 1-4 hrs.

- 5) Flashing newly generate images.

- a) The board images can be flashed to the target board by using the MFGTool. The release package includes MFGTool for i.MX 8MQuad EVK in android_08.0.0_1.3.0_8M-PRC_tools.tar.gz. The MFGTool is mfgtools-mx8mq-beta.zip.
- b) Unzip the mfgtools-mx8mq-beta.zip file to a selected location. The directory is named MFGTool-Dir.

#) Copy following files from \$ROOT_DIR/android-root/out/target/product/evk_8mq to your MFGTool-Dir/Profiles/Linux/OS Firmware/files/ android/evk directory.

```
u-boot-imx8mq.imx
partition-table.img
boot-imx8mq.img
vbmeta-imx8mq.img
system.img
vendor.img.
```

SE050 based Android Keystreamer

CMAKE based build system

1. Download Android NDK from <https://developer.android.com/ndk/downloads/> and store it in /usr/local/ eg. /usr/local/android-ndk-r18b-linux-x86_64

```
cd /usr/local/
wget http://dl.google.com/android/repository/android-ndk-r18b-linux-x86_64.zip
unzip -d android-ndk-r18b-linux-x86_64 android-ndk-r18b-linux-x86_64.zip
```

2. Once you are able to bring-up Android build environment for hikey960 follow below steps to build SE050 based android keystreamer:

```
cd ${ROOT_DIR}/android-root
export ANDROID_ROOT=$(pwd)
cd ${ROOT_DIR}/simw-top/scripts/android/cmake_based
source board_config.sh hikey960
./setup_script.sh
```

After successful execution you will be able to locate <simw-top_build> directory parallel to simw-top directory and simw-akm directory in \$ROOT_DIR/android-root/system/keystreamer

Note: If the patches are already applied, then instead of calling setup_script.sh, call build_script.sh

3. A batch script keystreamer_flash.bat will be copied to \$ROOT_DIR/android-root/out/target/product/<BOARD_NAME>. Execute the batch script to push all the necessary files onto the target board.

AOSP based build system

1. Setup simw-top inside \${ROOT_DIR}/android-root/vendor/nxp. If vendor/nxp does not exist inside \${ROOT_DIR}/android-root then create the same.
2. Follow below steps to build SE050 based android keymaster.:

```
cd ${ROOT_DIR}/android-root
cp vendor/nxp/simw-top/akm/src/interface_keymaster/patch/aosp/interface_
↳keymaster3.0.patch hardware/interfaces/
cd hardware/interfaces/
patch -p1 < interface_keymaster3.0.patch
cd ${ROOT_DIR}/android-root/vendor/nxp/simw-top
mm -j$(nproc)
cd ${ROOT_DIR}/android-root/hardware/interfaces/keymaster/3.0/default
mm -j$(nproc)
```

3. AKM supports Various Auth Mechanism ,below are the list of supported Auth types:

```
None
PlatfSCP03
UserID
AESKey
ECKey
UserID_PlatformSCP03
AESKey_PlatformSCP03
ECKey_PlatformSCP03
```

4. By default SE05X Authentication is through None. For any other Auth type follow below steps:

```
cd ${ROOT_DIR}/android-root/vendor/nxp/simw-top
mm SE05X_Auth=(Auth Type) -j$(nproc)
eg. mm SE05X_Auth=PlatfSCP03 -j$(nproc)
cd ${ROOT_DIR}/android-root/hardware/interfaces/keymaster/3.0/default
mm -j$(nproc)
```

5. After successful build copy keymaster_flash.bat located at \${ROOT_DIR}/android-root/vendor/nxp/simw-top/scripts/android/aosp_based to \${ROOT_DIR}/android-root/out/target/product/<BOARD_NAME>. Execute the batch script to push all the necessary files onto the target board.

6. Other way to build SE050 based android keymaster is as follows:

```
cd ${ROOT_DIR}/android-root
export ANDROID_ROOT=$(pwd)
cd ${ANDROID_ROOT}/vendor/nxp/simw-top/scripts/android/aosp_based
source board_config.sh hikey960
./setup_script.sh
```

7. A batch script keymaster_flash.bat will be copied to \${ROOT_DIR}/android-root/out/target/product/<BOARD_NAME>. Execute the batch script to push all the necessary files onto the target board.

Extract Secure Element Information

Refer to [SE Platform Information on Android platform](#).

Rotate Platform SCP03 Keys

Project `se05xRotatePlatfSCP03` is available to update Platform SCP03 keys on the SE. Build the project with build configuration `SE05X_Auth=PlatfSCP03`. For details about the tool, refer to [SE05X Rotate PlatformSCP Keys Demo](#).

After building the project, push the built binary on the android device using `adb` tool and run it from the command line.

How to use own Platform SCP03 Keys

Refer to [Section 11.10 Using own Platform SCP03 Keys](#) for details on how to use your own Platform SCP03 keys.

Note: Be sure to apply `keymaster_sepolicy.patch` to allow Platform SCP03 keys access to keymaster service.

Retrieve Existing Certificates

Refer to [Get Certificate from the SE](#).

Key Attestation

Key attestation support is available for RSA and ECC keys. The attestation keys and certificates need to be pre-injected at the following keyIDs:

```
#define ATTESTATION_KEY_RSA_KEYID 0x00000001
#define ATTESTATION_KEY_ECC_KEYID 0x00000004
#define ATTESTATION_CERTIFICATE_RSA_KEYID 0x00000011
#define ATTESTATION_CERTIFICATE_ECC_KEYID 0x00000014
```


For details on how to inject certificates into SE, refer [Section 5.7.20 Inject Certificate into SE](#).

How To Enable Logging

By default, information logs, error logs and warning logs are enabled but debug logs are disabled. To enable debug logs define `NX_LOG_ENABLE_DEFAULT_DEBUG` as 1 in `$ROOT_DIR/simw-top/hostlib/hostLib/libCommon/infra/nxLog_DefaultConfig.h`


I2C connections with SE05x

1. Below Diagram shows the wiring connection between Host Device and SE05x

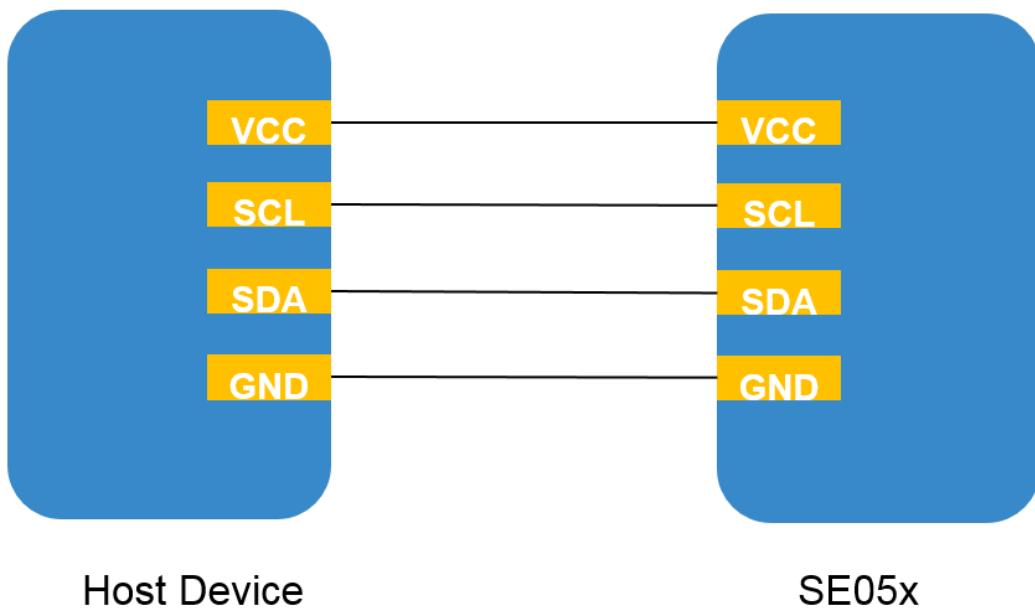

I2C data transceive operation


1. The Host Device acts as an I2C_master while SE05x shall be the I2C_slave.
2. HD transmits requested frame from application layer to SE over I2C Bus. SE sends acknowledgement (ACK/NACK) for the received frame.
3. SE processes the received frame and prepares the response accordingly. HD polls for Read till the time Response is prepared and sent over I2C bus.
4. Following Diagram demonstrate the same.

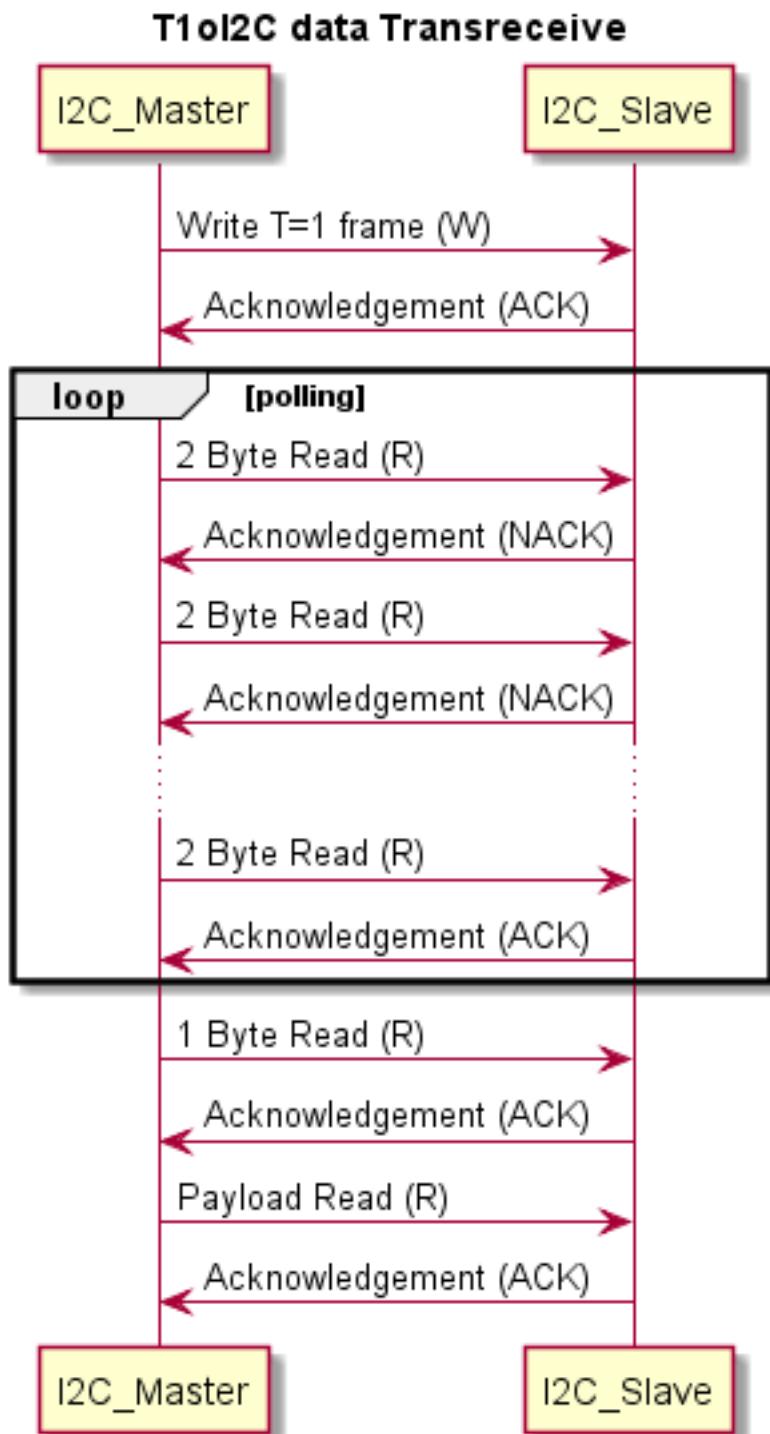

Stack with SE050

We use Android Keymaster with SE050 over T=1 I2C. In this setup, we use physical T=1 over I2C Connection to the Applet.

The Architecture looks like this:

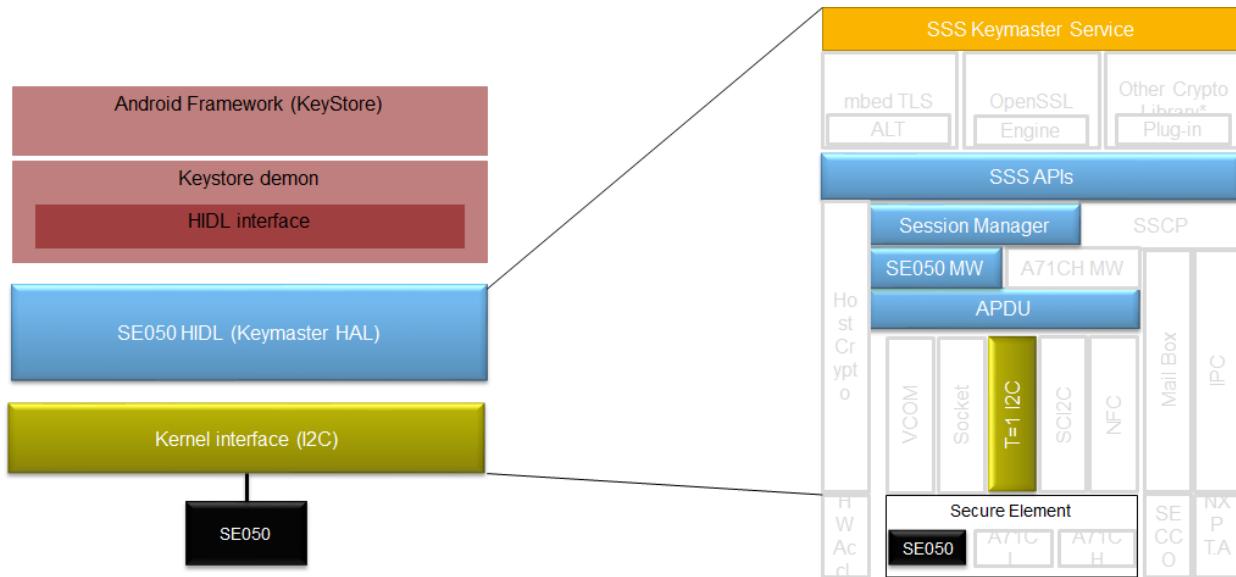

Trust Provisioned keys

The trust provisioned SE contains ECC-256 and RSA-2048 keys. These keys are provisioned at specific keyIDs. In order to use these keys, we need to pass a magic number along with the corresponding keyID of the key to the keymaster `import_key` API. Only when the `import_key` parses the key and finds the magic as a part of the key, it returns the key blob of the trust provisioned key.

Using TP RSA key

To use trust provisioned RSA key, pass the key in the following format:

```
modulus:  
    a5:a6:b5:b6:a5:a6:b5:b6:xx:xx:xx:xx:xx:xx:xx:xx:  
    xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:....  
publicExponent: 65537 (0x10001)  
privateExponent:  
    A5:23:00:67:02:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:  
    xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:....  
prime1:  
    xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:....  
prime2:  
    xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:....  
exponent1:  
    xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:....  
exponent2:  
    xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:....  
coefficient:  
    xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:....
```

Note here that the key modulus starts with the magic A5:A6:B5:B6:A5:A6:B5:B6 and the privateExponent starts with A5 followed by the 32-bit keyID (here, 0x23006702) of the trust provisioned RSA keypair. When an RSA key with modulus starting with the magic and privateExponent starting with A5 is passed to import_key, the RSA key stored at the corresponding keyID (0x23006702) is returned. An example of java code to import RSA keypair in this format is:

```

PrivateKey ImportTPKeyRSA() throws NoSuchAlgorithmException,
                                InvalidKeySpecException
{
    PrivateKey privKey;
    KeyFactory KeyFac;
    BigInteger Mod, PrivExp, PubExp, PrimeP, PrimeQ, PrimeExpP, PrimeExpQ, CrtCoef;
    RSAPrivateCrtKeySpec spec;
    try {
        KeyFac = KeyFactory.getInstance("RSA");
    } catch (NoSuchAlgorithmException e) {
        throw e;
    }
    Random rnd = new Random();
    StringBuffer temp = new StringBuffer(112);
    for(int i=0 ; i<112 ; i++)
    {
        int val = rnd.nextInt(16);
        temp.append(Integer.toString(val, 16));
    }
    StringBuffer buf = new StringBuffer(128);
    String mag = "a5a6b5b6a5a6b5b6";
    buf.append(mag);
    buf.append(temp);
    String mod = buf.toString();

    Mod = new BigInteger(mod, 16);
    PrivExp = new BigInteger("A523006702", 16);           //KeyID in hex at which
    Trust provisioned key is stored
    PubExp = new BigInteger("65537");
    PrimeP = new BigInteger("1");
    PrimeQ = new BigInteger("1");
    PrimeExpP = new BigInteger("1");
    PrimeExpQ = new BigInteger("1");
    CrtCoef = new BigInteger("1");

    // Create a RSA private key spec using components which have the magic and
    keyID
    spec = new RSAPrivateCrtKeySpec(Mod, PubExp, PrivExp, PrimeP, PrimeQ,
                                    PrimeExpP, PrimeExpQ, CrtCoef);

    try {
        // Generate a dummy keypair using key factory which will be in the
        desired format to export trust provisioned keypair
        privKey = KeyFac.generatePrivate(spec);
    } catch (InvalidKeySpecException e) {
        throw e;
    }

    return privKey;
}

```

(continues on next page)

(continued from previous page)

```

void SetTPKeyRSA(String Label) throws NoSuchAlgorithmException,_
↳InvalidKeySpecException, KeyStoreException,
          CertificateException
{
    PrivateKey privKey;
    X509Certificate cCert;
    // Dummy RSA certificate to create a keystore entry
    final String cDummyCert =_
↳"-----BEGIN CERTIFICATE-----\nMIIB9zCCAWCgAwIBAgIEITKMnTANBgkqhkiG9w0BAQsFADA3MRgwFgYDVQQDEw9JbnRl
↳

    try
    {
        privKey = ImportTPKeyRSA();
    }
    catch (Exception e)
    {
        throw e;
    }

    Certificate[] aUseCert;
    aUseCert = new X509Certificate[1];
    CertificateFactory cCertFac;
    InputStream in = new ByteArrayInputStream(cDummyCert.getBytes());
    try {
        cCertFac = CertificateFactory.getInstance("X.509");
    } catch (CertificateException e) {
        throw e;
    }
    aUseCert[0] = (X509Certificate) cCertFac.generateCertificate(in);

    try
    {
        // Store the keypair in keystore with alias=Label and dummy
↳certificate chain = aUseCert
        m_keyStore.setKeyEntry(Label, (Key) privKey, null, aUseCert);
    }
    catch (KeyStoreException e)
    {
        throw e;
    }
    return;
}

```

Using TP EC key

To use trust provisioned EC key, pass the key in the following format:

```

priv:
  a5:a6:b5:b6:a5:a6:b5:b6:c3:02:00:01:xx:xx:xx:
  xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:...
pub:
  xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:xx:...

```

Note here that the private component of the EC keypair contains the magic A5:A6:B5:B6:A5:A6:B5:B6 followed

by the 32-bit keyID (here, 0xC3020001) of the trust provisioned EC keypair. When an EC key with private component starting with the magic is passed to `import_key`, the EC keypair stored at the corresponding keyID (0xC3020001) is returned. An example of java code to import EC keypair in this format is:

```

ECPrivateKey ImportTPKeyECC() throws NoSuchAlgorithmException,
    InvalidKeySpecException,
    InvalidParameterSpecException,
    InvalidAlgorithmParameterException, NoSuchProviderException
{
    ECPrivateKey privKey;
    KeyFactory KeyFac;
    BigInteger PrivS;
    ECParameterSpec ECPspec;
    ECPrivateKeySpec PrivSpec;
    Random rnd = new Random();

    StringBuffer temp = new StringBuffer(40);
    for(int i=0 ; i<40 ; i++)
    {
        int val = rnd.nextInt(16);
        temp.append(Integer.toString(val, 16));
    }

    StringBuffer buf = new StringBuffer(64);
    String mag = "a5a6b5b6a5a6b5b6";
    String keyobject = "c3020001";
    buf.append(mag);
    buf.append(keyobject);
    buf.append(temp);
    String magic = buf.toString();
    PrivS = new BigInteger(magic, 16);
    String cECCCurveName = "secp256r1";
    AlgorithmParameters algSpec = AlgorithmParameters.getInstance("EC");

    try {
        algSpec.init(new ECGenParameterSpec(cECCCurveName));
    } catch (InvalidParameterSpecException e1) {
        e1.printStackTrace();
    }

    ECPspec = algSpec.getParameterSpec(ECParameterSpec.class);
    // Create PrivateKey spec with parameters for curve secp256r1 and private key
    // containing the magic and the keyID
    PrivSpec = new ECPrivateKeySpec(PrivS, ECPspec);

    try {
        KeyFac = KeyFactory.getInstance("EC");
    } catch (NoSuchAlgorithmException e) {
        throw e;
    }

    try {
        // Generate a dummy keypair using key factory which will be in the
        // desired format to export trust provisioned keypair
        privKey = (ECPrivateKey) KeyFac.generatePrivate(PrivSpec);
    } catch (InvalidKeySpecException e) {
        throw e;
    }
}

```

(continues on next page)

(continued from previous page)

```

        return privKey;
    }

void SetTPKeyEC(String Label) throws NoSuchAlgorithmException,
    ↪InvalidKeySpecException, KeyStoreException,
    ↪CertificateException, GeneralSecurityException {
    ECPrivateKey privKey;
    X509Certificate cCert;
    final String cDummyCert = "-----BEGIN CERTIFICATE-----\n" +
        "MIIBeTCCASCAgAwIBAgIJAKtU6mCCLJeyMAoGCCqGSM49BAMCMBExDzANBgNVBANMBmR1bW9DQTA
    ↪

    privKey = ImportTPKeyECC();

    Certificate[] aUseCert;
    aUseCert = new X509Certificate[1];
    CertificateFactory cCertFac;
    InputStream in = new ByteArrayInputStream(cDummyCert.getBytes());

    try {
        cCertFac = CertificateFactory.getInstance("X.509");
    } catch (CertificateException e) {
        throw e;
    }
    aUseCert[0] = (X509Certificate) cCertFac.generateCertificate(in);

    try {
        // Store the keypair in keystore with alias=Label and dummy
        ↪certificate chain = aUseCert
        m_cKeyStore.setKeyEntry(Label, (Key) privKey, null, aUseCert);
    }
    catch (KeyStoreException e)
    {
        throw e;
    }

    return;
}

```

11.6 How to get SE Platform Information and UID

Follow any one of the following methods to get the SE platform information.

11.6.1 Using TeraTerm and pre-built binary

A pre-built binary for se05x_GetInfo is available in binaries directory for FRDM-K64F and iMX-RT1060.

You would need to install a serial terminal application, like TeraTerm.

- Install TeraTerm on your system. To setup TeraTerm, refer
- Flash the pre-built binary on your hardware.
- View the logs on TeraTerm.

You would be able to see a log like this:

```

App:INFO :PlugAndTrust_v02.10.90_20190726
sss:INFO :atr <Len=35>
  00 00 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 08
  01 00 00 00      00 64 00 00      0A 4A 43 4F      50 34 20 41
  54 50 4F

sss:WARN :Communication channel is Plain.
sss:WARN ::!!Not recommended for production use.!!!
App:WARN :#####
App:INFO :uid <Len=18>
  04 0D 9 67 C 41 1B 5 B7 A
  D

App:WARN :#####
App:INFO :Applet Major = 3
App:INFO :Applet Minor = 1
App:INFO :Applet patch = 0
App:INFO :AppletConfig = 67D2
App:INFO :WithOut ECDSA
App:INFO :With ECDSA_ECDH_ECDHE
App:INFO :WithOut EDDSA
App:INFO :WithOut DH_MONT
App:INFO :With HMAC
App:INFO :WithOut RSA_PLAIN
App:INFO :With RSA_CRT
App:INFO :With AES
App:INFO :With DES
App:INFO :With PBKDF
App:INFO :With TLS
App:INFO :WithOut MIFARE
App:INFO :With I2CM
App:INFO :SecureBox = 010B
App:WARN :#####
App:INFO :Tag value - proprietary data 0xFE = 0xFE
App:INFO :Length of following data 0x45 = 0x45
App:INFO :Tag card identification data <Len=2>
DF 28
App:INFO :Length of card identification data 0x46 = 0x42
App:INFO :Tag configuration ID 0x01 = 0x01
App:INFO :Length configuration ID 0x0C = 0x0C
App:INFO :Configuration ID <Len=12>
DE 02 26 92 E8 1D E6 08 F3 88 0D 5F
App:INFO :OEF ID <Len=2>
7 2

App:INFO :Tag patch ID 0x02 = 0x02
App:INFO :Length patch ID 0x08 = 0x08
App:INFO :Patch ID <Len=8>
  00 00 00 00 00 00 01
App:INFO :Tag platform build ID1 0x03 = 0x03
App:INFO :Length platform build ID 0x18 = 0x18
App:INFO :Platform build ID <Len=24>
  4A 33 52 33 35 31 30 32 34 44 30 30 31 31 30 30
  F2 00 00 40 20 09 42
App:INFO :JCOP Platform ID = J3R3 24D0 00
App:INFO :Tag FIPS mode 0x05 = 0x05
App:INFO :Length FIPS mode 0x01 = 0x01
App:INFO :FIPS mode var = 0x01
App:INFO :Tag pre perso state 0x07 = 0x07
App:INFO :Length pre perso state 0x01 = 0x01
App:INFO :Bit mask of pre perso state var = 0x01
App:INFO :Tag ROM ID 0x08 = 0x08
App:INFO :Length ROM ID 0x08 = 0x08
App:INFO :ROM ID <Len=8>
  2E 5A D8 84 09 C9 BA DB
App:INFO :Status Word <SW> <Len=2>
  90 00
App:INFO :ex_sss Finished

```

The highlighted log is the SE UID, OEF ID and JCOP Platform ID.

11.6.2 Using VCOM and binary

- Flash VCOM binary present in `binaries` directory according to your board.
- Check VCOM Port number in device manager.
- **Build project `se05x_GetInfo` with the following configuration:**
 - SMCOM: VCOM
 - Host: PCWindows
- Run the built binary as:

```
se05x_GetInfo.exe COMxx
```

Where *COMxx* is the VCOM port number obtained from step 2.

You would be able to see a log like this:

```

App:INFO :PlugAndTrust_v02.10.90_20190726
App:INFO :Running se05x_Get_Info.exe
App:INFO :Using PortName='COM16' (CLI)
Opening COM Port '\\.\COM16'
sss:INFO :atr (Len=35)
00 A0 00 00    03 96 04 03    E8 00 FE 02    0B 03 E8 08
01 00 00 00    00 64 00 00    0A 4A 43 4F    50 34 20 41
54 50 4F
sss:WARN :Communication channel is Plain.
sss:WARN :!!!Not recommended for production use.!!!
App:WARN :#####
App:INFO :uid (Len=18)
04 0D      9 67 C      41 1B      5 B7 A
D
App:WARN :#####
App:INFO :Applet Major = 3
App:INFO :Applet Minor = 1
App:INFO :Applet patch = 0
App:INFO :AppletConfig = 67D2
App:INFO :WithOut ECDA
App:INFO :With    ECDSA_ECDH_ECDHE
App:INFO :WithOut EDDSA
App:INFO :WithOut DH_MONT
App:INFO :With    HMAC
App:INFO :WithOut RSA_PLAIN
App:INFO :With    RSA_CRT
App:INFO :With    AES
App:INFO :With    DES
App:INFO :With    PBKDF
App:INFO :With    TLS
App:INFO :WithOut MIFARE
App:INFO :With    I2CM
App:INFO :SecureBox = 010B
App:WARN :#####
App:INFO :Tag value - proprietary data 0xFE = 0xFE
App:INFO :Length of following data 0x45 = 0x45
App:INFO :Tag card identification data (Len=2)
DF 28
App:INFO :Length of card identification data 0x46 = 0x42
App:INFO :Tag configuration ID 0x01 = 0x01
App:INFO :Length configuration ID 0x0C = 0x0C
App:INFO :Configuration ID (Len=12)
DE 02 76 92    E8 1D E6 08    F3 88 00 5F
App:INFO :OEF ID (Len=2)
7 2
App:INFO :Tag patch ID 0x02 = 0x02
App:INFO :Length patch ID 0x08 = 0x08
App:INFO :Patch ID (Len=8)
00 00 00 00    00 00 00 01
App:INFO :Tag platform build ID1 0x03 = 0x03
App:INFO :Length platform build ID 0x18 = 0x18
App:INFO :Platform build ID (Len=24)
4A 33 52 33    35 31 30 32    34 44 30 30    31 31 30 30
F7 00 00 40    2D 7A 09 42
App:INFO :JCOP Platform ID = J3R3 24D0 00
App:INFO :Tag FIPS mode 0x05 = 0x05
App:INFO :Length FIPS mode 0x01 = 0x01
App:INFO :FIPS mode var = 0x01
App:INFO :Tag pre-perso state 0x07 = 0x07
App:INFO :Length pre-perso state 0x01 = 0x01
App:INFO :Bit mask of pre-perso state var = 0x01
App:INFO :Tag ROM ID 0x08 = 0x08
App:INFO :Length ROM ID 0x08 = 0x08
App:INFO :ROM ID (Len=8)
2E 5A D8 84    09 C9 BA DB
App:INFO :Status Word (SW) (Len=2)
90 00
App:INFO :ex_sss Finished

```

The highlighted log is the SE UID, OEF ID and JCOP Platform ID.

11.6.3 Using ssscli Tool

- Flash VCOM binary present in `binaries` directory according to your board.
- Check VCOM Port number in device manager.
- Run the following commands in `binaries/pySSSCLI` directory:

```
ssscli.exe connect se050 vcom COMxx
ssscli.exe se05x uid
ssscli.exe disconnect
```

Where `COMxx` is the VCOM Port number obtained in step 2.

You would be able to see a log like this:

```
Opening COM Port '\\.\COM5'
sss:INFO :atr (Len=35)
  00 A0 00 00      03 96 04 03      E8 00 FE 02      0B 03 E8 08
  01 00 00 00      00 64 00 00      0A 4A 43 4F      50 34 20 41
  54 50 4F

sss:WARN :Communication channel is Plain.
sss:WARN :!!!Not recommended for production use.!!!
INFO:sss.se05x:04005001222cb5ffe83a52042f0559550000
INFO:sss.se05x:Unique ID: 04005001222cb5ffe83a52042f0559550000
```

The highlighted log is the SE UID

11.6.4 SE Platform Information on Android platform

1. SE will have preconfigured information with which one can verify the functionalities it supports.
2. Follow the steps in [AOSP build Environment Setup](#) as a pre-requisite.
3. After successful compilation of Android keymaster, `se05xGetInfo.bin` will get generated in `$ROOT_DIR/android-root/out/target/product/<BOARD_NAME>/testcases/se05xGetInfo/arm` and `$ROOT_DIR/android-root/out/target/product/<BOARD_NAME>/testcases/se05xGetInfo/arm64` directories.
4. To get the platform information on Android, follow below steps:

```
adb root && adb wait-for-device && adb remount
adb push testcases/se05xGetInfo/arm/se05xGetInfo /system/vendor/bin/se05xGetInfo
adb reboot
adb root && adb wait-for-device && adb remount
adb shell
cd system/vendor/bin
./se05xGetInfo
```

5. In `adb logcat | grep "NXPKeymasterDevice"` respected information will be shown.

An example log of SE platform information is given below.

```

NXPKeymasterDevice: App: PlugAndTrust_v02.10.02_20190809
NXPKeymasterDevice: App: Running ./se05x_Get_Info
NXPKeymasterDevice: App: If you want to over-ride the selection, use ENV=EX_SSS_BOOT_SSS_PORT or pass in command line arguments.
NXPKeymasterDevice: sss:atr (Len=35) 00A0000003960403E800FE020B03E8080100000006400000A4A434F5034204154504F
NXPKeymasterDevice: sss: Communication channel is Plain.
NXPKeymasterDevice: sss: !!!Not recommended for production use.!!!
NXPKeymasterDevice: App: uid (Len=18) 040D 967C 411B 5B7A1 D
NXPKeymasterDevice: App: #####
NXPKeymasterDevice: App: Applet Major = 3
NXPKeymasterDevice: App: Applet Minor = 1
NXPKeymasterDevice: App: Applet patch = 0
NXPKeymasterDevice: App: AppletConfig = 67D2
NXPKeymasterDevice: App: WithOut ECDA
NXPKeymasterDevice: App: With ECDSA_ECDH_ECDHE
NXPKeymasterDevice: App: Without EDDSA
NXPKeymasterDevice: App: WithOut DH_MONT
NXPKeymasterDevice: App: With HMAC
NXPKeymasterDevice: App: Without RSA_PLAIN
NXPKeymasterDevice: App: With RSA_CRT
NXPKeymasterDevice: App: With AES
NXPKeymasterDevice: App: With DES
NXPKeymasterDevice: App: With PBKDF
NXPKeymasterDevice: App: With TLS
NXPKeymasterDevice: App: Without MIFARE
NXPKeymasterDevice: App: With I2C
NXPKeymasterDevice: App: SecureBox = 010B
NXPKeymasterDevice: App: #####
NXPKeymasterDevice: App: Tag value - proprietary data 0xFE = 0xFE
NXPKeymasterDevice: App: Length of following data 0x45 = 0x45
NXPKeymasterDevice: App: Tag card identification data (Len=2) DF28
NXPKeymasterDevice: App: Length of card identification data 0x46 = 0x42
NXPKeymasterDevice: App: Tag configuration ID 0x01 = 0x01
NXPKeymasterDevice: App: Length configuration ID 0x0C = 0x0C
NXPKeymasterDevice: App: Configuration ID (Len=12) DE027692E81DE608F3880D5F
NXPKeymasterDevice: App:OEF ID (Len=2) 7 2
NXPKeymasterDevice: App: Tag patch ID 0x02 = 0x02
NXPKeymasterDevice: App: Length patch ID 0x08 = 0x08
NXPKeymasterDevice: App: Patch ID (Len=8) 0000000000000001
NXPKeymasterDevice: App: Tag platform build ID1 0x03 = 0x03
NXPKeymasterDevice: App: Length platform build ID 0x18 = 0x18
NXPKeymasterDevice: App:Platform build ID (len=24) 4A335233353130323444303031313030F70000402D7A0942
NXPKeymasterDevice: App: JCOP Platform ID = J3R3 24D0 00
NXPKeymasterDevice: App: Tag FIPS mode 0x05 = 0x05
NXPKeymasterDevice: App: Length FIPS mode 0x01 = 0x01
NXPKeymasterDevice: App: FIPS mode var = 0x01
NXPKeymasterDevice: App: Tag pre-perso state 0x07 = 0x07
NXPKeymasterDevice: App: Length pre-perso state 0x01 = 0x01
NXPKeymasterDevice: App: Bit mask of pre-perso state var = 0x01
NXPKeymasterDevice: App: Tag ROM ID 0x08 = 0x08
NXPKeymasterDevice: App: Length ROM ID 0x08 = 0x08
NXPKeymasterDevice: App:ROM ID (Len=8) 2E5AD88409C9BADB
NXPKeymasterDevice: App:Status Word (SW) (Len=2) 9000
NXPKeymasterDevice: App: ex_sss Finished

```

The highlighted log is the SE UID, OEF ID and JCOP Platform ID.

11.7 Version Information

Item	Version Number
Release Version	v03.00.05_20201105
Middleware	v03.01.00_20201105
SSS APIs	v03.04.00_20201105
Demos and Use Cases	v02.17.00_20201105
JCOP	Platform ID J3R351021E950400
SE050 Applet	03.01
A71CH Applet	1.3

11.8 Certificate Chains

11.8.1 SE050 Certificate Chains

Certificate Chains : ROOT

- *ECC*
 - *ROOT CA*
 - *Intermediate CA*
- *RSA*
 - *ROOT CA*
 - *Intermediate CA*

The directory demos/Certificate_Chains/ROOT contains RootCA and Intermediate Certificates used in various configurations of SE050. More information on these certificates can be found in the application note on SE050 configurations: [AN12436](#)

ECC

This directory contains the ECC chain of trust for cloud on-boarding.

ROOT CA

The file IOT_NXP-01-CERT_IOT_CA_KEY-IoTRootCAvE305-01-20190320162439-EC_SEC_P384R1-4B7E5A.crt contains ROOT CA.

```
-----BEGIN CERTIFICATE-----  
MIIB1jCCAVmgAwIBAgIBATAMBggqhkJOPQQDAwUAMEExFzAVBgNVBAsMD1BsdWcg  
YW5kIFRydXN0MQwwCgYDVQQKDANOWFAxGDAWBgNVBAMMD05YUCBSb290Q0F2RTMw  
NTAeFw0xOTAzMjAxNTI2MDRaFw0zNzAzMjAxNTI2MDRaMEExFzAVBgNVBAsMD1Bs  
dWcgYW5kIFRydXN0MQwwCgYDVQQKDANOWFAxGDAWBgNVBAMMD05YUCBSb290Q0F2  
RTMwNTB2MBAGByqGSM49AgEGBSuBAAiA2IABNRrkWrw7iwM3oTw1Ay8Il1yzOF+g  
OTNFzqfn/93N1xcK8kNEA8wNuuVjzsDXKHx701jrGZfy7YLjKYTwZR5wURXrE7lp  
PIwwdWE3OokTmhiMiFXnzSgSHCgtb+VF6nv76aMjmCEwDwYDVR0TAQH/BAUwAwEB  
/zAOBgNVHQ8BAf8EBAMCAQYwDAYIKoZIZj0EAwMFAANpADBmAjEA7cCFz6PcBHKi  
HRtbE3qi0Lj9iqxe8/2w8XrLc1AYhpMzzOQC05j3ZmgJ22B1bLk3AjeAhVnhuawO  
Zh1Jqwf7zySh/rNJeZfhGTyHAjQ9tTfY9eZAdc25feEN4j/Ad+7TF1Rg  
-----END CERTIFICATE-----
```

Intermediate CA

The file IOT_NXP-01-CERT_IOT_4LAYER_CA_KEY-IoTInt4LAYERCAvE205-01-20190320164314-EC_SEC_P256R1.crt contains the Intermediate CA.

```
-----BEGIN CERTIFICATE-----
MIIBYjCCAU6gAwIBAgIBBDAMBggqhkjOPQQDAgUAMEExFzAVBgNVBAsMDlBsdWcg
YW5kIFRydXN0MQwwCgYDVQQKDANOWFAxGDAWBgNVBAMMD05YUCBSb290Q0F2RTMw
NTAeFw0xOTAzMjAxNTQyNTRaFw0zNDazMjAxNTQyNTRaMFaxFzAVBgNVBAsMDlBs
dWcgYW5kIFRydXN0MQwwCgYDVQQKDANOWFAxJzAlBgNVBAMMHk5YUCBjbnRlcml1
ZGlhdGUtNExheWVyQ0F2RTIwNTBZMBMGByqGSM49AgEGCCqGSM49AwEHA0IABO+d
HK3Oa4FnkKN9/1JQpR2KarpxmwnRaEG6Zb+kzTwnXrw4Cvknd8IAcjhXqb93Vfx5
rO+4MjX/gzqYagJByWejJJakMBIGA1UdEwEB/wQIMAYBAf8CAQEwDgYDVR0PAQH/
BAQDAgEGMAwGCCqGSM49BAMCBQADaAAwZQIxAPvXuv1W+zksBbz0NyyzpgFP1rCj
IZOHpfZhaERw/DEj+4aAESa5vgtiR3CspIP5pAIwRsD1Z9fdBnPSlaVMmNAXjA1Z
FPhbV7A0OxydSYhI8M5uTENrdqzvsYYr2jfqIEcp
-----END CERTIFICATE-----
```

RSA

This directory contains the RSA chain of trust for cloud on-boarding.

ROOT CA

The file IOT_NXP-01-CERT_IOT_CA_KEY-IoTRootCAvR406-01-20190425163255-RSA4096-BAB872.crt contains the ROOT CA.

```
-----BEGIN CERTIFICATE-----
MIIIFIDCAwigAwIBAgIBATANBgkqhkiG9w0BAQwFADBBMRcwFQYDVQQLDA5QbHVn
IGFuZCBUcnVzdDEMMAoGA1UECgwDTl1hQMRgwFgYDVQQDDA90WFAgUm9vdENBd1I0
MDYwHhcNMTkwNDI1MTQzMzAzWhcNMzcwNDI1MTQzMzAzWjBBMRcwFQYDVQQLDA5Q
bHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTl1hQMRgwFgYDVQQDDA90WFAgUm9vdENB
d1I0MDYwggIiMA0GCSqGSIb3DQEBAQUAA4ICDwAwggIKAoICAQCwRBRevWxzoVln
bFOWhxjFmX6hqPBB5o7pOVVGqvvdkSvcdZh7+hozTPzI7d5eCJWtIYZ4xUXxiP8
MtIsssT4yrZjpSy2qTwbn5T/1B7a2e/A5JTGUcX05/uFATfZTs2pcouydB68PnB
LVsS8i1atpxN4TiY5NPchWM2mL7YwoKJxCNgZFss5WYxvm4OSOhMy7rAF010ujy1k
6L/XydcSv48G6ZlpCYH8Tn5cV7UEuNWpgq+0Wgpz6xz/ZHyfTxKhuBtj4eh3GyDv
Fmt1L1hJT/k17+Q19rW3U7OBV5w8ehuLoRNsNzG2zc9rFH1K9pVX9DRZQKI5XNoh
1he7oSxJFkjsLn27w0fOHraOaeFrYuOrbKDA/X+cJzyKOvxWNhVyFRryn2iO58Wa
HuBqja7fnubexMP1Mr2b/hzV11SPmFVDk+B17VXpvC/tYXEqlSK1Tj/1gZ5tpmpm
SBBqcHsp0YQEknLANG+K9sFOKamf1Yt0IO/iyoYPUQ5IV644poizt02myFrT04+K
Pwi+XwoRBVSK/WrI5vy16HzAJqPP1Nb6QKdOe1Q+NwNMyUySFzHavd3L4XaiNP4Z
iPgjSG/me8ozcPTFR29eibP17p9Y1hocmU4g2UURstVL0cpdOrc36BEv6DQ6RN4H
7N9VM9AIP+1047argR+ciYzkY+Xd+wIDAQABoyMwITAPBqNVHRMBAf8EBTADAQH/
MA4GA1UdDwEB/wQEAWIBbjANBgkqhkiG9w0BAQwFAAOCAgEAQsNB0/011ELP5rHN
rk9+sTh+Mr6Ye7geTYT1QRCCpLuyUuy3C051dsOKP3RorsNYD/aCJGhHDvh0ofyj
yKx5lre2+b2foSVg+ZjQQf3qju+7bqh3tW1dD2bI49+yRoCIplJZQ8V91ReH+33k
TzYNv/tvzYxnF8AF7wJ93zyafXjvIQ6AUrv0DdgtN203M853jxavjZHSVjTQXaR0
LwYCcNiE+bE2Z4owjerG3QAVG/ju8Xz+bhOFry/+M1ib1F8KGZRzSA0E0ijMhhfZ
ZIP6eXjWWaoL+9iqD8F8/IXxW2zH37IzOTB6s2xcSFvjGbzbVJ7CHy8/c4OQEoZpi
gujcPF5axOpI2RSnUPX+YFyu3od5URS3ybo9aT7b1CLURkjbhcGHCo04NL3h6Zg1
G2ktasOCL3moypWY0EYNwrHKycCVY3VVR1H89P03qf5uUAADFcrpZ81B7yPylmt
4qcZfbACzUt300UzUI1VDyHL6Nctw/1Da26aGKZMseHan6xEsdpiHMC5efv4Xd7U
k+bVedNwTKooDZn1K5WKTiZ3nUcSRahmiaQrAb61KYEcDxRK5VPtr/MU6cL2PKZ
-----END CERTIFICATE-----
```

(continues on next page)

(continued from previous page)

```
m9oZ0hnfB5EbYJH4tWAite7j5kMrt0ltT+woeWP/dSmDg31ZCBmc3Sx0NaU12jQZ  
2vnNPomcaE8BkvyrhEPkSw/VXTw=  
-----END CERTIFICATE-----
```

Intermediate CA

The file IOT_NXP-01-CERT_IOT_4LAYER_CA_KEY-IoTInt4LayerCAvR406-01-20190425163534-RSA4096-540F1crt contains the intermediate CA.

```
-----BEGIN CERTIFICATE-----  
MIIFMjCCAxqgAwIBAgIBAjANBgkqhkiG9w0BAQwFADBBMRcwFQYDVQQLDA5QbHVn  
IGFuZCBUcnVzdDEMMAoGA1UECgwDTlhQMRgwFgYDVQQDDA90WFAGUm9vdENBd1I0  
MDYwHhcNMTkwNDI1MTQzNTA5WhcNMzQwNDI1MTQzNTA5WjBQMRcwFQYDVQQLDA5Q  
bHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTlhQMScwJQYDVQQDB50WFAGSW50ZXJt  
ZWRpYXR1LLTRMYX11ckNbdlI0MDYwggiMA0GCSqGSib3DQEBAQUAA4ICDwAwggIK  
AoICAQCyji2V12sVG7PQNj8uzYSA+cSCDvP/pCqvcA8ulaVuTfjlQVkRejPeRUO  
549JKWvE/318mW1mUApFcK0q1ud6/W9iFgKHdVpwKkOH1miIdHiOEHCu2Qr7EnKH  
jMD5M/dhqwZdRxlojiMnEw7pt4x2gdndZQQFO5eHIBb/SIgeeUVreYnjRTfTRqqV  
oZfYPV09IYx4Lm1lFcCgODpn55TSIYvE8fGqGTM+J3+Q0g47N6Uve3SGdjL7aese  
wGb6EPqGUqaSGL0gKy/L0K1gnVZXOeidFJjOe5QsKUQgWbCExcLObR2a3XzbIwXq  
dq+ED1ovhrRDHH5VDRgK4+7WCfy6wQD9PPIy8WioXsCV2XCSixAM6XhWUYkLignp  
30Yy5tzKhbcPyxe84ZM3sZG/PAoJVAbwpVpj/m/pX3N8jdQ/hE1eVgaoyTX0Pn9We  
tXRQkUEBluOm3Czaw1YN1E5LWpP8hYhWTMPVnf1Z/R3rdswiWaA2+knWJCXkdsk  
Kle8h4xNB0e0ZAzulEXh9JROsOqZUuh0+sGwPsw13p4KqauBzSG77tos1e4xp9AI  
9P7JcnRsEeNjgTvbjBxIS1QdHW3FCnud7hM/OoTbGojwB3CHPiIoIJmWCW7ci6beD  
DUwOo2CfjZ+F1QErar2XarQrPldSFTd+1JJqUy+tiNowPJaFyQIDAQABoyYwJDAS  
BgnVHRMBAf8ECDAGAQH/AgEBMA4GA1UdDWEB/wQEAWIBBjANBgkqhkiG9w0BAQwF  
AAOCAGEAw0JtZaJCEbm4+DmYa32WNvqjjxgdmRHjkJtfv+wkt0Kz71MHG0qSQBHH  
UkVOkBfM/wjf+lH+/7X9ZdiFsO3b9P2JXHg1PXgU9NvtuYZBAsiy0VRxVsukp+JH  
7biOFNx5nwerYv9C1JG2VRPr+JzDUP1/QV9XCftQVnpym/pETLghOwaNq4Yjzg+  
MxLw4sWsJL5DZrG2/jViHhogoCnxz1rFVWF11BBvEbKnthYUxqL+Xc4vWCYLvMhc  
LbZMGef05HrcPwtAS13y8qpat5MGRXDjgFqGUyoaPoxRya4dOexjw369aV/YAIsx  
wgtAiWrVl4UPOUGopCMac4GEbpPA60XHmSVxyR+CCKyLwLD7rRR8Vpk5cUM2jvxI  
5NMP17Wa+QD4jp8sWsSebI83+qL/0TdWgRbD/FW2igrR0ird8wgQcIhtCrJCdYMT  
MjRtJc4m/iJ+OH2KaryxQi8oEkB3onsIZXvSNgXvTp4SkLw9pPheEwSKVvb01DoF  
QB4ek6ynjWGgoaH15tx2i+tRH+mEP7+Ccw32HdX+xo8BYvMaBXJI8M5rem7k4PsQ  
tLNjn9CN0FPT8j2ksk8jMi4s/c9EHY5NYNgjTG6MQ3eSS1QaoVYPi4NCDe2KWP2k  
ooGZMu1ICfXbP86zQz5xBJvd/+Rmdn+mvLoabzmFVPs9E1yH6fE=
```

-----END CERTIFICATE-----

Note: The certificates shown here were last Updated on June 18, 2019 in this page/document.

Certificate Chains : DEV Kit

Certificates for the DEV Kit / Ease Of Use Configuration.

- *Certificate Chain for SE050*
 - *Intermediate CA : ECC*
 - *Intermediate CA : RSA*

Certificate Chain for SE050

The directory `demos/Certificate_Chains/0004_A1F4` contains Intermediate Certificates used in Dev Kit configurations. It is signed by *Certificate Chains : ROOT*. More information on these certificates can be found in the application note on SE050 configurations: [AN12436](#)

Intermediate CA : ECC

The file `CloudConn-Intermediate-ECC_OEF_A1F4.crt` is certificate used for Dev Kit configuration.

```
-----BEGIN CERTIFICATE-----
MIIBujCCAWGgAwIBAgIKBABQQAQAEofoQAADAKBggqhkjOPQQDAjbQMRcwFQYDVQQL
DA5QbHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTlhQMScwJQYDVQQDB50WFAGSw50
ZXJtZWRpYXR1LTRMYX11ckNBdkUyMDUwHhcNMTkwNjE4MDAwMDAwWhcNMzQwNjE0
MDAwMDAwWjBdMRcwFQYDVQQLDAs5QbHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTlhQ
MTQwMgYDVQQDDCtDbG91ZENvbmtSW50ZXJtZWRpYXR1LTA0MDA1MDAxMDAwNEEx
RjQtRUNDMFkwEwYHKoZIZj0CAQYIKoZIZj0DAQcDQgAEni7KN2Z6tbFuhjRrqgHb
xzUWSCUrPmFP8xpsIOEHM8WJPv8D+MCeu6Y2WU/ILhxp1Y3TJ2hGZtV4foO3pq
NqMWMBQwEgYDVROTAQH/BAgwBgeB/wIBADAKBggqhkjOPQQDAGNHADBEAiB0waPl
4dcbmqbLUfQRscoPVzSeqT2dfdwg0W0g/FlaPgIgs2ppnaRASzc5rCOeV5AeMb2
j7IKEHDyeMRP0wlaptU=
-----END CERTIFICATE-----
```

Intermediate CA : RSA

The file `CloudConn-Intermediate-RSA_OEF_A1F4.crt` is certificate used for Dev Kit configuration.

```
-----BEGIN CERTIFICATE-----
MIIFRzCCAy+gAwIBAgIKBABQQAQAEofoQAADANBqkqhkiG9w0BAQsFADBQMRcwFQYD
VQQLDAs5QbHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTlhQMScwJQYDVQQDB50WFAG
Sw50ZXJtZWRpYXR1LTRMYX11ckNBdlI0MDYwHhcNMTkwNjE4MDAwMDAwWhcNMzQw
NjE0MDAwMDAwWjBdMRcwFQYDVQQLDAs5QbHVnIGFuZCBUcnVzdDEMMAoGA1UECgwD
TlhQMTQwMgYDVQQDDCtDbG91ZENvbmtSW50ZXJtZWRpYXR1LTA0MDA1MDAxMDAw
NEExRjQtU1NBMICICIjANBgkqhkiG9w0BAQEFAOCAg8AMIICCgKCAgEAzkNa+y5n
9CQK9Aw4F1Lrml7chE3CBFgnp49OSNII0mI2G/YmhI2zotydgIp17Wk+gJd1wpQM
rKuh2RmLihoiyLmuuOVxKbn1Tw35tshij48IinJ7G6n4x7SmU2kHjPqsjdF4ncp
VK6IcXoNQ+zteN8/q5Pcbmozo+UriUhLGdu6By/Z3+BseTsNYJhouIzN8CwZ1h+r
LRgjpiodrwHE0jVbe74Fqjcb7TEqACHZNEaCH1fnSs4BaiiMOSMGGGhGrPMHxb0z
VHEssJGZ3aa7xzFakop6hNz6m82q14WYMM/2fbuOh2mIgrEexz22zTGSG1a3+wt
uy46QVCivEMwsMDYzOjoc01CbAsRUft9pbzdKVxt5qAPpiQLxOzSkgDuOw5N/jdN
Kmt/sa7gh8uRqnQVvzjkSmDg0TqolPuTrt2ts371MwlyKToAeo09w/HkMb6CF7GB
```

(continues on next page)

(continued from previous page)

```
EgTTnob1MGUpJRDk9MM/PMi15tsXT30G1MVcXoRDk6y9nBsxEAPzBC3SQAjmk6T1
KWPgBlrjNIFmkosCKQPPzn1cdygpbCKHeRt29X+TsQq12tDTHMUTdG5NWJ/6gPEk
2ur12J2iEF9LaAu3dM5aKfLauoyvKeN1Z6FUBVQz9PgLRrcCR52eiUn6AOR9gZZN
Lozp/uQQU+CBMw0daEBI7+xetha9F426CCMCAwEAAaMWMBQwEgYDVR0TAQH/BAgw
BgEB/wIBADANBgkqhkiG9w0BAQsFAAOCAgEAJLw+RCn/qhLPni7NwkTfi69bnrF
jE6nhhgveleZ71xUPu3Jdd+swgf dZmKDnUfr4mQJ21/rj2Z4yx7WA7Cy3IjG52d
9A9/jrqUN8T9AmqdME9e4rwTmjzCtKx91yFex+jcisJphcc6zkoDmp/XaumXi9GW
M+J0laY+hj6nw9BWbd/wGDxe2mzbjdWNtP8jb3CKuqJQexWB5pjNUnexdJSDFVXs
Hf0NYtolzK7dh+/GMUfdTCX/8g3hN2Won1DD6/fTXdgCSXExaBz0EhsethdFb3y6
vR+MvngMoZhbyGH5VzQ2sESo9vGzfPSiM8mHvjaV++hDduVEpodoxSE/C8TdNpUZ7
Lh6E1JYcUbDE2VV93/dYaiM5Cag/SuKG/8phZ3g9eXT9oPmOEtKXg9bdMJoNwJ0N
LiAW3eFdBBmDGB/6D5vSOD3YkPhtBUIC+/9vBL0KNx9V9/4xWZAnmTt jLfYLoyst
IE5Qnr0Tpqz123+Tvj9X7ulNUuu7MMhtiAs2SKM9iWMXAd/UW6Vq5x7SKjQ7b6FQ
vCn/CAZn9uV4ixwDzbIoQV+4ps9QuyqVGJbtqEctxYo896ulTeJAFyiPnfeF1WdM
gPmab4mVjTyikESCTSkM2nNYVkkQ5ANHfEQ8XVoRsdJmp3rM16MD1n1zjfSyEHrQ
1XL23wm/K2UEOfw=
-----END CERTIFICATE-----
```

Note: The certificates shown here were last Updated on June 18, 2019 in this page/document. These certificate chains are only for Dev Kit configuration (OEF A1F4).

11.8.2 SE051 Certificate Chains

Certificate Chains : ROOT

- *ECC*
 - *ROOT CA*
 - *Intermediate CA*
- *RSA*
 - *ROOT CA*
 - *Intermediate CA*

The directory demos/Certificate_Chains/ROOT contains RootCA and Intermediate Certificates used in various configurations of SE051. More information on these certificates can be found in the application note on SE051 configurations: [AN12973](#)

ECC

This directory contains the ECC chain of trust for cloud on-boarding.

ROOT CA

The file RootCAvE305.crt contains ROOT CA.

```
-----BEGIN CERTIFICATE-----
MIIB1jCCAVmgAwIBAgIBATAMBggqhkjOPQDwUAMEExFzAVBqNVBAAsMD1BsdWcg
YW5kIFRydXN0MQwwCgYDVQQKDANOWFAxGDAWBqNVBAMMD05YUCBSb290Q0F2RTMw
NTAeFw0xOTAzMjAxNTI2MDRaFw0zNzAzMjAxNTI2MDRaMEExFzAVBqNVBAAsMD1Bs
dWcgYW5kIFRydXN0MQwwCgYDVQQKDANOWFAxGDAWBqNVBAMMD05YUCBSb290Q0F2
RTMwNTB2MBAGByqGSM49AgEGBSuBBAAiA2IABNRrkWrw7iwM3oTw1Ay8I1yzOF+g
OTNFzqfn/93N1xcK8kNEA8wNuuVjzsDXKh701jrGZfy7YLjKYTwZR5wURXrE7lp
PIwwdWE3OokTmhiMiFXnzSgSHCgtb+VF6nv76aMjMCEwDwYDVR0TAQH/BAUwAwEB
/zAOBgNVHQ8BAf8EBAMCAQYwDAYIKoZIzj0EAwMFAANpADBaAjEA7cCFz6PcBHki
HRtbE3qi0Lj9iqxe8/2w8XrLc1AYhpMzZOQC05j3ZmgJ22B1bLk3AjeAhVnhuawO
Zh1Jqwf7zySh/rNJezeHGTyHAjQ9tTfY9eZAdc25feEN4j/Ad+7TF1Rg
-----END CERTIFICATE-----
```

Intermediate CA

The file Intermediate-4LayerCAvE205.crt contains the Intermediate CA.

```
-----BEGIN CERTIFICATE-----
MIIBYjCCAU6gAwIBAgIBBDAMBggqhkjOPQDwUAMEExFzAVBqNVBAAsMD1BsdWcg
YW5kIFRydXN0MQwwCgYDVQQKDANOWFAxGDAWBqNVBAMMD05YUCBSb290Q0F2RTMw
NTAeFw0xOTAzMjAxNTQyNTRaFw0zNDAzMjAxNTQyNTRaMFExFzAVBqNVBAAsMD1Bs
dWcgYW5kIFRydXN0MQwwCgYDVQQKDANOWFAxJzAlBgNVBAMMhk5YUCBjBnRlcml1
ZG1hdGUtNExheWVyQ0F2RTIwNTBZMBMGBqGSM49AgEGCCqGSM49AwEHA0IABo+d
HK3Oa4FnkKN9/1JQpR2KarpwmwNRaEG6Zb+kzTwnXRw4Cvknd8IAcjhXqb93Vfx5
rO+4MjX/gzqYagJByWejJjAkMBIGA1UdEwEB/wQIMAYBAf8CAQEwDgYDVR0PAQH/
BAQDAgEGMAwGCCqGSM49BAMCBQADaAAwZQIxAPvXuv1W+zksBbz0NyyzpgFP1rCj
IZOHpfZhaERw/DEj+4aAESa5vgtiR3CspIP5pAIwRsD1Z9fdBnPslavMmNAXjA1Z
FPhbV7A0OxydSYhI8M5uTENrdqzvsYYr2jfqIEcp
-----END CERTIFICATE-----
```

RSA

This directory contains the RSA chain of trust for cloud on-boarding.

ROOT CA

The file RootCAvR406.crt contains the ROOT CA.

```
-----BEGIN CERTIFICATE-----
MIIFIDCAwigAwIBAgIBATANBgkqhkiG9w0BAQwFADBBMRcwFQYDVQQLDA5QbHVn
IGFuZCBUcnVzdDEMMAoGA1UECgwDTl1hQMRgwFgYDVQQDDA90WFAgUm9vdENBd1I0
MDYwHhcNMkNDI1MTQzMzAzWhcNMzcwNDI1MTQzMzAzWjBBMRcwFQYDVQQLDA5Q
bHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTl1hQMRgwFgYDVQQDDA90WFAgUm9vdENB
d1I0MDYwggTiMA0GCSqGSIb3DQEBAQUAA4ICDwAwggIKAoICAQCwRBRevWxzoVln
bFOWxhjFmX6hqPBB5o7pOVVGqvvdkSvcdZh7+hozTPzI7d5eCJWtiIYZ4xUXxiP8
MttIsssT4yrZjpSy2qtWbn5T/lB7a2e/A5JTGUcX05/uFATfZTs2pcouydB68PnB
LVsS8i1atpxN4Tiy5NPchWM2mL7YwoKJxCNgZFss5WYxvm4OSOhMy7rAF010ujy1k
6L/XydcSv48G6ZlpCYH8Tn5cv7UEuNWpgq+0Wgpz6xz/ZHyfTxKhuBtj4eh3GyDv
```

(continues on next page)

(continued from previous page)

```
Fmt1L1hJT/k17+Q19rW3U7OBV5w8ehuLoRNsNzG2zc9rFH1K9pVX9DRZQKI5XNoh
1he7oSxJFkjsLn27w0fOHraOaeFrYuOrbKDA/X+cJzyKOvxWnhVyFRryn2iO58Wa
HuBqja7fnubexMP1Mr2b/hZV11SPmFVDk+B17VXpvC/tYXEqlSK1Tj/1gZ5tpmpm
SBBqcHsp0YQEkNLAnG+K9sFOKamf1Yt0IO/iyoYPUQ5IV644pOiztO2myFrT04+K
Pwi+XwoRBVSK/WrI5vy16HzAJqPP1Nb6QKdOe1Q+NwNMyUySFzHavd3L4XaiNP4Z
iPgjSG/me8ozcPTFR29eibP17p9Y1hocmU4g2UURstVL0cpdOrc36BEv6DQ6RN4H
7N9VM9AIP+1O47argR+ciYzkY+Xd+wIDAQABoyMwITAPBgNVHRMBAf8EBTADAQH/
MA4GA1UdDWEB/wQEAvIBBjANBgkqhkiG9w0BAQwFAAOCAgEAQsNB0/011ELP5rHN
rk9+sTh+Mr6Ye7geTYT1QRCCpLuyUuy3C051dSOKP3RorsNYD/aCJGhHDvh0ofyj
yKx5lre2+b2foSVg+zJQF3qju+7bqh3tW1dD2bI49+yRoCIp1JZQ8V91ReH+33k
TzYNv/tvzYxnF8AF7wJ93zyafXJvIQ6AUUnVoDdgtN203M853jxavjZHSVjTQXaR0
LwYCcNiE+bE2Z4owjerG3QAVG/ju8Xz+bhOFry/+M1ib1F8KGZRzSA0E0ijMhhfZ
ZIP6eXjWWaoL+9iqD8F8/IXxW2zH37IzOTB6s2xcSFvjGbzVJ7CHy8/c40QEoZpi
gujcPF5axOpI2RSnUPX+YFyu3od5URS3ybo9aT7b1CLURkjbhcGHCo04NL3h6Zg1
G2ktasOCL3moypWY0EYNwrHKycCVY3VVR1H89P03qQf5uUAADFcrpZ81B7yPylmt
4qcZfbACzUt300UzUI1VDyHL6Nctw/1Da26aGKZMseHan6xEsdpiHMC5efv4Xd7U
k+bVedNwTKooDZn1K5WKTiZ3nUcSRahdmiaQrAb61KYEcDxRK5VPtr/MU6cL2PKZ
m9oZ0hnfB5EbYJH4tWAite7j5kMrt0ltT+woeWP/dSmDg31ZCBmc3Sx0NaU12jQZ
2vnNPomcaE8BkvyrhEPkSw/VXTw=
-----END CERTIFICATE-----
```

Intermediate CA

The file Intermediate-4LayerCAvR406.crt contains the intermediate CA.

```
-----BEGIN CERTIFICATE-----
MIIFMjCCAxqgAwIBAgIBAjANBgkqhkiG9w0BAQwFADBBMRcwFQYDVQQLDA5QbHVn
IGFuZCBUcnVzdDEMMaoGA1UECgwDTlhQMRgwFgYDVQQDDA90WFAgUm9vdENBd1I0
MDYwHhcNMtKwNDI1MTQzNTA5WhcNMzQwNDI1MTQzNTA5WjBQMRCwFQYDVQQLDA5Q
bHVnIGFuZCBUcnVzdDEMMaoGA1UECgwDTlhQMScwJQYDVQQDB50WFAgSW50ZXJt
ZWRpYXR1LLTRMYX11ckNbdlI0MDYwggIiMA0GCSqGS1b3DQEBAQUAA4ICDwAwggIK
AoICAQCyji2V12sVG7PQNj8uzYSVA+cSCDvP/pCqvca8ulaVuTfjlQVkrEjPeRUO
549JKWvE/318mW1mUApFcK0q1ud6/W9ifgkHDvPwKKOH1miIdHiOEHCu2Qr7EnKH
jMD5M/dhqwZdRxlojiMnEw7pt4x2gdndZQQFO5eHIBb/SIgeeUVreYnjRTfTRqqV
oZfYPV09IYx4Lm1lFcCgODpn55TSIYvE8fgGTM+J3+Q0g47N6Uve3SGdjL7aese
wGb6EPqGUqaSGLQgKy/L0K1gnVZXOeidFJjoe5QsKUQgWbCExcLObR2a3XZbIwXq
dq+ED1ovhrRDHH5VDRgK4+7WCfy6wQD9PP1y8WioXsCV2XCSixAM6XhWUYkLignp
30Yy5tzKhbCpyxe84ZM3sZG/PAojVAbwpVpjmx3N8jdQ/hE1eVgaoyTX0Pn9We
tXRQkUEBluOm3Czaw1YN1E5LWpP8hYhWTMPVnfxf1Z/R3rdswiWaA2+knWJCXkdsk
Kle8h4xNB0e0ZAzulEXh9JRoOsOqZUuh0+sGwPsw13p4KqauBzSG77tos1e4xp9AI
9P7JcnRsEeNjgTvbjBxIS1QdHW3FCnud7hM/OoTbGojwB3CHPIoIJmWCW7ci6beD
DUwOo2CfjZ+F1QErar2XarQrPLdSFTd+1JJqUy+tiNowPjafYQIDAQABoyYwJDAS
BgnVHRMBAf8ECDAGAQH/AgEBMA4GA1UdDWEB/wQEAvIBBjANBgkqhkiG9w0BAQwf
AAOCAGEAw0JtZaJCEbm4+DmYa32WNvqjJxgdmRHjkJtfv+wkt0Kz71MHG0qSQBHH
UkVokBFm/wjf+lH+/7X9ZdiFsO3b9P2JXhg1PXgU9NvtuYZBAsiy0VRxVSukp+jH
7biOFNx5nwerYv9C1JG2VRPr+jzDUP1/QV9XCFTQVnpym/pETLghOwaNq4Yjzg+
MxLw4sWsJL5DZrG2/jViHhogoCnxz1rFVWF1BBvEbKntHUYxqL+Xc4vWCYLvMhc
LbZMGef05HrcPwtAS13y8qpat5MGRXDjgFqGUyoaPoxRya4d0exjw369aV/YAIsx
wgtAiWrvL4UPOUGopCMac4GEbpPA60XHmSVXyR+CCKyLwLD7rRR8Vpk5cUM2jvxI
5NMP17Wa+QD4jp8sWsSebI83+qL/0TdWgRbD/FW2igrR0ird8wgQcIhtCrJCdYMT
MjRtJc4m/iJ+OH2KaryxQi8oEkB3onsIZXvSNgXvTp4SkLw9pPheEwSKVvb01DoF
QB4ek6ynjWGgoaH15tx2i+tRH+mEP7+Ccw32HdX+xo8BYvMaBXJI8M5rem7k4PsQ
tLNjn9CN0FPT8j2ksk8jMi4s/c9EHY5NYNgjTG6MQ3eSS1QaoVYPi4NCDe2KWP2k
ooGZMu1ICfXbP86zQz5xBJvd/+Rmdn+mvLoabzmFVPS9E1yH6fE=
-----END CERTIFICATE-----
```

Note: The certificates shown here were last Updated on October 16, 2020 in this page/document.

Certificate Chains : DEV Kit

Certificates for the DEV Kit / Ease Of Use Configuration.

- *Certificate Chain for SE051*
 - *Intermediate CA : ECC*
 - *Intermediate CA : RSA*

Certificate Chain for SE051

The directory demos/Certificate_Chains/SE051/0001_A201 contains Intermediate Certificates used in Dev Kit configurations. It is signed by *Certificate Chains : ROOT*. More information on these certificates can be found in the application note on SE050 configurations: [AN12973](#)

Intermediate CA : ECC

The file CloudConn-Intermediate-ECC_OEF_A201.crt is certificate used for Dev Kit configuration.

```
-----BEGIN CERTIFICATE-----
MIIBujCCAWGgAwIBAgIKBABQAQABogEAADAKBggqhkjOPQQDAjBQMRcwFQYDVQQL
DA5QbHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTlhQMScwJQYDVQQDB5OWFAgSW50
ZXJtZWRpYXR1LTERMYX11ckNBdkUyMDUwHhcNMTkwnTE1MDAwMDAwWhcNMzQwNTEX
MDAwMDAwWjBdMRCwFQYDVQQLDAs5QbHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTlhQ
MTQwMgYDVQDDCtDbG91ZENvb4tSW50ZXJtZWRpYXR1LTA0MDA1MDAxMDAwMUEy
MDEtRUNDMFkwEwYHKoZIZj0CAQYIKoZIZj0DAQcDQgAEeEU5NJJXLvoOONY8kquO
VZluA+pQBPMxONWqVqxob/wXXjwxfcG7Jxla4yACIyyAR8Um6yhkDcK4T7gtf28r
HKMWMBQwEgYDVR0TAQH/BAgwBgEB/wIBADAKBggqhkjOPQQDAgNHADBEAiAXmSyR
388EKFo40juspNEHhhLBfvlsa5hpEJTxii/xGQIgL9mW1D18LvnA9qutAmBE7UnA
2tC5GoX30IwBQENAWTo=
-----END CERTIFICATE-----
```

Intermediate CA : RSA

The file CloudConn-Intermediate-RSA_OEF_A201.crt is certificate used for Dev Kit configuration.

```
-----BEGIN CERTIFICATE-----
MIIFRzCCAY+gAwIBAgIKBABQAQABogEAADANBgkqhkiG9w0BAQsFADBQMRcwFQYD
VQQLDAs5QbHVnIGFuZCBUcnVzdDEMMAoGA1UECgwDTlhQMScwJQYDVQQDB5OWFAg
SW50ZXJtZWRpYXR1LTERMYX11ckNBdk1I0MDYwHhcNMTkwnTE1MDAwMDAwWhcNMzQw
NTEXMDAwMDAwWjBdMRCwFQYDVQQLDAs5QbHVnIGFuZCBUcnVzdDEMMAoGA1UECgwD
TlhQMTQwMgYDVQDDCtDbG91ZENvb4tSW50ZXJtZWRpYXR1LTA0MDA1MDAxMDAw
MUEyMDEtUlNBMIIICIjANBjkqhkiG9w0BAQEFAOCg8AMIICgKCAgEA0guMQQvD
pdzjTU/zB4S4BWwhIKoyZVhCyEA9eaHnWgaWmUwGPnM8P5M0FivPBTAw/Xq8kJGe
K7cAPy2VKrNCFVgO0qcL7iHCnmgmaHM0IGim5lKoP0pRcJy206PW+uRVozUkYEK
```

(continues on next page)

(continued from previous page)

```
jZHLnsPdVHsP5+YGmU5WWYu4jnNkzFpJtR3fBJyazav0/lr0kLvSg6faH3nrqRGJ
thsCB1szKPQ/Ogi/Ew6P3J7pf0BTXngon3uz2hPgfvnkau7zqCEue8OG2+CyfKKB
N8aiEce3FM4KHSi4wnE93gYzq+Uf7PBi7pSQXV4uuop54rLZRZ2AeB4yViEn9Icf
ZRBrqKtg+b3fRnK4dSqbMjHb30wCgRGWHiMn/+WdUjz19hdCXhf1yQIVB6Pa8RTxn
kwMrYqWX+KQyhVKY1daZV5mxqwxE3pArr0Obq3tCLMLEpaVjG/zSxD/sBHqKDyuG
qgysmxqCdiCgFBvaOYdT30ccGHFXmltzXWvgfCGxvw2neMTfacYtGbMh1Oh4O9jX
91i2CGB5ZNHHBdcH1hpbygWiyp60qyMmEO2yBH1Age/kBgBWppA8W3cC+xP+VwR
94RiN+uiuRBr21iUg4PSizNLrZLW8c90HcSt9p0pwvvBxt67inu/Yh52AUz2/m61
2uhzgRDpR6TvhYhFg2RnmqiSQPtVYUkEr1cCAwEEAAaMWMBQwEgYDVR0TAQH/BAgw
BgeB/wIBADANBgkqhkiG9w0BAQsFAAOCAgEAYvgJL4TAU7sWnydj1j20FHMdCG/8
z2sohJykn8W+nayxeCtdtil+kMxTDPGzER2rCmHfWPrlg95rDYIwWscDnuPSg2za
W8RzwyEwjv27AYZpFB57pPGw25RT20cMPTIpZ01F3aeKEguy3SWSU/Zs6Hgj/8IS
6iJfr0VnB/znthaZfd0ECZknx6bZrbyL09Ls0y/7ygxytYzDrC30vSVaaP/NWZFCp
qmHlpaGtSYr1LtPFYHS7YfLmmYfgHk5bBpzYKCR1Gov8j3b35xvj/NSETWnnojfA
xg4PwdAzKBTn8TLjIkklwcvkdwHYFUUivqcaN4f4YgYKJ48MWwKvMQBF1X73Q1C
E6dXS1TqwULX0staIS4y19c1gVLkdCx1RobKPq2221fG10zQaBXt5iIFWA4d4PZS
dneKwDYrH9k/1UqlWMO/q87m8Tcuvo85kML8sshPWgzs20oA30bEaOXg1D1WNhnO
t+NzdjbXc9MQPzr0r6Gk7BxL5W4wGArujMk1jk781KpeTh5R4IFENI31O1oPShOa
0QnL3DJbpdVMUu2LuE8FsV3k+UdHuboego1hpP59zpN6goUoBMfGhMdI2wb16wv
hKFpiDiBq+bu1WIBOA2DD5kUlTid7yqTp5NtI2TYvXzb5NSehqscCaHopz4Q/+j0w
tJ8ao7HfcVhb7Yc=
-----END CERTIFICATE-----
```

Note: The certificates shown here were last Updated on October 16, 2020 in this page/document. These certificate chains are only for Dev Kit configuration (OEF A201).

11.9 JRCP_v1 Server

This section explains how the JRCP_v1 server enables a client process (remote or local) to establish a communication session with a Secure Element.

Note: The JRCP_v1 server was previously known as RJCT server.


11.9.1 Introduction

The JRCP_v1 server is a standalone process that can establish a communication session with a Secure Element on behalf of a client process. Only one client process (at a time) can have a communication session via the JRCP_v1 server with the Secure Element.

The JRCP_v1 server listens for incoming connection requests from client processes on TCP/IP port 8050. The client application must be compiled for the JRCP_V1 smCom protocol layer.

The following figure illustrates a client application (in the example the Configure Tool) connecting to the JRCP_v1 server,

The tool is provided in source code (./hostlib/rjct). It can be built to connect to the Secure Element with e.g. the SCI2C or the T=1oI2C protocol.

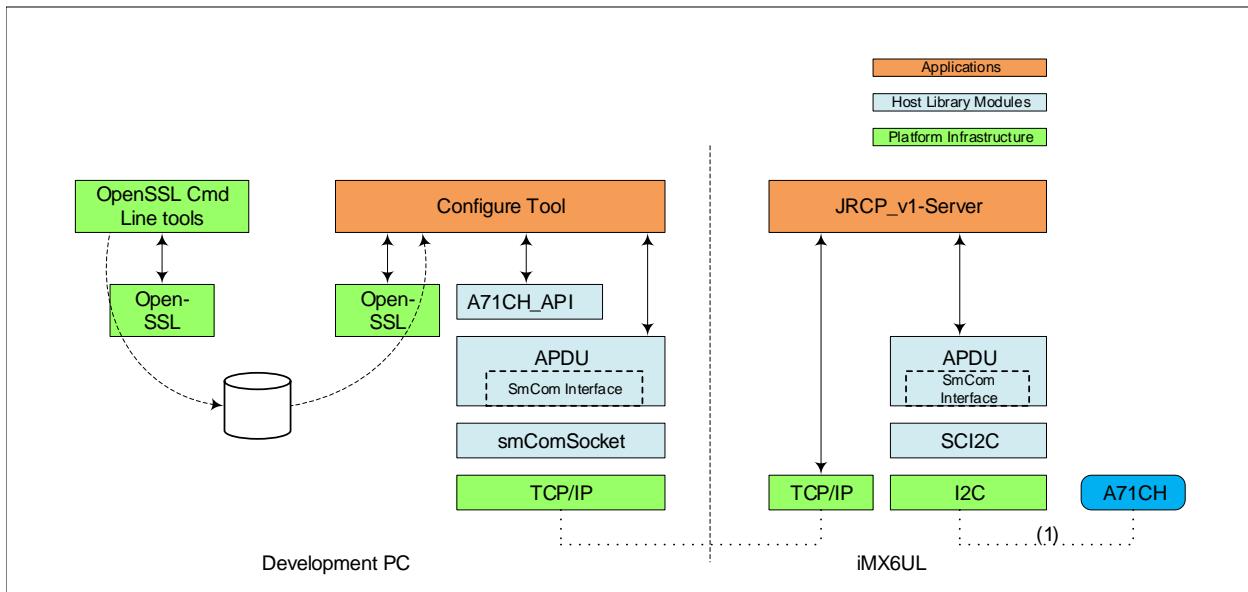

11.9.2 Using the JRCP_v1 server

The JRCP_v1 server application that is bundled with the Host SW is a command line application. In the following example the server is started from a shell on the embedded platform

```
root@imx6ulevk:~# ./jrcpv1_server
RemoteJCShell Terminal Server (supporting SCI2C) Rev 0.92
A71 (I2C_CLK_MAX = 400 kHz) - Effective Master Clock depends on Host Platform.
*****
Establish a connection via JCShell:
  /term Remote|<ip-address>:<port>
  e.g.
  /term Remote|192.168.1.27:8050

Server: waiting for connections...
```

For a client to connect to the server it needs to know the IP address of the server. In the following example the Configure Tool - built with the JRCP_V1 SMCOM layer - runs on a Linux PC and connects to the JRCP_v1 server running on the embedded platform (with IP address 192.168.1.100).

```
user@dell-linux:~/s$ ./A71CHConfigTool 192.168.2.81:8050 interactive
a71chConfig (Rev 1.20) .. connect to A71CH. Chunksize at link layer = 256.
PlugAndTrust_HostLib_v02.12.00_20191210
Applet Version : 0x131X
SecureBox Version: 0x0X

=====SELECT-DONE=====
HostLib Version : 0x020C
Applet-Rev:SecureBox-Rev : 0x0131:0x0000
>>> info device
A71CH in Debug Mode Version (SCP03 is not set up)
selectResponse: 0x0131
transportLockState: 0x03 (Transport Lock NOT YET set)
injectLockState: 0x02 (Unlocked)
gpStorageSize: 4096
uid (LEN=18):
```

(continues on next page)

(continued from previous page)

```
47:90:70:02:47:91:12:10:80:04:00:88:04:98:90:53:48:12
certUid (LEN=10):
70:02:80:04:00:88:04:98:90:53
```

11.10 Using own Platform SCP03 Keys

The Plug & Trust MW can use PlatformSCP03 keys from file system. The key files for different platforms are defined as:

For Android

```
#define EX_SSS SCP03 FILE DIR "/data/vendor/SE05x/"
#define EX_SSS SCP03 FILE PATH EX_SSS SCP03 FILE DIR "plain_scp.txt"
```

For Linux

```
#define EX_SSS SCP03 FILE DIR "/tmp/SE05X/"
#define EX_SSS SCP03 FILE PATH EX_SSS SCP03 FILE DIR "plain_scp.txt"
```

For Windows

```
#define EX_SSS SCP03 FILE DIR "C:\\nxp\\SE05X\\"
#define EX_SSS SCP03 FILE PATH EX_SSS SCP03 FILE DIR "plain_scp.txt"
```

You need to create a file at this location to allow the MW to pick up the file automatically. Another option is to set the environment variable EX_SSS_BOOT_SCPO3_PATH to the complete file path.

The MW will first look for the file at the above path, if it is not able to find the file, it will try to use the environment variable, and lastly, it will fall back to pre-compiled keys.

Note: For Android systems, it is important to update sepolicy to allow access to Platform SCP03 keys directory. Refer to AOSP setup [Section 11.5.6 AOSP build Environment for Hikey960](#) for details on required system patches.

It is advisable to create a file at this location to allow MW to use those keys instead of pre-compiled keys as the user can also rotate the keys in which case if the MW was using pre-compiled keys, all further operations will fail.

An example of file format is:

```
# This is a comment, empty lines and comment lines allowed.
ENC 35C29245895EA34F6136155F8209D6CD # Trailing comment
MAC AF172D5D54F7C0D5C10A05B9F1207F78 # Optional trailing comment
DEK A2BC8438BF77015B361A4425F239FA29 # Optional trailing comment
```

Replace the ENC, MAC and DEK keys with your own keys.

For information on rotating Platform SCP03 keys, refer to [Section 5.7.6 SE05X Rotate PlatformSCP Keys Demo](#)

11.11 Write APDU to buffer

See Section 5.7.19 *Write APDU to buffer*.

11.12 Plug & Trust MW APIs

11.12.1 Class Hierarchy

- *Struct iot_agent_keystore_interface_t*
- *Struct iot_agent_keystore_t*
- *Struct multicast_package_t*
- *Struct NXECKey03_StaticCtx_t*
- *Struct NXSCP03_AuthCtx_t*
- *Struct NXSCP03_DynCtx_t*
- *Struct NXSCP03_StaticCtx_t*
- *Struct SE05x_Applet_Feature_Disable_t*
- *Struct SE05x_Applet_Feature_t*
- *Struct SE05x_AuthCtx_ECKey_t*
- *Struct SE05x_AuthCtx_ID_t*
- *Struct SE05x_I2CM_cmd_t*
- *Struct SE05x_I2CM_configData_t*
- *Struct SE05x_I2CM_readData_t*
- *Struct SE05x_I2CM_securityData_t*
- *Struct SE05x_I2CM_structuralIssue_t*
- *Struct SE05x_I2CM_writeData_t*
- *Struct SE_AuthCtx_t*
- *Struct SE_Connect_Ctx_t*
- *Struct sems_lite_available_mem_t*
- *Struct sems_lite_SEAppInfoList_t*
- *Struct service_link_t*
- *Struct SM_SECURE_SCPO3_KEYOBJ*
- *Struct sss_aead_t*
- *Struct sss_asymmetric_t*
- *Struct sss_connect_ctx_t*
- *Struct sss_derive_key_t*
- *Struct sss_digest_t*
- *Struct sss_ecc_point_t*

- *Struct sss_eccgfp_group_t*
- *Struct sss_key_store_t*
- *Struct sss_mac_t*
- *Struct sss_object_t*
- *Struct sss_policy_asym_key_u*
- *Struct sss_policy_common_pcr_value_u*
- *Struct sss_policy_common_u*
- *Struct sss_policy_counter_u*
- *Struct sss_policy_file_u*
- *Struct sss_policy_pcr_u*
- *Struct sss_policy_session_u*
- *Struct sss_policy_sym_key_u*
- *Struct sss_policy_t*
- *Struct sss_policy_u*
- *Struct sss_policy_userid_u*
- *Struct sss_rng_context_t*
- *Struct sss_se05x_aead_t*
- *Struct sss_se05x_asymmetric_t*
- *Struct sss_se05x_attst_comp_data_t*
- *Struct sss_se05x_attst_data_t*
- *Struct sss_se05x_derive_key_t*
- *Struct sss_se05x_digest_t*
- *Struct sss_se05x_key_store_t*
- *Struct sss_se05x_mac_t*
- *Struct sss_se05x_object_t*
- *Struct sss_se05x_rng_context_t*
- *Struct sss_se05x_session_t*
- *Struct sss_se05x_symmetric_t*
- *Struct sss_se05x_tunnel_context_t*
- *Struct sss_session_t*
- *Struct sss_symmetric_t*
- *Struct sss_tunnel_t*
- *Struct sub_component_metaData_t*
- *Struct tlvHeader_t*
- *Enum SE05x_AeadAlgo_t*
- *Enum SE05x_AppletConfig_t*

- *Enum SE05x_AppletResID_t*
- *Enum SE05x_AttestationAlgo_t*
- *Enum SE05x_AttestationType_t*
- *Enum SE05x_Cipher_Oper_OneShot_t*
- *Enum SE05x_Cipher_Oper_t*
- *Enum SE05x_CipherMode_t*
- *Enum SE05x_CryptoContext_t*
- *Enum SE05x_CryptoObject_t*
- *Enum SE05x_DigestMode_t*
- *Enum SE05x_ECCurve_t*
- *Enum SE05x_ECCurveParam_t*
- *Enum SE05x_ECDAASignatureAlgo_t*
- *Enum SE05x_ECSignatureAlgo_t*
- *Enum SE05x_EDSignatureAlgo_t*
- *Enum SE05x_HealthCheckMode_t*
- *Enum SE05x_HkdfMode_t*
- *Enum SE05x_I2CM_Baud_Rate_t*
- *Enum SE05x_I2CM_securityReq_t*
- *Enum SE05x_I2CM_status_t*
- *Enum SE05x_I2CM_TAG_t*
- *Enum SE05x_I2CM_TLV_type_t*
- *Enum SE05x_INS_t*
- *Enum SE05x_KeyPart_t*
- *Enum SE05x_LockIndicator_t*
- *Enum SE05x_LockState_t*
- *Enum SE05x_Mac_Oper_t*
- *Enum SE05x_MACAlgo_t*
- *Enum SE05x_MemoryType_t*
- *Enum SE05x_MemTyp_t*
- *Enum SE05x_MoreIndicator_t*
- *Enum SE05x-Origin_t*
- *Enum SE05x_P1_t*
- *Enum SE05x_P2_t*
- *Enum SE05x_PlatformSCPRequest_t*
- *Enum SE05x_RestrictMode_t*
- *Enum SE05x_Result_t*

- *Enum SE05x_RSABitLength_t*
- *Enum SE05x_RSAEncryptionAlgo_t*
- *Enum SE05x_RSAResult_t*
- *Enum SE05x_RSAResultCode_t*
- *Enum SE05x_RSAResultType_t*
- *Enum SE05x_RSAPubKeyComp_t*
- *Enum SE05x_RSASignAlgo_t*
- *Enum SE05x_RSASignatureAlgo_t*
- *Enum SE05x_SecObjTyp_t*
- *Enum SE05x_SetIndicator_t*
- *Enum SE05x_SW12_t*
- *Enum SE05x_SymmKeyType_t*
- *Enum SE05x_TAG_t*
- *Enum SE05x_TLSPerformPRFType_t*
- *Enum SE05x_TransientIndicator_t*
- *Enum SE05x_TransientType_t*
- *Enum SE_AuthType_t*
- *Enum sems_lite_recovery_status_t*
- *Enum sems_lite_status_t*
- *Enum sems_lite_tearDown_status_t*
- *Enum sems_lite_upgradeProgress_status_t*
- *Enum sems_lite_version_check_result_t*
- *Enum sss_access_permission_t*
- *Enum sss_algorithm_t*
- *Enum sss_cipher_type_t*
- *Enum sss_connection_type_t*
- *Enum sss_key_object_mode_t*
- *Enum sss_key_part_t*
- *Enum sss_key_store_prop_au8_t*
- *Enum sss_mode_t*
- *Enum sss_policy_type_u*
- *Enum sss_s05x_sesion_prop_au8_t*
- *Enum sss_s05x_sesion_prop_u32_t*
- *Enum sss_session_prop_au8_t*
- *Enum sss_session_prop_u32_t*
- *Enum sss_status_t*
- *Enum sss_tunnel_dest_t*

- *Enum sss_type_t*
- *Union SE05x_CryptoModeSubType_t*
- *Union SE05x_I2CM_INS_type_t*

11.12.2 File Hierarchy

- **dir_doc**
 - **dir_doc_input**
 - file_doc_input_modules.h
 - file_doc_input_sss_object.h
- **dir_hostlib**
 - **dir_hostlib_hostLib**
 - **dir_hostlib_hostLib_inc**
 - file_hostlib_hostLib_inc_nxEnsure.h
 - file_hostlib_hostLib_inc_nxScp03_Types.h
 - file_hostlib_hostLib_inc_se05x_enums.h
 - **dir_hostlib_hostLib_se05x_03_xx_xx**
 - file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU.h
 - file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h
- **dir_nxp_iot_agent**
 - **dir_nxp_iot_agent_inc**
 - file_nxp_iot_agent_inc_nxp_iot_agent.h
 - file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h
 - file_nxp_iot_agent_inc_nxp_iot_agent_service.h
 - file_nxp_iot_agent_inc_nxp_iot_agent_session.h
 - file_nxp_iot_agent_inc_nxp_iot_agent_utils.h
- **dir_semslite**
 - **dir_semslite_lib**
 - **dir_semslite_lib_inc**
 - file_semslite_lib_inc_sems_lite_agent_common.h
 - file_semslite_lib_inc_sems_lite_api.h
 - file_semslite_lib_inc_sems_lite_api_ver.h
- **dir_sss**
 - **dir_sss_doc**
 - file_sss_doc_modules.h
 - **dir_sss_ex**
 - **dir_sss_ex_inc**

- file_sss_ex_inc_ex_sss_main_inc.h
- **dir_sss_inc**
 - file_sss_inc_fsl_sss_api.h
 - file_sss_inc_fsl_sss_policy.h
 - file_sss_inc_fsl_sss_se05x_apis.h
 - file_sss_inc_fsl_sss_se05x_types.h
- **dir_sss_plugin**
 - **dir_sss_plugin_mbedtls**
 - file_sss_plugin_mbedtls_sss_mbedtls.h

11.12.3 Full API

Classes and Structs

Struct iot_agent_keystore_interface_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Struct Documentation

struct iot_agent_keystore_interface_t

The interface any keystore needs to implement.

Public Members

iot_agent_keystore_session_closer_t close_session
iot_agent_keystore_destroyer_t destroy
iot_agent_endpoint_interface_t endpoint_interface
iot_agent_keystore_session_opener_t open_session

Struct iot_agent_keystore_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Struct Documentation

struct iot_agent_keystore_t

A structure binding a keystore interface and a keystore context to a keystore instance.

Public Members

```
void *context
uint32_t identifier
iot_agent_keystore_interface_t iface
sss_key_store_t *sss_context
uint32_t type
```

Struct multicast_package_t

- Defined in file_semslite_lib_inc_sems_lite_api.h

Struct Documentation

struct multicast_package_t

Public Members

```
size_t multicastCommandsLen
size_t multicastPackageNameLen
uint8_t multicastPackageVersion[2]
const uint8_t *pMulticastCommands
const char *pMulticastPackageName
const uint8_t *pSignatureOverCommands
const sub_component_metaData_t *pSubComponentMetaData
uint32_t requiredFreeBytesNonVolatileMemory
uint32_t requiredFreeBytesTransientMemory
uint32_t semsLiteAPIVersion
size_t signatureOverCommandsLen
uint8_t target12Nc[6]
uint8_t targetEntityID[16]
```

Struct NXECKey03_StaticCtx_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

```
struct NXECKey03_StaticCtx_t
    Static part of keys for FAST SCP
```

Public Members

sss_object_t **HostEcDSAObj**
Host ECDSA Private key

sss_object_t **HostEcKeypair**
Host ephemeral ECC key pair

sss_object_t **masterSec**
Host master Secret

sss_object_t **SeEcPubKey**
SE ECC public key

Struct NXSCP03_AuthCtx_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

```
struct NXSCP03_AuthCtx_t
    Static and Dynamic Context in one Context.
```

Depending on system, these objects may point to keys inside other security system.

Public Members

NXSCP03_DynCtx_t ***pDyn_ctx**
session keys data

NXSCP03_StaticCtx_t ***pStatic_ctx**
.static keys data

Struct NXSCP03_DynCtx_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

```
struct NXSCP03_DynCtx_t
    Dynamic SCP03 Context.
```

This structure is filled **after** establishing an SCP03 session.

Public Members

<i>SE_AuthType_t</i> authType	Handle different types of auth.. PlatformSCP / AppletSCP
<i>uint8_t</i> cCounter [16]	command counter
<i>sss_object_t</i> Enc	session channel encryption key
<i>sss_object_t</i> Mac	session command authentication key
<i>uint8_t</i> MCV [16]	MAC chaining value.
<i>sss_object_t</i> Rmac	session response authentication key
<i>uint8_t</i> SecurityLevel	security level set

Struct NXSCP03_StaticCtx_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

```
struct NXSCP03_StaticCtx_t
    Static SCP03 Context.
```

This structure is filled **before** establishing an SCP03 session.

Depending on system, these objects may point to keys inside other security system.

Public Members

sss_object_t **Dek**
data encryption key obj

sss_object_t **Enc**
Encryption key object

uint8_t keyVerNo
Key version no to use for channel authentication in SCP03

sss_object_t **Mac**
static secure channel authentication key obj

Struct SE05x_Applet_Feature_Disable_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

struct SE05x_Applet_Feature_Disable_t
Used to disable Applet Features via `sss_se05x_set_feature`

Public Members

uint8_t EXTCFG_FORBID_AES_GCM
Disable feature AES_GCM B8b8

uint8_t EXTCFG_FORBID_AES_GCM_EXT_IV
Disable feature AES_GCM_EXT_IV B8b7

uint8_t EXTCFG_FORBID_ECDAA
Disable feature ECDAA B2b7

uint8_t EXTCFG_FORBID_ECDH
Disable feature ECDH B2b8

uint8_t EXTCFG_FORBID_HKDF_EXTRACT
Disable feature HKDF_EXTRACT B10b7

uint8_t EXTCFG_FORBID_RSA_LT_2K
Disable feature RSA_LT_2K B6b8

uint8_t EXTCFG_FORBID_RSA_SHA1
Disable feature RSA_SHA1 B6b7

Struct SE05x_Applet_Feature_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

struct SE05x_Applet_Feature_t

Used to enable Applet Features via sss_se05x_set_feature

Public Members

uint8_t **AppletConfig_AES**

Writing AESKey objects

uint8_t **AppletConfig_DES**

Writing DESKey objects

uint8_t **AppletConfig_DH_MONT**

Use of curve RESERVED_ID_ECC_MONT_DH_25519

uint8_t **AppletConfig_ECDAA**

Use of curve TPM_ECC_BN_P256

uint8_t **AppletConfig_ECDSA_ECDH_ECDHE**

EC DSA and DH support

uint8_t **AppletConfig_EDDSA**

Use of curve RESERVED_ID_ECC_ED_25519

uint8_t **AppletConfig_HMAC**

Writing HMACKey objects

uint8_t **AppletConfig_I2CM**

I2C Master support (see 4.17) in APDU Spec

uint8_t **AppletConfig_MIFARE**

Mifare DESFire support (see 4.15) in APDU Spec

uint8_t **AppletConfig_PBKDF**

PBKDF2

uint8_t **AppletConfig_RFU1**

Allocated value undefined and reserved for future use

uint8_t **AppletConfig_RFU21**

RFU

uint8_t **AppletConfig_RSA_CRT**

Writing RSAKey objects

uint8_t **AppletConfig_RSA_PLAIN**

Writing RSAKey objects

uint8_t **AppletConfig_TLS**

TLS Handshake support commands (see 4.16) in APDU Spec

Struct SE05x_AuthCtx_ECKey_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

struct SE05x_AuthCtx_ECKey_t

Keys to connect for a ECKey Connection

Public Members

NXSCP03_DynCtx_t ***pDyn_ctx**

The Dynamic part of the ECKey Authentication

We derive/compute the session keys based on the pStatic_ctx.

NXECKey03_StaticCtx_t ***pStatic_ctx**

The Input/Static part of the ECKey Authentication

We start/initiate a session with the keys here.

Struct SE05x_AuthCtx_ID_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

struct SE05x_AuthCtx_ID_t

UserID / PIN baed authentication object

This is required to open an UserID / PIN based session to the SE.

Public Members

sss_object_t ***pObj**

The corresponding authentication object on the Host

Struct SE05x_I2CM_cmd_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

struct SE05x_I2CM_cmd_t

Individual entry in array of TLV commands, with type

Se05x_i2c_master_txn would expect an array of these.

Public Members

SE05x_I2CM_INS_type_t cmd

Individual entry in array of TLV commands.

SE05x_I2CM_TLV_type_t type

Struct SE05x_I2CM_configData_t

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Struct Documentation

struct SE05x_I2CM_configData_t

Data Configuration for I2CM

Public Members

uint8_t I2C_addr

7 Bit address of I2C slave

SE05x_I2CM_Baud_Rate_t I2C_baudRate

What baud rate

SE05x_I2CM_status_t status

return status of the config operation

Struct SE05x_I2CM_readData_t

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Struct Documentation

struct SE05x_I2CM_readData_t

Read to I2CM from I2C Slave

Public Members

`uint8_t *rdBuf`

Output. rdBuf will point to Host buffer.

`SE05x_I2CM_status_t rdStatus`

[Out] status of the operation

`uint16_t readLength`

How many bytes to read

Struct SE05x_I2CM_securityData_t

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Struct Documentation

`struct SE05x_I2CM_securityData_t`

Security Configuration for I2CM.

Public Members

`uint32_t keyObject`

object used for the operation

`SE05x_I2CM_securityReq_t operation`

Additional operation on data read by I2C

Struct SE05x_I2CM_structuralIssue_t

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Struct Documentation

`struct SE05x_I2CM_structuralIssue_t`

Used to report error response, not for outgoing command

Public Members

`SE05x_I2CM_status_t issueStatus`

[Out] In case there is any structural issue

Struct SE05x_I2CM_writeData_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

```
struct SE05x_I2CM_writeData_t
```

Write From I2CM to I2C Slave.

Public Members

uint8_t *writebuf
Buffer to be written

uint8_t writeLength
How many bytes to write

SE05x_I2CM_status_t wrStatus
[Out] status of the operation

Struct SE_AuthCtx_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

```
struct SE_AuthCtx_t
```

Authentication mechanims

Public Members

SM_SECURE_SCPO3_KEYOBJ a71chAuthKeys
Legacy, only for A71CH with Host Crypto

SE_AuthType_t authType
How exactly we are going to authenticat ot the system.

Since ctx is a union, this is needed to know exactly how we are going to authenticate.

union SE_AuthCtx_t::[anonymous] ctx
Depending on authType, the input and output parameters.

This has both input and output parameters.

Input is for Keys that are used to initiate the connection. While connecting, session keys/parameters are generated and they are also part of this context.

In any case, we connect to only one type

uint8_t data[SSS_AUTH_MAX_CONTEXT_SIZE]

SE05x_AuthCtx_ECKey_t eckey
For ECKey

struct SE_AuthCtx_t::[anonymous]::[anonymous] extension
Reserved memory for implementation specific extension

SE05x_AuthCtx_ID_t idobj
For UserID/PIN based based Authentication

NXSCP03_AuthCtx_t scp03
For PlatformSCP / Applet SCP.
Same SCP context will be used for platform and applet scp03

Struct SE_Connect_Ctx_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

struct SE_Connect_Ctx_t
When connecting to a secure element,
Extension of [sss_connect_ctx_t](#)

Public Members

SE_AuthCtx_t auth
If we need to authenticate, add required objects for authentication

SSS_Conn_Type_t connType
How exactly are we going to connect physically

U32 i2cAddress
12C address on embedded devices.

const char *portName
Connection port name for Socket names, etc.

uint8_t refresh_session
If we need to refresh session, SE050 specific

sss_policy_session_u *session_policy
If some policy restrictions apply when we connect, point it here

uint16_t sizeOfStucture
to support binary compatibility/check, sizeOfStucture helps

uint8_t skip_select_applet
In the case of Key Rotation, and other use cases where we do not select the IoT Applet and skip the selection of the IoT Applet.
One of the use cases is to do platform SCP key rotation.
When set to 0: Do not skip IoT Applet selection and run as-is.
When set to 1: Skip selection of card manager. Skip selection of Applet.
Internally, if there is platform SCP selected as Auth mechanism during compile time, the internal logic would Select the card manager. But, skip selection of the Applet.

`sss_tunnel_t`***tunnelCtx**
If we connect logically, via some software layer

Struct `sems_lite_available_mem_t`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Struct Documentation

`struct sems_lite_available_mem_t`

Public Members

```
uint32_t availableCODMemory
uint32_t availableCORMemory
uint32_t availableIDX
uint32_t availablePersistentMemory
uint32_t freePHeapCentralGap
uint32_t freeTransient
```

Struct `sems_lite_SEAppInfoList_t`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Struct Documentation

`struct sems_lite_SEAppInfoList_t`

Information of about Applet/Package

See Table 11-36: GlobalPlatform Registry Data (TLV), GPCardSpc_v2.2.pdf

The response from Applet is put to rspBuf

After parsing that response, the pointers to respective members is set and it points to relevant part in rspBuf, this way saving memory. However, the Length is updated so that application use this information.

Public Members

```
uint8_t AIDLen
Length of the Applet ID
uint8_t LifeCycleState
Life-cycle state
uint8_t LoadFileAIDLen
Length of LoadFileAID.
uint8_t LoadFileVersionNumberLen
Length of pLoadFileVersionNumber.
```

```
uint8_t *pAID
Applet ID

uint8_t *pLoadFileAID
Application's Executable Load File AID.

uint8_t *pLoadFileVersionNumber
Executable Load File Version Number.

uint8_t *pPriviledges
Privileges.

uint8_t PriviledgesLen
Length of Privileges

uint8_t *pSecurityDomainAID
Associated Security Domain's AID.

uint8_t rspBuf[(256 + 5)]
Response from Applet.

size_t rspBufLen
Length of response from Applet.

uint8_t SecurityDomainAIDLen
Length of SecurityDomainAID.
```

Struct service_link_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Struct Documentation

struct service_link_t

Public Members

```
const iot_agent_datastore_t *datastore
const iot_agent_keystore_t *keystore
size_t offset
```

Struct SM_SECURE_SCPO3_KEYOBJ

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

struct SM_SECURE_SCP03_KEYOBJ
Legacy, only for A71CH with Host Crypto

Public Members

sss_object_t **pKeyDek**
SSS AES Dek Key object.

sss_object_t **pKeyEnc**
SSS AES Enc Key object.

sss_object_t **pKeyMac**
SSS AES Mac Key object.

Struct sss_aead_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

struct sss_aead_t
Authenticated Encryption with Additional Data.

Public Members

sss_algorithm_t **algorithm**
TODO : Algorithm to be applied

uint8_t **data**[(0 + (5 * sizeof(void *)) + (6 * sizeof(int)) + (5 * sizeof(void *)) + 16)]

struct sss_aead_t::[anonymous] extension
Reserved memory for implementation specific extension

sss_object_t ***keyObject**
Key to be used for asymmetric

sss_mode_t **mode**
TODO : High level operation

sss_session_t ***session**
Virtual connection between application (user context) and specific security subsystem and function thereof.

Struct sss_asymmetric_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

struct sss_asymmetric_t

Asymmetric Cryptographic operations.

e.g. RSA/ECC.

Public Members

sss_algorithm_t **algorithm**

Algorithm to be applied, e.g. ECDSA

uint8_t **data**[(0 + (2 * sizeof(void *)) + (3 * sizeof(int)) + (2 * sizeof(void *)) + 16)]

struct sss_asymmetric_t::[anonymous] extension

Reserved memory for implementation specific extension

sss_object_t ***keyObject**

KeyObject used for Asymmetric operation

sss_mode_t **mode**

Mode of operation for the Asymmetric operation. e.g. Sign/Verify/Encrypt/Decrypt

sss_session_t ***session**

Pointer to root session

Struct sss_connect_ctx_t

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Struct Documentation

struct sss_connect_ctx_t

Wrapper strucutre *sss_connect_ctx_t*

Public Members

SE_AuthCtx_t **auth**

If we need to authenticate, add required objects for authentication

uint8_t **data**[**SSS_CONNECT_MAX_CONTEXT_SIZE**]

struct sss_connect_ctx_t::[anonymous] extension

Reserved memory for implementation specific extension

sss_policy_session_u ***session_policy**

If some policy restrictions apply when we connect, point it here

uint16_t **sizeOfStructure**

To support binary compatibility/check, sizeOfStructure helps

Struct sss_derive_key_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation**struct sss_derive_key_t**

Key derivation

Public Members***sss_algorithm_t algorithm***

Algorithm to be applied, e.g. ...

uint8_t **data**[(0 + (2 * sizeof(void *)) + (2 * sizeof(int)) + (2 * sizeof(void *)) + 16)]**struct sss_derive_key_t::[anonymous] extension**

Reserved memory for implementation specific extension

sss_object_t *keyObject

KeyObject used to derive key s

sss_mode_t mode

Mode of operation for e.g.

sss_session_t *session

Pointer to the session

Struct sss_digest_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation**struct sss_digest_t**

Message Digest operations

Public Members***sss_algorithm_t algorithm***

Algorithm to be applied, e.g SHA1, SHA256

uint8_t **data**[(0 + (1 * sizeof(void *)) + (3 * sizeof(int)) + (2 * sizeof(void *)) + 16)]***size_t digestFullLen***

Full digest length per algorithm definition. This field is initialized along with algorithm.

struct sss_digest_t::[anonymous] extension

Reserved memory for implementation specific extension

sss_mode_t mode

Mode of operation, e.g Sign/Verify

`sss_session_t *session`

Virtual connection between application (user context) and specific security subsystem and function thereof.

Struct `sss_ecc_point_t`

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

`struct sss_ecc_point_t`

XY Co-ordinates for ECC Curves

Public Members

`uint8_t *x`
X Point

`uint8_t *y`
Y Point

Struct `ssscgfp_group_t`

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

`struct sss_eccgfp_group_t`

ECC Curve Parameter

Public Members

`uint8_t *a`
ECC parameter a

`uint8_t *b`
ECC parameter b

`sss_ecc_point_t *G`
ECC parameter G

`uint8_t *h`
ECC parameter h

`uint8_t *n`
ECC parameter n

`uint8_t *p`
ECC parameter P

Struct sss_key_store_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

struct sss_key_store_t

Store for secure and non secure key objects within a cryptographic system.

- A cryptographic system may have more than partitions to store such keys.

Public Members

uint8_t data[(0 + (1 * sizeof(void *)) + (4 * sizeof(void *)) + 16)]**struct sss_key_store_t::[anonymous] extension**

Reserved memory for implementation specific extension

sss_session_t *session

Virtual connection between application (user context) and specific security subsystem and function thereof.

Struct sss_mac_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

struct sss_mac_t

Message Authentication Code.

Public Members

sss_algorithm_t algorithm

Algorithm to be applied, e.g. MAC/CMAC

uint8_t data[(0 + (2 * sizeof(void *)) + (2 * sizeof(int)) + (2 * sizeof(void *)) + 32)]**struct sss_mac_t::[anonymous] extension**

Reserved memory for implementation specific extension

sss_object_t *keyObject

Key to be used for ...

sss_mode_t mode

Mode of operation for MAC e.g. ...

sss_session_t *session

Virtual connection between application (user context) and specific security subsystem and function thereof.

Struct sss_object_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

struct sss_object_t

An object (secure / non-secure) within a Key Store.

Public Members

uint32_t cipherType

cipherType type from [sss_cipher_type_t](#)

uint8_t data[(0 + (1 * sizeof(void *)) + (2 * sizeof(int)) + (4 * sizeof(void *)) + 16)]

struct sss_object_t::[anonymous] extension

Reserved memory for implementation specific extension

uint32_t keyId

Application specific key identifier. The keyId is kept in the key store along with the key data and other properties.

sss_key_store_t *keyStore

key store holding the data and other properties

uint32_t objectType

The type/part of object is referenced from [sss_key_part_t](#)

Struct sss_policy_asym_key_u

- Defined in file_sss_inc_fsl_sss_policy.h

Struct Documentation

struct sss_policy_asym_key_u

Policies applicable to Asymmetric KEY

Public Members

uint8_t can_Attest

Allow to attest an object

uint8_t can_Decrypt

Allow decryption

uint8_t can_Encrypt

Allow encryption

uint8_t can_Gen

Allow to (re)generate the object

uint8_t can_Import_Export

Allow to imported or exported

```
uint8_t can_KA
      Allow key agreement

uint8_t can_KD
      Allow key derivation

uint8_t can_Read
      Allow to read the object

uint8_t can_Sign
      Allow signature generation

uint8_t can_Verify
      Allow signature verification

uint8_t can_Wrap
      Allow key wrapping

uint8_t can_Write
      Allow to write the object

uint8_t forbid_Derived_Output
      Forbid derived output
```

Struct sss_policy_common_pcr_value_u

- Defined in file_ss_inc_fsl_ss_policy.h

Struct Documentation

```
struct sss_policy_common_pcr_value_u
Common PCR Value Policies for all object types
```

Public Members

```
uint8_t pcrExpectedValue[32]
      Expected value of the PCR

uint32_t pcrObjId
      PCR object ID
```

Struct sss_policy_common_u

- Defined in file_ss_inc_fsl_ss_policy.h

Struct Documentation

struct sss_policy_common_u

Common Policies for all object types

Public Members

uint8_t can_Delete

Allow to delete the object

uint8_t forbid_All

Forbid all operations

uint8_t req_Sm

Require having secure messaging enabled with encryption and integrity on the command

Struct sss_policy_counter_u

- Defined in file_ss_inc_fsl_sss_policy.h

Struct Documentation

struct sss_policy_counter_u

All policies related to secure object type Counter

Public Members

uint8_t can_Read

Allow to read the object

uint8_t can_Write

Allow to write the object

Struct sss_policy_file_u

- Defined in file_ss_inc_fsl_sss_policy.h

Struct Documentation

struct sss_policy_file_u

All policies related to secure object type File

Public Members

```
uint8_t can_Read
      Allow to read the object

uint8_t can_Write
      Allow to write the object
```

Struct sss_policy_pcr_u

- Defined in file_sss_inc_fsl_sss_policy.h

Struct Documentation

```
struct sss_policy_pcr_u
All policies related to secure object type PCR
```

Public Members

```
uint8_t can_Read
      Allow to read the object

uint8_t can_Write
      Allow to write the object
```

Struct sss_policy_session_u

- Defined in file_sss_inc_fsl_sss_policy.h

Struct Documentation

```
struct sss_policy_session_u
Policy applicable to a session
```

Public Members

```
uint8_t allowRefresh
      Whether this session can be refreshed without losing context. And also reset maxDurationOfSession_sec
      / maxOperationsInSession

uint8_t has_MaxDurationOfSession_sec
      Whether maxOperationsInSession is set. This is to ensure '0 == maxDurationOfSession_sec' does not get
      set by middleware.

uint8_t has_MaxOperationsInSession
      Whether maxOperationsInSession is set. This is to ensure '0 == maxOperationsInSession' does not get set
      by middleware.

uint16_t maxDurationOfSession_sec
      Session can be used for this much time, in seconds
```

uint16_t maxOperationsInSession
Number of operations permitted in a session

Struct sss_policy_sym_key_u

- Defined in file_sss_inc_fsl_sss_policy.h

Struct Documentation

struct sss_policy_sym_key_u
Policies applicable to Symmetric KEY

Public Members

uint8_t **allow_kdf_ext_rnd**
Allow kdf(prf) external random

uint8_t **can_Decrypt**
Allow decryption

uint8_t **can_Desfire_Auth**
Allow to perform DESFire authentication

uint8_t **can_Desfire_Dump**
Allow to dump DESFire session keys

uint8_t **can_Encrypt**
Allow encryption

uint8_t **can_Gen**
Allow to (re)generate the object

uint8_t **can_Import_Export**
Allow to imported or exported

uint8_t **can_KD**
Allow key derivation

uint8_t **can_Sign**
Allow signature generation

uint8_t **can_Verify**
Allow signature verification

uint8_t **can_Wrap**
Allow key wrapping

uint8_t **can_Write**
Allow to write the object

uint8_t **forbid_Derived_Output**
Forbid derived output

Struct sss_policy_t

- Defined in file_sss_inc_fsl_sss_policy.h

Struct Documentation

```
struct sss_policy_t
An array of policies sss_policy_u
```

Public Members

size_t nPolicies
Number of policies

const sss_policy_u *policies[(10)]
Array of unique policies, this needs to be allocated based nPolicies

Struct sss_policy_u

- Defined in file_sss_inc_fsl_sss_policy.h

Struct Documentation

```
struct sss_policy_u
Unique/individual policy. For any operation, you need array of sss_policy_u.
```

Public Members

sss_policy_asym_key_u asymkey

uint32_t auth_obj_id
Auth ID for each Object Policy, invalid for session policy type == KPolicy_Session

sss_policy_common_u common

sss_policy_common_pcr_value_u common_pcr_value

sss_policy_counter_u counter

sss_policy_file_u file

sss_policy_pcr_u pcr

sss_policy_userid_u pin

union sss_policy_u::[anonymous] policy

Union of applicable policies based on the type of object

sss_policy_session_u session

sss_policy_sym_key_u symmkey

sss_policy_type_u type

Secure Object Type

Struct `sss_policy_userid_u`

- Defined in file_ss_inc_fsl_sss_policy.h

Struct Documentation

`struct sss_policy_userid_u`

All policies related to secure object type UserID

Public Members

`uint8_t can_Write`

Allow to write the object

Struct `sss_rng_context_t`

- Defined in file_ss_inc_fsl_sss_api.h

Struct Documentation

`struct sss_rng_context_t`

Random number generator context

Public Members

`struct sss_rng_context_t::[anonymous] context`

Reserved memory for implementation specific extension

`uint8_t data[(0 + (1 * sizeof(void *)) + (2 * sizeof(void *)) + 16)]`

`sss_session_t *session`

Pointer to the session

Struct `sss_se05x_aead_t`

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Struct Documentation

`struct sss_se05x_aead_t`

Authenticated Encryption with Additional Data.

Public Members

`sss_algorithm_t algorithm`

TODO : Algorithm to be applied

`uint8_t cache_data[16]`

Cache in case of un-aligned inputs

`size_t cache_data_len`

How much we have cached

`SE05x_CryptoObjectID_t cryptoObjectID`

Implementation specific part

`sss_se05x_object_t *keyObject`

Key to be used for asymmetric

`sss_mode_t mode`

TODO : High level operation

`sss_se05x_session_t *session`

Virtual connection between application (user context) and specific security subsystem and function thereof.

Struct `sss_se05x_asymmetric_t`

- Defined in file `_sss_inc_fsl_sss_se05x_types.h`

Struct Documentation

`struct sss_se05x_asymmetric_t`

Asymmetric Cryptographic operations.

e.g. RSA/ECC.

Public Members

`sss_algorithm_t algorithm`

Algorithm to be applied, e.g. ECDSA

`sss_se05x_object_t *keyObject`

KeyObject used for Asymmetric operation

`sss_mode_t mode`

Mode of operation for the Asymmetric operation. e.g. Sign/Verify/Encrypt/Decrypt

`sss_se05x_session_t *session`

Pointer to root session

Struct `sss_se05x_attst_comp_data_t`

- Defined in file `sss_inc_fsl_sss_se05x_types.h`

Struct Documentation

```
struct sss_se05x_attst_comp_data_t
    Attestation data
```

Public Members

```
uint8_t attribute[MAX_POLICY_BUFFER_SIZE + 15]
    Attributes

size_t attributeLen
    Length of Attribute

uint8_t chipId[SE050_MODULE_UNIQUE_ID_LEN]
    Unique ID of SE050

size_t chipIdLen
    Length of the Unique ID

uint8_t outrandom[16]
    Random used during attestation

size_t outrandomLen
    length of outrandom

uint8_t signature[512]
    Signature for attestation

size_t signatureLen
    Length of signature

SE05x_TimeStamp_t timeStamp
    time stamp

size_t timeStampLen
    Length of timeStamp
```

Struct `sss_se05x_attst_data_t`

- Defined in file `sss_inc_fsl_sss_se05x_types.h`

Struct Documentation

```
struct sss_se05x_attst_data_t
    Data to be read with attestation
```

Public Members

sss_se05x_attst_comp_data_t **data[SE05X_MAX_ATTST_DATA]**

While reading RSA Objects, modulus and public exponent get attested separately,

uint8_t valid_number

How many entries to attest

Struct sss_se05x_derive_key_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

```
struct sss_se05x_derive_key_t
    Key derivation
```

Public Members

sss_algorithm_t **algorithm**

Algorithm to be applied, e.g. ...

sss_se05x_object_t ***keyObject**

KeyObject used to derive key s

sss_mode_t **mode**

Mode of operation for e.g. ...

sss_se05x_session_t ***session**

Pointer to the session

Struct sss_se05x_digest_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

```
struct sss_se05x_digest_t
```

Message Digest operations

Public Members

`sss_algorithm_t algorithm`

Algorithm to be applied, e.g SHA1, SHA256

`SE05x_CryptoObjectID_t cryptoObjectID`

Implementation specific part

`size_t digestFullLen`

Full digest length per algorithm definition. This field is initialized along with algorithm.

`sss_mode_t mode`

Mode of operation, e.g Sign/Verify

`sss_se05x_session_t *session`

Virtual connection between application (user context) and specific security subsystem and function thereof.

Struct `sss_se05x_key_store_t`

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

`struct sss_se05x_key_store_t`

Store for secure and non secure key objects within a cryptographic system.

- A cryptographic system may have more than partitions to store such keys.

Public Members

`struct _sss_se05x_object *kekKey`

In case the we are using Key Wrapping while injecting the keys, pointer to key used for wrapping

`sss_se05x_session_t *session`

Pointer to the session

Struct `sss_se05x_mac_t`

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

`struct sss_se05x_mac_t`

Message Authentication Code.

Public Members

```
sss_algorithm_t algorithm
    copydoc sss_mac_t::algorithm

SE05x_CryptoObjectID_t cryptoObjectID
    Used crypto object ID for this operation

sss_se05x_object_t *keyObject
    copydoc sss_mac_t::keyObject

sss_mode_t mode
    copydoc sss_mac_t::mode

sss_se05x_session_t *session
    copydoc sss_mac_t::session
```

Struct sss_se05x_object_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

```
struct sss_se05x_object_t
An object (secure / non-secure) within a Key Store.
```

Public Members

```
uint32_t cipherType
    cipherType type from sss_cipher_type_t

uint32_t curve_id
    If this is an ECC Key, the Curve ID of the key

uint8_t isPersistant
    Whether this is a persistant or transient object

uint32_t keyId
    Application specific key identifier. The keyId is kept in the key store along with the key data and other properties.

sss_se05x_key_store_t *keyStore
    key store holding the data and other properties

uint32_t objectType
    The type/part of object is referenced from sss_key_part_t
```

Struct sss_se05x_rng_context_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

```
struct sss_se05x_rng_context_t
    Random number generator context
```

Public Members

`sss_se05x_session_t *session`
Pointer to the session

Struct sss_se05x_session_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

```
struct sss_se05x_session_t
    Root session.
```

This is a *singleton* for each connection (physical/logical) to individual cryptographic system.

Public Members

`sss_se05x_tunnel_context_t *ptun_ctx`
In case connection is tunneled, context to the tunnel

`Se05xSession_t s_ctx`
Connection context to SE050

`sss_type_t subsystem`
Indicates which security subsystem is selected to be used.

Struct sss_se05x_symmetric_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

struct sss_se05x_symmetric_t

TypeDef for the symmetric crypto context.

Public Members

sss_algorithm_t algorithm

Algorithm to be applied, e.g AES_ECB / CBC

uint8_t cache_data[16]

Since underlying system can only process in fixed chunks, cache them on host to complete the operation sanely

size_t cache_data_len

Length of bytes cached on host

SE05x_CryptoObjectID_t cryptoObjectID

Used crypto object ID for this operation

*sss_se05x_object_t *keyObject*

Reference to key and its properties.

sss_mode_t mode

Mode of operation, e.g Encryption/Decryption

*sss_se05x_session_t *session*

Virtual connection between application (user context) and specific security subsystem and function thereof.

Struct sss_se05x_tunnel_context_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Struct Documentation

struct sss_se05x_tunnel_context_t

Tunneling

Used for communication via another system.

Public Members

struct _sss_se05x_session *se05x_session

Pointer to the base SE050 Session

sss_tunnel_dest_t tunnelDest

Where exactly this tunnel terminate to

Struct sss_session_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

struct sss_session_t

Root session.

This is a *singleton* for each connection (physical/logical) to individual cryptographic system.

Public Members

uint8_t **data**[(0 + (1 * sizeof(void *)) + (1 * sizeof(void *)) + (8 * sizeof(void *))) + 16)]

struct sss_session_t::[anonymous] extension

Reserved memory for implementation specific extension

sss_type_t subsystem

Indicates which security subsystem is selected.

This is set when *sss_session_open* is successful

Struct sss_symmetric_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

struct sss_symmetric_t

Typedef for the symmetric crypto context.

Public Members

sss_algorithm_t algorithm

Algorithm to be applied, e.g AES_ECB / CBC

uint8_t **data**[(0 + (2 * sizeof(void *)) + (2 * sizeof(int)) + (2 * sizeof(void *))) + 16 + 4 + 16)]

struct sss_symmetric_t::[anonymous] extension

Reserved memory for implementation specific extension

sss_object_t *keyObject

Key to be used for the symmetric operation

sss_mode_t mode

Mode of operation, e.g Encryption/Decryption

sss_session_t *session

Virtual connection between application (user context) and specific security subsystem and function thereof.

Struct sss_tunnel_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation**struct sss_tunnel_t**

Tunneling

Used for communication via another system.

Public Membersuint8_t **data**[(0 + (1 * sizeof(void *)) + (2 * sizeof(int)) + (2 * sizeof(void *)) + 16)]**struct sss_tunnel_t::[anonymous] extension**

Reserved memory for implementation specific extension

sss_session_t *session

Pointer to the session

uint32_t tunnelType

TODO: More documentation

Struct sub_component_metaData_t

- Defined in file_semslite_lib_inc_sems_lite_api.h

Struct Documentation**struct sub_component_metaData_t****Public Members**size_t **aidLen**uint8_t **minimumPreviousVersion**[2]size_t **nameLen****const uint8_t *pAid**char ***pName****struct _sub_component_metaData_t *pNextSubComponentMetaData**uint8_t **version**[2]

Struct tlvHeader_t

- Defined in file_sss_inc_fsl_sss_api.h

Struct Documentation

```
struct tlvHeader_t
Header for a IS716 APDU
```

Public Members

uint8_t **hdr**[0 + 1 + 1 + 1 + 1]
ISO 7816 APDU Header

Enums

Enum SE05x_AeadAlgo_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_AeadAlgo_t
AEAD Algorithms
```

Values:

kSE05x_AeadAlgo_NA = 0
Invalid
kSE05x_AeadGCMAlgo = 0xB0
kSE05x_AeadGCM_IVAlgo = 0xF3
kSE05x_AeadCCMAlgo = 0xF4

Enum SE05x_AppletConfig_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_AppletConfig_t
Features which are available / enabled in the Applet
```

Values:

kSE05x_AppletConfig_NA = 0
Invalid
kSE05x_AppletConfig_ECDA = 0x0001
Use of curve TPM_ECC_BN_P256

kSE05x_AppletConfig_ECDSA_ECDH_ECDHE = 0x0002
 EC DSA and DH support

kSE05x_AppletConfig_EDDSA = 0x0004
 Use of curve RESERVED_ID_ECC_ED_25519

kSE05x_AppletConfig_DH_MONT = 0x0008
 Use of curve RESERVED_ID_ECC_MONT_DH_25519

kSE05x_AppletConfig_HMAC = 0x0010
 Writing HMACKey objects

kSE05x_AppletConfig_RSA_PLAIN = 0x0020
 Writing RSAKey objects

kSE05x_AppletConfig_RSA_CRT = 0x0040
 Writing RSAKey objects

kSE05x_AppletConfig_AES = 0x0080
 Writing AESKey objects

kSE05x_AppletConfig_DES = 0x0100
 Writing DESKey objects

kSE05x_AppletConfig_PBKDF = 0x0200
 PBKDF2

kSE05x_AppletConfig_TLS = 0x0400
 TLS Handshake support commands (see 4.16) in APDU Spec

kSE05x_AppletConfig_MIFARE = 0x0800
 Mifare DESFire support (see 4.15) in APDU Spec

kSE05x_AppletConfig_RFU1 = 0x1000
 RFU1

kSE05x_AppletConfig_I2CM = 0x2000
 I2C Master support (see 4.17) in APDU Spec

kSE05x_AppletConfig_RFU2 = 0x4000
 RFU2

Enum SE05x_AppletResID_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_AppletResID_t
 Reserved identifiers of the Applet

Values:

kSE05x_AppletResID_NA = 0
 Invalid

kSE05x_AppletResID_TRANSPORT = 0x7FFF0200
 An authentication object which allows the user to switch LockState of the applet. The LockState defines whether the applet is transport locked or not.


```

kSE05x_AttestationAlgo_RSA_SHA224_PKCS1_PSS = kSE05x_RSASignatureAlgo_SHA224_PKCS1_PSS
kSE05x_AttestationAlgo_RSA_SHA256_PKCS1_PSS = kSE05x_RSASignatureAlgo_SHA256_PKCS1_PSS
kSE05x_AttestationAlgo_RSA_SHA384_PKCS1_PSS = kSE05x_RSASignatureAlgo_SHA384_PKCS1_PSS
kSE05x_AttestationAlgo_RSA_SHA512_PKCS1_PSS = kSE05x_RSASignatureAlgo_SHA512_PKCS1_PSS
kSE05x_AttestationAlgo_RSA_SHA_224_PKCS1 = kSE05x_RSASignatureAlgo_SHA_224_PKCS1
kSE05x_AttestationAlgo_RSA_SHA_256_PKCS1 = kSE05x_RSASignatureAlgo_SHA_256_PKCS1
kSE05x_AttestationAlgo_RSA_SHA_384_PKCS1 = kSE05x_RSASignatureAlgo_SHA_384_PKCS1
kSE05x_AttestationAlgo_RSA_SHA_512_PKCS1 = kSE05x_RSASignatureAlgo_SHA_512_PKCS1

```

Enum SE05x_AttestationType_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_AttestationType_t

In case the read is attested

Values:

```

kSE05x_AttestationType_None = 0
kSE05x_AttestationType_AUTH = kSE05x_INS_AUTH_OBJECT

```

Enum SE05x_Cipher_Oper_OneShot_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_Cipher_Oper_OneShot_t

One Shot operations helper

Values:

```

kSE05x_Cipher_Oper_OneShot_NA = 0
kSE05x_Cipher_Oper_OneShot_Encrypt = kSE05x_P2_ENCRYPT_ONESHOT
kSE05x_Cipher_Oper_OneShot_Decrypt = kSE05x_P2_DECRYPT_ONESHOT

```

Enum SE05x_Cipher_Oper_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_Cipher_Oper_t

Cipher Operation.

Encrypt or decrypt

Values:

kSE05x_Cipher_Oper_NA = 0

kSE05x_Cipher_Oper_Encrypt = kSE05x_P2_ENCRYPT

kSE05x_Cipher_Oper_Decrypt = kSE05x_P2_DECRYPT

Enum SE05x_CipherMode_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_CipherMode_t

Symmetric cipher modes

Values:

kSE05x_CipherMode_NA = 0
Invalid

kSE05x_CipherMode_DES_CBC_NOPAD = 0x01
Typically using DESKey identifiers

kSE05x_CipherMode_DES_CBC_ISO9797_M1 = 0x02
Typically using DESKey identifiers

kSE05x_CipherMode_DES_CBC_ISO9797_M2 = 0x03
Typically using DESKey identifiers

kSE05x_CipherMode_DES_CBC_PKCS5 = 0x04
NOT SUPPORTED

kSE05x_CipherMode_DES_ECB_NOPAD = 0x05
Typically using DESKey identifiers

kSE05x_CipherMode_DES_ECB_ISO9797_M1 = 0x06
NOT SUPPORTED

kSE05x_CipherMode_DES_ECB_ISO9797_M2 = 0x07
NOT SUPPORTED

kSE05x_CipherMode_DES_ECB_PKCS5 = 0x08
NOT SUPPORTED

kSE05x_CipherMode_AES_ECB_NOPAD = 0x0E
Typically using AESKey identifiers

kSE05x_CipherMode_AES_CBC_NOPAD = 0x0D
 Typically using AESKey identifiers

kSE05x_CipherMode_AES_CBC_ISO9797_M1 = 0x16
 Typically using AESKey identifiers

kSE05x_CipherMode_AES_CBC_ISO9797_M2 = 0x17
 Typically using AESKey identifiers

kSE05x_CipherMode_AES_CBC_PKCS5 = 0x18
 NOT SUPPORTED

kSE05x_CipherMode_AES_GCM = 0xB0
 Typically using AEAD GCM mode

kSE05x_CipherMode_AES_CTR = 0xF0
 Typically using AESKey identifiers

kSE05x_CipherMode_AES_GCM_INT_IV = 0xF3
 Typically using AEAD GCM with internal IV Gen

kSE05x_CipherMode_AES_CCM = 0xF4
 Typically using AEAD CCM mode

Enum SE05x_CryptoContext_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_CryptoContext_t
 Cryptographic context for operation

Values:

kSE05x_CryptoContext_NA = 0
 Invalid

kSE05x_CryptoContext_DIGEST = 0x01
 For DigestInit/DigestUpdate/DigestFinal

kSE05x_CryptoContext_CIPHER = 0x02
 For CipherInit/CipherUpdate/CipherFinal

kSE05x_CryptoContext_SIGNATURE = 0x03
 For MACInit/MACUpdate/MACFinal

kSE05x_CryptoContext_AEAD = 0x04
 For AEADInit/AEADUpdate/AEADFinal

Enum SE05x_CryptoObject_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_CryptoObject_t
    Crypto object identifiers

    Values:

    kSE05x_CryptoObject_NA = 0
        Invalid

    kSE05x_CryptoObject_DIGEST_SHA
    kSE05x_CryptoObject_DIGEST_SHA224
    kSE05x_CryptoObject_DIGEST_SHA256
    kSE05x_CryptoObject_DIGEST_SHA384
    kSE05x_CryptoObject_DIGEST_SHA512
    kSE05x_CryptoObject_DES_CBC_NOPAD
    kSE05x_CryptoObject_DES_CBC_ISO9797_M1
    kSE05x_CryptoObject_DES_CBC_ISO9797_M2
    kSE05x_CryptoObject_DES_CBC_PKCS5
    kSE05x_CryptoObject_DES_ECB_NOPAD
    kSE05x_CryptoObject_DES_ECB_ISO9797_M1
    kSE05x_CryptoObject_DES_ECB_ISO9797_M2
    kSE05x_CryptoObject_DES_ECB_PKCS5
    kSE05x_CryptoObject_AES_ECB_NOPAD
    kSE05x_CryptoObject_AES_CBC_NOPAD
    kSE05x_CryptoObject_AES_CBC_ISO9797_M1
    kSE05x_CryptoObject_AES_CBC_ISO9797_M2
    kSE05x_CryptoObject_AES_CBC_PKCS5
    kSE05x_CryptoObject_AES_CTR
    kSE05x_CryptoObject_HMAC_SHA1
    kSE05x_CryptoObject_HMAC_SHA256
    kSE05x_CryptoObject_HMAC_SHA384
    kSE05x_CryptoObject_HMAC_SHA512
    kSE05x_CryptoObject_CMAC_128
    kSE05x_CryptoObject_AES_GCM
    kSE05x_CryptoObject_AES_GCM_INT_IV
    kSE05x_CryptoObject_AES_CCM
```

Enum SE05x_DigestMode_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation**enum SE05x_DigestMode_t**

Hashing/Digest algorithms

*Values:***kSE05x_DigestMode_NA** = 0

Invalid

kSE05x_DigestMode_NO_HASH = 0x00**kSE05x_DigestMode_SHA** = 0x01**kSE05x_DigestMode_SHA224** = 0x07

Not supported

kSE05x_DigestMode_SHA256 = 0x04**kSE05x_DigestMode_SHA384** = 0x05**kSE05x_DigestMode_SHA512** = 0x06**Enum SE05x_ECCurve_t**

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation**enum SE05x_ECCurve_t**

ECC Curve Identifiers

*Values:***kSE05x_ECCurve_NA** = 0x00

Invalid

kSE05x_ECCurve_NIST_P192 = 0x01**kSE05x_ECCurve_NIST_P224** = 0x02**kSE05x_ECCurve_NIST_P256** = 0x03**kSE05x_ECCurve_NIST_P384** = 0x04**kSE05x_ECCurve_NIST_P521** = 0x05**kSE05x_ECCurve_Brainpool160** = 0x06**kSE05x_ECCurve_Brainpool192** = 0x07**kSE05x_ECCurve_Brainpool224** = 0x08**kSE05x_ECCurve_Brainpool256** = 0x09**kSE05x_ECCurve_Brainpool320** = 0x0A

```
kSE05x_ECCurve_Brainpool384 = 0x0B  
kSE05x_ECCurve_Brainpool512 = 0x0C  
kSE05x_ECCurve_Secp160k1 = 0x0D  
kSE05x_ECCurve_Secp192k1 = 0x0E  
kSE05x_ECCurve_Secp224k1 = 0x0F  
kSE05x_ECCurve_Secp256k1 = 0x10  
kSE05x_ECCurve TPM_ECC_BN_P256 = 0x11  
kSE05x_ECCurve_ECC_ED_25519 = 0x40  
    Not Weierstrass  
kSE05x_ECCurve_ECC_MONT_DH_25519 = 0x41  
kSE05x_ECCurve_ECC_MONT_DH_448 = 0x43  
    Not Weierstrass
```

Enum SE05x_ECCurveParam_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_ECCurveParam_t

Parameters while setting the curve

Values:

```
kSE05x_ECCurveParam_NA = 0  
    Invalid  
kSE05x_ECCurveParam_PARAM_A = 0x01  
kSE05x_ECCurveParam_PARAM_B = 0x02  
kSE05x_ECCurveParam_PARAM_G = 0x04  
kSE05x_ECCurveParam_PARAM_N = 0x08  
kSE05x_ECCurveParam_PARAM_PRIME = 0x10
```

Enum SE05x_ECDAASignatureAlgo_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_ECDAASignatureAlgo_t
    Different signature algorithms for ECDAAS
```

Values:

kSE05x_ECDAASignatureAlgo_NA = 0
Invalid

kSE05x_ECDAASignatureAlgo_ECDAAS = 0xF4
Message input must be pre-hashed (using SHA256)

Enum SE05x_ECSignatureAlgo_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_ECSignatureAlgo_t
    Different signature algorithms for EC
```

Values:

kSE05x_ECSignatureAlgo_NA = 0
Invalid

kSE05x_ECSignatureAlgo_PLAIN = 0x09
NOT SUPPORTED

kSE05x_ECSignatureAlgo_SHA = 0x11

kSE05x_ECSignatureAlgo_SHA_224 = 0x25

kSE05x_ECSignatureAlgo_SHA_256 = 0x21

kSE05x_ECSignatureAlgo_SHA_384 = 0x22

kSE05x_ECSignatureAlgo_SHA_512 = 0x26

Enum SE05x_EDSignatureAlgo_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_EDSignatureAlgo_t
    Different signature algorithms for ED
```

Values:

kSE05x_EDSignatureAlgo_NA = 0
Invalid

kSE05x_EDSignatureAlgo_ED25519PURE_SHA_512 = 0xA3
Message input must be plain Data. Pure EDDSA algorithm

Enum SE05x_HealthCheckMode_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_HealthCheckMode_t

Health check

Values:

kSE05x_HealthCheckMode_NA = 0

Invalid

kSE05x_HealthCheckMode_FIPS = 0xF906

Performs all on-demand self-tests. Can only be done when the module is in FIPS mode. When the test fails, the chip goes into TERMINATED state.

kSE05x_HealthCheckMode_CODE_SIGNATURE = 0xFE01

Performs ROM integrity checks. When the test fails, the chip triggers the attack counter and the chip will reset.

kSE05x_HealthCheckMode_DYNAMIC_FLASH_INTEGRITY = 0xFD02

Performs flash integrity tests. When the test fails, the chip triggers the attack counter and the chip will reset.

kSE05x_HealthCheckMode_SHIELDING = 0xFB04

Performs tests on the active shield protection of the hardware. When the test fails, the chip triggers the attack counter and the chip will reset.

kSE05x_HealthCheckMode_SENSOR = 0xFA05

Performs self-tests on hardware sensors and reports the status.

kSE05x_HealthCheckMode_SFR_CHECK = 0xFC03

Performs self-tests on the hardware registers. When the test fails, the chip triggers the attack counter and the chip will reset.

Enum SE05x_HkdfMode_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_HkdfMode_t

HKDF Mode

Values:

kSE05x_HkdfMode_NA = 0x00

Invalid

kSE05x_HkdfMode_ExtractExpand = 0x01

kSE05x_HkdfMode_ExpandOnly = 0x02

Enum SE05x_I2CM_Baud_Rate_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Enum Documentation**enum SE05x_I2CM_Baud_Rate_t**

Configuration for I2CM

Values:

kSE05x_I2CM_Baud_Rate_100Khz = 0

kSE05x_I2CM_Baud_Rate_400Khz

Enum SE05x_I2CM_securityReq_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Enum Documentation**enum SE05x_I2CM_securityReq_t**

Additional operation on data read by I2C

Values:

kSE05x_Security_None = 0

kSE05x_Sign_Request

kSE05x_Sign_Enc_Request

Enum SE05x_I2CM_status_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Enum Documentation**enum SE05x_I2CM_status_t**

Status of I2CM Transaction

Values:

kSE05x_I2CM_Success = 0x5A

kSE05x_I2CM_I2C_Nack_Fail = 0x01

kSE05x_I2CM_I2C_Write_Error = 0x02

kSE05x_I2CM_I2C_Read_Error = 0x03

kSE05x_I2CM_I2C_Time_Out_Error = 0x05

kSE05x_I2CM_Invalid_Tag = 0x11

kSE05x_I2CM_Invalid_Length = 0x12

```
kSE05x_I2CM_Invalid_Length_Encode = 0x13  
kSE05x_I2CM_I2C_Config = 0x21
```

Enum SE05x_I2CM_TAG_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_I2CM_TAG_t

I2C Master micro operation.

Values:

```
kSE05x_TAG_I2CM_Config = 0x01  
kSE05x_TAG_I2CM_Write = 0x03  
kSE05x_TAG_I2CM_Read = 0x04
```

Enum SE05x_I2CM_TLV_type_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Enum Documentation

enum SE05x_I2CM_TLV_type_t

Types of entries in an I2CM Transaction

Values:

```
kSE05x_I2CM_None = 0  
Do nothing  
kSE05x_I2CM_Configure  
Configure the address, baudrate  
kSE05x_I2CM_Write = 3  
Write to I2C Slave  
kSE05x_I2CM_Read  
Read from I2C Slave  
kSE05x_I2CM_StructuralIssue = 0xFF  
Response from SE05x that there is something wrong
```

Enum SE05x_INS_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation**enum SE05x_INS_t**

Values for INS in ISO7816 APDU

Values:

kSE05x_INS_NA = 0

Invalid

kSE05x_INS_MASK_INS_CHAR = 0xE0

3 MSBit for instruction characteristics.

kSE05x_INS_MASK_INSTRUCTION = 0x1F

5 LSBit for instruction

kSE05x_INS_TRANSIENT = 0x80

Mask for transient object creation, can only be combined with INS_WRITE.

kSE05x_INS_AUTH_OBJECT = 0x40

Mask for authentication object creation, can only be combined with INS_WRITE

kSE05x_INS_ATTEST = 0x20

Mask for getting attestation data.

kSE05x_INS_WRITE = 0x01

Write or create a persistent object.

kSE05x_INS_READ = 0x02

Read the object

kSE05x_INS_CRYPTO = 0x03

Perform Security Operation

kSE05x_INS_MGMT = 0x04

General operation

kSE05x_INS_PROCESS = 0x05

Process session command

Enum SE05x_KeyPart_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_KeyPart_t

Part of the asymmetric key

Values:

kSE05x_KeyPart_NA = *kSE05x_P1_DEFAULT*

kSE05x_KeyPart_Pair = *kSE05x_P1_KEY_PAIR*

Key pair (private key + public key)

kSE05x_KeyPart_Private = *kSE05x_P1_PRIVATE*

Private key

kSE05x_KeyPart_Public = *kSE05x_P1_PUBLIC*

Public key

Enum SE05x_LockIndicator_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_LockIndicator_t

Transient / Persistent lock

Values:

kSE05x_LockIndicator_NA = 0

Invalid

kSE05x_LockIndicator_TRANSIENT_LOCK = 0x01

kSE05x_LockIndicator_PERSISTENT_LOCK = 0x02

Enum SE05x_LockState_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_LockState_t

Lock the sample (until unlocked)

Values:

kSE05x_LockState_NA = 0

Invalid

kSE05x_LockState_LOCKED = 0x01

Enum SE05x_Mac_Oper_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

`enum SE05x_Mac_Oper_t`

MAC operations

Values:

`kSE05x_Mac_Oper_NA = 0`

`kSE05x_Mac_Oper_Generate = kSE05x_P2_GENERATE`

`kSE05x_Mac_Oper_Validate = kSE05x_P2_VALIDATE`

Enum SE05x_MACAlgo_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

`enum SE05x_MACAlgo_t`

HMAC/CMAC Algorithms

Values:

`kSE05x_MACAlgo_NA = 0`
Invalid

`kSE05x_MACAlgo_HMAC_SHA1 = 0x18`

`kSE05x_MACAlgo_HMAC_SHA256 = 0x19`

`kSE05x_MACAlgo_HMAC_SHA384 = 0x1A`

`kSE05x_MACAlgo_HMAC_SHA512 = 0x1B`

`kSE05x_MACAlgo_CMAC_128 = 0x31`

Enum SE05x_MemoryType_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_MemoryType_t

Data for available memory

Values:

kSE05x_MemoryType_NA = 0

Invalid

kSE05x_MemoryType_PERSISTENT = 0x01

Persistent memory

kSE05x_MemoryType_TRANSIENT_RESET = 0x02

Transient memory, clear on reset

kSE05x_MemoryType_TRANSIENT_DESELECT = 0x03

Transient memory, clear on deselect

Enum SE05x_MemTyp_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_MemTyp_t

Type of memory. Used when we query available free size

Values:

kSE05x_MemTyp_TRANSIENT_RESET = 0x01

Transient memory, clear on reset

kSE05x_MemTyp_TRANSIENT_DESELECT = 0x02

Transient memory, clear on deselect

kSE05x_MemTyp_PERSISTENT = 0x03

Persistent memory

Enum SE05x_MoreIndicator_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_MoreIndicator_t

When there are more entries yet to be fetched from few of the APIs

Values:

kSE05x_MoreIndicator_NA = 0

Invalid

kSE05x_MoreIndicator_NO_MORE = 0x01

No more data available

kSE05x_MoreIndicator_MORE = 0x02
More data available

Enum SE05x_Origin_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_Origin_t
Where was this object originated

Values:

kSE05x-Origin_NA = 0
Invalid

kSE05x-Origin_EXTERNAL = 0x01
Generated outside the module.

kSE05x-Origin_INTERNAL = 0x02
Generated inside the module.

kSE05x-Origin_PROVISIONED = 0x03
Trust provisioned by NXP

Enum SE05x_P1_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_P1_t
Values for P1 in ISO7816 APDU

Values:

kSE05x_P1_NA = 0
Invalid

kSE05x_P1_UNUSED = 0x80
Highest bit not used

kSE05x_P1_MASK_KEY_TYPE = 0x60
2 MSBit for key type

kSE05x_P1_MASK_CRED_TYPE = 0x1F
5 LSBit for credential type

kSE05x_P1_KEY_PAIR = 0x60
Key pair (private key + public key)

kSE05x_P1_PRIVATE = 0x40
Private key

kSE05x_P1_PUBLIC = 0x20
Public key

```
kSE05x_P1_DEFAULT = 0x00
kSE05x_P1_EC = 0x01
kSE05x_P1_RSA = 0x02
kSE05x_P1_AES = 0x03
kSE05x_P1_DES = 0x04
kSE05x_P1_HMAC = 0x05
kSE05x_P1_BINARY = 0x06
kSE05x_P1_UserId = 0x07
kSE05x_P1_COUNTER = 0x08
kSE05x_P1_PCR = 0x09
kSE05x_P1_CURVE = 0x0B
kSE05x_P1_SIGNATURE = 0x0C
kSE05x_P1_MAC = 0x0D
kSE05x_P1_CIPHER = 0x0E
kSE05x_P1_TLS = 0x0F
kSE05x_P1_CRYPTO_OBJ = 0x10
kSE05x_P1_AEAD = 0x11
    Applet >= 4.4
kSE05x_P1_AEAD_SP800_38D = 0x12
    Applet >= 4.4
```

Enum SE05x_P2_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_P2_t
    Values for P2 in ISO7816 APDU

    Values:
        kSE05x_P2_DEFAULT = 0x00
            Invalid
        kSE05x_P2_GENERATE = 0x03
        kSE05x_P2_CREATE = 0x04
        kSE05x_P2_SIZE = 0x07
        kSE05x_P2_SIGN = 0x09
        kSE05x_P2_VERIFY = 0x0A
        kSE05x_P2_INIT = 0x0B
        kSE05x_P2_UPDATE = 0x0C
```

```
kSE05x_P2_FINAL = 0x0D
kSE05x_P2_ONESHOT = 0x0E
kSE05x_P2_DH = 0x0F
kSE05x_P2_DIVERSIFY = 0x10
kSE05x_P2_AUTH_FIRST_PART2 = 0x12
kSE05x_P2_AUTH_NONFIRST_PART2 = 0x13
kSE05x_P2_DUMP_KEY = 0x14
kSE05x_P2_CHANGE_KEY_PART1 = 0x15
kSE05x_P2_CHANGE_KEY_PART2 = 0x16
kSE05x_P2_KILL_AUTH = 0x17
kSE05x_P2_IMPORT = 0x18
kSE05x_P2_EXPORT = 0x19
kSE05x_P2_SESSION_CREATE = 0x1B
kSE05x_P2_SESSION_CLOSE = 0x1C
kSE05x_P2_SESSION_REFRESH = 0x1E
kSE05x_P2_SESSION_POLICY = 0x1F
kSE05x_P2_VERSION = 0x20
kSE05x_P2_VERSION_EXT = 0x21
kSE05x_P2_MEMORY = 0x22
kSE05x_P2_LIST = 0x25
kSE05x_P2_TYPE = 0x26
kSE05x_P2_EXIST = 0x27
kSE05x_P2_DELETE_OBJECT = 0x28
kSE05x_P2_DELETE_ALL = 0x2A
kSE05x_P2_SESSION_UserId = 0x2C
kSE05x_P2_HKDF = 0x2D
kSE05x_P2_PBKDF = 0x2E
kSE05x_P2_HKDF_EXPAND_ONLY = 0x2F
kSE05x_P2_I2CM = 0x30
kSE05x_P2_I2CM_ATTESTED = 0x31
kSE05x_P2_MAC = 0x32
kSE05x_P2_UNLOCK_CHALLENGE = 0x33
kSE05x_P2_CURVE_LIST = 0x34
kSE05x_P2_SIGN_ECDAA = 0x35
kSE05x_P2_ID = 0x36
kSE05x_P2_ENCRYPT_ONESHOT = 0x37
```

```
kSE05x_P2_DECRYPT_ONESHOT = 0x38
kSE05x_P2_ATTEST = 0x3A
kSE05x_P2_ATTRIBUTES = 0x3B
kSE05x_P2_CPLC = 0x3C
kSE05x_P2_TIME = 0x3D
kSE05x_P2_TRANSPORT = 0x3E
kSE05x_P2_VARIANT = 0x3F
kSE05x_P2_PARAM = 0x40
kSE05x_P2_DELETE_CURVE = 0x41
kSE05x_P2_ENCRYPT = 0x42
kSE05x_P2_DECRYPT = 0x43
kSE05x_P2_VALIDATE = 0x44
kSE05x_P2_GENERATE_ONESHOT = 0x45
kSE05x_P2_VALIDATE_ONESHOT = 0x46
kSE05x_P2_CRYPTO_LIST = 0x47
kSE05x_P2_RANDOM = 0x49
kSE05x_P2_TLS_PMS = 0x4A
kSE05x_P2_TLS_PRF_CLI_HELLO = 0x4B
kSE05x_P2_TLS_PRF_SRV_HELLO = 0x4C
kSE05x_P2_TLS_PRF_CLI_RND = 0x4D
kSE05x_P2_TLS_PRF_SRV_RND = 0x4E
kSE05x_P2_TLS_PRF_BOTH = 0x5A
kSE05x_P2_RAW = 0x4F
kSE05x_P2_IMPORT_EXT = 0x51
kSE05x_P2 SCP = 0x52
kSE05x_P2_AUTH_FIRST_PART1 = 0x53
kSE05x_P2_AUTH_NONFIRST_PART1 = 0x54
kSE05x_P2_CM_COMMAND = 0x55
kSE05x_P2_MODE_OF_OPERATION = 0x56
kSE05x_P2_RESTRICT = 0x57
kSE05x_P2_SANITY = 0x58
kSE05x_P2_DH_REVERSE = 0x59
kSE05x_P2_READ_STATE = 0x5B
```

Enum SE05x_PlatformSCPRequest_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation**enum SE05x_PlatformSCPRequest_t**

Mandate platform SCP or not

*Values:***kSE05x_PlatformSCPRequest_NA = 0**

Invalid

kSE05x_PlatformSCPRequest_REQUIRED = 0x01

Platform SCP is required (full enc & MAC)

kSE05x_PlatformSCPRequest_NOT_REQUIRED = 0x02

No platform SCP required.

Enum SE05x_RestrictMode_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation**enum SE05x_RestrictMode_t**

Applet >= 4.4

See Se05x_API_DisableObjCreation

*Values:***kSE05x_RestrictMode_NA = 0****kSE05x_RestrictMode_RESTRICT_NEW = 0x01****kSE05x_RestrictMode_RESTRICT_ALL = 0x02****Enum SE05x_Result_t**

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation**enum SE05x_Result_t**

Result of operations

*Values:***kSE05x_Result_NA = 0**

Invalid

kSE05x_Result_SUCCESS = 0x01

kSE05x_Result_FAILURE = 0x02

Enum **SE05x_RSABitLength_t**

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_RSABitLength_t

Size of RSA Key Objects

Values:

kSE05x_RSABitLength_NA = 0
Invalid

kSE05x_RSABitLength_512 = 512

kSE05x_RSABitLength_1024 = 1024

kSE05x_RSABitLength_1152 = 1152

kSE05x_RSABitLength_2048 = 2048

kSE05x_RSABitLength_3072 = 3072

kSE05x_RSABitLength_4096 = 4096

Enum **SE05x_RSAEncryptionAlgo_t**

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_RSAEncryptionAlgo_t

Different encryption/decryption algorithms for RSA

Values:

kSE05x_RSAEncryptionAlgo_NA = 0
Invalid

kSE05x_RSAEncryptionAlgo_NO_PAD = 0x0C
Plain RSA, padding required on host.

kSE05x_RSAEncryptionAlgo_PKCS1 = 0x0A
RFC8017: RSAES-PKCS1-v1_5

kSE05x_RSAEncryptionAlgo_PKCS1_OAEP = 0x0F
RFC8017: RSAES-OAEP

Enum SE05x_RSAKeyComponent_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation**enum SE05x_RSAKeyComponent_t**

Part of the RSA Key Objects

Values:

kSE05x_RSAKeyComponent_NA = 0xFF

Invalid

kSE05x_RSAKeyComponent_MOD = 0x00

Modulus

kSE05x_RSAKeyComponent_PUB_EXP = 0x01

Public key exponent

kSE05x_RSAKeyComponent_PRIV_EXP = 0x02

Private key exponent

kSE05x_RSAKeyComponent_P = 0x03

CRT component p

kSE05x_RSAKeyComponent_Q = 0x04

CRT component q

kSE05x_RSAKeyComponent_DP = 0x05

CRT component dp

kSE05x_RSAKeyComponent_DQ = 0x06

CRT component dq

kSE05x_RSAKeyComponent_INVQ = 0x07

CRT component q_inv

Enum SE05x_RSAKeyFormat_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation**enum SE05x_RSAKeyFormat_t**

RSA Key format

Values:

kSE05x_RSAKeyFormat_CRT = *kSE05x_P2_DEFAULT*

kSE05x_RSAKeyFormat_RAW = *kSE05x_P2_RAW*

Enum SE05x_RSAPubKeyComp_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_RSAPubKeyComp_t

Plain RSA, padding required on host. RFC8017: RSAES-OAEP Public part of RSA Keys

Values:

kSE05x_RSAPubKeyComp_NA = 0

kSE05x_RSAPubKeyComp_MOD = *kSE05x_RSAKeyComponent_MOD*

kSE05x_RSAPubKeyComp_PUB_EXP = *kSE05x_RSAKeyComponent_PUB_EXP*

Enum SE05x_RSASignAlgo_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_RSASignAlgo_t

Algorithms for RSA Signature

Values:

kSE05x_RSASignAlgo_NA = 0
Invalid

kSE05x_RSASignAlgo_SHA1_PKCS1_PSS = 0x15
RFC8017: RSASSA-PSS

kSE05x_RSASignAlgo_SHA224_PKCS1_PSS = 0x2B
RFC8017: RSASSA-PSS

kSE05x_RSASignAlgo_SHA256_PKCS1_PSS = 0x2C
RFC8017: RSASSA-PSS

kSE05x_RSASignAlgo_SHA384_PKCS1_PSS = 0x2D
RFC8017: RSASSA-PSS

kSE05x_RSASignAlgo_SHA512_PKCS1_PSS = 0x2E
RFC8017: RSASSA-PSS

kSE05x_RSASignAlgo_SHA_224_PKCS1 = 0x27
RFC8017: RSASSA-PKCS1-v1_5

kSE05x_RSASignAlgo_SHA_256_PKCS1 = 0x28
RFC8017: RSASSA-PKCS1-v1_5

kSE05x_RSASignAlgo_SHA_384_PKCS1 = 0x29
RFC8017: RSASSA-PKCS1-v1_5

kSE05x_RSASignAlgo_SHA_512_PKCS1 = 0x2A
RFC8017: RSASSA-PKCS1-v1_5

Enum SE05x_RSASignatureAlgo_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

enum SE05x_RSASignatureAlgo_t

Different signature algorithms for RSA

Values:

kSE05x_RSASignatureAlgo_NA = 0

Invalid

kSE05x_RSASignatureAlgo_SHA1_PKCS1_PSS = 0x15

RFC8017: RSASSA-PSS

kSE05x_RSASignatureAlgo_SHA224_PKCS1_PSS = 0x2B

RFC8017: RSASSA-PSS

kSE05x_RSASignatureAlgo_SHA256_PKCS1_PSS = 0x2C

RFC8017: RSASSA-PSS

kSE05x_RSASignatureAlgo_SHA384_PKCS1_PSS = 0x2D

RFC8017: RSASSA-PSS

kSE05x_RSASignatureAlgo_SHA512_PKCS1_PSS = 0x2E

RFC8017: RSASSA-PSS

kSE05x_RSASignatureAlgo_SHA1_PKCS1 = 0x0A

RFC8017: RSASSA-PKCS1-v1_5

kSE05x_RSASignatureAlgo_SHA_224_PKCS1 = 0x27

RFC8017: RSASSA-PKCS1-v1_5

kSE05x_RSASignatureAlgo_SHA_256_PKCS1 = 0x28

RFC8017: RSASSA-PKCS1-v1_5

kSE05x_RSASignatureAlgo_SHA_384_PKCS1 = 0x29

RFC8017: RSASSA-PKCS1-v1_5

kSE05x_RSASignatureAlgo_SHA_512_PKCS1 = 0x2A

RFC8017: RSASSA-PKCS1-v1_5

Enum SE05x_SecObjTyp_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Enum Documentation

```
enum SE05x_SecObjTyp_t
    Type of Object

    Values:
        kSE05x_SecObjTyp_EC_KEY_PAIR = 0x01
        kSE05x_SecObjTyp_EC_PRIV_KEY = 0x02
        kSE05x_SecObjTyp_EC_PUB_KEY = 0x03
        kSE05x_SecObjTyp_RSA_KEY_PAIR = 0x04
        kSE05x_SecObjTyp_RSA_KEY_PAIR_CRT = 0x05
        kSE05x_SecObjTyp_RSA_PRIV_KEY = 0x06
        kSE05x_SecObjTyp_RSA_PRIV_KEY_CRT = 0x07
        kSE05x_SecObjTyp_RSA_PUB_KEY = 0x08
        kSE05x_SecObjTyp_AES_KEY = 0x09
        kSE05x_SecObjTyp_DES_KEY = 0x0A
        kSE05x_SecObjTyp_BINARY_FILE = 0x0B
        kSE05x_SecObjTyp_UserID = 0x0C
        kSE05x_SecObjTyp_COUNTER = 0x0D
        kSE05x_SecObjTyp_PCR = 0x0F
        kSE05x_SecObjTyp_CURVE = 0x10
        kSE05x_SecObjTyp_HMAC_KEY = 0x11
```

Enum SE05x_SetIndicator_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_SetIndicator_t
    TODO

    Values:
        kSE05x_SetIndicator_NA = 0
            Invalid
        kSE05x_SetIndicator_NOT_SET = 0x01
        kSE05x_SetIndicator_SET = 0x02
```

Enum SE05x_SW12_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation**enum SE05x_SW12_t**

Mapping of 2 byte return code

Values:

kSE05x_SW12_NA = 0

Invalid

kSE05x_SW12_NO_ERROR = 0x9000

No Error

kSE05x_SW12_CONDITIONS_NOT_SATISFIED = 0x6985

Conditions not satisfied

kSE05x_SW12_SECURITY_STATUS = 0x6982

Security status not satisfied.

kSE05x_SW12_WRONG_DATA = 0x6A80

Wrong data provided.

kSE05x_SW12_DATA_INVALID = 0x6984

Data invalid - policy set invalid for the given object

kSE05x_SW12_COMMAND_NOT_ALLOWED = 0x6986

Command not allowed - access denied based on object policy

Enum SE05x_SymmKeyType_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation**enum SE05x_SymmKeyType_t**

Symmetric keys

Values:

kSE05x_SymmKeyType_AES = *kSE05x_P1_AES*

kSE05x_SymmKeyType_DES = *kSE05x_P1_DES*

kSE05x_SymmKeyType_HMAC = *kSE05x_P1_HMAC*

kSE05x_SymmKeyType_CMAC = *kSE05x_P1_AES*

Enum SE05x_TAG_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

enum SE05x_TAG_t

Different TAG Values to talk to SE05X IoT Applet

Values:

kSE05x_TAG_NA = 0

Invalid

kSE05x_TAG_SESSION_ID = 0x10

kSE05x_TAG_POLICY = 0x11

kSE05x_TAG_MAX_ATTEMPTS = 0x12

kSE05x_TAG_IMPORT_AUTH_DATA = 0x13

kSE05x_TAG_IMPORT_AUTH_KEY_ID = 0x14

kSE05x_TAG_POLICY_CHECK = 0x15

kSE05x_TAG_1 = 0x41

kSE05x_TAG_2 = 0x42

kSE05x_TAG_3 = 0x43

kSE05x_TAG_4 = 0x44

kSE05x_TAG_5 = 0x45

kSE05x_TAG_6 = 0x46

kSE05x_TAG_7 = 0x47

kSE05x_TAG_8 = 0x48

kSE05x_TAG_9 = 0x49

kSE05x_TAG_10 = 0x4A

kSE05x_TAG_11 = 0x4B

kSE05x_GP_TAG CONTRL_REF_PARM = 0xA6

kSE05x_GP_TAG_AID = 0x4F

kSE05x_GP_TAG_KEY_TYPE = 0x80

kSE05x_GP_TAG_KEY_LEN = 0x81

kSE05x_GP_TAG_GET_DATA = 0x83

kSE05x_GP_TAG_DR_SE = 0x85

kSE05x_GP_TAG_RECEIPT = 0x86

kSE05x_GP_TAG_SCP_PARMS = 0x90

Enum SE05x_TLSPerformPRFType_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_TLSPerformPRFType_t
    TLS Perform PRF

    Values:
        kSE05x_TLS_PRF_NA = 0
        kSE05x_TLS_PRF_CLI_HELLO = kSE05x_P2_TLS_PRF_CLI_HELLO
        kSE05x_TLS_PRF_SRV_HELLO = kSE05x_P2_TLS_PRF_SRV_HELLO
        kSE05x_TLS_PRF_CLI_RND = kSE05x_P2_TLS_PRF_CLI_RND
        kSE05x_TLS_PRF_SRV_RND = kSE05x_P2_TLS_PRF_SRV_RND
        kSE05x_TLS_PRF_BOTH = kSE05x_P2_TLS_PRF_BOTH
```

Enum SE05x_TransientIndicator_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

```
enum SE05x_TransientIndicator_t
    Whether object is transient or persistent

    Values:
        kSE05x_TransientIndicator_NA = 0
            Invalid
        kSE05x_TransientIndicator_PERSISTENT = 0x01
        kSE05x_TransientIndicator_TRANSIENT = 0x02
```

Enum SE05x_TransientType_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Enum Documentation

`enum SE05x_TransientType_t`

Whether key is transient or persistent

Values:

`kSE05x_TransientType_Persistent = 0`

`kSE05x_TransientType_Transient = kSE05x_INS_TRANSIENT`

`Enum SE_AuthType_t`

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Enum Documentation

`enum SE_AuthType_t`

Values:

`kSSS_AuthType_None = 0`

`kSSS_AuthType_SCP03 = 1`

Global platform SCP03

`kSSS_AuthType_ID = 2`

(e.g. SE05X) UserID based connection

`kSSS_AuthType_AESKey = 3`

(e.g. SE05X) Use AESKey for user authentication

Earlier this was called `kSSS_AuthType_AppletSCP03`

`kSSS_AuthType_ECKey = 4`

(e.g. SE05X) Use ECKey for user authentication

Earlier this was called `kSSS_AuthType_FastSCP`

`kSSS_AuthType_INT_ECKey_Counter = 0x14`

Used internally, not to be set/used by user.

For the versions of the applet where we have to add the a counter during KDF.

`kSSS_SIZE = 0x7FFFFFFF`

`Enum sems_lite_recovery_status_t`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Enum Documentation

`enum sems_lite_recovery_status_t`

Values:

`sems_lite_recovery_not_started`=0

Recovery Not Started

`sems_lite_recovery_started`=1

Recovery Started

Enum `sems_lite_status_t`

- Defined in file_semslite_lib_inc_sems_lite_agent_common.h

Enum Documentation

`enum sems_lite_status_t`

Status of SEMS Lite update operation

Values:

`kStatus_SEMS_Lite_Success`=0x00

Operation was successful

`kStatus_SEMS_Lite_ERR_COM`

Communication Error

`kStatus_SEMS_Lite_ERR_DoReRun`

Update not completed please provide update package again.

`kStatus_SEMS_Lite_ERR_NotApplicable`

Update not applicable on this Chip/type.

`kStatus_SEMS_Lite_ERR_DoRecovery`

Update can not be completed. Please provide recovery package, to roll back to last working version.

`kStatus_SEMS_Lite_ERR_Fatal`

Unresolvable error.

`kStatus_SEMS_Lite_ERR_NotEnoughNVMemory`

Not enough NV memory.

`kStatus_SEMS_Lite_ERR_NotEnoughTransientMemory`

Not enough transient memory.

`kStatus_SEMS_Lite_ERR_MinPreviousVersion`

Current SE version not meet min previous version request.

`kStatus_SEMS_Lite_ERR_OlderVersion`

Older than current SE version

`kStatus_SEMS_Lite_ERR_General`

General error.

Enum `sems_lite_tearDown_status_t`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Enum Documentation

`enum sems_lite_tearDown_status_t`

Check Tear down Amd-I section 4.14

Values:

`sems_lite_notear = 0`

The script has been completely executed

`sems_lite_tear = 1`

Script execution was interrupted because of teardown.

`sems_lite_tearDown_status_invalid = 0x7F`

Enum `sems_lite_upgradeProgress_status_t`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Enum Documentation

`enum sems_lite_upgradeProgress_status_t`

Values:

`sems_lite_upgrade_not_inProgress = 0`

Upgrade session Not in Progress

`sems_lite_upgrade_inProgress = 1`

Upgrade session In Progress

`sems_lite_upgrade_invalid = 0x7F`

Enum `sems_lite_version_check_result_t`

- Defined in file_semslite_lib_inc_sems_lite_agent_common.h

Enum Documentation

`enum sems_lite_version_check_result_t`

Status of SEMS Lite version check result

Values:

`kStatus_SEMS_Lite_Version_Pass = 0x00`

Operation was successful

`kStatus_SEMS_Lite_Version_ERR_MIN`

Failed due to min previous version.

kStatus_SEMS_Lite_Version_ERR_Downgrade
Failed due to downgrade.

Enum sss_access_permission_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_access_permission_t

Permissions of an object

Values:

kAccessPermission_SSS_Read = (1u << 0)

Can read (applicable) contents of the key.

@note This is not same as @ref kAccessPermission_SSS_Use.

Without reading, the object, the key can be used.

kAccessPermission_SSS_Write = (1u << 1)

Can change the value of an object

kAccessPermission_SSS_Use = (1u << 2)

Can use an object

kAccessPermission_SSS_Delete = (1u << 3)

Can delete an object

kAccessPermission_SSS_ChangeAttributes = (1u << 4)

Can change permissions applicable to an object

Enum sss_algorithm_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_algorithm_t

Cryptographic algorithm to be applied

Values:

kAlgorithm_None

kAlgorithm_SSS_AES_ECB = SSS_ENUM_ALGORITHM(AES, 0x01)

kAlgorithm_SSS_AES_CBC = SSS_ENUM_ALGORITHM(AES, 0x02)

kAlgorithm_SSS_AES_CTR = SSS_ENUM_ALGORITHM(AES, 0x03)

kAlgorithm_SSS_AES_GCM = SSS_ENUM_ALGORITHM(AES, 0x04)

kAlgorithm_SSS_AES_CCM = SSS_ENUM_ALGORITHM(AES, 0x05)

kAlgorithm_SSS_AES_GCM_INT_IV = SSS_ENUM_ALGORITHM(AES, 0x06)

```
kAlgorithm_SSS_CHACHA_POLY = SSS_ENUM_ALGORITHM(CHACHA, 0x01)
kAlgorithm_SSS_DES_ECB = SSS_ENUM_ALGORITHM(DES, 0x01)
kAlgorithm_SSS_DES_CBC = SSS_ENUM_ALGORITHM(DES, 0x02)
kAlgorithm_SSS_DES3_ECB = SSS_ENUM_ALGORITHM(DES, 0x03)
kAlgorithm_SSS_DES3_CBC = SSS_ENUM_ALGORITHM(DES, 0x04)
kAlgorithm_SSS_SHA1 = SSS_ENUM_ALGORITHM(SHA, 0x01)
kAlgorithm_SSS_SHA224 = SSS_ENUM_ALGORITHM(SHA, 0x02)
kAlgorithm_SSS_SHA256 = SSS_ENUM_ALGORITHM(SHA, 0x03)
kAlgorithm_SSS_SHA384 = SSS_ENUM_ALGORITHM(SHA, 0x04)
kAlgorithm_SSS_SHA512 = SSS_ENUM_ALGORITHM(SHA, 0x05)
kAlgorithm_SSS_CMAC_AES = SSS_ENUM_ALGORITHM(MAC, 0x01)
kAlgorithm_SSS_HMAC_SHA1 = SSS_ENUM_ALGORITHM(MAC, 0x02)
kAlgorithm_SSS_HMAC_SHA224 = SSS_ENUM_ALGORITHM(MAC, 0x03)
kAlgorithm_SSS_HMAC_SHA256 = SSS_ENUM_ALGORITHM(MAC, 0x04)
kAlgorithm_SSS_HMAC_SHA384 = SSS_ENUM_ALGORITHM(MAC, 0x05)
kAlgorithm_SSS_HMAC_SHA512 = SSS_ENUM_ALGORITHM(MAC, 0x06)
kAlgorithm_SSS_DH = SSS_ENUM_ALGORITHM(DH, 0x01)
kAlgorithm_SSS_ECDH = SSS_ENUM_ALGORITHM(DH, 0x02)
kAlgorithm_SSS_DSA_SHA1 = SSS_ENUM_ALGORITHM(DSA, 0x01)
kAlgorithm_SSS_DSA_SHA224 = SSS_ENUM_ALGORITHM(DSA, 0x02)
kAlgorithm_SSS_DSA_SHA256 = SSS_ENUM_ALGORITHM(DSA, 0x03)
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_NO_HASH = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, 0x01)
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA1 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, 0x02)
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA224 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, 0x03)
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA256 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, 0x04)
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA384 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, 0x05)
kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA512 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_V1_5, 0x06)
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA1 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, 0x01)
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA224 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, 0x02)
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA256 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, 0x03)
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA384 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, 0x04)
kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA512 = SSS_ENUM_ALGORITHM(RSASSA_PKCS1_PSS_MGF1, 0x05)
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA1 = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP, 0x01)
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA224 = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP, 0x02)
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA256 = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP, 0x03)
kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA384 = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP, 0x04)
```

```

kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA512 = SSS_ENUM_ALGORITHM(RSAES_PKCS1_OAEP, 0x05)
kAlgorithm_SSS_RSAES_PKCS1_V1_5 = SSS_ENUM_ALGORITHM(RSAES_PKCS1_V1_5, 0x01)
kAlgorithm_SSS_RSASSA_NO_PADDING = SSS_ENUM_ALGORITHM(RSASSA_NO_PADDING, 0x01)
kAlgorithm_SSS_ECDSA_SHA1 = SSS_ENUM_ALGORITHM(ECDSA, 0x01)
kAlgorithm_SSS_ECDSA_SHA224 = SSS_ENUM_ALGORITHM(ECDSA, 0x02)
kAlgorithm_SSS_ECDSA_SHA256 = SSS_ENUM_ALGORITHM(ECDSA, 0x03)
kAlgorithm_SSS_ECDSA_SHA384 = SSS_ENUM_ALGORITHM(ECDSA, 0x04)
kAlgorithm_SSS_ECDSA_SHA512 = SSS_ENUM_ALGORITHM(ECDSA, 0x05)
kAlgorithm_SSS_ECDA = SSS_ENUM_ALGORITHM(ECDA, 0x01)

```

Enum **sss_cipher_type_t**

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_cipher_type_t

For all cipher types, key bit length is provided at the time key is inserted/generated

Values:

```

kSSS_CipherType_NONE
kSSS_CipherType_AES = 10
kSSS_CipherType_DES = 12
kSSS_CipherType_CMAC = 20
kSSS_CipherType_HMAC = 21
kSSS_CipherType_MAC = 30
kSSS_CipherType_RSA = 31
kSSS_CipherType_RSA_CRT = 32
    RSA RAW format
kSSS_CipherType_EC_NIST_P = 40
    RSA CRT format
kSSS_CipherType_EC_NIST_K = 41
    Keys Part of NIST-P Family
kSSS_CipherType_EC_MONTGOMERY = 50
    Keys Part of NIST-K Family Montgomery Key,
kSSS_CipherType_EC_TWISTED_ED = 51
    twisted Edwards form elliptic curve public key
kSSS_CipherType_EC_BRAINPOOL = 52
    Brainpool form elliptic curve public key
kSSS_CipherType_EC_BARRETO_NAEHRIG = 53
    Barreto Naehrig curve

```

```
kSSS_CipherType_UserID = 70
kSSS_CipherType_Certificate = 71
kSSS_CipherType_Binary = 72
kSSS_CipherType_Count = 73
kSSS_CipherType_PCR = 74
kSSS_CipherType_ReservedPin = 75
```

Enum sss_connection_type_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_connection_type_t

Destintion connection type

Values:

```
kSSS_ConnectionType_Plain
kSSS_ConnectionType_Password
kSSS_ConnectionType_Encrypted
```

Enum sss_key_object_mode_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_key_object_mode_t

Persistent / Non persistent mode of a key

Values:

```
kKeyObject_Mode_None = 0
    KeyObject_Mode_None
kKeyObject_Mode_Persistent = 1
    Key object will be persisted in memory and will retain it's value after a closed session
kKeyObject_Mode_Transient = 2
    Key Object will be stored in RAM. It will lose it's contents after a session is closed
```

Enum sss_key_part_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation**enum sss_key_part_t**

Part of a key

*Values:***kSSS_KeyPart_NONE****kSSS_KeyPart_Default** = 1

Applicable where we have UserID, PIN, Binary Files, Certificates, Symmetric Keys, PCR

kSSS_KeyPart_Public = 2

Public part of asymmetric key

kSSS_KeyPart_Private = 3

Private only part of asymmetric key

kSSS_KeyPart_Pair = 4

Both, public and private part of asymmetric key

Enum sss_key_store_prop_au8_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation**enum sss_key_store_prop_au8_t**

properties of a Key Store that return array

*Values:***kSSS_KeyStoreProp_au8_Optional_Start** = 0x00FFFFFFu

Optional Properties Start

Enum sss_mode_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation**enum sss_mode_t**

High level algorithmic operations.

Augmented by *sss_algorithm_t**Values:***kMode_SSS_Encrypt** = 1

Encrypt.

kMode_SSS_Decrypt = 2
Decrypt.

kMode_SSS_Sign = 3
Sign.

kMode_SSS_Verify = 4
Verify.

kMode_SSS_ComputeSharedSecret = 5

kMode_SSS_Digest = 6
Message Digest.

kMode_SSS_Mac = 7
Message Authentication Code.

kMode_SSS_HKDF_ExpandOnly = 9
HKDF Expand Only (RFC 5869)

Enum `sss_policy_type_u`

- Defined in file `sss_inc_fsl_sss_policy.h`

Enum Documentation

`enum sss_policy_type_u`

Type of policy

Values:

KPolicy_None

No policy applied

KPolicy_Session

Policy related to session.

See [`sss_policy_session_u`](#)

KPolicy_Sym_Key

Policy related to key.

See [`sss_policy_key_u`](#)

KPolicy_Asym_Key

KPolicy UserID

KPolicy File

KPolicy Counter

KPolicy PCR

KPolicy Common

KPolicy Common PCR Value

Enum sss_s05x_session_prop_a8_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Enum Documentation**enum sss_s05x_session_prop_a8_t**

SE050 Properties that can be represented as an array

Values:

kSSS_SE05x_SessionProp_CertUID = *kSSS_SessionProp_a8_Proprietary_Start* + 1

Enum sss_s05x_session_prop_u32_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Enum Documentation**enum sss_s05x_session_prop_u32_t**

SE050 Properties that can be represented as 32bit numbers

Values:

kSSS_SE05x_SessionProp_CertUIDLen = *kSSS_SessionProp_u32_Optional_Start* + 1

Enum sss_session_prop_a8_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation**enum sss_session_prop_a8_t**

Properties of session that are S32

From 0 to **kSSS_SessionProp_Optional_Prop_Start**, around $2^{24} = 16777215$ Properties are possible.

From 0 to **kSSS_SessionProp_Optional_Prop_Start**, around $2^{24} = 16777215$ Properties are possible.

Values:

kSSS_SessionProp_a8_NA = 0
Invalid

kSSS_SessionProp_szName
Name of the product, string

kSSS_SessionProp_UID
Unique Identifier

kSSS_SessionProp_a8_Optional_Start = 0x00FFFFFFu
Optional Properties Start

kSSS_SessionProp_a8_Proprietary_Start = 0x01FFFFFFu
Proprietary Properties Start

Enum sss_session_prop_u32_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_session_prop_u32_t

Properties of session that are U32

From 0 to kSSS_SessionProp_Optional_Prop_Start, around $2^{24} = 16777215$ Properties are possible.

From 0 to kSSS_SessionProp_Optional_Prop_Start, around $2^{24} = 16777215$ Properties are possible.

Values:

kSSS_SessionProp_u32_NA = 0

Invalid

kSSS_SessionProp_VerMaj

Major version

kSSS_SessionProp_VerMin

Minor Version

kSSS_SessionProp_VerDev

Development Version

kSSS_SessionProp_UIDLen

kSSS_SessionProp_u32_Optional_Start = 0x00FFFFFFu

Optional Properties Start

kSSS_KeyStoreProp_FreeMem_Persistant

How much persistent memory is free

kSSS_KeyStoreProp_FreeMem_Transient

How much transient memory is free

kSSS_SessionProp_u32_Proprietary_Start = 0x01FFFFFFu

Proprietary Properties Start

Enum sss_status_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_status_t

Status of the SSS APIs

Values:

kStatus_SSS_Success = 0x5a5a5a5au

Operation was successful

kStatus_SSS_Fail = 0x3c3c0000u

Operation failed

kStatus_SSS_InvalidArgument = 0x3c3c0001u

Operation not performed because some of the passed parameters were found inappropriate

kStatus_SSS_ResourceBusy = 0x3c3c0002u

Where the underlying sub-system *supports* multi-threading, Internal status to handle simultaneous access.

This status is not expected to be returned to higher layers.

Enum sss_tunnel_dest_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_tunnel_dest_t

Entity on the other side of the tunnel

Values:

kSSS_TunnelDest_None = 0

Default value

kSSS_TunnelType_Se05x_Iot_applet

SE05X IoT Applet

Enum sss_type_t

- Defined in file_sss_inc_fsl_sss_api.h

Enum Documentation

enum sss_type_t

Cryptographic sub system

Values:

kType_SSS_SubSystem_NONE

kType_SSS_Software = ((0x01 << 8) | (0x00))

Software based

kType_SSS_mbedTLS = ((*kType_SSS_Software*) | (0x01))

kType_SSS_OpenSSL = ((*kType_SSS_Software*) | (0x02))

kType_SSS_HW = ((0x02 << 8) | (0x00))

HOST HW Based

kType_SSS_SECO = ((*kType_SSS_HW*) | (0x01))

kType_SSS_Isolated_HW = ((0x04 << 8) | (0x00))

Isolated HW

kType_SSS_Sentinel = ((*kType_SSS_Isolated_HW*) | (0x01))

kType_SSS_Sentinel200 = ((*kType_SSS_Isolated_HW*) | (0x02))

kType_SSS_Sentinel300 = ((*kType_SSS_Isolated_HW*) | (0x03))

```
kType_SSS_Sentinel400 = ((kType_SSS_Isolated_HW) | (0x04))
kType_SSS_Sentinel500 = ((kType_SSS_Isolated_HW) | (0x05))
kType_SSS_SecureElement = ((0x08 << 8) | (0x00))
    Secure Element
kType_SSS_SE_A71CH = ((kType_SSS_SecureElement) | (0x01))
    To connect to https://www.nxp.com/products/:A71CH
kType_SSS_SE_A71CL = ((kType_SSS_SecureElement) | (0x02))
kType_SSS_SE_SE05x = ((kType_SSS_SecureElement) | (0x03))
    To connect to https://www.nxp.com/products/:SE050
kType_SSS_SubSystem_LAST
```

Unions

Union SE05x_CryptoModeSubType_t

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Union Documentation

```
union SE05x_CryptoModeSubType_t
#include <se05x_enums.h> Cyrpto module subtype
```

Public Members

SE05x_AeadAlgo_t aead

In case it's aead

SE05x_CipherMode_t cipher

In case it's cipher

SE05x_DigestMode_t digest

In case it's digest

SE05x_MACAlgo_t mac

In case it's mac

uint8_t union_8bit

Accessing 8 bit value for APDUs

Union SE05x_I2CM_INS_type_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Union Documentation

```
union SE05x_I2CM_INS_type_t
#include <fsl_sss_se05x_types.h> Individual entry in array of TLV commands.
```

Public Members

SE05x_I2CM_configData_t cfg

Data Configuration for I2CM

SE05x_I2CM_structuralIssue_t issue

Used to report error response, not for outgoing command

SE05x_I2CM_readData_t rd

Read to I2CM from I2C Slave

SE05x_I2CM_securityData_t sec

Security Configuration for I2CM.

SE05x_I2CM_writeData_t w

Write From I2CM to I2C Slave.

Functions

Function iot_agent_free_service_descriptor

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
void iot_agent_free_service_descriptor(nxp_iot_ServiceDescriptor *service_descriptor)
```

Free all FT_POINTER fields of a service descriptor.

When selecting a service, a service descriptor is read from a datastore. A service descriptor can contain fields of variable length (binary data (certificates, etc.) or text (hostname, etc.)). Those fields use dynamically allocated memory. The memory is freed by calling this function.

Parameters

- [in] *service_descriptor*: Reference to service descriptor

Function iot_agent_free_update_status_report

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

`void iot_agent_free_update_status_report (nxp_iot_UpdateStatusReport *status_report)`

Free all FT_POINTER fields of a update status report.

When a status report is filled during updating a device configuration, it contains pointer fields which use dynamically allocated memory. The memory is freed by calling this function.

Parameters

- [in] status_report: Reference to status_report

Function iot_agent_get_datastore_by_id

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

`iot_agent_status_t iot_agent_get_datastore_by_id (const iot_agent_context_t *ctx, const uint32_t id, iot_agent_datastore_t **datastore)`

Get a reference to a datastore based on its identifier.

Return Value

- IOT_STATUS_SUCCESS: A datastore with the id was found in the agent's context and a pointer to it is returned in `datastore`.

Function iot_agent_get_datastore_index_by_id

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

`iot_agent_status_t iot_agent_get_datastore_index_by_id (const iot_agent_context_t *ctx, const uint32_t id, size_t *index)`

Get the index of a datastore based on its identifier.

Return Value

- IOT_STATUS_SUCCESS: A datastore with the id was found in the agent's context and its index is returned in `index`.

Function `iot_agent_get_endpoint_info`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
bool iot_agent_get_endpoint_info (void *context, void *endpoint_information)
Get an endpoint information of the endpoint.
```

Parameters

- [in] *context*: Reference to end point context
- [in] *endpoint_information*: Reference to end point information

Function `iot_agent_get_keystore_by_id`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_get_keystore_by_id (const iot_agent_context_t *ctx, const
                                                uint32_t id, iot_agent_keystore_t **keystore)
Get a reference to a keystore based on its identifier.
```

Return Value

- IOT_STATUS_SUCCESS**: A keystore with the *id* was found in the agent's context and a pointer to it is returned in *keystore*.

Function `iot_agent_get_keystore_index_by_id`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_get_keystore_index_by_id (const iot_agent_context_t *ctx,
                                                const uint32_t id, size_t *index)
Get the index of a keystore based in its identifier.
```

Return Value

- IOT_STATUS_SUCCESS**: A keystore with the *id* was found in the agent's context and its index is returned in *index*.

Function `iot_agent_get_number_of_services`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
size_t iot_agent_get_number_of_services(const iot_agent_context_t *ctx)
```

Returns total number of services of all registered datastores.

Parameters

- [in] ctx: Context for the iot_agent.

Return Value

- Total: number of services of all registered datastores

Function `iot_agent_get_service_descriptor`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_get_service_descriptor(const iot_agent_context_t *ctx,  
                                              nxp_iot_ServiceDescriptor *service_descriptor)
```

Get the service descriptor of the currently selected service.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling *iot_agent_free_service_descriptor*. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

Parameters

- [in] ctx: The context of the agent.
- [out] service_descriptor: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function iot_agent_handle_request

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
bool iot_agent_handle_request (pb_istream_t *istream, pb_ostream_t *ostream, const pb_field_t
                             *message_type, void *context)
handle request by end point
```

Parameters

- [in] istream: Input stream
- [in] ostream: Output stream
- [in] message_type: a pointer to the message type fields array
- [in] context: End point context

Function iot_agent_init

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_init (iot_agent_context_t *ctx)
Initialize EdgeLock 2GO agent context memory with zeros.
```

Parameters

- [inout] ctx: EdgeLock 2GO agent context

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function iot_agent_init_dispatcher

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_init_dispatcher (iot_agent_dispatcher_context_t
                                             *dispatcher_context, iot_agent_context_t *agent_context,
                                             nxp_iot_ServiceDescriptor *service_descriptor,
                                             nxp_iot_UpdateStatusReport *status_report)
Initialize Dispatcher.
```

Parameters

- [in] dispatcher_context: Context for the dispatcher

- [in] agent_context: Context for the agent
- [in] service_descriptor: The service descriptor containing the connection parameters to connect to the EdgeLock 2GO cloud service.
- [out] status_report: A pointer to a structure that gets filled with a status report after the update is complete. If NULL is given, no status report is created.

Function `iot_agent_is_service_configuration_data_valid`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
bool iot_agent_is_service_configuration_data_valid(const iot_agent_context_t *ctx)
```

Checks whether service configuration data of all registered datastores is valid.

Parameters

- [in] ctx: Context for the iot_agent.

Return Value

- true: Service configuration data of all registered datastores is valid
- false: Service configuration data of a registered datastores is invalid

Function `iot_agent_keystore_close_session`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Function Documentation

```
void iot_agent_keystore_close_session(iot_agent_keystore_t *keystore)
```

Close a session/connection to a keystore.

Function `iot_agent_keystore_file_existence`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Function Documentation

```
iot_agent_status_t iot_agent_keystore_file_existence(const char *filename, bool forceCreation)
```

Checks existence of a file. If required it forces creation of file.

Parameters

- [in] filename: Name of the file
- [in] forceCreation: Switch to force creation of the file

Return Value

- IOT_AGENT_SUCCESS: upon success
- IOT_AGENT_FAILURE: upon failure

Function `iot_agent_keystore_free`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Function Documentation

`iot_agent_status_t iot_agent_keystore_free (iot_agent_keystore_t *keystore)`

Destroy the keystore.

Depending on the type of the keystore this is triggering actions on the keystore's context itself by calling the `_destroy()` function of the keystore interface.

This does not free the context of the keystore.

The keystore is not usable after a call to `iot_agent_keystore_free`.

Function `iot_agent_keystore_open_session`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Function Documentation

`iot_agent_status_t iot_agent_keystore_open_session (iot_agent_keystore_t *keystore)`

Open a session/connection to a keystore.

Function `iot_agent_register_datastore`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

`iot_agent_status_t iot_agent_register_datastore (iot_agent_context_t *ctx, iot_agent_datastore_t *datastore)`

Register datastore endpoint.

Note that the ownership for the datastore is not transferred. The caller is responsible that the datastore is freed at the appropriate time.

It is not possible to register two endpoints with the same identifier.

Parameters

- [in] ctx: Context for the `iot_agent`.
- [in] datastore: Datastore that is registered.

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function iot_agent_register_keystore

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_register_keystore(iot_agent_context_t *ctx, iot_agent_keystore_t*keystore)
```

Register a keystore endpoint.

Note that the ownership for the keystore is not transferred. The caller is responsible that the keystore is freed at the appropriate time.

It is not possible to register two endpoints with the same identifier.

Parameters

- *ctx*: Context for the iot_agent.
- [in] *keystore*: Keystore that is registered.

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function iot_agent_select_service_by_id

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_select_service_by_id(iot_agent_context_t *ctx, uint64_t service_id, nxp_iot_ServiceDescriptor *service_descriptor)
```

Select service by given ID.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling *iot_agent_free_service_descriptor*. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

See *iot_agent_is_service_configuration_data_valid*

Parameters

- [in] *ctx*: Context for the iot_agent.
- [in] *service_id*: ID of the service
- [out] *service_descriptor*: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function iot_agent_select_service_by_index

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_select_service_by_index (iot_agent_context_t *ctx, size_t index, nxp_iot_ServiceDescriptor *service_descriptor)
```

Select service by given index.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling *iot_agent_free_service_descriptor*. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

See *iot_agent_is_service_configuration_data_valid*

Parameters

- [in] ctx: Context for the iot_agent.
- [in] index: Index of the service
- [out] service_descriptor: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function iot_agent_service_free_service_descriptor

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Function Documentation

```
void iot_agent_service_free_service_descriptor (nxp_iot_ServiceDescriptor *service_descriptor)
```

Free all FT_POINTER fields of a service descriptor.

When selecting a service, a service descriptor is read from a datastore. A service descriptor can contain fields of variable length (binary data (certificates, etc.) or text (hostname, etc.)). Those fields use dynamically allocated memory. The memory is freed by calling this function.

Parameters

- [in] service_descriptor: Reference to service descriptor

Function iot_agent_service_get_number_of_services

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Function Documentation

```
size_t iot_agent_service_get_number_of_services (const iot_agent_datastore_t *ctx)
```

Get the number of services that are available.

Return The number of services that are available.

Parameters

- [in] ctx: Context for the iot_agent.

Function iot_agent_service_get_protocol_of_service_as_string

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Function Documentation

```
iot_agent_status_t iot_agent_service_get_protocol_of_service_as_string (const  
                           nxp_iot_ServiceDescriptor  
                           *service_descriptor,  
                           const char  
                           **buffer)
```

Get a textual description of the protocol.

Protocol strings are internal constant c-strings. This function returns a pointer to such a string, ownership remains with the iot_agent.

Parameters

- [in] service_descriptor: The service descriptor to get the protocol for.
- [out] buffer: A pointer to a c-string that is changed to point to the textual representation of the protocol.

Return Value

- IOT_AGENT_SUCCESS: The service type could be resolved.
- IOT_AGENT_FAILURE: The service type is invalid.

Function `iot_agent_service_get_service_descriptor_of_service`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Function Documentation

```
iot_agent_status_t iot_agent_service_get_service_descriptor_of_service(const
iot_agent_datastore_t
*datastore,
size_t offset,
nxp_iot_ServiceDescriptor
*service_descriptor)
```

Get the service descriptor of a service specified by offset.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling `iot_agent_free_service_descriptor`. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

See `iot_agent_is_service_configuration_data_valid`

Parameters

- [in] *ctx*: The datastore to query for the service.
- [in] *offset*: The offset of the service - the memory location in the given datastore.
- [out] *service_descriptor*: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function `iot_agent_service_get_service_offset_by_id`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Function Documentation

```
iot_agent_status_t iot_agent_service_get_service_offset_by_id(const
iot_agent_datastore_t
*ctx,      uint64_t    service_id,   size_t *offset,
nxp_iot_ServiceDescriptor
*service_descriptor)
```

Get the offset and the service descriptor of a service specified by service_id.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling `iot_agent_free_service_descriptor`. In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

See [iot_agent_is_service_configuration_data_valid](#)

Parameters

- [in] ctx: The datastore to query for the service.
- [in] service_id: ID of the service
- [out] offset: The offset of the service descriptor within the datastore.
- [out] service_descriptor: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function iot_agent_service_get_service_offset_by_index

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Function Documentation

```
iot_agent_status_t iot_agent_service_get_service_offset_by_index(const  
                           iot_agent_datastore_t  
                           *datastore,      size_t  
                           index,        size_t *offset,  
                           nxp_iot_ServiceDescriptor  
                           *service_descriptor)
```

Get the offset and the service descriptor of a service specified by index.

Pre The configuration data associated to the context is valid.

Post In case of success, the service_descriptor structure is filled and needs to be freed after usage by calling [iot_agent_free_service_descriptor](#). In case of failure no freeing is required. Also in case of failures, the contents of service_descriptor are not guaranteed to remain intact.

See [iot_agent_is_service_configuration_data_valid](#)

Parameters

- [in] ctx: The datastore to query for the service.
- [in] index: The index of the service (within the given datastore).
- [out] service_descriptor: Structure for holding a service descriptor. Must point to a valid service descriptor object upon invocation. Any FT_POINTER fields in the service descriptor are freed before changing the contents to the service_descriptor of the selected service.

Return Value

- IOT_AGENT_SUCCESS: Upon success

Function iot_agent_service_get_service_type_as_string

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Function Documentation

```
iot_agent_status_t iot_agent_service_get_service_type_as_string(const
    nxp_iot_ServiceDescriptor
    *service_descriptor,
    const char **buffer)
```

Get a textual description of the service type.

Service type strings are internal constant c-strings. This function returns a pointer to such a string, ownership remains with the iot_agent.

Parameters

- [in] service_descriptor: The service descriptor to get the type for.
- [out] buffer: A pointer to a c-string that is changed to point to the textual representation of the service type.

Return Value

- IOT_AGENT_SUCCESS: The service type could be resolved.
- IOT_AGENT_FAILURE: The service type is invalid.

Function iot_agent_service_is_configuration_data_valid

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Function Documentation

```
bool iot_agent_service_is_configuration_data_valid(const iot_agent_datastore_t *ctx)
```

Checks service configuration data of all registered datastores are valid.

Parameters

- [in] ctx: Context for the iot_agent.

Return Value

- true: Service configuration data of all registered datastores are valid
- false: Service configuration data of a registered datastores is invalid

Function iot_agent_session_connect

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_session.h

Function Documentation

iot_agent_status_t **iot_agent_session_connect** (ex_sss_boot_ctx_t **pSeBootCtx*)

Re-create an open a session with secure element

Parameters

- [in] pCtx: pointer to session context

Return Value

- IOT_AGENT_SUCCESS: upon success
- IOT_AGENT_FAILURE: upon failure

Function iot_agent_session_disconnect

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_session.h

Function Documentation

void **iot_agent_session_disconnect** (ex_sss_boot_ctx_t **pSeBootCtx*)

Disconnect and close session with secure element

Parameters

- [in] pCtx: pointer to session context

Function iot_agent_session_init

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_session.h

Function Documentation

iot_agent_status_t **iot_agent_session_init** (int *argc*, **const** char **argv*[], ex_sss_boot_ctx_t **pCtx*)

Create an open a session with secure element

Parameters

- [in] argc: arguments from command-line if any
- [in] argv: arguments from command-line if any
- [in] pCtx: pointer to session context

Return Value

- IOT_AGENT_SUCCESS: upon success
- IOT_AGENT_FAILURE: upon failure

Function iot_agent_set_edgelock2go_datastore

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_set_edgelock2go_datastore(iot_agent_context_t *ctx,
                                                       iot_agent_datastore_t *datastore)
```

Set the datastore that is used to hold the information to connect to the EdgeLock 2GO cloud service.

Note that the ownership for the datastore is not transferred. The caller is responsible that the datastore is freed at the appropriate time.

Function iot_agent_update_device_configuration

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_update_device_configuration(iot_agent_context_t *ctx,
                                                       nxp_iot_UpdateStatusReport *status_report)
```

Update device configuration Reach out to EdgeLock 2GO cloud service for checking and (if applicable) fetching configuration updates for the device.

Post In case of success, the status_report structure is filled using dynamically allocated fields and needs to be freed after usage by calling #iot_agent_free_status_report.

Parameters

- [in] ctx: Context for the iot_agent.
- [out] status_report: Provides a more detailed view on the operations performed during the update and its outcomes. If the argument is NULL, no detailed status is reported.

Return Value

- IOT_AGENT_SUCCESS: Upon success
- IOT_AGENT_FAILURE: Upon failure

Function iot_agent_update_device_configuration_from_constants

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Function Documentation

```
iot_agent_status_t iot_agent_update_device_configuration_from_constants(iot_agent_context_t
*agent_context,
uint32_t
client_key_object_id,
uint32_t
client_cert_object_id,
nxp_iot_UpdateStatusReport
*sta-
tus_report)
```

Update device configuration.

Reach out to EdgeLock 2GO cloud service for checking and (if applicable) fetching configuration updates for the device.

The connection details (hostname/port/server root certificates, etc.) are taken from the configuration constants in nxp_iot_agent_config.h.

It is necessary that an sss keystore that contains credentials (client key and client certificate) for connecting to the EdgeLock 2GO cloud service. The object ids to those credentials are settable via function arguments.

Post In case of success, the status_report structure is filled using dynamically allocated fields and needs to be freed after usage by calling #iot_agent_free_status_report.

Parameters

- [in] ctx: Context for the iot_agent.
- [out] status_report: Provides a more detailed view on the operations performed during the update and its outcomes. If the argument is NULL, no detailed status is reported.

Return Value

- IOT_AGENT_SUCCESS: Upon success
- IOT_AGENT_FAILURE: Upon failure

Function iot_agent_utils_convert_service2key_id

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Function Documentation

```
iot_agent_status_t iot_agent_utils_convert_service2key_id(uint64_t service_id, uint32_t
*key_id)
```

Maps a given service id to the range of keys that are managed by the EdgeLock 2GO cloud service.

Parameters

- [in] service_id: Service ID
- [out] key_id: Key ID

Return Value

- IOT_AGENT_SUCCESS: upon success
- IOT_AGENT_FAILURE: upon failure

Function iot_agent_utils_get_edgelock2go_certificate_id

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Function Documentation

```
iot_agent_status_t iot_agent_utils_get_edgelock2go_certificate_id(sss_key_store_t *key-
store, uint32_t *ob-
ject_id)
```

Checks whether a keystore contains the object with the defined certificate to use for authenticating at the EdgeLock 2GO cloud service.

The keystore might contain keys using ECC and/or RSA. If available, it will return the object id of the ECC certificate, otherwise the object id of the RSA certificate.

When neither is found or in case of other issues with the keystore, the function does not return IOT_AGENT_SUCCESS.

Function iot_agent_utils_get_edgelock2go_key_id

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Function Documentation

```
iot_agent_status_t iot_agent_utils_get_edgelock2go_key_id(sss_key_store_t *keystore,
uint32_t *object_id)
```

Checks whether a keystore contains the object with the defined key to use for authenticating at the EdgeLock 2GO cloud service.

The keystore might contain keys using ECC and/or RSA. If available, it will return the object id of the ECC key, otherwise the object id of the RSA key.

When neither is found or in case of other issues with the keystore, the function does not return IOT_AGENT_SUCCESS.

Function iot_agent_utils_write_edgelock2go_datastore

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Function Documentation

```
iot_agent_status_t iot_agent_utils_write_edgelock2go_datastore(iot_agent_keystore_t
*keystore,
iot_agent_datastore_t
*datastore, const char
*hostname, uint32_t port,
const pb_bytes_array_t
*trusted_root_ca_certificates)
```

Assemble a service descriptor for the connection to EdgeLock 2GO cloud service and write it to a datastore.

It is assumed that credentials (either ECC or RSA) for client certificate authentication are stored in `keystore`.

Function `iot_agent_utils_write_edgelock2go_datastore_from_env`

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Function Documentation

```
iot_agent_status_t iot_agent_utils_write_edgelock2go_datastore_from_env(iot_agent_keystore_t  
*keystore,  
iot_agent_datastore_t  
*datastore)
```

Assemble a service descriptor for the connection to EdgeLock 2GO cloud service and write it to a datastore.

Per default this function takes the hostname and port from the defines

- EDGELOCK2GO_HOSTNAME and
- EDGELOCK2GO_PORT

For testing purposes, it is possible to set-up the connection parameters to the EdgeLock 2GO cloud service from externally by passing in information via environment variables.

The following env variables are considered:

- IOT_AGENT_TEST_EDGELOCK2GO_HOSTNAME
- IOT_AGENT_TEST_EDGELOCK2GO_PORT

It is assumed that credentials (either ECC or RSA) for client certificate authentication are stored in `keystore`.

Function `main`

- Defined in file_sss_ex_inc_ex_sss_main_inc.h

Function Documentation

```
int main (int argc, const char *argv[])
```

Function `mbedtls_ecp_keypair_free_o`

- Defined in file_sss_plugin_mbedtls_sss_mbedtls.h

Function Documentation

```
void mbedtls_ecp_keypair_free_o (mbedtls_ecp_keypair *key)
```

This function frees the components of a key pair. Original implementation.

Parameters

- `key`: The key pair to free.

Function mbedtls_ecp_tls_read_group_o

- Defined in file_ss_plugin_mbedtls_sss_mbedtls.h

Function Documentation

```
int mbedtls_ecp_tls_read_group_o(mbedtls_ecp_group *grp, const unsigned char **buf, size_t
                                len)
                                same as mbedtls_ecp_tls_read_group
```

Function Se05x_API_CheckObjectExists

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_CheckObjectExists(pSe05xSession_t session_ctx, uint32_t objectID,
                                         SE05x_Result_t *presult)
```

Se05x_API_CheckObjectExists

Check if a Secure Object with a certain identifier exists or not.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_EXIST	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	4-byte existing Secure Object identifier.
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	1-byte SE05x_Result_t

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]
- [out] presult: [0:kSE05x_TAG_1]

Function Se05x_API_CipherFinal

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_CipherFinal (pSe05xSession_t session_ctx, SE05x_CryptoObjectID_t cryptoObjectID, const uint8_t *inputData, size_t inputDataLen, uint8_t *outputData, size_t *poutputDataLen)
```

Se05x_API_CipherFinal

Finish a sequence of cipher operations.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	SE05x_INS_t
P1	P1_CIPHER	See SE05x_P1_t
P2	P2_FINAL	See SE05x_P2_t
Lc	#(Payload)	
Payload	TLV[TAG_2]	2-byte Crypto Object identifier
TLV[TAG_3]	Input data	
Le	0x00	Expected returned data.

R-APDU Body

Value	Description
TLV[TAG_1]	Output data

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] cryptoObjectID: cryptoObjectID [1:kSE05x_TAG_2]
- [in] inputData: inputData [2:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] outputData: [0:kSE05x_TAG_1]
- [inout] poutputDataLen: Length for outputData

Function Se05x_API_CipherInit

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_CipherInit (pSe05xSession_t      session_ctx,      uint32_t      objectID,
                                SE05x_CryptoObjectID_t cryptoObjectID, const uint8_t *IV,
                                size_t IVLen, const SE05x_Cipher_Oper_t operation)
```

Se05x_API_CipherInit

Initialize a symmetric encryption or decryption. The Crypto Object keeps the state of the cipher operation until it's finalized or deleted. Once the CipherFinal function is executed successfully, the Crypto Object state returns to the state immediately after the previous CipherInit function.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_CIPHER	See <i>SE05x_P1_t</i>
P2	P2_ENCRYPT or P2_DECRYPT	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload	TLV[TAG_1]	4-byte identifier of the key object.
	TLV[TAG_2]	2-byte Crypto Object identifier
	TLV[TAG_4]	Initialization Vector [Optional] [Conditional: only when the Crypto Object type equals CC_CIPHER and subtype is not including ECB]
Le	•	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] cryptoObjectID: cryptoObjectID [2:kSE05x_TAG_2]
- [in] IV: IV [3:kSE05x_TAG_4]
- [in] IVLen: Length of IV
- [in] operation: See *SE05x_Cipher_Oper_t*

Function Se05x_API_CipherOneShot

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_CipherOneShot (pSe05xSession_t session_ctx, uint32_t objectID,
                                     SE05x_CipherMode_t cipherMode, const uint8_t *inputData,
                                     size_t inputDataLen, const uint8_t *IV, size_t
                                     IVLen, uint8_t *outputData, size_t *poutputDataLen, const
                                     SE05x_Cipher_Oper_OneShot_t operation)
```

Se05x_API_CipherOneShot.

Encrypt or decrypt data in one shot mode.

The key object must be either an AES key or DES key.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	SE05x_INS_t
P1	P1_CIPHER	See SE05x_P1_t
P2	P2_ENCRYPT_ONESHOT or P2_DECRYPT_ONESHOT	See SE05x_P2_t
Lc	#(Payload)	
Pay-load	TLV[TAG_1]	4-byte identifier of the key object.
	TLV[TAG_2]	1-byte CipherMode
	TLV[TAG_3]	Byte array containing input data.
	TLV[TAG_4]	Byte array containing an initialization vector. [Optional] [Conditional: only when the Crypto Object type equals CC_CIPHER and subtype is not including ECB]
Le	0x00	Expecting return data.

R-APDU Body

Value	Description
TLV[TAG_1]	Output data

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] objectID: The object id

- [in] cipherMode: The cipher mode
- [in] inputData: The input data
- [in] inputDataLen: The input data length
- [in] IV: Initial vector
- [in] IVLen: The iv length
- outputData: The output data
- poutputDataLen: The poutput data length
- [in] operation: The operation

Function Se05x_API_CipherUpdate

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_CipherUpdate (pSe05xSession_t session_ctx, SE05x_CryptoObjectID_t cryp-
toObjectID, const uint8_t *inputData, size_t inputDataLen,
uint8_t *outputData, size_t *poutputDataLen)
```

Se05x_API_CipherUpdate

Update a cipher context.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_CIPHER	See <i>SE05x_P1_t</i>
P2	P2_UPDATE	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload	TLV[TAG_2]	2-byte Crypto Object identifier
TLV[TAG_3]	Byte array containing input data	
Le	0x00	Expecting returned data.

R-APDU Body

Value	Description
TLV[TAG_1]	Output data

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] cryptoObjectID: cryptoObjectID [1:kSE05x_TAG_2]

- [in] inputData: inputData [2:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] outputData: [0:kSE05x_TAG_1]
- [inout] poutputDataLen: Length for outputData

Function Se05x_API_CloseSession

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_CloseSession** (pSe05xSession_t *session_ctx*)

Se05x_API_CloseSession

Closes a running session.

When a session is closed, it cannot be reopened.

All session parameters are transient.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_SESSION_CLOSE	See SE05x_P2_t

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The session is closed successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]

Function Se05x_API_CreateCounter

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

`smStatus_t Se05x_API_CreateCounter (pSe05xSession_t session_ctx, pSe05xPolicy_t policy, uint32_t objectID, uint16_t size)`

`Se05x_API_CreateCounter`

Creates a new counter object.

Counters can only be incremented, not decremented.

When a counter reaches its maximum value (e.g., 0xFFFFFFFF for a 4-byte counter), they cannot be incremented again.

An input value (TAG_3) must always have the same length as the existing counter (if it exists); otherwise the command will return an error.

Command to Applet

Field	Value	Description
P1	P1_COUNT	See <code>SE05x_P1_t</code>
P2	P2_DEFAULT	See <code>SE05x_P2_t</code>
Pay-load	TLV[TAG_POLICY]	array containing the object policy. [Optional: default policy applies] [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_1]	4-byte counter identifier.
	TLV[TAG_2]	2-byte counter size (1 up to 8 bytes). [Conditional: only if object doesn't exist yet and TAG_3 is not given]
	TLV[TAG_3]	Counter value [Optional: - if object doesn't exist: must be present if TAG_2 is not given. - if object exists: if not present, increment by 1. if present, set counter to value.]

R-APDU Body

NA

R-APDU Trailer

NA

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] policy: policy [1:kSE05x_TAG_POLICY]
- [in] objectID: object id [2:kSE05x_TAG_1]
- [in] size: size [3:kSE05x_TAG_2]

Function `Se05x_API_CreateCryptoObject`

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_CreateCryptoObject (pSe05xSession_t session_ctx,
                                         SE05x_CryptoObjectID_t cryptoObjec-
                                         tID,           SE05x_CryptoContext_t cryptoContext,
                                         SE05x_CryptoModeSubType_t subtype)
```

Se05x_API_CreateCryptoObject

Creates a Crypto Object on the SE05X . Once the Crypto Object is created, it is bound to the user who created the Crypto Object.

A CryptoObject is a 2-byte value consisting of a CryptoContext in MSB and one of the following in LSB:

- DigestMode in case CryptoContext = CC_DIGEST
- CipherMode in case CryptoContext = CC_CIPHER
- MACAlgo in case CryptoContext = CC_SIGNATURE
- AEADMode in case CryptoContext = CC_AEAD

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_WRITE	See SE05x_INS_t
P1	P1_CRYPTO	See SE05x_P1_t
P2	P2_DEFAULT	See SE05x_P2_t
Lc	#(Payload)	Payload length
Pay-load	TLV[TAG_1]	2-byte Crypto Object identifier
	TLV[TAG_2]	1-byte SE05x_CryptoObject_t
	TLV[TAG_3]	1-byte Crypto Object subtype, either from DigestModeRef, CipherMode, MACAlgo (depending on TAG_2) or AEADMode.

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The file is created or updated successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] cryptoObjectID: cryptoObjectID [1:kSE05x_TAG_1]
- [in] cryptoContext: cryptoContext [2:kSE05x_TAG_2]
- [in] subtype: 1-byte Crypto Object subtype, either from DigestMode, CipherMode or MACAlgo (depending on TAG_2). [3:kSE05x_TAG_3]

Function Se05x_API_CreateECCurve

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

`smStatus_t Se05x_API_CreateECCurve (pSe05xSession_t session_ctx, SE05x_ECCurve_t curveID)`
`Se05x_API_CreateECCurve`

Create an EC curve listed in ECCurve.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_WRITE	See SE05x_INS_t
P1	P1_CURVE	See SE05x_P1_t
P2	P2_CREATE	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	1-byte curve identifier (from SE05x_ECCurve_t).
Le		

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] curveID: curve id [1:kSE05x_TAG_1]

Function Se05x_API_CreateSession

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

`smStatus_t Se05x_API_CreateSession (pSe05xSession_t session_ctx, uint32_t authObjectID, uint8_t *sessionId, size_t *psessionIdLen)`
`Se05x_API_CreateSession`

Creates a session on SE05X .

Depending on the authentication object being referenced, a specific method of authentication applies. The response needs to adhere to this authentication method.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_SESSION_CREATE	See SE05x_P2_t
Lc	#(Payload)	Payload length.
Payload	TLV[TAG_1]	4-byte authentication object identifier.
Le	0x0A	Expecting TLV with 8-byte session ID.

R-APDU Body

Value	Description
TLV[TAG_1]	8-byte session identifier.

R-APDU Trailer

SW_NO_ERROR:

- The command is handled successfully.

SW_CONDITIONS_NOT_SATISFIED:

- The authenticator does not exist
- The provided input data are incorrect.
- The session is invalid.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] authObjectID: auth [1:kSE05x_TAG_1]
- [out] sessionId: [0:kSE05x_TAG_1]
- [inout] psessionIdLen: Length for sessionId

Function Se05x_API_DeleteAll

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DeleteAll (pSe05xSession_t session_ctx)
Se05x_API_DeleteAll
```

Delete all Secure Objects, delete all curves and Crypto Objects. Secure Objects that are trust provisioned by NXP are not deleted (i.e., all objects that have Origin set to ORIGIN_PROVISIONED, including the objects with reserved object identifiers listed in Object attributes).

This command can only be used from sessions that are authenticated using the credential with index RESERVED_ID_FACTORY_RESET.

Important : if a secure messaging session is up & running (e.g., AESKey or ECKey session) and the command is sent within this session, the response of the DeleteAll command will not be wrapped (i.e., not encrypted and

no R-MAC), so this will also break down the secure channel protocol (as the session is closed by the DeleteAll command itself).

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_DELETE_ALL	See SE05x_P2_t
Lc	0x00	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]

Function Se05x_API_DeleteAll_Iterative

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU.h

Function Documentation

```
smStatus_t Se05x_API_DeleteAll_Iterative(pSe05xSession_t session_ctx)
    Se05x_API_DeleteAll_Iterative
```

Go through each object and delete it individually.

This API does not use the Applet API [Se05x_API_DeleteAll](#). It does not delete ALL objects and purposefully skips few objects.

Instead, this API uses [Se05x_API_ReadIDList](#) and [Se05x_API_ReadCryptoObjectList](#) to first fetch list of objects to host, and **selectively** deletes.

For e.g. It does not kill objects from:

- The range SE05X_OBJID_SE05X_APPLET_RES_START to SE05X_OBJID_SE05X_APPLET_RES_END. This range is used by applet.
- The range EX_SSS_OBJID_DEMO_AUTH_START to EX_SSS_OBJID_DEMO_AUTH_END, which is used by middleware DEMOS for authentication.
- And others.

Kindly see the Implementation of is API [Se05x_API_DeleteAll_Iterative](#) to see the list of ranges that are skipped.

Return The status of API.

Parameters

- [in] session_ctx: Session Context

Function Se05x_API_DeleteCryptoObject

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DeleteCryptoObject (pSe05xSession_t           session_ctx,  
                                         SE05x_CryptoObjectID_t cryptoObjectID)  
Se05x_API_DeleteCryptoObject
```

Deletes a Crypto Object on the SE05X .

Note: when a Crypto Object is deleted, the memory (as mentioned in) is de- allocated, but the transient memory is only freed when de-selecting the applet!

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_CRYPTO_OBJ	See SE05x_P1_t
P2	P2_DELETE_OBJECT	See SE05x_P2_t
Lc	#(Payload)	Payload length
Payload	TLV[TAG_1]	2-byte Crypto Object identifier

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The file is created or updated successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] cryptoObjectID: cryptoObjectID [1:kSE05x_TAG_1]

Function Se05x_API_DeleteECCurve

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_DeleteECCurve** (pSe05xSession_t *session_ctx*, SE05x_ECCurve_t *curveID*)
Se05x_API_DeleteECCurve

Deletes an EC curve.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_CURVE	See SE05x_P1_t
P2	P2_DELETE_OBJECT	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	1-byte curve identifier (from SE05x_ECCurve_t)

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] curveID: curve id [1:kSE05x_TAG_1]

Function Se05x_API_DeleteSecureObject

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_DeleteSecureObject** (pSe05xSession_t *session_ctx*, uint32_t *objectID*)
Se05x_API_DeleteSecureObject

Deletes a Secure Object.

If the object origin = ORIGIN_PROVISIONED, an error will be returned and the object is not deleted.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_DELETE_OBJECT	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	4-byte existing Secure Object identifier.
Le	•	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The file is created or updated successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]

Function Se05x_API_DFAuthenticateFirstPart1

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DFAuthenticateFirstPart1 (pSe05xSession_t session_ctx, uint32_t objectID, const uint8_t *inputData, size_t inputDataLen, uint8_t *outputData, size_t *poutputDataLen)
```

Se05x_API_DFAuthenticateFirstPart1

MIFARE DESFire support

MIFARE DESFire EV2 Key derivation (S-mode). This is limited to AES128 keys only.

The SE05X can be used by a card reader to setup a session where the SE05X stores the master key(s) and the session keys are generated and passed to the host.

The SE05X keeps an internal state of MIFARE DESFire authentication data during authentication setup. This state is fully transient, so it is lost on deselect of the applet.

The MIFARE DESFire state is owned by 1 user at a time; i.e., the user who calls DFAuthenticateFirstPart1 owns the MIFARE DESFire context until DFAuthenticateFirstPart1 is called again or until DFKillAuthentication is called.

The SE05X can also be used to support a ChangeKey command, either supporting ChangeKey or ChangeKeyEV2. To establish a correct use case, policies need to be applied to the keys to indicate keys can be used for ChangeKey or not, etc. (to be detailed)

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_AUTH_FIRST_PART1	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	4-byte key identifier.
	TLV[TAG_2]	16-byte encrypted card challenge: E(Kx,RndB)
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	32-byte output data: E(Kx, RandA RandB')

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] inputData: inputData [2:kSE05x_TAG_2]
- [in] inputDataLen: Length of inputData
- [out] outputData: [0:kSE05x_TAG_1]
- [inout] poutputDataLen: Length for outputData

Function Se05x_API_DFAuthenticateFirstPart2

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DFAuthenticateFirstPart2 (pSe05xSession_t session_ctx, const uint8_t
                                              *inputData, size_t inputDataLen, uint8_t *out-
                                              putData, size_t *poutputDataLen)
```

Se05x_API_DFAuthenticateFirstPart2

For First part 2, the key identifier is implicitly set to the identifier used for the First authentication. DFAuthenticateFirstPart1 needs to be called before; otherwise an error is returned.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_AUTH_FIRST_PART2	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	32 byte input: E(Kx,TI RndA' PDcap2 PCDcap2)
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	12-byte array returning PDcap2 PCDcap2.

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.
SW_WRONG_DATA	
SW_CONDITIONS_NOT_SATISFIED	

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] inputData: inputData [1:kSE05x_TAG_1]
- [in] inputDataLen: Length of inputData
- [out] outputData: [0:kSE05x_TAG_1]
- [inout] poutputDataLen: Length for outputData

Function Se05x_API_DFAuthenticateNonFirstPart1

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DFAuthenticateNonFirstPart1(pSe05xSession_t session_ctx, uint32_t objectID, const uint8_t *inputData, size_t inputDataLen, uint8_t *outputData, size_t *poutputDataLen)
```

Se05x_API_DFAuthenticateNonFirstPart1

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_AUTH_NONFIRST_PART1	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	4-byte key identifier.
	TLV[TAG_2]	16-byte encrypted card challenge: E(Kx,RndB)
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	32-byte output data: E(Kx, RandA RandB')

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] inputData: inputData [2:kSE05x_TAG_2]
- [in] inputDataLen: Length of inputData
- [out] outputData: [0:kSE05x_TAG_1]
- [inout] poutputDataLen: Length for outputData

Function Se05x_API_DFChangeKeyPart1

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DFChangeKeyPart1 (pSe05xSession_t session_ctx, uint32_t oldObjectID,
                                         uint32_t newObjectID, uint8_t keySetNr, uint8_t keyN-
                                         oDESFire, uint8_t keyVer, uint8_t *KeyData, size_t
                                         *pKeyDataLen)
```

Se05x_API_DFChangeKeyPart1

The DFChangeKeyPart1 command is supporting the function to change keys on the DESFire PICC. The command generates the cryptogram required to perform such operation.

The new key and, if used, the current (or old) key must be stored in the SE05X and have the POLICY_OBJ_ALLOW_DESFIRE_AUTHENTICATION associated to execute this command. This means the new PICC key must have been loaded into the SE05X prior to issuing this command.

The 1-byte key set number indicates whether DESFire ChangeKey or DESFire ChangeKeyEV2 is used. When key set equals 0xFF, ChangeKey is used.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_CHANGE_KEY	SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	4-byte identifier of the old key. [Optional: if the authentication key is the same as the key to be replaced, this TAG should not be present].
	TLV[TAG_2]	4-byte identifier of the new key.
	TLV[TAG_3]	1-byte key set number [Optional: default = 0xC6]
	TLV[TAG_4]	1-byte DESFire key number to be targeted.
	TLV[TAG_5]	1-byte key version
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	Cryptogram holding key data

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] oldObjectID: oldObjectID [1:kSE05x_TAG_1]
- [in] newObjectID: newObjectID [2:kSE05x_TAG_2]
- [in] keySetNr: keySetNr [3:kSE05x_TAG_3]
- [in] keyNoDESFire: keyNoDESFire [4:kSE05x_TAG_4]
- [in] keyVer: keyVer [5:kSE05x_TAG_5]
- [out] KeyData: [0:kSE05x_TAG_1]
- [inout] pKeyDataLen: Length for KeyData

Function Se05x_API_DFChangeKeyPart2

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DFChangeKeyPart2 (pSe05xSession_t session_ctx, const uint8_t *MAC, size_t  
                          MACLen, uint8_t *presult)
```

Se05x_API_DFChangeKeyPart2

The DFChangeKeyPart2 command verifies the MAC returned by ChangeKey or ChangeKeyEV2. Note that this function only needs to be called if a MAC is returned (which is not the case if the currently authenticated key is changed on the DESFire card).

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_CHANGE_KEY_PART2	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	MAC
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	1-byte <i>SE05x_Result_t</i>

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] MAC: MAC [1:kSE05x_TAG_1]
- [in] MACLen: Length of MAC
- [out] presult: [0:kSE05x_TAG_1]

Function Se05x_API_DFDiversifyKey

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DFDiversifyKey (pSe05xSession_t session_ctx, uint32_t masterKeyID, uint32_t diversifiedKeyID, const uint8_t *divInputData, size_t divInputDataLen)
```

Se05x_API_DFDiversifyKey

Create a Diversified Key. Input is *divInput* 1 up to 31 bytes.

Note that users need to create the diversified key object before calling this function.

Both the master key and the diversified key need the policy POLICY_OBJ_ALLOW_DESFire_AUTHENTICATION to be set.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_DIVERSIFY	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	4-byte master key identifier.
	TLV[TAG_2]	4-byte diversified key identifier.
	TLV[TAG_3]	Byte array containing divInput (up to 31 bytes).
Le		

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.
SW_CONDITIONS_NOT_SATISFIED	No master key found.
	Wrong length for divInput.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] masterKeyID: masterKeyID [1:kSE05x_TAG_1]
- [in] diversifiedKeyID: diversifiedKeyID [2:kSE05x_TAG_2]
- [in] divInputData: divInputData [3:kSE05x_TAG_3]
- [in] divInputDataLen: Length of divInputData

Function Se05x_API_DFDumpSessionKeys

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DFDumpSessionKeys (pSe05xSession_t session_ctx, uint8_t *sessionData,
                                         size_t *psessionDataLen)
```

Se05x_API_DFAuthenticateNonFirstPart2

For NonFirst part 2, the key identifier is implicitly set to the identifier used for the NonFirst part 1 authentication. DFAuthenticateNonFirstPart1 needs to be called before; otherwise an error is returned.

If authentication fails, SW_WRONG_DATA will be returned.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_AUTH_NONFIRST_PART2	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	16-byte E(Kx, RndA')
Le	0x00	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

```
@param[in] session_ctx Session Context [0:kSE05x_pSession] @param[in] inputData in-
putData [1:kSE05x_TAG_1] @param[in] inputDataLen Length of inputData
```

/

```
smStatus_t Se05x_API_DFAuthenticateNonFirstPart2( pSe05xSession_t session_ctx, const uint8_t input-
Data, size_t inputDataLen);
```

```
/* Se05x_API_DFDumpSessionKeys
```

Dump the Transaction Identifier and the session keys to the host.

Command to Applet

```
verbatim embed:rst:leading-asterisk +-----+-----+ | Field |
Value | Description | +=====+=====+=====+=====+
| CLA | 0x80 | | +-----+-----+ | INS | INS_CRYPTO | |
SE05x_INS_t | +-----+-----+ | P1 | P1_DEFAULT | See
SE05x_P1_t | +-----+-----+ | P2 | P2_DUMP_KEY | See
```

```
SE05x_P2_t | +-----+-----+-----+-----+ | Lc | #(Payload) | | +-----+
+-----+-----+-----+-----+ | Le | 0x28 | Expecting TLV with 38 bytes data. |-----+
+-----+-----+-----+-----+
```

R-APDU Body

Value	Description
TLV[TAG_1]	38 bytes: KeyID.SesAuthENCKey KeyID.SesAuthMACKey TI Cmd-Ctr

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [out] sessionData: 38 bytes: KeyID.SesAuthENCKey || KeyID.SesAuthMACKey || TI || Cmd-Ctr [0:kSE05x_TAG_1]
- [inout] psessionDataLen: Length for sessionData

Function Se05x_API_DFKillAuthentication

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_DFKillAuthentication** (pSe05xSession_t *session_ctx*)
Se05x_API_DFKillAuthentication

DFKillAuthentication invalidates any authentication and clears the internal DESFire state. Keys used as input (master keys or diversified keys) are not touched.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_KILL_AUTH	See <i>SE05x_P2_t</i>
Lc	#(Payload)	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]

Function Se05x_API_DigestFinal

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DigestFinal (pSe05xSession_t session_ctx, SE05x_CryptoObjectID_t cryptoObjectID, const uint8_t *inputData, size_t inputDataLen, uint8_t *cmacValue, size_t *pcmacValueLen)
```

Se05x_API_DigestFinal

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_FINAL	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_2]	2-byte Crypto Object identifier
	TLV[TAG_3]	Data to be encrypted or decrypted.
Le	0x00	Expecting TLV with hash value.

R-APDU Body

Value	Description
TLV[TAG_1]	CMAC value

R-APDU Trailer

SW	Description
SW_NO_ERROR	The hash is created successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] cryptoObjectID: cryptoObjectID [1:kSE05x_TAG_2]
- [in] inputData: inputData [2:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] cmacValue: [0:kSE05x_TAG_1]
- [inout] pcmacValueLen: Length for cmacValue

Function Se05x_API_DigestInit

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_DigestInit** (pSe05xSession_t *session_ctx*, SE05x_CryptoObjectID_t *cryptoObjectID*)
Se05x_API_DigestInit

Open a digest operation. The state of the digest operation is kept in the Crypto Object until the Crypto Object is finalized or deleted.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_INIT	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_2]	2-byte Crypto Object identifier

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] *session_ctx*: Session Context [0:kSE05x_pSession]
- [in] *cryptoObjectID*: cryptoObjectID [1:kSE05x_TAG_2]

Function Se05x_API_DigestOneShot

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_DigestOneShot** (pSe05xSession_t *session_ctx*, uint8_t *digestMode*, **const**
 uint8_t **inputData*, size_t *inputDataLen*, uint8_t **hashValue*,
 size_t **phashValueLen*)
Se05x_API_DigestOneShot

Performs a hash operation in one shot (without context).

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_ONESHOT	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	1-byte DigestMode (except DIGEST_NO_HASH)
	TLV[TAG_2]	Data to hash.
Le	0x00	TLV expecting hash value

R-APDU Body

Value	Description
TLV[TAG_1]	Hash value.

R-APDU Trailer

SW	Description
SW_NO_ERROR	The hash is created successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] digestMode: digestMode [1:kSE05x_TAG_1]
- [in] inputData: inputData [2:kSE05x_TAG_2]
- [in] inputDataLen: Length of inputData
- [out] hashValue: [0:kSE05x_TAG_1]
- [inout] phashValueLen: Length for hashValue

Function Se05x_API_DigestUpdate

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_DigestUpdate(pSe05xSession_t session_ctx, SE05x_CryptoObjectID_t cryptoObjectID, const uint8_t *inputData, size_t inputDataLen)
Se05x_API_DigestUpdate
```

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_UPDATE	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_2]	2-byte Crypto Object identifier
	TLV[TAG_3]	Data to be hashed.
Le		

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] cryptoObjectID: cryptoObjectID [1:kSE05x_TAG_2]
- [in] inputData: inputData [2:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData

Function Se05x_API_EC_CurveGetId

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU.h

Function Documentation

```
smStatus_t Se05x_API_EC_CurveGetId(pSe05xSession_t      session_ctx,      uint32_t      objectID,
                                         SE05x_ECCurve_t *pcurveId)
```

Get the Curve ID for existing Key.

This API is functionally same as [Se05x_API_GetECCurveId](#) but uses [SE05x_ECCurve_t](#) as a type instead of uint8_t.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] objectID: The object id
- pcurveId: The pcurve identifier

Function Se05x_API_ECDAASign

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ECDAASign (pSe05xSession_t session_ctx, uint32_t objectID,
                                SE05x_ECDAASignatureAlgo_t ecdaaSignAlgo, const uint8_t *inputData, size_t inputDataLen, const uint8_t *randomData, size_t randomDataLen, uint8_t *signature, size_t *psignatureLen)
```

Se05x_API_ECDAASign

The ECDAASign command signs external data using the indicated key pair or private key. This is performed according to ECDAA. The generated signature is:

- $r = \text{random mod } n$
- $s = (r + T.ds) \text{ mod } n$ where d is the private key

The ECDAASignatureAlgo indicates the applied algorithm.

This APDU command should be used with a key identifier linked to TPM_ECC_BN_P256 curve.

Note: The applet allows the random input to be 32 bytes of zeroes; the user must take care that this is not considered as valid input. Only input in the interval [1, n-1] must be considered as valid.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_SIGNATURE	See <i>SE05x_P1_t</i>
P2	P2_SIGN	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	4-byte identifier of EC key pair or private key.
	TLV[TAG_2]	1-byte ECDAASignatureAlgo
	TLV[TAG_3]	T = 32-byte array containing hashed input data.
	TLV[TAG_4]	r = 32-byte array containing random data, must be in the interval [1, n-1] where n is the order of the curve.
Le	0x00	Expecting signature

R-APDU Body

Value	Description
TLV[TAG_1]	ECDSA Signature (r concatenated with s).

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]

- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] ecdaaSignAlgo: ecdaaSignAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [in] randomData: randomData [4:kSE05x_TAG_4]
- [in] randomDataLen: Length of randomData
- [out] signature: [0:kSE05x_TAG_1]
- [inout] psignatureLen: Length for signature

Function Se05x_API_ECDHGenerateSharedSecret

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ECDHGenerateSharedSecret (pSe05xSession_t session_ctx, uint32_t objectID, const uint8_t *pubKey, size_t pubKeyLen, uint8_t *sharedSecret, size_t *psharedSecretLen)
```

Se05x_API_ECDHGenerateSharedSecret

The ECDHGenerateSharedSecret command generates a shared secret ECC point on the curve using an EC private key on SE05X and an external public key provided by the caller. The output shared secret is returned to the caller.

All curves from ECCurve are supported, except ECC_ED_25519.

Note that ECDHGenerateSharedSecret commands with EC keys using curve ID_ECC_MONT_DH_25519 or ID_ECC_MONT_DH_448 cause NVM write operations for each call. This is not the case for the other curves.

When CONFIG_FIPS_MODE_DISABLED is not set, this function will always return SW_CONDITIONS_NOT_SATISFIED.

The shared secret can only be received when the Secure Object containing the key pair or private key (TLV[TAG_1]) does not contain the policy POLICY_OBJ_FORBID_DERIVED_OUTPUT. If that is the case, the user must provide TLV[TAG_7} to store the shared secret in an HMACKey object. The user is responsible to assign the correct size of the HMACKey object: this must equal the size of the shared secret exactly.

On applet 4.4.0, the policy POLICY_OBJ_FORBID_DERIVED_OUTPUT is not yet verified for this function. It will always be allowed.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_EC	See <i>SE05x_P1_t</i>
P2	P2_DH	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload	TLV[TAG_1]	4-byte identifier of the key pair or private key.
TLV[TAG_2]	External public key (see ECKeyRef).	
TLV[TAG_7]	4-byte HMACKey identifier to store output. [Optional]	
Le	0x00	Expected shared secret length.

R-APDU Body

Value	Description
TLV[TAG_1]	The returned shared secret. [Conditional: only when the input does not contain TLV[TAG_7].}

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] pubKey: pubKey [2:kSE05x_TAG_2]
- [in] pubKeyLen: Length of pubKey
- [out] sharedSecret: [0:kSE05x_TAG_1]
- [inout] psharedSecretLen: Length for sharedSecret

Function Se05x_API_ECDSASign

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ECDSASign (pSe05xSession_t session_ctx, uint32_t objectID,
                                SE05x_ECSignatureAlgo_t ecSignAlgo, const uint8_t *inputData,
                                size_t inputDataLen, uint8_t *signature, size_t *psignatureLen)
```

Se05x_API_ECDSASign

The ECDSASign command signs external data using the indicated key pair or private key.

The ECSignatureAlgo indicates the ECDSA algorithm that is used, but the hashing of data always must be done on the host. E.g., if ECSignatureAlgo = SIG_ECDSA_SHA256, the user must have applied SHA256 on the input data already.

The user must take care of providing the correct input length; i.e., the data input length (TLV[TAG_3]) must match the digest indicated in the signature algorithm (TLV[TAG_2]).

In any case, the APDU payload must be smaller than MAX_APDU_PAYLOAD_LENGTH.

This is performed according to the ECDSA algorithm as specified in [ANSI X9.62]. The signature (a sequence of two integers ‘r’ and ‘s’) as returned in the response adheres to the ASN.1 DER encoded formatting rules for integers.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	SE05x_INS_t
P1	P1_SIGNATURE	See SE05x_P1_t
P2	P2_SIGN	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	4-byte identifier of EC key pair or private key.
	TLV[TAG_2]	1-byte ECSignatureAlgo.
	TLV[TAG_3]	Byte array containing input data.
Le	0x00	Expecting ASN.1 signature

R-APDU Body

Value	Description
TLV[TAG_1]	ECDSA Signature in ASN.1 format.

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] ecSignAlgo: ecSignAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] signature: [0:kSE05x_TAG_1]
- [inout] psignatureLen: Length for signature

Function Se05x_API_ECDSAVerify

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ECDSAVerify (pSe05xSession_t      session_ctx,      uint32_t      objectID,
                                SE05x_ECSignatureAlgo_t ecSignAlgo, const uint8_t *in-
                                putData, size_t inputDataLen, const uint8_t *signature, size_t
                                signatureLen, SE05x_Result_t *presult)
```

Se05x_API_ECDSAVerify

The ECDSAVerify command verifies whether the signature is correct for a given (hashed) data input using an EC public key or EC key pair's public key.

The ECSignatureAlgo indicates the ECDSA algorithm that is used, but the hashing of data must always be done on the host. E.g., if ECSignatureAlgo = SIG_ECDSA_SHA256, the user must have applied SHA256 on the input data already.

The key cannot be passed externally to the command directly. In case users want to use the command to verify signatures using different public keys or the public key value regularly changes, the user should create a transient key object to which the key value is written and then the identifier of that transient secure object can be used by this ECDSAVerify command.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_SIGNATURE	See <i>SE05x_P1_t</i>
P2	P2_VERIFY	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	4-byte identifier of the key pair or public key.
	TLV[TAG_2]	1-byte ECSignatureAlgo.
	TLV[TAG_3]	Byte array containing ASN.1 signature
	TLV[TAG_5]	Byte array containing hashed data to compare.
Le	0x03	Expecting TLV with <i>SE05x_Result_t</i>

R-APDU Body

Value	Description
TLV[TAG_1]	Result of the signature verification (<i>SE05x_Result_t</i>).

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.
SW_CONDITIONS_NOT_SATISFIED	Incorrect data

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]

- [in] ecSignAlgo: ecSignAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [in] signature: signature [4:kSE05x_TAG_5]
- [in] signatureLen: Length of signature
- [out] presult: [0:kSE05x_TAG_1]

Function Se05x_API_EdDSASign

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_EdDSASign (pSe05xSession_t      session_ctx,      uint32_t      objectID,
                                SE05x_EDSignatureAlgo_t edSignAlgo, const uint8_t *inputData,
                                size_t inputDataLen, uint8_t *signature, size_t *psignatureLen)
```

Se05x_API_EdDSASign

The EdDSASign command signs external data using the indicated key pair or private key (using a Twisted Edwards curve). This is performed according to the EdDSA algorithm as specified in [RFC8032].

The input data need to be the plain data (not hashed).

The signature as returned in the response is a 64-byte array, being the concatenation of the signature r and s component (without leading zeroes for sign indication).

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_SIGNATURE	See <i>SE05x_P1_t</i>
P2	P2_SIGN	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	4-byte identifier of EC key pair or private key.
	TLV[TAG_2]	1-byte EDSignatureAlgo
	TLV[TAG_3]	Byte array containing plain input data.
Le	0x00	Expecting signature

R-APDU Body

Value	Description
TLV[TAG_1]	EdDSA Signature (r concatenated with s).

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] edSignAlgo: edSignAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] signature: [0:kSE05x_TAG_1]
- [inout] psignatureLen: Length for signature

Function Se05x_API_EdDSAVerify

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_EdDSAVerify (pSe05xSession_t      session_ctx,      uint32_t      objectID,
                                    SE05x_EDSignatureAlgo_t edSignAlgo, const uint8_t *in-
                                    putData, size_t inputDataLen, const uint8_t *signature, size_t
                                    signatureLen, SE05x_Result_t *presult)
```

Se05x_API_EdDSAVerify

The EdDSAVerify command verifies whether the signature is correct for a given data input (hashed using SHA512) using an EC public key or EC key pair's public key. The signature needs to be given as concatenation of r and s.

The data needs to be compared with the plain message without being hashed.

Note : See chapter 7 for correct byte order as both r and s need to be byte swapped.

This is performed according to the EdDSA algorithm as specified in [RFC8032].

The key cannot be passed externally to the command directly. In case users want to use the command to verify signatures using different public keys or the public key value regularly changes, the user should create a transient key object to which the key value is written and then the identifier of that transient secure object can be used by this EdDSAVerify command.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_SIGNATURE	See <i>SE05x_P1_t</i>
P2	P2_VERIFY	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
	TLV[TAG_1]	4-byte identifier of the key pair or public key.
	TLV[TAG_2]	1-byte EDSignatureAlgoRef.
	TLV[TAG_3]	64-byte array containing the signature (concatenation of r and s).
	TLV[TAG_5]	Byte array containing plain data to compare.
Le	0x03	Expecting TLV with <i>SE05x_Result_t</i>

R-APDU Body

Value	Description
TLV[TAG_1]	Result of the signature verification (<i>SE05x_Result_t</i>).

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.
SW_CONDITIONS_NOT_SATISFIED	Incorrect data

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] edSignAlgo: edSignAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [in] signature: signature [4:kSE05x_TAG_5]
- [in] signatureLen: Length of signature
- [out] presult: [0:kSE05x_TAG_1]

Function Se05x_API_ExchangeSessionData

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_ExchangeSessionData** (pSe05xSession_t *session_ctx*, pSe05xPolicy_t *policy*)
Se05x_API_ExchangeSessionData

Sets session policies for the current session.

Command to Applet

Field	Value	Description
CLA	0x80 or 0x84	•
INS	INS_MGMT	See <i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_SESSION_POLICY	See P2
Lc	#(Payload)	Payload length.
Payload	TLV[TAG_1]	Session policies
	C-MAC	If applicable
Le	0x00	•

R-APDU Body

Value	Description
R-MAC	Optional, depending on established security level

SW	Description
SW_NO_ERROR	The command is handled successfully.
SW_CONDITIONS_NOT_SATISFIED	Invalid policies

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] policy: Check pdf [1:kSE05x_TAG_1]

Function Se05x_API_ExportObject

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ExportObject (pSe05xSession_t      session_ctx,      uint32_t      objectID,
                                     SE05x_RSAKeyComponent_t  rsaKeyComp,  uint8_t *data,
                                     size_t *pdataLen)
```

Se05x_API_ExportObject

Reads a transient Secure Object from SE05X.

Secure Objects can be serialized so the Secure Object can be represented as a byte array. The byte array contains all attributes of the Secure Object, as well as the value (including the secret part!) of the object.

The purpose of the serialization is to be able to allow export and import of Secure Objects. Serialized Secure Objects can be reconstructed so they can be used as a (normal) Secure Object. Any operation like key or file management and crypto operation can only be done on a deserialized Secure Object.

Users can export transient Secure Objects to a non-trusted environment (e.g., host controller). The object must be AESKey, DESKey, RSAKey or ECCKey.

Exported credentials are always encrypted and MAC'ed.

The following steps are taken:

- The secure element holds a randomly generated persistent 256-bit AES cipher and an 128-bit AES CMAC key. Both keys do not require user interaction, they are internal to the SE05X .
- A Secure Object that is identified for export is serialized. This means the key value as well as all Secure Object attributes are stored as byte array (see Object attributes for attribute details).
- The serialized Secure Object is encrypted using AES CBC (no padding) and using the default IV.
- A CMAC is applied to the serialized Secure Object + metadata using the AES CMAC key.
- The byte array is exported.

An object may only be imported into the store if the SecureObject ID and type are the same as the exported object. Therefore, it is not possible to import if the corresponding object in the applet has been deleted.

NOTES:

- The exported object is not deleted automatically.
- The timestamp has a 100msec granularity, so it is possible to export multiple times with the same timestamp. The freshness (user input) should avoid duplicate attestation results as the user has to provide different freshness input.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t .
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_EXPORT	See SE05x_P2_t
Lc	#(Payload)	Payload Length.
	TLV[TAG_1]	4-byte object identifier
	TLV[TAG_2]	1-byte SE05x_RSAKeyComponent_t (only applies to Secure Objects of type RSAKey).
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	Byte array containing exported Secure Object data.

R-APDU Trailer

SW	Description
SW_NO_ERROR	The file is created or updated successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]
- [in] rsaKeyComp: rsaKeyComp [2:kSE05x_TAG_2]
- [out] data: [0:kSE05x_TAG_1]
- [inout] pdataLen: Length for data

Function [Se05x_API_GetECCurveld](#)

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_GetECCurveId(pSe05xSession_t session_ctx, uint32_t objectID, uint8_t *pcurveId)
Se05x_API_GetECCurveId
```

Get the curve associated with an EC key.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t
P1	P1_CURVE	See SE05x_P1_t
P2	P2_ID	See SE05x_P2_t
Lc	#(Payload)	
Payload	TLV[TAG_1]	4-byte identifier
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	1-byte curve identifier (from SE05x_ECCurve_t)

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]
- [out] pcurveId: [0:kSE05x_TAG_1]

Function Se05x_API_GetFreeMemory

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_GetFreeMemory(pSe05xSession_t session_ctx, SE05x\_MemoryType\_t memoryType, uint16_t *pfreeMem)
Se05x_API_GetFreeMemory
```

Gets the amount of free memory. MemoryType indicates the type of memory.

The result indicates the amount of free memory. Note that behavior of the function might not be fully linear and can have a granularity of 16 bytes where the applet will typically report the “worst case” amount. For example, when allocating 2 bytes a time, the first report will show 16 bytes being allocated, which remains the same for the next 7 allocations of 2 bytes.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_MEMORY	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	SE05x_MemTyp_t
Le	0x04	Expecting TLV with 2-byte data.

R-APDU Body

Value	Description
TLV[TAG_1]	12 bytes indicating the amount of free memory of the requested memory type. 0x7FFF as response means at least 32768 bytes are available.

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] memoryType: The memory type
- pfreeMem: The pfree memory

Function **Se05x_API_GetRandom**

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_GetRandom(pSe05xSession_t session_ctx, uint16_t size, uint8_t *randomData,  
size_t *randomDataLen)
```

Se05x_API_GetRandom

Gets random data from the SE05X .

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_RANDOM	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	2-byte requested size.
Le	0x00	Expecting random data

R-APDU Body

Value	Description
TLV[TAG_1]	Random data.

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] size: The size
- randomData: The random data
- prandomDataLen: The prandom data length

Function Se05x_API_GetTimestamp

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_GetTimestamp(pSe05xSession_t session_ctx, SE05x_TimeStamp_t *ptimeStamp)
Se05x_API_GetTimestamp
```

Gets a monotonic counter value (time stamp) from the operating system of the device (both persistent and transient part). See TimestampFunctionality for details on the timestamps.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_TIME	See SE05x_P2_t
Lc	#(Payload)	
Le	0x2C	Expecting TLV with timestamp.

R-APDU Body

Value	Description
TLV[TAG_1]	TLV containing a 12-byte operating system timestamp.

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- ptimeStamp: The ptime stamp

Function Se05x_API_GetVersion

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_GetVersion(pSe05xSession_t session_ctx, uint8_t *pappletVersion, size_t *appletVersionLen)
```

Se05x_API_GetVersion

Gets the applet version information.

This will return 7-byte VersionInfo (including major, minor and patch version of the applet, supported applet features and secure box version).

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See <i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_VERSION or P2_VERSION_EXT	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Le	0x00	Expecting TLV with 7-byte data (when P2 = P2_VERSION) or a TLV with 37 byte data (when P2= P2_VERSION_EXT).

R-APDU Body

Value	Description
TLV[TAG]	7-byte VersionInfoRef (if P2 = P2_VERSION) or 7-byte VersionInfo followed by 30 bytes extendedFeatureBits (if P2 = P2_VERSION_EXT)

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- pappletVersion: The applet version
- appletVersionLen: The applet version length

Function Se05x_API_HKDF

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_HKDF (pSe05xSession_t session_ctx, uint32_t hmacID, SE05x_DigestMode_t digestMode, const uint8_t *salt, size_t saltLen, const uint8_t *info, size_t infoLen, uint16_t deriveDataLen, uint8_t *hkdfOutput, size_t *phkdfOutputLen)
```

Se05x_API_HKDF

Note that this KDF is equal to the KDF in Feedback Mode described in [NIST SP800-108] with the PRF being HMAC with SHA256 and with an 8-bit counter at the end of the iteration variable.

The full HKDF algorithm is executed, i.e. Extract-And-Expand.

The caller must provide a salt length (0 up to 64 bytes). If salt length equals 0 or salt is not provided as input, the default salt will be used.

The output of the HKDF functions can be either:

- send back to the caller => *precondition* : none of the input Secure Objects -if present- shall have a policy POLICY_OBJ_FORBID_DERIVED_OUTPUT set.
- be stored in a Secure Object => *precondition* : the Secure Object must be created upfront and the size must exactly match the expected length.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_HKDF	See SE05x_P2_t
Lc	#(Payload)	
Payload	TLV[TAG_1]	4-byte HMACKey identifier (= IKM)
TLV[TAG_2]	2-byte DigestMode (except DIGEST_NO_HASH)	
TLV[TAG_3]	Byte array (0-64 bytes) containing salt. [Optional] [Conditional: only when TLV[TAG_6] is absent.]	
TLV[TAG_4]	Info: The context and information to apply (1 to 80 bytes). [Optional]	
TLV[TAG_5]	2-byte requested length (L): 1 up to MAX_APDU_PAYLOAD_LENGTH	
TLV[TAG_6]	64-byte HMACKey identifier containing salt. [Optional] [Conditional: only when TLV[TAG_3] is absent]	
TLV[TAG_7]	74-byte HMACKey identifier to store output. [Optional]	
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	HKDF output. [Conditional: only when the input does not contain TLV[TAG-7]]

R-APDU Trailer

SW	Description
SW_NO_ERROR	The HKDF is executed successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] hmacID: hmacID [1:kSE05x_TAG_1]
- [in] digestMode: digestMode [2:kSE05x_TAG_2]
- [in] salt: salt [3:kSE05x_TAG_3]
- [in] saltLen: Length of salt
- [in] info: info [4:kSE05x_TAG_4]
- [in] infoLen: Length of info
- [in] deriveDataLen: 2-byte requested length (L) [5:kSE05x_TAG_5]
- [out] hkdfOutput: [0:kSE05x_TAG_1]
- [inout] phkdfOutputLen: Length for hkdfOutput

Function Se05x_API_I2CM_ExecuteCommandSet

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU/apis.h

Function Documentation

```
smStatus_t Se05x_API_I2CM_ExecuteCommandSet (pSe05xSession_t session_ctx, const uint8_t *inputData, size_t inputDataLen, uint32_t attestationID, uint8_t attestationAlgo, uint8_t *response, size_t *preponseLen, SE05x_TimeStamp_t *ptimeStamp, uint8_t *freshness, size_t *pfreshnessLen, uint8_t *chipId, size_t *pchipIdLen, uint8_t *signature, size_t *psignatureLen, uint8_t *randomAttst, size_t randomAttstLen)
```

Se05x_API_I2CM_ExecuteCommandSet

Execute one or multiple I2C commands in master mode. Execution is conditional to the presence of the authentication object identified by RESERVED_ID_I2CM_ACCESS. If the credential is not present in the eSE, access is allowed in general. Otherwise, a session shall be established before executing this command. In this case, the I2CM_ExecuteCommandSet command shall be sent within the mentioned session.

The I2C command set is constructed as a sequence of instructions described in with the following rules:

- The length should be limited to MAX_I2CM_COMMAND_LENGTH.
- The data to be read cannot exceed MAX_I2CM_COMMAND_LENGTH, including protocol overhead.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	See SE05x_INS_t , in addition to INS_CRYPTO, users can set the INS_ATTEST flag. In that case, attestation applies.
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_I2CM	See SE05x_P2_t
Lc	#(Pay-load)	
	TLV[TAG_1]	Byte array containing I2C Command set as TLV array.
	TLV[TAG_2]	4-byte attestation object identifier. [Optional] [Conditional: only when INS_ATTEST is set]
	TLV[TAG_3]	1-byte SE05x_AttestationAlgo_t [Optional] [Conditional: only when INS_ATTEST is set]
	TLV[TAG_7]	16-byte freshness random [Optional] [Conditional: only when INS_ATTEST is set]
Le	0x00	Expecting TLV with return data.

R-APDU Body

Value	Description
TLV[TAG_1]	response, a bytestring containing a sequence of: * CONFIGURE (0x01), followed by 1 byte of return code (0x5A = SUCCESS). * WRITE (0x03), followed by 1 byte of return code * READ (0x04), followed by - Length: 2 bytes in big endian encoded without TLV length encoding - Read bytes * 0xFF followed by the error return code in case of a structural error of the incoming buffer (too long, for example)
TLV[TAG_3]	containing 12-byte timestamp
TLV[TAG_4]	containing 16-byte freshness (random)
TLV[TAG_5]	containing 18-byte chip unique ID
TLV[TAG_6]	containing signature over the concatenated values of TLV[TAG_1], TLV[TAG_3], TLV[TAG_4] and TLV[TAG_5].

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] inputData: The input data
- [in] inputDataLen: The input data length
- [in] attestationID: The attestation id
- [in] attestationAlgo: The attestation algorithm
- response: The response
- presponseLen: The presponse length
- ptimeStamp: The ptime stamp
- freshness: The freshness
- pfreshnessLen: The pfreshness length
- chipId: The chip identifier
- pchipIdLen: The pchip identifier length
- signature: The signature
- psignatureLen: The psignature length
- randomAttst: The random attst
- [in] randomAttstLen: The random attst length

Function Se05x_API_ImportExternalObject

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ImportExternalObject (pSe05xSession_t session_ctx, const uint8_t *ECKeydata, size_t ECKeydataLen, const uint8_t *ECAuthKeyID, size_t ECAuthKeyIDLen, const uint8_t *serializedObject, size_t serializedObjectLen)
```

Se05x_API_ImportExternalObject

Combined with the INS_IMPORT_EXTERNAL mask, enables users to send a WriteSecureObject APDU (WriteECKey until WritePCR) protected by a secure channel.

Secure Objects can be imported into the SE05X through a secure channel which does not require the establishment of a session. This feature is also referred to single side import and can only be used to create or update objects.

The mechanism is based on ECKey session to protect the Secure Object content and is summarized in the following figure.

External import flow

The flow above can be summarized in the following steps:

- The user obtains the SE public key for import via the to get the public key from the device's key pair. Key ID 0x02 will return the public key of the EC key pair with RESERVED_ID_EXTERNAL_IMPORT. The response is signed by the same key pair.
- The user calls with input:
 - the applet AID (e.g. A0000003965453000000010300000000)
 - the SCPparameters
 - 1-byte SCP identifier, must equal0xAB
 - 2-byte SCP parameter, must equal 0x01 followed by 1-byte security level (which follows the GlobalPlatform security level definition, see: .
 - key type, must be 0x88 (AES keytype)
 - key length, must be 0x10 (AES128key)
 - host public key (65-byte NIST P-256 publickey)
 - host public key curve identifier (must be 0x03 (=NIST_P256))
 - ASN.1 signature over the TLV with tags 0xA6 and0x7F49.

The applet will then calculate the master key by performing SHA256 over a byte array containing (in order):

- 4-byte counter value being0x00000001
- shared secret (ECDH calculation according [IEEE P1363] using the private keyfrom RESERVED_ID_ECKEY_SESSION and the public key provided as input to ECKeySessionInternalAuthenticate. The length depends on the curve used (e.g. 32 byte for NIST P-256 curve).
- 16-byte random generated by the SE05X.

- 2-byte SCP parameter, must equal 0x01 followed by 1-byte security level (which follows the GlobalPlatform security level definition, see: .
 - 1-byte keytype
 - 1-byte keylength

The master key will then be the 16 MSB's of the hash output.

Using the master key, the 3 session keys are derived by following the GlobalPlatform specification to derive session keys, e.g. derivation input:

- ENCsession key = CMAC(MK, 0000000000000000000000000000400008001)
 - CMACsession key = CMAC(MK, 0000000000000000000000000000600008001)
 - RMACsession key = CMAC(MK, 0000000000000000000000000000700008001)

The Authentication Object ID needs to be passed using TAG_IMPORT_AUTH_KEY_ID, followed by the Write APDU command (using tag TAG_1).

The Write APDU command needs to be constructed as follows:

- Encrypt the command encryption counter (starting with 0x00000000000000000000000000000001) using the S_ENC key. This becomes the IV for the encrypted APDU.
 - Get the APDU command payload and pad it (ISO9797 M2 padding).
 - Encrypt the payload in AES CBC mode using the S_ENC key.
 - Set the Secure Messaging bit in the CLA (0x04).
 - Concatenate the MAC chaining value with the full APDU.
 - Then calculate the MAC on this byte array and append the 8-byte MAC value to the APDU.
 - Finally increment the encryption counter for the next command.

A receipt will be generated by doing a CMAC operation on the input from tag 0xA6 and 0x7F49 using the RMAC session key.

Receipt = CMAC(RMAC session key, <input from TLV 0xA6 and TLV 0x7F49>)

There is no need to establish a session; therefore, the ImportExternalObject commands are always sent in the default session. The ImportExternalObject commands are replayable.

The P1 and P2 parameters shall be coded as per the intended operation. For example, to import an EC Key, the P1 and P2 parameters as defined in WriteECKey shall be specified.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_IMPORT_EXTERNAL	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_DEFAULT	See SE05x_P2_t
Lc	#(Payload)	
Pay-load	TLV[TAG_IMPORT_AUTH]	DATA Authentication data
	TLV[TAG_IMPORT_AUTH]	KEKt Public key Identifier
	TLV[TAG_1]...	Wraps a complete WriteSecureObject command, protected by ECKey session secure messaging
	TLV[TAG_11]	4-byte version [Optional]

R-APDU Body

NA

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] ECKeydata: ECKeydata [1:kSE05x_TAG_2]
- [in] ECKeydataLen: Length of ECKeydata
- [in] serializedObject: serializedObject [2:kSE05x_TAG_3]
- [in] serializedObjectLen: Length of serializedObject

Function Se05x_API_ImportObject

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ImportObject (pSe05xSession_t      session_ctx,      uint32_t      objectID,
                                     SE05x_RSAKeyComponent_t rsaKeyComp, const uint8_t
                                     *serializedObject, size_t serializedObjectLen)
```

Se05x_API_ImportObject

Writes a serialized Secure Object to the SE05X (i.e., “import”)

Command to Applet

Field	Value	Description
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_IMPORT	See SE05x_P2_t
Pay-load	TLV[TAG_1]	4-byte identifier.
	TLV[TAG_2]	1-byte SE05x_RSAKeyComponent_t [Conditional: only when the identifier refers to an RSAKey object]
	TLV[TAG_3]	Serialized object (encrypted).

R-APDU Body

NA

R-APDU Trailer

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]
- [in] rsaKeyComp: rsaKeyComp [2:kSE05x_TAG_2]
- [in] serializedObject: serializedObject [3:kSE05x_TAG_3]
- [in] serializedObjectLen: Length of serializedObject

Function Se05x_API_IncCounter

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_IncCounter** (pSe05xSession_t *session_ctx*, uint32_t *objectID*)
Se05x_API_IncCounter

See [Se05x_API_CreateCounter](#)

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]

Function Se05x_API_MACFinal

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_MACFinal** (pSe05xSession_t *session_ctx*, **const** uint8_t **inputData*, size_t *inputDataLen*, SE05x_CryptoObjectID_t *cryptoObjectID*, **const** uint8_t **macValidateData*, size_t *macValidateDataLen*, uint8_t **macValue*, size_t **pmacValueLen*)
Se05x_API_MACFinal

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	SE05x_INS_t
P1	P1_MAC	See SE05x_P1_t
P2	P2_FINAL	See SE05x_P2_t
Pay-load	TLV[TAG_1]	Byte array containing data to be taken as input to MAC.
	TLV[TAG_2]	byte Crypto Object identifier
	TLV[TAG_3]	Byte array containing MAC to validate. [Conditional: only applicable if the crypto object is set for validating (MACInit P2 = P2_VALIDATE)]
Le	0x00	Expecting MAC or result.

R-APDU Body

Value	Description
TLV[TAG_1]	MAC value (when MACInit had P2 = P2_GENERATE) or SE05x_Result_t (when MACInit had P2 = P2_VERIFY).

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] inputData: inputData [1:kSE05x_TAG_1]
- [in] inputDataLen: Length of inputData
- [in] cryptoObjectID: cryptoObjectID [2:kSE05x_TAG_2]
- [in] macValidateData: macValidateData [3:kSE05x_TAG_3]
- [in] macValidateDataLen: Length of macValidateData
- [out] macValue: [0:kSE05x_TAG_1]
- [inout] pmacValueLen: Length for macValue

Function Se05x_API_MACInit

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_MACInit (pSe05xSession_t session_ctx, uint32_t objectID,  
                                SE05x_CryptoObjectID_t cryptoObjectID, const SE05x_Mac_Oper_t  
                                mac_oper)
```

Se05x_API_MACInit

Initiate a MAC operation. The state of the MAC operation is kept in the Crypto Object until it's finalized or deleted.

The 4-byte identifier of the key must refer to an AESKey, DESKey or HMACKey.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_MAC	See <i>SE05x_P1_t</i>
P2	P2_GENERATE or P2_VALIDATE	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload	TLV[TAG_1]	4-byte identifier of the MAC key.
	TLV[TAG_2]	2-byte Crypto Object identifier
Le	0x00	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] cryptoObjectID: cryptoObjectID [2:kSE05x_TAG_2]
- [in] mac_oper: The Operation

Function **Se05x_API_MACOneShot_G**

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_MACOneShot_G (pSe05xSession_t session_ctx, uint32_t objectID, uint8_t macOperation, const uint8_t *inputData, size_t inputDataLen, uint8_t *macValue, size_t *pmacValueLen)
```

Se05x_API_MACOneShot_G

Generate. See [Se05x_API_MACOneShot_V](#) for Verification.

Performs a MAC operation in one shot (without keeping state).

The 4-byte identifier of the key must refer to an AESKey, DESKey or HMACKey.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	SE05x_INS_t
P1	P1_MAC	See SE05x_P1_t
P2	P2_GENERATE_ONESHOT P2_VALIDATE_ONESHOT	or See SE05x_P2_t
Lc	#(Payload)	
Pay-load	TLV[TAG_1]	4-byte identifier of the key object.
	TLV[TAG_2]	1-byte MACAlgoRef
	TLV[TAG_3]	Byte array containing data to be taken as input to MAC.
	TLV[TAG_5]	MAC to verify (when P2=P2_VALIDATE_ONESHOT)
Le	0x00	Expecting MAC or Result.

R-APDU Body

Value	Description
TLV[TAG_1]	MAC value (P2=P2_GENERATE_ONESHOT) or SE05x_Result_t (when p2=P2_VALIDATE_ONESHOT).

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] macOperation: macOperation [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] macValue: [0:kSE05x_TAG_1]
- [inout] pmacValueLen: Length for macValue

Function Se05x_API_MACOneShot_V

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_MACOneShot_V(pSe05xSession_t session_ctx, uint32_t objectID, uint8_t macOperation, const uint8_t *inputData, size_t inputDataLen, const uint8_t *MAC, size_t MACLen, uint8_t *macValue, size_t *pmacValueLen)
```

Se05x_API_MACOneShot_V

Validate. See [Se05x_API_MACOneShot_G](#) for Generation.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] macOperation: macOperation [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [in] MAC: MAC to verify (when P2=P2_VALIDATE_ONESHOT) [4:kSE05x_TAG_5]
- [in] MACLen: Length of MAC
- [out] macValue: [0:kSE05x_TAG_1]
- [inout] pmacValueLen: Length for macValue

Function Se05x_API_MACUpdate

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_MACUpdate(pSe05xSession_t session_ctx, const uint8_t *inputData, size_t inputDataLen, SE05x_CryptoObjectID_t cryptoObjectID)
```

Se05x_API_MACUpdate

Update MAC

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_MAC	See <i>SE05x_P1_t</i>
P2	P2_UPDATE	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload	TLV[TAG_1]	Byte array containing data to be taken as input to MAC.
	TLV[TAG_2]	2-byte Crypto Object identifier
Le	•	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] inputData: inputData [1:kSE05x_TAG_1]
- [in] inputDataLen: Length of inputData
- [in] cryptoObjectID: cryptoObjectID [2:kSE05x_TAG_2]

Function Se05x_API_PBKDF2

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_PBKDF2 (pSe05xSession_t session_ctx, uint32_t objectID, const uint8_t *salt,
                           size_t saltLen, uint16_t count, uint16_t requestedLen, uint8_t *derived-
                           SessionKey, size_t *pderivedSessionKeyLen)
Se05x_API_HKDF_Extended
```

Only step 2 of the algorithm is executed, i.e. Expand only.

Using an IV as input parameter results in a FIPS compliant SP800-108 KDF in Feedback Mode where K[0] is the provided IV. This KDF is then using a 8-bit counter, AFTER_FIXED counter location.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_HKDF_EXPAND_ONLY	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload	TLV[TAG_1]	4-byte HMACKey identifier (= PRK)
TLV[TAG_2]	1-byte DigestMode (except DIGEST_NO_HASH)	
TLV[TAG_3]	3-byte array (0-64 bytes) containing IV. [Optional] [Conditional: only when TLV[TAG_6] is absent.]	
TLV[TAG_4]	Info: The context and information to apply (1 to 80 bytes). [Optional]	
TLV[TAG_5]	2-byte requested length (L): 1 up to MAX_APDU_PAYLOAD_LENGTH	
TLV[TAG_6]	64-byte HMACKey identifier containing IV. [Optional] [Conditional: only when TLV[TAG_3] is absent]	
TLV[TAG_7]	74-byte HMACKey identifier to store output. [Optional]	
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	HKDF output. [Conditional: only when the input does not contain TLV[TAG-7]]

R-APDU Trailer

SW	Description
SW_NO_ERROR	The HKDF is executed successfully.

/

```
smStatus_t Se05x_API_HKDF_Extended(pSe05xSession_t session_ctx, uint32_t hmacID,
    SE05x_DigestMode_t digestMode, SE05x_HkdfMode_t hkdfMode, const uint8_t salt, size_t saltLen,
    uint32_t saltID, const uint8_t info, size_t infoLen, uint32_t derivedKeyID, uint16_t deriveDataLen,
    uint8_t hkdfOuput, size_t phkdfOuputLen);
```

/* Se05x_API_PBKDF2

 Password Based Key Derivation Function 2 (PBKDF2) according [RFC8018].

 The password is an input to the KDF and must be stored inside the .

 The output is returned to the host.

Command to Applet

```
verbatim embed:rst:leading-asterisk +-----+-----+
Field | Value | Description | +=====+=====+=====+
| CLA | 0x80 || +-----+-----+-----+ | INS | INS_CRYPTO |
| SE05x_INS_t | +-----+-----+-----+ | P1 | P1_DEFAULT |
| See SE05x_P1_t | +-----+-----+-----+ | P2 | P2_PBKDF |
| See SE05x_P2_t | +-----+-----+-----+ +-----+-----+
+ | Lc | #(Payload) | +-----+-----+-----+ | | |
```

```

TLV[TAG_1] | 4-byte password identifier (object type must be HMACKey) | +_____
+---+-----+ | | TLV[TAG_2] | Salt (0 to 64 bytes)
[Optional] | +---+-----+ | | TLV[TAG_3] | 2-byte
Iteration count: 1 up to 0x7FFF. | +---+-----+
+ | | TLV[TAG_4] | 2-byte Requested length: 1 up to 512 bytes. | +_____
+---+-----+ | Le | 0x00 | Expecting derived key material. |
+---+-----+

```

R-APDU Body

Value	Description
TLV[TAG_1]	Derived key material (session key).

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: 4-byte password identifier (object type must be HMACKey) [1:kSE05x_TAG_1]
- [in] salt: salt [2:kSE05x_TAG_2]
- [in] saltLen: Length of salt
- [in] count: count [3:kSE05x_TAG_3]
- [in] requestedLen: requestedLen [4:kSE05x_TAG_4]
- [out] derivedSessionKey: [0:kSE05x_TAG_1]
- [inout] pderivedSessionKeyLen: Length for derivedSessionKey

Function Se05x_API_ReadCryptoObjectList

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadCryptoObjectList (pSe05xSession_t session_ctx, uint8_t *idlist, size_t
                                         *pidlistLen)
Se05x_API_ReadCryptoObjectList
```

Get the list of allocated Crypto Objects indicating the identifier, the CryptoContext and the sub type of the CryptoContext.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t
P1	P1_CRYPTO_OBJ	See SE05x_P1_t
P2	P2_LIST	See SE05x_P2_t
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG]	Byte array containing a list of 2-byte Crypto Object identifiers, followed by 1-byte CryptoContext and 1-byte subtype for each Crypto Object (so 4 bytes for each Crypto Object).

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [out] idlist: If more ids are present [0:kSE05x_TAG_1]
- [inout] pidlistLen: Length for idlist

Function Se05x_API_ReadECCurveList

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadECCurveList (pSe05xSession_t session_ctx, uint8_t *curveList, size_t
                                         *pcurveListLen)
Se05x_API_ReadECCurveList
```

Get a list of (Weierstrass) EC curves that are instantiated.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t
P1	P1_CURVE	See SE05x_P1_t
P2	P2_LIST	See SE05x_P2_t
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG]	Byte array listing all curve identifiers in SE05x_ECCurve_t (excluding UNUSED) where the curve identifier < 0x40; for each curve, a 1-byte SetIndicatorRef is returned.

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [out] curveList: [0:kSE05x_TAG_1]
- [inout] pcurveListLen: Length for curveList

Function Se05x_API_ReadIDList

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadIDList (pSe05xSession_t session_ctx, uint16_t outputOffset, uint8_t filter,
                                uint8_t *pmore, uint8_t *idlist, size_t *pidlistLen)
```

Se05x_API_ReadIDList

Get a list of present Secure Object identifiers.

The offset in TAG_1 is an 0-based offset in the list of object. As the user does not know how many objects would be returned, the offset needs to be based on the return values from the previous ReadIDList. If the applet only returns a part of the result, it will indicate that more identifiers are available (by setting TLV[TAG_1] in the response to 0x01). The user can then retrieve the next chunk of identifiers by calling ReadIDList with an offset that equals the amount of identifiers listed in the previous response.

Example 1: first ReadIDList command TAG_1=0, response TAG_1=0, TAG_2=complete list

Example 2: first ReadIDList command TAG_1=0, response TAG_1=1, TAG_2=first chunk (m entries) second ReadIDList command TAG_1=m, response TAG_1=1, TAG_2=second chunk (n entries) third ReadIDList command TAG_1=(m+n), response TAG_1=0, TAG_2=third last chunk

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_LIST	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	2-byte offset
	TLV[TAG_2]	1-byte type filter: 1 byte from SE05x_SecObjTyp_t or 0xFF for all types.
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	1-byte MoreIndicatorRef
TLV[TAG_2]	Byte array containing 4-byte identifiers.

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] outputOffset: output offset [1:kSE05x_TAG_1]
- [in] filter: filter [2:kSE05x_TAG_2]
- [out] pmore: If more ids are present [0:kSE05x_TAG_1]
- [out] idlist: Byte array containing 4-byte identifiers [1:kSE05x_TAG_2]
- [inout] pidlistLen: Length for idlist

Function Se05x_API_ReadObject

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadObject (pSe05xSession_t session_ctx, uint32_t objectID, uint16_t offset,  
                                uint16_t length, uint8_t *data, size_t *pdataLen)  
Se05x_API_ReadObject
```

Reads the content of a Secure Object.

- If the object is a key pair, the command will return the key pair's public key.
- If the object is a public key, the command will return the public key.
- If the object is a private key or a symmetric key or a userID, the command will return SW_CONDITIONS_NOT_SATISFIED.
- If the object is a binary file, the file content is read, giving the offset in TLV[TAG_2] and the length to read in TLV[TAG_3]. Both TLV[TAG_2] and TLV[TAG_3] are bound together; i.e.. either both tags are present, or both are absent. If both are absent, the whole file content is returned.
- If the object is a monotonic counter, the counter value is returned.
- If the object is a PCR, the PCR value is returned.
- If TLV[TAG_4] is filled, only the modulus or public exponent of an RSA key pair or RSA public key is read. It does not apply to other Secure Object types.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t , in addition to INS_READ, users can set the INS_ATTEST flag. In that case, attestation applies.
P1	P1_DEFATTEST	See SE05x_P1_t
P2	P2_DEFATTEST	See SE05x_P2_t
Lc	#(Payload)	Payload Length.
	TLV[TAG_4]	byte object identifier
	TLV[TAG_2]	byte offset [Optional: default 0] [Conditional: only when the object is a BinaryFile object]
	TLV[TAG_2]	byte length [Optional: default 0] [Conditional: only when the object is a BinaryFile object]
	TLV[TAG_4]	byte SE05x_RSAKeyComponent_t : either RSA_COMP_MOD or RSA_COMP_PUB_EXP. [Optional] [Conditional: only for RSA key components]
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	Data read from the secure object.

R-APDU Trailer

SW	Description
SW_NO_ERROR	The read is done successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]
- [in] offset: offset [2:kSE05x_TAG_2]
- [in] length: length [3:kSE05x_TAG_3]
- [out] data: [0:kSE05x_TAG_1]
- [inout] pdataLen: Length for data

Function Se05x_API_ReadObject_W_Atst

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadObject_W_Attst (pSe05xSession_t session_ctx, uint32_t objectID,
                                         uint16_t offset, uint16_t length, uint32_t attestID,
                                         SE05x_AttestationAlgo_t attestAlgo, const uint8_t
                                         *random, size_t randomLen, uint8_t *data, size_t
                                         *pdataLen, uint8_t *attribute, size_t *pattributeLen,
                                         SE05x_TimeStamp_t *ptimeStamp, uint8_t *outran-
                                         dom, size_t *poutrandomLen, uint8_t *chipId, size_t
                                         *pchipIdLen, uint8_t *signature, size_t *psignature-
                                         Len)
```

Se05x_API_ReadObject_W_Attst

Read with attestation.

See [Se05x_API_ReadObject](#)

When INS_ATTEST is set in addition to INS_READ, the secure object is read with attestation. In addition to the response in TLV[TAG_1], there are additional tags:

TLV[TAG_2] will hold the object attributes (see ObjectAttributes).

TLV[TAG_3] relative timestamp when the object has been retrieved

TLV[TAG_4] will hold freshness random data

TLV[TAG_5] will hold the unique ID of the device.

TLV[TAG_6] will hold the signature over all concatenated Value fields tags of the response (TAG_1 until and including TAG_5).

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t , in addition to INS_READ, users can set the INS_ATTEST flag. In that case, attestation applies.
P1	P1_DEFATTEST	SE05x_P1_t
P2	P2_DEFATTEST	SE05x_P2_t
Lc	#(Pay-load)	Payload Length.
	TLV[TAG_4]	byte object identifier
	TLV[TAG_2]	byte offset [Optional: default 0] [Conditional: only when the object is a BinaryFile object]
	TLV[TAG_3]	byte length [Optional: default 0] [Conditional: only when the object is a BinaryFile object]
	TLV[TAG_4]	byte SE05x_RSAKeyComponent_t : either RSA_COMP_MOD or RSA_COMP_PUB_EXP. [Optional] [Conditional: only for RSA key components]
	TLV[TAG_4]	byte attestation object identifier. [Optional] [Conditional: only when INS_ATTEST is set]
	TLV[TAG_6]	byte SE05x_AttestationAlgo_t [Optional] [Conditional: only when INS_ATTEST is set]
	TLV[TAG_16]	16-byte freshness random [Optional] [Conditional: only when INS_ATTEST is set]
Le	0x00	

Value	Description
TLV[TAG_1]	Data read from the secure object.
TLV[TAG_2]	(only when INS_ATTEST is set) Byte array containing the attributes (see ObjectAttributesRef).
TLV[TAG_3]	(only when INS_ATTEST is set) 12-byte timestamp
TLV[TAG_4]	(only when INS_ATTEST is set) 16-byte freshness random
TLV[TAG_5]	(only when INS_ATTEST is set) 18-byte Chip unique ID
TLV[TAG_6]	(only when INS_ATTEST is set) Signature applied over the value of TLV[TAG_1], TLV[TAG_2], TLV[TAG_3], TLV[TAG_4] and TLV[TAG_5].

R-APDU Body

Value	Description
TLV[TAG_1]	Data read from the secure object.
TLV[TAG_2]	(only when INS_ATTEST is set) Byte array containing the attributes (see ObjectAttributesRef).
TLV[TAG_3]	(only when INS_ATTEST is set) 12-byte timestamp
TLV[TAG_4]	(only when INS_ATTEST is set) 16-byte freshness random
TLV[TAG_5]	(only when INS_ATTEST is set) 18-byte Chip unique ID
TLV[TAG_6]	(only when INS_ATTEST is set) Signature applied over the value of TLV[TAG_1], TLV[TAG_2], TLV[TAG_3], TLV[TAG_4] and TLV[TAG_5].

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] objectID: The object id
- [in] offset: The offset
- [in] length: The length
- [in] attestID: The attest id
- [in] attestAlgo: The attest algorithm
- [in] random: The random
- [in] randomLen: The random length
- data: The data
- pdataLen: The pdata length
- attribute: The attribute
- pattributeLen: The pattribute length
- ptimeStamp: The ptime stamp
- outrandom: The outrandom
- poutrandomLen: The poutrandom length
- chipId: The chip identifier
- pchipIdLen: The pchip identifier length
- signature: The signature

- psignatureLen: The psignature length

Function Se05x_API_ReadObjectAttributes_W_Attst

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadObjectAttributes_W_Attst (pSe05xSession_t session_ctx,
                                                uint32_t objectID, uint32_t attestID,
                                                SE05x_AttestationAlgo_t attestAlgo,
                                                const uint8_t *random, size_t
                                                randomLen, uint8_t *data, size_t
                                                *pdataLen, SE05x_TimeStamp_t *pti-
                                                meStamp, uint8_t *outrandom, size_t
                                                *poutrandomLen, uint8_t *chipId, size_t
                                                *pchipIdLen, uint8_t *signature, size_t
                                                *psignatureLen)
```

Se05x_API_ReadObjectAttributes_W_Attst

Reads the attributes of a Secure Object (without the value of the Secure Object).

Each Secure Object has a number of attributes assigned to it. These attributes are listed in for Authentication Objects and in for non-Authentication Objects.

Authentication Object attributes

Attribute	Size (bytes)	Description
Object identifier	4	See identifiersRef
Object type	1	One of SecureObjectType
Authentication attribute	1	One of SetIndicatorRef
Object counter	2	Number of failed attempts for an authentication object if the Maximum Authentication Attempts has been set.
Authentication object identifier	4	"Owner" of the secure object; i.e., the identifier of the session authentication object when the object has been created.
Maximum authentication attempts	2	Maximum number of authentication attempts. 0 means unlimited.
Policy	Vari- able	Policy attached to the object
Origin	1	One of OriginRef; indicates the origin of the Secure Object, either externally set, internally generated or trust provisioned by NXP.
Version	1	The Secure Object version. Default = 0. See FIPS compliance for details about versioning of Secure Objects.

Non-Authentication Objects

Attribute	Size (bytes)	Description
Object identifier	4	See Object identifiers
Object type	1	One of SecureObjectType
Authentication attribute	1	One of SetIndicatorRef
Tag length	2	Set to 0x0000, except for AESKey objects: for AESKey objects, this indicates the GMAC length that applies when doing AEAD operations. If the value is set to 0 and AEAD operations are done, the GMAC length shall be 128 bit.
Authentication object identifier	4	"Owner" of the secure object; i.e., the identifier of the session authentication object when the object has been created.
RFU	2	Set to 0x0000.
Policy	Variable	Policy attached to the object
Origin	1	One of OriginRef; indicates the origin of the Secure Object, either externally set, internally generated or trust provisioned by NXP.
Version	1	The Secure Object version. Default = 0. See FIPS compliance for details about versioning of Secure Objects.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t , in addition to INS_READ, users can set the INS_ATTEST flag. In that case, attestation applies.
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_ATTRIBUTE	See SE05x_P2_t
Lc	#(Payload)	Payload Length.
	TLV[TAG_1]	4-byte object identifier
	TLV[TAG_5]	4-byte attestation object identifier. [Optional] [Conditional: only when INS_ATTEST is set]
	TLV[TAG_6]	1-byte AttestationAlgo [Optional] [Conditional: only when INS_ATTEST is set]
	TLV[TAG_7]	16-byte freshness random [Optional] [Conditional: only when INS_ATTEST is set]
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_2]	Byte array containing the attributes (see Object Attributes).
TLV[TAG_3]	(only when INS_ATTEST is set) 12-byte timestamp
TLV[TAG_4]	(only when INS_ATTEST is set) 16-byte freshness random
TLV[TAG_5]	(only when INS_ATTEST is set) 18-byte Chip unique ID
TLV[TAG_6]	(only when INS_ATTEST is set) Signature applied over the value of TLV[TAG_2], TLV[TAG_3], TLV[TAG_4] and TLV[TAG_5].

R-APDU Trailer

SW	Description
SW_NO_ERROR	The read is done successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] objectID: The object id
- [in] attestID: The attest id
- [in] attestAlgo: The attest algorithm
- [in] random: The random
- [in] randomLen: The random length
- data: The data
- pdataLen: The pdata length
- ptimeStamp: The ptime stamp
- outrandom: The outrandom
- poutrandomLen: The poutrandom length
- chipId: The chip identifier
- pchipIdLen: The pchip identifier length
- signature: The signature
- psignatureLen: The psignature length

Function Se05x_API_ReadRSA

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadRSA(pSe05xSession_t session_ctx, uint32_t objectID, uint16_t offset, uint16_t  
length, SE05x_RSAPubKeyComp_t rsa_key_comp, uint8_t *data, size_t  
*pdataLen)
```

Se05x_API_ReadRSA

See [Se05x_API_ReadObject](#)

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]
- [in] offset: offset [2:kSE05x_TAG_2]
- [in] length: length [3:kSE05x_TAG_3]
- [in] rsa_key_comp: rsa_key_comp [4:kSE05x_TAG_4]
- [out] data: [0:kSE05x_TAG_1]

- [inout] pdataLen: Length for data

Function Se05x_API_ReadRSA_W_Atst

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadRSA_W_Atst (pSe05xSession_t session_ctx, uint32_t objectID, uint16_t
offset, uint16_t length, SE05x_RSAPubKeyComp_t
rsa_key_comp, uint32_t attestID, SE05x_AttestationAlgo_t
attestAlgo, const uint8_t *random, size_t randomLen,
uint8_t *data, size_t *pdataLen, uint8_t *attribute, size_t
*pattributeLen, SE05x_TimeStamp_t *ptimeStamp, uint8_t
*outrandom, size_t *poutrandomLen, uint8_t *chipId, size_t
*pchipIdLen, uint8_t *signature, size_t *psignatureLen)
```

Se05x_API_ReadRSA_W_Atst

See [Se05x_API_ReadObject_W_Atst](#)

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] objectID: The object id
- [in] offset: The offset
- [in] length: The length
- [in] rsa_key_comp: The rsa key component
- [in] attestID: The attest id
- [in] attestAlgo: The attest algorithm
- [in] random: The random
- [in] randomLen: The random length
- data: The data
- pdataLen: The pdata length
- attribute: The attribute
- pattributeLen: The pattribute length
- ptimeStamp: The ptime stamp
- outrandom: The outrandom
- poutrandomLen: The poutrandom length
- chipId: The chip identifier
- pchipIdLen: The pchip identifier length
- signature: The signature
- psignatureLen: The psignature length

Function Se05x_API_ReadSize

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_ReadSize** (pSe05xSession_t *session_ctx*, uint32_t *objectID*, uint16_t **psize*)
Se05x_API_ReadSize

ReadSize

Get the size of a Secure Object (in bytes):

- For EC keys: the size of the curve is returned.
- For RSA keys: the key size is returned.
- For AES/DES/HMAC keys, the key size is returned.
- For binary files: the file size is returned
- For userIDs: nothing is returned (SW_CONDITIONS_NOT_SATISFIED).
- For counters: the counter length is returned.
- For PCR: the PCR length is returned.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_SIZE	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	4-byte object identifier.
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	Byte array containing size.

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] objectID: The object id
- [out] psize: The psize

Function Se05x_API_ReadType

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_ReadType (pSe05xSession_t session_ctx, uint32_t objectID,
                                SE05x_SecureObjectType_t *ptype, uint8_t *pisTransient, const
                                SE05x_AttestationType_t attestation_type)
```

Se05x_API_ReadType

Get the type of a Secure Object.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_READ	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_TYPE	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	4-byte object identifier.
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	Type of the Secure Object: one of SE05x_SecObjTyp_t
TLV[TAG_2]	TransientIndicatorRef

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] objectID: The object id
- ptype: The ptype
- pisTransient: The pis transient
- [in] attestation_type: The attestation type

Function Se05x_API_RefreshSession

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_RefreshSession** (pSe05xSession_t *session_ctx*, pSe05xPolicy_t *policy*)
Se05x_API_RefreshSession

Refreshes a session on , the policy of the running session can be updated; the rest of the session state remains.

Command to Applet

Field	Value	Description
CLA	0x80	•
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_SESSION_REFRESH	See SE05x_P2_t
Lc	#(Payload)	Payload length.
	TLV[TAG_POLICY]	Byte array containing the policy to attach to the session. [Optional]
Le	•	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] *session_ctx*: Session Context [0:kSE05x_pSession]
- [in] *policy*: policy [1:kSE05x_TAG_POLICY]

Function Se05x_API_RSAEncrypt

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_RSAEncrypt (pSe05xSession_t session_ctxt, uint32_t objectID,
                                 SE05x_RSAEncryptionAlgo_t rsaEncryptionAlgo, const uint8_t *inputData, size_t inputDataLen, uint8_t *decryptedData, size_t pdecryptedDataLen)
```

Se05x_API_RSAEncrypt

The RSAEncrypt command encrypts data.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_RSA	See <i>SE05x_P1_t</i>
P2	P2_DECRYPT_ONESHOT	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload	TLV[TAG_1]	4-byte identifier of the key pair or private key.
	TLV[TAG_2]	1-byte <i>SE05x_RSAEncryptionAlgo_t</i>
	TLV[TAG_3]	Byte array containing data to be encrypted.
Le	0x00	Expected TLV with decrypted data.

R-APDU Body

Value	Description
TLV[TAG_1]	Encrypted data

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctxt: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] rsaEncryptionAlgo: rsaEncryptionAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] decryptedData: [0:kSE05x_TAG_1]
- [inout] pdecryptedDataLen: Length for decryptedData

Function Se05x_API_RSAEncrypt

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_RSAEncrypt (pSe05xSession_t session_ctx, uint32_t objectID,
                                SE05x_RSAEncryptionAlgo_t rsaEncryptionAlgo, const uint8_t *inputData, size_t inputDataLen, uint8_t *encryptedData, size_t *pencryptedDataLen)
```

Se05x_API_RSAEncrypt

The RSAEncrypt command encrypts data.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_RSA	See <i>SE05x_P1_t</i>
P2	P2_ENCRYPT_ONESHOT	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload	TLV[TAG_1]	4-byte identifier of the key pair or public key.
	TLV[TAG_2]	1-byte <i>SE05x_RSAEncryptionAlgo_t</i>
	TLV[TAG_3]	Byte array containing data to be encrypted.
Le	0x00	Expected TLV with encrypted data.

R-APDU Body

Value	Description
TLV[TAG_1]	Encrypted data

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] rsaEncryptionAlgo: rsaEncryptionAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] encryptedData: [0:kSE05x_TAG_1]
- [inout] pencryptedDataLen: Length for encryptedData

Function Se05x_API_RSASign

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_RSASign (pSe05xSession_t session_ctx, uint32_t objectID,
                               SE05x_RSASignatureAlgo_t rsaSigningAlgo, const uint8_t *input-
                               Data, size_t inputDataLen, uint8_t *signature, size_t *psignatureLen)
```

Se05x_API_RSASign

The RSASign command signs the input message using an RSA private key.

Name	Value	Description
RSA_SHA1_PKCS1_PSS	0x15	RFC8017: RSASSA-PSS
RSA_SHA224_PKCS1_PSS	0x2B	RFC8017: RSASSA-PSS
RSA_SHA256_PKCS1_PSS	0x2C	RFC8017: RSASSA-PSS
RSA_SHA384_PKCS1_PSS	0x2D	RFC8017: RSASSA-PSS
RSA_SHA512_PKCS1_PSS	0x2E	RFC8017: RSASSA-PSS
RSA_SHA1_PKCS1	0x0A	RFC8017: RSASSA-PKCS1-v1_5
RSA_SHA_224_PKCS1	0x27	RFC8017: RSASSA-PKCS1-v1_5
RSA_SHA_256_PKCS1	0x28	RFC8017: RSASSA-PKCS1-v1_5
RSA_SHA_384_PKCS1	0x29	RFC8017: RSASSA-PKCS1-v1_5
RSA_SHA_512_PKCS1	0x2A	RFC8017: RSASSA-PKCS1-v1_5

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	SE05x_INS_t
P1	P1_SIGNATURE	See SE05x_P1_t
P2	P2_SIGN	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	4-byte identifier of the key pair or private key.
	TLV[TAG_2]	1-byte SE05x_RSASignAlgo_t
	TLV[TAG_3]	Byte array containing input data.
Le	0x00	Expecting ASN.1 signature.

R-APDU Body

Value	Description
TLV[TAG_1]	RSA signature in ASN.1 format.

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]

- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] rsaSigningAlgo: rsaSigningAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [out] signature: [0:kSE05x_TAG_1]
- [inout] psignatureLen: Length for signature

Function Se05x_API_RSAVerify

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_RSAVerify (pSe05xSession_t      session_ctx,      uint32_t      objectID,  
                                SE05x_RSASignatureAlgo_t    rsaSigningAlgo,    const    uint8_t  
                                *inputData, size_t inputDataLen, const uint8_t *signature, size_t  
                                signatureLen, SE05x_Result_t *presult)
```

Se05x_API_RSAVerify

The RSAVerify command verifies the given signature and returns the result.

The key cannot be passed externally to the command directly. In case users want to use the command to verify signatures using different public keys or the public key value regularly changes, the user should create a transient key object to which the key value is written and then the identifier of that transient secure object can be used by this RSAVerify command.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	<i>SE05x_INS_t</i>
P1	P1_SIGNATURE	See <i>SE05x_P1_t</i>
P2	P2_VERIFY	See <i>SE05x_P2_t</i>
Lc	#(Payload)	
Payload		
	TLV[TAG_1]	4-byte identifier of the key pair or public key.
	TLV[TAG_2]	1-byte <i>SE05x_RSASignAlgo_t</i>
	TLV[TAG_3]	Byte array containing data to be verified.
	TLV[TAG_5]	Byte array containing ASN.1 signature.
Le	0x03	Expecting Result in TLV

R-APDU Body

Value	Description
TLV[TAG_1]	<i>SE05x_Result_t</i> : Verification result

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: objectID [1:kSE05x_TAG_1]
- [in] rsaSigningAlgo: rsaSigningAlgo [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData
- [in] signature: signature [4:kSE05x_TAG_5]
- [in] signatureLen: Length of signature
- [out] presult: [0:kSE05x_TAG_1]

Function Se05x_API_SetAppletFeatures

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_SetAppletFeatures (pSe05xSession_t session_ctx, pSe05xAppletFeatures_t
                                         appletVariant)
Se05x_API_SetAppletFeatures
```

Sets the applet features that are supported. To successfully execute this command, the session must be authenticated using the RESERVED_ID_FEATURE.

The 2-byte input value is a pre-defined AppletConfig value.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See <i>SE05x_INS_t</i>
P1	P1_DEFAULT	See <i>SE05x_P1_t</i>
P2	P2_VARIANT	See <i>SE05x_P2_t</i>
Lc	#(Payload)	Payload length
Payload	TLV[TAG_1]	2-byte Variant from <i>SE05x_AppletConfig_t</i>

R-APDU Body

NA

R-APDU Trailer

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] variant: variant [1:kSE05x_TAG_1]

Function Se05x_API_SetCounterValue

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_SetCounterValue (pSe05xSession_t session_ctx, uint32_t objectID, uint16_t size, uint64_t value)
```

Se05x_API_SetCounterValue

See [Se05x_API_CreateCounter](#)

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] objectID: object id [1:kSE05x_TAG_1]
- [in] size: size [3:kSE05x_TAG_2]
- [in] value: value [4:kSE05x_TAG_3]

Function Se05x_API_SetECCurveParam

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_SetECCurveParam (pSe05xSession_t session_ctx, SE05x_ECCurve_t curveID, SE05x_ECCurveParam_t ecCurveParam, const uint8_t *inputData, size_t inputDataLen)
```

Se05x_API_SetECCurveParam

Set a curve parameter. The curve must have been created first by CreateEcCurve.

All parameters must match the expected value for the listed curves. If the curve parameters are not correct, the curve cannot be used.

Users have to set all 5 curve parameters for the curve to be usable. Once all curve parameters are given, the secure element will check if all parameters are correct and return SW_NO_ERROR..

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_WRITE	See SE05x_INS_t
P1	P1_CURVE	See SE05x_P1_t
P2	P2_PARAM	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	1-byte curve identifier, from SE05x_ECCurve_t
	TLV[TAG_2]	1-byte SE05x_ECCurveParam_t
	TLV[TAG_3]	Bytestring containing curve parameter value.

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	Data is returned successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] curveID: curve id [1:kSE05x_TAG_1]
- [in] ecCurveParam: ecCurveParam [2:kSE05x_TAG_2]
- [in] inputData: inputData [3:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData

Function Se05x_API_SetLockState

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_SetLockState (pSe05xSession_t session_ctx, uint8_t lockIndicator, uint8_t lock-
State)
Se05x_API_SetLockState
```

Sets the applet transport lock (locked or unlocked). There is a Persistent lock and a Transient Lock. If the Persistent lock is UNLOCKED, the device is unlocked (regardless of the Transient lock). If the Persistent lock is LOCKED, the device is only unlocked when the Transient lock is UNLOCKED and the device will be locked again after deselect of the applet.

Note that regardless of the lock state, the credential RESERVED_ID_TRANSPORT allows access to all features. For example, it is possible to write/update objects within the session opened by RESERVED_ID_TRANSPORT, even if the applet is locked.

The default TRANSIENT_LOCK state is LOCKED; there is no default PERSISTENT_LOCK state (depends on product configuration).

This command can only be used in a session that used the credential with identifier RESERVED_ID_TRANSPORT as authentication object.

PERSIS-TENT_LOCK	TRAN-SIENT_LOCK	Behavior
UNLOCKED	UNLOCKED	Unlocked until PERSISTENT_LOCK set to LOCKED.
UNLOCKED	LOCKED	Unlocked until PERSISTENT_LOCK set to LOCKED.
LOCKED	UNLOCKED	Unlocked until deselect or TRANSIENT_LOCK set to LOCKED.
LOCKED	LOCKED	Locked until PERSISTENT_LOCK set to UNLOCKED.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_TRANSPORT	See SE05x_P2_t
Lc	#(Payload)	
Payload	TLV[TAG_1]	1-byte LockIndicatorRef
	TLV[TAG_2]	1-byte LockStateRef
Le		

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] lockIndicator: lock indicator [1:kSE05x_TAG_1]
- [in] lockState: lock state [2:kSE05x_TAG_2]

Function Se05x_API_SetPlatformSCPRequest

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_SetPlatformSCPRequest (pSe05xSession_t           session_ctx,
                                              SE05x_PlatformSCPRequest_t   platformSCPRequest)
Se05x_API_SetPlatformSCPRequest
```

Sets the required state for platform SCP (required or not required). This is a persistent state.

If platform SCP is set to SCP_REQUIRED, any applet APDU command will be refused by the applet when platform SCP is not enabled. Enabled means full encryption and MAC, both on C-APDU and R-APDU. Any other level is not sufficient and will not be accepted. SCP02 will not be accepted (as there is no response MAC and encryption).

If platform SCP is set to “not required,” any applet APDU command will be accepted by the applet.

This command can only be used in a session that used the credential with identifier RESERVED_ID_PLATFORM_SCP as authentication object.

Note that the default state is SCP_NOT_REQUIRED.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2 SCP	See SE05x_P2_t
Lc	#(Payload)	
Payload	TLV[TAG_1]	1-byte SE05x_PlatformSCPRequest_t
Le		

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] platformSCPRequest: platt scp req [1:kSE05x_TAG_1]

Function Se05x_API_TLSCalculatePreMasterSecret

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_TLSCalculatePreMasterSecret (pSe05xSession_t session_ctx, uint32_t
keyPairId, uint32_t pskId, uint32_t
hmacKeyId, const uint8_t *inputData,
size_t inputDataLen)
```

Se05x_API_TLSCalculatePreMasterSecret

The command TLSCalculatePreMasterSecret will compute the pre-master secret for TLS according [RFC5246]. The pre-master secret will always be stored in an HMACKey object (TLV[TAG_3]). The HMACKey object must be created before; otherwise the calculation of the pre-master secret will fail.

It can use one of these algorithms: - - - -

- PSK Key Exchange algorithm as defined in [RFC4279]
- RSA_PSK Key Exchange algorithm as defined in [RFC4279]
- ECDHE_PSK Key Exchange algorithm as defined in [RFC5489]
- EC Key Exchange algorithm as defined in [RFC4492]
- RSA Key Exchange algorithm as defined in [RFC5246]

TLV[TAG_1] needs to be an (existing) HMACKey identifier containing the pre- shared Key.

Input data in TLV[TAG_4] are:

- An EC public key when TLV[TAG_2] refers to an EC key pair.
- An RSA encrypted secret when TLV[TAG_2] refers to an RSA key pair.
- Empty when TLV[TAG_2] is absent or empty.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	See SE05x_INS_t
P1	P1_TLS	See SE05x_P1_t
P2	P2_PMS	See SE05x_P2_t
Lc	#(Payload)	
	TLV[TAG_1]	4-byte PSK identifier referring to a 16, 32, 48 or 64-byte Pre Shared Key. [Optional]
	TLV[TAG_2]	4-byte key pair identifier. [Optional]
	TLV[TAG_3]	4-byte target HMACKey identifier.
	TLV[TAG_4]	Byte array containing input data.
Le	•	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] keyPairId: keyPairId [1:kSE05x_TAG_1]
- [in] pskId: pskId [2:kSE05x_TAG_2]
- [in] hmacKeyId: hmacKeyId [3:kSE05x_TAG_3]
- [in] inputData: inputData [4:kSE05x_TAG_4]
- [in] inputDataLen: Length of inputData

Function Se05x_API_TLSGenerateRandom

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_TLSGenerateRandom(pSe05xSession_t session_ctx, uint8_t *randomValue,
                                         size_t *prandomValueLen)
```

Se05x_API_TLSGenerateRandom

Generates a random that is stored in the SE05X and used by TLSPerformPRF.

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	See SE05x_INS_t
P1	P1_TLS	See SE05x_P1_t
P2	P2_RANDOM	See SE05x_P2_t
Lc	#(Payload)	
Le	0x22	Expecting TLV with 32 bytes data.

R-APDU Body

Value	Description
TLV[TAG_1]	32-byte random value

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [out] randomValue: [0:kSE05x_TAG_1]
- [inout] prandomValueLen: Length for randomValue

Function Se05x_API_TLSPerformPRF

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_TLSPerformPRF (pSe05xSession_t session_ctx, uint32_t objectID, uint8_t digestAlgo, const uint8_t *label, size_t labelLen, const uint8_t *random, size_t randomLen, uint16_t reqLen, uint8_t *outputData, size_t *poutputDataLen, const SE05x_TLSPerformPRFType_t tlspf)
```

Se05x_API_TLSPerformPRF

The command TLSPerformPRF will compute either:

- the master secret for TLS according [RFC5246], section 8.1
- key expansion data from a master secret for TLS according [RFC5246], section 6.3

Each time before calling this function, TLSGenerateRandom must be called. Executing this function will clear the random that is stored in the SE05X .

The function can be called as client or as server and either using the pre- master secret or master secret as input, stored in an HMACKey. The input length must be either 16, 32, 48 or 64 bytes.

This results in P2 having 4 possibilities:

- P2_TLS_PRF_CLI_HELLO: pass the clientHelloRandom to calculate a master secret, the serverHelloRandom is in SE05X , generated by TLSGenerateRandom.
- P2_TLS_PRF_SRV_HELLO: pass the serverHelloRandom to calculate a master secret, the clientHelloRandom is in SE05X , generated by TLSGenerateRandom.
- P2_TLS_PRF_CLI_RANDOM: pass the clientRandom to generate key expansion data, the serverRandom is in SE05X , generated by TLSGenerateRandom.
- P2_TLS_PRF_SRV_RANDOM: pass the serverRandom to generate key expansion data, the clientRandom is in SE05X

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_CRYPTO	See SE05x_INS_t
P1	P1_TLS	See SE05x_P1_t
P2	See description above.	See SE05x_P2_t
Lc	#(Payload)	
TLV[TAG_1]	4-byte HMACKey identifier.	
TLV[TAG_2]	1-byte SE05x_DigestMode_t , except DIGEST_NO_HASH.	
TLV[TAG_3]	Label (1 to 64 bytes)	
TLV[TAG_4]	32-byte random	
TLV[TAG_5]	2-byte requested length	
Le	0x00	

R-APDU Body

Value	Description
TLV[TAG_1]	Byte array containing requested output data.

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] objectID: The object id
- [in] digestAlgo: The digest algorithm
- [in] label: The label
- [in] labelLen: The label length
- [in] random: The random
- [in] randomLen: The random length
- [in] reqLen: The request length
- outputData: The output data
- poutputDataLen: The poutput data length
- [in] tlspref: The tlspref

Function Se05x_API_VerifySessionUserID

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_VerifySessionUserID (pSe05xSession_t session_ctx, const uint8_t *userId,
                                         size_t userIdLen)
```

Se05x_API_VerifySessionUserID

Verifies the session user identifier (UserID) in order to allow setting up a session. If the UserID is correct, the session establishment is successful; otherwise the session cannot be opened (SW_CONDITIONS_NOT_SATISFIED is returned).

Command to Applet

Field	Value	Description
CLA	0x80	
INS	INS_MGMT	See SE05x_INS_t
P1	P1_DEFAULT	See SE05x_P1_t
P2	P2_SESSION_USERID	See SE05x_P2_t
Lc	#(Payload)	Payload length.
	TLV[TAG_1]	UserID value
Le	•	

R-APDU Body

NA

R-APDU Trailer

SW	Description
SW_NO_ERROR	The command is handled successfully.

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] userId: userId [1:kSE05x_TAG_1]
- [in] userIdLen: Length of userId

Function Se05x_API_WriteBinary

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

smStatus_t **Se05x_API_WriteBinary** (pSe05xSession_t *session_ctx*, pSe05xPolicy_t *policy*, uint32_t *objectID*, uint16_t *offset*, uint16_t *length*, **const** uint8_t **inputData*, size_t *inputDataLen*)

Se05x_API_WriteBinary

Creates or writes to a binary file object. Data are written to either the start of the file or (if specified) to the offset passed to the function.

Command to Applet

Field	Value	Description
P1	P1_BINARY	See SE05x_P1_t
P2	P2_DEFAULT	See SE05x_P2_t
Pay-load	TLV[TAG_POLICY]	array containing the object policy. [Optional: default policy applies] [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_1]	4-byte object identifier
	TLV[TAG_2]	2-byte file offset [Optional: default = 0]
	TLV[TAG_3]	2-byte file length (up to 0xFFFF). [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_4]	Data to be written [Optional: if not given, TAG_3 must be filled]
	TLV[TAG_11]	4-byte version [Optional]

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] policy: policy [1:kSE05x_TAG_POLICY]
- [in] objectID: object id [2:kSE05x_TAG_1]
- [in] offset: offset [3:kSE05x_TAG_2]
- [in] length: length [4:kSE05x_TAG_3]
- [in] inputData: input data [5:kSE05x_TAG_4]

- [in] inputDataLen: Length of inputData

Function Se05x_API_WriteECKey

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_WriteECKey (pSe05xSession_t session_ctx, pSe05xPolicy_t policy,
                                SE05x_MaxAttempts_t maxAttempt, uint32_t objectID,
                                SE05x_ECCurve_t curveID, const uint8_t *privKey, size_t
                                privKeyLen, const uint8_t *pubKey, size_t pubKeyLen, const
                                SE05x_INS_t ins_type, const SE05x_KeyPart_t key_part)
```

Se05x_API_WriteECKey

Write or update an EC key object.

P1KeyPart indicates the key type to be created (if the object does not yet exist).

If P1KeyPart = P1_KEY_PAIR, Private Key Value (TLV[TAG_3]) and Public Key Value (TLV[TAG_4]) must both be present, or both be absent. If absent, the key pair is generated in the SE05X .

If the object already exists, P1KeyPart is ignored.

Field	Value	Description
P1	SE05x_P1	See SE05x_P1_t , P1KeyType should only be set for new objects. P1_EC
P2	P2_DEFAULT	See P2
Pay-load	TLV[TAG_OBJECT]	array containing the object policy. [Optional: default policy applies] [Conditional - only when the object identifier is not in use yet]
	TLV[TAG_MAXATTEMPTS]	number of attempts. If 0 is given, this means unlimited. [Optional: default unlimited] [Conditional: only when the object identifier is not in use yet and INS includes INS_AUTH_OBJECT; see AuthenticationObjectPolicies]
	TLV[TAG_1]	4-byte object identifier
	TLV[TAG_2]	1-byte curve identifier, see ECCurve [Conditional: only when the object identifier is not in use yet;]
	TLV[TAG_3]	Private key value (see ECKeyRef) [Conditional: only when the private key is externally generated and P1KeyType is either P1_KEY_PAIR or P1_PRIVATE]
	TLV[TAG_4]	Public key value (see ECKeyRef) [Conditional: only when the public key is externally generated and P1KeyType is either P1_KEY_PAIR or P1_PUBLIC]
	TLV[TAG_1]	4-byte version [Optional]

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] policy: The policy
- [in] maxAttempt: The maximum attempt
- [in] objectID: The object id
- [in] curveID: The curve id
- [in] privKey: The priv key

- [in] privKeyLen: The priv key length
- [in] pubKey: The pub key
- [in] pubKeyLen: The pub key length
- [in] ins_type: The insert type
- [in] key_part: The key part

Function Se05x_API_WritePCR

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_WritePCR (pSe05xSession_t session_ctx, pSe05xPolicy_t policy, uint32_t pcrID,  
                                const uint8_t *initialValue, size_t initialValueLen, const uint8_t  
                                *inputData, size_t inputDataLen)
```

Se05x_API_WritePCR

Creates or writes to a PCR object.

A PCR is a hash to which data can be appended; i.e., writing data to a PCR will update the value of the PCR to be the hash of all previously inserted data concatenated with the new input data.

A PCR will always use DigestMode = DIGEST_SHA256; no other configuration possible.

If TAG_2 and TAG_3 is not passed, the PCR is reset to its initial value (i.e., the value set when the PCR was created).

This reset is controlled under the POLICY_OBJ_ALLOW_DELETE policy, so users that can delete the PCR can also reset the PCR to initial value.

Command to Applet

Field	Value	Description
P1	P1_PCR	See <i>SE05x_P1_t</i>
P2	P2_DEFAULT	See <i>SE05x_P2_t</i>
Pay-load	TLV[TAG_POLICY]	array containing the object policy. [Optional: default policy applies] [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_1]	4-byte PCR identifier.
	TLV[TAG_2]	Initial hash value [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_3]	Data to be extended to the existing PCR. [Conditional: only when the object identifier is already in use] [Optional: not present if a Reset is requested]

R-APDU Body

NA

R-APDU Trailer

Parameters

- [in] session_ctx: Session Context [0:kSE05x_pSession]
- [in] policy: policy [1:kSE05x_TAG_POLICY]
- [in] pcrID: object id [2:kSE05x_TAG_1]

- [in] initialValue: initialValue [3:kSE05x_TAG_2]
- [in] initialValueLen: Length of initialValue
- [in] inputData: inputData [4:kSE05x_TAG_3]
- [in] inputDataLen: Length of inputData

Function Se05x_API_WriteRSAKey

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_WriteRSAKey (pSe05xSession_t session_ctx, pSe05xPolicy_t policy, uint32_t objectID, uint16_t size, const uint8_t *p, size_t pLen, const uint8_t *q, size_t qLen, const uint8_t *dp, size_t dpLen, const uint8_t *dq, size_t dqLen, const uint8_t *qInv, size_t qInvLen, const uint8_t *pubExp, size_t pubExpLen, const uint8_t *priv, size_t privLen, const uint8_t *pubMod, size_t pubModLen, const SE05x_INS_t transient_type, const SE05x_KeyPart_t key_part, const SE05x_RSAKeyFormat_t rsa_format)
```

Se05x_API_WriteRSAKey

Creates or writes an RSA key or a key component.

Supported key sizes are listed in RSABitLength. Other values are not supported.

An RSA key creation requires multiple ADPUs to be sent:

- The first APDU must contain:
 - Policy (optional, so only if non-default applies)
 - Object identifier
 - Key size
 - 1 of the key components.
- Each next APDU must contain 1 of the key components.

The policy applies only once all key components are set.

Once an RSAKey object has been created, its format remains fixed and cannot be updated (so CRT or raw mode, no switch possible).

If the object already exists, P1KeyType is ignored.

For key pairs, if no component is present (TAG_3 until TAG_9), the key pair will be generated on chip; otherwise the key pair will be constructed starting with the given component.

For private keys or public keys, there should always be exactly one of the tags TAG_3 until TAG_10.

- TLV[TAG_8] and TLV[TAG_10] must only contain a value if the key pair is to be set to a known value and P1KeyType is either P1_KEY_PAIR or P1_PUBLIC; otherwise the value must be absent and the length must be equal to 0.

- TLV[TAG_9] must only contain a value if the key is to be set in raw mode to a known value and P1KeyType is either P1_KEY_PAIR or P1_PRIVATE; otherwise the value must be absent and the length must be equal to 0.
- If TLV[TAG_3] up to TLV[TAG_10] are absent (except TLV[TAG_8]), the RSA key will be generated on chip in case the object does not yet exist; otherwise it will be regenerated. This only applies to RSA key pairs.
- Keys can be set by setting the different components of a key; only 1 component can be set at a time in this case.

Field	Value	Description
P1	<i>SE05x_KeyPart_t</i> P1_RSA	See <i>tSE05x_P1_t</i>
P2	P2_DEFAULT or P2_RAW	See <i>SE05x_P2_t</i> ; P2_RAW only in case P1KeyPart = P1_KEY_PAIR and TLV[TAG_3] until TLV[TAG_10] is empty and the must generate a raw RSA key pair; all other cases: P2_DEFAULT.
Pay-load	TLV[TAG_POLICY]	Byte array containing the object policy. [Optional: default policy applies] [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_1]	4-byte object identifier
	TLV[TAG_2]	2-byte key size in bits (<i>SE05x_RSABitLength_t</i>) [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_3]	P component [Conditional: only when the object identifier is in CRT mode and the key is generated externally and P1KeyPart is either P1_KEY_PAIR or P1_PRIVATE]
	TLV[TAG_4]	Q component [Conditional: only when the object identifier is in CRT mode and the key is generated externally and P1KeyPart is either P1_KEY_PAIR or P1_PRIVATE]
	TLV[TAG_5]	DP component [Conditional: only when the object identifier is in CRT mode and the key is generated externally and P1KeyPart is either P1_KEY_PAIR or P1_PRIVATE]
	TLV[TAG_6]	DQ component [Conditional: only when the object identifier is in CRT mode and the key is generated externally and P1KeyPart is either P1_KEY_PAIR or P1_PRIVATE]
	TLV[TAG_7]	INV_Q component [Conditional: only when the object identifier is in CRT mode and the key is generated externally and P1KeyPart is either P1_KEY_PAIR or P1_PRIVATE]
	TLV[TAG_8]	Public exponent
	TLV[TAG_9]	Private Key (non-CRT mode only)
	TLV[TAG_10]	Public Key (Modulus)
	TLV[TAG_11]	4-byte version [Optional]

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] policy: The policy
- [in] objectID: The object id
- [in] size: The size
- [in] p: The part p
- [in] pLen: The p length
- [in] q: The quarter
- [in] qLen: The quarter length

- [in] dp: The part dp
- [in] dpLen: The dp length
- [in] dq: The part dq
- [in] dqLen: The dq length
- [in] qInv: The quarter inv
- [in] qInvLen: The quarter inv length
- [in] pubExp: The pub exponent
- [in] pubExpLen: The pub exponent length
- [in] priv: The priv
- [in] privLen: The priv length
- [in] pubMod: The pub modifier
- [in] pubModLen: The pub modifier length
- [in] transient_type: The transient type
- [in] key_part: The key part
- [in] rsa_format: The rsa format

Function Se05x_API_WriteSymmKey

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_WriteSymmKey (pSe05xSession_t session_ctx, pSe05xPolicy_t policy,
                                     SE05x_MaxAttempts_t maxAttempt, uint32_t objectID,
                                     SE05x_KeyID_t kekID, const uint8_t *keyValue, size_t
                                     keyValueLen, const SE05x_INS_t ins_type, const
                                     SE05x_SymmKeyType_t type)
```

Se05x_API_WriteSymmKey

Creates or writes an AES key, DES key or HMAC key, indicated by P1:

- P1_AES
- P1_DES
- P1_HMAC

Users can pass RFC3394 wrapped keys by indicating the KEK in TLV[TAG_2]. Note that RFC3394 required 8-byte aligned input, so this can only be used when the key has an 8-byte aligned length.

Command to Applet

Field	Value	Description
P1	See above	See SE05x_P1_t
P2	P2_DEFAULT	See SE05x_P2_t
Pay-load	TLV[TAG_POLICY]	array containing the object policy. [Optional: default policy applies] [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_MAX_ATTEMPTS]	number of attempts. If 0 is given, this means unlimited. [Optional: default unlimited] [Conditional: only when the object identifier is not in use yet and INS includes INS_AUTH_OBJECT; see AuthenticationObjectPolicies]
	TLV[TAG_1]	4-byte object identifier
	TLV[TAG_2]	4-byte KEK identifier [Conditional: only when the key value is RFC3394 wrapped]
	TLV[TAG_3]	Key value, either plain or RFC3394 wrapped.
	TLV[TAG_4]	Tag length for GCM/GMAC. Will only be used if the object is an AESKey. [Optional]
	TLV[TAG_11]	4-byte version [Optional]

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] policy: The policy
- [in] maxAttempt: The maximum attempt
- [in] objectID: The object id
- [in] kekID: The kek id
- [in] keyValue: The key value
- [in] keyValueLen: The key value length
- [in] ins_type: The insert type
- [in] type: The type

Function Se05x_API_WriteUserID

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU_apis.h

Function Documentation

```
smStatus_t Se05x_API_WriteUserID (pSe05xSession_t session_ctx, pSe05xPolicy_t policy, SE05x\_MaxAttempts\_t maxAttempt, uint32_t objectID, const uint8_t *userId, size_t userIdLen, const SE05x\_AttestationType\_t attestation_type)
```

Se05x_API_WriteUserID

Creates a UserID object, setting the user identifier value. The policy defines the maximum number of attempts that can be performed as comparison.

Command to Applet

Field	Value	Description
P1	P1_USERID	See SE05x_P1_t
P2	P2_DEFAULTS	See SE05x_P2_t
	TLV[TAG_POLICY]	May containing the object policy. [Optional: default policy applies] [Conditional: only when the object identifier is not in use yet]
	TLV[TAG_MAX_ATTEMPTS]	number of attempts. If 0 is given, this means unlimited. For pins, the maximum number of attempts must be smaller than 256. [Optional: default = 0] [Conditional: only when the object identifier is not in use yet and INS includes INS_AUTH_OBJECT; see -]
	TLV[TAG_1]	4-byte object identifier.
	TLV[TAG_2]	Byte array containing 4 to 16 bytes user identifier value.

Return The sm status.

Parameters

- [in] session_ctx: The session context
- [in] policy: The policy
- [in] maxAttempt: The maximum attempt
- [in] objectID: The object id
- [in] userId: The user identifier
- [in] userIdLen: The user identifier length
- [in] attestation_type: The attestation type

Function `se05x_get_sha_algo`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Function Documentation

SE05x_DigestMode_t **se05x_get_sha_algo** (*sss_algorithm_t algorithm*)

Function `Se05x_i2c_master_attst_txn`

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Function Documentation

```
smStatus_t Se05x_i2c_master_attst_txn (sss_session_t *sess, sss_object_t *keyObject,
                                         SE05x_I2CM_cmd_t *p, uint8_t *random_attst, size_t
                                         random_attstLen, SE05x_AttestationAlgo_t attst_algo,
                                         SE05x_TimeStamp_t *ptimeStamp, size_t *timeStamp-
                                         pLen, uint8_t *freshness, size_t *pfreshnessLen, uint8_t
                                         *chipId, size_t *pchipIdLen, uint8_t *signature, size_t
                                         *psignatureLen, uint8_t noOftags)
```

Se05x_i2c_master_attst_txn.

I2CM Read With Attestation

Pre p describes I2C master commands.

Post p contains execution state of I2C master commands, the I2C master commands can be overwritten to report on execution failure.

Parameters

- [in] sess: session identifier
- [in] keyObject: Keyobject which contains 4 byte attestaion KeyId
- [inout] p: Array of structure type capturing a sequence of i2c master cmd/rsp transactions.
- [in] random_attst: 16-byte freshness random
- [in] random_attstLen: length of freshness random
- [in] attst_algo: 1 byte attestationAlgo
- [out] ptimeStamp: timestamp
- [out] timeStampLen: Length for timestamp
- [out] freshness: freshness (random)
- [out] pfreshnessLen: Length for freshness
- [out] chipId: unique chip Id
- [out] pchipIdLen: Length for chipId
- [out] signature: signature
- [out] psignatureLen: Length for signature
- [in] noOftags: Amount of structures contained in p

Function Se05x_i2c_master_txn

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Function Documentation

```
smStatus_t Se05x_i2c_master_txn (sss_session_t *sess, SE05x_I2CM_cmd_t *cmds, uint8_t cmdLen)  
Se05x_i2c_master_txn.
```

I2CM Transaction

Pre p describes I2C master commands.

Post p contains execution state of I2C master commands, the I2C master commands can be overwritten to report on execution failure.

Parameters

- [in] sess: session identifier
- [inout] cmds: Array of structure type capturing a sequence of i2c master cmd/rsp transactions.
- [in] cmdLen: Amount of structures contained in cmds

Function Se05x_IsInValidRangeOfUID

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU.h

Function Documentation

```
bool Se05x_IsInValidRangeOfUID (uint32_t uid)
```

Function se05x_sssKeyTypeLenToCurveld

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Function Documentation

```
uint32_t se05x_sssKeyTypeLenToCurveId (sss_cipher_type_t keyType, size_t keyBits)
```

Function sems_lite_agent_init_context

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_agent_init_context (sems_lite_agent_ctx_t *context, sss_session_t *boot_ctx)
```

Initialize SEMS Lite agent context.

This function is used to initialize SEMS Lite agent context.

Return Status of the operation

Parameters

- context: Pointer to sems lite agent context.
- boot_ctx: Pointer to sss session context

Return Value

- kStatus_SEMS_Lite_Success*: The operation has completed successfully.
- kStatus_SEMS_Lite_ERR_General*: The operation has failed.

Function sems_lite_agent_load_package

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sems_lite_status_t sems_lite_agent_load_package (sems_lite_agent_ctx_t *context, multi-
cast_package_t *multiPkgBuf)
```

Load Applet package.

This function load an available update package on the SE and assure the tearing safe update of the SE.

Return Status of the operation

Note More return codes would be added to request host to either retry or install older package.

Parameters

- context: Pointer to sems lite agent context.
- pkgBuf: Pointer to package. It must follow the format defined in *multicast_package_t*.

Return Value

- *kStatus_SEMS_Lite_Success*: The operation has completed successfully.
- *kStatus_SEMS_Lite_ERR_COM*: Communication to SE failed.
- *kStatus_SEMS_Lite_ERR_DoReRun*: Update not completed please provide update package again.
- *kStatus_SEMS_Lite_ERR_NotApplicable*: Update not applicable on this Chip/type.
- *kStatus_SEMS_Lite_ERR_DoRecovery*: Update can not be completed. Please provide recovery package, to roll back to last working version.
- *kStatus_SEMS_Lite_ERR_Fatal*: Unresolvable error. (This category of errors can only appear in testing of an update package, in the case of NXP updates this is testes before by NXP)
- *kStatus_SEMS_Lite_ERR_NotEnoughNVMemory*: Don't have has enough NV memory for the SEMS Lite Script.
- *kStatus_SEMS_Lite_ERR_NotEnoughTransientMemory*: Don't have enough transient memory for the SEMS Lite Script .

Function **sems_lite_agent_session_close**

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_agent_session_close (sems_lite_agent_ctx_t *context)
```

Close the connection to SEMS Lite Applet.

Return The api status.

Parameters

- context: The context

Return Value

- *kStatus_SEMS_Lite_Success*: Could close connection 1.
- *kStatus_SEMS_Lite_ERR_General*: Could not close connection 1.

Function `sems_lite_agent_session_open`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

`sss_status_t sems_lite_agent_session_open(sems_lite_agent_ctx_t *context)`

Open a Physical connection to SEMS Lite Applet.

Calling this API opens Locical Connection 1 and selecs the SEMS Lite applet.

Return The api status.

Parameters

- context: SEMS Lite Agent Context

Return Value

- `kStatus_SEMS_Lite_Success`: Could connect to SEMS Lite Applet.
- `kStatus_SEMS_Lite_ERR_General`: Could not connect to SEMS Lite Applet.

Function `sems_lite_check_AppletRecoveryStatus`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

`sss_status_t sems_lite_check_AppletRecoveryStatus(sems_lite_agent_ctx_t *pContext, sems_lite_recovery_status_t *pRecoveryStatus)`

Check Applet Recovery Status.

This API will return the status of applet recovery status

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRecoveryStatus: Pointer to recovery status.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sems_lite_check_AppletUpgradeProgress`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_check_AppletUpgradeProgress (sems_lite_agent_ctx_t *pContext,  
                                                sems_lite_upgradeProgress_status_t  
                                                *pUpgradeStatus)
```

Check Applet Upgrade Progress.

This API will return the status of applet upgrade progress status

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pUpgradeStatus: Pointer to upgrade status.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_check_Tear`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_check_Tear (sems_lite_agent_ctx_t *pContext, sems_lite_teardown_Status_t  
                                  *pTearStatus)
```

Check Tear during script execution.

This API will check whether there was tear during script execution

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pTearStatus: Pointer to tear status.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_AgentVersion`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

`sss_status_t sems_lite_get_AgentVersion(uint8_t *pRspBuf, size_t *pRspBufLen)`

Get the SEMS Lite Agent version.

This API will return the SEMS Lite Agent Version no.

Return Status of the operation

Parameters

- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_AppletVersion`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

`sss_status_t sems_lite_get_AppletVersion(sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf, size_t *pRspBufLen)`

Get the Applet version.

This API will return the SEMS Lite Applet Version no.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_available_mem`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_available_mem(sems_lite_agent_ctx_t *pContext, uint8_t *pAvailableMem)  
{ function_description }
```

Return The sss status.

Parameters

- context: The context
- pAvailableMem: Available Memory Space Information

Function `sems_lite_get_CA_identifier`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_CA_identifier(sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf,  
size_t *pRspBufLen)
```

Get the CA Identifier.

This API will return the CA Identifier.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_ENCIdentifier`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_ENCIdentifier(sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf,
                                         size_t *pRspBufLen)
```

Get the ENC Identifier.

This API will return the ENC Identifier.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function sems_lite_get_FIPS_EC_parameter_type

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_FIPS_EC_parameter_type(sems_lite_agent_ctx_t *pContext, uint8_t
                                                 *pParamType)
```

Get Configured EC domain parameter type.

This API will return Configured EC domain parameter type

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pParamType: Pointer to parameter type.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_FIPS_info`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

`sss_status_t sems_lite_get_FIPS_info (sems_lite_agent_ctx_t *pContext, uint8_t *pFIPSInfo)`
Get Configured FIPS Information.

This API will return Configured FIPS Information

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pFIPSInfo: Pointer to FIPS Info.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_Publickey`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

`sss_status_t sems_lite_get_Publickey (sems_lite_agent_ctx_t *pContext, uint8_t *pRspBuf, size_t *pRspBufLen)`

Read Public Key.

This API will read root certificates public key of the device.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_SEAppInfo`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_SEAppInfo (sems_lite_agent_ctx_t *pContext, const uint8_t *searchAID,
                                         uint8_t searchAidLen, sems_lite_SEAppInfoList_t *pAppInfo,
                                         size_t *pAppInfoLen)
```

Low level API to get App INFO from the SE according to format mentioned in - Table 11-36: GlobalPlatform Registry Data (TLV), GPCardSpc_v2.2.pdf.

This API will read the currently present Applications ELF/ELM AIDs and versions as well as the present instances from the SE.

Return Status of the operation

Parameters

- pContext*: Pointer to sems lite agent context.
- [in] *searchAID*: The search aid
- [in] *searchAidLen*: The search aid length
- pAppInfo*: Parsed structures
- [inout] *pAppInfoLen*: Length of parsed structures.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_SEAppInfoRAW`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_SEAppInfoRAW (sems_lite_agent_ctx_t *pContext, const uint8_t
                                         *searchAID, uint8_t searchAidLen, uint8_t *pRspBuf,
                                         size_t *pRspBufLen)
```

Low level API to get Raw App INFO from the SE.

This API will read the currently present Applications ELF/ELM AIDs and versions as well as the present instances from the SE.

Return Status of the operation

Parameters

- pContext*: Pointer to sems lite agent context.
- [out] *pRspBuf*: Pointer to response Buffer.
- [in] *searchAID*: The search aid

- [in] searchAidLen: The search aid length
- [inout] pRspBufLen: Pointer to length of the response Buffer.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_SEPkgInfo`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_SEPkgInfo(sems_lite_agent_ctx_t *pContext, const uint8_t *searchAID,  
                                uint8_t searchAidLen, sems_lite_SEAppInfoList_t *pAppInfo,  
                                size_t *pAppInfoLen)
```

Low level API to get PKG INFO from the SE according to format mentioned in - Table 11-36: GlobalPlatform Registry Data (TLV), GPCardSpc_v2.2.pdf.

This API will read the currently present Applications ELF/ELM AIDs and versions as well as the present instances from the SE.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- [in] searchAID: The search aid
- [in] searchAidLen: The search aid length
- pAppInfo: Parsed structures
- [inout] pAppInfoLen: Length of parsed structures.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_SEPkgInfoRAW`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_SEPkgInfoRAW(sems_lite_agent_ctx_t *pContext, const uint8_t
                                         *searchAID, uint8_t searchAidLen, uint8_t *pRspBuf,
                                         size_t *pRspBufLen)
```

Low level API to get RAW PKG INFO from the SE.

This API will read the currently present Applications ELF/ELM AIDs and versions as well as the present instances from the SE.

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- [in] searchAID: The search aid
- [in] searchAidLen: The search aid length
- [out] pRspBuf: Pointer to response Buffer.
- [inout] pRspBufLen: Pointer to length of the response Buffer.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function **sems_lite_get_SignatureofLastScript**

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

```
sss_status_t sems_lite_get_SignatureofLastScript(sems_lite_agent_ctx_t *pContext, uint8_t
                                                 *pRspBuf, size_t *pRspBufLen)
```

Get the signature of last executed script.

This API will called in case there is tear down

Return Status of the operation

Parameters

- pContext: Pointer to sems lite agent context.
- pRspBuf: Pointer to response Buffer.
- pRspBufLen: Pointer to length of the response Buffer

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function `sems_lite_get_UUID`

- Defined in file_semslite_lib_inc_sems_lite_api.h

Function Documentation

sss_status_t **sems_lite_get_UUID** (*sems_lite_agent_ctx_t* **pContext*, *uint8_t* **pRspBuf*, *size_t* **pRspBufLen*)

Retrieve UUID from SE.

This API read UUID of the SE.

Return Status of the operation

Parameters

- pContext*: Pointer to sems lite agent context.
- pRspBuf*: Pointer to response Buffer.
- pRspBufLen*: Pointer to length of the response Buffer.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function `sss_aead_context_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

void sss_aead_context_free (sss_aead_t *context)

AEAD context release. The function frees aead context.

Parameters

- context*: Pointer to aead context.

Function `sss_aead_context_init`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_aead_context_init(sss_aead_t *context, sss_session_t *session, sss_object_t *keyObject, sss_algorithm_t algorithm, sss_mode_t mode)`

AEAD context init. The function initializes aead context with initial values.

Return Status of the operation

Parameters

- `context`: Pointer to aead crypto context.
- `session`: Associate SSS session with aead context.
- `keyObject`: Associate SSS key object with aead context.
- `algorithm`: One of the aead algorithms defined by `sss_algorithm_t`.
- `mode`: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_aead_finish`

- Defined in file `_sss_inc_fsl_sss_api.h`

Function Documentation

`sss_status_t sss_aead_finish(sss_aead_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen, uint8_t *tag, size_t *tagLen)`

Finalize AEAD. The function processes data that has not been processed by previous calls to `sss_aead_update()` as well as `srcData`. It finalizes the AEAD operations and computes the tag (encryption) or compares the computed tag with the tag supplied in the parameter (decryption).

Return Status of the operation

Parameters

- `context`: Pointer to aead crypto context.
- `srcData`: Buffer containing final chunk of input data.
- `srcLen`: Length of final chunk of input data in bytes.
- `destData`: Buffer containing output data.
- `[inout] destLen`: Length of output data in bytes. Buffer length on entry, reflects actual output size on return.
- `tag`: Encryption: Output buffer filled with computed tag Decryption: Input buffer filled with received tag
- `tagLen`: Length of the computed or received tag in bytes. For AES-GCM it must be 4,8,12,13,14,15 or 16. For AES-CCM it must be 4,6,8,10,12,14 or 16.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function sss_aead_init

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_aead_init(sss_aead_t *context, uint8_t *nonce, size_t nonceLen, size_t tagLen, size_t aadLen, size_t payloadLen)`

AEAD init. The function starts the aead operation.

Return Status of the operation

Parameters

- **context**: Pointer to aead crypto context.
- **nonce**: The operation nonce or IV.
- **nonceLen**: The length of nonce in bytes. For AES-GCM it must be ≥ 1 . For AES-CCM it must be 7, 8, 9, 10, 11, 12, or 13.
- **tagLen**: Length of the computed or received tag in bytes. For AES-GCM it must be 4,8,12,13,14,15 or 16. For AES-CCM it must be 4,6,8,10,12,14 or 16.
- **aadLen**: Input size in bytes of AAD. Used only for AES-CCM. Ignored for AES-GCM.
- **payloadLen**: Length in bytes of the payload. Used only for AES-CCM. Ignored for AES-GCM.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function sss_aead_one_go

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_aead_one_go(sss_aead_t *context, const uint8_t *srcData, uint8_t *destData, size_t size, uint8_t *nonce, size_t nonceLen, const uint8_t *aad, size_t aadLen, uint8_t *tag, size_t *tagLen)`

AEAD in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- **context:** Pointer to aead crypto context.
- **srcData:** Buffer containing the input data.
- **destData:** Buffer containing the output data.
- **size:** Size of input and output data buffer in bytes.
- **nonce:** The operation nonce or IV.
- **nonceLen:** The length of nonce in bytes. For AES-GCM it must be ≥ 1 . For AES-CCM it must be 7, 8, 9, 10, 11, 12, or 13.
- **aad:** Input additional authentication data AAD
- **aadLen:** Input size in bytes of AAD
- **tag:** Encryption: Output buffer filled with computed tag Decryption: Input buffer filled with received tag
- **tagLen:** Length of the tag in bytes. For AES-GCM it must be 4,8,12,13,14,15 or 16. For AES-CCM it must be 4,6,8,10,12,14 or 16.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function sss_aead_update

- Defined in file_ss_inc_fsl_ss_api.h

Function Documentation

`sss_status_t sss_aead_update(sss_aead_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen)`

AEAD data update. Feeds a new chunk of the data payload. Input data does not have to be a multiple of block size. Subsequent calls to this function are possible. Unless one or more calls of this function have supplied sufficient input data, no output is generated. The integration check is done by [*sss_aead_finish\(\)*](#). Until then it is not sure if the decrypt data is authentic.

Return Status of the operation

Parameters

- **context:** Pointer to aead crypto context.
- **srcData:** Buffer containing the input data.
- **srcLen:** Length of the input data in bytes.
- **destData:** Buffer containing the output data.
- **[inout] destLen:** Length of the output data in bytes. Buffer length on entry, reflects actual output size on return.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_aead_update_aad`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_aead_update_aad(sss_aead_t *context, const uint8_t *aadData, size_t aadDataLen)`
Feeds a new chunk of the AAD. Subsequent calls of this function are possible.

Return Status of the operation

Parameters

- context: Pointer to aead crypto context
- aadData: Input buffer containing the chunk of AAD
- aadDataLen: Length of the AAD data in bytes.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_asymmetric_context_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`void sss_asymmetric_context_free(sss_asymmetric_t *context)`
Asymmetric context release. The function frees asymmetric context.

Parameters

- context: Pointer to asymmetric context.

Function `sss_asymmetric_context_init`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_asymmetric_context_init(sss_asymmetric_t *context, sss_session_t *session,
                                         sss_object_t *keyObject, sss_algorithm_t algorithm,
                                         sss_mode_t mode)
```

Asymmetric context init. The function initializes asymmetric context with initial values.

Return Status of the operation

Parameters

- **context:** Pointer to asymmetric crypto context.
- **session:** Associate SSS session with asymmetric context.
- **keyObject:** Associate SSS key object with asymmetric context.
- **algorithm:** One of the asymmetric algorithms defined by `sss_algorithm_t`.
- **mode:** One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function sss_asymmetric_decrypt

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_asymmetric_decrypt(sss_asymmetric_t *context, const uint8_t *srcData, size_t sr-
                                         cLen, uint8_t *destData, size_t *destLen)
```

Asymmetric decryption The function uses asymmetric algorithm to decrypt data. Private key portion of a key pair is used for decryption.

Return Status of the operation

Parameters

- **context:** Pointer to asymmetric context.
- **srcData:** Input buffer
- **srcLen:** Length of the input in bytes
- **destData:** Output buffer
- **destLen:** Length of the output in bytes

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_asymmetric_encrypt`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_asymmetric_encrypt (sss_asymmetric_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen)`

Asymmetric encryption The function uses asymmetric algorithm to encrypt data. Public key portion of a key pair is used for encryption.

Return Status of the operation

Parameters

- context: Pointer to asymmetric context.
- srcData: Input buffer
- srcLen: Length of the input in bytes
- destData: Output buffer
- destLen: Length of the output in bytes

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_asymmetric_sign_digest`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_asymmetric_sign_digest (sss_asymmetric_t *context, uint8_t *digest, size_t digestLen, uint8_t *signature, size_t *signatureLen)`

Asymmetric signature of a message digest The function signs a message digest.

Return Status of the operation

Parameters

- context: Pointer to asymmetric context.
- digest: Input buffer containing the input message digest
- digestLen: Length of the digest in bytes
- signature: Output buffer written with the signature of the digest
- signatureLen: Length of the signature in bytes

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.

- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_asymmetric_verify_digest`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_asymmetric_verify_digest(sss_asymmetric_t *context, uint8_t *digest, size_t digestLen, uint8_t *signature, size_t signatureLen)`

Asymmetric verify of a message digest The function verifies a message digest.

Return Status of the operation

Parameters

- context: Pointer to asymmetric context.
- digest: Input buffer containing the input message digest
- digestLen: Length of the digest in bytes
- signature: Input buffer containing the signature to verify
- signatureLen: Length of the signature in bytes

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_cipher_crypt_ctr`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_cipher_crypt_ctr(sss_symmetric_t *context, const uint8_t *srcData, uint8_t *destData, size_t size, uint8_t *initialCounter, uint8_t *lastEncryptedCounter, size_t *szLeft)`

Symmetric AES in Counter mode in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- srcData: Buffer containing the input data.
- destData: Buffer containing the output data.

- `size`: Size of source and destination data buffers in bytes.
- [inout] `initialCounter`: Input counter (updates on return)
- [out] `lastEncryptedCounter`: Output cipher of last counter, for chained CTR calls. NULL can be passed if chained calls are not used.
- [out] `szLeft`: Output number of bytes in left unused in lastEncryptedCounter block. NULL can be passed if chained calls are not used.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function sss_cipher_finish

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_cipher_finish(sss_symmetric_t *context, const uint8_t *srcData, size_t srcLen,
                               uint8_t *destData, size_t *destLen)
Symmetric cipher finalize.
```

Return Status of the operation**Parameters**

- `context`: Pointer to symmetric crypto context.
- `srcData`: Buffer containing final chunk of input data.
- `srcLen`: Length of final chunk of input data in bytes.
- `destData`: Buffer containing output data.
- [inout] `destLen`: Length of output data in bytes. Buffer length on entry, reflects actual output size on return.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function sss_cipher_init

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_cipher_init (sss_symmetric_t *context, uint8_t *iv, size_t ivLen)`
 Symmetric cipher init. The function starts the symmetric cipher operation.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- iv: Buffer containing the symmetric operation Initialization Vector.
- ivLen: Length of the Initialization Vector in bytes.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_cipher_one_go`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_cipher_one_go (sss_symmetric_t *context, uint8_t *iv, size_t ivLen, const uint8_t *srcData, uint8_t *destData, size_t dataLen)`
 Symmetric cipher in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- iv: Buffer containing the symmetric operation Initialization Vector.
- ivLen: Length of the Initialization Vector in bytes.
- srcData: Buffer containing the input data.
- destData: Buffer containing the output data.
- dataLen: Size of input and output data buffer in bytes.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_cipher_type_sz`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`const char *sss_cipher_type_sz (sss_cipher_type_t cipher_type)`
Returns string error code for `sss_cipher_type_t`.

Return String conversion of `cipher_type` to String.

Parameters

- [in] status: See `sss_cipher_type_t`

Function `sss_cipher_update`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_cipher_update (sss_symmetric_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen)`
Symmetric cipher update. Input data does not have to be a multiple of block size. Subsequent calls to this function are possible. Unless one or more calls of this function have supplied sufficient input data, no output is generated. The cipher operation is finalized with a call to `sss_cipher_finish()`.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- srcData: Buffer containing the input data.
- srcLen: Length of the input data in bytes.
- destData: Buffer containing the output data.
- [inout] destLen: Length of the output data in bytes. Buffer length on entry, reflects actual output size on return.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function sss_derive_key_context_free

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`void sss_derive_key_context_free (sss_derive_key_t *context)`

Derive key context release. The function frees derive key context.

Parameters

- context: Pointer to derive key context.

Function sss_derive_key_context_init

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_derive_key_context_init (sss_derive_key_t *context, sss_session_t *session, sss_object_t *keyObject, sss_algorithm_t algorithm, sss_mode_t mode)`

Derive key context init. The function initializes derive key context with initial values.

Return Status of the operation

Parameters

- context: Pointer to derive key context.
- session: Associate SSS session with the derive key context.
- keyObject: Associate SSS key object with the derive key context.
- algorithm: One of the derive key algorithms defined by `sss_algorithm_t`.
- mode: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_derive_key_dh`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_derive_key_dh (sss_derive_key_t *context, sss_object_t *otherPartyKeyObject, sss_object_t *derivedKeyObject)`

Asymmetric key derivation Diffie-Hellmann The function cryptographically derives a key from another key. For example Diffie-Hellmann.

Return Status of the operation

Parameters

- context: Pointer to derive key context.
- otherPartyKeyObject: Public key of the other party in the Diffie-Hellmann algorithm
- [inout] derivedKeyObject: Reference to a derived key

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_derive_key_go`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_derive_key_go (sss_derive_key_t *context, const uint8_t *saltData, size_t saltLen, const uint8_t *info, size_t infoLen, sss_object_t *derivedKeyObject, uint16_t deriveDataLen, uint8_t *hkdfOutput, size_t *hkdfOutputLen)`

Symmetric key derivation The function cryptographically derives a key from another key. For example MIFARE key derivation, PRF, HKDF-Extract.

Return Status of the operation

Parameters

- context: Pointer to derive key context.
- saltData: Input data buffer, typically with some random data.
- saltLen: Length of saltData buffer in bytes.
- info: Input data buffer, typically with some fixed info.
- infoLen: Length of info buffer in bytes.
- [inout] derivedKeyObject: Reference to a derived key
- deriveDataLen: **TODO** Document this

- hkdfOutput: **TODO** Document this
- hkdfOutputLen: **TODO** Document this

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function sss_derive_key_one_go

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_derive_key_one_go(sss_derive_key_t *context, const uint8_t *saltData, size_t saltLen, const uint8_t *info, size_t infoLen, sss_object_t *derivedKeyObject, uint16_t deriveDataLen)`

Symmetric key derivation (replaces the deprecated function `sss_derive_key_go`) The function cryptographically derives a key from another key. For example MIFARE key derivation, PRF, HKDF-Extract-Expand, HKDF-Expand. Refer to `sss_derive_key_sobj_one_go` in case the Salt is available as a key object.

Return Status of the operation

Parameters

- context: Pointer to derive key context.
- saltData: Input data buffer, typically with some random data.
- saltLen: Length of saltData buffer in bytes.
- info: Input data buffer, typically with some fixed info.
- infoLen: Length of info buffer in bytes.
- [inout] derivedKeyObject: Reference to a derived key
- [in] deriveDataLen: Expected length of derived key.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_derive_key_sobj_one_go`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_derive_key_sobj_one_go (sss_derive_key_t *context, sss_object_t *saltKeyObject,
                                         const uint8_t *info, size_t infoLen, sss_object_t *de-
                                         rivedKeyObject, uint16_t deriveDataLen)
```

Symmetric key derivation (salt in key object) Refer to [`sss_derive_key_one_go`](#) in case the salt is not available as a key object.

Return Status of the operation

Parameters

- context: Pointer to derive key context
- saltKeyObject: Reference to salt. The salt key object must reside in the same keystore as the derive key context.
- [in] info: Input data buffer, typically with some fixed info.
- [in] infoLen: Length of info buffer in bytes.
- derivedKeyObject: Reference to a derived key
- [in] deriveDataLen: The derive data length

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_digest_context_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
void sss_digest_context_free (sss_digest_t *context)
```

Digest context release. The function frees digest context.

Parameters

- context: Pointer to digest context.

Function `sss_digest_context_init`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_digest_context_init (sss_digest_t *context, sss_session_t *session, sss_algorithm_t algorithm, sss_mode_t mode)`

Digest context init. The function initializes digest context with initial values.

Return Status of the operation

Parameters

- context: Pointer to digest context.
- session: Associate SSS session with digest context.
- algorithm: One of the digest algorithms defined by `sss_algorithm_t`.
- mode: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_digest_finish`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_digest_finish (sss_digest_t *context, uint8_t *digest, size_t *digestLen)`

Finish digest for a message. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to digest context.
- digest: Output message digest
- digestLen: Message digest byte length

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_digest_init`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_digest_init(sss_digest_t *context)`

Init digest for a message. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- `context`: Pointer to digest context.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_digest_one_go`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_digest_one_go(sss_digest_t *context, const uint8_t *message, size_t messageLen, uint8_t *digest, size_t *digestLen)`

Message digest in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- `context`: Pointer to digest context.
- `message`: Input message
- `messageLen`: Length of the input message in bytes
- `digest`: Output message digest
- `digestLen`: Message digest byte length

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_digest_update`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_digest_update(sss_digest_t *context, const uint8_t *message, size_t messageLen)`
Update digest for a message.

The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to digest context.
- message: Buffer with a message chunk.
- messageLen: Length of the input buffer in bytes.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_key_object_allocate_handle`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_allocate_handle(sss_object_t *keyObject, uint32_t keyId, sss_key_part_t keyPart, sss_cipher_type_t cipherType, size_t keyByteLenMax, uint32_t options)`

Allocate / pre-provision memory for new key.

This API allows underlying cryptographic subsystems to perform preconditions before creating any cryptographic key object.

Return Status of object allocation.

Parameters

- [inout] keyObject: The object If required, update implementation defined values inside the keyObject
- keyId: External Key ID. Later on this may be used by `sss_key_object_get_handle`
- keyPart: See `sss_key_part_t`
- cipherType: See `sss_cipher_type_t`
- keyByteLenMax: Maximum storage this type of key may need. For systems that have their own internal allocation table this would help
- options: 0 = Persistant Key (Default) or Transient Key. See `sss_key_object_mode_t`

Function `sss_key_object_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`void sss_key_object_free (sss_object_t *keyObject)`

Destructor for the key object. The function frees key object context.

Parameters

- keyObject: Pointer to key object context.

Function `sss_key_object_get_access`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_get_access (sss_object_t *keyObject, uint32_t *access)`

Check what are access restrictions on an object

Return

Parameters

- keyObject: Object
- access: What is permitted

Function `sss_key_object_get_handle`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_get_handle (sss_object_t *keyObject, uint32_t keyId)`

Get handle to an existing allocated/provisioned/created Object.

See `sss_key_object_allocate_handle`.

After calling this API, Ideally keyObject should become equivlant to as set after the calling of `sss_key_object_allocate_handle` api.

Return The sss status.

Parameters

- keyObject: The key object
- [in] keyId: The key identifier

Function sss_key_object_get_purpose

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_get_purpose (sss_object_t *keyObject, sss_mode_t *purpose)`

Check what is purpose restrictions on an object

Return**Parameters**

- keyObject: Object to be checked
- purpose: Know what is permitted.

Function sss_key_object_get_user

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_get_user (sss_object_t *keyObject, uint32_t *user)`

get attributes

Function sss_key_object_init

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_init (sss_object_t *keyObject, sss_key_store_t *keyStore)`

Constructor for a key object data structure The function initializes keyObject data structure and associates it with a key store in which the plain key and other attributes are stored.

Return Status of the operation**Parameters**

- keyObject:
- keyStore:

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_key_object_set_access`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_set_access (sss_object_t *keyObject, uint32_t access, uint32_t options)`

Assign access permissions to a key object.

Parameters

- `keyObject`: the object where permission restrictions are applied
- `access`: Logical OR of read, write, delete, use, change attributes defined by enum `_sss_access_permission`.
- `options`: Transient or persistent update. Allows for transient update of persistent attributes.

Function `sss_key_object_set_eccgfp_group`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_set_eccgfp_group (sss_object_t *keyObject, sss_eccgfp_group_t *group)`

Set elliptic curve domain parameters over Fp for a key object.

When the key object is a reference to one of ECC Private, ECC Public or ECC Pair key types, this function shall be used to specify the exact domain parameters prior to using the key object for ECDSA or ECDH algorithms.

Parameters

- `keyObject`: The destination key object
- `group`: Pointer to elliptic curve domain parameters over Fp (sextuple p,a,b,G,n,h)

Function `sss_key_object_set_purpose`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_set_purpose (sss_object_t *keyObject, sss_mode_t purpose, uint32_t options)`

Assign purpose to a key object.

Parameters

- `keyObject`: the object where permission restrictions are applied
- `purpose`: Usage of the key.
- `options`: Transient or persistent update. Allows for transient update of persistent attributes.

Function `sss_key_object_set_user`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_object_set_user(sss_object_t *keyObject, uint32_t user, uint32_t options)`

Assign user to a key object.

Parameters

- `keyObject`: the object where permission restrictions are applied
- `user`: Assign User id for a key object. The user is kept in the key store along with the key data and other properties.
- `options`: Transient or persistent update. Allows for transient update of persistent attributes.

Function `sss_key_store_allocate`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_store_allocate(sss_key_store_t *keyStore, uint32_t keystoreId)`

Get handle to key store. If the key store already exists, nothing is allocated. If the key store does not exists, new empty key store is created and initialized. Key store context structure is updated with actual information.

Parameters

- [out] `keyStore`: Pointer to key store context. Key store context is updated on function return.
- `keystoreId`: Implementation specific ID, can be used in case security subsystem manages multiple different key stores.

Function `sss_key_store_context_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`void sss_key_store_context_free(sss_key_store_t *keyStore)`

Destructor for the key store context.

Function sss_key_store_context_init

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_store_context_init (sss_key_store_t *keyStore, sss_session_t *session)`

Constructor for the key store context data structure.

Parameters

- [out] keyStore: Pointer to key store context. Key store context is updated on function return.
- session: Session context.

Function sss_key_store_erase_key

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_store_erase_key (sss_key_store_t *keyStore, sss_object_t *keyObject)`

Delete / destroy allocated keyObject .

Return The sss status.

Parameters

- keyStore: The key store
- keyObject: The key object to be deleted

Function sss_key_store_freeze_key

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_store_freeze_key (sss_key_store_t *keyStore, sss_object_t *keyObject)`

The referenced key cannot be updated any more.

Return The sss status.

Parameters

- keyStore: The key store
- keyObject: The key object to be locked / frozen.

Function `sss_key_store_generate_key`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_key_store_generate_key(sss_key_store_t *keyStore, sss_object_t *keyObject, size_t
                                         keyBitLen, void *options)
```

This function generates key[] in the destination key store.

Function `sss_key_store_get_key`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_key_store_get_key(sss_key_store_t *keyStore, sss_object_t *keyObject, uint8_t
                                   *data, size_t *dataLen, size_t *pKeyBitLen)
```

This function exports plain key[] from key store (if constraints and user id allows reading)

Function `sss_key_store_load`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_key_store_load(sss_key_store_t *keyStore)
```

Load from persistent memory to cached objects.

Function `sss_key_store_open_key`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_key_store_open_key(sss_key_store_t *keyStore, sss_object_t *keyObject)
```

Access key store using one more level of encryption.

e.g. Access keys / encryption key during storage

Return The sss status.

Parameters

- `keyStore`: The key store
- `keyObject`: The key object that is to be used as a KEK (Key Encryption Key)

Function `sss_key_store_save`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_store_save (sss_key_store_t *keyStore)`

Save all cached persistent objects to persistent memory.

Function `sss_key_store_set_key`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_key_store_set_key (sss_key_store_t *keyStore, sss_object_t *keyObject, const uint8_t *data, size_t dataLen, size_t keyBitLen, void *options, size_t optionsLen)`

This function moves data[] from memory to the destination key store.

Return

Parameters

- keyStore: Key store context
- keyObject: Reference to a key and it's properties
- data: Data to be stored in Key. When setting ecc private key only, do not include key header.
- dataLen: Length of the data
- keyBitLen: Crypto algorithm key bit length
- options: Pointer to implementation specific options
- optionsLen: Length of the options in bytes

Function `sss_mac_context_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`void sss_mac_context_free (sss_mac_t *context)`

MAC context release. The function frees mac context.

Parameters

- context: Pointer to mac context.

Function sss_mac_context_init

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_mac_context_init(sss_mac_t *context, sss_session_t *session, sss_object_t *keyObject, sss_algorithm_t algorithm, sss_mode_t mode)`

MAC context init. The function initializes mac context with initial values.

Return Status of the operation

Parameters

- context: Pointer to mac context.
- session: Associate SSS session with mac context.
- keyObject: Associate SSS key object with mac context.
- algorithm: One of the mac algorithms defined by `sss_algorithm_t`.
- mode: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function sss_mac_finish

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_mac_finish(sss_mac_t *context, uint8_t *mac, size_t *macLen)`

Finish mac for a message. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to mac context.
- mac: Output message MAC
- macLen: Computed MAC byte length

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function sss_mac_init

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_mac_init(sss_mac_t *context)`

Init mac for a message. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to mac context.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function sss_mac_one_go

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_mac_one_go(sss_mac_t *context, const uint8_t *message, size_t messageLen, uint8_t *mac, size_t *macLen)`

Message MAC in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to mac context.
- message: Input message
- messageLen: Length of the input message in bytes
- mac: Output message MAC
- macLen: Computed MAC byte length

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function sss_mac_update

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_mac_update(sss_mac_t *context, const uint8_t *message, size_t messageLen)`

Update mac for a message.

The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to mac context.
- message: Buffer with a message chunk.
- messageLen: Length of the input buffer in bytes.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.

Function sss_mbedtls_associate_ecdhctx

- Defined in file_sss_plugin_mbedtls_sss_mbedtls.h

Function Documentation

`int sss_mbedtls_associate_ecdhctx(mbedtls_ssl_handshake_params *handshake, sss_object_t *pkeyObject, sss_key_store_t *hostKs)`

Update ECDSA HandShake key with given index.

Return 0 if successful, or 1 if unsuccessful

Parameters

- [inout] handshake: Pointer to the mbedtls_ssl_handshake_params which will be associated with data corresponding to the key index
- [in] pkeyObject: The object that we are going to be use.
- [in] hostKs: Keystore to host for session key.

Function `sss_mbedtls_associate_keypair`

- Defined in file_sss_plugin_mbedtls_sss_mbedtls.h

Function Documentation

`int sss_mbedtls_associate_keypair(mbedtls_pk_context *pkey, sss_object_t *pkeyObject)`

Associate a keypair provisioned in the secure element for subsequent operations.

Description Implementation of key association between NXP Secure Element and mbedtls.

History 1.0 30-jan-2018 : Initial version

Return 0 if successful, or 1 if unsuccessful

Parameters

- [out] pkey: Pointer to the mbedtls_pk_context which will be associated with data corresponding to the key_index
- [in] pkeyObject: The object that we are going to be use.

Function `sss_mbedtls_associate_pubkey`

- Defined in file_sss_plugin_mbedtls_sss_mbedtls.h

Function Documentation

`int sss_mbedtls_associate_pubkey(mbedtls_pk_context *pkey, sss_object_t *pkeyObject)`

Associate a pubkey provisioned in the secure element for subsequent operations.

Return 0 if successful, or 1 if unsuccessful

Parameters

- [out] pkey: Pointer to the mbedtls_pk_context which will be associated with data corresponding to the key index
- [in] pkeyObject: The object that we are going to be use.

Function `sss_rng_context_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_rng_context_free (sss_rng_context_t *context)`
free random generator context.

Return status

Parameters

- `context`: generator context.

Function `sss_rng_context_init`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_rng_context_init (sss_rng_context_t *context, sss_session_t *session)`
Initialise random generator context between application and a security subsystem.

Warning API Changed

```
Earlier:
    sss_status_t sss_rng_context_init(
        sss_session_t *session, sss_rng_context_t *context);

Now: Parameters are swapped
    sss_status_t sss_rng_context_init(
        sss_rng_context_t *context, sss_session_t *session);
```

Return status

Parameters

- `session`: Session context.
- `context`: random generator context.

Function `sss_rng_get_random`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_rng_get_random (sss_rng_context_t *context, uint8_t *random_data, size_t dataLen)`
Generate random number.

Return status

Parameters

- `context`: random generator context.
- `random_data`: buffer to hold random data.

- `dataLen`: required random number length

Function `sss_se05x_aead_context_free`

- Defined in file `_sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

`void sss_se05x_aead_context_free (sss_se05x_aead_t *context)`
AEAD context release. The function frees aead context.

Parameters

- `context`: Pointer to aead context.

Function `sss_se05x_aead_context_init`

- Defined in file `_sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

`sss_status_t sss_se05x_aead_context_init (sss_se05x_aead_t *context, sss_se05x_session_t *session, sss_se05x_object_t *keyObject, sss_algorithm_t algorithm, sss_mode_t mode)`

AEAD context init. The function initializes aead context with initial values.

Return Status of the operation

Parameters

- `context`: Pointer to aead crypto context.
- `session`: Associate SSS session with aead context.
- `keyObject`: Associate SSS key object with aead context.
- `algorithm`: One of the aead algorithms defined by `sss_algorithm_t`.
- `mode`: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_aead_finish`

- Defined in file `sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

```
sss_status_t sss_se05x_aead_finish(sss_se05x_aead_t *context, const uint8_t *srcData, size_t sr-
cLen, uint8_t *destData, size_t *destLen, uint8_t *tag, size_t
*tagLen)
```

Finalize AEAD. The function processes data that has not been processed by previous calls to `sss_aead_update()` as well as `srcData`. It finalizes the AEAD operations and computes the tag (encryption) or compares the computed tag with the tag supplied in the parameter (decryption).

Return Status of the operation

Parameters

- `context`: Pointer to aead crypto context.
- `srcData`: Buffer containing final chunk of input data.
- `srcLen`: Length of final chunk of input data in bytes.
- `destData`: Buffer containing output data.
- [`inout`] `destLen`: Length of output data in bytes. Buffer length on entry, reflects actual output size on return.
- `tag`: Encryption: Output buffer filled with computed tag Decryption: Input buffer filled with received tag
- `tagLen`: Length of the computed or received tag in bytes. For AES-GCM it must be 4,8,12,13,14,15 or 16. For AES-CCM it must be 4,6,8,10,12,14 or 16.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_aead_init`

- Defined in file `sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

```
sss_status_t sss_se05x_aead_init(sss_se05x_aead_t *context, uint8_t *nonce, size_t nonceLen, size_t
tagLen, size_t aadLen, size_t payloadLen)
```

AEAD init. The function starts the aead operation.

Return Status of the operation

Parameters

- `context`: Pointer to aead crypto context.

- nonce: The operation nonce or IV.
- nonceLen: The length of nonce in bytes. For AES-GCM it must be ≥ 1 . For AES-CCM it must be 7, 8, 9, 10, 11, 12, or 13.
- tagLen: Length of the computed or received tag in bytes. For AES-GCM it must be 4,8,12,13,14,15 or 16. For AES-CCM it must be 4,6,8,10,12,14 or 16.
- aadLen: Input size in bytes of AAD. Used only for AES-CCM. Ignored for AES-GCM.
- payloadLen: Length in bytes of the payload. Used only for AES-CCM. Ignored for AES-GCM.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function `sss_se05x_aead_one_go`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_aead_one_go(sss_se05x_aead_t *context, const uint8_t *srcData, uint8_t
                                     *destData, size_t size, uint8_t *nonce, size_t nonceLen, const
                                     uint8_t *aad, size_t aadLen, uint8_t *tag, size_t *tagLen)
```

AEAD in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to aead crypto context.
- srcData: Buffer containing the input data.
- destData: Buffer containing the output data.
- size: Size of input and output data buffer in bytes.
- nonce: The operation nonce or IV.
- nonceLen: The length of nonce in bytes. For AES-GCM it must be ≥ 1 . For AES-CCM it must be 7, 8, 9, 10, 11, 12, or 13.
- aad: Input additional authentication data AAD
- aadLen: Input size in bytes of AAD
- tag: Encryption: Output buffer filled with computed tag Decryption: Input buffer filled with received tag
- tagLen: Length of the tag in bytes. For AES-GCM it must be 4,8,12,13,14,15 or 16. For AES-CCM it must be 4,6,8,10,12,14 or 16.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function sss_se05x_aead_update

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_aead_update(sss_se05x_aead_t *context, const uint8_t *srcData, size_t sr-
cLen, uint8_t *destData, size_t *destLen)
```

AEAD data update. Feeds a new chunk of the data payload. Input data does not have to be a multiple of block size. Subsequent calls to this function are possible. Unless one or more calls of this function have supplied sufficient input data, no output is generated. The integration check is done by [sss_aead_finish\(\)](#). Until then it is not sure if the decrypt data is authentic.

Return Status of the operation

Parameters

- context: Pointer to aead crypto context.
- srcData: Buffer containing the input data.
- srcLen: Length of the input data in bytes.
- destData: Buffer containing the output data.
- [inout] destLen: Length of the output data in bytes. Buffer length on entry, reflects actual output size on return.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.
- kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function sss_se05x_aead_update_aad

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_aead_update_aad(sss_se05x_aead_t *context, const uint8_t *aadData,
size_t aadDataLen)
```

Feeds a new chunk of the AAD. Subsequent calls of this function are possible.

Return Status of the operation

Parameters

- context: Pointer to aead crypto context
- aadData: Input buffer containing the chunk of AAD
- aadDataLen: Length of the AAD data in bytes.

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.

- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_se05x_asymmetric_context_free`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
void sss_se05x_asymmetric_context_free (sss_se05x_asymmetric_t *context)  
    Asymmetric context release. The function frees asymmetric context.
```

Parameters

- *context*: Pointer to asymmetric context.

Function `sss_se05x_asymmetric_context_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_asymmetric_context_init (sss_se05x_asymmetric_t           *con-  
                                                text,          sss_se05x_session_t      *ses-  
                                                sion,          sss_se05x_object_t     *keyObject,  
                                                sss_algorithm_t algorithm, sss_mode_t mode)
```

Asymmetric context init. The function initializes asymmetric context with initial values.

Return Status of the operation

Parameters

- *context*: Pointer to asymmetric crypto context.
- *session*: Associate SSS session with asymmetric context.
- *keyObject*: Associate SSS key object with asymmetric context.
- *algorithm*: One of the asymmetric algorithms defined by *sss_algorithm_t*.
- *mode*: One of the modes defined by *sss_mode_t*.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function sss_se05x_asymmetric_decrypt

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_asymmetric_decrypt (sss_se05x_asymmetric_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen)
```

Asymmetric decryption The function uses asymmetric algorithm to decrypt data. Private key portion of a key pair is used for decryption.

Return Status of the operation

Parameters

- context*: Pointer to asymmetric context.
- srcData*: Input buffer
- srcLen*: Length of the input in bytes
- destData*: Output buffer
- destLen*: Length of the output in bytes

Return Value

- kStatus_SSS_Success*: The operation has completed successfully.
- kStatus_SSS_Fail*: The operation has failed.
- kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function sss_se05x_asymmetric_encrypt

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_asymmetric_encrypt (sss_se05x_asymmetric_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen)
```

Asymmetric encryption The function uses asymmetric algorithm to encrypt data. Public key portion of a key pair is used for encryption.

Return Status of the operation

Parameters

- context*: Pointer to asymmetric context.
- srcData*: Input buffer
- srcLen*: Length of the input in bytes
- destData*: Output buffer
- destLen*: Length of the output in bytes

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_se05x_asymmetric_sign`

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Function Documentation

`sss_status_t sss_se05x_asymmetric_sign(sss_se05x_asymmetric_t *context, uint8_t *srcData, size_t srcLen, uint8_t *signature, size_t *signatureLen)`

Similar to `sss_se05x_asymmetric_sign_digest`,

but hashing/digest done by SE

Function `sss_se05x_asymmetric_sign_digest`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_asymmetric_sign_digest(sss_se05x_asymmetric_t *context, uint8_t *digest, size_t digestLen, uint8_t *signature, size_t *signatureLen)`

Asymmetric signature of a message digest The function signs a message digest.

Return Status of the operation

Parameters

- `context`: Pointer to asymmetric context.
- `digest`: Input buffer containing the input message digest
- `digestLen`: Length of the digest in bytes
- `signature`: Output buffer written with the signature of the digest
- `signatureLen`: Length of the signature in bytes

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_se05x_asymmetric_verify`

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Function Documentation

`sss_status_t sss_se05x_asymmetric_verify(sss_se05x_asymmetric_t *context, uint8_t *srcData, size_t srcLen, uint8_t *signature, size_t signatureLen)`
 Similar to `sss_se05x_asymmetric_verify_digest`, but hashing/digest done by SE

Function `sss_se05x_asymmetric_verify_digest`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_asymmetric_verify_digest(sss_se05x_asymmetric_t *context, uint8_t *digest, size_t digestLen, uint8_t *signature, size_t signatureLen)`

Asymmetric verify of a message digest The function verifies a message digest.

Return Status of the operation

Parameters

- context: Pointer to asymmetric context.
- digest: Input buffer containing the input message digest
- digestLen: Length of the digest in bytes
- signature: Input buffer containing the signature to verify
- signatureLen: Length of the signature in bytes

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_cipher_crypt_ctr`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_cipher_crypt_ctr(sss_se05x_symmetric_t *context, const uint8_t *srcData, uint8_t *destData, size_t size, uint8_t *initialCounter, uint8_t *lastEncryptedCounter, size_t *szLeft)
```

Symmetric AES in Counter mode in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- srcData: Buffer containing the input data.
- destData: Buffer containing the output data.
- size: Size of source and destination data buffers in bytes.
- [inout] initialCounter: Input counter (updates on return)
- [out] lastEncryptedCounter: Output cipher of last counter, for chained CTR calls. NULL can be passed if chained calls are not used.
- [out] szLeft: Output number of bytes in left unused in lastEncryptedCounter block. NULL can be passed if chained calls are not used.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function sss_se05x_cipher_finish

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_cipher_finish(sss_se05x_symmetric_t *context, const uint8_t *srcData, size_t srcLen, uint8_t *destData, size_t *destLen)
```

Symmetric cipher finalize.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- srcData: Buffer containing final chunk of input data.
- srcLen: Length of final chunk of input data in bytes.
- destData: Buffer containing output data.
- [inout] destLen: Length of output data in bytes. Buffer length on entry, reflects actual output size on return.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_se05x_cipher_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_cipher_init (sss_se05x_symmetric_t *context, uint8_t *iv, size_t ivLen)`

Symmetric cipher init. The function starts the symmetric cipher operation.

Return Status of the operation

Parameters

- `context`: Pointer to symmetric crypto context.
- `iv`: Buffer containing the symmetric operation Initialization Vector.
- `ivLen`: Length of the Initialization Vector in bytes.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function `sss_se05x_cipher_one_go`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_cipher_one_go (sss_se05x_symmetric_t *context, uint8_t *iv, size_t ivLen,`

`const uint8_t *srcData, uint8_t *destData, size_t dataLen)`

Symmetric cipher in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- `context`: Pointer to symmetric crypto context.
- `iv`: Buffer containing the symmetric operation Initialization Vector.
- `ivLen`: Length of the Initialization Vector in bytes.
- `srcData`: Buffer containing the input data.
- `destData`: Buffer containing the output data.
- `dataLen`: Size of input and output data buffer in bytes.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function `sss_se05x_cipher_update`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_cipher_update(sss_se05x_symmetric_t *context, const uint8_t *srcData,
                                      size_t srcLen, uint8_t *destData, size_t *destLen)
```

Symmetric cipher update. Input data does not have to be a multiple of block size. Subsequent calls to this function are possible. Unless one or more calls of this function have supplied sufficient input data, no output is generated. The cipher operation is finalized with a call to `sss_cipher_finish()`.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- srcData: Buffer containing the input data.
- srcLen: Length of the input data in bytes.
- destData: Buffer containing the output data.
- [inout] destLen: Length of the output data in bytes. Buffer length on entry, reflects actual output size on return.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_se05x_derive_key_context_free`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
void sss_se05x_derive_key_context_free(sss_se05x_derive_key_t *context)
```

Derive key context release. The function frees derive key context.

Parameters

- context: Pointer to derive key context.

Function `sss_se05x_derive_key_context_init`

- Defined in file `sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

```
sss_status_t sss_se05x_derive_key_context_init(sss_se05x_derive_key_t *context,
                                                sss_se05x_session_t *session,
                                                sss_se05x_object_t *keyObject,
                                                sss_algorithm_t algorithm, sss_mode_t mode)
```

Derive key context init. The function initializes derive key context with initial values.

Return Status of the operation

Parameters

- context: Pointer to derive key context.
- session: Associate SSS session with the derive key context.
- keyObject: Associate SSS key object with the derive key context.
- algorithm: One of the derive key algorithms defined by `sss_algorithm_t`.
- mode: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_derive_key_dh`

- Defined in file `sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

```
sss_status_t sss_se05x_derive_key_dh(sss_se05x_derive_key_t *context, sss_se05x_object_t *other-
PartyKeyObject, sss_se05x_object_t *derivedKeyObject)
```

Asymmetric key derivation Diffie-Helmann The function cryptographically derives a key from another key. For example Diffie-Helmann.

Return Status of the operation

Parameters

- context: Pointer to derive key context.
- otherPartyKeyObject: Public key of the other party in the Diffie-Helmann algorithm
- [inout] derivedKeyObject: Reference to a derived key

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.

- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_se05x_derive_key_go`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_derive_key_go(sss_se05x_derive_key_t *context, const uint8_t *saltData, size_t saltLen, const uint8_t *info, size_t infoLen, sss_se05x_object_t *derivedKeyObject, uint16_t deriveDataLen, uint8_t *hkdfOutput, size_t *hkdfOutputLen)
```

Symmetric key derivation The function cryptographically derives a key from another key. For example MIFARE key derivation, PRF, HKDF-Extract.

Return Status of the operation

Parameters

- **context**: Pointer to derive key context.
- **saltData**: Input data buffer, typically with some random data.
- **saltLen**: Length of saltData buffer in bytes.
- **info**: Input data buffer, typically with some fixed info.
- **infoLen**: Length of info buffer in bytes.
- [inout] **derivedKeyObject**: Reference to a derived key
- **deriveDataLen**: **TODO** Document this
- **hkdfOutput**: **TODO** Document this
- **hkdfOutputLen**: **TODO** Document this

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_se05x_derive_key_one_go`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_derive_key_one_go(sss_se05x_derive_key_t *context, const uint8_t *salt-
Data, size_t saltLen, const uint8_t *info, size_t infoLen, sss_se05x_object_t *derivedKeyObject, uint16_t
deriveDataLen)
```

Symmetric key derivation (replaces the deprecated function `sss_derive_key_go`) The function cryptographically derives a key from another key. For example MIFARE key derivation, PRF, HKDF-Extract-Expand, HKDF-Expand. Refer to `sss_derive_key_sobj_one_go` in case the Salt is available as a key object.

Return Status of the operation

Parameters

- context: Pointer to derive key context.
- saltData: Input data buffer, typically with some random data.
- saltLen: Length of saltData buffer in bytes.
- info: Input data buffer, typically with some fixed info.
- infoLen: Length of info buffer in bytes.
- [inout] derivedKeyObject: Reference to a derived key
- [in] deriveDataLen: Expected length of derived key.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_derive_key_sobj_one_go`

- Defined in file `_sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

```
sss_status_t sss_se05x_derive_key_sobj_one_go(sss_se05x_derive_key_t *context,
ssss_se05x_object_t *saltKeyObject, const uint8_t *info, size_t infoLen, sss_se05x_object_t
*derivedKeyObject, uint16_t deriveDataLen)
```

Symmetric key derivation (salt in key object) Refer to `sss_derive_key_one_go` in case the salt is not available as a key object.

Return Status of the operation

Parameters

- context: Pointer to derive key context
- saltKeyObject: Reference to salt. The salt key object must reside in the same keystore as the derive key context.
- [in] info: Input data buffer, typically with some fixed info.
- [in] infoLen: Length of info buffer in bytes.

- `derivedKeyObject`: Reference to a derived key
- [in] `deriveDataLen`: The derive data length

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_digest_context_free`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
void sss_se05x_digest_context_free (sss_se05x_digest_t *context)  
Digest context release. The function frees digest context.
```

Parameters

- `context`: Pointer to digest context.

Function `sss_se05x_digest_context_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_digest_context_init (sss_se05x_digest_t *context, sss_se05x_session_t  
*session, sss_algorithm_t algorithm, sss_mode_t  
mode)
```

Digest context init. The function initializes digest context with initial values.

Return Status of the operation

Parameters

- `context`: Pointer to digest context.
- `session`: Associate SSS session with digest context.
- `algorithm`: One of the digest algorithms defined by `sss_algorithm_t`.
- `mode`: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_digest_finish`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_digest_finish(sss_se05x_digest_t *context, uint8_t *digest, size_t *digestLen)`

Finish digest for a message. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to digest context.
- digest: Output message digest
- digestLen: Message digest byte length

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_se05x_digest_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_digest_init(sss_se05x_digest_t *context)`

Init digest for a message. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to digest context.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_se05x_digest_one_go`

- Defined in file `sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

`sss_status_t sss_se05x_digest_one_go (sss_se05x_digest_t *context, const uint8_t *message, size_t messageLen, uint8_t *digest, size_t *digestLen)`

Message digest in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to digest context.
- message: Input message
- messageLen: Length of the input message in bytes
- digest: Output message digest
- digestLen: Message digest byte length

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_se05x_digest_update`

- Defined in file `sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

`sss_status_t sss_se05x_digest_update (sss_se05x_digest_t *context, const uint8_t *message, size_t messageLen)`

Update digest for a message.

The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to digest context.
- message: Buffer with a message chunk.
- messageLen: Length of the input buffer in bytes.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_se05x_key_object_allocate_handle`

- Defined in file `sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

```
sss_status_t sss_se05x_key_object_allocate_handle(sss_se05x_object_t *keyObject,
                                                uint32_t keyId, sss_key_part_t key-
                                                Part, sss_cipher_type_t cipherType, size_t
                                                keyByteLenMax, uint32_t options)
```

Allocate / pre-provision memory for new key.

This API allows underlying cryptographic subsystems to perform preconditions of before creating any cryptographic key object.

On SE050, the memory get reserved only when the actual object is created and hence there is no memory reservation happening in this API call. but internally it checks if the object already exists or not . if the object is already existing it returns a failure.

Return Status of object allocation.

Parameters

- [inout] `keyObject`: The object If required, update implementation defined values inside the `keyObject`
- `keyId`: External Key ID. Later on this may be used by `sss_key_object_get_handle`
- `keyPart`: See `sss_key_part_t`
- `cipherType`: See `sss_cipher_type_t`
- `keyByteLenMax`: Maximum storage this type of key may need. For systems that have their own internal allocation table this would help
- `options`: 0 = Persistant Key (Default) or Transient Key. See `sss_key_object_mode_t`

Function `sss_se05x_key_object_free`

- Defined in file `sss_inc_fsl_sss_se05x_apis.h`

Function Documentation

```
void sss_se05x_key_object_free(sss_se05x_object_t *keyObject)
```

Destructor for the key object. The function frees key object context.

On SE050, this has no impact on physical Key Object.

Parameters

- `keyObject`: Pointer to key object context.

Function `sss_se05x_key_object_get_access`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_object_get_access (sss_se05x_object_t *keyObject, uint32_t *access)`
Not Available for SE05X

Function `sss_se05x_key_object_get_handle`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_object_get_handle (sss_se05x_object_t *keyObject, uint32_t keyId)`
Get handle to an existing allocated/provisioned/created Object.

See [`sss_key_object_allocate_handle`](#).

After calling this API, Ideally keyObject should become equivlant to as set after the calling of [`sss_key_object_allocate_handle`](#) api.

On SE05X, this API uses [`Se05x_API_ReadType`](#) and fetches parameters of the API.

Return The sss status.

Parameters

- keyObject: The key object
- [in] keyId: The key identifier

Function `sss_se05x_key_object_get_purpose`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_object_get_purpose (sss_se05x_object_t *keyObject, sss_mode_t *purpose)`
Not Available for SE05X

Function `sss_se05x_key_object_get_user`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_object_get_user(sss_se05x_object_t *keyObject, uint32_t *user)`

Not Available for SE05X

Function `sss_se05x_key_object_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_object_init(sss_se05x_object_t *keyObject, sss_se05x_key_store_t *keyStore)`

Constructor for a key object data structure. The function initializes keyObject data structure and associates it with a key store in which the plain key and other attributes are stored.

Return Status of the operation

Parameters

- keyObject:
- keyStore:

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_key_object_set_access`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_object_set_access(sss_se05x_object_t *keyObject, uint32_t access, uint32_t options)`

Not Available for SE05X

Function `sss_se05x_key_object_set_eccgfp_group`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_key_object_set_eccgfp_group(sss_se05x_object_t *keyObject,  
                                                 sss_eccgfp_group_t *group)
```

Not Available for SE05X

Function `sss_se05x_key_object_set_purpose`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_key_object_set_purpose(sss_se05x_object_t *keyObject, sss_mode_t purpose,  
                                              uint32_t options)
```

Assign purpose to a key object.

Parameters

- `keyObject`: the object where permission restrictions are applied
- `purpose`: Usage of the key.
- `options`: Transient or persistent update. Allows for transient update of persistent attributes.

Function `sss_se05x_key_object_set_user`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_key_object_set_user(sss_se05x_object_t *keyObject, uint32_t user,  
                                           uint32_t options)
```

Not Available for SE05X

Function `sss_se05x_key_store_allocate`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_store_allocate(sss_se05x_key_store_t *keyStore, uint32_t keystoreId)`

Get handle to key store. If the key store already exists, nothing is allocated. If the key store does not exist, a new empty key store is created and initialized. Key store context structure is updated with actual information.

This API does not do anything special on SE05X.

Parameters

- [out] `keyStore`: Pointer to key store context. Key store context is updated on function return.
- `keystoreId`: Implementation specific ID, can be used in case security subsystem manages multiple different key stores.

Function `sss_se05x_key_store_context_free`

- Defined in file_ss_inc_fsl_ss_se05x_apis.h

Function Documentation

`void sss_se05x_key_store_context_free(sss_se05x_key_store_t *keyStore)`

Destructor for the key store context.

Function `sss_se05x_key_store_context_init`

- Defined in file_ss_inc_fsl_ss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_store_context_init(sss_se05x_key_store_t *keyStore, sss_se05x_session_t *session)`

Constructor for the key store context data structure.

Parameters

- [out] `keyStore`: Pointer to key store context. Key store context is updated on function return.
- `session`: Session context.

Function `sss_se05x_key_store_create_curve`

- Defined in file_ss_inc_fsl_ss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_store_create_curve (Se05xSession_t *pSession, uint32_t curve_id)`

Function `sss_se05x_key_store_erase_key`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_store_erase_key (sss_se05x_key_store_t *keyStore, sss_se05x_object_t *keyObject)`

Delete / destroy allocated keyObject .

Return The sss status.

Parameters

- keyStore: The key store
- keyObject: The key object to be deleted

Function `sss_se05x_key_store_export_key`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_store_export_key (sss_se05x_key_store_t *keyStore, sss_se05x_object_t *keyObject, uint8_t *key, size_t *keylen)`

Export Key from SE050 to host

Only Transient keys can be exported.

Function `sss_se05x_key_store_freeze_key`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_store_freeze_key (sss_se05x_key_store_t *keyStore, sss_se05x_object_t *keyObject)`

Not available for SE05X

Function sss_se05x_key_store_generate_key

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_key_store_generate_key(sss_se05x_key_store_t *keyStore,
                                              sss_se05x_object_t *keyObject, size_t key-
                                              BitLen, void *options)
```

This function generates key[] in the destination key store.

Function sss_se05x_key_store_get_key

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_key_store_get_key(sss_se05x_key_store_t *keyStore, sss_se05x_object_t
                                         *keyObject, uint8_t *data, size_t *dataLen, size_t
                                         *pKeyBitLen)
```

This function exports plain key[] from key store (if constraints and user id allows reading)

Function sss_se05x_key_store_get_key_attst

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Function Documentation

```
sss_status_t sss_se05x_key_store_get_key_attst(sss_se05x_key_store_t *keyStore,
                                               sss_se05x_object_t *keyObject, uint8_t
                                               *key, size_t *keylen, size_t *pKeyBitLen,
                                               sss_se05x_object_t *keyObject_attst,
                                               sss_algorithm_t algorithm_attst, uint8_t
                                               *random_attst, size_t randomLen_attst,
                                               sss_se05x_attst_data_t *attst_data)
```

Read with attestation

Function sss_se05x_key_store_import_key

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_key_store_import_key(sss_se05x_key_store_t *keyStore,  
                                             sss_se05x_object_t *keyObject, uint8_t *key,  
                                             size_t keylen)
```

Re Import previously exported SE05X key from host to the SE05X

Only Transient keys can be imported.

Function sss_se05x_key_store_load

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_key_store_load(sss_se05x_key_store_t *keyStore)
```

Load from persistent memory to cached objects.

This API does not do anything special on SE05X.

Function sss_se05x_key_store_open_key

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_key_store_open_key(sss_se05x_key_store_t *keyStore, sss_se05x_object_t *keyObject)
```

Access key store using one more level of encryption.

e.g. Access keys / encryption key during storage

In SE05X, these keys can be used as KEK encryption key

Return The sss status.

Parameters

- keyStore: The key store
- keyObject: The key object that is to be used as a KEK (Key Encryption Key)

If keyObject == NULL, then subsequent key injection does not use any KEK.

Return The sss status.

Function `sss_se05x_key_store_save`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_store_save (sss_se05x_key_store_t *keyStore)`

Save all cached persistent objects to persistent memory.

This API does not do anything special on SE05X.

Function `sss_se05x_key_store_set_key`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_key_store_set_key (sss_se05x_key_store_t *keyStore, sss_se05x_object_t *keyObject, const uint8_t *data, size_t dataLen, size_t keyBitLen, void *options, size_t optionsLen)`

This function moves data[] from memory to the destination key store.

Return

Parameters

- keyStore: Key store context
- keyObject: Reference to a key and it's properties
- data: Data to be stored in Key. When setting ecc private key only, do not include key header.
- dataLen: Length of the data
- keyBitLen: Crypto algorithm key bit length
- options: Pointer to implementation specific options
- optionsLen: Length of the options in bytes

Function `sss_se05x_mac_context_free`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`void sss_se05x_mac_context_free(sss_se05x_mac_t *context)`
MAC context release. The function frees mac context.

Parameters

- `context`: Pointer to mac context.

Function `sss_se05x_mac_context_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_mac_context_init(sss_se05x_mac_t *context, sss_se05x_session_t *session,
 sss_se05x_object_t *keyObject, sss_algorithm_t algorithm,
 sss_mode_t mode)`

MAC context init. The function initializes mac context with initial values.

Return Status of the operation

Parameters

- `context`: Pointer to mac context.
- `session`: Associate SSS session with mac context.
- `keyObject`: Associate SSS key object with mac context.
- `algorithm`: One of the mac algorithms defined by `sss_algorithm_t`.
- `mode`: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_se05x_mac_finish`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_mac_finish(sss_se05x_mac_t *context, uint8_t *mac, size_t *macLen)`

Finish mac for a message. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to mac context.
- mac: Output message MAC
- macLen: Computed MAC byte length

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_se05x_mac_init`

- Defined in file_ssse05x.h

Function Documentation

`sss_status_t sss_se05x_mac_init(sss_se05x_mac_t *context)`

Init mac for a message. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to mac context.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.

Function `sss_se05x_mac_one_go`

- Defined in file_ssse05x.h

Function Documentation

`sss_status_t sss_se05x_mac_one_go(sss_se05x_mac_t *context, const uint8_t *message, size_t messageLen, uint8_t *mac, size_t *macLen)`

Message MAC in one blocking function call. The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation

Parameters

- context: Pointer to mac context.
- message: Input message
- messageLen: Length of the input message in bytes
- mac: Output message MAC
- macLen: Computed MAC byte length

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function sss_se05x_mac_update

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

*sss_status_t sss_se05x_mac_update (sss_se05x_mac_t *context, const uint8_t *message, size_t messageLen)*

Update mac for a message.

The function blocks current thread until the operation completes or an error occurs.

Return Status of the operation**Parameters**

- context: Pointer to mac context.
- message: Buffer with a message chunk.
- messageLen: Length of the input buffer in bytes.

Return Value

- *kStatus_SSS_Success*: The operation has completed successfully.
- *kStatus_SSS_Fail*: The operation has failed.

Function sss_se05x_mac_validate_one_go

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Function Documentation

*sss_status_t sss_se05x_mac_validate_one_go (sss_se05x_mac_t *context, const uint8_t *message, size_t messageLen, uint8_t *mac, size_t macLen)*

MAC Validate

Function `sss_se05x_refresh_session`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_refresh_session(sss_se05x_session_t *session, void *connectionData)`

Function `sss_se05x_rng_context_free`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_rng_context_free(sss_se05x_rng_context_t *context)`
free random generator context.

Return status

Parameters

- context: generator context.

Function `sss_se05x_rng_context_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_rng_context_init(sss_se05x_rng_context_t *context, sss_se05x_session_t *session)`

Initialise random generator context between application and a security subsystem.

Warning API Changed

<pre>Earlier: sss_status_t sss_rng_context_init(sss_session_t *session, sss_rng_context_t *context);</pre>
<pre>Now: Parameters are swapped sss_status_t sss_rng_context_init(sss_rng_context_t *context, sss_session_t *session);</pre>

Return status

Parameters

- session: Session context.
- context: random generator context.

Function `sss_se05x_rng_get_random`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_rng_get_random(sss_se05x_rng_context_t *context, uint8_t *random_data, size_t dataLen)`

Generate random number.

Return status

Parameters

- context: random generator context.
- random_data: buffer to hold random data.
- dataLen: required random number length

Function `sss_se05x_session_close`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`void sss_se05x_session_close(sss_se05x_session_t *session)`

Close session between application and security subsystem.

This function closes a session which has been opened with a security subsystem. All commands within the session must have completed before this function can be called. The implementation must do nothing if the input session parameter is NULL.

Parameters

- session: Session context.

Function `sss_se05x_session_create`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_session_create(sss_se05x_session_t *session, sss_type_t subsystem, uint32_t application_id, sss_connection_type_t connection_type, void *connectionData)`

Same as `sss_session_open` but to support sub systems that explicitly need a create before opening.

For the sake of portability across various sub systems, the application has to call `sss_session_create` before calling `sss_session_open`.

Parameters

- [inout] session: Pointer to session context
- [in] subsystem: See [sss_session_open](#)
- [in] application_id: See [sss_session_open](#)
- [in] connection_type: See [sss_session_open](#)
- [in] connectionData: See [sss_session_open](#)

Function [sss_se05x_session_delete](#)

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Function Documentation

`void sss_se05x_session_delete(sss_se05x_session_t *session)`
Counterpart to [sss_session_create](#)

Similar to constraint on [sss_session_create](#), application may call [sss_session_delete](#) to explicitly release all underlying/used session specific resources of that implementation.

Function [sss_se05x_session_open](#)

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_session_open(sss_se05x_session_t *session, sss_type_t subsystem, uint32_t
application_id, sss_connection_type_t connection_type, void
*connectionData)`

Open session between application and a security subsystem.

Open virtual session between application (user context) and a security subsystem and function thereof. Pointer to session shall be supplied to all SSS APIs as argument. Low level SSS functions can provide implementation specific behaviour based on the session argument.

Return status

Parameters

- [inout] session: Session context.
- [in] subsystem: Indicates which security subsystem is selected to be used.
- [in] application_id: ObjectID/AuthenticationID Connecting to:
 - application_id == 0 => Super user / Platform user
 - Anything else => Authenticated user
- [in] connection_type: How are we connecting to the system.
- [inout] connectionData: Subsystem specific connection parameters.

Function `sss_se05x_session_prop_get_au8`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_session_prop_get_au8(sss_se05x_session_t *session, uint32_t property, uint8_t *pValue, size_t *pValueLen)`

Get an underlying property of the crypto sub system.

This API is used to get values that are numeric in nature.

Property can be either fixed value that is calculated at compile time and returned directly, or it may involve some access to the underlying system.

Return

Parameters

- [in] session: Session context
- [in] property: Value that is part of `sss_session_prop_au8_t`
- [out] pValue: Output buffer array
- [inout] pValueLen: Count of values there are/must be read

Function `sss_se05x_session_prop_get_u32`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

`sss_status_t sss_se05x_session_prop_get_u32(sss_se05x_session_t *session, uint32_t property, uint32_t *pValue)`

Get an underlying property of the crypto sub system.

This API is used to get values that are numeric in nature.

Property can be either fixed value that is calculated at compile time and returned directly, or it may involve some access to the underlying system.

For applicable properties see `sss_session_prop_u32_t`

Return

Parameters

- [in] session: Session context
- [in] property: Value that is part of `sss_session_prop_u32_t`
- [out] pValue:

Function `sss_se05x_set_feature`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_set_feature(sss_se05x_session_t *session, SE05x_Applet_Feature_t feature,
                                     SE05x_Applet_Feature_Disable_t disable_features)
```

Set features of the Applet.

See [Se05x_API_SetAppletFeatures](#)

Function `sss_se05x_symmetric_context_free`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
void sss_se05x_symmetric_context_free(sss_se05x_symmetric_t *context)
```

Symmetric context release. The function frees symmetric context.

Parameters

- context: Pointer to symmetric crypto context.

Function `sss_se05x_symmetric_context_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_symmetric_context_init(sss_se05x_symmetric_t           *context,
                                              sss_se05x_session_t          *session,
                                              sss_se05x_object_t *keyObject, sss_algorithm_t
                                              algorithm, sss_mode_t mode)
```

Symmetric context init. The function initializes symmetric context with initial values.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- session: Associate SSS session with symmetric context.
- keyObject: Associate SSS key object with symmetric context.
- algorithm: One of the symmetric algorithms defined by `sss_algorithm_t`.
- mode: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.

- *kStatus_SSS_Fail*: The operation has failed.
- *kStatus_SSS_InvalidArgument*: One of the arguments is invalid for the function to execute.

Function `sss_se05x_tunnel`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_tunnel(sss_se05x_tunnel_context_t *context, uint8_t *data, size_t dataLen,  
                               sss_se05x_object_t *keyObjects, uint32_t keyObjectCount, uint32_t tun-  
                               nelType)
```

Tunneling

Used for communication via another system.

Function `sss_se05x_tunnel_context_free`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
void sss_se05x_tunnel_context_free(sss_se05x_tunnel_context_t *context)
```

Destructor for the tunnelling service context.

Parameters

- [out] context: Pointer to tunnel context.

Function `sss_se05x_tunnel_context_init`

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Function Documentation

```
sss_status_t sss_se05x_tunnel_context_init(sss_se05x_tunnel_context_t *context,  
                                            sss_se05x_session_t *session)
```

Constructor for the tunnelling service context.

Earlier: `sss_status_t sss_tunnel_context_init(sss_session_t *session, sss_tunnel_t *context)`;

Now: Parameters are swapped `sss_status_t sss_tunnel_context_init(sss_tunnel_t *context, sss_session_t *ses-
sion)`;

Parameters

- [out] context: Pointer to tunnel context. Tunnel context is updated on function return.
- session: Pointer to session this tunnelling service belongs to.

Function `sss_session_close`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`void sss_session_close(sss_session_t *session)`

Close session between application and security subsystem.

This function closes a session which has been opened with a security subsystem. All commands within the session must have completed before this function can be called. The implementation must do nothing if the input session parameter is NULL.

Parameters

- session: Session context.

Function `sss_session_create`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_session_create(sss_session_t *session, sss_type_t subsystem, uint32_t application_id, sss_connection_type_t connection_type, void *connectionData)`

Same as `sss_session_open` but to support sub systems that explicitly need a create before opening.

For the sake of portability across various sub systems, the application has to call `sss_session_create` before calling `sss_session_open`.

Parameters

- [inout] session: Pointer to session context
- [in] subsystem: See `sss_session_open`
- [in] application_id: See `sss_session_open`
- [in] connection_type: See `sss_session_open`
- [in] connectionData: See `sss_session_open`

Function `sss_session_delete`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

void **sss_session_delete** (*sss_session_t* **session*)

Counterpart to *sss_session_create*

Similar to constraint on *sss_session_create*, application may call *sss_session_delete* to explicitly release all underlying/used session specific resources of that implementation.

Function **sss_session_open**

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

sss_status_t **sss_session_open** (*sss_session_t* **session*, *sss_type_t* *subsystem*, *uint32_t* *application_id*,
sss_connection_type_t *connection_type*, *void* **connectionData*)

Open session between application and a security subsystem.

Open virtual session between application (user context) and a security subsystem and function thereof. Pointer to session shall be supplied to all SSS APIs as argument. Low level SSS functions can provide implementation specific behaviour based on the session argument.

Return status

Parameters

- [inout] *session*: Session context.
- [in] *subsystem*: Indicates which security subsystem is selected to be used.
- [in] *application_id*: ObjectId/AuthenticationID Connecting to:
 - application_id* == 0 => Super user / Platform user
 - Anything else => Authenticated user
- [in] *connection_type*: How are we connecting to the system.
- [inout] *connectionData*: subsystem specific connection parameters.

Function **sss_session_prop_get_au8**

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

sss_status_t **sss_session_prop_get_au8** (*sss_session_t* **session*, *uint32_t* *property*, *uint8_t* **pValue*,
size_t **pValueLen*)

Get an underlying property of the crypto sub system.

This API is used to get values that are numeric in nature.

Property can be either fixed value that is calculated at compile time and returned directly, or it may involve some access to the underlying system.

Return

Parameters

- [in] session: Session context
- [in] property: Value that is part of `sss_session_prop_a8_t`
- [out] pValue: Output buffer array
- [inout] pValueLen: Count of values there are/must be read

Function `sss_session_prop_get_u32`

- Defined in file `_sss_inc_fsl_sss_api.h`

Function Documentation

`sss_status_t sss_session_prop_get_u32 (sss_session_t *session, uint32_t property, uint32_t *pValue)`
Get an underlying property of the crypto sub system.

This API is used to get values that are numeric in nature.

Property can be either fixed value that is calculated at compile time and returned directly, or it may involve some access to the underlying system.

For applicable properties see `sss_session_prop_u32_t`

Return**Parameters**

- [in] session: Session context
- [in] property: Value that is part of `sss_session_prop_u32_t`
- [out] pValue:

Function `sss_status_sz`

- Defined in file `_sss_inc_fsl_sss_api.h`

Function Documentation

`const char *sss_status_sz (sss_status_t status)`
Returns string error code for `sss_status_t`.

Return String conversion of status to String.

Parameters

- [in] status: See `sss_status_t`

Function `sss_symmetric_context_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
void sss_symmetric_context_free(sss_symmetric_t *context)
```

Symmetric context release. The function frees symmetric context.

Parameters

- context: Pointer to symmetric crypto context.

Function `sss_symmetric_context_init`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

```
sss_status_t sss_symmetric_context_init(sss_symmetric_t *context, sss_session_t *session,  
                                         sss_object_t *keyObject, sss_algorithm_t algorithm,  
                                         sss_mode_t mode)
```

Symmetric context init. The function initializes symmetric context with initial values.

Return Status of the operation

Parameters

- context: Pointer to symmetric crypto context.
- session: Associate SSS session with symmetric context.
- keyObject: Associate SSS key object with symmetric context.
- algorithm: One of the symmetric algorithms defined by `sss_algorithm_t`.
- mode: One of the modes defined by `sss_mode_t`.

Return Value

- `kStatus_SSS_Success`: The operation has completed successfully.
- `kStatus_SSS_Fail`: The operation has failed.
- `kStatus_SSS_InvalidArgument`: One of the arguments is invalid for the function to execute.

Function `sss_tunnel`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_tunnel(sss_tunnel_t *context, uint8_t *data, size_t dataLen, sss_object_t *keyObjects, uint32_t keyObjectCount, uint32_t tunnelType)`
Tunnelling service.

Parameters

- [inout] context: Pointer to tunnel context.
- data: Pointer to data to be send to subsystem.
- dataLen: Length of the data in bytes.
- keyObjects: Objects references used by the service.
- keyObjectCount: Number of key references at keyObjects.
- tunnelType: Implementation specific id of the service.

Function `sss_tunnel_context_free`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`void sss_tunnel_context_free(sss_tunnel_t *context)`
Destructor for the tunnelling service context.

Parameters

- [out] context: Pointer to tunnel context.

Function `sss_tunnel_context_init`

- Defined in file_sss_inc_fsl_sss_api.h

Function Documentation

`sss_status_t sss_tunnel_context_init(sss_tunnel_t *context, sss_session_t *session)`
Constructor for the tunnelling service context.
Earlier: `sss_status_t sss_tunnel_context_init(sss_session_t *session, sss_tunnel_t *context);`
Now: Parameters are swapped `sss_status_t sss_tunnel_context_init(sss_tunnel_t *context, sss_session_t *session);`

Parameters

- [out] context: Pointer to tunnel context. Tunnel context is updated on function return.

- **session:** Pointer to session this tunnelling service belongs to.

Variables

Variable length

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Variable Documentation

uint32_t length

Total length of the stored data (incl. all fields of configuration_data_header_t).

Variable number_of_services

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Variable Documentation

uint32_t number_of_services

Number of stored service configurations.

Variable version

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Variable Documentation

uint8_t sub_component_metaData_t::version[2]

Defines

Define EDGELOCK2GO_ATTESTATION_KEY_ECC

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_ATTESTATION_KEY_ECC

The attestation keyid on the SSS API to use for the attestation.

Define EDGELOCK2GO_ATTESTATION_KEY_RSA

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_ATTESTATION_KEY_RSA

Define EDGELOCK2GO_CERTID_ECC

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_CERTID_ECC

The certid on the SSS API to use for the keystore to use for connecting to EdgeLock 2GO cloud service.

Define EDGELOCK2GO_CERTID_RSA

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_CERTID_RSA

Define EDGELOCK2GO_KEYID_ECC

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_KEYID_ECC

The keyid on the SSS API to use for the keystore and keypair to use for connecting to EdgeLock 2GO cloud service.

Define EDGELOCK2GO_KEYID_RSA

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_KEYID_RSA

Define EDGELOCK2GO_KEYSTORE_ID

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_KEYSTORE_ID

The keystore that stores the credentials for the EdgeLock 2GO cloud service.

When connecting to the EdgeLock 2GO cloud service, for the client authentication a private key is required. This key is expected to be in a keystore which is registered to the EdgeLock 2GO agent.

In case there is a datastore which holds the information how to connect to the EdgeLock 2GO cloud service this datastore also holds the information where to get the private key.

In case the EdgeLock 2GO agent needs to fall back to compile-time constant connection information, it does assume that the private key for the client authentication is stored in a keystore that is registered with this ID.

Define EDGELOCK2GO_MANAGED_SERVICE_KEY_MAX

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_MANAGED_SERVICE_KEY_MAX

@ brief End of the range of keys to use for keys of cloud services provisioned by EdgeLock 2GO.

Define EDGELOCK2GO_MANAGED_SERVICE_KEY_MIN

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Define Documentation

EDGELOCK2GO_MANAGED_SERVICE_KEY_MIN

@ brief Start of the range of keys to use for keys of cloud services provisioned by EdgeLock 2GO.

Define ENSURE_OR_BREAK

- Defined in file_hostlib_hostLib_inc_nxEnsure.h

Define Documentation

ENSURE_OR_BREAK (CONDITION)

If condition fails, break.

Sample Usage:

```
int SomeAPI()
{
    ...
    do {
        status = Operation1();
        ENSURE_OR_BREAK(0 == status);

        status = Operation2();
        ENSURE_OR_BREAK(0 == status);

        ...
    } while(0);

    return status;
}
```

Define ENSURE_OR_EXIT_WITH_STATUS_ON_ERROR

- Defined in file_hostlib_hostLib_inc_nxEnsure.h

Define Documentation

ENSURE_OR_EXIT_WITH_STATUS_ON_ERROR (CONDITION, STATUS, RETURN_VALUE)

If condition fails, goto quit with return value status updated.

```
int SomeAPI()
{
    int status = 0;
    ...

    value = Operation1();
    ENSURE_OR_QUIT_WITH_STATUS_ON_ERROR(0 == value, status, ERR_FAIL);

    value = Operation2();
    ENSURE_OR_QUIT_WITH_STATUS_ON_ERROR(0 == value, status, ERR_NOT_ENOUGH_SPACE);

    ...
quit:
    return status;
}
```

Warning This macro introduces system of multiple returns from a function which is not easy to debug/trace through and hence not recommended.

Define ENSURE_OR_GO_CLEANUP

- Defined in file_hostlib_hostLib_inc_nxEnsure.h

Define Documentation

ENSURE_OR_GO_CLEANUP (CONDITION)

If condition fails, goto :cleanup label

```
{  
    ...  
  
    status = Operation1();  
    ENSURE_OR_GO_CLEANUP(0 == status);  
  
    status = Operation2();  
    ENSURE_OR_GO_CLEANUP(0 == status);  
  
    ...  
  
cleanup:  
    return status;  
}
```

Define ENSURE_OR_GO_EXIT

- Defined in file_hostlib_hostLib_inc_nxEnsure.h

Define Documentation

ENSURE_OR_GO_EXIT (CONDITION)

If condition fails, goto :exit label

```
{  
    ...  
  
    status = Operation1();  
    ENSURE_OR_GO_EXIT(0 == status);  
  
    status = Operation2();  
    ENSURE_OR_GO_EXIT(0 == status);  
  
    ...  
  
exit:  
    return status;  
}
```

Define ENSURE_OR_RETURN

- Defined in file_hostlib_hostLib_inc_nxEnsure.h

Define Documentation

ENSURE_OR_RETURN (CONDITION)

If condition fails, return

```
void SomeAPI ()
{
    ...

    status = Operation1();
    ENSURE_OR_RETURN(0 == status);

    status = Operation2();
    ENSURE_OR_RETURN(0 == status);

    ...

    return;
}
```

Warning This macro introduces system of multiple returns from a function which is not easy to debug/trace through and hence not recommended.

Define ENSURE_OR_RETURN_ON_ERROR

- Defined in file_hostlib_hostLib_inc_nxEnsure.h

Define Documentation

ENSURE_OR_RETURN_ON_ERROR (CONDITION, RETURN_VALUE)

If condition fails, return

```
int SomeAPI ()
{
    ...

    status = Operation1();
    ENSURE_OR_RETURN_ON_ERROR(0 == status, ERR_FAIL);

    status = Operation2();
    ENSURE_OR_RETURN_ON_ERROR(0 == status, ERR_NOT_ENOUGH_SPACE);

    ...

    return 0;
}
```

Warning This macro introduces system of multiple returns from a function which is not easy to debug/trace through and hence not recommended.

Define EX_SSS_BOOT_OPEN_HOST_SESSION

- Defined in file_sss_ex_inc_ex_sss_main_inc.h

Define Documentation

EX_SSS_BOOT_OPEN_HOST_SESSION

Define EX_SSS_BOOT_RTOS_STACK_SIZE

- Defined in file_sss_ex_inc_ex_sss_main_inc.h

Define Documentation

EX_SSS_BOOT_RTOS_STACK_SIZE

Define IOT_AGENT_CONFIGURATION_DATA_VERSION

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Define Documentation

IOT_AGENT_CONFIGURATION_DATA_VERSION

Define kSE05x_AuthType_AESKey

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSE05x_AuthType_AESKey

Define kSE05x_AuthType_ECKey

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSE05x_AuthType_ECKey

Define kSE05x_AuthType_None

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSE05x_AuthType_None

Define kSE05x_AuthType_SCP03

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSE05x_AuthType_SCP03

Define kSE05x_AuthType_UserID

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSE05x_AuthType_UserID

Define kSE05x_INS_I2CM_Attestation

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Define Documentation

kSE05x_INS_I2CM_Attestation

When we want to read I2CM Data with attestation

Define kSE05x_INS_READ_With_Attestation

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

kSE05x_INS_READ_With_Attestation

When we want to read with attestation

Define kSSS_AuthType_AppletSCP03

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSSS_AuthType_AppletSCP03

Define kSSS_AuthType_FastSCP

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSSS_AuthType_FastSCP

Define kSSS_AuthType_FastSCP_Counter

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSSS_AuthType_FastSCP_Counter

Define kSSS_AuthType_INT_FastSCP_Counter

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

kSSS_AuthType_INT_FastSCP_Counter

Define NX_ENSURE_DO_LOG_MESSAGE

- Defined in file_hostlib_hostLib_inc_nxEnsure.h

Define Documentation

NX_ENSURE_DO_LOG_MESSAGE

Build time over-ride if we want to enable/disable Warning Prints

During debug builds, it makes sense to print them, During retail builds, such loggings would be of any use and remove and reduce code size.

Define NX_ENSURE_MESSAGE

- Defined in file_hostlib_hostLib_inc_nxEnsure.h

Define Documentation

NX_ENSURE_MESSAGE (strCONDITION)

Waring print of the parameter strCONDITION

Warning NX_ENSURE_MESSAGE is an internal message/API to this file. Do not use directly.

Define NXP_IOT_AGENT_EDGELOCK2GO_CLIENT_CERTIFICATE_BUFFER_SIZE

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Define Documentation

NXP_IOT_AGENT_EDGELOCK2GO_CLIENT_CERTIFICATE_BUFFER_SIZE

The size of the buffer to reserve for the EdgeLock 2GO cloud service client certificate.

Define PCONTEXT

- Defined in file_sss_ex_inc_ex_sss_main_inc.h

Define Documentation

PCONTEXT

Define SE050_INS_MASK_INS_CHAR

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE050_INS_MASK_INS_CHAR

3 MSBit for instruction characteristics.

Define SE050_INS_MASK_INSTRUCTION

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE050_INS_MASK_INSTRUCTION

5 LSBit for instruction

Define SE050_MAX_APDU_PAYLOAD_LENGTH

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE050_MAX_APDU_PAYLOAD_LENGTH

the maximum APDU payload length will be smaller, depending on which protocol applies, etc.

Define SE050_MAX_I2CM_COMMAND_LENGTH

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE050_MAX_I2CM_COMMAND_LENGTH

How many bytes can be used for buffer for I2C Master interface

Define SE050_MAX_NUMBER_OF_SESSIONS

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE050_MAX_NUMBER_OF_SESSIONS

Maximum number of session supported by SE050

Define SE050_OBJECT_IDENTIFIER_SIZE

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE050_OBJECT_IDENTIFIER_SIZE

Maximum number of session supported by SE050

Define Se05x_API_ECGenSharedSecret

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU.h

Define Documentation

Se05x_API_ECGenSharedSecret

Wrapper for *Se05x_API_ECDHGenerateSharedSecret*

Define Se05x_API_SHAOneShot

- Defined in file_hostlib_hostLib_se05x_03_xx_xx_se05x_APDU.h

Define Documentation

Se05x_API_SHAOneShot

Wrapper for *Se05x_API_DigestOneShot*

Define se05x_auth_context_t

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Define Documentation

`se05x_auth_context_t`

deprecated : Used only for backwards compatibility

Define `SE05x_AuthCtx_t`

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

`SE05x_AuthCtx_t`

Define `SE05x_AuthType_t`

- Defined in file_hostlib_hostLib_inc_nxScp03_Types.h

Define Documentation

`SE05x_AuthType_t`

Define `SE05x_Connect_Ctx_t`

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

`SE05x_Connect_Ctx_t`

deprecated : Used only for backwards compatibility

Define `SE05x_CryptoObjectID_t`

- Defined in file_hostlib_hostLib_inc_se05x_enums.h

Define Documentation

`SE05x_CryptoObjectID_t`

Crypto object identifiers

Define SE05x_KeyID_KEK_NONE

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE05x_KeyID_KEK_NONE

Case when there is no KEK

Define SE05x_KeyID_MFDF_NONE

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE05x_KeyID_MFDF_NONE

[Optional: if the authentication key is the same as the key to be replaced, this TAG should not be present].

Define SE05x_MaxAttempts_NA

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE05x_MaxAttempts_NA

Identify in code that this is not an AUTH object and hence not applicable

Define SE05x_MaxAttempts_UNLIMITED

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Define Documentation

SE05x_MaxAttempts_UNLIMITED

Fall back to applet default

Define SEMS_LITE_AGENT_PROD_NAME

- Defined in file_semsliteLib_inc_sems_lite_api_ver.h

Define Documentation

SEMS_LITE_AGENT_PROD_NAME

Define SEMS_LITE_AGENT_PROD_NAME_VER_FULL

- Defined in file_semslite_lib_inc_sems_lite_api_ver.h

Define Documentation

SEMS_LITE_AGENT_PROD_NAME_VER_FULL

Define SEMS_LITE_AGENT_VER_DEV

- Defined in file_semslite_lib_inc_sems_lite_api_ver.h

Define Documentation

SEMS_LITE_AGENT_VER_DEV

Define SEMS_LITE_AGENT_VER_MAJOR

- Defined in file_semslite_lib_inc_sems_lite_api_ver.h

Define Documentation

SEMS_LITE_AGENT_VER_MAJOR

Define SEMS_LITE_AGENT_VER_MAJOR_MINOR

- Defined in file_semslite_lib_inc_sems_lite_api_ver.h

Define Documentation

SEMS_LITE_AGENT_VER_MAJOR_MINOR

Define SEMS_LITE_AGENT_VER_MAJOR_MINOR_DEV

- Defined in file_semslite_lib_inc_sems_lite_api_ver.h

Define Documentation

SEMS_LITE_AGENT_VER_MAJOR_MINOR_DEV

Define SEMS_LITE_AGENT_VER_MINOR

- Defined in file_semslite_lib_inc_sems_lite_api_ver.h

Define Documentation

SEMS_LITE_AGENT_VER_MINOR

Define SEMS_LITE_AGENT_VER_STRING_NUM

- Defined in file_semslite_lib_inc_sems_lite_api_ver.h

Define Documentation

SEMS_LITE_AGENT_VER_STRING_NUM

Define SEMS_LITE_API_VERSION_MAJOR

- Defined in file_semslite_lib_inc_sems_lite_api.h

Define Documentation

SEMS_LITE_API_VERSION_MAJOR

Define SEMS_LITE_API_VERSION_MINOR

- Defined in file_semslite_lib_inc_sems_lite_api.h

Define Documentation

SEMS_LITE_API_VERSION_MINOR

Define SEMS_LITE_API_VERSION_PATCH

- Defined in file_semslite_lib_inc_sems_lite_api.h

Define Documentation

SEMS_LITE_API_VERSION_PATCH

Define SEMS_LITE_GET_DATA_CMD_BUF_LEN

- Defined in file_semslite_lib_inc_sems_lite_api.h

Define Documentation

SEMS_LITE_GET_DATA_CMD_BUF_LEN

Define SEMS_LITE_PKG_VERSION_LEN

- Defined in file_semslite_lib_inc_sems_lite_api.h

Define Documentation

SEMS_LITE_PKG_VERSION_LEN

Define **sss_aead_context_free**

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_aead_context_free(context)

Define sss_aead_context_init

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_aead_context_init (context, session, keyObject, algorithm, mode)

Define sss_aead_finish

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_aead_finish (context, srcData, srcLen, destData, destLen, tag, tagLen)

Define sss_aead_init

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_aead_init (context, nonce, nonceLen, tagLen, aadLen, payloadLen)

Define sss_aead_one_go

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_aead_one_go (context, srcData, destData, size, nonce, nonceLen, aad, aadLen, tag, tagLen)

Define SSS_AEAD_TYPE_IS_SE05X

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS_AEAD_TYPE_IS_SE05X (context)
Are we using SE05X as crypto subsystem?

Define sss_aead_update

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_aead_update (context, srcData, srcLen, destData, destLen)

Define sss_aead_update_aad

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_aead_update_aad (context, aadData, aadDataLen)

Define SSS_AES_BLOCK_SIZE

- Defined in file_ss_inc_fsl_sss_api.h

Define Documentation

SSS_AES_BLOCK_SIZE
Size of an AES Block, in bytes

Define SSS_API_VERSION

- Defined in file_ss_inc_fsl_sss_api.h

Define Documentation

SSS_API_VERSION
Version of the SSS API

Define `sss_asymmetric_context_free`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_asymmetric_context_free`(context)

Define `sss_asymmetric_context_init`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_asymmetric_context_init`(context, session, keyObject, algorithm, mode)

Define `sss_asymmetric_decrypt`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_asymmetric_decrypt`(context, srcData, srcLen, destData, destLen)

Define `sss_asymmetric_encrypt`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_asymmetric_encrypt`(context, srcData, srcLen, destData, destLen)

Define `sss_asymmetric_sign_digest`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_asymmetric_sign_digest (context, digest, digestLen, signature, signatureLen)

Define SSS_ASYMMETRIC_TYPE_IS_SE05X

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS_ASYMMETRIC_TYPE_IS_SE05X (context)

Are we using SE05X as crypto subsystem?

Define sss_asymmetric_verify_digest

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_asymmetric_verify_digest (context, digest, digestLen, signature, signatureLen)

Define sss_cipher_crypt_ctr

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_cipher_crypt_ctr (context, srcData, destData, size, initialCounter, lastEncryptedCounter, szLeft)

Define sss_cipher_finish

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_cipher_finish (context, srcData, srcLen, destData, destLen)

Define `sss_cipher_init`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_cipher_init`(context, iv, ivLen)

Define `sss_cipher_one_go`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_cipher_one_go`(context, iv, ivLen, srcData, destData, dataLen)

Define `sss_cipher_update`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_cipher_update`(context, srcData, srcLen, destData, destLen)

Define `sss_derive_key_context_free`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_derive_key_context_free`(context)

Define `sss_derive_key_context_init`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_derive_key_context_init (context, session, keyObject, algorithm, mode)

Define sss_derive_key_dh

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_derive_key_dh (context, otherPartyKeyObject, derivedKeyObject)

Define sss_derive_key_go

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_derive_key_go (context, saltData, saltLen, info, infoLen, derivedKeyObject, deriveDataLen, hkdfOutput, hkdfOutputLen)

Define SSS_DERIVE_KEY_TYPE_IS_SE05X

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS_DERIVE_KEY_TYPE_IS_SE05X (context)
Are we using SE05X as crypto subsystem?

Define SSS_DES_BLOCK_SIZE

- Defined in file_ss_inc_fsl_sss_api.h

Define Documentation

SSS_DES_BLOCK_SIZE
Size of a DES Block, in bytes

Define SSS_DES_IV_SIZE

- Defined in file_sss_inc_fsl_sss_api.h

Define Documentation

SSS_DES_IV_SIZE

Size of a DES IV, in bytes

Define SSS_DES_KEY_SIZE

- Defined in file_sss_inc_fsl_sss_api.h

Define Documentation

SSS_DES_KEY_SIZE

Size of a DES Key, in bytes

Define sss_digest_context_free

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_digest_context_free (context)

Define sss_digest_context_init

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_digest_context_init (context, session, algorithm, mode)

Define sss_digest_finish

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_digest_finish (context, digest, digestLen)

Define **sss_digest_init**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_digest_init (context)

Define **sss_digest_one_go**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_digest_one_go (context, message, messageLen, digest, digestLen)

Define **SSS_DIGEST_TYPE_IS_SE05X**

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS_DIGEST_TYPE_IS_SE05X (context)

Are we using SE05X as crypto subsystem?

Define **sss_digest_update**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_digest_update (context, message, messageLen)

Define SSS_ENUM

- Defined in file_sss_inc_fsl_sss_api.h

Define Documentation

SSS_ENUM (GROUP, INDEX)

Helper macro to set enum value

Define sss_key_object_allocate_handle

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_object_allocate_handle (keyObject, keyId, keyPart, cipherType, keyByteLenMax, options)

Define sss_key_object_free

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_object_free (keyObject)

Define sss_key_object_get_access

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_object_get_access (keyObject, access)

Define sss_key_object_get_handle

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_object_get_handle (keyObject, keyId)

Define **sss_key_object_get_purpose**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_object_get_purpose (keyObject, purpose)

Define **sss_key_object_get_user**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_object_get_user (keyObject, user)

Define **sss_key_object_init**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_object_init (keyObject, keyStore)

Define **sss_key_object_set_access**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_object_set_access (keyObject, access, options)

Define `sss_key_object_set_eccgfp_group`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_key_object_set_eccgfp_group` (keyObject, group)

Define `sss_key_object_set_purpose`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_key_object_set_purpose` (keyObject, purpose, options)

Define `sss_key_object_set_user`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_key_object_set_user` (keyObject, user, options)

Define `sss_key_store_allocate`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_key_store_allocate` (keyStore, keyStoreId)

Define `sss_key_store_context_free`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_store_context_free (keyStore)

Define **sss_key_store_context_init**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_store_context_init (keyStore, session)

Define **sss_key_store_erase_key**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_store_erase_key (keyStore, keyObject)

Define **sss_key_store_freeze_key**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_store_freeze_key (keyStore, keyObject)

Define **sss_key_store_generate_key**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_store_generate_key (keyStore, keyObject, keyBitLen, options)

Define `sss_key_store_get_key`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_key_store_get_key`(keyStore, keyObject, data, dataLen, pKeyBitLen)

Define `sss_key_store_load`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_key_store_load`(keyStore)

Define `sss_key_store_open_key`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_key_store_open_key`(keyStore, keyObject)

Define `sss_key_store_save`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_key_store_save`(keyStore)

Define `sss_key_store_set_key`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_key_store_set_key (keyStore, keyObject, data, dataLen, keyBitLen, options, optionsLen)

Define SSS_KEY_STORE_TYPE_IS_SE05X

- Defined in file_sss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS_KEY_STORE_TYPE_IS_SE05X (keyStore)

Are we using SE05X as crypto subsystem?

Define sss_mac_context_free

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_mac_context_free (context)

Define sss_mac_context_init

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_mac_context_init (context, session, keyObject, algorithm, mode)

Define sss_mac_finish

- Defined in file_sss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_mac_finish (context, mac, macLen)

Define `sss_mac_init`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_mac_init` (context)

Define `sss_mac_one_go`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_mac_one_go` (context, message, messageLen, mac, macLen)

Define `SSS_MAC_TYPE_IS_SE05X`

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

`SSS_MAC_TYPE_IS_SE05X` (context)

Are we using SE05X as crypto subsystem?

Define `sss_mac_update`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_mac_update` (context, message, messageLen)

Define `SSS_OBJECT_TYPE_IS_SE05X`

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS_OBJECT_TYPE_IS_SE05X (pObject)
Are we using SE05X as crypto subsystem?

Define sss_rng_context_free

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_rng_context_free (context)

Define sss_rng_context_init

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_rng_context_init (context, session)

Define SSS RNG CONTEXT TYPE IS SE05X

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS RNG CONTEXT TYPE IS SE05X (context)
Are we using SE05X as crypto subsystem?

Define sss_rng_get_random

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_rng_get_random (context, random_data, dataLen)

Define `sss_session_close`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_session_close`(session)

Define `sss_session_create`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_session_create`(session, subsystem, application_id, connection_type, connectionData)

Define `sss_session_delete`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_session_delete`(session)

Define `sss_session_open`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_session_open`(session, subsystem, application_id, connection_type, connectionData)

Define `sss_session_prop_get_au8`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_session_prop_get_au8 (session, property, pValue, pValueLen)

Define **sss_session_prop_get_u32**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_session_prop_get_u32 (session, property, pValue)

Define **SSS_SESSION_TYPE_IS_SE05X**

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS_SESSION_TYPE_IS_SE05X (session)

Are we using SE05X as crypto subsystem?

Define **SSS_SUBSYSTEM_TYPE_IS_SE05X**

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

SSS_SUBSYSTEM_TYPE_IS_SE05X (subsystem)

Are we using SE05X as crypto subsystem?

Define **sss_symmetric_context_free**

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

sss_symmetric_context_free (context)

Define `sss_symmetric_context_init`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_symmetric_context_init` (context, session, keyObject, algorithm, mode)

Define `SSS_SYMMETRIC_TYPE_IS_SE05X`

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

`SSS_SYMMETRIC_TYPE_IS_SE05X` (context)

Are we using SE05X as crypto subsystem?

Define `sss_tunnel`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_tunnel` (context, data, dataLen, keyObjects, keyObjectCount, tunnelType)

Define `sss_tunnel_context_free`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_tunnel_context_free` (context)

Define `sss_tunnel_context_init`

- Defined in file_ss_inc_fsl_sss_se05x_apis.h

Define Documentation

`sss_tunnel_context_init`(context, session)

Define SSS_TUNNEL_CONTEXT_TYPE_IS_SE05X

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

`SSS_TUNNEL_CONTEXT_TYPE_IS_SE05X`(context)

Are we using SE05X as crypto subsystem?

Define SSS_TUNNEL_TYPE_IS_SE05X

- Defined in file_ss_inc_fsl_sss_se05x_types.h

Define Documentation

`SSS_TUNNEL_TYPE_IS_SE05X`(context)

Are we using SE05X as crypto subsystem?

Typedefs

Typedef configuration_data_header_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Typedef Documentation

`typedef configuration_data_header_t`

The header of configuration data stored in a datastore.

Typedef iot_agent_context_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Typedef Documentation

```
typedef struct iot_agent_context_t iot_agent_context_t
```

Typedef iot_agent_datastore_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Typedef Documentation

```
typedef struct iot_agent_datastore_t iot_agent_datastore_t
```

Typedef iot_agent_datastore_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_utils.h

Typedef Documentation

```
typedef struct iot_agent_datastore_t iot_agent_datastore_t
```

Typedef iot_agent_keystore_destroyer_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Typedef Documentation

```
typedef iot_agent_status_t (*iot_agent_keystore_destroyer_t)(void *context)
```

Typedef iot_agent_keystore_session_closer_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Typedef Documentation

```
typedef void (*iot_agent_keystore_session_closer_t)(void *context)
```

Typedef iot_agent_keystore_session_opener_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Typedef Documentation

```
typedef iot_agent_status_t (*iot_agent_keystore_session_opener_t)(void *context)
```

Typedef nxp_iot_UpdateStatusReport

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Typedef Documentation

```
typedef struct _nxp_iot_UpdateStatusReport nxp_iot_UpdateStatusReport
```

Typedef pb_field_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Typedef Documentation

```
typedef struct pb_field_s pb_field_t
```

Typedef pb_field_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Typedef Documentation

```
typedef struct pb_field_s pb_field_t
```

Typedef pb_istream_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Typedef Documentation

```
typedef struct pb_istream_s pb_istream_t
```

Typedef pb_istream_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Typedef Documentation

```
typedef struct pb_istream_s pb_istream_t
```

Typedef pb_ostream_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent.h

Typedef Documentation

```
typedef struct pb_ostream_s pb_ostream_t
```

Typedef pb_ostream_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_keystore.h

Typedef Documentation

```
typedef struct pb_ostream_s pb_ostream_t
```

Typedef public_key_identifier_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Typedef Documentation

```
typedef uint8_t public_key_identifier_t[16]
```

TypeDef SE05x_KeyID_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

TypeDef Documentation

```
typedef uint32_t SE05x_KeyID_t
```

SE05X's key IDs

TypeDef SE05x_MacOperation_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

TypeDef Documentation

```
typedef SE05x_MACAlgo_t SE05x_MacOperation_t
```

HMAC/CMAC Algorithms

TypeDef SE05x_MaxAttempts_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

TypeDef Documentation

```
typedef uint16_t SE05x_MaxAttempts_t
```

SE05X key's max attempts

TypeDef SE05x_SecureObjectType_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

TypeDef Documentation

```
typedef SE05x_SecObjTyp_t SE05x_SecureObjectType_t
```

Type of Object

TypeDef SE05x_Variant_t

- Defined in file_hostlib_hostLib_inc_se05xEnums.h

Typedef Documentation

typedef SE05x_AppletConfig_t SE05x_Variant_t
Features which are available / enabled in the Applet

Typedef sems_lite_PKGInfoList_t

- Defined in file_semslite_lib_inc_sems_lite_api.h

Typedef Documentation

typedef sems_lite_SEAppInfoList_t sems_lite_PKGInfoList_t
Same as *sems_lite_SEAppInfoList_t* for list of installed packages

Typedef service_identifier_t

- Defined in file_nxp_iot_agent_inc_nxp_iot_agent_service.h

Typedef Documentation

typedef uint8_t service_identifier_t[32]

CHAPTER
TWELVE

INDICES AND TABLES

- genindex
- search

INDEX

A

A71CH_AUTH
 command line option, 132
Applet
 command line option, 129

C

CMAKE_BUILD_TYPE
 command line option, 133
command line option
 A71CH_AUTH, 132
 Applet, 129
 CMAKE_BUILD_TYPE, 133
 FIPS, 131
 Host, 129
 HostCrypto, 130
 Log, 132
 mbedtls_ALT, 131
 NXPInternal, 136
 RTOS, 131
 SCP, 131
 SE05X_Auth, 132
 SE05X_Ver, 129
 SIMW_INSTALL_INC_DIR, 136
 SIMW_INSTALL_SHARE_DIR, 136
 SMCOM, 130
 SSSFTR_SE05X_AES, 133
 SSSFTR_SE05X_AuthECKey, 133
 SSSFTR_SE05X_AuthSession, 133
 SSSFTR_SE05X_CREATE_DELETE_CRYPTOOBJ,
 133
 SSSFTR_SE05X_ECC, 133
 SSSFTR_SE05X_KEY_GET, 133
 SSSFTR_SE05X_KEY_SET, 133
 SSSFTR_SE05X_RSA, 133
 SSSFTR_SW_AES, 133
 SSSFTR_SW_ECC, 133
 SSSFTR_SW_KEY_GET, 133
 SSSFTR_SW_KEY_SET, 133
 SSSFTR_SW_RSA, 133
 SSSFTR_SW_TESTCOUNTERPART, 134
WithCodeCoverage, 136

WithExtCustomerCode, 136
WithNXPNFCRdLib, 135
WithOPCUA_open62541, 135
WithSharedLIB, 135
configuration_data_header_t (*C++ type*),
 298, 824

E

EDGELOCK2GO_ATTESTATION_KEY_ECC (*C
macro*), 290, 788
EDGELOCK2GO_ATTESTATION_KEY_RSA (*C
macro*), 290, 789
EDGELOCK2GO_CERTID_ECC (*C macro*), 290, 789
EDGELOCK2GO_CERTID_RSA (*C macro*), 290, 789
EDGELOCK2GO_KEYID_ECC (*C macro*), 290, 789
EDGELOCK2GO_KEYID_RSA (*C macro*), 290, 790
EDGELOCK2GO_KEYSTORE_ID (*C macro*), 291, 790
EDGELOCK2GO_MANAGED_SERVICE_KEY_MAX (*C
macro*), 291, 790
EDGELOCK2GO_MANAGED_SERVICE_KEY_MIN (*C
macro*), 291, 790
ENSURE_OR_BREAK (*C macro*), 791
ENSURE_OR_EXIT_WITH_STATUS_ON_ERROR (*C
macro*), 791
ENSURE_OR_GO_CLEANUP (*C macro*), 792
ENSURE_OR_GO_EXIT (*C macro*), 792
ENSURE_OR_RETURN (*C macro*), 793
ENSURE_OR_RETURN_ON_ERROR (*C macro*), 793
EX_SSS_BOOT_OPEN_HOST_SESSION (*C macro*),
 794
EX_SSS_BOOT_RTOS_STACK_SIZE (*C macro*), 794

F

FIPS
 command line option, 131

H

Host
 command line option, 129
HostCrypto
 command line option, 130

I	(C++ type), 297, 826
IOT_AGENT_CONFIGURATION_DATA_VERSION (C macro), 298, 794	iot_agent_keystore_t (C++ class), 297, 523
iot_agent_context_t (C++ type), 302, 825	iot_agent_keystore_t::context (C++ mem- ber), 523
iot_agent_datastore_t (C++ type), 298, 302, 825	iot_agent_keystore_t::identifier (C++ member), 523
iot_agent_free_service_descriptor (C++ function), 291, 599	iot_agent_keystore_t::iface (C++ member), 523
iot_agent_free_update_status_report (C++ function), 291, 600	iot_agent_keystore_t::sss_context (C++ member), 523
iot_agent_get_datastore_by_id (C++ func- tion), 291, 600	iot_agent_keystore_t::type (C++ member), 523
iot_agent_get_datastore_index_by_id (C++ function), 292, 600	iot_agent_register_datastore (C++ func- tion), 294, 605
iot_agent_get_endpoint_info (C++ function), 292, 601	iot_agent_register_keystore (C++ function), 294, 606
iot_agent_get_keystore_by_id (C++ func- tion), 292, 601	iot_agent_select_service_by_id (C++ func- tion), 294, 606
iot_agent_get_keystore_index_by_id (C++ function), 292, 601	iot_agent_select_service_by_index (C++ function), 295, 607
iot_agent_get_number_of_services (C++ function), 292, 602	iot_agent_service_free_service_descriptor (C++ function), 298, 607
iot_agent_get_service_descriptor (C++ function), 292, 602	iot_agent_service_get_number_of_services (C++ function), 299, 608
iot_agent_handle_request (C++ function), 293, 603	iot_agent_service_get_protocol_of_service_as_string (C++ function), 299, 608
iot_agent_init (C++ function), 293, 603	iot_agent_service_get_service_descriptor_of_service (C++ function), 299, 609
iot_agent_init_dispatcher (C++ function), 293, 603	iot_agent_service_get_service_offset_by_id (C++ function), 300, 609
iot_agent_is_service_configuration_data_valid (C++ function), 293, 604	iot_agent_service_get_service_offset_by_index (C++ function), 300, 610
iot_agent_keystore_close_session (C++ function), 297, 604	iot_agent_service_get_service_type_as_string (C++ function), 301, 611
iot_agent_keystore_destroyer_t (C++ type), 297, 825	iot_agent_service_is_configuration_data_valid (C++ function), 301, 611
iot_agent_keystore_file_existence (C++ function), 302, 604	iot_agent_session_connect (C++ function), 297, 612
iot_agent_keystore_free (C++ function), 297, 605	iot_agent_session_disconnect (C++ func- tion), 297, 612
iot_agent_keystore_interface_t (C++ class), 297, 522	iot_agent_session_init (C++ function), 298, 612
iot_agent_keystore_interface_t::close_session (C++ member), 522	iot_agent_set_edgelock2go_datastore (C++ function), 295, 613
iot_agent_keystore_interface_t::destroy (C++ member), 522	iot_agent_update_device_configuration (C++ function), 295, 613
iot_agent_keystore_interface_t::endpoint_inter- face (C++ member), 522	iot_agent_update_device_configuration_from_constant (C++ function), 296, 614
iot_agent_keystore_interface_t::open_session (C++ member), 522	iot_agent_utils_convert_service2key_id (C++ function), 302, 614
iot_agent_keystore_open_session (C++ function), 297, 605	iot_agent_utils_get_edgelock2go_certificate_id (C++ function), 302, 615
iot_agent_keystore_session_closer_t (C++ type), 297, 825	iot_agent_utils_get_edgelock2go_key_id (C++ function), 303, 615
iot_agent_keystore_session_opener_t	

iot_agent_utils_write_edgelock2go_data to kAlgorithm_SSS_HMAC_SHA1 (*C++ enumerator*),
(C++ function), 303, 615
 590

iot_agent_utils_write_edgelock2go_data to kAlgorithm_SSS_HMAC_SHA224 (*C++ enumerator*),
(C++ function), 303, 616
 590

K

kAccessPermission_SSS_ChangeAttributes (*C++ enumerator*), 589
 590

kAccessPermission_SSS_Delete (*C++ enumerator*), 589
 590

kAccessPermission_SSS_Read (*C++ enumerator*), 589
 590

kAccessPermission_SSS_Use (*C++ enumerator*), 589
 590

kAccessPermission_SSS_Write (*C++ enumerator*), 589
 590

kAlgorithm_None (*C++ enumerator*), 589
 590

kAlgorithm_SSS_AES_CBC (*C++ enumerator*), 589
 590

kAlgorithm_SSS_AES_CCM (*C++ enumerator*), 589
 590

kAlgorithm_SSS_AES_CTR (*C++ enumerator*), 589
 590

kAlgorithm_SSS_AES_ECB (*C++ enumerator*), 589
 590

kAlgorithm_SSS_AES_GCM (*C++ enumerator*), 589
 590

kAlgorithm_SSS_AES_GCM_INT_IV (*C++ enumerator*), 589
 590

kAlgorithm_SSS_CHACHA_POLY (*C++ enumerator*), 589
 590

kAlgorithm_SSS_CMAC_AES (*C++ enumerator*), 590
 590

kAlgorithm_SSS_DES3_CBC (*C++ enumerator*), 590
 590

kAlgorithm_SSS_DES3_ECB (*C++ enumerator*), 590
 590

kAlgorithm_SSS_DES_CBC (*C++ enumerator*), 590
 590

kAlgorithm_SSS_DES_ECB (*C++ enumerator*), 590
 590

kAlgorithm_SSS_DH (*C++ enumerator*), 590
 590

kAlgorithm_SSS_DSA_SHA1 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_DSA_SHA224 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_DSA_SHA256 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_ECDA (C++ enumerator), 591
 591

kAlgorithm_SSS_ECDH (C++ enumerator), 590
 590

kAlgorithm_SSS_ECDSA_SHA1 (C++ enumerator), 591
 591

kAlgorithm_SSS_ECDSA_SHA224 (C++ enumerator), 591
 591

kAlgorithm_SSS_ECDSA_SHA256 (C++ enumerator), 591
 591

kAlgorithm_SSS_ECDSA_SHA384 (C++ enumerator), 591
 591

kAlgorithm_SSS_ECDSA_SHA512 (C++ enumerator), 591
 591

kAlgorithm_SSS_HMAC_SHA1 (C++ enumerator),
(C++ function), 303, 615
 590

kAlgorithm_SSS_HMAC_SHA224 (C++ enumerator),
(C++ function), 303, 616
 590

kAlgorithm_SSS_HMAC_SHA256 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_HMAC_SHA384 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_HMAC_SHA512 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA1
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA224
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA256
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA384
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSAES_PKCS1_OAEP_SHA512
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSAES_PKCS1_V1_5
(C++ enumerator), 591
 591

kAlgorithm_SSS_RSASSA_NO_PADDING
(C++ enumerator), 591
 591

kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA1
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA224
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA256
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA384
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_PSS_MGF1_SHA512
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_V1_5_NO_HASH
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA1
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA224
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA256
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA384
(C++ enumerator), 590
 590

kAlgorithm_SSS_RSASSA_PKCS1_V1_5_SHA512
(C++ enumerator), 590
 590

kAlgorithm_SSS_SHA1 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_SHA224 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_SHA256 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_SHA384 (*C++ enumerator*), 590
 590

kAlgorithm_SSS_SHA512 (*C++ enumerator*), 590
 590

kKeyObject_Mode_None (*C++ enumerator*), 592
 592

kKeyObject_Mode_Persistent (*C++ enumerator*), 592
 592

kKeyObject_Mode_Transient (*C++ enumerator*), 592
kMode_SSS_ComputeSharedSecret (*C++ enumerator*), 594
kMode_SSS_Decrypt (*C++ enumerator*), 593
kMode_SSS_Digest (*C++ enumerator*), 594
kMode_SSS_Encrypt (*C++ enumerator*), 593
kMode_SSS_HKDF_ExpandOnly (*C++ enumerator*), 594
kMode_SSS_Mac (*C++ enumerator*), 594
kMode_SSS_Sign (*C++ enumerator*), 594
kMode_SSS_Verify (*C++ enumerator*), 594
KPpolicy_Asym_Key (*C++ enumerator*), 594
KPpolicy_Common (*C++ enumerator*), 594
KPpolicy_Common_PCR_Value (*C++ enumerator*), 594
KPpolicy_Counter (*C++ enumerator*), 594
KPpolicy_File (*C++ enumerator*), 594
KPpolicy_None (*C++ enumerator*), 594
KPpolicy_PCR (*C++ enumerator*), 594
KPpolicy_Session (*C++ enumerator*), 594
KPpolicy_Sym_Key (*C++ enumerator*), 594
KPpolicy_UserID (*C++ enumerator*), 594
kSE05x_AeadAlgo_NA (*C++ enumerator*), 556
kSE05x_AeadCCMAlgo (*C++ enumerator*), 556
kSE05x_AeadGCM_IVAlgo (*C++ enumerator*), 556
kSE05x_AeadGCMAlgo (*C++ enumerator*), 556
kSE05x_AppleConfig_AES (*C++ enumerator*), 557
kSE05x_AppleConfig_DES (*C++ enumerator*), 557
kSE05x_AppleConfig_DH_MONT (*C++ enumerator*), 557
kSE05x_AppleConfig_ECDA (C++ enumerator), 556
kSE05x_AppleConfig_ECDSA_ECDH_ECDHE (*C++ enumerator*), 556
kSE05x_AppleConfig_EDDSA (*C++ enumerator*), 557
kSE05x_AppleConfig_HMAC (*C++ enumerator*), 557
kSE05x_AppleConfig_I2CM (*C++ enumerator*), 557
kSE05x_AppleConfig_MIFARE (*C++ enumerator*), 557
kSE05x_AppleConfig_NA (*C++ enumerator*), 556
kSE05x_AppleConfig_PBKDF (*C++ enumerator*), 557
kSE05x_AppleConfig_RFU1 (*C++ enumerator*), 557
kSE05x_AppleConfig_RFU2 (*C++ enumerator*), 557
kSE05x_AppleConfig_RSA_CRT (*C++ enumerator*), 557
kSE05x_AppleConfig_RSA_PLAIN (*C++ enumerator*), 557
kSE05x_AppleConfig_TLS (*C++ enumerator*), 557
kSE05x_AppleResID_FACTORY_RESET (*C++ enumerator*), 558
kSE05x_AppleResID_FEATURE (*C++ enumerator*), 558
kSE05x_AppleResID_I2CM_ACCESS (*C++ enumerator*), 558
kSE05x_AppleResID_KP_ECKEY_IMPORT (*C++ enumerator*), 558
kSE05x_AppleResID_KP_ECKEY_USER (*C++ enumerator*), 557
kSE05x_AppleResID_NA (*C++ enumerator*), 557
kSE05x_AppleResID_PLATFORM_SCP (*C++ enumerator*), 558
kSE05x_AppleResID_RESTRICT (*C++ enumerator*), 558
kSE05x_AppleResID_TRANSPORT (*C++ enumerator*), 557
kSE05x_AppleResID_UNIQUE_ID (*C++ enumerator*), 558
kSE05x_AttestationAlgo_EC_PLAIN (*C++ enumerator*), 558
kSE05x_AttestationAlgo_EC_SHA (*C++ enumerator*), 558
kSE05x_AttestationAlgo_EC_SHA_224 (*C++ enumerator*), 558
kSE05x_AttestationAlgo_EC_SHA_256 (*C++ enumerator*), 558
kSE05x_AttestationAlgo_EC_SHA_384 (*C++ enumerator*), 558
kSE05x_AttestationAlgo_EC_SHA_512 (*C++ enumerator*), 558
kSE05x_AttestationAlgo_ECDAA (*C++ enumerator*), 558
kSE05x_AttestationAlgo_ED25519PURE_SHA_512 (*C++ enumerator*), 558
kSE05x_AttestationAlgo_NA (*C++ enumerator*), 558
kSE05x_AttestationAlgo_RSA_SHA1_PKCS1_PSS (*C++ enumerator*), 558
kSE05x_AttestationAlgo_RSA_SHA224_PKCS1_PSS (*C++ enumerator*), 558
kSE05x_AttestationAlgo_RSA_SHA256_PKCS1_PSS (*C++ enumerator*), 559
kSE05x_AttestationAlgo_RSA_SHA384_PKCS1_PSS (*C++ enumerator*), 559
kSE05x_AttestationAlgo_RSA_SHA512_PKCS1_PSS (*C++ enumerator*), 559
kSE05x_AttestationAlgo_RSA_SHA_224_PKCS1 (*C++ enumerator*), 559
kSE05x_AttestationAlgo_RSA_SHA_256_PKCS1

kSE05x_AttestationAlgo_RSA_SHA_384_PKCS1 (C++ enumerator), 559
 kSE05x_CipherMode_DES_ECB_NOPAD (C++ enumerator), 560
 kSE05x_CipherMode_DES_ECB_PKCS5 (C++ enumerator), 560
 kSE05x_CipherMode_NA (C++ enumerator), 560
 kSE05x_CryptoContext_AEAD (C++ enumerator), 561
 kSE05x_CryptoContext_CIPHER (C++ enumerator), 561
 kSE05x_CryptoContext_DIGEST (C++ enumerator), 561
 kSE05x_CryptoContext_NA (C++ enumerator), 561
 kSE05x_CryptoContext_SIGNATURE (C++ enumerator), 561
 kSE05x_CryptoObject_AES_CBC_ISO9797_M1 (C++ enumerator), 562
 kSE05x_CryptoObject_AES_CBC_ISO9797_M2 (C++ enumerator), 562
 kSE05x_CryptoObject_AES_CBC_NOPAD (C++ enumerator), 562
 kSE05x_CryptoObject_AES_CBC_PKCS5 (C++ enumerator), 562
 kSE05x_CryptoObject_AES_CCM (C++ enumerator), 562
 kSE05x_CryptoObject_AES_CTR (C++ enumerator), 562
 kSE05x_CryptoObject_AES_ECB_NOPAD (C++ enumerator), 562
 kSE05x_CryptoObject_AES_GCM (C++ enumerator), 562
 kSE05x_CryptoObject_AES_GCM_INT_IV (C++ enumerator), 562
 kSE05x_CryptoObject_CMAC_128 (C++ enumerator), 562
 kSE05x_CryptoObject_DES_CBC_ISO9797_M1 (C++ enumerator), 562
 kSE05x_CryptoObject_DES_CBC_ISO9797_M2 (C++ enumerator), 562
 kSE05x_CryptoObject_DES_CBC_NOPAD (C++ enumerator), 562
 kSE05x_CryptoObject_DES_CBC_PKCS5 (C++ enumerator), 562
 kSE05x_CryptoObject_DES_ECB_ISO9797_M1 (C++ enumerator), 562
 kSE05x_CryptoObject_DES_ECB_ISO9797_M2 (C++ enumerator), 562
 kSE05x_CryptoObject_DES_ECB_NOPAD (C++ enumerator), 562
 kSE05x_CryptoObject_DES_ECB_PKCS5 (C++ enumerator), 562
 kSE05x_CryptoObject_DIGEST_SHA (C++ enumerator), 562

kSE05x_CryptoObject_DIGEST_SHA224 (C++ enumerator),	562	kSE05x_ECCurve_NIST_P256 (C++ enumerator),	563
kSE05x_CryptoObject_DIGEST_SHA256 (C++ enumerator),	562	kSE05x_ECCurve_NIST_P384 (C++ enumerator),	563
kSE05x_CryptoObject_DIGEST_SHA384 (C++ enumerator),	562	kSE05x_ECCurve_NIST_P521 (C++ enumerator),	563
kSE05x_CryptoObject_DIGEST_SHA512 (C++ enumerator),	562	kSE05x_ECCurve_Secp160k1 (C++ enumerator),	564
kSE05x_CryptoObject_HMAC_SHA1 (C++ enumerator),	562	kSE05x_ECCurve_Secp192k1 (C++ enumerator),	564
kSE05x_CryptoObject_HMAC_SHA256 (C++ enumerator),	562	kSE05x_ECCurve_Secp224k1 (C++ enumerator),	564
kSE05x_CryptoObject_HMAC_SHA384 (C++ enumerator),	562	kSE05x_ECCurve_Secp256k1 (C++ enumerator),	564
kSE05x_CryptoObject_HMAC_SHA512 (C++ enumerator),	562	kSE05x_ECCurve TPM_ECC_BN_P256 (C++ enumerator),	564
kSE05x_CryptoObject NA (C++ enumerator),	562	kSE05x_ECCurveParam NA (C++ enumerator),	564
kSE05x_DigestMode NA (C++ enumerator),	563	kSE05x_ECCurveParam PARAM_A (C++ enumerator),	564
kSE05x_DigestMode_NO_HASH (C++ enumerator),	563	kSE05x_ECCurveParam PARAM_B (C++ enumerator),	564
kSE05x_DigestMode SHA (C++ enumerator),	563	kSE05x_ECCurveParam PARAM_G (C++ enumerator),	564
kSE05x_DigestMode_SHA224 (C++ enumerator),	563	kSE05x_ECCurveParam PARAM_N (C++ enumerator),	564
kSE05x_DigestMode_SHA256 (C++ enumerator),	563	kSE05x_ECCurveParam PARAM_PRIME (C++ enumerator),	564
kSE05x_DigestMode_SHA384 (C++ enumerator),	563	kSE05x_ECDAASignatureAlgo ECDAASignatureAlgo (C++ enumerator),	565
kSE05x_DigestMode_SHA512 (C++ enumerator),	563	kSE05x_ECDAA (C++ enumerator),	565
kSE05x_ECCurve_Brainpool160 (C++ enumerator),	563	kSE05x_ECDAA (C++ enumerator),	565
kSE05x_ECCurve_Brainpool192 (C++ enumerator),	563	kSE05x_ECSignatureAlgo NA (C++ enumerator),	565
kSE05x_ECCurve_Brainpool224 (C++ enumerator),	563	kSE05x_ECSignatureAlgo PLAIN (C++ enumerator),	565
kSE05x_ECCurve_Brainpool256 (C++ enumerator),	563	kSE05x_ECSignatureAlgo SHA (C++ enumerator),	565
kSE05x_ECCurve_Brainpool320 (C++ enumerator),	563	kSE05x_ECSignatureAlgo SHA_224 (C++ enumerator),	565
kSE05x_ECCurve_Brainpool384 (C++ enumerator),	563	kSE05x_ECSignatureAlgo SHA_256 (C++ enumerator),	565
kSE05x_ECCurve_Brainpool512 (C++ enumerator),	564	kSE05x_ECSignatureAlgo SHA_384 (C++ enumerator),	565
kSE05x_ECCurve_ECC_ED_25519 (C++ enumerator),	564	kSE05x_ECSignatureAlgo SHA_512 (C++ enumerator),	565
kSE05x_ECCurve_ECC_MONT_DH_25519 (C++ enumerator),	564	kSE05x_EDSignatureAlgo ED25519PURE_SHA_512 (C++ enumerator),	565
kSE05x_ECCurve_ECC_MONT_DH_448 (C++ enumerator),	564	kSE05x_EDSignatureAlgo NA (C++ enumerator),	565
kSE05x_ECCurve NA (C++ enumerator),	563	kSE05x_GP_TAG_AID (C++ enumerator),	584
kSE05x_ECCurve_NIST_P192 (C++ enumerator),	563	kSE05x_GP_TAG_CONTRL_REF_PARM (C++ enumerator),	584
kSE05x_ECCurve_NIST_P224 (C++ enumerator),	563	kSE05x_GP_TAG_DR_SE (C++ enumerator),	584
		kSE05x_GP_TAG_GET_DATA (C++ enumerator),	584

kSE05x_GP_TAG_KEY_LEN (*C++ enumerator*), 584
kSE05x_GP_TAG_KEY_TYPE (*C++ enumerator*), 584
kSE05x_GP_TAG_RECEIPT (*C++ enumerator*), 584
kSE05x_GP_TAG_SCP_PARMS (*C++ enumerator*),
 584
kSE05x_HealthCheckMode_CODE_SIGNATURE
 (*C++ enumerator*), 566
kSE05x_HealthCheckMode_DYNAMIC_FLASH_INTE
 (*C++ enumerator*), 566
kSE05x_HealthCheckMode_FIPS (*C++ enumera
 tor*), 566
kSE05x_HealthCheckMode_NA (*C++ enumerator*),
 566
kSE05x_HealthCheckMode_SENSOR (*C++ enumera
 tor*), 566
kSE05x_HealthCheckMode_SFR_CHECK (*C++ enumera
 tor*), 566
kSE05x_HealthCheckMode_SHIELDING (*C++ enumera
 tor*), 566
kSE05x_HkdfMode_ExpandOnly (*C++ enumera
 tor*), 566
kSE05x_HkdfMode_ExtractExpand (*C++ enumera
 tor*), 566
kSE05x_HkdfMode_NA (*C++ enumerator*), 566
kSE05x_I2CM_Baud_Rate_100Khz (*C++ enumera
 tor*), 567
kSE05x_I2CM_Baud_Rate_400Khz (*C++ enumera
 tor*), 567
kSE05x_I2CM_Configure (*C++ enumerator*), 568
kSE05x_I2CM_I2C_Config (*C++ enumerator*), 568
kSE05x_I2CM_I2C_Nack_Fail (*C++ enumerator*),
 567
kSE05x_I2CM_I2C_Read_Error (*C++ enumera
 tor*), 567
kSE05x_I2CM_I2C_Time_Out_Error (*C++ enumera
 tor*), 567
kSE05x_I2CM_I2C_Write_Error (*C++ enumera
 tor*), 567
kSE05x_I2CM_Invalid_Length (*C++ enumera
 tor*), 567
kSE05x_I2CM_Invalid_Length_Encode (*C++ enumera
 tor*), 567
kSE05x_I2CM_Invalid_Tag (*C++ enumerator*),
 567
kSE05x_I2CM_None (*C++ enumerator*), 568
kSE05x_I2CM_Read (*C++ enumerator*), 568
kSE05x_I2CM_StructuralIssue (*C++ enumera
 tor*), 568
kSE05x_I2CM_Success (*C++ enumerator*), 567
kSE05x_I2CM_Write (*C++ enumerator*), 568
kSE05x_INS_ATTEST (*C++ enumerator*), 569
kSE05x_INS_AUTH_OBJECT (*C++ enumerator*), 569
kSE05x_INS_CRYPTO (*C++ enumerator*), 569
kSE05x_INS_I2CM_Attestation (*C macro*), 795
kSE05x_INS_MASK_INS_CHAR (*C++ enumerator*),
 569
kSE05x_INS_MASK_INSTRUCTION (*C++ enumera
 tor*), 569
kSE05x_INS_MGMT (*C++ enumerator*), 569
kSE05x_INS_NA (*C++ enumerator*), 569
kSE05x_INS_PROCESS (*C++ enumerator*), 569
kSE05x_INS_READ (*C++ enumerator*), 569
kSE05x_INS_READ_With_Attestation (*C
 macro*), 796
kSE05x_INS_TRANSIENT (*C++ enumerator*), 569
kSE05x_INS_WRITE (*C++ enumerator*), 569
kSE05x_KeyPart_NA (*C++ enumerator*), 570
kSE05x_KeyPart_Pair (*C++ enumerator*), 570
kSE05x_KeyPart_Private (*C++ enumerator*), 570
kSE05x_KeyPart_Public (*C++ enumerator*), 570
kSE05x_LockIndicator_NA (*C++ enumerator*),
 570
kSE05x_LockIndicator_PERSISTENT_LOCK
 (*C++ enumerator*), 570
kSE05x_LockIndicator_TRANSIENT_LOCK
 (*C++ enumerator*), 570
kSE05x_LockState_LOCKED (*C++ enumera
 tor*), 570
kSE05x_LockState_NA (*C++ enumerator*), 570
kSE05x_Mac_Oper_Generate (*C++ enumera
 tor*), 571
kSE05x_Mac_Oper_NA (*C++ enumerator*), 571
kSE05x_Mac_Oper_Validate (*C++ enumera
 tor*), 571
kSE05x_MACAlgo_CMAC_128 (*C++ enumera
 tor*), 571
kSE05x_MACAlgo_HMAC_SHA1 (*C++ enumera
 tor*), 571
kSE05x_MACAlgo_HMAC_SHA256 (*C++ enumera
 tor*), 571
kSE05x_MACAlgo_HMAC_SHA384 (*C++ enumera
 tor*), 571
kSE05x_MACAlgo_HMAC_SHA512 (*C++ enumera
 tor*), 571
kSE05x_MACAlgo_NA (*C++ enumerator*), 571
kSE05x_MemoryType_NA (*C++ enumerator*), 572
kSE05x_MemoryType_PERSISTENT (*C++ enumera
 tor*), 572
kSE05x_MemoryType_TRANSIENT_DESELECT
 (*C++ enumerator*), 572
kSE05x_MemoryType_TRANSIENT_RESET (*C++ enumera
 tor*), 572
kSE05x_MemTyp_PERSISTENT (*C++ enumera
 tor*), 572
kSE05x_MemTyp_TRANSIENT_DESELECT (*C++ enumera
 tor*), 572
kSE05x_MemTyp_TRANSIENT_RESET (*C++ enumera
 tor*), 572

kSE05x_MoreIndicator_MORE (*C++ enumerator*), 572
kSE05x_MoreIndicator_NA (*C++ enumerator*), 572
kSE05x_MoreIndicator_NO_MORE (*C++ enumerator*), 572
kSE05x_Origin_EXTERNAL (*C++ enumerator*), 573
kSE05x_Origin_INTERNAL (*C++ enumerator*), 573
kSE05x_Origin_NA (*C++ enumerator*), 573
kSE05x_Origin_PROVISIONED (*C++ enumerator*), 573
kSE05x_P1_AEAD (*C++ enumerator*), 574
kSE05x_P1_AEAD_SP800_38D (*C++ enumerator*), 574
kSE05x_P1_AES (*C++ enumerator*), 574
kSE05x_P1_BINARY (*C++ enumerator*), 574
kSE05x_P1_CIPHER (*C++ enumerator*), 574
kSE05x_P1_COUNTER (*C++ enumerator*), 574
kSE05x_P1_CRYPTO_OBJ (*C++ enumerator*), 574
kSE05x_P1_CURVE (*C++ enumerator*), 574
kSE05x_P1_DEFAULT (*C++ enumerator*), 574
kSE05x_P1_DES (*C++ enumerator*), 574
kSE05x_P1_EC (*C++ enumerator*), 574
kSE05x_P1_HMAC (*C++ enumerator*), 574
kSE05x_P1_KEY_PAIR (*C++ enumerator*), 573
kSE05x_P1_MAC (*C++ enumerator*), 574
kSE05x_P1_MASK_CRED_TYPE (*C++ enumerator*), 573
kSE05x_P1_MASK_KEY_TYPE (*C++ enumerator*), 573
kSE05x_P1_NA (*C++ enumerator*), 573
kSE05x_P1_PCR (*C++ enumerator*), 574
kSE05x_P1_PRIVATE (*C++ enumerator*), 573
kSE05x_P1_PUBLIC (*C++ enumerator*), 573
kSE05x_P1_RSA (*C++ enumerator*), 574
kSE05x_P1_SIGNATURE (*C++ enumerator*), 574
kSE05x_P1_TLS (*C++ enumerator*), 574
kSE05x_P1_UNUSED (*C++ enumerator*), 573
kSE05x_P1_UserID (*C++ enumerator*), 574
kSE05x_P2_ATTEST (*C++ enumerator*), 576
kSE05x_P2_ATTRIBUTES (*C++ enumerator*), 576
kSE05x_P2_AUTH_FIRST_PART1 (*C++ enumerator*), 576
kSE05x_P2_AUTH_FIRST_PART2 (*C++ enumerator*), 575
kSE05x_P2_AUTH_NONFIRST_PART1 (*C++ enumerator*), 576
kSE05x_P2_AUTH_NONFIRST_PART2 (*C++ enumerator*), 575
kSE05x_P2_CHANGE_KEY_PART1 (*C++ enumerator*), 575
kSE05x_P2_CHANGE_KEY_PART2 (*C++ enumerator*), 575
kSE05x_P2_CM_COMMAND (*C++ enumerator*), 576
kSE05x_P2_CPLC (*C++ enumerator*), 576
kSE05x_P2_CREATE (*C++ enumerator*), 576
kSE05x_P2_CRYPTO_LIST (*C++ enumerator*), 576
kSE05x_P2_CURVE_LIST (*C++ enumerator*), 575
kSE05x_P2_DECRYPT (*C++ enumerator*), 576
kSE05x_P2_DECRYPT_ONESHOT (*C++ enumerator*), 575
kSE05x_P2_DEFAULT (*C++ enumerator*), 574
kSE05x_P2_DELETE_ALL (*C++ enumerator*), 575
kSE05x_P2_DELETE_CURVE (*C++ enumerator*), 576
kSE05x_P2_DELETE_OBJECT (*C++ enumerator*), 575
kSE05x_P2_DH (*C++ enumerator*), 575
kSE05x_P2_DH_REVERSE (*C++ enumerator*), 576
kSE05x_P2_DIVERSIFY (*C++ enumerator*), 575
kSE05x_P2_DUMP_KEY (*C++ enumerator*), 575
kSE05x_P2_ENCRYPT (*C++ enumerator*), 576
kSE05x_P2_ENCRYPT_ONESHOT (*C++ enumerator*), 575
kSE05x_P2_EXIST (*C++ enumerator*), 575
kSE05x_P2_EXPORT (*C++ enumerator*), 575
kSE05x_P2_FINAL (*C++ enumerator*), 574
kSE05x_P2_GENERATE (*C++ enumerator*), 574
kSE05x_P2_GENERATE_ONESHOT (*C++ enumerator*), 576
kSE05x_P2_HKDF (*C++ enumerator*), 575
kSE05x_P2_HKDF_EXPAND_ONLY (*C++ enumerator*), 575
kSE05x_P2_I2CM (*C++ enumerator*), 575
kSE05x_P2_I2CM_ATTESTED (*C++ enumerator*), 575
kSE05x_P2_ID (*C++ enumerator*), 575
kSE05x_P2_IMPORT (*C++ enumerator*), 575
kSE05x_P2_IMPORT_EXT (*C++ enumerator*), 576
kSE05x_P2_INIT (*C++ enumerator*), 574
kSE05x_P2_KILL_AUTH (*C++ enumerator*), 575
kSE05x_P2_LIST (*C++ enumerator*), 575
kSE05x_P2_MAC (*C++ enumerator*), 575
kSE05x_P2_MEMORY (*C++ enumerator*), 575
kSE05x_P2_MODE_OF_OPERATION (*C++ enumerator*), 576
kSE05x_P2_ONESHOT (*C++ enumerator*), 575
kSE05x_P2_PARAM (*C++ enumerator*), 576
kSE05x_P2_PBKDF (*C++ enumerator*), 575
kSE05x_P2_RANDOM (*C++ enumerator*), 576
kSE05x_P2_RAW (*C++ enumerator*), 576
kSE05x_P2_READ_STATE (*C++ enumerator*), 576
kSE05x_P2_RESTRICT (*C++ enumerator*), 576
kSE05x_P2_SANITY (*C++ enumerator*), 576
kSE05x_P2_SCP (*C++ enumerator*), 576
kSE05x_P2_SESSION_CLOSE (*C++ enumerator*), 575
kSE05x_P2_SESSION_CREATE (*C++ enumerator*), 575

kSE05x_P2_SESSION_POLICY (*C++ enumerator*), 575
kSE05x_P2_SESSION_REFRESH (*C++ enumerator*), 575
kSE05x_P2_SESSION_UserID (*C++ enumerator*), 575
kSE05x_P2_SIGN (*C++ enumerator*), 574
kSE05x_P2_SIGN_ECDA (C++ enumerator), 575
kSE05x_P2_SIZE (*C++ enumerator*), 574
kSE05x_P2_TIME (*C++ enumerator*), 576
kSE05x_P2_TLS_PMS (*C++ enumerator*), 576
kSE05x_P2_TLS_PRF_BOTH (*C++ enumerator*), 576
kSE05x_P2_TLS_PRF_CLI_HELLO (*C++ enumerator*), 576
kSE05x_P2_TLS_PRF_CLI_RND (*C++ enumerator*), 576
kSE05x_P2_TLS_PRF_SRV_HELLO (*C++ enumerator*), 576
kSE05x_P2_TLS_PRF_SRV_RND (*C++ enumerator*), 576
kSE05x_P2_TRANSPORT (*C++ enumerator*), 576
kSE05x_P2_TYPE (*C++ enumerator*), 575
kSE05x_P2_UNLOCK_CHALLENGE (*C++ enumerator*), 575
kSE05x_P2_UPDATE (*C++ enumerator*), 574
kSE05x_P2_VALIDATE (*C++ enumerator*), 576
kSE05x_P2_VALIDATE_ONESHOT (*C++ enumerator*), 576
kSE05x_P2_VARIANT (*C++ enumerator*), 576
kSE05x_P2_VERIFY (*C++ enumerator*), 574
kSE05x_P2_VERSION (*C++ enumerator*), 575
kSE05x_P2_VERSION_EXT (*C++ enumerator*), 575
kSE05x_PlatformSCPRequest_NA (*C++ enumerator*), 577
kSE05x_PlatformSCPRequest_NOT_REQUIRED (*C++ enumerator*), 577
kSE05x_PlatformSCPRequest_REQUIRED (*C++ enumerator*), 577
kSE05x_RestrictMode_NA (*C++ enumerator*), 577
kSE05x_RestrictMode_RESTRICT_ALL (*C++ enumerator*), 577
kSE05x_RestrictMode_RESTRICT_NEW (*C++ enumerator*), 577
kSE05x_Result_FAILURE (*C++ enumerator*), 577
kSE05x_Result_NA (*C++ enumerator*), 577
kSE05x_Result_SUCCESS (*C++ enumerator*), 577
kSE05x_RSABitLength_1024 (*C++ enumerator*), 578
kSE05x_RSABitLength_1152 (*C++ enumerator*), 578
kSE05x_RSABitLength_2048 (*C++ enumerator*), 578
kSE05x_RSABitLength_3072 (*C++ enumerator*), 578
kSE05x_RSABitLength_4096 (*C++ enumerator*), 578
kSE05x_RSABitLength_512 (*C++ enumerator*), 578
kSE05x_RSABitLength_NA (*C++ enumerator*), 578
kSE05x_RSAEncryptionAlgo_NA (*C++ enumerator*), 578
kSE05x_RSAEncryptionAlgo_NO_PAD (*C++ enumerator*), 578
kSE05x_RSAEncryptionAlgo_PKCS1 (*C++ enumerator*), 578
kSE05x_RSAEncryptionAlgo_PKCS1_OAEP (*C++ enumerator*), 578
kSE05x_RSAKeyComponent_DP (*C++ enumerator*), 579
kSE05x_RSAKeyComponent_DQ (*C++ enumerator*), 579
kSE05x_RSAKeyComponent_INVQ (*C++ enumerator*), 579
kSE05x_RSAKeyComponent_MOD (*C++ enumerator*), 579
kSE05x_RSAKeyComponent_NA (*C++ enumerator*), 579
kSE05x_RSAKeyComponent_P (*C++ enumerator*), 579
kSE05x_RSAKeyComponent_PRIV_EXP (*C++ enumerator*), 579
kSE05x_RSAKeyComponent_PUB_EXP (*C++ enumerator*), 579
kSE05x_RSAKeyComponent_Q (*C++ enumerator*), 579
kSE05x_RSAKeyFormat_CRT (*C++ enumerator*), 579
kSE05x_RSAKeyFormat_RAW (*C++ enumerator*), 579
kSE05x_RSAPubKeyComp_MOD (*C++ enumerator*), 580
kSE05x_RSAPubKeyComp_NA (*C++ enumerator*), 580
kSE05x_RSAPubKeyComp_PUB_EXP (*C++ enumerator*), 580
kSE05x_RSASignAlgo_NA (*C++ enumerator*), 580
kSE05x_RSASignAlgo_SHA1_PKCS1_PSS (*C++ enumerator*), 580
kSE05x_RSASignAlgo_SHA224_PKCS1_PSS (*C++ enumerator*), 580
kSE05x_RSASignAlgo_SHA256_PKCS1_PSS (*C++ enumerator*), 580
kSE05x_RSASignAlgo_SHA384_PKCS1_PSS (*C++ enumerator*), 580
kSE05x_RSASignAlgo_SHA512_PKCS1_PSS (*C++ enumerator*), 580
kSE05x_RSASignAlgo_SHA_224_PKCS1 (*C++ enumerator*), 580

kSE05x_RSASignAlgo_SHA_256_PKCS1 (*C++ enumerator*), 580
kSE05x_RSASignAlgo_SHA_384_PKCS1 (*C++ enumerator*), 580
kSE05x_RSASignAlgo_SHA_512_PKCS1 (*C++ enumerator*), 580
kSE05x_RSASignatureAlgo_NA (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA1_PKCS1 (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA1_PKCS1_PSS (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA224_PKCS1_PSSkSE05x_Sign_Request (*C++ enumerator*), 567
(C++ enumerator), 581
kSE05x_RSASignatureAlgo_SHA256_PKCS1_PSS (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA384_PKCS1_PSS (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA512_PKCS1_PSS (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA_224_PKCS1 (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA_256_PKCS1 (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA_384_PKCS1 (*C++ enumerator*), 581
kSE05x_RSASignatureAlgo_SHA_512_PKCS1 (*C++ enumerator*), 581
kSE05x_SecObjTyp_AES_KEY (*C++ enumerator*), 582
kSE05x_SecObjTyp_BINARY_FILE (*C++ enumerator*), 582
kSE05x_SecObjTyp_COUNTER (*C++ enumerator*), 582
kSE05x_SecObjTyp_CURVE (*C++ enumerator*), 582
kSE05x_SecObjTyp_DES_KEY (*C++ enumerator*), 582
kSE05x_SecObjTyp_EC_KEY_PAIR (*C++ enumerator*), 582
kSE05x_SecObjTyp_EC_PRIV_KEY (*C++ enumerator*), 582
kSE05x_SecObjTyp_EC_PUB_KEY (*C++ enumerator*), 582
kSE05x_SecObjTyp_HMAC_KEY (*C++ enumerator*), 582
kSE05x_SecObjTyp_PCR (*C++ enumerator*), 582
kSE05x_SecObjTyp_RSA_KEY_PAIR (*C++ enumerator*), 582
kSE05x_SecObjTyp_RSA_KEY_PAIR_CRT (*C++ enumerator*), 582
kSE05x_SecObjTyp_RSA_PRIV_KEY (*C++ enumerator*), 582
kSE05x_SecObjTyp_RSA_PRIV_KEY_CRT (*C++ enumerator*), 582
kSE05x_SecObjTyp_RSA_PUB_KEY (*C++ enumerator*), 582
kSE05x_SetIndicator_NA (*C++ enumerator*), 582
kSE05x_SetIndicator_NOT_SET (*C++ enumerator*), 582
kSE05x_SetIndicator_SET (*C++ enumerator*), 582
kSE05x_Sign_Enc_Request (*C++ enumerator*), 567
kSE05x_SW12_COMMAND_NOT_ALLOWED (*C++ enumerator*), 583
kSE05x_SW12_CONDITIONS_NOT_SATISFIED (*C++ enumerator*), 583
kSE05x_SW12_DATA_INVALID (*C++ enumerator*), 583
kSE05x_SW12_NA (*C++ enumerator*), 583
kSE05x_SW12_NO_ERROR (*C++ enumerator*), 583
kSE05x_SW12_SECURITY_STATUS (*C++ enumerator*), 583
kSE05x_SW12_WRONG_DATA (*C++ enumerator*), 583
kSE05x_SymmKeyType_AES (*C++ enumerator*), 583
kSE05x_SymmKeyType_CMAC (*C++ enumerator*), 583
kSE05x_SymmKeyType_DES (*C++ enumerator*), 583
kSE05x_SymmKeyType_HMAC (*C++ enumerator*), 583
kSE05x_TAG_1 (*C++ enumerator*), 584
kSE05x_TAG_10 (*C++ enumerator*), 584
kSE05x_TAG_11 (*C++ enumerator*), 584
kSE05x_TAG_2 (*C++ enumerator*), 584
kSE05x_TAG_3 (*C++ enumerator*), 584
kSE05x_TAG_4 (*C++ enumerator*), 584
kSE05x_TAG_5 (*C++ enumerator*), 584
kSE05x_TAG_6 (*C++ enumerator*), 584
kSE05x_TAG_7 (*C++ enumerator*), 584
kSE05x_TAG_8 (*C++ enumerator*), 584
kSE05x_TAG_9 (*C++ enumerator*), 584
kSE05x_TAG_I2CM_Config (*C++ enumerator*), 568
kSE05x_TAG_I2CM_Read (*C++ enumerator*), 568
kSE05x_TAG_I2CM_Write (*C++ enumerator*), 568
kSE05x_TAG_IMPORT_AUTH_DATA (*C++ enumerator*), 584
kSE05x_TAG_IMPORT_AUTH_KEY_ID (*C++ enumerator*), 584
kSE05x_TAG_MAX_ATTEMPTS (*C++ enumerator*), 584
kSE05x_TAG_NA (*C++ enumerator*), 584
kSE05x_TAG_POLICY (*C++ enumerator*), 584
kSE05x_TAG_POLICY_CHECK (*C++ enumerator*), 584

kSE05x_TAG_SESSION_ID (*C++ enumerator*), 584
 kSE05x_TLS_PRF_BOTH (*C++ enumerator*), 585
 kSE05x_TLS_PRF_CLI_HELLO (*C++ enumerator*), 585
 kSE05x_TLS_PRF_CLI_RND (*C++ enumerator*), 585
 kSE05x_TLS_PRF_NA (*C++ enumerator*), 585
 kSE05x_TLS_PRF_SRV_HELLO (*C++ enumerator*), 585
 kSE05x_TLS_PRF_SRV_RND (*C++ enumerator*), 585
 kSE05x_TransientIndicator_NA (*C++ enumerator*), 585
 kSE05x_TransientIndicator_PERSISTENT (*C++ enumerator*), 585
 kSE05x_TransientIndicator_TRANSIENT (*C++ enumerator*), 585
 kSE05x_TransientType_Persistent (*C++ enumerator*), 586
 kSE05x_TransientType_Transient (*C++ enumerator*), 586
 kSSS_AuthType_AESKey (*C++ enumerator*), 586
 kSSS_AuthType_AppletSCP03 (*C macro*), 796
 kSSS_AuthType_ECKey (*C++ enumerator*), 586
 kSSS_AuthType_FastSCP (*C macro*), 796
 kSSS_AuthType_FastSCP_Counter (*C macro*), 796
 kSSS_AuthType_ID (*C++ enumerator*), 586
 kSSS_AuthType_INT_ECKey_Counter (*C++ enumerator*), 586
 kSSS_AuthType_INT_FastSCP_Counter (*C macro*), 797
 kSSS_AuthType_None (*C++ enumerator*), 586
 kSSS_AuthType_SCP03 (*C++ enumerator*), 586
 kSSS_CipherType_AES (*C++ enumerator*), 591
 kSSS_CipherType_Binary (*C++ enumerator*), 592
 kSSS_CipherType_Certificate (*C++ enumerator*), 592
 kSSS_CipherType_CMAC (*C++ enumerator*), 591
 kSSS_CipherType_Count (*C++ enumerator*), 592
 kSSS_CipherType_DES (*C++ enumerator*), 591
 kSSS_CipherType_EC_BARRETO_NAEHRIG (*C++ enumerator*), 591
 kSSS_CipherType_EC_BRAINPOOL (*C++ enumerator*), 591
 kSSS_CipherType_EC_MONTGOMERY (*C++ enumerator*), 591
 kSSS_CipherType_EC_NIST_K (*C++ enumerator*), 591
 kSSS_CipherType_EC_NIST_P (*C++ enumerator*), 591
 kSSS_CipherType_EC_TWISTED_ED (*C++ enumerator*), 591
 kSSS_CipherType_HMAC (*C++ enumerator*), 591
 kSSS_CipherType_MAC (*C++ enumerator*), 591
 kSSS_CipherType_NONE (*C++ enumerator*), 591
 kSSS_CipherType_PCR (*C++ enumerator*), 592
 kSSS_CipherType_ReservedPin (*C++ enumerator*), 592
 kSSS_CipherType_RSA (*C++ enumerator*), 591
 kSSS_CipherType_RSA_CRT (*C++ enumerator*), 591
 kSSS_CipherType_UserID (*C++ enumerator*), 591
 kSSS_ConnectionType_Encrypted (*C++ enumerator*), 592
 kSSS_ConnectionType_Password (*C++ enumerator*), 592
 kSSS_ConnectionType_Plain (*C++ enumerator*), 592
 kSSS_KeyPart_Default (*C++ enumerator*), 593
 kSSS_KeyPart_NONE (*C++ enumerator*), 593
 kSSS_KeyPart_Pair (*C++ enumerator*), 593
 kSSS_KeyPart_Private (*C++ enumerator*), 593
 kSSS_KeyPart_Public (*C++ enumerator*), 593
 kSSS_KeyStoreProp_au8_Optional_Start (*C++ enumerator*), 593
 kSSS_KeyStoreProp_FreeMem_Persistent (*C++ enumerator*), 596
 kSSS_KeyStoreProp_FreeMem_Transient (*C++ enumerator*), 596
 kSSS_SE05x_SessionProp_CertUID (*C++ enumerator*), 595
 kSSS_SE05x_SessionProp_CertUIDLen (*C++ enumerator*), 595
 kSSS_SessionProp_au8_NA (*C++ enumerator*), 595
 kSSS_SessionProp_au8_Optional_Start (*C++ enumerator*), 595
 kSSS_SessionProp_au8_Proprietary_Start (*C++ enumerator*), 595
 kSSS_SessionProp_szName (*C++ enumerator*), 595
 kSSS_SessionProp_u32_NA (*C++ enumerator*), 596
 kSSS_SessionProp_u32_Optional_Start (*C++ enumerator*), 596
 kSSS_SessionProp_u32_Proprietary_Start (*C++ enumerator*), 596
 kSSS_SessionProp_UID (*C++ enumerator*), 595
 kSSS_SessionProp_UIDLen (*C++ enumerator*), 596
 kSSS_SessionProp_VerDev (*C++ enumerator*), 596
 kSSS_SessionProp_VerMaj (*C++ enumerator*), 596
 kSSS_SessionProp_VerMin (*C++ enumerator*), 596
 kSSS_SIZE (*C++ enumerator*), 586
 kSSS_TunnelDest_None (*C++ enumerator*), 597
 kSSS_TunnelType_Se05x_Iot_applet (*C++*

enumerator), 597

kStatus_SEMS_Lite_ERR_COM (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_DoRecovery (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_DoReRun (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_Fatal (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_General (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_MinPreviousVersion (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_NotApplicable (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_NotEnoughNVMemory (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_NotEnoughTransientMemory (*C++ enumerator*), **587**

kStatus_SEMS_Lite_ERR_OlderVersion (*C++ enumerator*), **587**

kStatus_SEMS_Lite_Success (*C++ enumerator*), **587**

kStatus_SEMS_Lite_Version_ERR_Downgrade (*C++ enumerator*), **588**

kStatus_SEMS_Lite_Version_ERR_MIN (*C++ enumerator*), **588**

kStatus_SEMS_Lite_Version_Pass (*C++ enumerator*), **588**

kStatus_SSS_Fail (*C++ enumerator*), **596**

kStatus_SSS_InvalidArgument (*C++ enumerator*), **596**

kStatus_SSS_ResourceBusy (*C++ enumerator*), **597**

kStatus_SSS_Success (*C++ enumerator*), **596**

kType_SSS_HW (*C++ enumerator*), **597**

kType_SSS_Isolated_HW (*C++ enumerator*), **597**

kType_SSS_mbedtls (*C++ enumerator*), **597**

kType_SSS_OpenSSL (*C++ enumerator*), **597**

kType_SSS_SE_A71CH (*C++ enumerator*), **598**

kType_SSS_SE_A71CL (*C++ enumerator*), **598**

kType_SSS_SE_SE05x (*C++ enumerator*), **598**

kType_SSS_SECO (*C++ enumerator*), **597**

kType_SSS_SecureElement (*C++ enumerator*), **598**

kType_SSS_Sentinel (*C++ enumerator*), **597**

kType_SSS_Sentinel200 (*C++ enumerator*), **597**

kType_SSS_Sentinel300 (*C++ enumerator*), **597**

kType_SSS_Sentinel400 (*C++ enumerator*), **597**

kType_SSS_Sentinel500 (*C++ enumerator*), **598**

kType_SSS_Software (*C++ enumerator*), **597**

kType_SSS_SubSystem_LAST (*C++ enumerator*), **598**

kType_SSS_SubSystem_NONE (*C++ enumerator*), **598**

597

L

length (*C++ member*), **301, 788**

Log command line option, **132**

M

main (*C++ function*), **616**

mbedtls_ALT command line option, **131**

mbedtls_ecp_keypair_free_o (*C++ function*), **616**

mbedtls_ecp_tls_read_group_o (*C++ function*), **617**

multicast_package_t (*C++ class*), **523**

multicast_package_t::multicastCommandsLen

multicast_package_t::multicastPackageNameLen (*C++ member*), **523**

multicast_package_t::multicastPackageVersion (*C++ member*), **523**

multicast_package_t::pMulticastCommands (*C++ member*), **523**

multicast_package_t::pMulticastPackageName (*C++ member*), **523**

multicast_package_t::pSignatureOverCommands (*C++ member*), **523**

multicast_package_t::pSubComponentMetaData (*C++ member*), **523**

multicast_package_t::requiredFreeBytesNonVolatileMem (*C++ member*), **523**

multicast_package_t::requiredFreeBytesTransientMem (*C++ member*), **523**

multicast_package_t::semsLiteAPIVersion (*C++ member*), **523**

multicast_package_t::signatureOverCommandsLen (*C++ member*), **523**

multicast_package_t::target12Nc (*C++ member*), **523**

multicast_package_t::targetEntityID (*C++ member*), **523**

N

number_of_services (*C++ member*), **301, 788**

NX_ENSURE_DO_LOG_MESSAGE (*C macro*), **797**

NX_ENSURE_MESSAGE (*C macro*), **797**

NXECKey03_StaticCtx_t (*C++ class*), **524**

NXECKey03_StaticCtx_t::HostEcdsaObj (*C++ member*), **524**

NXECKey03_StaticCtx_t::HostEcKeypair (*C++ member*), **524**

NXECKey03_StaticCtx_t::masterSec (*C++ member*), **524**

NXECKey03_StaticCtx_t::SeEcPubKey (*C++ member*), 524

NXP_IOT_AGENT_EDGELOCK2GO_CLIENT_CERTIFICATE_SA0EBAPPERISHSEFinal (*C++ function*), 618

(*C macro*), 302, 797

nxp_iot_UpdateStatusReport (*C++ type*), 291, 826

NXPInternal
command line option, 136

NXSCP03_AuthCtx_t (*C++ class*), 524

NXSCP03_AuthCtx_t::pDyn_ctx (*C++ member*), 524

NXSCP03_AuthCtx_t::pStatic_ctx (*C++ member*), 524

NXSCP03_DynCtx_t (*C++ class*), 525

NXSCP03_DynCtx_t::authType (*C++ member*), 525

NXSCP03_DynCtx_t::cCounter (*C++ member*), 525

NXSCP03_DynCtx_t::Enc (*C++ member*), 525

NXSCP03_DynCtx_t::Mac (*C++ member*), 525

NXSCP03_DynCtx_t::MCV (*C++ member*), 525

NXSCP03_DynCtx_t::Rmac (*C++ member*), 525

NXSCP03_DynCtx_t::SecurityLevel (*C++ member*), 525

NXSCP03_StaticCtx_t (*C++ class*), 525

NXSCP03_StaticCtx_t::Dek (*C++ member*), 526

NXSCP03_StaticCtx_t::Enc (*C++ member*), 526

NXSCP03_StaticCtx_t::keyVerNo (*C++ member*), 526

NXSCP03_StaticCtx_t::Mac (*C++ member*), 526

P

pb_field_t (*C++ type*), 291, 297, 826

pb_istream_t (*C++ type*), 291, 297, 827

pb_oiostream_t (*C++ type*), 291, 297, 827

PCONTEXT (*C macro*), 798

public_key_identifier_t (*C++ type*), 298, 827

R

RTOS
command line option, 131

S

SCP
command line option, 131

SE050_INS_MASK_INS_CHAR (*C macro*), 798

SE050_INS_MASK_INSTRUCTION (*C macro*), 798

SE050_MAX_APDU_PAYLOAD_LENGTH (*C macro*), 798

SE050_MAX_I2CM_COMMAND_LENGTH (*C macro*), 798

SE050_MAX_NUMBER_OF_SESSIONS (*C macro*), 799

SE050_OBJECT_IDENTIFIER_SIZE (*C macro*), 799

SE05x_AeadAlgo_t (*C++ enum*), 556

Se05x_API_CheckObjectExists (*C++ function*), 617

Se05x_API_CipherInit (*C++ function*), 619

Se05x_API_CipherOneShot (*C++ function*), 620

Se05x_API_CipherUpdate (*C++ function*), 621

Se05x_API_CloseSession (*C++ function*), 622

Se05x_API_CreateCounter (*C++ function*), 623

Se05x_API_CreateCryptoObject (*C++ function*), 624

Se05x_API_CreateECCurve (*C++ function*), 625

Se05x_API_CreateSession (*C++ function*), 625

Se05x_API_DeleteAll (*C++ function*), 626

Se05x_API_DeleteAll_Iterative (*C++ function*), 627

Se05x_API_DeleteCryptoObject (*C++ function*), 628

Se05x_API_DeleteECCurve (*C++ function*), 629

Se05x_API_DeleteSecureObject (*C++ function*), 629

Se05x_API_DFAuthenticateFirstPart1 (*C++ function*), 630

Se05x_API_DFAuthenticateFirstPart2 (*C++ function*), 631

Se05x_API_DFAuthenticateNonFirstPart1 (*C++ function*), 632

Se05x_API_DFChangeKeyPart1 (*C++ function*), 633

Se05x_API_DFChangeKeyPart2 (*C++ function*), 635

Se05x_API_DFDiversifyKey (*C++ function*), 636

Se05x_API_DFDumpSessionKeys (*C++ function*), 637

Se05x_API_DFKillAuthentication (*C++ function*), 638

Se05x_API_DigestFinal (*C++ function*), 639

Se05x_API_DigestInit (*C++ function*), 640

Se05x_API_DigestOneShot (*C++ function*), 640

Se05x_API_DigestUpdate (*C++ function*), 641

Se05x_API_EC_CurveGetId (*C++ function*), 642

Se05x_API_ECDAAASign (*C++ function*), 643

Se05x_API_ECDHGenerateSharedSecret (*C++ function*), 644

Se05x_API_ECDSSign (*C++ function*), 645

Se05x_API_ECDSAVerify (*C++ function*), 647

Se05x_API_ECGenSharedSecret (*C macro*), 799

Se05x_API_EdDSASign (*C++ function*), 648

Se05x_API_EdDSAVerify (*C++ function*), 649

Se05x_API_ExchangeSessionData (*C++ function*), 650

Se05x_API_ExportObject (*C++ function*), 651

Se05x_API_GetECCurveId (*C++ function*), 653

Se05x_API_GetFreeMemory (*C++ function*), 653

Se05x_API_GetRandom (*C++ function*), 654

Se05x_API_GetTimestamp (*C++ function*), 655
 Se05x_API_GetVersion (*C++ function*), 656
 Se05x_API_HKDF (*C++ function*), 657
 Se05x_API_I2CM_ExecuteCommandSet (*C++ function*), 659
 Se05x_API_ImportExternalObject (*C++ function*), 661
 Se05x_API_ImportObject (*C++ function*), 663
 Se05x_API_IncCounter (*C++ function*), 664
 Se05x_API_MACFinal (*C++ function*), 664
 Se05x_API_MACInit (*C++ function*), 666
 Se05x_API_MACOneShot_G (*C++ function*), 667
 Se05x_API_MACOneShot_V (*C++ function*), 668
 Se05x_API_MACUpdate (*C++ function*), 668
 Se05x_API_PBKDF2 (*C++ function*), 669
 Se05x_API_ReadCryptoObjectList (*C++ function*), 671
 Se05x_API_ReadECCurveList (*C++ function*), 672
 Se05x_API_ReadIDList (*C++ function*), 673
 Se05x_API_ReadObject (*C++ function*), 674
 Se05x_API_ReadObject_W_Attst (*C++ function*), 676
 Se05x_API_ReadObjectAttributes_W_Attst (*C++ function*), 678
 Se05x_API_ReadRSA (*C++ function*), 680
 Se05x_API_ReadRSA_W_Attst (*C++ function*), 681
 Se05x_API_ReadSize (*C++ function*), 682
 Se05x_API_ReadType (*C++ function*), 683
 Se05x_API_RefreshSession (*C++ function*), 684
 Se05x_API_RSADecrypt (*C++ function*), 685
 Se05x_API_RSACrypt (*C++ function*), 686
 Se05x_API_RSASign (*C++ function*), 687
 Se05x_API_RSAVerify (*C++ function*), 688
 Se05x_API_SetAppletFeatures (*C++ function*), 689
 Se05x_API_SetCounterValue (*C++ function*), 690
 Se05x_API_SetECCurveParam (*C++ function*), 690
 Se05x_API_SetLockState (*C++ function*), 691
 Se05x_API_SetPlatformSCPRequest (*C++ function*), 692
 Se05x_API_SHAOneShot (*C macro*), 799
 Se05x_API_TLSCalculatePreMasterSecret (*C++ function*), 693
 Se05x_API_TLSGenerateRandom (*C++ function*), 695
 Se05x_API_TLSPerformPRF (*C++ function*), 696
 Se05x_API_VerifySessionUserID (*C++ function*), 697
 Se05x_API_WriteBinary (*C++ function*), 698
 Se05x_API_WriteECKey (*C++ function*), 699
 Se05x_API_WritePCR (*C++ function*), 700
 Se05x_API_WriteRSAKey (*C++ function*), 701
 Se05x_API_WriteSymmKey (*C++ function*), 703
 Se05x_API_WriteUserID (*C++ function*), 704
 SE05x_Applet_Feature_Disable_t (*C++ class*), 526
 SE05x_Applet_Feature_Disable_t::EXTCFG_FORBID_AES_C...
 (C++ member), 526
 SE05x_Applet_Feature_Disable_t::EXTCFG_FORBID_AES_O...
 (C++ member), 526
 SE05x_Applet_Feature_Disable_t::EXTCFG_FORBID_ECDAA...
 (C++ member), 526
 SE05x_Applet_Feature_Disable_t::EXTCFG_FORBID_ECDH...
 (C++ member), 526
 SE05x_Applet_Feature_Disable_t::EXTCFG_FORBID_HKDF...
 (C++ member), 526
 SE05x_Applet_Feature_Disable_t::EXTCFG_FORBID_RSA_1...
 (C++ member), 526
 SE05x_Applet_Feature_Disable_t::EXTCFG_FORBID_RSA_S...
 (C++ member), 526
 SE05x_Applet_Feature_t (*C++ class*), 527
 SE05x_Applet_Feature_t::AppletConfig_AES
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_DES
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_DH_MONT
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_ECDAA
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_ECDSA_ECDH_ECD...
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_EDDSA
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_HMAC
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_I2CM
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_MIFARE
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_PBKDF
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_RFU1
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_RFU21
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_RSA_CRT
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_RSA_PLAIN
 (C++ member), 527
 SE05x_Applet_Feature_t::AppletConfig_TLS
 (C++ member), 527
 SE05x_AppletConfig_t (*C++ enum*), 556
 SE05x_AppletResID_t (*C++ enum*), 557
 SE05x_AttestationAlgo_t (*C++ enum*), 558

SE05x_AttestationType_t (*C++ enum*), 559
 SE05X_Auth
 command line option, 132
 se05x_auth_context_t (*C macro*), 800
 SE05x_AuthCtx_ECKey_t (*C++ class*), 528
 SE05x_AuthCtx_ECKey_t::pDyn_ctx (*C++ member*), 528
 SE05x_AuthCtx_ECKey_t::pStatic_ctx (*C++ member*), 528
 SE05x_AuthCtx_ID_t (*C++ class*), 528
 SE05x_AuthCtx_ID_t::pObj (*C++ member*), 528
 SE05x_AuthCtx_t (*C macro*), 800
 SE05x_AuthType_t (*C macro*), 800
 SE05x_Cipher_Oper_OneShot_t (*C++ enum*), 559
 SE05x_Cipher_Oper_t (*C++ enum*), 560
 SE05x_CipherMode_t (*C++ enum*), 560
 SE05x_Connect_Ctx_t (*C macro*), 800
 SE05x_CryptoContext_t (*C++ enum*), 561
 SE05x_CryptoModeSubType_t (*C++ union*), 598
 SE05x_CryptoModeSubType_t::aead (*C++ member*), 598
 SE05x_CryptoModeSubType_t::cipher (*C++ member*), 598
 SE05x_CryptoModeSubType_t::digest (*C++ member*), 598
 SE05x_CryptoModeSubType_t::mac (*C++ member*), 598
 SE05x_CryptoModeSubType_t::union_8bit (*C++ member*), 598
 SE05x_CryptoObject_t (*C++ enum*), 562
 SE05x_CryptoObjectID_t (*C macro*), 800
 SE05x_DigestMode_t (*C++ enum*), 563
 SE05x_ECCurve_t (*C++ enum*), 563
 SE05x_ECCurveParam_t (*C++ enum*), 564
 SE05x_ECDAA_SIGNATURE_ALGO_t (*C++ enum*), 565
 SE05x_ECSignatureAlgo_t (*C++ enum*), 565
 SE05x_EDSignatureAlgo_t (*C++ enum*), 565
 se05x_get_sha_algo (*C++ function*), 705
 SE05x_HealthCheckMode_t (*C++ enum*), 566
 SE05x_HkdfMode_t (*C++ enum*), 566
 Se05x_i2c_master_attst_txn (*C++ function*), 705
 Se05x_i2c_master_txn (*C++ function*), 706
 SE05x_I2CM_Baud_Rate_t (*C++ enum*), 567
 SE05x_I2CM_cmd_t (*C++ class*), 529
 SE05x_I2CM_cmd_t::cmd (*C++ member*), 529
 SE05x_I2CM_cmd_t::type (*C++ member*), 529
 SE05x_I2CM_configData_t (*C++ class*), 529
 SE05x_I2CM_configData_t::I2C_addr (*C++ member*), 529
 SE05x_I2CM_configData_t::I2C_baudRate (*C++ member*), 529
 SE05x_I2CM_configData_t::status (*C++ member*), 529
 SE05x_I2CM_INS_type_t (*C++ union*), 599
 SE05x_I2CM_INS_type_t::cfg (*C++ member*), 599
 SE05x_I2CM_INS_type_t::issue (*C++ member*), 599
 SE05x_I2CM_INS_type_t::rd (*C++ member*), 599
 SE05x_I2CM_INS_type_t::sec (*C++ member*), 599
 SE05x_I2CM_INS_type_t::w (*C++ member*), 599
 SE05x_I2CM_readData_t (*C++ class*), 529
 SE05x_I2CM_readData_t::rdBuf (*C++ member*), 530
 SE05x_I2CM_readData_t::rdStatus (*C++ member*), 530
 SE05x_I2CM_readData_t::readLength (*C++ member*), 530
 SE05x_I2CM_securityData_t (*C++ class*), 530
 SE05x_I2CM_securityData_t::keyObject (*C++ member*), 530
 SE05x_I2CM_securityData_t::operation (*C++ member*), 530
 SE05x_I2CM_securityReq_t (*C++ enum*), 567
 SE05x_I2CM_status_t (*C++ enum*), 567
 SE05x_I2CM_structuralIssue_t (*C++ class*), 530
 SE05x_I2CM_structuralIssue_t::issueStatus (*C++ member*), 530
 SE05x_I2CM_TAG_t (*C++ enum*), 568
 SE05x_I2CM_TLV_type_t (*C++ enum*), 568
 SE05x_I2CM_writeData_t (*C++ class*), 531
 SE05x_I2CM_writeData_t::writebuf (*C++ member*), 531
 SE05x_I2CM_writeData_t::writeLength (*C++ member*), 531
 SE05x_I2CM_writeData_t::wrStatus (*C++ member*), 531
 SE05x_INS_t (*C++ enum*), 569
 Se05x_IsInValidRangeOfUID (*C++ function*), 707
 SE05x_KeyID_NONE (*C macro*), 801
 SE05x_KeyID_MFDF_NONE (*C macro*), 801
 SE05x_KeyID_t (*C++ type*), 828
 SE05x_KeyPart_t (*C++ enum*), 570
 SE05x_LockIndicator_t (*C++ enum*), 570
 SE05x_LockState_t (*C++ enum*), 570
 SE05x_Mac_Oper_t (*C++ enum*), 571
 SE05x_MACAlgo_t (*C++ enum*), 571
 SE05x_MacOperation_t (*C++ type*), 828
 SE05x_MaxAttempts_NA (*C macro*), 801
 SE05x_MaxAttempts_t (*C++ type*), 828
 SE05x_MaxAttempts_UNLIMITED (*C macro*), 801

SE05x_MemoryType_t (*C++ enum*), 572
 SE05x_MemTyp_t (*C++ enum*), 572
 SE05x_MoreIndicator_t (*C++ enum*), 572
 SE05x-Origin_t (*C++ enum*), 573
 SE05x_P1_t (*C++ enum*), 573
 SE05x_P2_t (*C++ enum*), 574
 SE05x_PlatformSCPRequest_t (*C++ enum*), 577
 SE05x_RestrictMode_t (*C++ enum*), 577
 SE05x_Result_t (*C++ enum*), 577
 SE05x_RSABitLength_t (*C++ enum*), 578
 SE05x_RSAEncryptionAlgo_t (*C++ enum*), 578
 SE05x_RSAKeyComponent_t (*C++ enum*), 579
 SE05x_RSAKeyFormat_t (*C++ enum*), 579
 SE05x_RSAPubKeyComp_t (*C++ enum*), 580
 SE05x_RSASignAlgo_t (*C++ enum*), 580
 SE05x_RSASignatureAlgo_t (*C++ enum*), 581
 SE05x_SecObjTyp_t (*C++ enum*), 582
 SE05x_SecureObjectType_t (*C++ type*), 828
 SE05x_SetIndicator_t (*C++ enum*), 582
 se05x_sssKeyTypeLenToCurveId (*C++ function*), 707
 SE05x_SW12_t (*C++ enum*), 583
 SE05x_SymmKeyType_t (*C++ enum*), 583
 SE05x_TAG_t (*C++ enum*), 584
 SE05x_TLSPerformPRFType_t (*C++ enum*), 585
 SE05x_TransientIndicator_t (*C++ enum*), 585
 SE05x_TransientType_t (*C++ enum*), 586
 SE05x_Variant_t (*C++ type*), 829
 SE05X_Ver
 command line option, 129
 SE_AuthCtx_t (*C++ class*), 531
 SE_AuthCtx_t::a71chAuthKeys (*C++ member*), 531
 SE_AuthCtx_t::authType (*C++ member*), 531
 SE_AuthCtx_t::ctx (*C++ member*), 531
 SE_AuthCtx_t::data (*C++ member*), 531
 SE_AuthCtx_t::eckey (*C++ member*), 531
 SE_AuthCtx_t::extension (*C++ member*), 531
 SE_AuthCtx_t::idobj (*C++ member*), 532
 SE_AuthCtx_t::scp03 (*C++ member*), 532
 SE_AuthType_t (*C++ enum*), 586
 SE_Connect_Ctx_t (*C++ class*), 532
 SE_Connect_Ctx_t::auth (*C++ member*), 532
 SE_Connect_Ctx_t::connType (*C++ member*), 532
 SE_Connect_Ctx_t::i2cAddress (*C++ member*), 532
 SE_Connect_Ctx_t::portName (*C++ member*), 532
 SE_Connect_Ctx_t::refresh_session (*C++ member*), 532
 SE_Connect_Ctx_t::session_policy (*C++ member*), 532
 SE_Connect_Ctx_t::sizeOfStructure (*C++ member*), 532
 SE_Connect_Ctx_t::skip_select_applet (*C++ member*), 532
 SE_Connect_Ctx_t::tunnelCtx (*C++ member*), 532
 sems_lite_agent_init_context (*C++ function*), 707
 sems_lite_agent_load_package (*C++ function*), 708
 SEMS_LITE_AGENT_PROD_NAME (*C macro*), 802
 SEMS_LITE_AGENT_PROD_NAME_VER_FULL (*C macro*), 802
 sems_lite_agent_session_close (*C++ function*), 708
 sems_lite_agent_session_open (*C++ function*), 709
 SEMS_LITE_AGENT_VER_DEV (*C macro*), 802
 SEMS_LITE_AGENT_VER_MAJOR (*C macro*), 802
 SEMS_LITE_AGENT_VER_MAJOR_MINOR (*C macro*), 802
 SEMS_LITE_AGENT_VER_MAJOR_MINOR_DEV (*C macro*), 803
 SEMS_LITE_AGENT_VER_MINOR (*C macro*), 803
 SEMS_LITE_AGENT_VER_STRING_NUM (*C macro*), 803
 SEMS_LITE_API_VERSION_MAJOR (*C macro*), 803
 SEMS_LITE_API_VERSION_MINOR (*C macro*), 804
 SEMS_LITE_API_VERSION_PATCH (*C macro*), 804
 sems_lite_available_mem_t (*C++ class*), 533
 sems_lite_available_mem_t::availableCODMemory (*C++ member*), 533
 sems_lite_available_mem_t::availableCORMemory (*C++ member*), 533
 sems_lite_available_mem_t::availableIDX (*C++ member*), 533
 sems_lite_available_mem_t::availablePersistentMemory (*C++ member*), 533
 sems_lite_available_mem_t::freePHeapCentralGap (*C++ member*), 533
 sems_lite_available_mem_t::freeTransient (*C++ member*), 533
 sems_lite_check_AppletRecoveryStatus (*C++ function*), 709
 sems_lite_check_AppletUpgradeProgress (*C++ function*), 710
 sems_lite_check_Tear (*C++ function*), 710
 sems_lite_get_AgentVersion (*C++ function*), 711
 sems_lite_get_AppletVersion (*C++ function*), 711
 sems_lite_get_available_mem (*C++ function*), 712
 sems_lite_get_CA_identifier (*C++ function*),

712
 SEMS_LITE_GET_DATA_CMD_BUF_LEN (*C macro*),
 804
 sems_lite_get_ENCIdentifier (*C++ function*),
 713
 sems_lite_get_FIPS_EC_parameter_type
 (*C++ function*), 713
 sems_lite_get_FIPS_info (*C++ function*), 714
 sems_lite_get_Publickey (*C++ function*), 714
 sems_lite_get_SEAppInfo (*C++ function*), 715
 sems_lite_get_SEAppInfoRAW (*C++ function*),
 715
 sems_lite_get_SEPkgInfo (*C++ function*), 716
 sems_lite_get_SEPkgInfoRAW (*C++ function*),
 717
 sems_lite_get_SignatureofLastScript
 (*C++ function*), 717
 sems_lite_get_UUID (*C++ function*), 718
 sems_lite_notear (*C++ enumerator*), 588
 SEMS_LITE_PKG_VERSION_LEN (*C macro*), 804
 sems_lite_PKGInfoList_t (*C++ type*), 829
 sems_lite_recovery_not_started (*C++ enum-
 erator*), 587
 sems_lite_recovery_started (*C++ enum-
 erator*), 587
 sems_lite_recovery_status_t (*C++ enum*),
 587
 sems_lite_SEAppInfoList_t (*C++ class*), 533
 sems_lite_SEAppInfoList_t::AIDLen (*C++
 member*), 533
 sems_lite_SEAppInfoList_t::LifeCycleState
 (*C++ member*), 533
 sems_lite_SEAppInfoList_t::LoadFileAIDLen
 (*C++ member*), 533
 sems_lite_SEAppInfoList_t::LoadFileVersionNum
 (*C++ member*), 533
 sems_lite_SEAppInfoList_t::pAID (*C++
 member*), 533
 sems_lite_SEAppInfoList_t::pLoadFileAID
 (*C++ member*), 534
 sems_lite_SEAppInfoList_t::pLoadFileVersion
 (*C++ member*), 534
 sems_lite_SEAppInfoList_t::pPriviledges
 (*C++ member*), 534
 sems_lite_SEAppInfoList_t::PriviledgesLen
 (*C++ member*), 534
 sems_lite_SEAppInfoList_t::pSecurityDomai
 (*C++ member*), 534
 sems_lite_SEAppInfoList_t::rspBuf (*C++
 member*), 534
 sems_lite_SEAppInfoList_t::rspBufLen
 (*C++ member*), 534
 sems_lite_SEAppInfoList_t::SecurityDomai
 (*C++ member*), 534

sems_lite_status_t (*C++ enum*), 587
 sems_lite_tear (*C++ enumerator*), 588
 sems_lite_tearDown_status_invalid (*C++
 enumerator*), 588
 sems_lite_tearDown_status_t (*C++ enum*),
 588
 sems_lite_upgrade_inProgress (*C++ enum-
 ator*), 588
 sems_lite_upgrade_invalid (*C++ enumerator*),
 588
 sems_lite_upgrade_not_inProgress (*C++
 enumerator*), 588
 sems_lite_upgradeProgress_status_t (*C++
 enum*), 588
 sems_lite_version_check_result_t (*C++
 enum*), 588
 service_identifier_t (*C++ type*), 298, 829
 service_link_t (*C++ class*), 534
 service_link_t::datastore (*C++ member*),
 534
 service_link_t::keystore (*C++ member*), 534
 service_link_t::offset (*C++ member*), 534
 SIMW_INSTALL_INC_DIR
 command line option, 136
 SIMW_INSTALL_SHARE_DIR
 command line option, 136
 SM_SECURE_SCPO3_KEYOBJ (*C++ class*), 535
 SM_SECURE_SCPO3_KEYOBJ::pKeyDek (*C++
 member*), 535
 SM_SECURE_SCPO3_KEYOBJ::pKeyEnc (*C++
 member*), 535
 SM_SECURE_SCPO3_KEYOBJ::pKeyMac (*C++
 member*), 535
 SMCOM
 sss_access_permission_t (*C++ enum*), 589
 sss_aead_context_free (*C macro*), 804
 sss_aead_context_free (*C++ function*), 718
 sss_aead_context_init (*C macro*), 805
 sss_aead_context_init (*C++ function*), 719
 sss_aead_finish (*C macro*), 805
 sss_aead_finish (*C++ function*), 719
 sss_aead_init (*C macro*), 805
 sss_aead_init (*C++ function*), 720
 sss_aead_one_go (*C macro*), 805
 sss_aead_one_go (*C++ function*), 720
 sss_aead_t (*C++ class*), 535
 sss_aead_t::algorithm (*C++ member*), 535
 sss_aead_t::data (*C++ member*), 535
 sss_aead_t::extension (*C++ member*), 535
 sss_aead_t::keyObject (*C++ member*), 535
 sss_aead_t::mode (*C++ member*), 535
 SSS_AEAD_TYPE_IS_SE05X (*C macro*), 806

sss_aead_update (*C macro*), 806
 sss_aead_update (*C++ function*), 721
 sss_aead_update_aad (*C macro*), 806
 sss_aead_update_aad (*C++ function*), 722
 SSS_AES_BLOCK_SIZE (*C macro*), 806
 sss_algorithm_t (*C++ enum*), 589
 SSS_API_VERSION (*C macro*), 806
 sss_asymmetric_context_free (*C macro*), 807
 sss_asymmetric_context_free (*C++ function*),
 722
 sss_asymmetric_context_init (*C macro*), 807
 sss_asymmetric_context_init (*C++ function*),
 723
 sss_asymmetric_decrypt (*C macro*), 807
 sss_asymmetric_decrypt (*C++ function*), 723
 sss_asymmetric_encrypt (*C macro*), 807
 sss_asymmetric_encrypt (*C++ function*), 724
 sss_asymmetric_sign_digest (*C macro*), 808
 sss_asymmetric_sign_digest (*C++ function*),
 724
 sss_asymmetric_t (*C++ class*), 536
 sss_asymmetric_t::algorithm (*C++ member*),
 536
 sss_asymmetric_t::data (*C++ member*), 536
 sss_asymmetric_t::extension (*C++ member*),
 536
 sss_asymmetric_t::keyObject (*C++ member*),
 536
 sss_asymmetric_t::mode (*C++ member*), 536
 sss_asymmetric_t::session (*C++ member*),
 536
 SSS_ASYMMETRIC_TYPE_IS_SE05X (*C macro*), 808
 sss_asymmetric_verify_digest (*C macro*), 808
 sss_asymmetric_verify_digest (*C++ func-
 tion*), 725
 sss_cipher_crypt_ctr (*C macro*), 808
 sss_cipher_crypt_ctr (*C++ function*), 725
 sss_cipher_finish (*C macro*), 808
 sss_cipher_finish (*C++ function*), 726
 sss_cipher_init (*C macro*), 809
 sss_cipher_init (*C++ function*), 727
 sss_cipher_one_go (*C macro*), 809
 sss_cipher_one_go (*C++ function*), 727
 sss_cipher_type_sz (*C++ function*), 728
 sss_cipher_type_t (*C++ enum*), 591
 sss_cipher_update (*C macro*), 809
 sss_cipher_update (*C++ function*), 728
 sss_connect_ctx_t (*C++ class*), 536
 sss_connect_ctx_t::auth (*C++ member*), 536
 sss_connect_ctx_t::data (*C++ member*), 536
 sss_connect_ctx_t::extension (*C++ mem-
 ber*), 536
 sss_connect_ctx_t::session_policy (*C++
 member*), 536

sss_connect_ctx_t::sizeOfStructure (*C++
 member*), 536
 sss_connection_type_t (*C++ enum*), 592
 sss_derive_key_context_free (*C macro*), 809
 sss_derive_key_context_free (*C++ function*),
 729
 sss_derive_key_context_init (*C macro*), 810
 sss_derive_key_context_init (*C++ function*),
 729
 sss_derive_key_dh (*C macro*), 810
 sss_derive_key_dh (*C++ function*), 730
 sss_derive_key_go (*C macro*), 810
 sss_derive_key_go (*C++ function*), 730
 sss_derive_key_one_go (*C++ function*), 731
 sss_derive_key_sobj_one_go (*C++ function*),
 732
 sss_derive_key_t (*C++ class*), 537
 sss_derive_key_t::algorithm (*C++ member*),
 537
 sss_derive_key_t::data (*C++ member*), 537
 sss_derive_key_t::extension (*C++ member*),
 537
 sss_derive_key_t::keyObject (*C++ member*),
 537
 sss_derive_key_t::mode (*C++ member*), 537
 sss_derive_key_t::session (*C++ member*),
 537
 SSS_DERIVE_KEY_TYPE_IS_SE05X (*C macro*), 810
 SSS_DES_BLOCK_SIZE (*C macro*), 810
 SSS_DES_IV_SIZE (*C macro*), 811
 SSS_DES_KEY_SIZE (*C macro*), 811
 sss_digest_context_free (*C macro*), 811
 sss_digest_context_free (*C++ function*), 732
 sss_digest_context_init (*C macro*), 811
 sss_digest_context_init (*C++ function*), 733
 sss_digest_finish (*C macro*), 812
 sss_digest_finish (*C++ function*), 733
 sss_digest_init (*C macro*), 812
 sss_digest_init (*C++ function*), 734
 sss_digest_one_go (*C macro*), 812
 sss_digest_one_go (*C++ function*), 734
 sss_digest_t (*C++ class*), 537
 sss_digest_t::algorithm (*C++ member*), 537
 sss_digest_t::data (*C++ member*), 537
 sss_digest_t::digestFullLen (*C++ member*),
 537
 sss_digest_t::extension (*C++ member*), 537
 sss_digest_t::mode (*C++ member*), 537
 sss_digest_t::session (*C++ member*), 537
 SSS_DIGEST_TYPE_IS_SE05X (*C macro*), 812
 sss_digest_update (*C macro*), 812
 sss_digest_update (*C++ function*), 735
 sss_ecc_point_t (*C++ class*), 538
 sss_ecc_point_t::X (*C++ member*), 538

sss_ecc_point_t::Y (*C++ member*), 538
 sss_eccfp_group_t (*C++ class*), 538
 sss_eccfp_group_t::a (*C++ member*), 538
 sss_eccfp_group_t::b (*C++ member*), 538
 sss_eccfp_group_t::G (*C++ member*), 538
 sss_eccfp_group_t::h (*C++ member*), 538
 sss_eccfp_group_t::n (*C++ member*), 538
 sss_eccfp_group_t::p (*C++ member*), 538
 SSS_ENUM (*C macro*), 813
 sss_key_object_allocate_handle (*C macro*), 813
 sss_key_object_allocate_handle (*C++ function*), 735
 sss_key_object_free (*C macro*), 813
 sss_key_object_free (*C++ function*), 736
 sss_key_object_get_access (*C macro*), 813
 sss_key_object_get_access (*C++ function*), 736
 sss_key_object_get_handle (*C macro*), 814
 sss_key_object_get_handle (*C++ function*), 736
 sss_key_object_get_purpose (*C macro*), 814
 sss_key_object_get_purpose (*C++ function*), 737
 sss_key_object_get_user (*C macro*), 814
 sss_key_object_get_user (*C++ function*), 737
 sss_key_object_init (*C macro*), 814
 sss_key_object_init (*C++ function*), 737
 sss_key_object_mode_t (*C++ enum*), 592
 sss_key_object_set_access (*C macro*), 814
 sss_key_object_set_access (*C++ function*), 738
 sss_key_object_set_eccfp_group (*C macro*), 815
 sss_key_object_set_eccfp_group (*C++ function*), 738
 sss_key_object_set_purpose (*C macro*), 815
 sss_key_object_set_purpose (*C++ function*), 738
 sss_key_object_set_user (*C macro*), 815
 sss_key_object_set_user (*C++ function*), 739
 sss_key_part_t (*C++ enum*), 593
 sss_key_store_allocate (*C macro*), 815
 sss_key_store_allocate (*C++ function*), 739
 sss_key_store_context_free (*C macro*), 816
 sss_key_store_context_free (*C++ function*), 739
 sss_key_store_context_init (*C macro*), 816
 sss_key_store_context_init (*C++ function*), 740
 sss_key_store_erase_key (*C macro*), 816
 sss_key_store_erase_key (*C++ function*), 740
 sss_key_store_freeze_key (*C macro*), 816
 sss_key_store_freeze_key (*C++ function*), 740
 sss_key_store_generate_key (*C macro*), 816
 sss_key_store_generate_key (*C++ function*), 741
 sss_key_store_get_key (*C macro*), 817
 sss_key_store_get_key (*C++ function*), 741
 sss_key_store_load (*C macro*), 817
 sss_key_store_load (*C++ function*), 741
 sss_key_store_open_key (*C macro*), 817
 sss_key_store_open_key (*C++ function*), 741
 sss_key_store_prop_au8_t (*C++ enum*), 593
 sss_key_store_save (*C macro*), 817
 sss_key_store_save (*C++ function*), 742
 sss_key_store_set_key (*C macro*), 818
 sss_key_store_set_key (*C++ function*), 742
 sss_key_store_t (*C++ class*), 539
 sss_key_store_t::data (*C++ member*), 539
 sss_key_store_t::extension (*C++ member*), 539
 sss_key_store_t::session (*C++ member*), 539
 SSS_KEY_STORE_TYPE_IS_SE05X (*C macro*), 818
 sss_mac_context_free (*C macro*), 818
 sss_mac_context_free (*C++ function*), 742
 sss_mac_context_init (*C macro*), 818
 sss_mac_context_init (*C++ function*), 743
 sss_mac_finish (*C macro*), 818
 sss_mac_finish (*C++ function*), 743
 sss_mac_init (*C macro*), 819
 sss_mac_init (*C++ function*), 744
 sss_mac_one_go (*C macro*), 819
 sss_mac_one_go (*C++ function*), 744
 sss_mac_t (*C++ class*), 539
 sss_mac_t::algorithm (*C++ member*), 539
 sss_mac_t::data (*C++ member*), 539
 sss_mac_t::extension (*C++ member*), 539
 sss_mac_t::keyObject (*C++ member*), 539
 sss_mac_t::mode (*C++ member*), 539
 sss_mac_t::session (*C++ member*), 539
 SSS_MAC_TYPE_IS_SE05X (*C macro*), 819
 sss_mac_update (*C macro*), 819
 sss_mac_update (*C++ function*), 745
 sss_mbedtls_associate_ecdhctx (*C++ function*), 745
 sss_mbedtls_associate_keypair (*C++ function*), 746
 sss_mbedtls_associate_pubkey (*C++ function*), 746
 sss_mode_t (*C++ enum*), 593
 sss_object_t (*C++ class*), 540
 sss_object_t::cipherType (*C++ member*), 540
 sss_object_t::data (*C++ member*), 540
 sss_object_t::extension (*C++ member*), 540
 sss_object_t::keyId (*C++ member*), 540
 sss_object_t::keyStore (*C++ member*), 540
 sss_object_t::objectType (*C++ member*), 540

sss_object_type_is_se05x (*C macro*), 820
sss_policy_asym_key_u (*C++ class*), 540
sss_policy_asym_key_u::can_Attest (*C++ member*), 540
sss_policy_asym_key_u::can_Decrypt (*C++ member*), 540
sss_policy_asym_key_u::can_Encrypt (*C++ member*), 540
sss_policy_asym_key_u::can_Gen (*C++ member*), 540
sss_policy_asym_key_u::can_Import_Export (*C++ member*), 540
sss_policy_asym_key_u::can_KA (*C++ member*), 540
sss_policy_asym_key_u::can_KD (*C++ member*), 541
sss_policy_asym_key_u::can_Read (*C++ member*), 541
sss_policy_asym_key_u::can_Sign (*C++ member*), 541
sss_policy_asym_key_u::can_Verify (*C++ member*), 541
sss_policy_asym_key_u::can_Wrap (*C++ member*), 541
sss_policy_asym_key_u::can_Write (*C++ member*), 541
sss_policy_asym_key_u::forbid_Derived_Output (*C++ member*), 541
sss_policy_common_pcr_value_u (*C++ class*), 541
sss_policy_common_pcr_value_u::pcrExpectedValue (*C++ member*), 541
sss_policy_common_pcr_value_u::pcrObjId (*C++ member*), 541
sss_policy_common_u (*C++ class*), 542
sss_policy_common_u::can_Delete (*C++ member*), 542
sss_policy_common_u::forbid_All (*C++ member*), 542
sss_policy_common_u::req_Sm (*C++ member*), 542
sss_policy_counter_u (*C++ class*), 542
sss_policy_counter_u::can_Read (*C++ member*), 542
sss_policy_counter_u::can_Write (*C++ member*), 542
sss_policy_file_u (*C++ class*), 542
sss_policy_file_u::can_Read (*C++ member*), 543
sss_policy_file_u::can_Write (*C++ member*), 543
sss_policy_pcr_u (*C++ class*), 543
sss_policy_pcr_u::can_Read (*C++ member*), 543
sss_policy_pcr_u::can_Write (*C++ member*), 543
sss_policy_pcr_u::can_Write (*C++ member*), 543
sss_policy_session_u (*C++ class*), 543
sss_policy_session_u::allowRefresh (*C++ member*), 543
sss_policy_session_u::has_MaxDurationOfSession_sec (*C++ member*), 543
sss_policy_session_u::has_MaxOperationsInSession (*C++ member*), 543
sss_policy_session_u::maxDurationOfSession_sec (*C++ member*), 543
sss_policy_session_u::maxOperationsInSession (*C++ member*), 543
sss_policy_sym_key_u (*C++ class*), 544
sss_policy_sym_key_u::allow_kdf_ext_rnd (*C++ member*), 544
sss_policy_sym_key_u::can_Decrypt (*C++ member*), 544
sss_policy_sym_key_u::can_Desfire_Auth (*C++ member*), 544
sss_policy_sym_key_u::can_Desfire_Dump (*C++ member*), 544
sss_policy_sym_key_u::can_Encrypt (*C++ member*), 544
sss_policy_sym_key_u::can_Gen (*C++ member*), 544
sss_policy_sym_key_u::can_Import_Export (*C++ member*), 544
sss_policy_sym_key_u::can_Sign (*C++ member*), 544
sss_policy_sym_key_u::can_Verify (*C++ member*), 544
sss_policy_sym_key_u::can_Wrap (*C++ member*), 544
sss_policy_sym_key_u::can_Write (*C++ member*), 544
sss_policy_sym_key_u::forbid_Derived_Output (*C++ member*), 544
sss_policy_t (*C++ class*), 545
sss_policy_t::nPolicies (*C++ member*), 545
sss_policy_t::policies (*C++ member*), 545
sss_policy_type_u (*C++ enum*), 594
sss_policy_u (*C++ class*), 545
sss_policy_u::asymmkey (*C++ member*), 545
sss_policy_u::auth_obj_id (*C++ member*), 545
sss_policy_u::common (*C++ member*), 545
sss_policy_u::common_pcr_value (*C++ member*), 545
sss_policy_u::counter (*C++ member*), 545
sss_policy_u::file (*C++ member*), 545
sss_policy_u::pcr (*C++ member*), 545

sss_policy_u::pin (*C++ member*), 545
 sss_policy_u::policy (*C++ member*), 545
 sss_policy_u::session (*C++ member*), 545
 sss_policy_u::symmkey (*C++ member*), 545
 sss_policy_u::type (*C++ member*), 545
 sss_policy_userid_u (*C++ class*), 546
 sss_policy_userid_u::can_Write (*C++ member*), 546
 sss_rng_context_free (*C macro*), 820
 sss_rng_context_free (*C++ function*), 747
 sss_rng_context_init (*C macro*), 820
 sss_rng_context_init (*C++ function*), 747
 sss_rng_context_t (*C++ class*), 546
 sss_rng_context_t::context (*C++ member*), 546
 sss_rng_context_t::data (*C++ member*), 546
 sss_rng_context_t::session (*C++ member*), 546
 SSS_RNG_CONTEXT_TYPE_IS_SE05X (*C macro*), 820
 sss_rng_get_random (*C macro*), 820
 sss_rng_get_random (*C++ function*), 747
 sss_se05x_sesion_prop_a8t (*C++ enum*), 595
 sss_se05x_sesion_prop_u32t (*C++ enum*), 595
 sss_se05x_aead_context_free (*C++ function*), 748
 sss_se05x_aead_context_init (*C++ function*), 748
 sss_se05x_aead_finish (*C++ function*), 749
 sss_se05x_aead_init (*C++ function*), 749
 sss_se05x_aead_one_go (*C++ function*), 750
 sss_se05x_aead_t (*C++ class*), 546
 sss_se05x_aead_t::algorithm (*C++ member*), 547
 sss_se05x_aead_t::cache_data (*C++ member*), 547
 sss_se05x_aead_t::cache_data_len (*C++ member*), 547
 sss_se05x_aead_t::cryptoObjectID (*C++ member*), 547
 sss_se05x_aead_t::keyObject (*C++ member*), 547
 sss_se05x_aead_t::mode (*C++ member*), 547
 sss_se05x_aead_t::session (*C++ member*), 547
 sss_se05x_aead_update (*C++ function*), 751
 sss_se05x_aead_update_aad (*C++ function*), 751
 sss_se05x_asymmetric_context_free (*C++ function*), 752
 sss_se05x_asymmetric_context_init (*C++ function*), 752
 sss_se05x_asymmetric_decrypt (*C++ function*), 753
 sss_se05x_asymmetric_encrypt (*C++ function*), 753
 sss_se05x_asymmetric_sign (*C++ function*), 754
 sss_se05x_asymmetric_sign_digest (*C++ function*), 754
 sss_se05x_asymmetric_t (*C++ class*), 547
 sss_se05x_asymmetric_t::algorithm (*C++ member*), 547
 sss_se05x_asymmetric_t::keyObject (*C++ member*), 547
 sss_se05x_asymmetric_t::mode (*C++ member*), 547
 sss_se05x_asymmetric_t::session (*C++ member*), 547
 sss_se05x_asymmetric_verify (*C++ function*), 755
 sss_se05x_asymmetric_verify_digest (*C++ function*), 755
 sss_se05x_attst_comp_data_t (*C++ class*), 548
 sss_se05x_attst_comp_data_t::attribute (*C++ member*), 548
 sss_se05x_attst_comp_data_t::attributeLen (*C++ member*), 548
 sss_se05x_attst_comp_data_t::chipId (*C++ member*), 548
 sss_se05x_attst_comp_data_t::chipIdLen (*C++ member*), 548
 sss_se05x_attst_comp_data_t::outrandom (*C++ member*), 548
 sss_se05x_attst_comp_data_t::outrandomLen (*C++ member*), 548
 sss_se05x_attst_comp_data_t::signature (*C++ member*), 548
 sss_se05x_attst_comp_data_t::signatureLen (*C++ member*), 548
 sss_se05x_attst_comp_data_t::timeStamp (*C++ member*), 548
 sss_se05x_attst_comp_data_t::timeStampLen (*C++ member*), 548
 sss_se05x_attst_data_t (*C++ class*), 549
 sss_se05x_attst_data_t::data (*C++ member*), 549
 sss_se05x_attst_data_t::valid_number (*C++ member*), 549
 sss_se05x_cipher_crypt_ctr (*C++ function*), 756
 sss_se05x_cipher_finish (*C++ function*), 756
 sss_se05x_cipher_init (*C++ function*), 757
 sss_se05x_cipher_one_go (*C++ function*), 757
 sss_se05x_cipher_update (*C++ function*), 758
 sss_se05x_derive_key_context_free (*C++ function*), 758

sss_se05x_derive_key_context_init (C++ function), 759
 sss_se05x_derive_key_dh (C++ function), 759
 sss_se05x_derive_key_go (C++ function), 760
 sss_se05x_derive_key_one_go (C++ function), 761
 sss_se05x_derive_key_sobj_one_go (C++ function), 761
 sss_se05x_derive_key_t (C++ class), 549
 sss_se05x_derive_key_t::algorithm (C++ member), 549
 sss_se05x_derive_key_t::keyObject (C++ member), 549
 sss_se05x_derive_key_t::mode (C++ member), 549
 sss_se05x_derive_key_t::session (C++ member), 549
 sss_se05x_digest_context_free (C++ function), 762
 sss_se05x_digest_context_init (C++ function), 762
 sss_se05x_digest_finish (C++ function), 763
 sss_se05x_digest_init (C++ function), 763
 sss_se05x_digest_one_go (C++ function), 764
 sss_se05x_digest_t (C++ class), 549
 sss_se05x_digest_t::algorithm (C++ member), 550
 sss_se05x_digest_t::cryptoObjectId (C++ member), 550
 sss_se05x_digest_t::digestFullLen (C++ member), 550
 sss_se05x_digest_t::mode (C++ member), 550
 sss_se05x_digest_t::session (C++ member), 550
 sss_se05x_digest_update (C++ function), 764
 sss_se05x_key_object_allocate_handle (C++ function), 765
 sss_se05x_key_object_free (C++ function), 765
 sss_se05x_key_object_get_access (C++ function), 766
 sss_se05x_key_object_get_handle (C++ function), 766
 sss_se05x_key_object_get_purpose (C++ function), 766
 sss_se05x_key_object_get_user (C++ function), 767
 sss_se05x_key_object_init (C++ function), 767
 sss_se05x_key_object_set_access (C++ function), 767
 sss_se05x_key_object_set_eccgfp_group (C++ function), 768
 sss_se05x_key_object_set_purpose (C++ function), 768
 sss_se05x_key_object_set_user (C++ function), 768
 sss_se05x_key_store_allocate (C++ function), 769
 sss_se05x_key_store_context_free (C++ function), 769
 sss_se05x_key_store_context_init (C++ function), 769
 sss_se05x_key_store_create_curve (C++ function), 770
 sss_se05x_key_store_erase_key (C++ function), 770
 sss_se05x_key_store_export_key (C++ function), 770
 sss_se05x_key_store_freeze_key (C++ function), 770
 sss_se05x_key_store_generate_key (C++ function), 771
 sss_se05x_key_store_get_key (C++ function), 771
 sss_se05x_key_store_get_key_attst (C++ function), 771
 sss_se05x_key_store_import_key (C++ function), 772
 sss_se05x_key_store_load (C++ function), 772
 sss_se05x_key_store_open_key (C++ function), 772
 sss_se05x_key_store_save (C++ function), 773
 sss_se05x_key_store_set_key (C++ function), 773
 sss_se05x_key_store_t (C++ class), 550
 sss_se05x_key_store_t::kekKey (C++ member), 550
 sss_se05x_key_store_t::session (C++ member), 550
 sss_se05x_mac_context_free (C++ function), 774
 sss_se05x_mac_context_init (C++ function), 774
 sss_se05x_mac_finish (C++ function), 775
 sss_se05x_mac_init (C++ function), 775
 sss_se05x_mac_one_go (C++ function), 775
 sss_se05x_mac_t (C++ class), 550
 sss_se05x_mac_t::algorithm (C++ member), 551
 sss_se05x_mac_t::cryptoObjectId (C++ member), 551
 sss_se05x_mac_t::keyObject (C++ member), 551
 sss_se05x_mac_t::mode (C++ member), 551
 sss_se05x_mac_t::session (C++ member), 551
 sss_se05x_mac_update (C++ function), 776
 sss_se05x_mac_validate_one_go (C++ function), 776

tion), 776
`sss_se05x_object_t` (*C++ class*), 551
`sss_se05x_object_t::cipherType` (*C++ member*), 551
`sss_se05x_object_t::curve_id` (*C++ member*), 551
`sss_se05x_object_t::isPersistant` (*C++ member*), 551
`sss_se05x_object_t::keyId` (*C++ member*), 551
`sss_se05x_object_t::keyStore` (*C++ member*), 551
`sss_se05x_object_t::objectType` (*C++ member*), 551
`sss_se05x_refresh_session` (*C++ function*), 777
`sss_se05x_rng_context_free` (*C++ function*), 777
`sss_se05x_rng_context_init` (*C++ function*), 777
`sss_se05x_rng_context_t` (*C++ class*), 552
`sss_se05x_rng_context_t::session` (*C++ member*), 552
`sss_se05x_rng_get_random` (*C++ function*), 778
`sss_se05x_session_close` (*C++ function*), 778
`sss_se05x_session_create` (*C++ function*), 778
`sss_se05x_session_delete` (*C++ function*), 779
`sss_se05x_session_open` (*C++ function*), 779
`sss_se05x_session_prop_get_au8` (*C++ function*), 780
`sss_se05x_session_prop_get_u32` (*C++ function*), 780
`sss_se05x_session_t` (*C++ class*), 552
`sss_se05x_session_t::ptun_ctx` (*C++ member*), 552
`sss_se05x_session_t::s_ctx` (*C++ member*), 552
`sss_se05x_session_t::subsystem` (*C++ member*), 552
`sss_se05x_set_feature` (*C++ function*), 781
`sss_se05x_symmetric_context_free` (*C++ function*), 781
`sss_se05x_symmetric_context_init` (*C++ function*), 781
`sss_se05x_symmetric_t` (*C++ class*), 553
`sss_se05x_symmetric_t::algorithm` (*C++ member*), 553
`sss_se05x_symmetric_t::cache_data` (*C++ member*), 553
`sss_se05x_symmetric_t::cache_data_len` (*C++ member*), 553
`sss_se05x_symmetric_t::cryptoObjectId` (*C++ member*), 553
`sss_se05x_symmetric_t::keyObject` (*C++ member*), 553
`sss_se05x_symmetric_t::mode` (*C++ member*), 553
`sss_se05x_symmetric_t::session` (*C++ member*), 553
`sss_se05x_symmetric_t::se05x_session` (*C++ member*), 553
`sss_se05x_tunnel` (*C++ function*), 782
`sss_se05x_tunnel_context_free` (*C++ function*), 782
`sss_se05x_tunnel_context_init` (*C++ function*), 782
`sss_se05x_tunnel_context_t` (*C++ class*), 553
`sss_se05x_tunnel_context_t::tunnelDest` (*C++ member*), 553
`sss_session_close` (*C macro*), 821
`sss_session_close` (*C++ function*), 783
`sss_session_create` (*C macro*), 821
`sss_session_create` (*C++ function*), 783
`sss_session_delete` (*C macro*), 821
`sss_session_delete` (*C++ function*), 784
`sss_session_open` (*C macro*), 821
`sss_session_open` (*C++ function*), 784
`sss_session_prop_au8_t` (*C++ enum*), 595
`sss_session_prop_get_au8` (*C macro*), 822
`sss_session_prop_get_au8` (*C++ function*), 784
`sss_session_prop_get_u32` (*C macro*), 822
`sss_session_prop_get_u32` (*C++ function*), 785
`sss_session_prop_u32_t` (*C++ enum*), 596
`sss_session_t` (*C++ class*), 554
`sss_session_t::data` (*C++ member*), 554
`sss_session_t::extension` (*C++ member*), 554
`sss_session_t::subsystem` (*C++ member*), 554
`SSS_SESSION_TYPE_IS_SE05X` (*C macro*), 822
`sss_status_sz` (*C++ function*), 785
`sss_status_t` (*C++ enum*), 596
`SSS_SUBSYSTEM_TYPE_IS_SE05X` (*C macro*), 822
`sss_symmetric_context_free` (*C macro*), 822
`sss_symmetric_context_free` (*C++ function*), 786
`sss_symmetric_context_init` (*C macro*), 823
`sss_symmetric_context_init` (*C++ function*), 786
`sss_symmetric_t` (*C++ class*), 554
`sss_symmetric_t::algorithm` (*C++ member*), 554
`sss_symmetric_t::data` (*C++ member*), 554
`sss_symmetric_t::extension` (*C++ member*), 554
`sss_symmetric_t::keyObject` (*C++ member*), 554
`sss_symmetric_t::mode` (*C++ member*), 554
`sss_symmetric_t::session` (*C++ member*), 554
`SSS_SYMMETRIC_TYPE_IS_SE05X` (*C macro*), 823

sss_tunnel (*C macro*), 823
sss_tunnel (*C++ function*), 787
sss_tunnel_context_free (*C macro*), 823
sss_tunnel_context_free (*C++ function*), 787
sss_tunnel_context_init (*C macro*), 824
sss_tunnel_context_init (*C++ function*), 787
SSS_TUNNEL_CONTEXT_TYPE_IS_SE05X (*C macro*), 824
sss_tunnel_dest_t (*C++ enum*), 597
sss_tunnel_t (*C++ class*), 555
sss_tunnel_t::data (*C++ member*), 555
sss_tunnel_t::extension (*C++ member*), 555
sss_tunnel_t::session (*C++ member*), 555
sss_tunnel_t::tunnelType (*C++ member*), 555
SSS_TUNNEL_TYPE_IS_SE05X (*C macro*), 824
sss_type_t (*C++ enum*), 597
SSSFTR_SE05X_AES
 command line option, 133
SSSFTR_SE05X_AuthECKey
 command line option, 133
SSSFTR_SE05X_AuthSession
 command line option, 133
SSSFTR_SE05X_CREATE_DELETE_CRYPTOOBJ
 command line option, 133
SSSFTR_SE05X_ECC
 command line option, 133
SSSFTR_SE05X_KEY_GET
 command line option, 133
SSSFTR_SE05X_KEY_SET
 command line option, 133
SSSFTR_SE05X_RSA
 command line option, 133
SSSFTR_SW_AES
 command line option, 133
SSSFTR_SW_ECC
 command line option, 133
SSSFTR_SW_KEY_GET
 command line option, 133
SSSFTR_SW_KEY_SET
 command line option, 133
SSSFTR_SW_RSA
 command line option, 133
SSSFTR_SW_TESTCOUNTERPART
 command line option, 134
sub_component_metaData_t (*C++ class*), 555
sub_component_metaData_t::aidLen (*C++ member*), 555
sub_component_metaData_t::minimumPreviousVersion (*C++ member*), 555
sub_component_metaData_t::nameLen (*C++ member*), 555
sub_component_metaData_t::pAid (*C++ member*), 555

sub_component_metaData_t::pName (*C++ member*), 555
sub_component_metaData_t::pNextSubComponentMetaData (*C++ member*), 555
sub_component_metaData_t::version (*C++ member*), 555, 788

T

tlvHeader_t (*C++ class*), 556
tlvHeader_t::hdr (*C++ member*), 556

V

version (*C++ member*), 301

W

WithCodeCoverage
 command line option, 136
WithExtCustomerCode
 command line option, 136
WithNXPNFCRdLib
 command line option, 135
WithOPCUA_open62541
 command line option, 135
WithSharedLIB
 command line option, 135