

# Variable Importance Plots—An Introduction to the vip Package

by Brandon M. Greenwell, Bradley C. Boehmke

**Abstract** In the era of “big data”, it is becoming more of a challenge to not only build state-of-the-art predictive models, but also gain an understanding of what’s really going on in the data. For example, it is often of interest to know which, if any, of the predictors in a fitted model are relatively influential on the predicted outcome. Some modern algorithms—like random forests (RFs) and gradient boosted decision trees (GBMs)—have a natural way of quantifying the importance or relative influence of each feature. Other algorithms—like naive Bayes classifiers and support vector machines—are not capable of doing so and *model-agnostic approaches* are generally used to measure each predictor’s importance. Enter **vip**, an R package for constructing variable importance scores/plots for many types of supervised learning algorithms using model-specific and novel model-agnostic approaches. We’ll also discuss a novel way to display both feature importance and feature effects together using *sparklines*, a very small line chart conveying the general shape or variation in some feature that can be directly embedded in text or tables.

## TODO

- Discuss drawbacks of various methods in a single section. Maybe even show some examples? (e.g., high dimensional feature space, correlated features, etc.). Discuss ways to improve each procedure (e.g., permuting within groups or using ALE/stratx plots instead and discuss plans to incorporate these into the package.)
- Shapley section: Aggregating local measures (like Shapley explanations) has become popular (cite H2O book).

## Introduction

Too often machine learning (ML) models are summarized using a single metric (e.g., cross-validated accuracy) and then put into production. Although we often care about the predictions from these models, it is becoming routine to also understand the predictions! Understanding how an ML model makes its predictions helps build trust in the model and is the fundamental idea of the emerging field of *interpretable machine learning* (IML).<sup>1</sup> For an in-depth discussion on IML, see [Molnar \(2019b\)](#). In this paper, we focus on *global methods* for quantifying the importance of features in an ML model; that is, methods that help us understand the importance of each feature across the entire training set.<sup>2</sup> Computing variable importance (VI) and communicating them through variable importance plots (VIPs) is a fundamental component of IML and is the main topic of this paper. While many of the procedures discussed in this paper apply to any model that makes predictions, it should be noted these methods heavily depend on the accuracy and usefulness of the fitted model; hence, unimportant features may appear relatively important (albeit not predictive) in comparison to the other included features. For this reason, we stress the usefulness of understanding the scale on which VI scores are calculated and take that into account when assessing the importance of each feature and communicating the results to others.

VI scores and VIPs can be constructed for general ML models using a number of packages. The **iml** package ([Molnar, 2019a](#)) provides the `FeatureImp()` function which computes feature importance for general prediction models using the permutation approach (discussed later). It is written in **R6** ([Chang, 2019](#)) and allows the user to specify a generic loss function or select one from a pre-defined list (e.g., `loss = "mse"` for mean squared error). It also allows the user to specify whether importance is measured as the difference or as the ratio of the original model error and the model error after permutation. The user can also specify the number of repetitions used when permuting each feature to help stabilize the variability in the procedure.

The **ingredients** package ([Biecek et al., 2019](#)) also provides permutation-based VI scores through the `feature_importance()` function. (Note that this function recently replaced the now deprecated **DALEX** function `variable_importance()` ([Biecek, 2019](#)).) Similar to `iml::FeatureImp()`, this function allows the user to specify a loss function and how the importance scores are computed (e.g., using the

<sup>1</sup>Although “interpretability” is difficult to formally define in the context of ML, we follow [Doshi-Velez and Kim \(2017\)](#) and describe “interpretable” as the “...ability to explain or to present in understandable terms to a human.”

<sup>2</sup>In this context “importance” can be measured in a number of different ways. In general, we can describe it as *the extent to which a feature has a “meaningful” impact on the predicted outcome*.

difference or ratio). It also provides an option to sample the training data before shuffling the data to compute importance (the default is to use `n_sample = 1000`). This can help speed up computation.

The **mmpf** package (Jones, 2018) also provides permutation-based VI scores via the `mmpf::permutationImportance()` function. Similar to the **iml** and **ingredients** implementation, this function is flexible enough to be applied to any class of ML models in R.

The **varImp** package (Probst, 2019) extends the permutation-based method for RFs in packages **party** (Hothorn et al., 2019) and **ranger** (Wright et al., 2020) to arbitrary measures from the **measures** package (?). Additionally, the functions in **varImp** include the option of using the conditional approach described in Strobl et al. (2008) which is more reliable in the presence of correlated features. A number of other RF-specific VI packages exist on CRAN which include, but are not limited to, the following: **vita** (Celik, 2015), **rfVarImpOOB** (Loecher, 2019), **randomForestExplainer** (Paluszynska et al., 2019), and **tree.interpreter** (Sun, 2019).<sup>3</sup>

The **caret** package (Kuhn, 2020) includes a general `varImp()` function for computing model-specific and filter-based VI scores. Filter-based approaches, which are described in Kuhn and Johnson (2013), do not make use of the fitted model to measure VI. They also do not take into account the other predictors in the model. For regression problems, a popular filter-based approach to measuring the VI of a numeric predictor  $x$  is to first fit a flexible nonparametric model between  $x$  and the target  $Y$ ; for example, the locally-weighted polynomial regression (LOWESS) method developed by Cleveland (1979). From this fit, a pseudo- $R^2$  measure can be obtained from the resulting residuals and used as a measure of VI. For categorical predictors, a different method based on standard statistical tests (e.g.,  $t$ -tests and ANOVAs) can be employed; see Kuhn and Johnson (2013) for details. For classification problems, an area under the ROC curve (AUC) statistic can be used to quantify predictor importance. The AUC statistic is computed by using the predictor  $x$  as input to the ROC curve. If  $x$  can reasonably separate the classes of  $Y$ , that is a clear indicator that  $x$  is an important predictor (in terms of class separation) and this is captured in the corresponding AUC statistic. For problems with more than two classes, extensions of the ROC curve or a one-vs-all approach can be used.

If you use the **mlr** interface for fitting ML models (Bischl et al., 2020), then you can use the `getFeatureImportance()` function to extract model-specific VI scores from various tree-based models (e.g., RFs and GBMs). Unlike **caret**, the model needs to be fit via the **mlr** interface; for instance, you cannot use `getFeatureImportance()` on a **gbm** model (Greenwell et al., 2019a) unless it was fit using **mlr**.

While the **iml** and **DALEX** packages provide model-agnostic approaches to computing VI, **caret**, and to some extent **mlr**, provide model-specific approaches (e.g., using the absolute value of the  $t$ -statistic for linear models) as well less accurate filter-based approaches. Furthermore, each package has a completely different interface (e.g., **iml** is written in R6). The **vip** package (Greenwell et al., 2019b) strives to provide a consistent interface to both model-specific and model-agnostic approaches to feature importance that is simple to use. The three most important functions exported by **vip** are described below:

- `vi()` computes VI scores using model-specific or model-agnostic approaches (the results are always returned as a tibble (Müller and Wickham, 2019));
- `vip()` constructs VIPs using model-specific or model-agnostic approaches with **ggplot2**-style graphics (Wickham et al., 2019);
- `add_sparklines()` adds a novel sparkline representation of feature effects (e.g., *partial dependence plots*) to any VI table produced by `vi()`.

There's also a function called `vint()` (for variable interactions) but is experimental and will not be discussed here; the interested reader is pointed to Greenwell et al. (2018). Note that `vi()` is actually a wrapper around four workhorse functions, `vi_model()`, `vi_ice()`, `vi_pdp()`, and `vi_permute()`, that compute various types of VI scores. The first computes model-specific VI scores, while the latter three produce model-agnostic ones. The workhorse function that actually gets called is controlled by the `method` argument in `vi()`; the default is `method = "model"` which corresponds to model-specific VI (see `?vip::vi` for details and links to further documentation).

## Constructing VIPs in R

We'll illustrate major concepts using the Friedman 1 benchmark problem described in Friedman (1991) and Breiman (1996):

$$Y_i = 10 \sin(\pi X_{1i} X_{2i}) + 20 (X_{3i} - 0.5)^2 + 10 X_{4i} + 5 X_{5i} + \epsilon_i, \quad i = 1, 2, \dots, n, \quad (1)$$

<sup>3</sup>These packages were discovered using **pkgsearch**'s `ps()` function (?) with the key phrases "variable importance" and "feature importance".

where  $\epsilon_i \stackrel{iid}{\sim} N(0, \sigma^2)$ . Data from this model can be generated using the `vip::gen_friedman()`. By default, the features consist of 10 independent variables uniformly distributed on the interval  $[0, 1]$ ; however, only 5 out of these 10 are actually used in the true model. The code chunk below simulates 500 observations from the model in Equation~(1) with  $\sigma = 1$ ; see `?vip::gen_friedman` for details.

```
trn <- vip::gen_friedman(500, sigma = 1, seed = 101) # simulate training data
tibble::as_tibble(trn) # inspect output

#> # A tibble: 500 x 11
#>   y      x1      x2      x3      x4      x5      x6      x7      x8      x9      x10
#>   <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl> <dbl>
#> 1 14.9  0.372  0.406  0.102  0.322  0.693  0.758  0.518  0.530  0.878  0.763
#> 2 15.3  0.0438 0.602  0.602  0.999  0.776  0.533  0.509  0.487  0.118  0.176
#> 3 15.1  0.710  0.362  0.254  0.548  0.0180 0.765  0.715  0.844  0.334  0.118
#> 4 10.7  0.658  0.291  0.542  0.327  0.230  0.301  0.177  0.346  0.474  0.283
#> 5 17.6  0.250  0.794  0.383  0.947  0.462  0.00487 0.270  0.114  0.489  0.311
#> 6 18.3  0.300  0.701  0.992  0.386  0.666  0.198  0.924  0.775  0.736  0.974
#> 7 14.6  0.585  0.365  0.283  0.488  0.845  0.466  0.715  0.202  0.905  0.640
#> 8 17.0  0.333  0.552  0.858  0.509  0.697  0.388  0.260  0.355  0.517  0.165
#> 9  8.54 0.622  0.118  0.490  0.390  0.468  0.360  0.572  0.891  0.682  0.717
#> 10 15.0 0.546  0.150  0.476  0.706  0.829  0.373  0.192  0.873  0.456  0.694
#> # ... with 490 more rows
```

From Equation~(1), it should be clear that features  $X_1$ – $X_5$  are the most important! (The others don't influence  $Y$  at all.) Also, based on the form of the model, we'd expect  $X_4$  to be the most important feature, probably followed by  $X_1$  and  $X_2$  (both comparably important), with  $X_5$  probably less important. The influence of  $X_3$  is harder to determine due to its quadratic nature, but it seems likely that this nonlinearity will suppress the variable's influence over its observed range (i.e., 0–1).

## Model-specific VI

Some machine learning algorithms have their own way of quantifying the importance of each feature. We describe some of these in the subsections that follow. The issue with model-specific VI scores is that they are not necessarily comparable across different types of models. For example, directly comparing the impurity-based VI scores from tree-based models to the  $t$ -statistic from linear models.

### Decision trees and tree ensembles

Decision trees probably offer the most natural model-specific approach to quantifying the importance of each feature. In a binary decision tree, at each node  $t$ , a single predictor is used to partition the data into two homogeneous groups. The chosen predictor is the one that maximizes some measure of improvement  $i^t$ . The relative importance of predictor  $X$  is the sum of the squared improvements over all internal nodes of the tree for which  $X$  was chosen as the partitioning variable; see [Breiman et al. \(1984\)](#) for details. This idea also extends to ensembles of decision trees, such as RFs and GBMs. In ensembles, the improvement score for each predictor is averaged across all the trees in the ensemble. Fortunately, due to the stabilizing effect of averaging, the improvement-based VI metric is often more reliable in large ensembles; see [Hastie et al. \(2009, p. 368\)](#). RFs offer an additional method for computing VI scores. The idea is to use the leftover out-of-bag (OOB) data to construct validation-set errors for each tree. Then, each predictor is randomly shuffled in the OOB data and the error is computed again. The idea is that if variable  $X$  is important, then the validation error will go up when  $X$  is perturbed in the OOB data. The difference in the two errors is recorded for the OOB data then averaged across all trees in the forest. Later on, we'll discuss a more general permutation method that can be applied to any supervised learning model.

To illustrate, we fit a CART-like regression tree, RF, and GBM to the simulated training data. (Note: there are a number of different packages available for fitting these types of models, we just picked popular implementations for illustration.)

```
# Load required packages
library(rpart)      # for fitting CART-like decision trees
library(randomForest) # for fitting RFs
library(xgboost)    # for fitting GBMs

# Fit a single regression tree
```

```

tree <- rpart(y ~ ., data = trn)

# Fit an RF
set.seed(101)
rfo <- randomForest(y ~ ., data = trn, importance = TRUE)

# Fit a GBM
set.seed(102)
bst <- xgboost(
  data = data.matrix(subset(trn, select = -y)),
  label = trn$y,
  objective = "reg:linear",
  nrounds = 100,
  max_depth = 5,
  eta = 0.3,
  verbose = 0 # suppress printing
)


```

Each of the above packages include the ability to compute VI scores for all the features in the model; however, the implementation is rather package specific, as shown in the code chunk below. The results are displayed in Figure 1 (the code to reproduce these plots has been omitted but can be made available upon request).

```

# Extract VI scores from each model
vi_tree <- tree$variable.importance
vi_rfo <- rfo$variable.importance
vi_bst <- xgb.importance(model = bst)

```

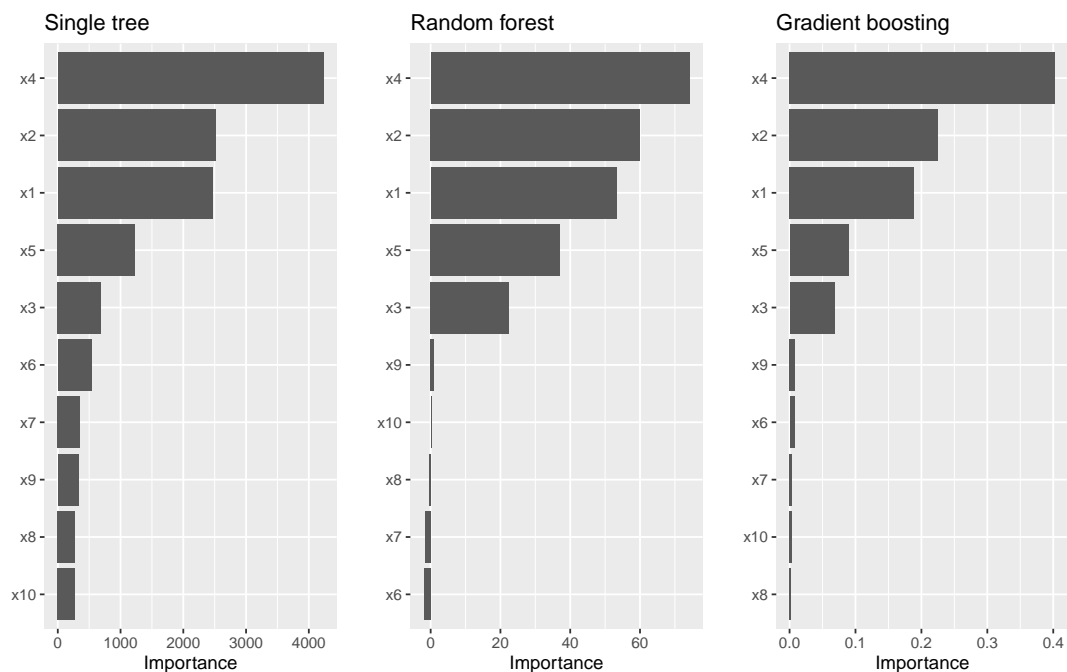

**Figure 1:** Model-specific VIPs for the three different tree-based models fit to the simulated Friedman data.

As we would expect, all three methods rank the variables x1–x5 as more important than the others. While this is good news, it is unfortunate that we have to remember the different functions and ways of extracting and plotting VI scores from various model fitting functions. This is one place where **vip** can help...one function to rule them all! Once **vip** is loaded, we can use `vi()` to extract a tibble of VI scores.

```

# Load required packages
library(vip)

# Compute model-specific VI scores
vi(tree) # CART-like decision tree

```

```
#> # A tibble: 10 x 2
#>   Variable Importance
#>   <chr>          <dbl>
#> 1 x4            4234.
#> 2 x2            2513.
#> 3 x1            2461.
#> 4 x5            1230.
#> 5 x3             688.
#> 6 x6             533.
#> 7 x7             357.
#> 8 x9             331.
#> 9 x8             276.
#> 10 x10           275.
```

```
vi(rfo) # RF
```

```
#> # A tibble: 10 x 2
#>   Variable Importance
#>   <chr>          <dbl>
#> 1 x4             74.2
#> 2 x2             59.9
#> 3 x1             53.3
#> 4 x5             37.1
#> 5 x3             22.5
#> 6 x9              1.05
#> 7 x10            0.254
#> 8 x8            -0.408
#> 9 x7            -1.56
#> 10 x6            -2.00
```

```
vi(bst) # GBM
```

```
#> # A tibble: 10 x 2
#>   Variable Importance
#>   <chr>          <dbl>
#> 1 x4             0.403
#> 2 x2             0.225
#> 3 x1             0.189
#> 4 x5             0.0894
#> 5 x3             0.0682
#> 6 x9             0.00802
#> 7 x6             0.00746
#> 8 x7             0.00400
#> 9 x10            0.00377
#> 10 x8            0.00262
```

Notice how the `vi()` function always returns a tibble<sup>4</sup> with two columns: Variable and Importance (the exceptions are coefficient-based models which also include a Sign column giving the sign of the corresponding coefficient and permutation importance involving multiple Monte Carlo simulations, but more on that later). Also, by default, `vi()` always orders the VI scores from highest to lowest; this, among other options, can be controlled by the user (see `?vip::vi` for details). Plotting VI scores with `vip()` is just as straightforward. For example, the following code can be used to reproduce Figure 1.

```
p1 <- vip(tree) + ggtitle("Single tree")
p2 <- vip(rfo) + ggtitle("Random forest")
p3 <- vip(bst) + ggtitle("Gradient boosting")
```

```
# Figure 1
grid.arrange(p1, p2, p3, nrow = 1)
```

Notice how the `vip()` function always returns a "ggplot" object (by default, this will be a bar plot). For large models with many features, a Cleveland dot plot is more effective (in fact, a number of useful plotting options can be fiddled with). Below we call `vip()` and change a few useful options (the resulting plot is displayed in Figure 2). Note that we can also call `vip()` directly on a "vi" objects if it's already been constructed.

<sup>4</sup>Technically, it's a tibble with an additional "vi" class.

```
# Load required packages
library(ggplot2) # for theme_light() function
theme_set(theme_light()) # set theme for all ggplot2-based plots

vip(bst, num_features = 5, geom = "point", horizontal = FALSE,
    aesthetics = list(color = "red", shape = 17, size = 4))
```

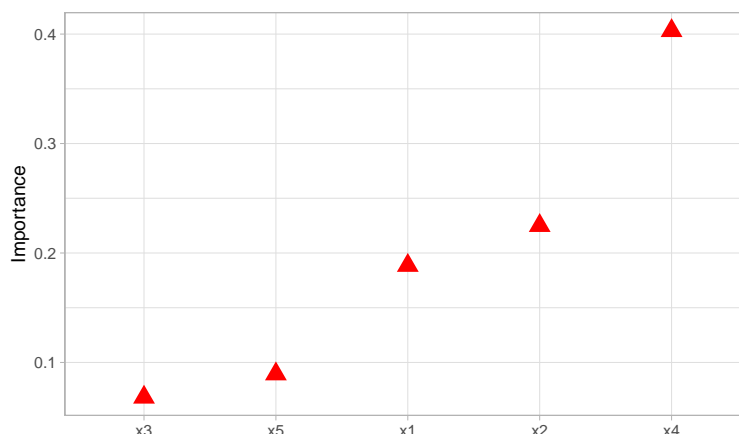


Figure 2: Illustrating various plotting options.

## Linear models

In multiple linear regression, or linear models (LMs), the absolute value of the  $t$ -statistic (or some other scaled variant of the estimated coefficients) is commonly used as a measure of VI. The same idea also extends to generalized linear models (GLMs). In the code chunk below, we fit an LM to the simulated `trn` data set allowing for all main effects and two-way interactions, then use the `step()` function to perform backward elimination. The resulting VIP is displayed in Figure 3.

```
# Fit a LM
linmod <- lm(y ~ .^2, data = trn)
backward <- step(linmod, direction = "backward", trace = 0)


# Extract VI scores
(vi_backward <- vi(backward))

#> # A tibble: 21 x 3
#>   Variable Importance Sign
#>   <chr>          <dbl> <chr>
#> 1 x4             14.2 POS
#> 2 x2              7.31 POS
#> 3 x1              5.63 POS
#> 4 x5              5.21 POS
#> 5 x3:x5           2.46 POS
#> 6 x1:x10          2.41 NEG
#> 7 x2:x6           2.41 NEG
#> 8 x1:x5           2.37 NEG
#> 9 x10             2.21 POS
#> 10 x3:x4          2.01 NEG
#> # ... with 11 more rows

# Plot VI scores; by default, `vip()` displays the top ten features
vip(vi_backward, num_features = length(coef(backward)),
    geom = "point", horizontal = FALSE)
```

One issue with computing VI scores for LMs using the  $t$ -statistic approach is that a score is assigned to each term in the model, rather than to each individual feature! We can solve this problem using one of the model-agnostic approaches discussed later.

Multivariate adaptive regression splines (MARS), which were introduced in [Friedman \(1991\)](#), is an automatic regression technique and can be seen as a generalization of LMs and GLMs. In the

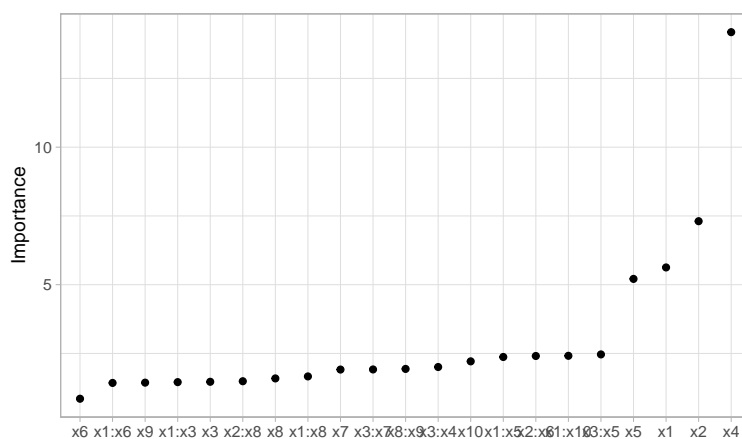

**Figure 3:** Example VIP from a linear model fit to the simulated Friedman data.

MARS algorithm, the contribution (or VI score) for each predictor is determined using a generalized cross-validation (GCV) statistic (though, other statistics can also be used; see `?vip::vi_model` for details). An example using the [earth](#) package (from [mda:mars](#) by Trevor Hastie and utilities with Thomas Lumley's [leaps wrapper](#), 2019) is given below (the results are plotted in Figure 4):

```
# Load required packages
library(earth)

# Fit a MARS model
mars <- earth(y ~ ., data = trn, degree = 2, pmethod = "exhaustive")

# Extract VI scores
vi(mars, type = "gcv")

#> # A tibble: 10 x 2
#>   Variable Importance
#>   <chr>          <dbl>
#> 1 x4             100
#> 2 x1              83.2
#> 3 x2              83.2
#> 4 x5              59.3
#> 5 x3              43.5
#> 6 x6               0
#> 7 x7               0
#> 8 x8               0
#> 9 x9               0
#> 10 x10            0


# Plot VI scores
vip(mars)
```

To access VI scores directly in **earth**, you can use the `earth::evimp()` function.

## Neural networks

For neural networks (NNs), two popular methods for constructing VI scores are the Garson algorithm (Garson, 1991), later modified by Goh (1995), and the Olden algorithm (Olden et al., 2004). For both algorithms, the basis of these VI scores is the network's connection weights. The Garson algorithm determines VI by identifying all weighted connections between the nodes of interest. Olden's algorithm, on the other hand, uses the products of the raw connection weights between each input and output neuron and sums these products across all hidden neurons. This has been shown to outperform the Garson method in various simulations. For DNNs, a similar method due to Gedeon (1997) considers the weights connecting the input features to the first two hidden layers (for simplicity and speed); but this method can be slow for large networks. We illustrate these two methods below using `vip()` with the [nnet](#) package (Ripley, 2016) (see the results in Figure 5).



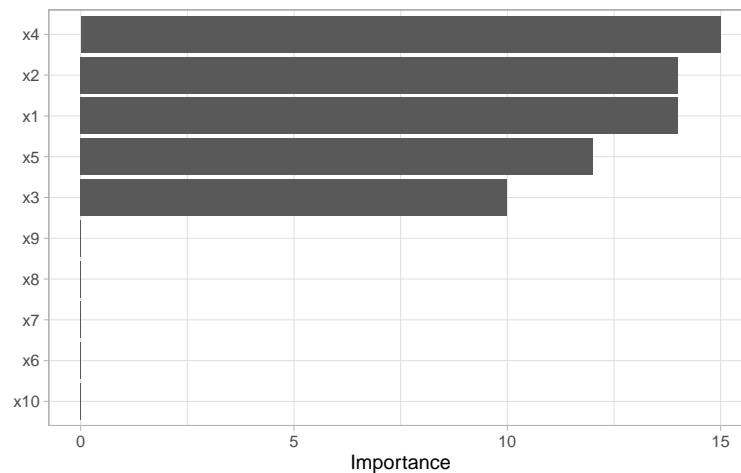

**Figure 4:** Example VIP from a MARS model fit to the simulated Friedman data.

```
# Load required packages
library(nnet)

# Fit a neural network
set.seed(0803)
nn <- nnet(y ~ ., data = trn, size = 7, decay = 0.1, linout = TRUE)

#> # weights: 85
#> initial value 126298.176281
#> iter 10 value 5148.185025
#> iter 20 value 3563.828062
#> iter 30 value 3095.876922
#> iter 40 value 2638.672528
#> iter 50 value 1983.009001
#> iter 60 value 1759.428911
#> iter 70 value 1483.284575
#> iter 80 value 1112.219052
#> iter 90 value 835.941067
#> iter 100 value 748.120719
#> final value 748.120719
#> stopped after 100 iterations

# VIPs
p1 <- vip(nn, type = "garson")
p2 <- vip(nn, type = "olden")

# Figure 5
grid.arrange(p1, p2, nrow = 1)
```


## Model-agnostic VI

Model-agnostic interpretability separates interpretation from the model. Compared to model-specific approaches, model-agnostic VI methods are more flexible and can be applied to any supervised learning algorithm. In this section, we discuss model-agnostic methods for quantifying global feature importance using three different approaches: 1) partial dependence plots (PDPs), 2) *individual conditional expectation* (ICE) curves, and 3) permutation-based feature importance. For specific details on approaches 1)–2), see [Greenwell et al. \(2018\)](#).

### FIRM method


Our first model-agnostic approach is based on a simple *feature importance ranking measure* (FIRM); for details, see [Greenwell et al. \(2018\)](#) and [Scholbeck et al. \(2019\)](#). The specific approach used here



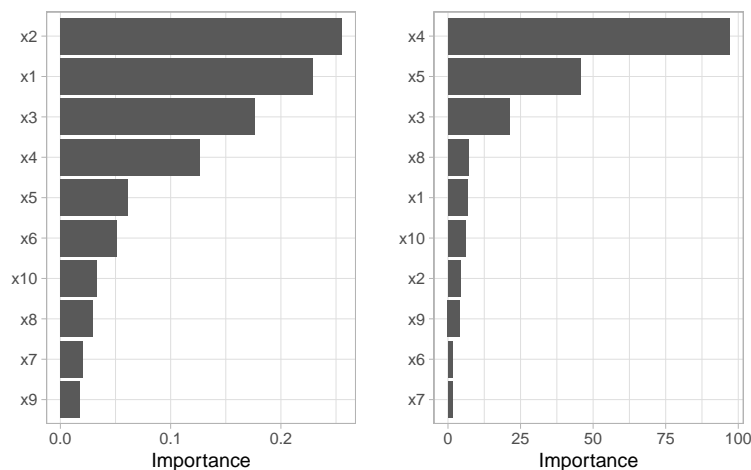

**Figure 5:** Example VIPs from a single-hidden-layer NN fit to the simulated Friedman data.

is based on quantifying the “flatness” of the effects of each feature.<sup>5</sup> Feature effects can be assessed using *partial dependence plots* (PDPs) (Friedman, 2001) or *individual conditional expectation* (ICE) curves (Goldstein et al., 2015). These approaches are model-agnostic and can be applied to any supervised learning algorithm. PDPs and ICE curves help visualize the effect of low cardinality subsets of the feature space on the estimated prediction surface (e.g., main effects and two/three-way interaction effects.). PDPs and ICE curves provide model-agnostic interpretations and can be constructed in the same way for any supervised learning algorithm. Below, we fit a projection pursuit regression (PPR) model and construct PDPs for each feature using the `pdp` package Greenwell (2017). The results are displayed in Figure 6. Notice how the PDPs for the uninformative features are relatively flat compared to the PDPs for features  $x_1$ – $x_2$ !

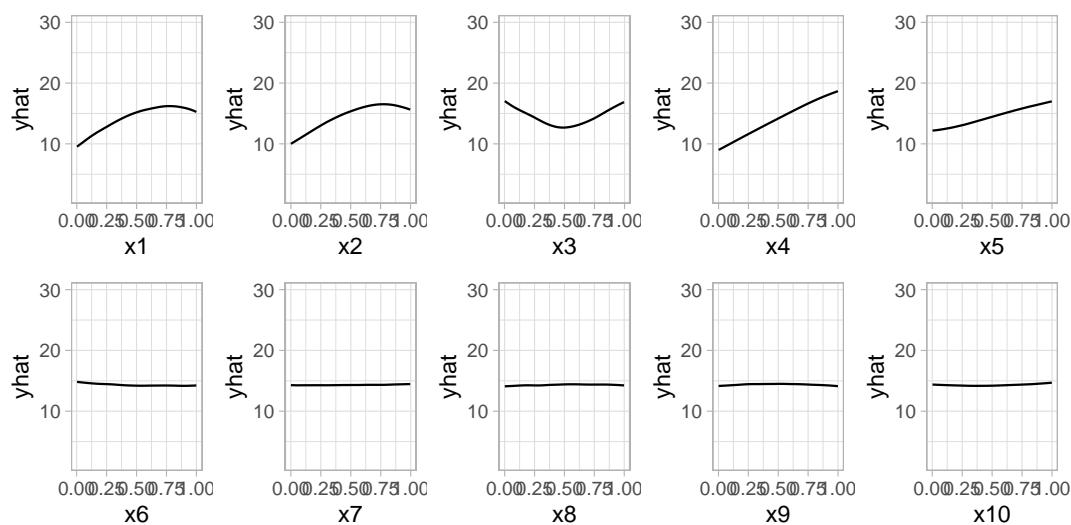

**Figure 6:** PDPs of main effects in the PPR model fit to the simulated Friedman data.


Next, we compute PDP-based VI scores for the PPR and NN models. The PDP method constructs VI scores that quantify the relative “flatness” of each PDP (by default, this is defined by computing the standard deviation of the  $y$ -axis values for each PDP). To use the PDP method, specify `method = "firm"` in the call to `vi()` or `vip()` (or just use `vi_firm()` directly):

```
# Fit a PPR model (nterms was chosen using the caret package with 5 repeats of
# 5-fold cross-validation)
pp <- ppr(y ~ ., data = trn, nterms = 11)

# Plot VI scores
p1 <- vip(pp, method = "firm") + ggtitle("PPR")
p2 <- vip(nn, method = "firm") + ggtitle("NN")
```

<sup>5</sup>A similar approach is taken in the `vivo` package (Kozak and Biecek, 2019).

```
# Figure 7
grid.arrange(p1, p2, ncol = 2)
```

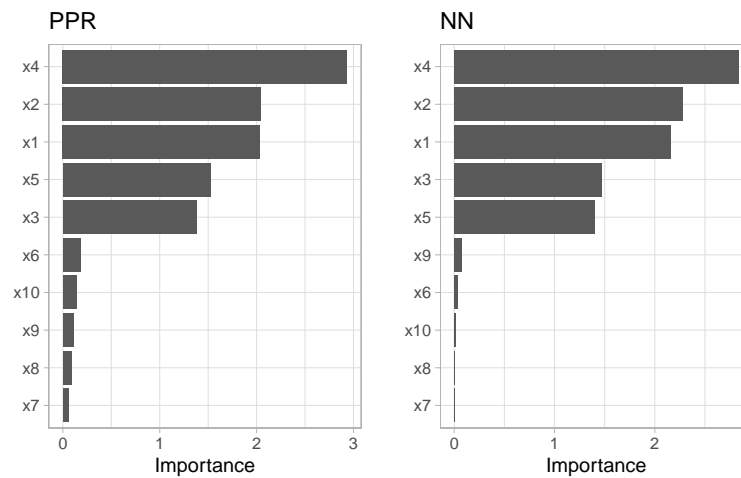


**Figure 7:** PDP-based feature importance for the PPR and NN models fit to the simulated Friedman data.

In Figure 7 we display the PDP-based feature importance for the previously obtained PPR and NN models. These VI scores essentially capture the variability in the partial dependence values for each main effect.

The ICE curve method is similar to the PDP method. The only difference is that we measure the “flatness” of each ICE curve and then aggregate the results (e.g., by averaging). If there are no (substantial) interaction effects, using `ice = TRUE` will produce results similar to using `ice = FALSE`. However, if strong interaction effects are present, they can obfuscate the main effects and render the PDP-based approach less useful (since the PDPs for important features can be relatively flat when certain interactions are present; see Goldstein et al. (2015) for details). In fact, it is probably safest to always use `ice = TRUE` when using the FIRM method.

Below, we display the ICE curves for each feature in the PPR model using the same  $y$ -axis scale; see Figure 8. Again, there is a clear difference between the ICE curves for features  $x_1$ – $x_5$  and  $x_6$ – $x_{10}$ ; the later being relatively flat by comparison. Also, notice how the ICE curves within each feature are relatively parallel (if the ICE curves within each feature were perfectly parallel, the standard deviation for each curve would be the same and the results will be identical to the PDP method). In this example, the interaction term between  $x_1$  and  $x_2$  does not obfuscate the PDPs for the main effects and the results are not much different.

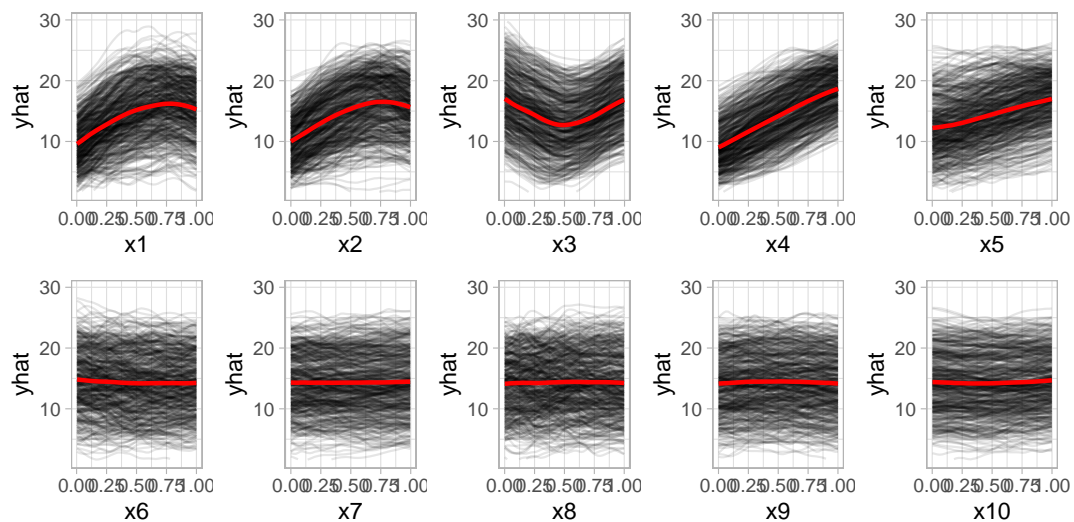


**Figure 8:** ICE curves for each feature in the PPR model fit to the simulated Friedman data. The red curve represents the PDP (i.e., the averaged ICE curves).

Obtaining the ICE-based feature importance scores is also straightforward, just specify `method = "ice"` in the call to `vip::vi()` or `vip::vip()`. This is illustrated in the code chunk below and the results are Figure 9 are similar to those obtained using the PDP method.

```
# Plot VI scores
p1 <- vip(pp, method = "firm", ice = TRUE) + ggtitle("PPR")
p2 <- vip(nn, method = "firm", ice = TRUE) + ggtitle("NN")

# Figure 9
grid.arrange(p1, p2, ncol = 2)
```

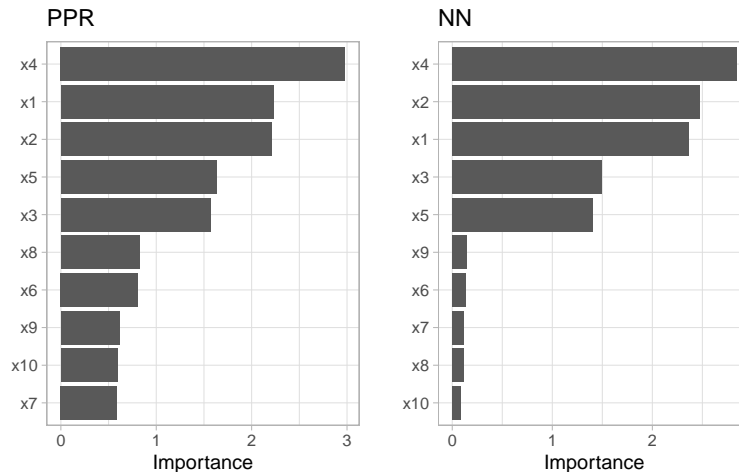

**Figure 9:** ICE-based feature importance for the PPR and NN models fit to the simulated Friedman data.

When using `method = "firm"`, the feature effect values are stored in an attribute called `"effects"`. This is a convenience so that the feature effect plots (e.g., PDPs and ICE curves) can easily be reconstructed and compared with the VI scores, as demonstrated in the example below (see Figure 10):


```
# Construct PDP-based variable importance scores
(vis <- vi(pp, method = "firm"))

#> # A tibble: 10 x 2
#>   Variable Importance
#>   <chr>          <dbl>
#> 1 x4             2.93
#> 2 x2             2.05
#> 3 x1             2.04
#> 4 x5             1.53
#> 5 x3             1.38
#> 6 x6             0.183
#> 7 x10            0.139
#> 8 x9             0.113
#> 9 x8             0.0899
#> 10 x7            0.0558

# Reconstruct PDPs for all 10 features
par(mfrow = c(2, 5))
for (name in paste0("x", 1:10)) {
  plot(attr(vis, which = "effects")[[name]], type = "l", ylim = c(9, 19), las = 1)
}
```

### Permutation method

The permutation method exists in various forms and was made popular in [Breiman \(2001\)](#) for RFs, before being generalized and extended in [Fisher et al. \(2018\)](#). The permutation approach used in **vip** is quite simple and is outlined in Algorithm 1 below. The idea is that if we randomly permute

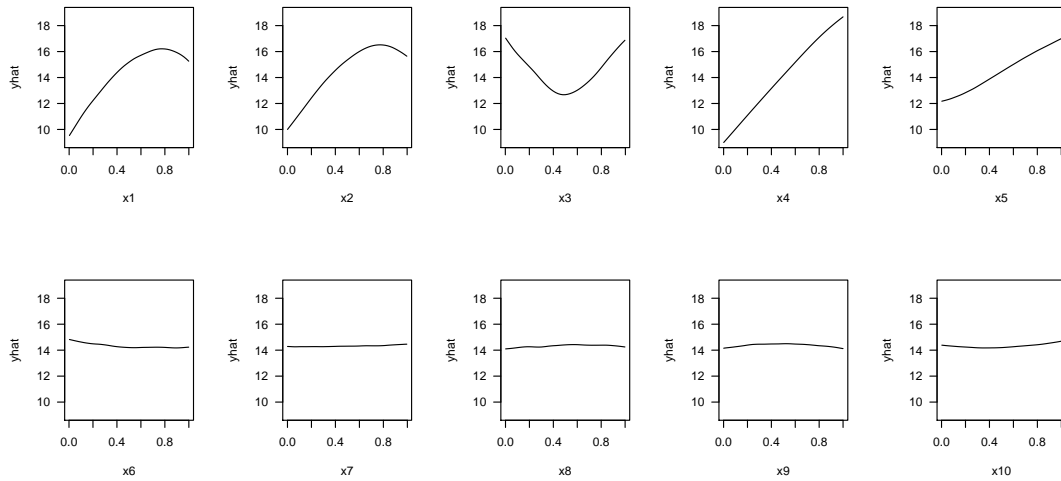

**Figure 10:** PDPs for all ten features reconstructed from the pdp attribute of the vis object.

the values of an important feature in the training data, the training performance would degrade (since permuting the values of a feature effectively destroys any relationship between that feature and the target variable). This of course assumes that the model has been properly tuned (e.g., using cross-validation) and is not over fitting. The permutation approach uses the difference between some baseline performance measure (e.g., training  $R^2$ , AUC, or RMSE) and the same performance measure obtained after permuting the values of a particular feature in the training data (**Note:** the model is NOT refit to the training data after randomly permuting the values of a feature). It is also important to note that this method may not be appropriate when you have, for example, highly correlated features (since permuting one feature at a time may lead to unlikely data instances).

Let  $X_1, X_2, \dots, X_j$  be the features of interest and let  $\mathcal{M}_{orig}$  be the baseline performance metric for the trained model; for brevity, we'll assume smaller is better (e.g., classification error or RMSE). The permutation-based importance scores can be computed as follows:

1. For  $i = 1, 2, \dots, j$ :
  - (a) Permute the values of feature  $X_i$  in the training data.
  - (b) Recompute the performance metric on the permuted data  $\mathcal{M}_{perm}$ .
  - (c) Record the difference from baseline using  $imp(X_i) = \mathcal{M}_{perm} - \mathcal{M}_{orig}$ .
2. Return the VI scores  $imp(X_1), imp(X_2), \dots, imp(X_j)$ .

**Algorithm 1:** A simple algorithm for constructing permutation-based VI scores.

Algorithm 1 can be improved or modified in a number of ways. For instance, the process can be repeated several times and the results averaged together. This helps to provide more stable VI scores, and also the opportunity to measure their variability. Rather than taking the difference in step (c), Molnar (2019b, sec. 5.5.4) argues that using the ratio  $\mathcal{M}_{perm} / \mathcal{M}_{orig}$  makes the importance scores more comparable across different problems. It's also possible to assign importance scores to groups of features (e.g., by permuting more than one feature at a time); this would be useful if features can be categorized into mutually exclusive groups, for instance, categorical features that have been *one-hot-encoded*.


To use the permutation approach in **vip**, specify method = "permute" in the call to `vi()` or `vip()`. Note that using method = "permute" requires specifying a few additional arguments (e.g., the training data, target name, a prediction function, etc.); see `vi_permute` for details.

An example is given below for the previously fitted PPR and NN models. Here we use  $R^2$  (metric = "rsquared") as the evaluation metric. The results, which are displayed in Figure 11, agree with those obtained using the PDP- and ICE-based methods.

```
# Plot VI scores
set.seed(2021) # for reproducibility
p1 <- vip(pp, method = "permute", target = "y", metric = "rsquared",
          pred_wrapper = predict) + ggtitle("PPR")
```

```
p2 <- vip(nn, method = "permute", target = "y", metric = "rsquared",
  pred_wrapper = predict) + ggtitle("NN")
```


```
# Figure 11
grid.arrange(p1, p2, ncol = 2)
```

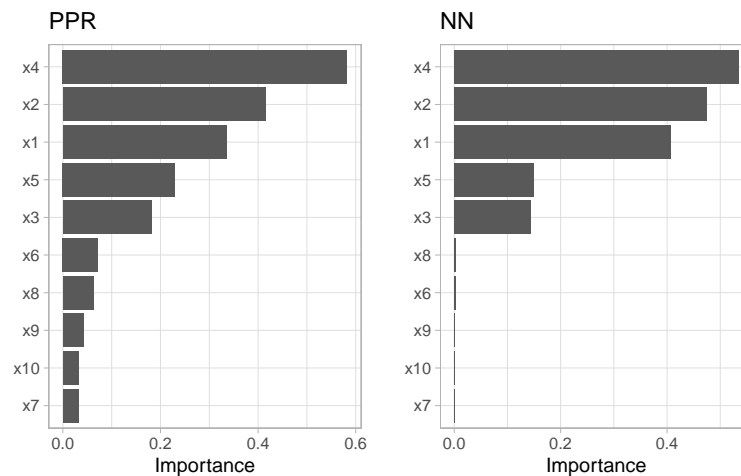

**Figure 11:** Permutation-based feature importance for the PPR and NN models fit to the simulated Friedman data.

The permutation approach introduces randomness into the procedure and therefore should be run more than once if computationally feasible. Fortunately, this also allows us to compute standard errors for the estimated VI scores, as illustrated in the example below where we specify `nsim = 10` to request that each feature be permuted 10 times and the results averaged together. (Additionally, if `nsim > 1`, you can set `geom = "boxplot"` in the call to `vip()` to construct boxplots of the raw permutation-based VI scores. This is useful if you want to visualize the variability in each of the VI estimates; see Figure ?? for an example.)

```
# Use 10 Monte Carlo reps
set.seed(403) # for reproducibility
vis <- vi(pp, method = "permute", target = "y", metric = "rsquared",
  pred_wrapper = predict, nsim = 15)
vip(vis, geom = "boxplot")
```

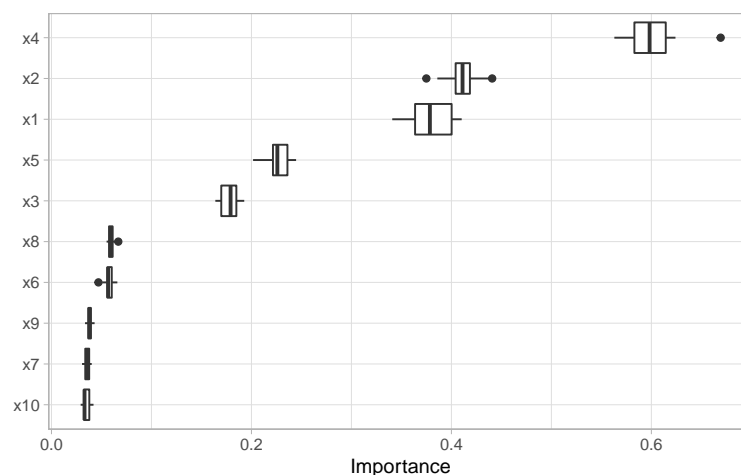

All available performance metrics for regression and classification can be listed using the `list_metrics()` function, for example:

```
list_metrics()

#>      Metric      Description      Task
#> 1 accuracy Classification accuracy Binary/multiclass classification
```

```
#> 2      error      Misclassification error Binary/multiclass classification
#> 3      auc      Area under (ROC) curve      Binary classification
#> 4      logloss      Log loss      Binary classification
#> 5      mauc      Multiclass area under (ROC) curve      Multiclass classification
#> 6      mae      Mean absolute error      Regression
#> 7      mse      Mean squared error      Regression
#> 8      r2      R squared      Regression
#> 9      rsquared      R squared      Regression
#> 10     rmse      Root mean squared error      Regression
#> 11     sse      Sum of squared errors      Regression
```

We can also use a custom metric (i.e., loss function). Suppose for example you want to measure importance using the *mean absolute error* (MAE):


$$MAE = \frac{1}{n} \sum_{i=1}^n |Y_i - \hat{f}(X_i)|, \quad (2)$$

where  $\hat{f}(X_i)$  is the predicted value of  $Y_i$ . A simple function implementing this metric is given below (note that, according to the documentation in `?vi_permute`, this function requires two arguments: actual and predicted).

```
mae <- function(actual, predicted) {
  mean(abs(actual - predicted))
}
```


To use this for computing permutation-based VI scores just pass it via the `metric` argument (be warned, however, that the metric used for computing permutation importance should be the same as the metric used to train and tune the model). Also, since this is a custom metric, we need to specify whether a smaller value indicates better performance by setting `smaller_is_better = TRUE`. The results, which are displayed in Figure ??, are similar to those in Figure 11, albeit a different scale.

```
# Figure 12
set.seed(2321) # for reproducibility
pfun <- function(object, newdata) predict(object, newdata = newdata)
vip(nn, method = "permute", target = "y", metric = mae,
    smaller_is_better = TRUE, pred_wrapper = pfun) +
  ggtitle("Custom loss function: MAE")
```

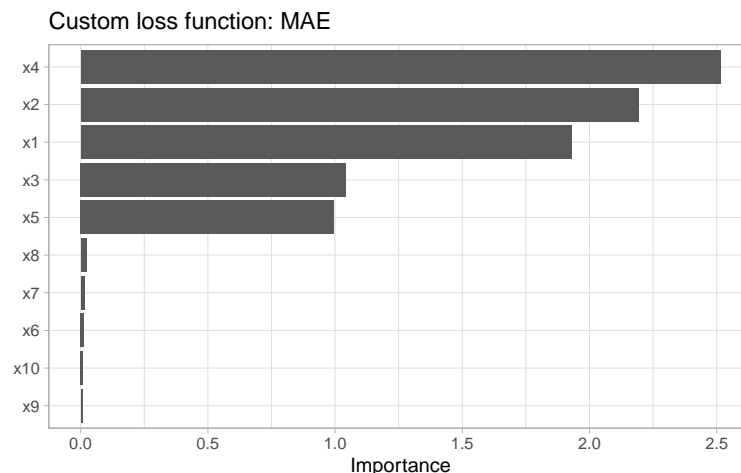

Although permutation importance is most naturally computed on the training data, it may also be useful to do the shuffling and measure performance on new data! This is discussed in depth in [Molnar \(2019b\)](#)[sec. 5.2]. For users interested in computing permutation importance using new data, just supply it to the `train` argument in the call to `vi()`, `vip()`, or `vi_permute()`. For instance, suppose we wanted to only use a fraction of the original training data to carry out the computations. In this case, we could simply pass the sampled data to the `train` argument as follows:

```
# Figure 13
set.seed(2327) # for reproducibility
vip(nn, method = "permute", pred_wrapper = pfun, target = "y", metric = "rmse",
    train = trn[sample(nrow(trn), size = 400), ]) # sample 400 observations
```

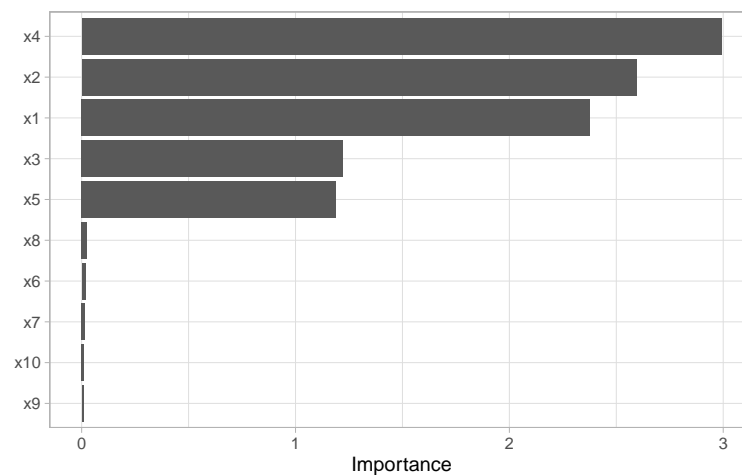


**Figure 12:** Permutation-based feature importance for the NN model fit to the simulated Friedman data. In this example, permutation importance is based on a random sample of 400 training observations.

```
ggtitle("Using a random subset of training data")

#> $title
#> [1] "Using a random subset of training data"
#>
#> attr(,"class")
#> [1] "labels"
```

When using the permutation method with `nsim > 1`, the default is to keep all the permutation scores as an attribute called `"raw_scores"`; you can turn this behavior off by setting `keep = FALSE` in the call to `vi_permute()`, `vi()`, or `vip()`. If `keep = TRUE` and `nsim > 1`, you can request all permutation scores to be plotted by setting `all_permutations = TRUE` in the call to `vip()` as demonstrated in the code chunk below (see Figure 13). This lets you visually inspect the variability in the permutation scores within each feature.

```
# Figure 14
set.seed(8264) # for reproducibility
vip(nn, method = "permute", pred_wrapper = pfun, target = "y", metric = "mae",
    geom = "point", all_permutations = TRUE, jitter = TRUE) +
  ggtitle("Plotting all permutation scores")
```

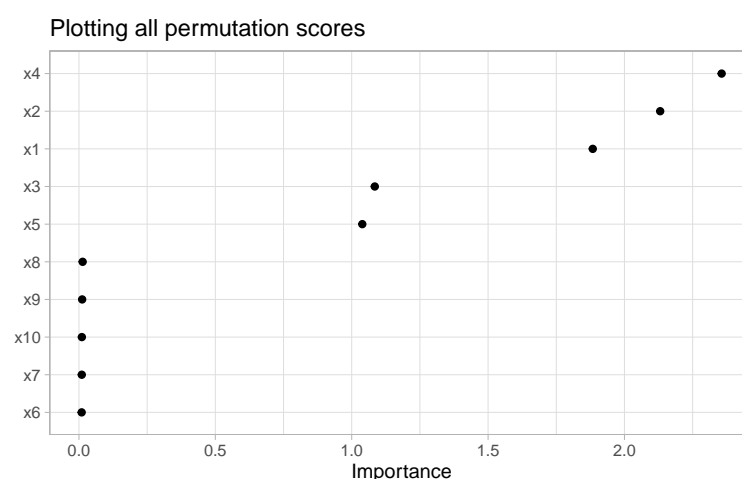


**Figure 13:** Permutation-based feature importance for the NN model fit to the simulated Friedman data. In this example, all the permutation importance scores (points) are displayed for each feature along with their average (bars).



## Benchmarks

In this section, we compare the performance of three implementations of permutation-based VI scores: `iml::FeatureImp()` (version 0.9.0), `ingredients::feature_importance()` (version 0.5.0), and `vip::vi()` (version 0.1.3.9000).

We simulated 10,000 training observations from the Friedman 1 benchmark problem and trained a random forest using the **ranger** package. For each implementation, we computed permutation-based VI scores 100 times using the **microbenchmark** package (Mersmann, 2019). For this benchmark we did not use any of the parallel processing capability available in the **iml** and **vip** implementations. The results from **microbenchmark** are displayed in Figure 14 and summarized in the output below. In this case, the **vip** package (version 0.1.4) was the most efficient, followed closely by **ingredients**. It should be noted, however, that the implementations in **vip** and **iml** can be parallelized. To the best of our knowledge, this is not the case for **ingredients**.

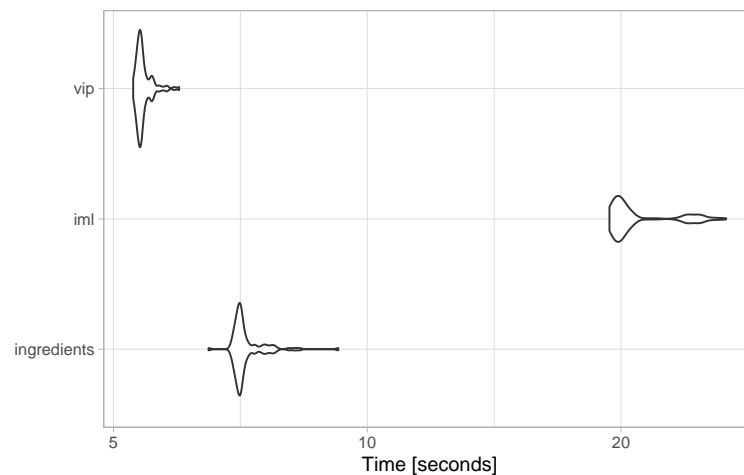

**Figure 14:** Violin plots comparing the computation time from three different implementations of permutation-based VI scores across 100 simulations.

## Shapley method

Starting with **vip** 0.1.4 you can now construct VI scores based on the popular *Shapley values* Molnar (2019b, sec. 5.9)—a method from coalitional game theory. Using Shapley values, the prediction for a single instance  $x^*$  can be explained by assuming that each feature value in  $x^*$  is a “player” in a game with a payout equal to the corresponding prediction  $\hat{f}(x^*)$ . Shapley values tell us how to fairly distribute the “payout” (i.e., prediction) among the features.

Shapley values provide importance scores at the individual prediction level (generally referred to as *prediction explanations*). However, they can be aggregated to obtain global importance scores by taking the mean of the absolute value of the individual Shapley values across the entire training set. Although Shapley values can be computationally expensive, the **fastshap** package (Greenwell, 2019) exploits a few computational tricks and also includes the option to perform computations in parallel (see `?fastshap::explain` for details). Also, fast and exact algorithms (Lundberg et al., 2019) can be exploited for certain classes of models, which is illustrated below using the **xgboost** package (Chen et al., 2019); see Figure ?. (**Note:** specifying `include_type = TRUE` in the call to `vip::vip()` causes the type of variable importance computed to be displayed as part of the axis label.)

```
# Load required packages
library(xgboost)

# Load the Boston housing data
# install.packages("pdp")
data(boston, package = "pdp")
X <- data.matrix(subset(boston, select = -cmedv)) # matrix of feature values


# Fit a gradient boosted regression tree ensemble; hyperparameters were tuned
# using `autoxgb::autoxgb()`
set.seed(859) # for reproducibility
bst <- xgboost(X, label = boston$cmedv, nrounds = 338, max_depth = 3, eta = 0.1,
```

```

verbose = 0)

# Construct Shapley-based variable importance plot
vip(bst, method = "shap", train = X, exact = TRUE, include_type = TRUE)

```

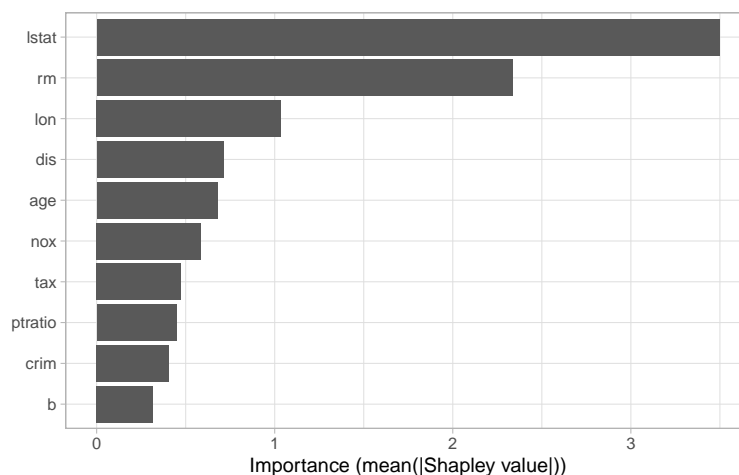

## Drawbacks of existing methods

As discussed in [Hooker and Mentch \(2019\)](#) and [Molnar \(2019b, chap. 5\)](#), model-agnostic approaches—like PDPs, ICE curves, and permutation importance—tend to use predictions from unlikely data instances (i.e., extrapolating). For example, the standard approach to computing permutation importance VI scores involves independently permuting individual features. This implicitly makes the assumption that the observed features are statistically independent. In practice, however, features are often not independent which can lead to nonsensical VI scores. One way to mitigate this issue is to use the conditional approach described in [Strobl et al. \(2008\)](#). Unfortunately, this approach is not yet available for general purpose. A similar modification can be made when constructing PDPs and is described in [Parr and Wilson \(2019\)](#); a basic R implementation is available at <https://github.com/bggreenwell/rstratx>.

We already mentioned that PDPs can be misleading in the presence of strong interaction effects. This drawback of course equally applies to the FIRM method when based on PDPs. As discussed earlier, this can be mitigated by using ICE curves instead. Another alternative would be to use *accumulated local effect* (ALE) plots ([Apley and Zhu, 2016](#)). Compared to PDPs, ALE plots have the advantage of being faster to compute and less affected by strong dependencies among the features. The downside, however, is that ALE plots are more complicated to implement (hence, they are not currently available when using `method = "firm"`). Further, since the  $y$ -axis scale for ALE plots is not on the same scale as the predicted outcome (e.g., probability scale for classification), it makes any FIRM based VI scores more difficult to interpret. ALE plots are available in the [ALEPlot](#) ([Apley, 2018](#)) and `iml` packages.

## Use sparklines to characterize feature effects


Starting with `vip` 0.1.3, we have included a new function `add_sparklines()` for constructing HTML-based VI tables; however, this feature requires the `DT` package ([Xie et al., 2019](#)). The primary difference between `vi()` and `add_sparklines()` is that the latter includes an `Effect` column that displays a sparkline representation of the partial dependence function for each feature. This is a concise way to display both feature importance and feature effect information in a single (interactive) table. See `?vip::add_sparklines` for details. We illustrate the basic use of `add_sparklines()` in the code chunks below.

```

# First, compute a tibble of variable importance scores using any method
var_imp <- vi(rfo)

# Next, convert to an html-based data table with sparklines
add_sparklines(var_imp, fit = rfo)

```

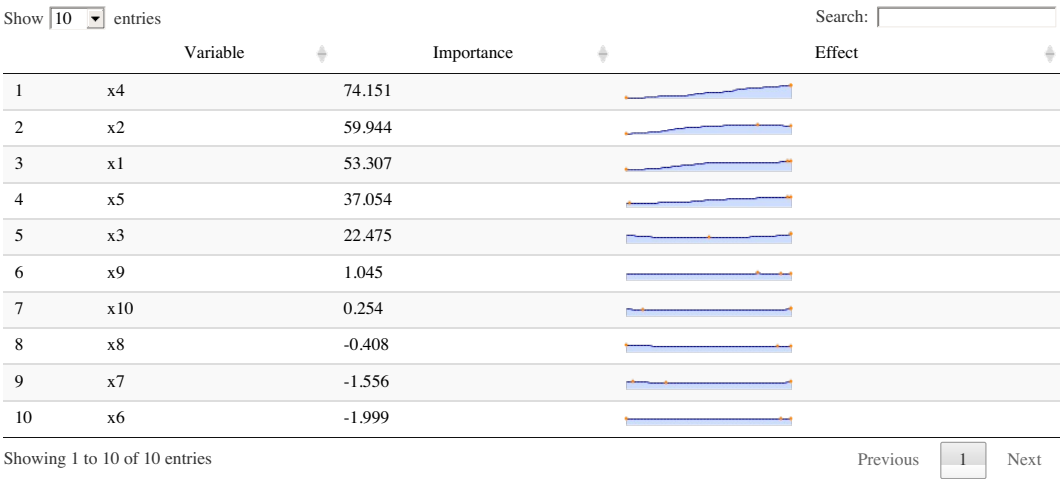

**Figure 15:** Variable importance scores along with a sparkline representation of feature effects.

Ames housing example

For illustration, we'll use the Ames housing data (Cock, 2011) which are available in the AmesHousing package (Kuhn, 2017). These data describe the sale of individual residential properties in Ames, Iowa from 2006–2010. The data set contains 2930 observations, 80 features (23 nominal, 23 ordinal, 14 discrete, and 20 continuous), and a continuous target giving the sale price of the home. The version we'll load is a cleaned up version of the original data set and treats all categorical variables as nominal (see ?AmesHousing::make\_ames for details).

Using the R package SuperLearner (Polley et al., 2019), we trained five models using 5-fold cross-validation: a GBM using the xgboost package, an RF using the ranger package, a MARS model using the earth package, a GLMNET model using the glmnet package (Friedman et al., 2019), and a support vector regression model using the kernlab package (Karatzoglou et al., 2019). The coefficients from the meta learner indicate that the GBM contributes the most to new predictions, followed by the MARS model, RF, and the GLMNET. The support vector regression model did not contribute to the ensemble.

```
# Load the Ames housing data
ames <- AmesHousing::make_ames()
X <- subset(ames, select = -Sale_Price)
y <- ames$Sale_Price

# Load required packages
library(SuperLearner)

# List of base learners
learners <- c("SL.xgboost", "SL.ranger", "SL.earth", "SL.glmnet", "SL.ksvm")

# Stack models
set.seed(840)
ctrl <- SuperLearner.CV.control(V = 5L, shuffle = TRUE)
sl <- SuperLearner(Y = y, X = X, SL.library = learners, verbose = TRUE,
                  cvControl = ctrl)

sl

#>
#> Call:
#> SuperLearner(Y = y, X = X, SL.library = learners, verbose = TRUE, cvControl = ctrl)
#>
#>
#>
#>
#>
#> Risk      Coef
#> SL.xgboost_All 569646381 0.43455425
#> SL.ranger_All 666208088 0.06970309
#> SL.earth_All 553872844 0.49574265
#> SL.glmnet_All 908881559 0.00000000
#> SL.ksvm_All 6784289108 0.00000000
```

In the code chunks below we request permutation-based VI scores and add sparkline representations of the PDPs for the top ten features. For this we need to define a couple of wrapper functions. One for computing predictions (for the permutation VI scores) and one for computing averaged predictions (for the PDPs):

```
# Prediction wrapper functions
imp_fun <- function(object, newdata) { # for permutation-based VI scores
  predict(object, newdata = newdata)$pred
}
par_fun <- function(object, newdata) { # for PDPs
  mean(predict(object, newdata = newdata)$pred)
}
```

To speed up the process, we perform the computations in parallel by setting `parallel = TRUE` in the call to `vi()` and `add_sparklines()`. Note that we first need to set up a parallel backend for this to work. Both **vip** and **pdp** use **plyr** (Wickham, 2019)—which relies on **foreach** (Revolution Analytics and Weston)—so any parallel backend supported by the **foreach** package should work. Below we use a socket approach with the **doParallel** backend (Corporation and Weston, 2019) using a cluster of size five.

```
# Setup parallel backend
library(doParallel) # load the parallel backend
cl <- makeCluster(5) # use 5 workers
registerDoParallel(cl) # register the parallel backend

# Permutation-based feature importance
set.seed(278)
var_imp <- vi(sl, method = "permute", train = X, target = y, metric = "rmse",
  pred_wrapper = imp_fun, nsim = 5, parallel = TRUE)

# Add sparkline representation of feature effects
add_sparklines(var_imp[1L:10L, ], fit = sl, pred.fun = par_fun, train = X,
  digits = 2, verbose = TRUE, trim.outliers = TRUE,
  grid.resolution = 20, parallel = TRUE)
```

Show  entries Search:

	Variable	Importance	StDev	Effect
1	Gr_Liv_Area	25802.82	317.74	
2	Total_Bsmt_SF	13420.03	215.67	
3	Year_Built	12744.15	363.34	
4	Overall_Qual	11031.76	218.58	
5	Mas_Vnr_Type	7998.64	937.22	
6	Year_Remod_Add	6599.47	353.47	
7	Lot_Area	4372.77	398.93	
8	Bsmt_Unf_SF	3775.24	90.90	
9	Garage_Cars	2872.94	91.04	
10	Fireplaces	2022.92	138.79	

Showing 1 to 10 of 10 entries Previous  Next

**Figure 16:** VIP with sparkline representation of feature effects for the top ten features from a Super Learner fit to the Ames housing data.

```
# Shut down cluster
stopCluster(cl)
```

## Summary

VIPs help to visualize the strength of the relationship between each feature and the response, while accounting for all the other features in the model. We've discussed two types of VI: model-specific and model-agnostic, as well as some of their strengths and weaknesses. In this paper, we showed

how to construct VIPs for various types of “black box” models in R using the **vip** package. We also briefly discussed related approaches available in other R packages. Suggestions to avoid high execution times were discussed and demonstrated via examples. This paper is based on **vip** version 0.1.3. For updates that have occurred since then, see the package’s [NEWS file](#). In terms of future development, **vip** can be expanded in a number of ways. For example, we plan to incorporate the option to compute group-based permutation scores. We’re also working on including a new option for efficiently computing Shapley-based VI scores via the new [fastshap](#) package. Although not discussed in this paper, the package also includes a promising statistic (similar to the PDP- and ICE-based VI scores previously discussed) for measuring the relative strength of interaction between features.

## Acknowledgments

TBD.

## Bibliography

- D. Apley. *ALEPlot: Accumulated Local Effects (ALE) Plots and Partial Dependence (PD) Plots*, 2018. URL <https://CRAN.R-project.org/package=ALEPlot>. R package version 1.1. [p17]
- D. W. Apley and J. Zhu. Visualizing the effects of predictor variables in black box supervised learning models, 2016. [p17]
- P. Biecek. *DALEX: Descriptive mACHine Learning EXplanations*, 2019. URL <https://CRAN.R-project.org/package=DALEX>. R package version 0.4.9. [p1]
- P. Biecek, H. Baniecki, and A. Izdebski. *ingredients: Effects and Importances of Model Ingredients*, 2019. URL <https://CRAN.R-project.org/package=ingredients>. R package version 0.5.0. [p1]
- B. Bischl, M. Lang, L. Kotthoff, J. Schiffner, J. Richter, Z. Jones, G. Casalicchio, M. Gallo, and P. Schratz. *mlr: Machine Learning in R*, 2020. URL <https://CRAN.R-project.org/package=mlr>. R package version 2.17.0. [p2]
- L. Breiman. Bagging predictors. *Machine Learning*, 8(2):209–218, 1996. URL <https://doi.org/10.1023/A:1018054314350>. [p2]
- L. Breiman. Random forests. *Machine Learning*, 45(1):5–32, 2001. URL <https://doi.org/10.1023/A:1010933404324>. [p11]
- L. Breiman, J. Friedman, and R. A. O. Charles J. Stone. *Classification and Regression Trees*. The Wadsworth and Brooks-Cole statistics-probability series. Taylor & Francis, 1984. ISBN 9780412048418. [p3]
- E. Celik. *vita: Variable Importance Testing Approaches*, 2015. URL <https://CRAN.R-project.org/package=vita>. R package version 1.0.0. [p2]
- W. Chang. *R6: Encapsulated Classes with Reference Semantics*, 2019. URL <https://CRAN.R-project.org/package=R6>. R package version 2.4.1. [p1]
- T. Chen, T. He, M. Benesty, V. Khotilovich, Y. Tang, H. Cho, K. Chen, R. Mitchell, I. Cano, T. Zhou, M. Li, J. Xie, M. Lin, Y. Geng, and Y. Li. *xgboost: Extreme Gradient Boosting*, 2019. URL <https://CRAN.R-project.org/package=xgboost>. R package version 0.90.0.2. [p16]
- W. S. Cleveland. Robust locally weighted regression and smoothing scatterplots. *Journal of the American Statistical Association*, 74(368):829–836, 1979. doi: 10.1080/01621459.1979.10481038. [p2]
- D. D. Cock. Ames, iowa: Alternative to the boston housing data as an end of semester regression project. *Journal of Statistics Education*, 19(3):1–15, 2011. URL <http://ww2.amstat.org/publications/jse/v19n3/decock.pdf>. [p18]
- M. Corporation and S. Weston. *doParallel: Foreach Parallel Adaptor for the ‘parallel’ Package*, 2019. URL <https://CRAN.R-project.org/package=doParallel>. R package version 1.0.15. [p19]
- F. Doshi-Velez and B. Kim. Towards a rigorous science of interpretable machine learning, 2017. [p1]
- A. Fisher, C. Rudin, and F. Dominici. Model class reliance: Variable importance measures for any machine learning model class, from the “rashomon” perspective. *arXiv preprint arXiv:1801.01489*, 2018. [p11]

- J. Friedman, T. Hastie, R. Tibshirani, B. Narasimhan, and N. Simon. *glmnet: Lasso and Elastic-Net Regularized Generalized Linear Models*, 2019. URL <https://CRAN.R-project.org/package=glmnet>. R package version 3.0-2. [p18]
- J. H. Friedman. Multivariate adaptive regression splines. *The Annals of Statistics*, 19(1):1–67, 1991. URL <https://doi.org/10.1214/aos/1176347963>. [p2, 6]
- J. H. Friedman. Greedy function approximation: A gradient boosting machine. *The Annals of Statistics*, 29(5):1189–1232, 2001. URL <https://doi.org/10.1214/aos/1013203451>. [p9]
- S. M. D. from mda:mars by Trevor Hastie and R. T. U. A. M. F. utilities with Thomas Lumley’s leaps wrapper. *earth: Multivariate Adaptive Regression Splines*, 2019. URL <https://CRAN.R-project.org/package=earth>. R package version 5.1.2. [p7]
- D. G. Garson. Interpreting neural-network connection weights. *Artificial Intelligence Expert*, 6(4):46–51, 1991. [p7]
- T. Gedeon. Data mining of inputs: Analysing magnitude and functional measures. *International Journal of Neural Systems*, 24(2):123–140, 1997. URL <https://doi.org/10.1007/s10994-006-6226-1>. [p7]
- A. Goh. Back-propagation neural networks for modeling complex systems. *Artificial Intelligence in Engineering*, 9(3):143–151, 1995. doi: [http://dx.doi.org/10.1016/0954-1810\(94\)00011-S](http://dx.doi.org/10.1016/0954-1810(94)00011-S). [p7]
- A. Goldstein, A. Kapelner, J. Bleich, and E. Pitkin. Peeking inside the black box: Visualizing statistical learning with plots of individual conditional expectation. *Journal of Computational and Graphical Statistics*, 24(1):44–65, 2015. URL <https://doi.org/10.1080/10618600.2014.907095>. [p9, 10]
- B. Greenwell. *fastshap: Fast Approximate Shapley Values*, 2019. URL <https://github.com/bgreenwell/fastshap>. R package version 0.0.3.9000. [p16]
- B. Greenwell, B. Boehmke, J. Cunningham, and G. Developers. *gbm: Generalized Boosted Regression Models*, 2019a. URL <https://CRAN.R-project.org/package=gbm>. R package version 2.1.5. [p2]
- B. Greenwell, B. Boehmke, and B. Gray. *vip: Variable Importance Plots*, 2019b. <https://koalaverse.github.io/vip/index.html>, <https://github.com/koalaverse/vip/>. [p2]
- B. M. Greenwell. pdp: An r package for constructing partial dependence plots. *The R Journal*, 9(1): 421–436, 2017. URL <https://journal.r-project.org/archive/2017/RJ-2017-016/index.html>. [p9]
- B. M. Greenwell, B. C. Boehmke, and A. J. McCarthy. A simple and effective model-based variable importance measure. *arXiv preprint arXiv:1805.04755*, 2018. [p2, 8]
- T. Hastie, R. Tibshirani, and J. Friedman. *The Elements of Statistical Learning: Data Mining, Inference, and Prediction, Second Edition*. Springer Series in Statistics. Springer-Verlag, 2009. [p3]
- G. Hooker and L. Mentch. Please stop permuting features: An explanation and alternatives, 2019. [p17]
- T. Hothorn, K. Hornik, C. Strobl, and A. Zeileis. *party: A Laboratory for Recursive Partytioning*, 2019. URL <https://CRAN.R-project.org/package=party>. R package version 1.3-3. [p2]
- Z. Jones. *mmpf: Monte-Carlo Methods for Prediction Functions*, 2018. URL <https://CRAN.R-project.org/package=mmpf>. R package version 0.0.5. [p2]
- A. Karatzoglou, A. Smola, and K. Hornik. *kernlab: Kernel-Based Machine Learning Lab*, 2019. URL <https://CRAN.R-project.org/package=kernlab>. R package version 0.9-29. [p18]
- A. Kozak and P. Biecek. *vivo: Local Variable Importance via Oscillations of Ceteris Paribus Profiles*, 2019. URL <https://CRAN.R-project.org/package=vivo>. R package version 0.1.1. [p9]
- M. Kuhn. *AmesHousing: The Ames Iowa Housing Data*, 2017. URL <https://CRAN.R-project.org/package=AmesHousing>. R package version 0.0.3. [p18]
- M. Kuhn. *caret: Classification and Regression Training*, 2020. URL <https://CRAN.R-project.org/package=caret>. R package version 6.0-85. [p2]
- M. Kuhn and K. Johnson. *Applied Predictive Modeling*. SpringerLink : Bücher. Springer New York, 2013. ISBN 9781461468493. [p2]



- M. Loecher. *rfVarImpOOB: Unbiased Variable Importance for Random Forests*, 2019. URL <https://CRAN.R-project.org/package=rfVarImpOOB>. R package version 1.0. [p2]
- S. M. Lundberg, G. Erion, H. Chen, A. DeGrave, J. M. Prutkin, B. Nair, R. Katz, J. Himmelfarb, N. Bansal, and S.-I. Lee. Explainable ai for trees: From local explanations to global understanding. *arXiv preprint arXiv:1905.04610*, 2019. [p16]
- O. Mersmann. *microbenchmark: Accurate Timing Functions*, 2019. URL <https://CRAN.R-project.org/package=microbenchmark>. R package version 1.4-7. [p16]
- C. Molnar. *iml: Interpretable Machine Learning*, 2019a. URL <https://CRAN.R-project.org/package=iml>. R package version 0.9.0. [p1]
- C. Molnar. *Interpretable Machine Learning*. 2019b. <https://christophm.github.io/interpretable-ml-book/>. [p1, 12, 14, 16, 17]
- K. Müller and H. Wickham. *tibble: Simple Data Frames*, 2019. URL <https://CRAN.R-project.org/package=tibble>. R package version 2.1.3. [p2]
- J. D. Olden, M. K. Joy, and R. G. Death. An accurate comparison of methods for quantifying variable importance in artificial neural networks using simulated data. *Ecological Modelling*, 178(3):389–397, 2004. doi: <http://dx.doi.org/10.1016/j.ecolmodel.2004.03.013>. [p7]
- A. Paluszynska, P. Biecek, and Y. Jiang. *randomForestExplainer: Explaining and Visualizing Random Forests in Terms of Variable Importance*, 2019. URL <https://CRAN.R-project.org/package=randomForestExplainer>. R package version 0.10.0. [p2]
- T. Parr and J. D. Wilson. Technical report: A stratification approach to partial dependence for codependent variables, 2019. [p17]
- E. Polley, E. LeDell, C. Kennedy, and M. van der Laan. *SuperLearner: Super Learner Prediction*, 2019. URL <https://CRAN.R-project.org/package=SuperLearner>. R package version 2.0-26. [p18]
- P. Probst. *varImp: RF Variable Importance for Arbitrary Measures*, 2019. URL <https://CRAN.R-project.org/package=varImp>. R package version 0.3. [p2]
- Revolution Analytics and S. Weston. *foreach: Provides Foreach Looping Construct*. [p19]
- B. Ripley. *nnet: Feed-Forward Neural Networks and Multinomial Log-Linear Models*, 2016. URL <https://CRAN.R-project.org/package=nnet>. R package version 7.3-12. [p7]
- C. A. Scholbeck, C. Molnar, C. Heumann, B. Bischl, and G. Casalicchio. Sampling, intervention, prediction, aggregation: A generalized framework for model agnostic interpretations. *CoRR*, abs/1904.03959, 2019. URL <http://arxiv.org/abs/1904.03959>. [p8]
- C. Strobl, A.-L. Boulesteix, T. Kneib, T. Augustin, and A. Zeileis. Conditional variable importance for random forests. *BMC Bioinformatics*, 9(1):307, 2008. [p2, 17]
- Q. Sun. *tree.interpreter: Random Forest Prediction Decomposition and Feature Importance Measure*, 2019. URL <https://CRAN.R-project.org/package=tree.interpreter>. R package version 0.1.0. [p2]
- H. Wickham. *plyr: Tools for Splitting, Applying and Combining Data*, 2019. URL <https://CRAN.R-project.org/package=plyr>. R package version 1.8.5. [p19]
- H. Wickham, W. Chang, L. Henry, T. L. Pedersen, K. Takahashi, C. Wilke, K. Woo, and H. Yutani. *ggplot2: Create Elegant Data Visualisations Using the Grammar of Graphics*, 2019. URL <https://CRAN.R-project.org/package=ggplot2>. R package version 3.2.1. [p2]
- M. N. Wright, S. Wager, and P. Probst. *ranger: A Fast Implementation of Random Forests*, 2020. URL <https://CRAN.R-project.org/package=ranger>. R package version 0.12.1. [p2]
- Y. Xie, J. Cheng, and X. Tan. *DT: A Wrapper of the JavaScript Library 'DataTables'*, 2019. URL <https://CRAN.R-project.org/package=DT>. R package version 0.11. [p17]

Brandon M. Greenwell  
University of Cincinnati  
2925 Campus Green Dr  
Cincinnati, OH 45221  
United States of America



ORCID—0000-0002-8120-0084  
[greenwell.brandon@gmail.com](mailto:greenwell.brandon@gmail.com)

*Bradley C. Boehmke*  
*University of Cincinnati*  
*2925 Campus Green Dr*  
*Cincinnati, OH 45221*  
*United States of America*  
ORCID—0000-0002-3611-8516  
[bradleyboehmke@gmail.com](mailto:bradleyboehmke@gmail.com)