

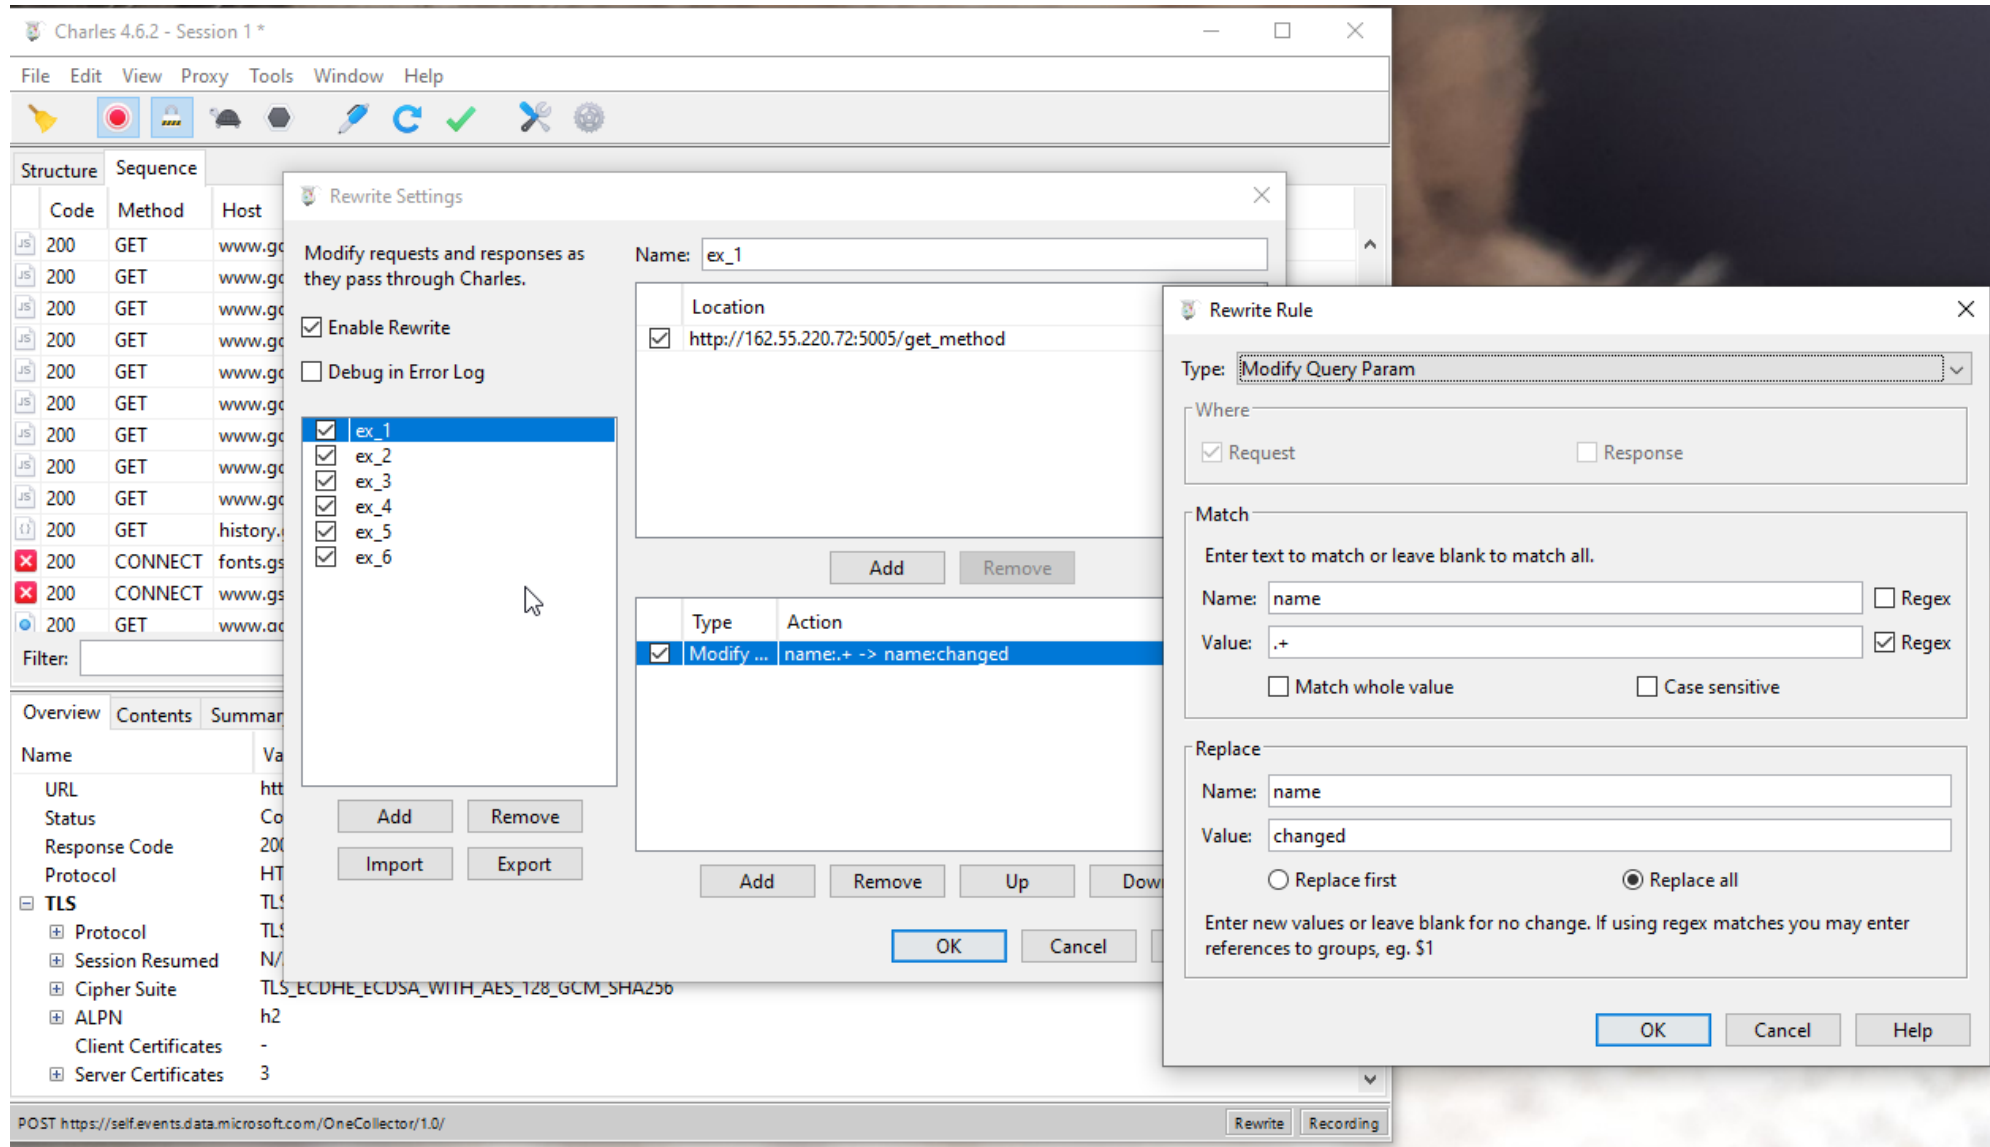


## Ex\_1


- Подменить url в Charles чтобы в запросе ушло имя которые вы вписали в Postman, а вернулось то, которое вы подставили в Charles.



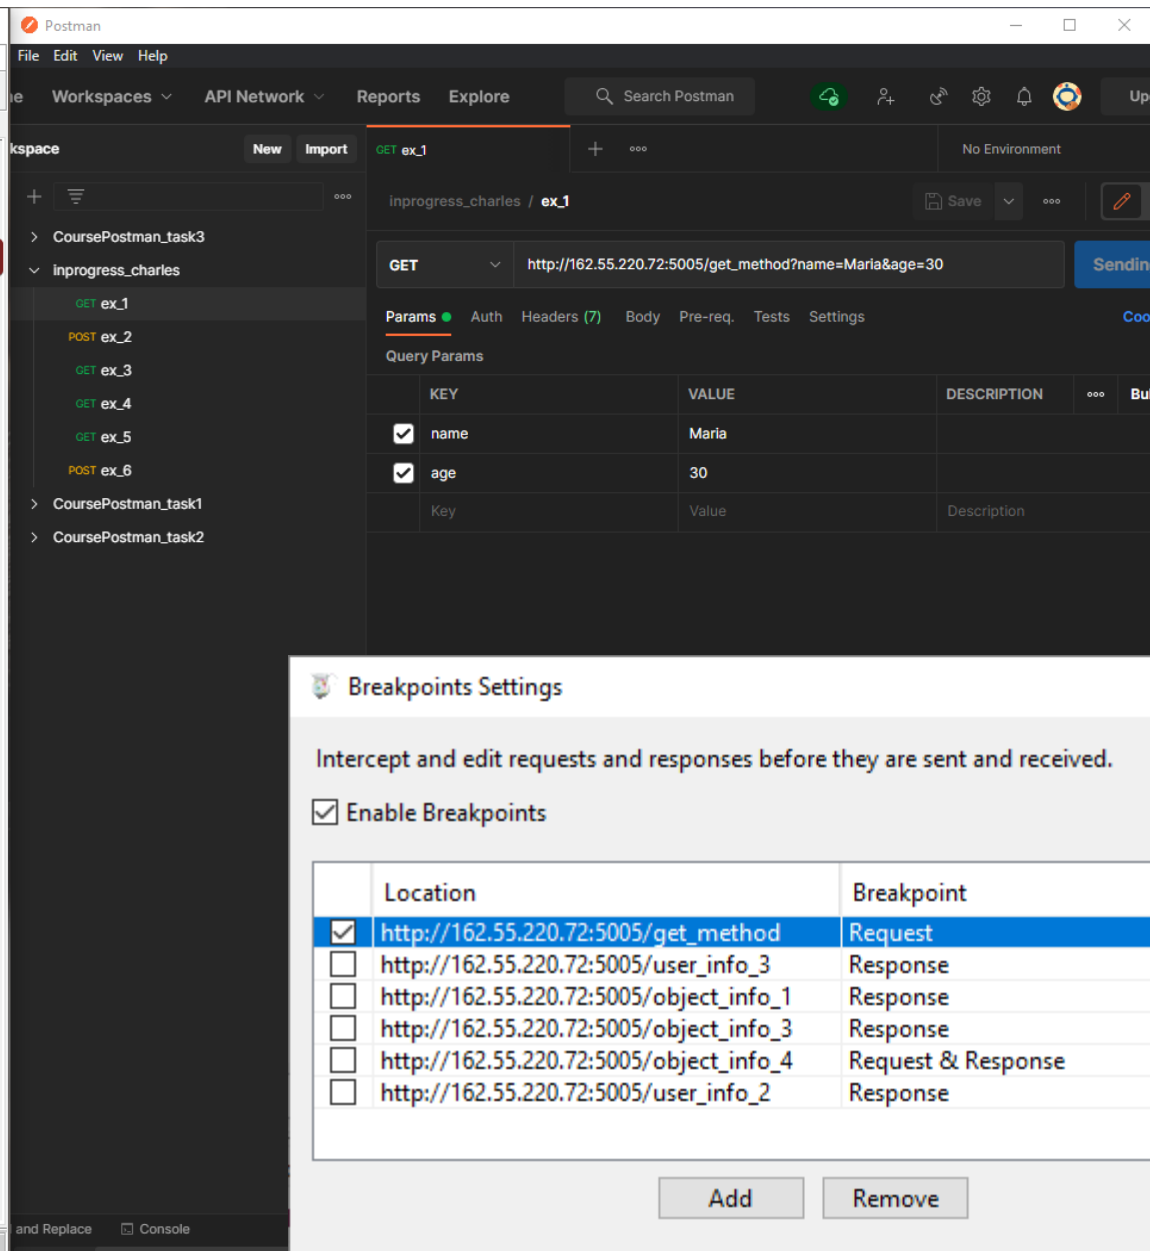


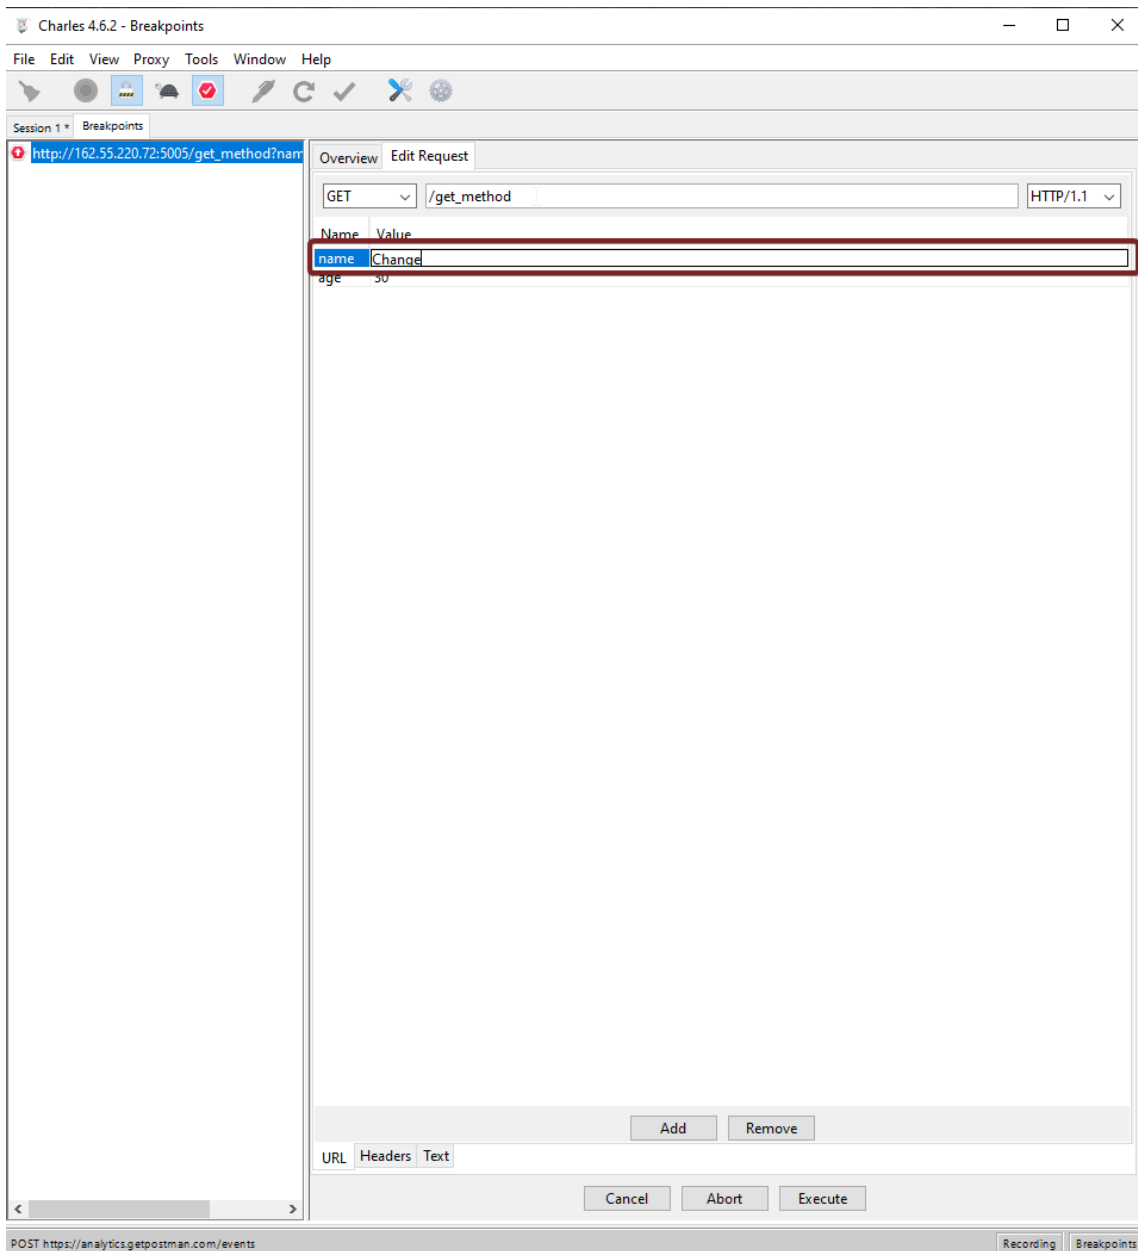

## Ex\_2

- Подменить body в Charles так чтобы в запросе ушла salary которую вы вписали в Postman, а в u\_salary\_1\_5\_year цифра вернулась меньше оригинальной из запроса.

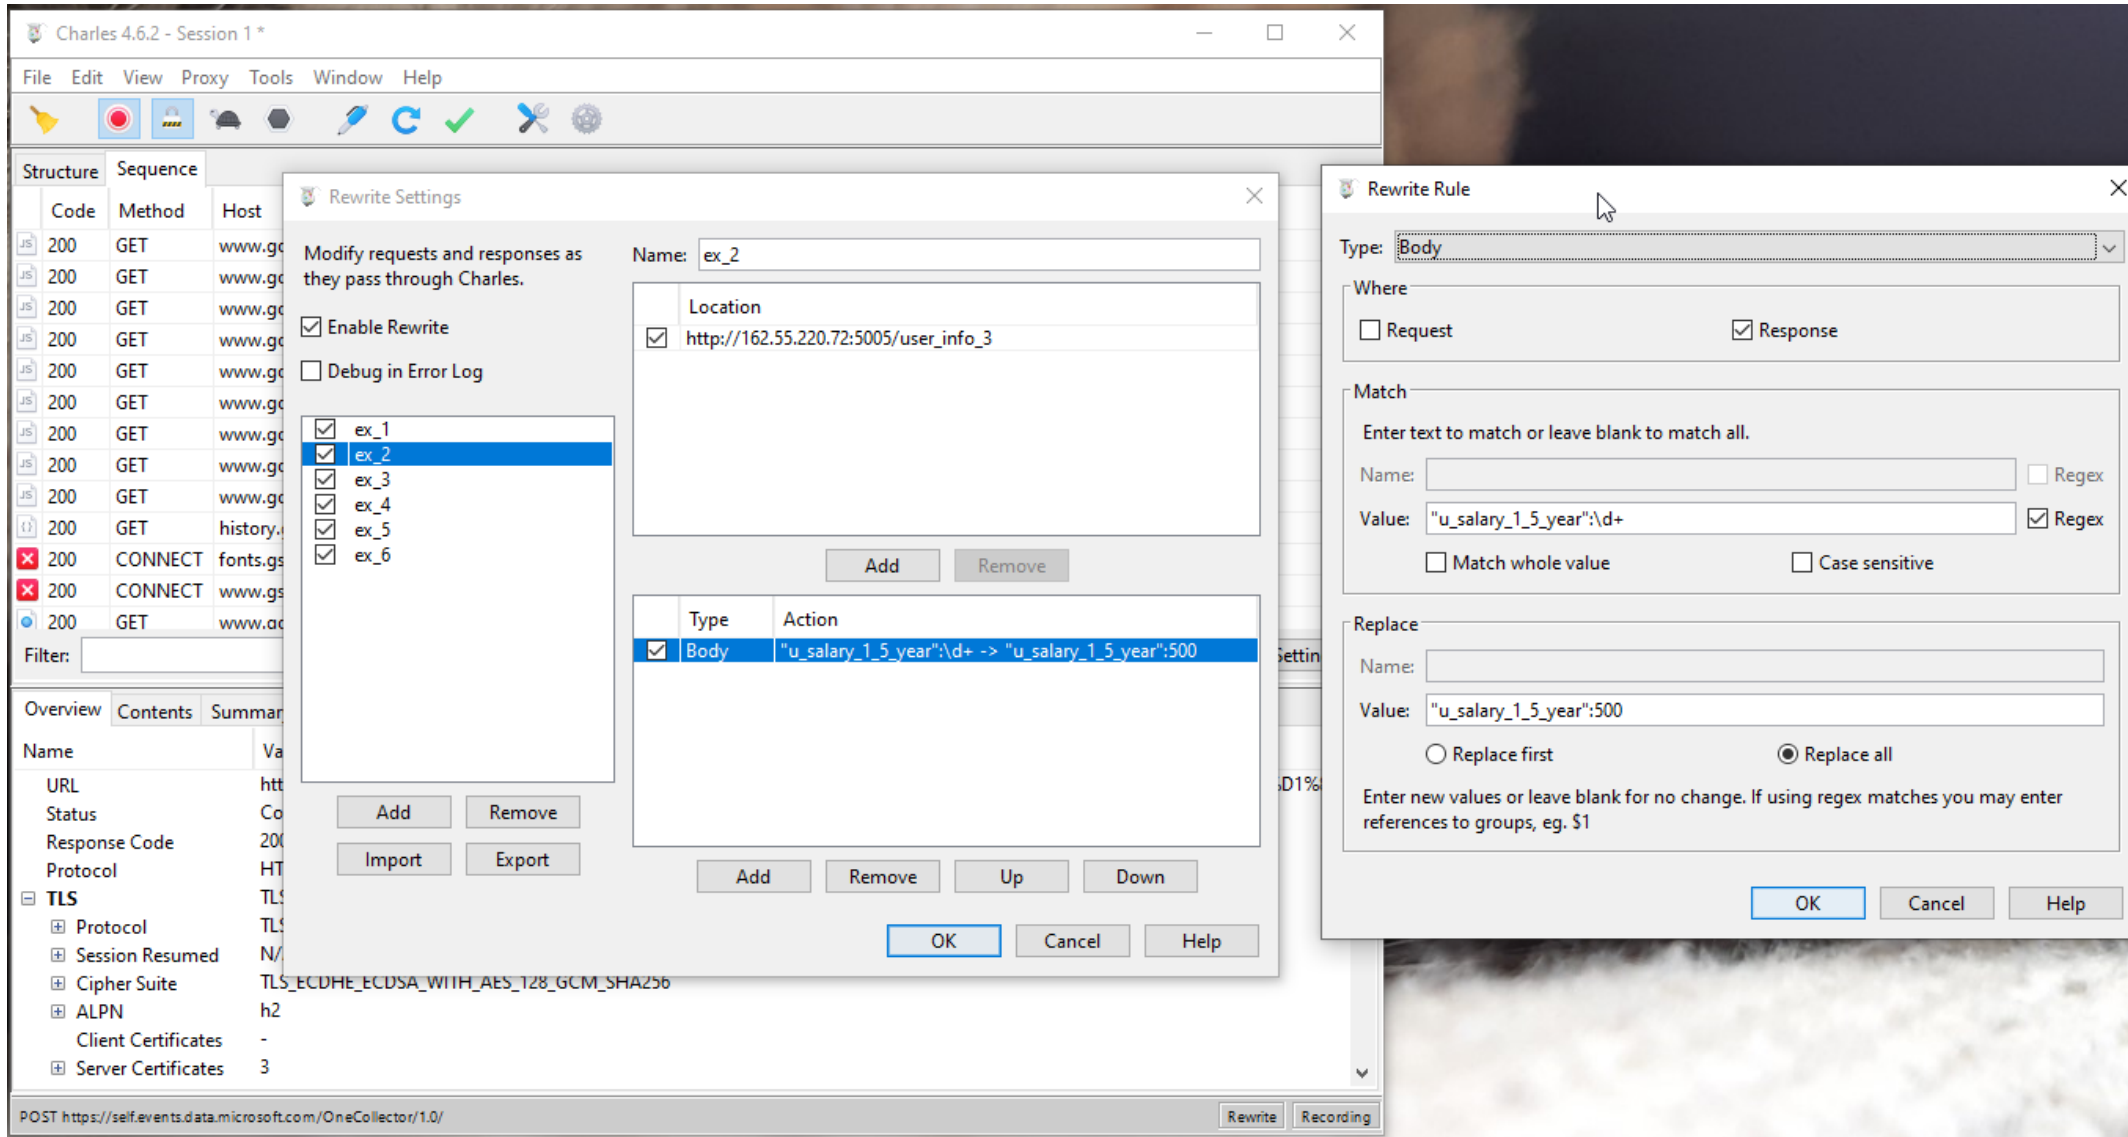

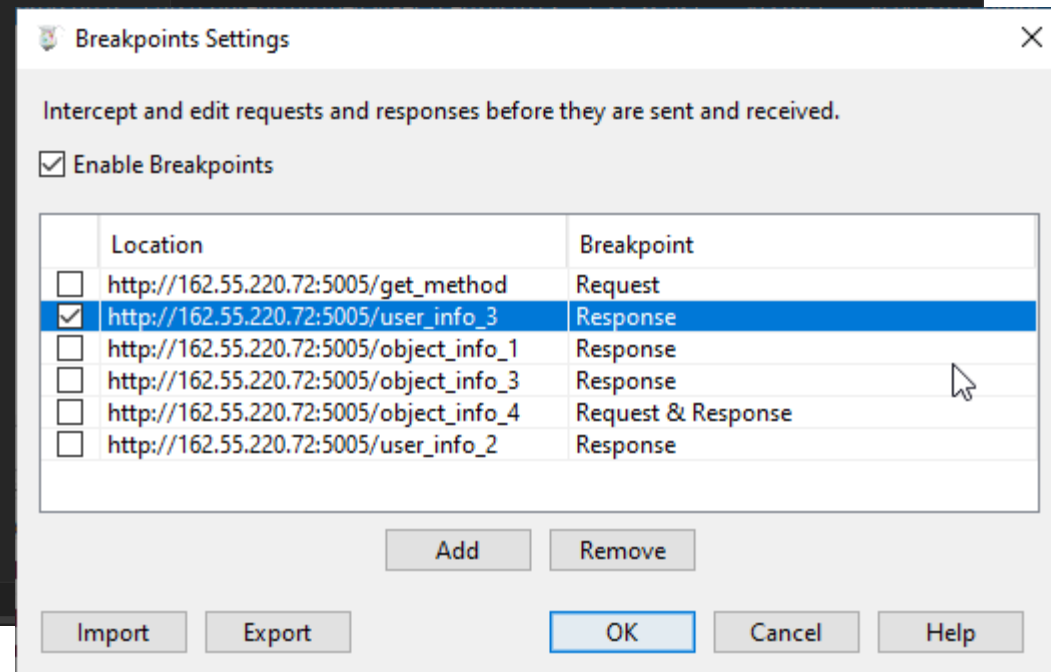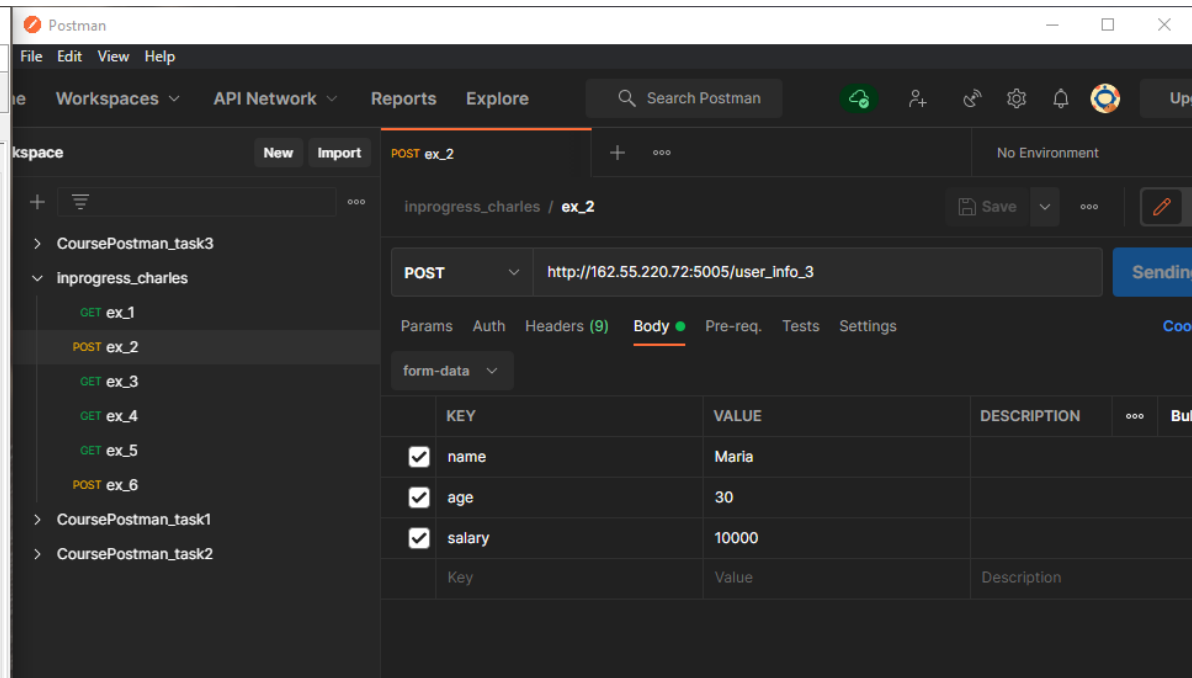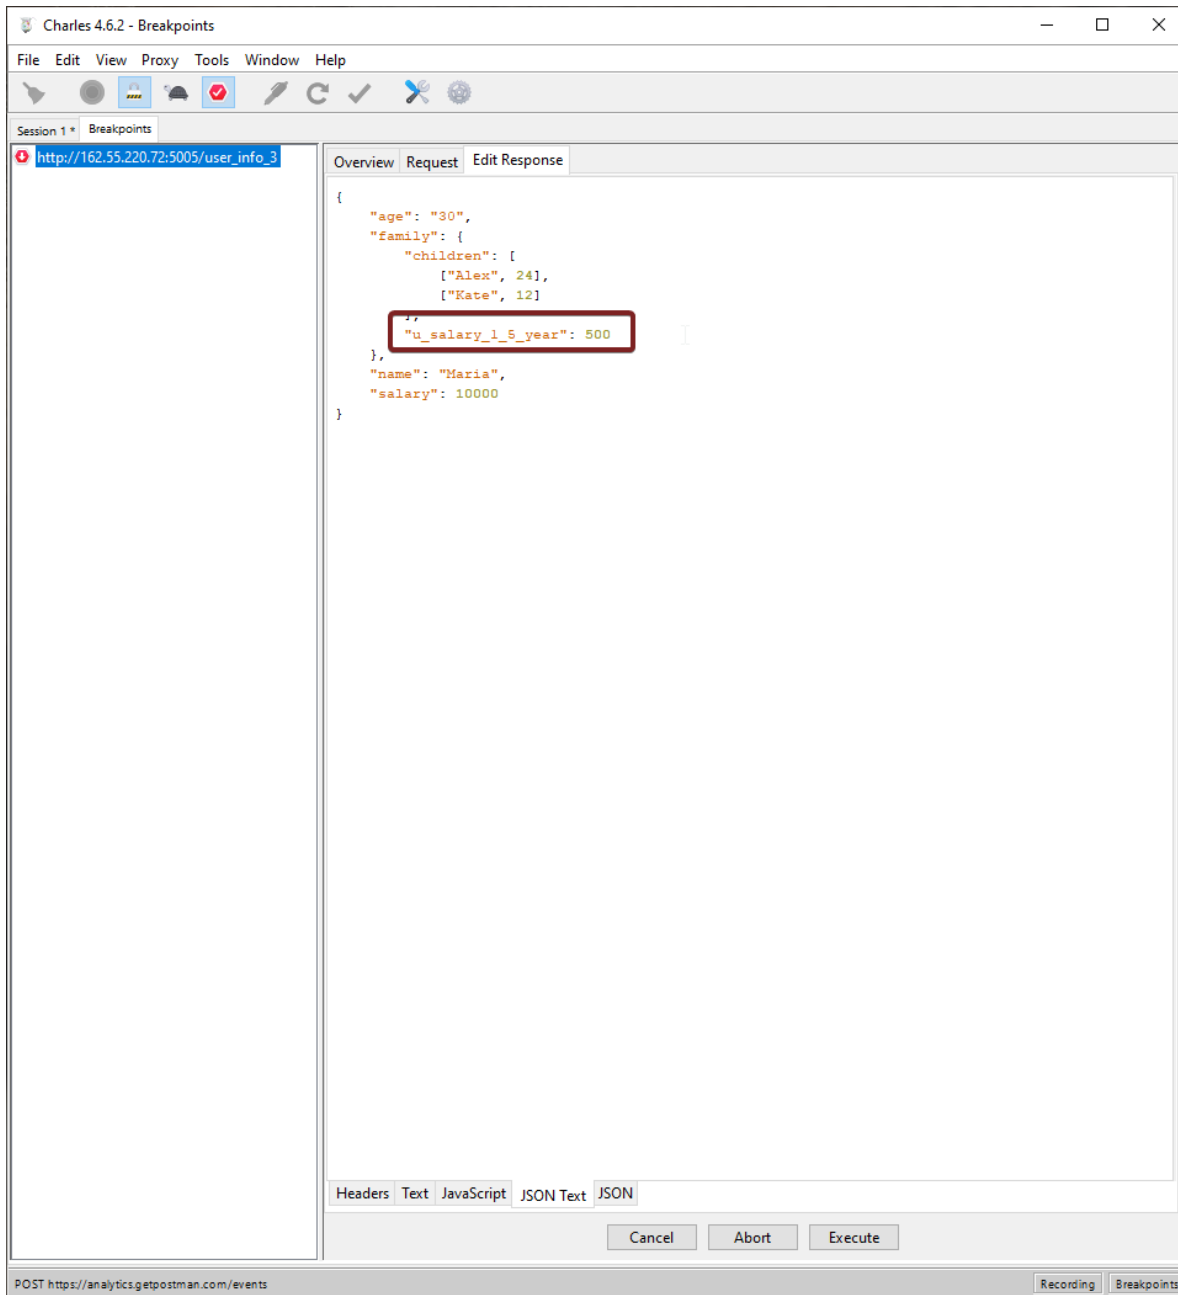

## Ex\_3

- Подменить параметры запроса в Charles так, чтобы в Postman пришел ответ где другое name, daily\_food > weight из запроса, а daily\_sleep < weight из запроса.

The screenshot shows the Charles 4.6.2 interface with two dialog boxes open. The 'Rewrite Settings' dialog is in the foreground, and the 'Rewrite Rule' dialog is in the background.




**Rewrite Settings Dialog:**

- Name:** ex\_3
- Location:** ☒ http://162.55.220.72:5005/object\_info\_1
- Enable Rewrite:** ☒
- Debug in Error Log:** ☐
- Rules:** A list of rules with checkboxes. 'ex\_3' is selected.
- Buttons:** Add, Remove, Import, Export, OK, Cancel, Help.

**Rewrite Rule Dialog:**


- Type:** Body
- Where:** ☐ Request, ☒ Response
- Match:**
  - Name:** (empty)
  - Value:** "daily\_food":0.96,"daily\_sleep":200.0,"name": "Maria"
  - Match whole value:** ☐ **Case sensitive:** ☐
- Replace:**
  - Name:** (empty)
  - Value:** "daily\_food":9000.96,"daily\_sleep":5.0,"name": "Anastasia"
  - Replace first:** ☐ **Replace all:** ☒
  - Enter new values or leave blank for no change. If using regex matches you may enter references to groups, eg. \$1**
- Buttons:** OK, Cancel, Help.

The background shows the Charles interface with a list of requests and responses. The status bar at the bottom indicates 'GET https://kv601.prod.do.dsp.mp.microsoft.com/all?doClientVersion=10.0.19041.1566&countryCode=RU&profile=256&CacheId=7'.

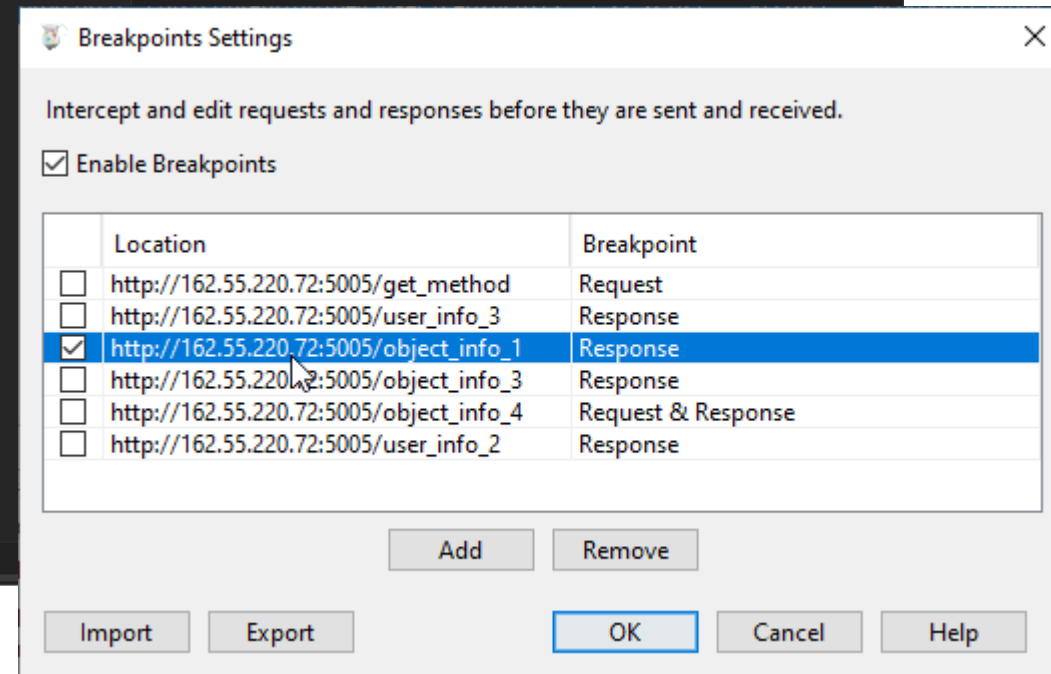
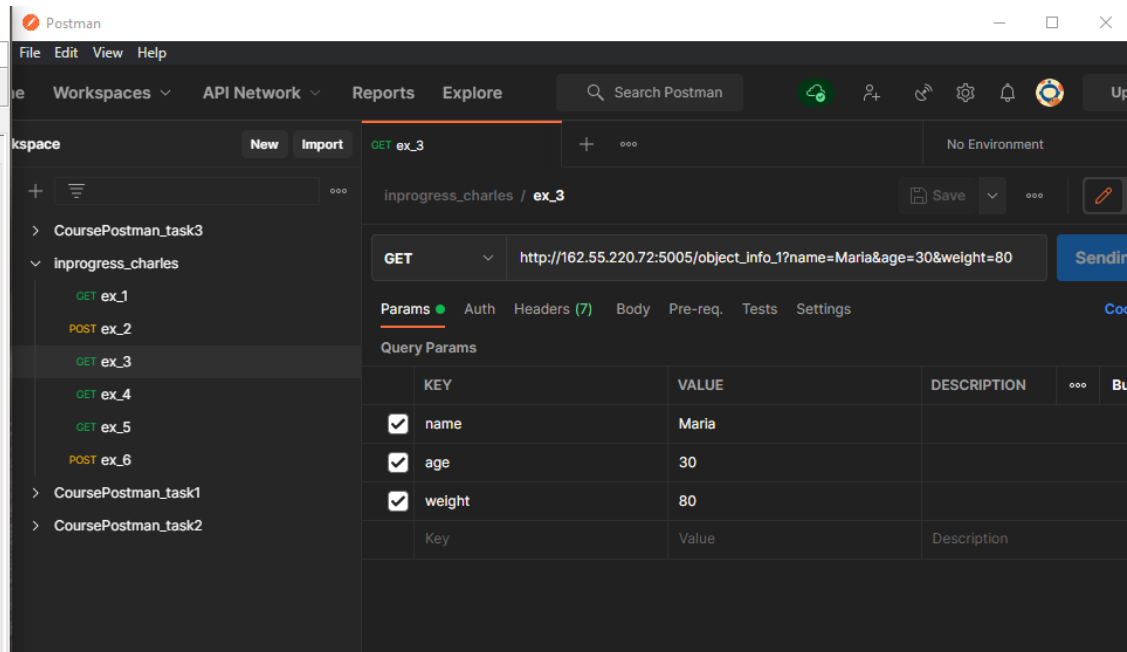
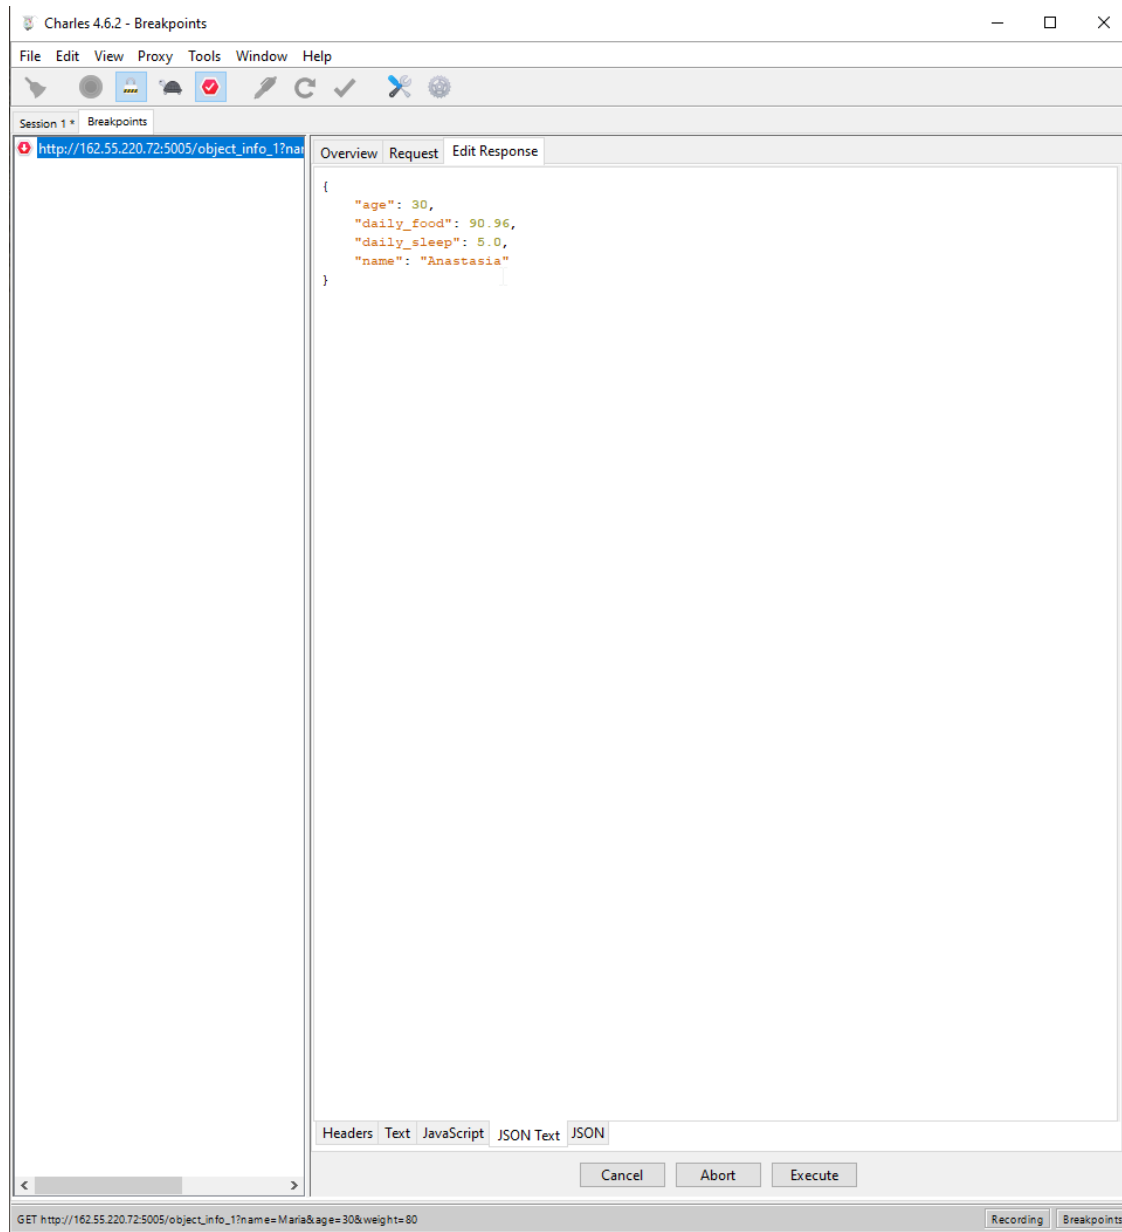


## Ex\_4

- Сделать через Charles так, чтобы сервер вернул 500 код.
- Сделать через Charles так, чтобы сервер вернул 405 код.

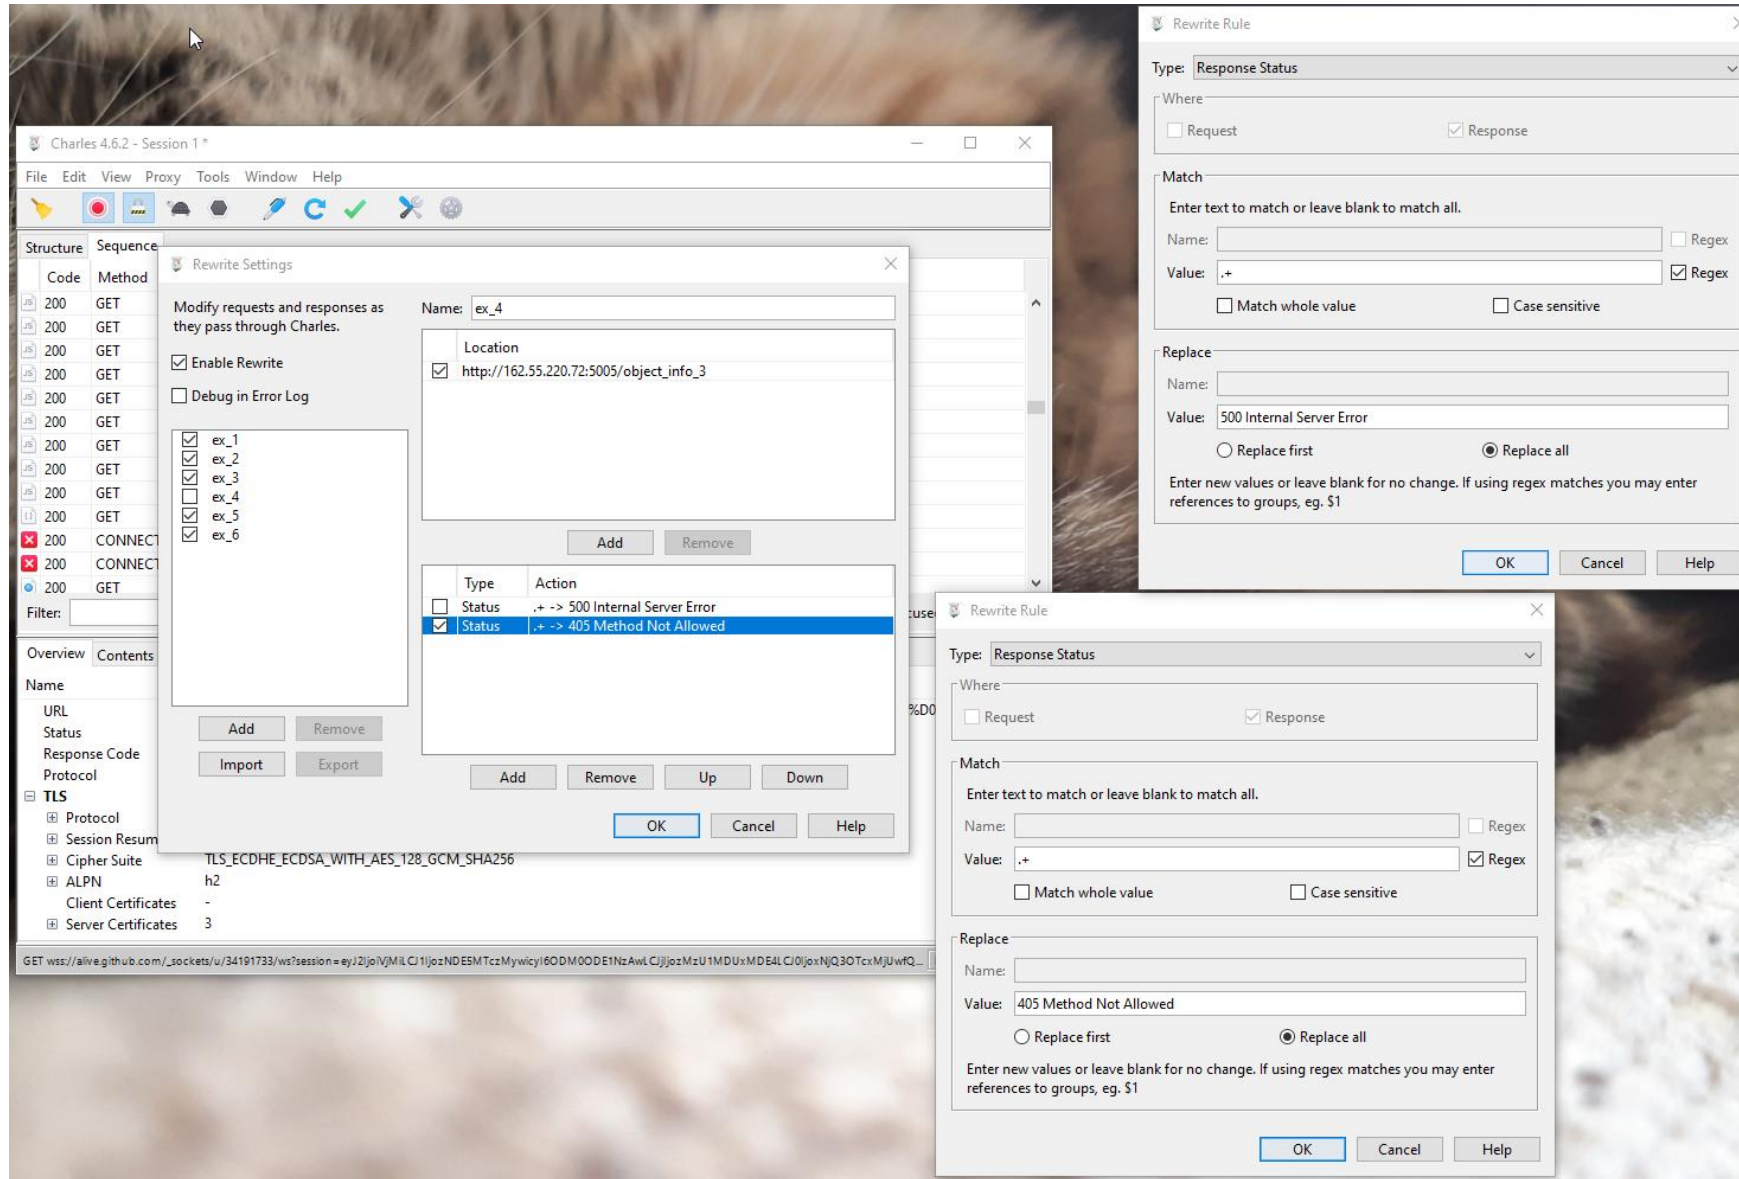






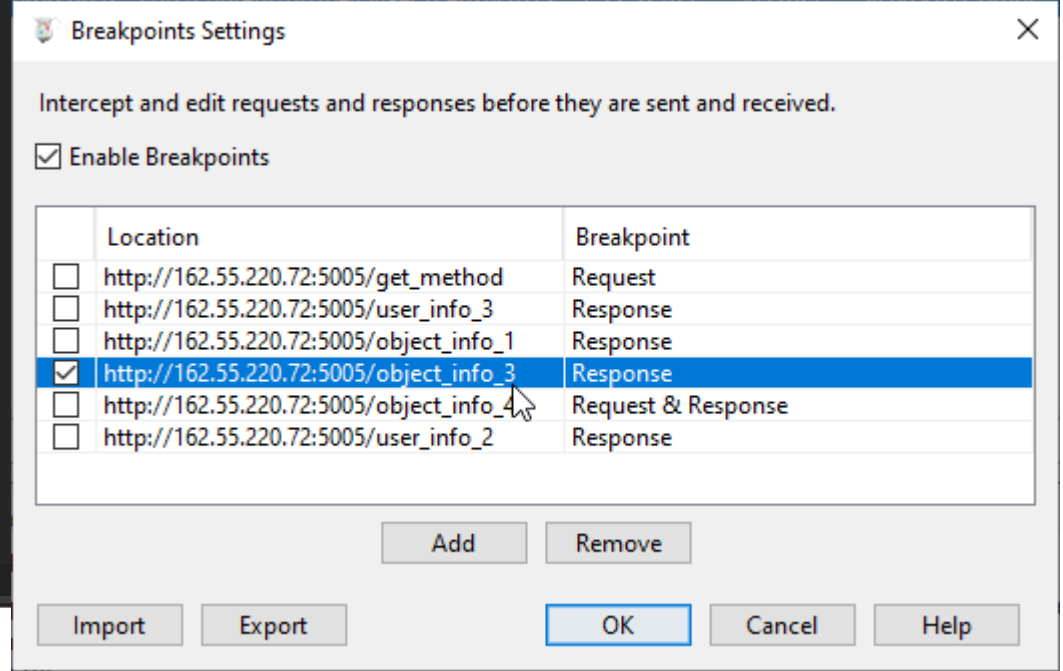
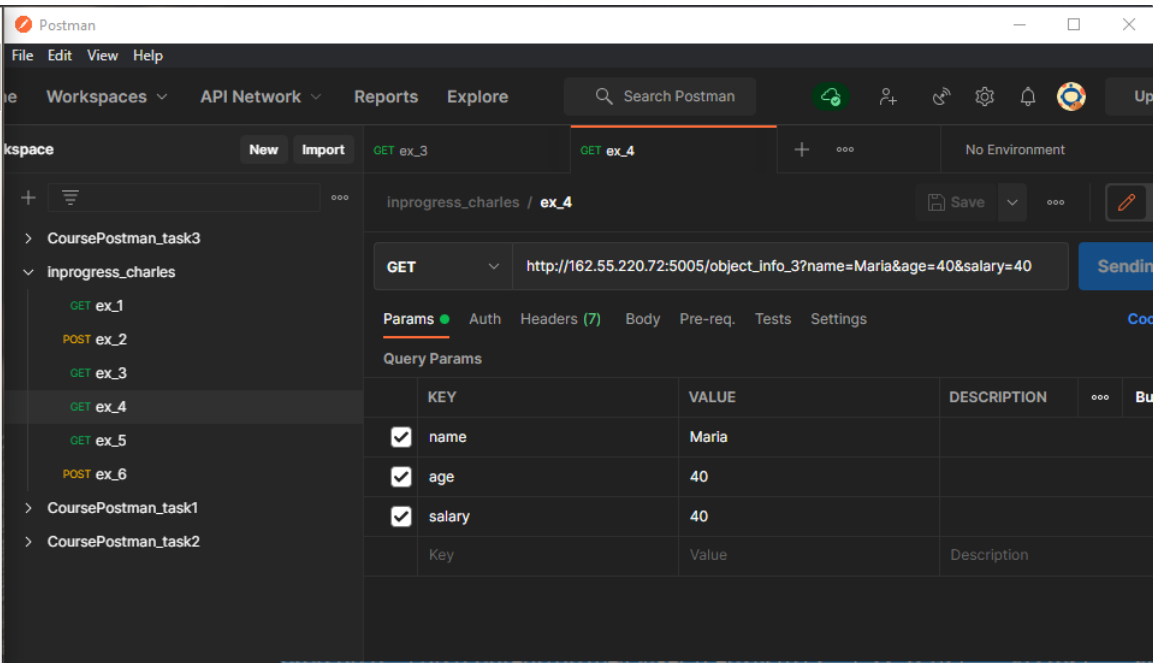
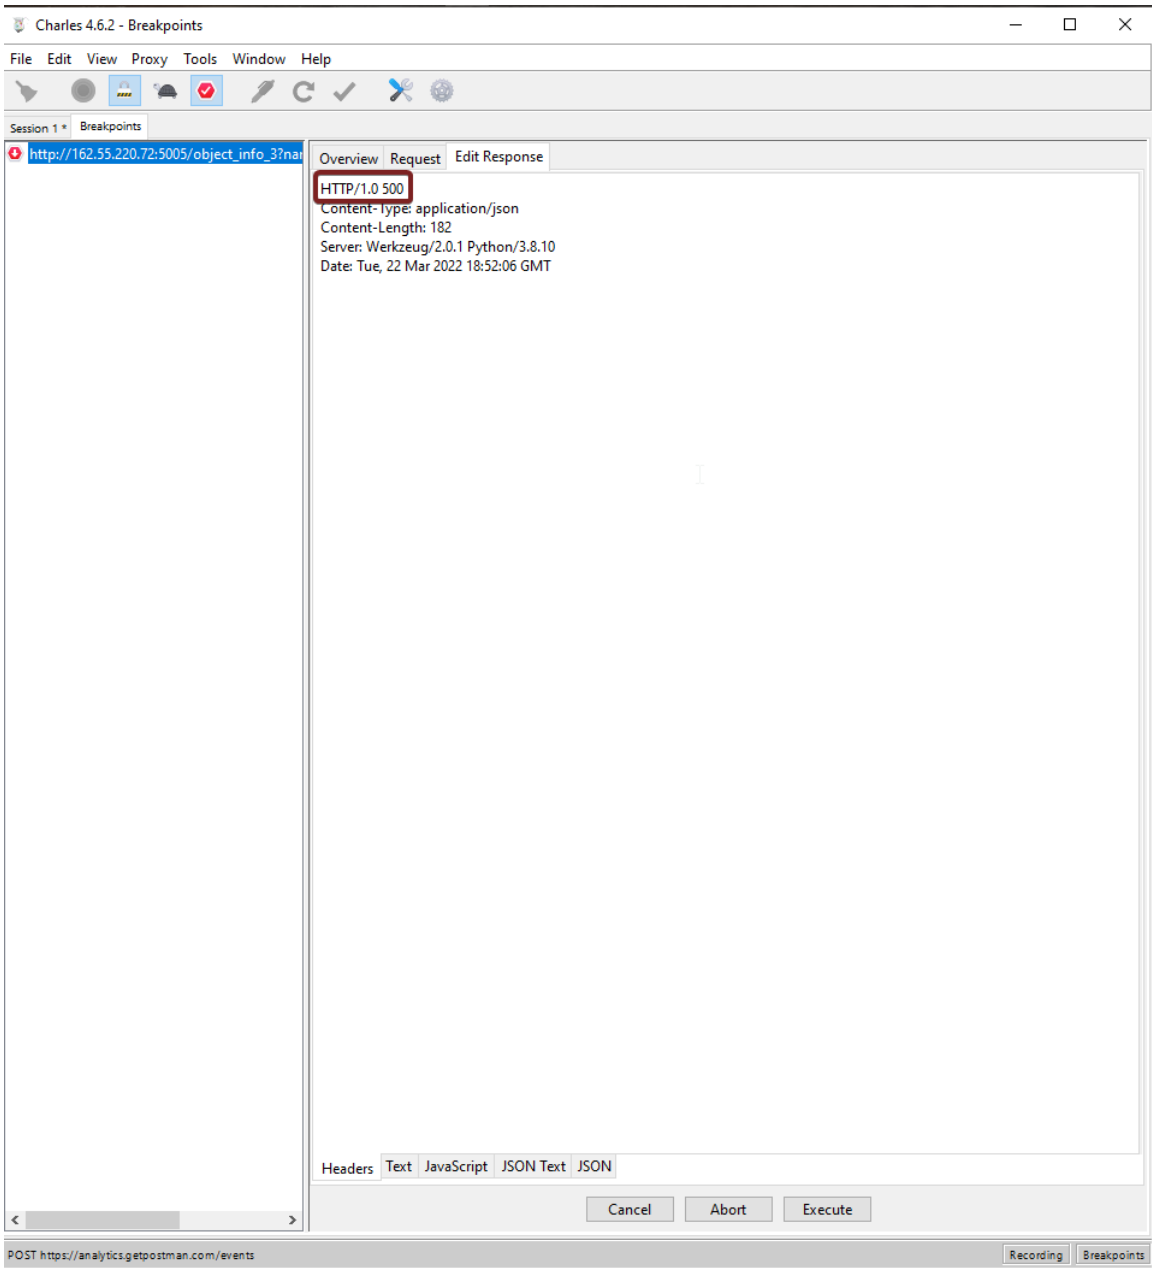




## Ex\_5

- Сделать через Charles так, чтобы сервер вернул 405 ошибку.
- Подменить salary в request
- Подменить (salary \* 2) в response

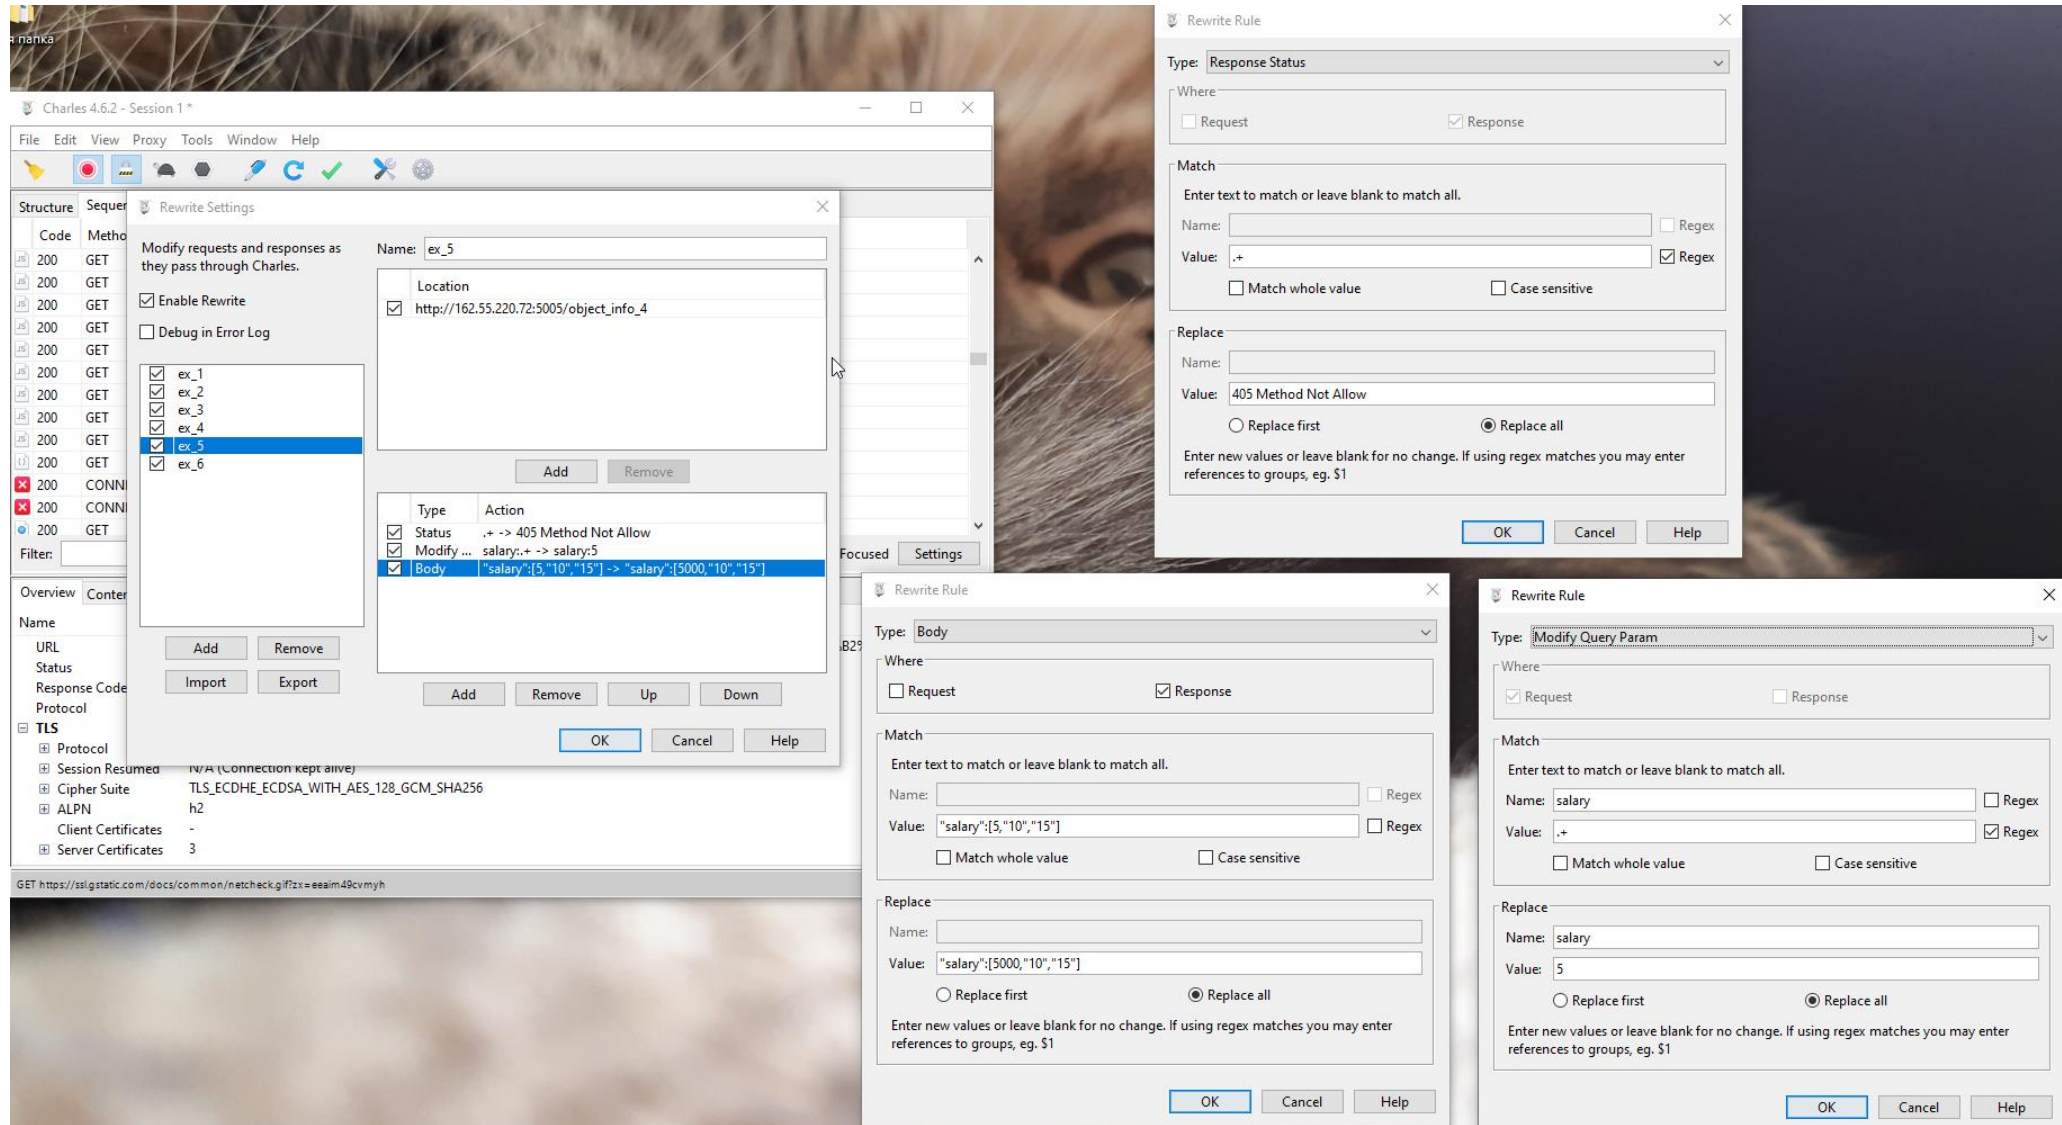

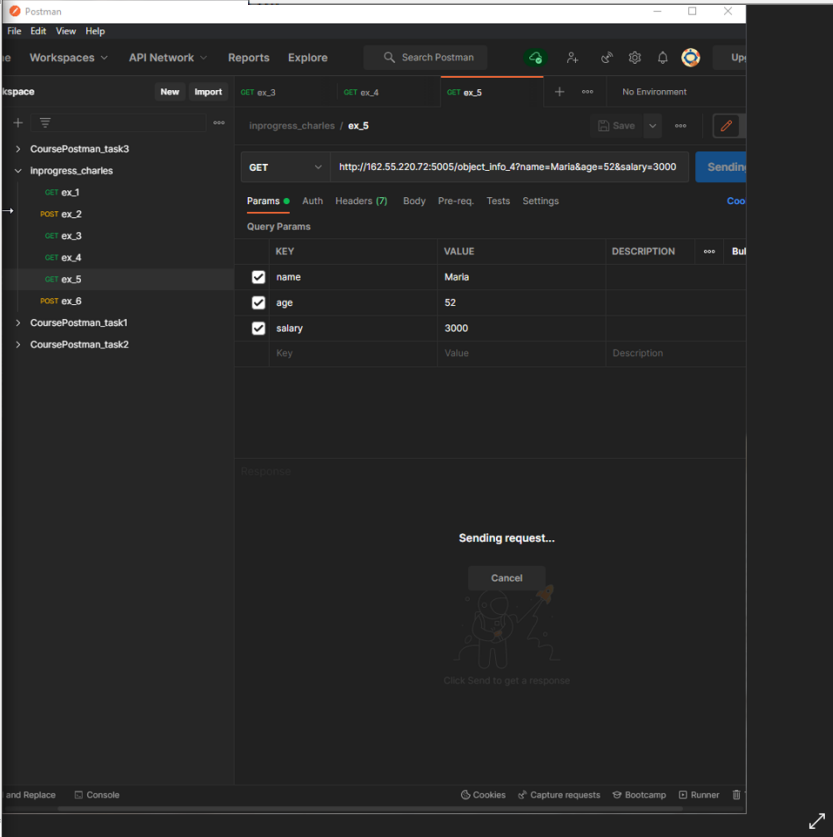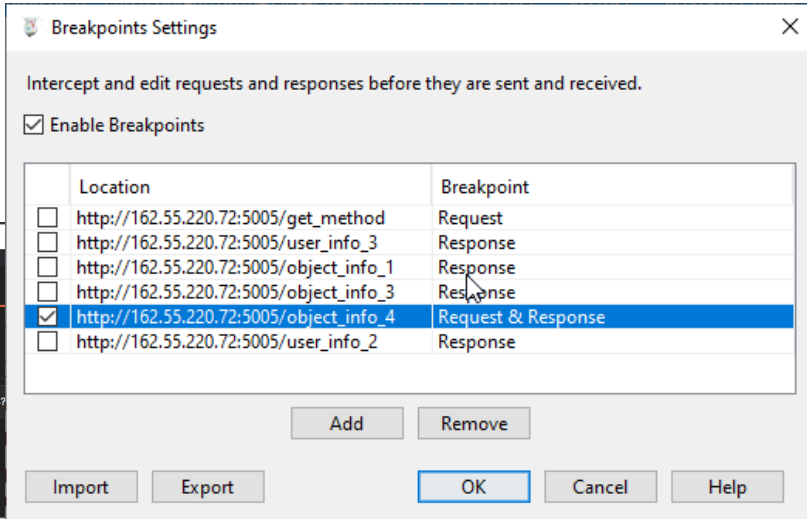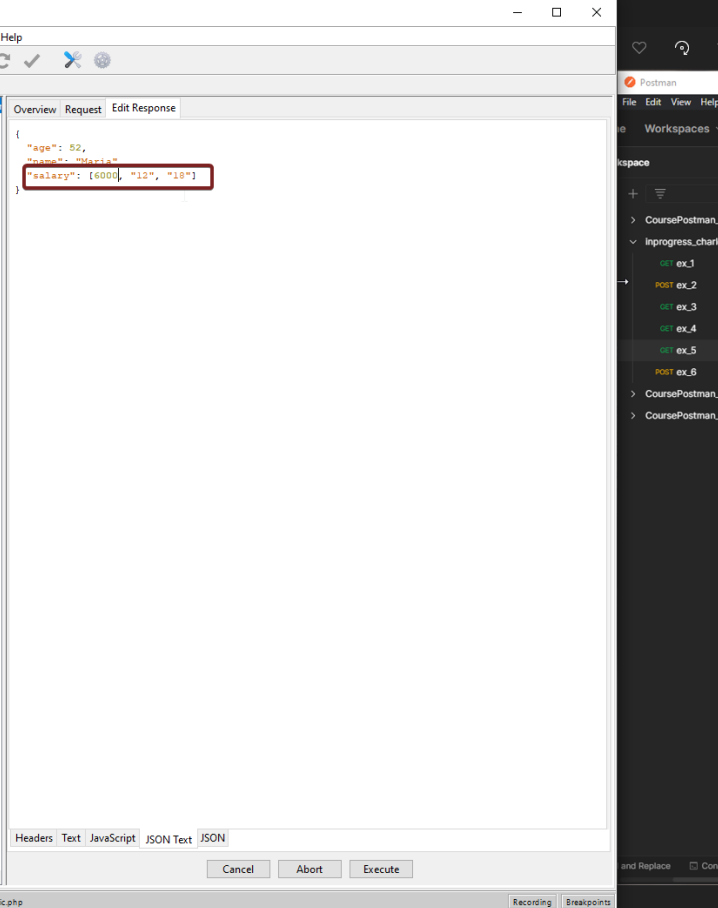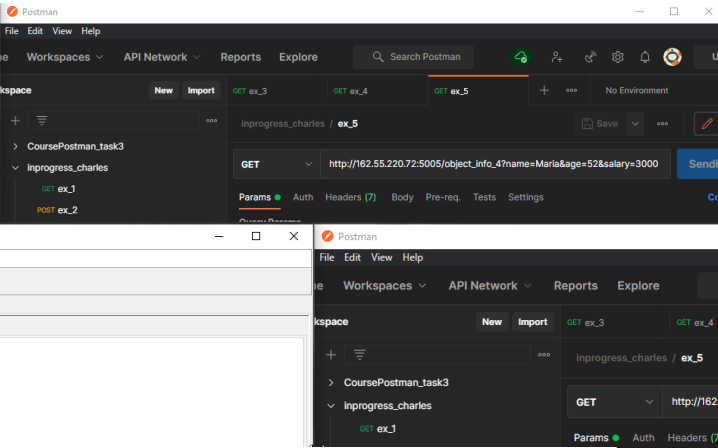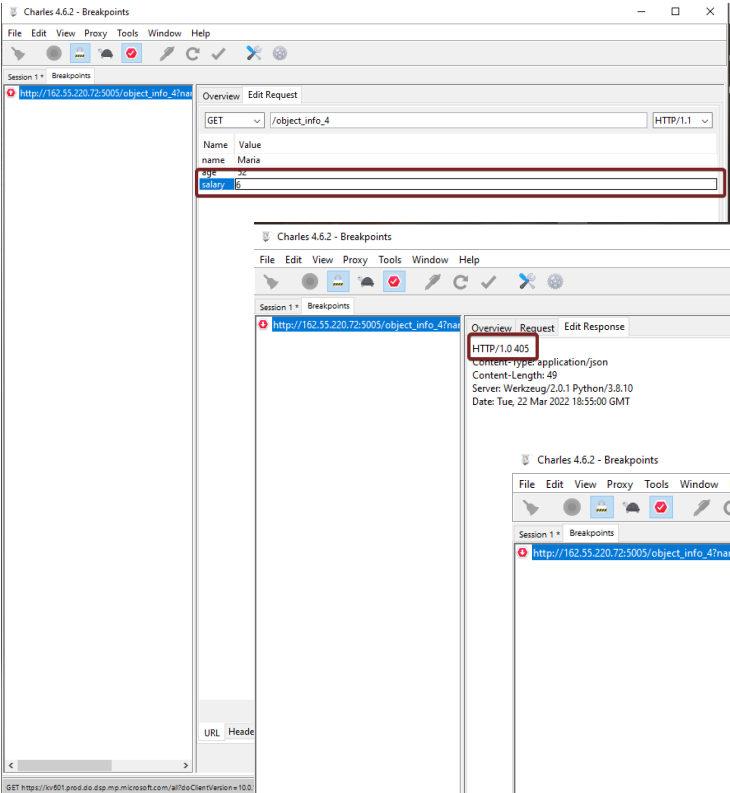

## Ex\_6

- Сделать через Charles так, чтобы в Postman вернулся ответ, в котором qa\_salary\_after\_1.5\_year переименовано в qa\_salary\_after\_1.5\_month
- Сделать так чтобы qa\_salary\_after\_3.5\_years было меньше qa\_salary\_after\_12\_months в response

