


# Git Version Control


# What is Version Control

Version Control is a system that documents changes made to a file or a set of files. It allows multiple users to manage multiple revisions of the same unit of information. It is a snapshot of your project over time.

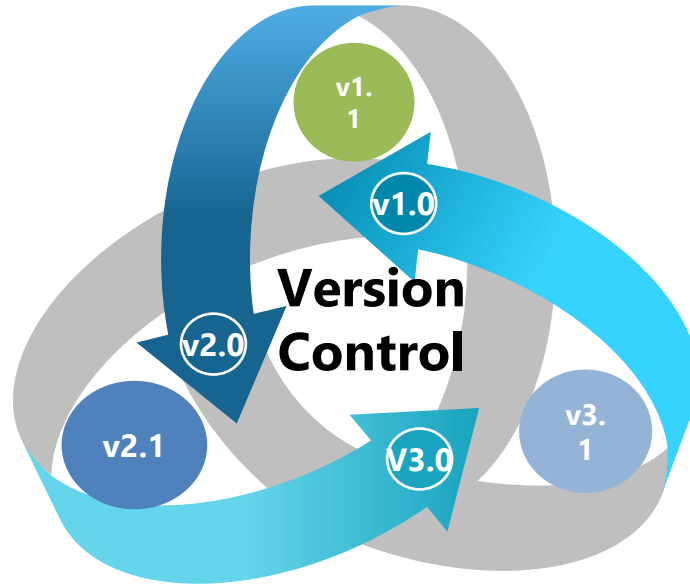

# What is Version Control

- Version Control is a system that documents changes made to a file or a set of files
- It allows multiple users to manage multiple revisions of the same unit of information
- It is a snapshot of your project over time

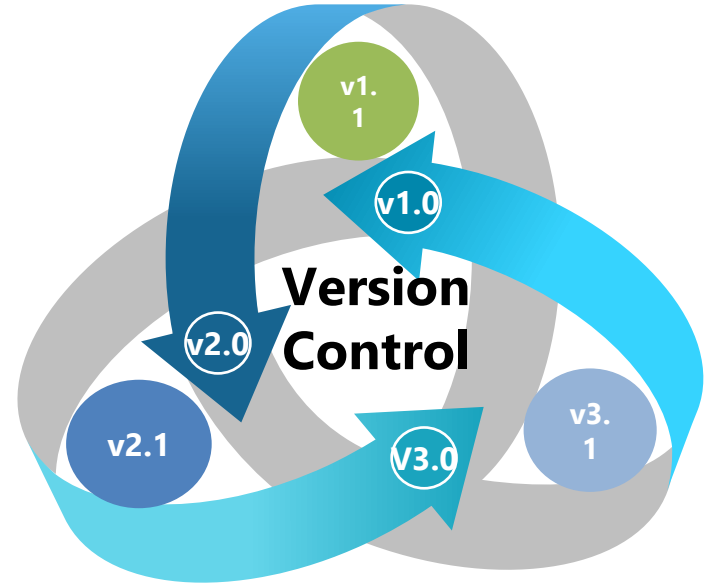


Git is an open source Distributed Version Control System(DVCS) which records changes made to the files laying emphasis on **speed, data integrity** and **distributed, non-linear workflows**




# Git Workflow

- Use Git workflow to manage your project effectively
- Working with set of guidelines increases Git's consistency and productivity

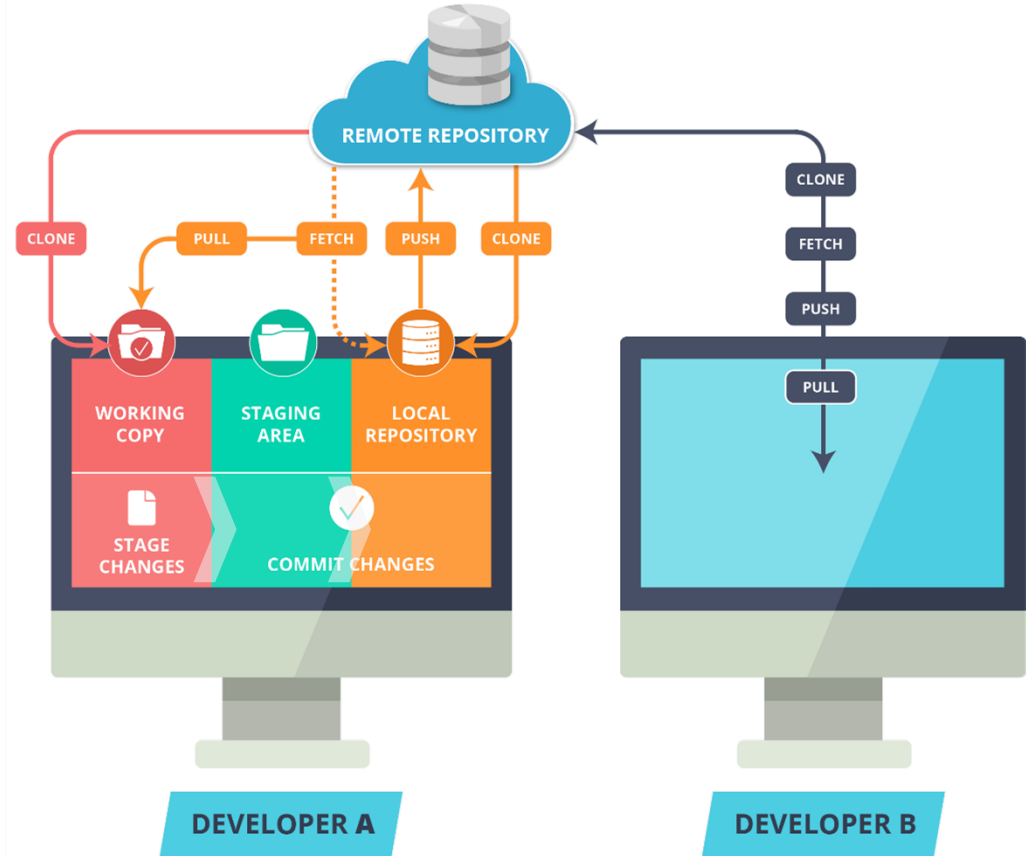


# Git Workflow

- The Remote Repository is the server where all the collaborators upload changes made to the files

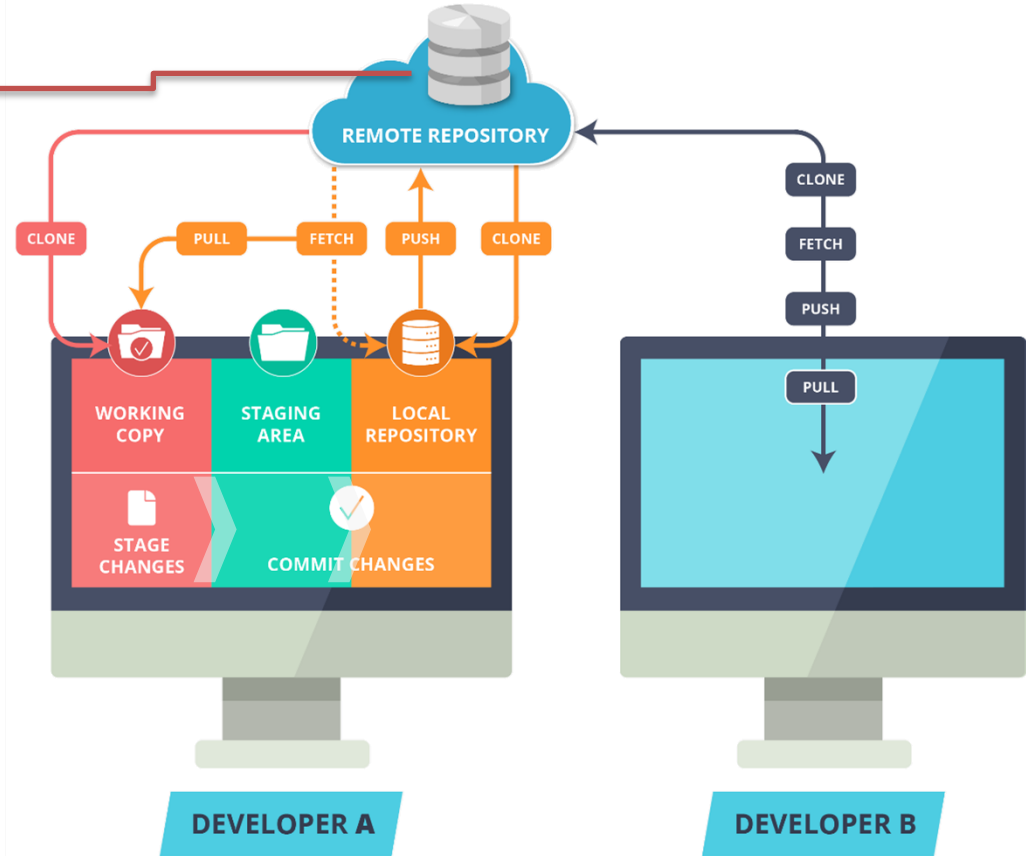


# Git Workflow

- “**Local Repository**” is user’s copy of the Version Database
- The user accesses all the files through local repository and then push the change made to the “**Remote Repository**”

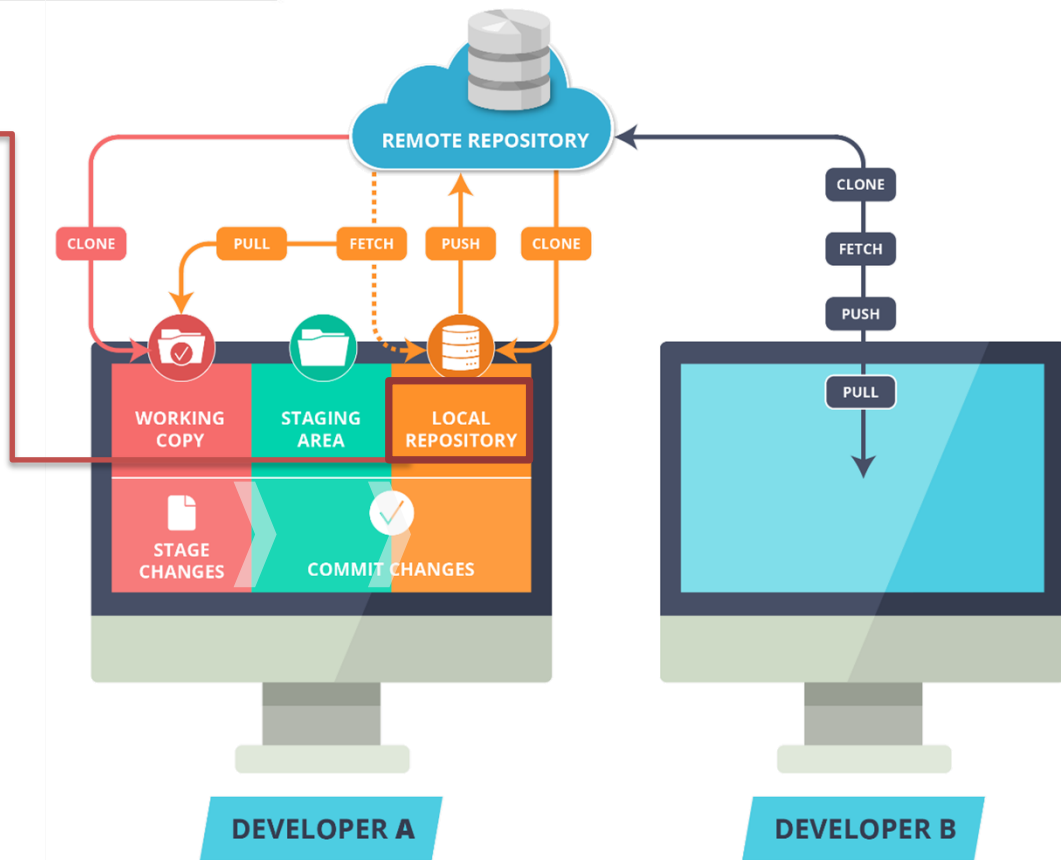

# Git Workflow


- **“Workspace”** is user's active directory
- The user modifies existing files and creates new files in this space. Git tracks these changes compared to your Local Repository

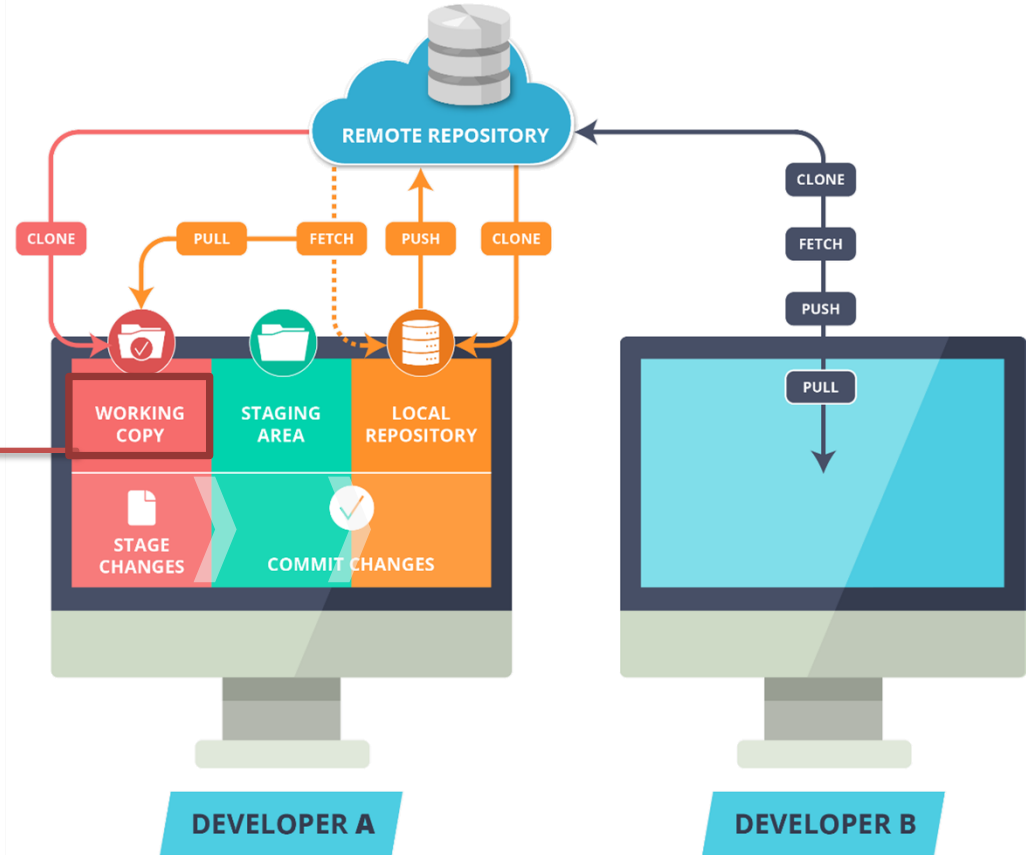




# Git Workflow

- Stage is a place where all the modified files marked to be committed are placed.

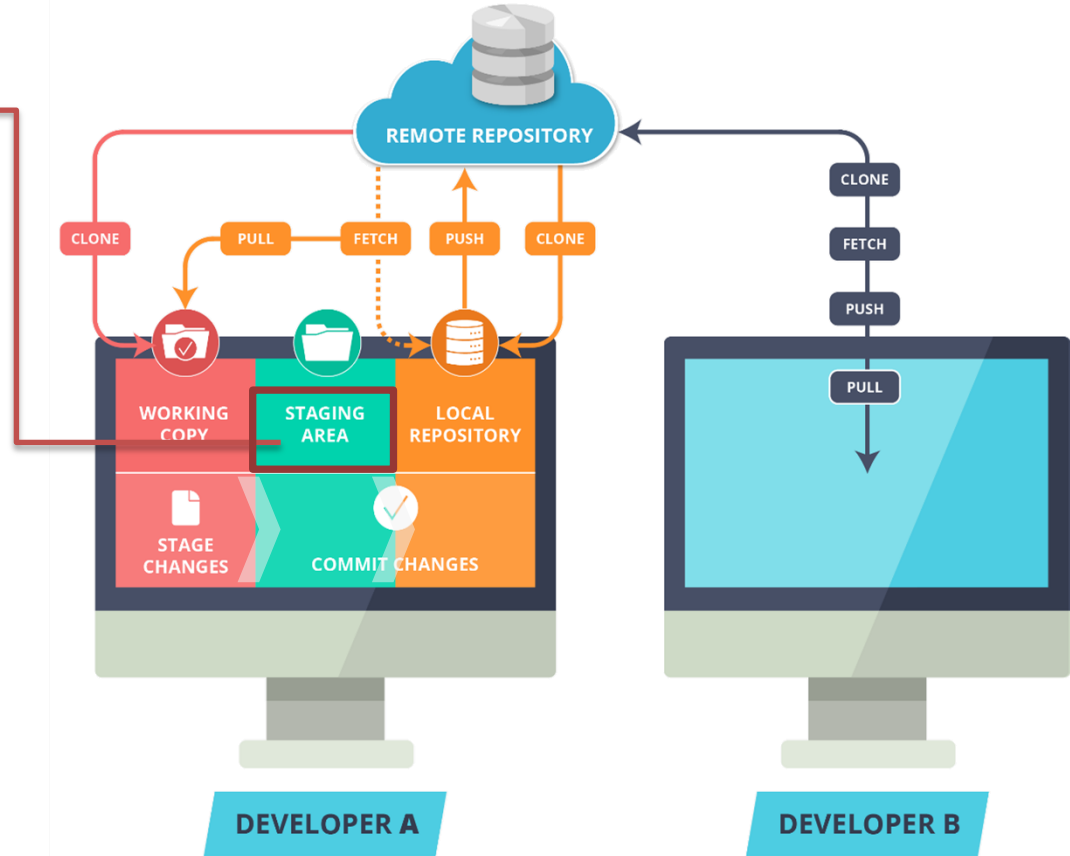


# Git Workflow

- Clone command creates a copy of an existing Remote Repository inside the Local Repository.

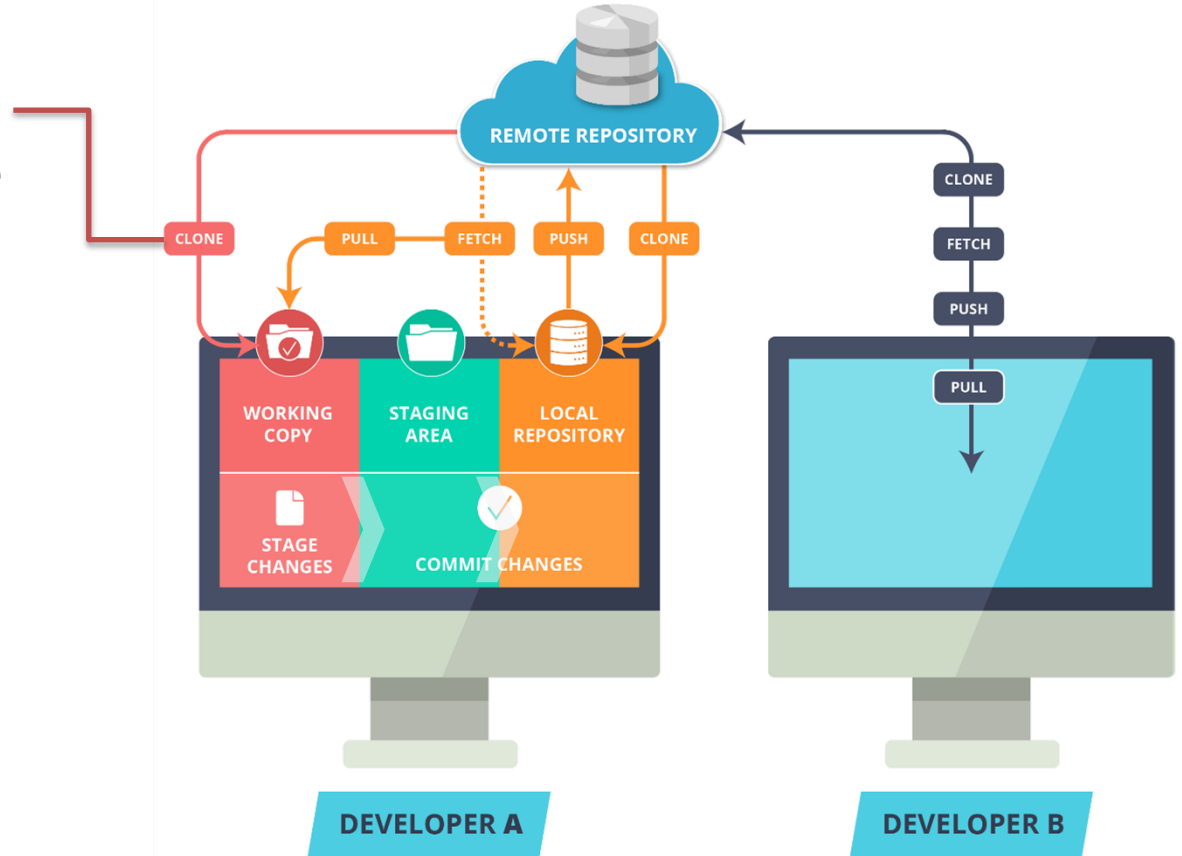


# Git Workflow

- Commit command commits all the files in the staging area to the local repository.

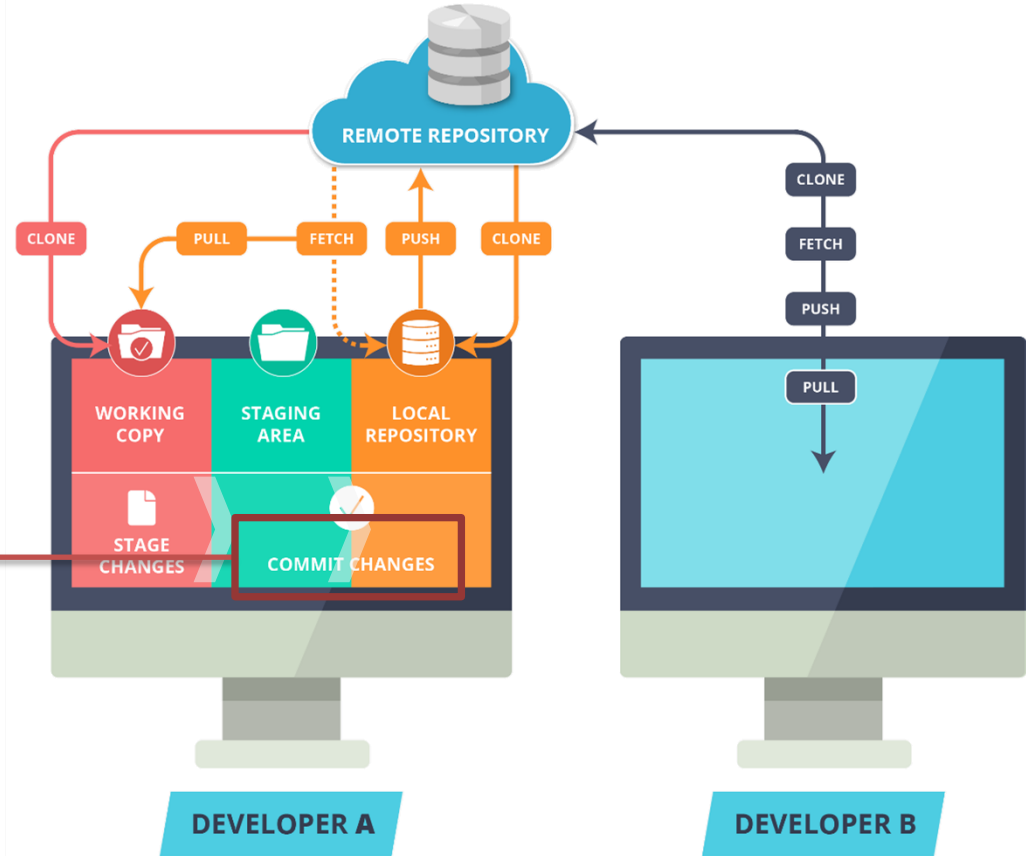


# Git Workflow

- Push command pushes all the changes made in the Local Repository to the Remote Repository

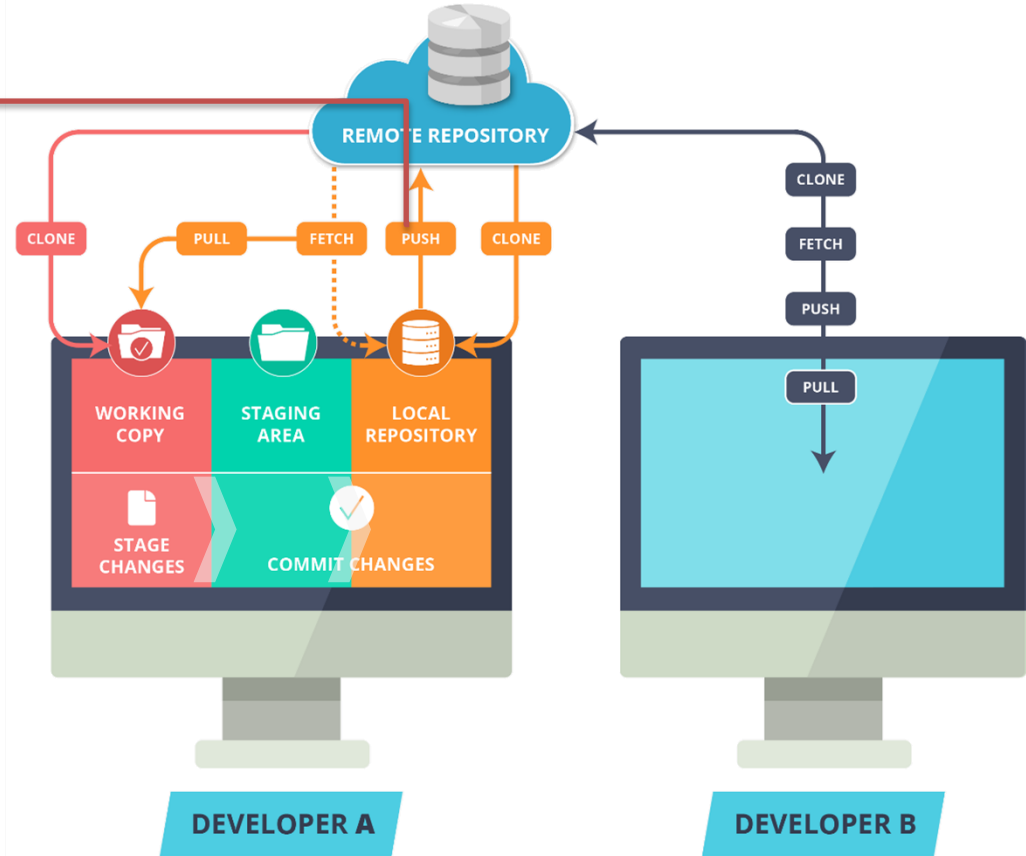


# Git Workflow

- Fetch command collects the changes made in the Remote repository and copies them to the Local Repository. This command doesn't affect our Workspace.

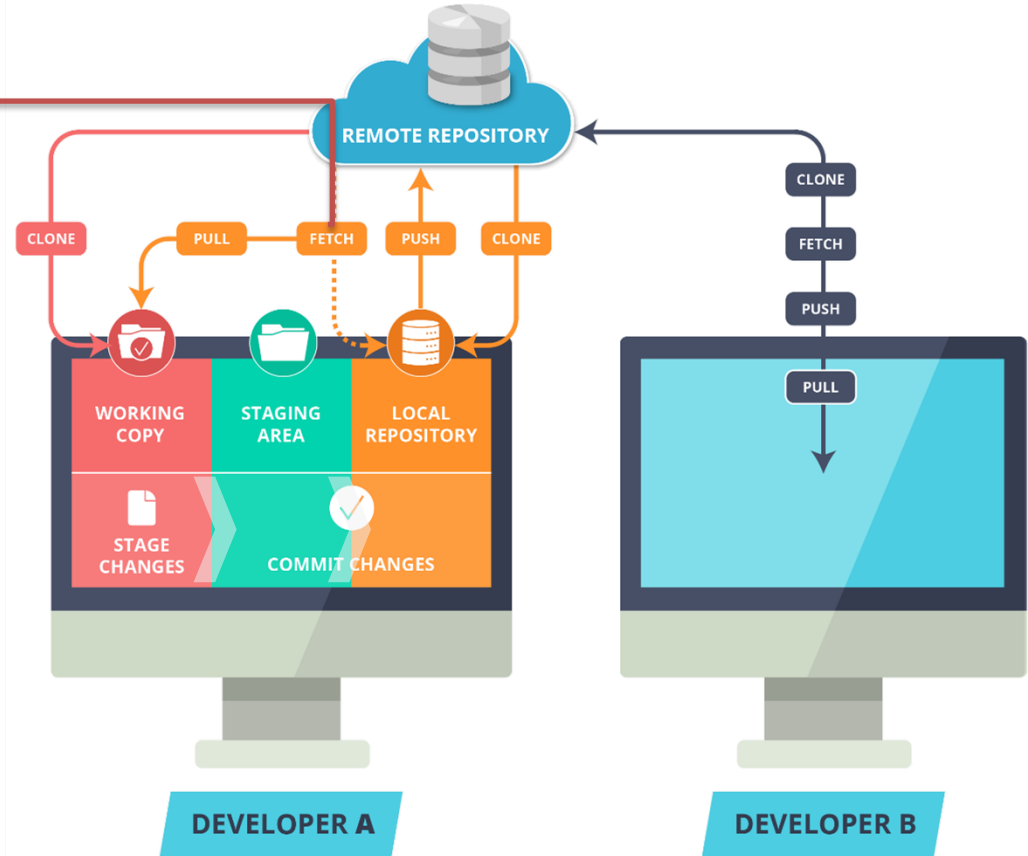

# Git Workflow

- Pull like Fetch, gets all the changes from the remote repository and copies them to the Local Repository
- Pull merges those changes to the current working directory

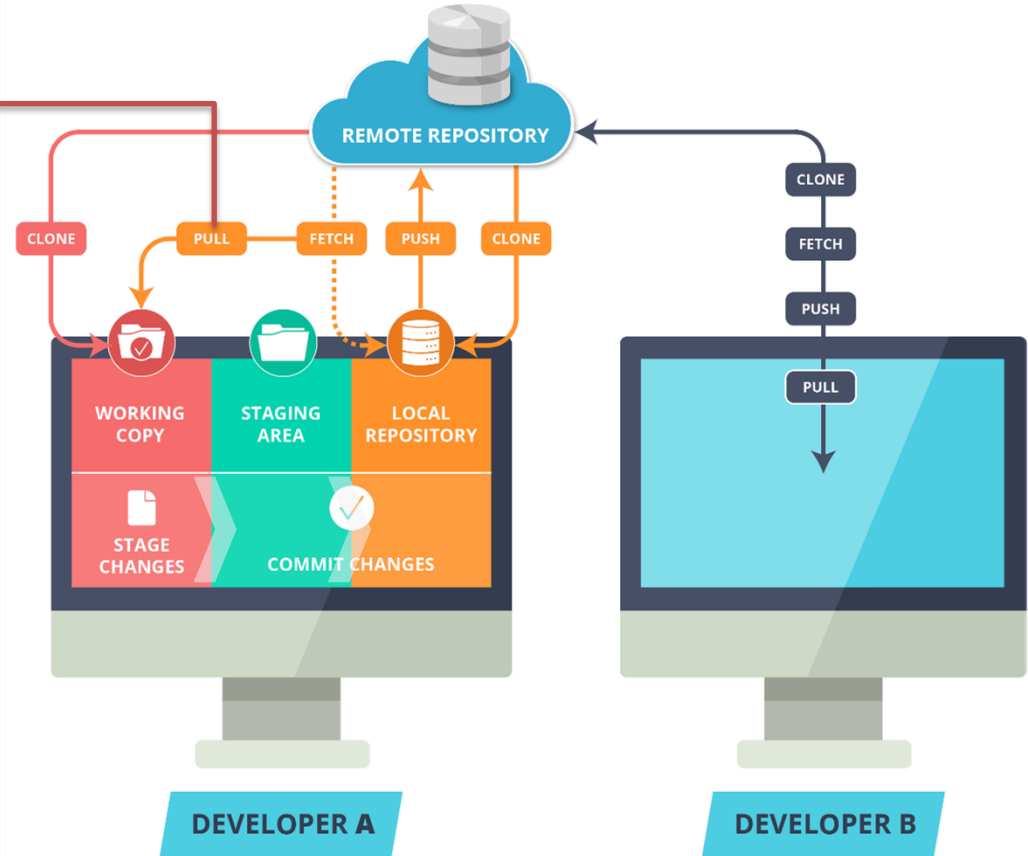

## Installing Git

- To install Git on your Linux Machine you can type in the following command in Terminal:

```
Syntax: sudo apt-get install git
```

- For Windows download the installer from <http://git-scm.com>

## Setting up Git User

- Set up username for your repository

Syntax: `git config --global user.name "username"`

- Set up user-email for your repository

Syntax: `git config --global user.email "useremail@example.com"`



## Initialize a Git Repository

- Select or create the Directory where you want to initialize Git
- **Initialize Git** in the Directory

Syntax: `git init`

## Adding Files & Checking Status

- To **add** a file to the **staging area**

Syntax: `git add <filename>`

- To check the working tree **status**

Syntax: `git status`

## Committing Changes

- To **commit** the **staged** files to you **local repository**:

Syntax: `git commit`

## Tracking Changes

- The git **diff** command displays all the changes made to the **tracked** files

Syntax: `git diff`

## Staging & Committing Multiple Files

- To **stage and commit** multiple files at once we use -a flag with the commit command
- Commit with -a flag automatically stages all the modified files and commits changes to the local repository

Syntax: `git commit -a -m 'message'`

## Staging & Committing Multiple Files

- The **git rm** command deletes the file from git repository as well as users system

Syntax: `git rm <filename>`

- To remove the file from git repository but not from the system **--cached** option


Syntax: `git rm --cached <filename>`

- An error shows up if you try to delete a staged file
- You can force remove a staged file by using **-f** flag

Syntax: `git rm -f <filename>`

## Creating a Gitignore File

- You can create a **.gitignore** file and add all the untracked files you want Git to ignore

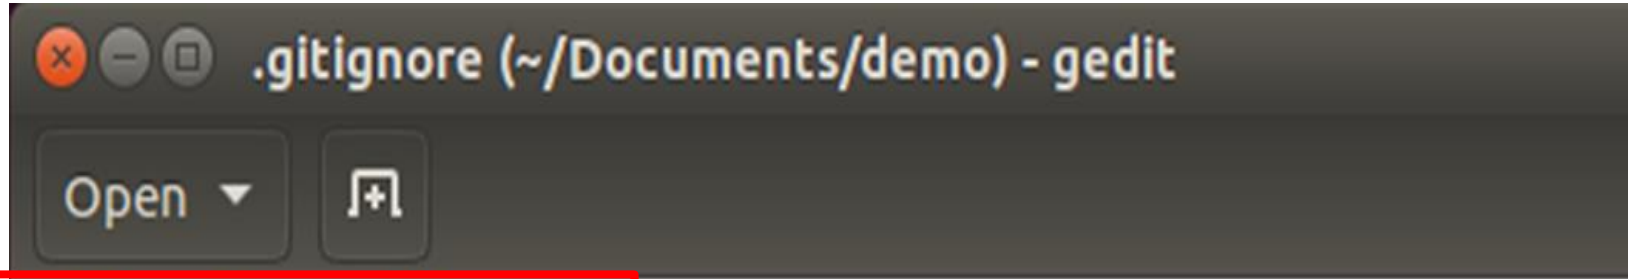

#all .class files

\*.class

Comments can be  
made using #

You can add file names or ignore  
a specific type of file as shown in  
the example

- The **git log** command shows all the commits so far on the current branch

Syntax: `git log`

- The **git log --oneline** command shows only one line for all the commits so far on the current branch

Syntax: `git log --oneline`

Syntax: `git log --oneline --decorate --graph`



- Commit tags provide an alias for commitID

Syntax: `git tag --a <annotation> --m <message>`

- You can also view all the tags you have created

Syntax: `git tag`

## Git Tag

- To give a commit in history, a tag

Syntax: `git tag --a <annotation> <commit id> --m <message>`

- Commit id can be obtained from git logs
- All these tags can be viewed in git

Syntax: `git show <tag-name>`

## Commit Tag

- To give a commit in history, a tag


Syntax: `git tag --a <annotation> <commit id> --m <message>`

- Commit id can be obtained from git logs
- All these tags can be viewed in git

Syntax: `git show <tag-name>`


## Remote Repository

Mostly the users work on a local repository. But in order to collaborate with other people, we use a remote repository. A remote repository is place where the users upload and share their commits with other collaborators.

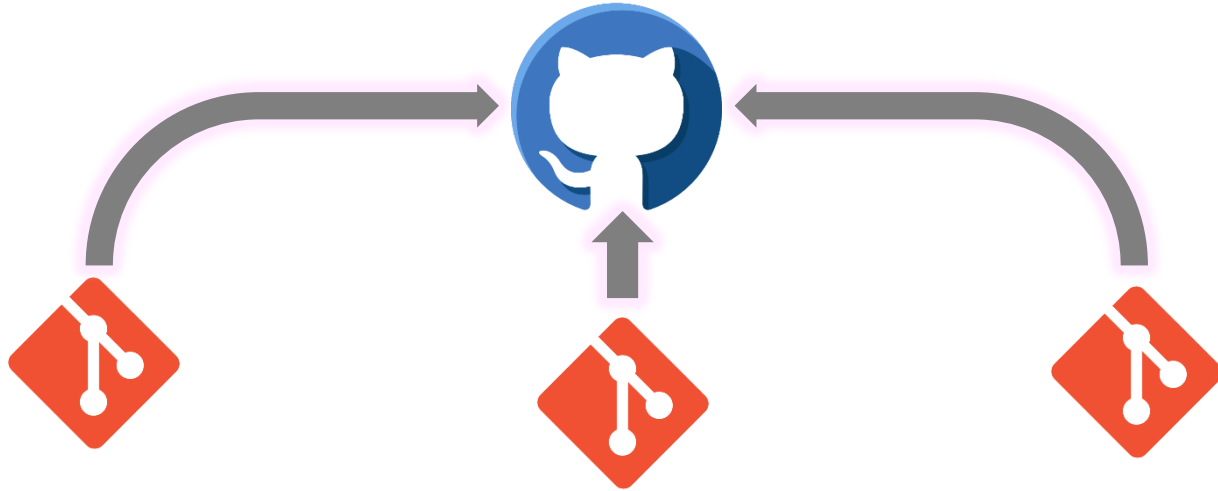


## Creating a Remote Repository

- Sign-up at **github.com**
- Click on New repository to create a new repository

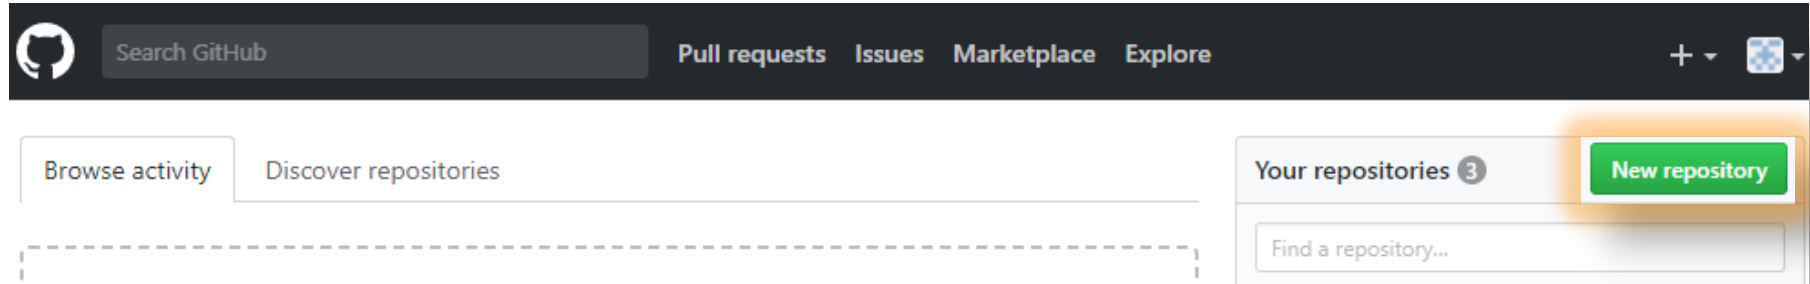

# Creating a Remote Repository

- Under **Repository name**, give a name to your repository
- Give some Description about your repository under **Description** section.

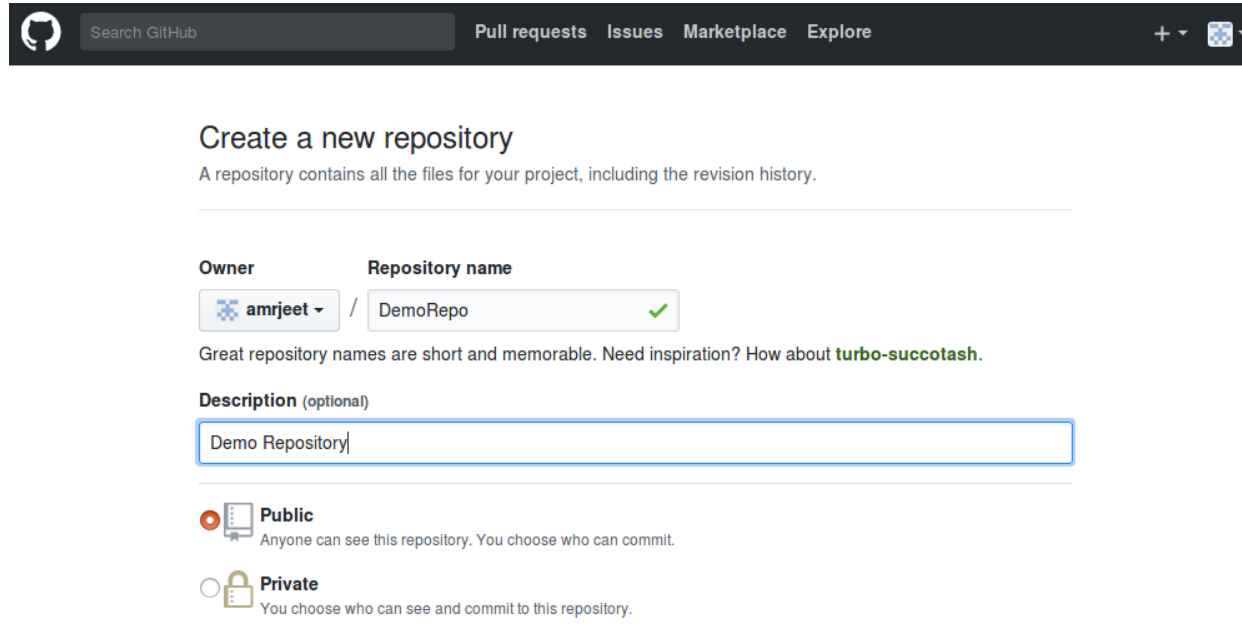

The screenshot shows the GitHub interface for creating a new repository. At the top is a dark navigation bar with the GitHub logo, a search bar labeled 'Search GitHub', and links for 'Pull requests', 'Issues', 'Marketplace', and 'Explore'. Below this is the main content area titled 'Create a new repository' with a subtitle 'A repository contains all the files for your project, including the revision history.' The form has two main sections: 'Owner' and 'Repository name'. The 'Owner' section shows a dropdown menu with 'amrjeet' selected. The 'Repository name' section shows a text input with 'DemoRepo' and a green checkmark. Below these is a hint: 'Great repository names are short and memorable. Need inspiration? How about turbo-succotash.' The 'Description (optional)' section has a text input with 'Demo Repository'. At the bottom, there are two radio button options: 'Public' (selected) and 'Private'. The 'Public' option is accompanied by a document icon and the text 'Anyone can see this repository. You choose who can commit.' The 'Private' option is accompanied by a lock icon and the text 'You choose who can see and commit to this repository.'

Create a new repository

A repository contains all the files for your project, including the revision history.

Owner Repository name

amrjeet / DemoRepo ✓

Great repository names are short and memorable. Need inspiration? How about [turbo-succotash](#).

Description (optional)

Demo Repository

☒ **Public**  
Anyone can see this repository. You choose who can commit.

☐ **Private**  
You choose who can see and commit to this repository.

# Creating a Remote Repository

- For a free repository choose public
- For a private repository a monthly premium needs to be paid
- Finally click on Create Repository

Description (optional)

Demo Repository



**Public**

Anyone can see this repository. You choose who can commit.



**Private**

You choose who can see and commit to this repository.

☐ **Initialize this repository with a README**

This will let you immediately clone the repository to your computer. Skip this step if you're importing an existing repository.

Add .gitignore: **None** ▼

Add a license: **None** ▼




Create repository

## Adding Remote Repository To Local Repository

- To add Remote repository to local use **git add remote** followed by remote link

Syntax: `git add remote origin <remote link>`

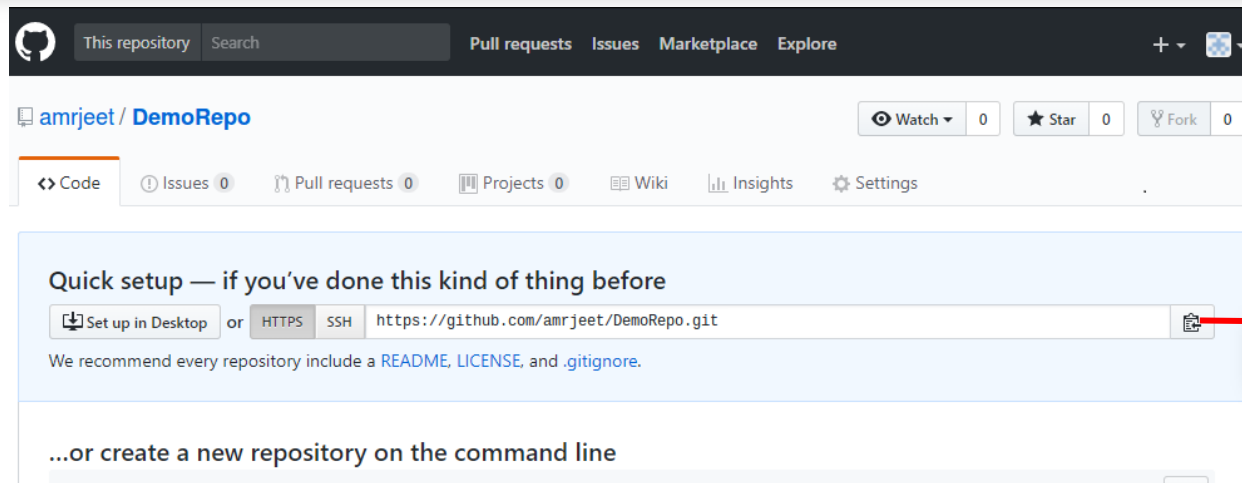

Remote link



## Adding Remote Repository To Local Repository

- To push **Local repository** to remote use **push** command

Syntax: `git push origin master`


- Origin is an alias for your remote
- Master is the name of the branch you are pushing from local to remote
- To push other branches to remote use the following command

Syntax: `git push -u origin <branch-name>`

# Pushing Tags to Remote Repository

- Tags can be pushed, viewed and shared on Remote

Syntax: `git push origin --tags`

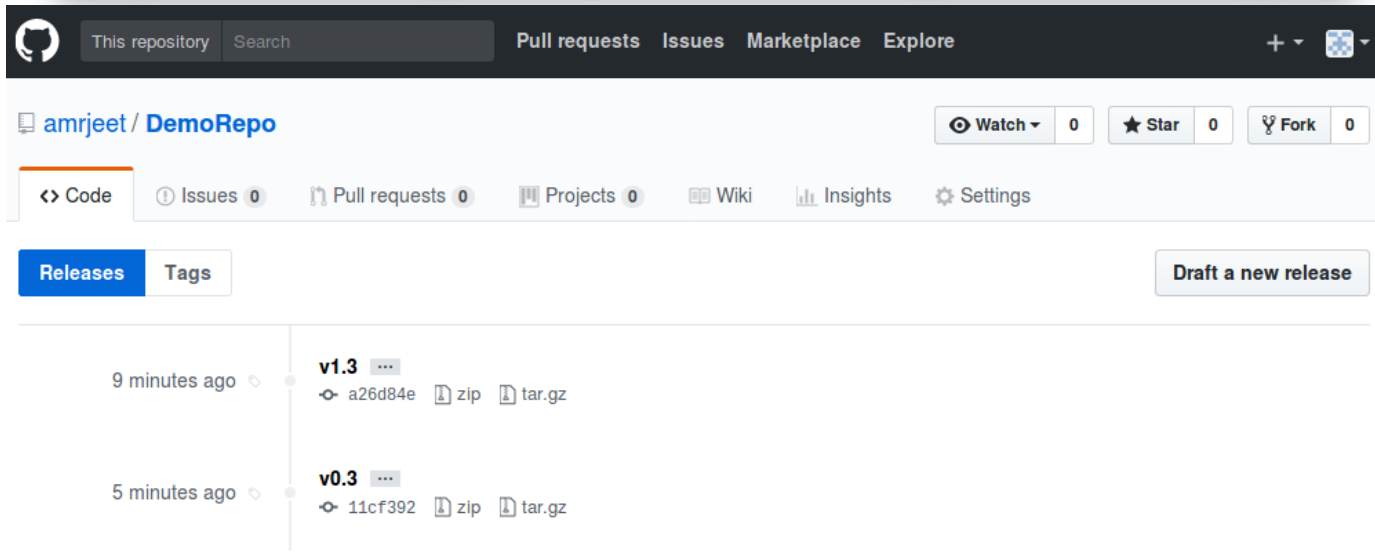

# Push Local Repository To Remote

- The changes can be seen in Remote repository

The screenshot shows the GitHub interface for a repository named 'DemoRepo' by user 'amrjeet'. The repository has 3 commits, 1 branch, 0 releases, and 1 contributor. The 'Code' tab is selected, showing a list of commits. The latest commit is by 'amrjeet' with the message 'removed .class extension files', committed on Jan 30, 2018. Below the commit list, there is a prompt to 'Add a README'.

amrjeet / DemoRepo

Watch 0 Star 0 Fork 0

Code Issues 0 Pull requests 0 Projects 0 Wiki Insights Settings

Demo Repository Edit

Add topics

3 commits 1 branch 0 releases 1 contributor

Branch: master New pull request Create new file Upload files Find file Clone or download

amrjeet removed .class extension files Latest commit 11cf392 Jan 30, 2018

Demo.java	New files added and Demo.java modified	11 hours ago
Demo2.java	New files added and Demo.java modified	11 hours ago

Help people interested in this repository understand your project by adding a README. Add a README

# Working on Remote

- Files can be created and edited on remote

Branch: master ▾ New pull request

Create new file Upload files Find file Clone or download ▾

amrjeet removed .class extension files Latest commit 11cf392 Jan 30, 2018

Demo.java New files added and Demo.java modified 11 hours ago

This repository Search Pull requests Issues Marketplace Explore

amrjeet / DemoRepo

Watch ▾ 0 Star 0 Fork 0

Code Issues 0 Pull requests 0 Projects 0 Wiki Insights Settings

DemoRepo / RepoFile or [cancel](#)


Edit new file Preview

Spaces ▾ 2 ▾ No wrap ▾

```
1 This is just an example
```

## Working on Remote

- These files can then be committed on the remote



### Commit new file

Added and committed file from remote repository

Add an optional extended description...

☒ Commit directly to the `master` branch.  
☐ Create a **new branch** for this commit and start a pull request. [Learn more about pull requests.](#)

Commit new file

Cancel

Demo Repository

Edit

Add topics

4 commits

1 branch

0 releases

1 contributor

Branch: master


New pull request


Create new file


Upload files


Find file

Clone or download

 **amrjeet** Added and committed file from remote repository Latest commit 6fffe2e Jan 31, 2018

 [Demo.java](#) New files added and Demo.java modified 12 hours ago

 [Demo2.java](#) New files added and Demo.java modified 12 hours ago

 [RepoFile](#) Added and committed file from remote repository just now

## Remote List

- To list all the remotes attached to your Local repository

Syntax: `git remote -v`

- **Fetch** command copies the changes from remote to local repository

Syntax: `git fetch origin`


- Fetch **does not** affect the present working directory

- Pull copies all the changes from remote to local repository
- It then merges the changes with the present working directory

Syntax: `git pull origin`




A project in its development could take multiple different paths to achieve its goal. Branching helps us take these different directions, test them out and in the end achieve the required goal.

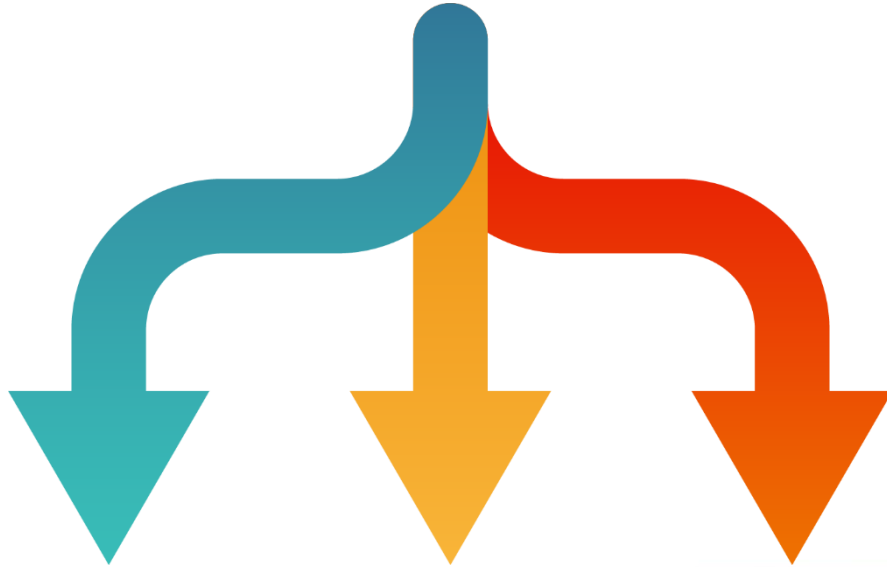

# Branching in Git

- Branching is an integral part of any Version Control(VC) System
- Unlike other VC's Git **does not** create a copy of existing files for new branch
- It **points** to snapshot of the changes you have made in the system

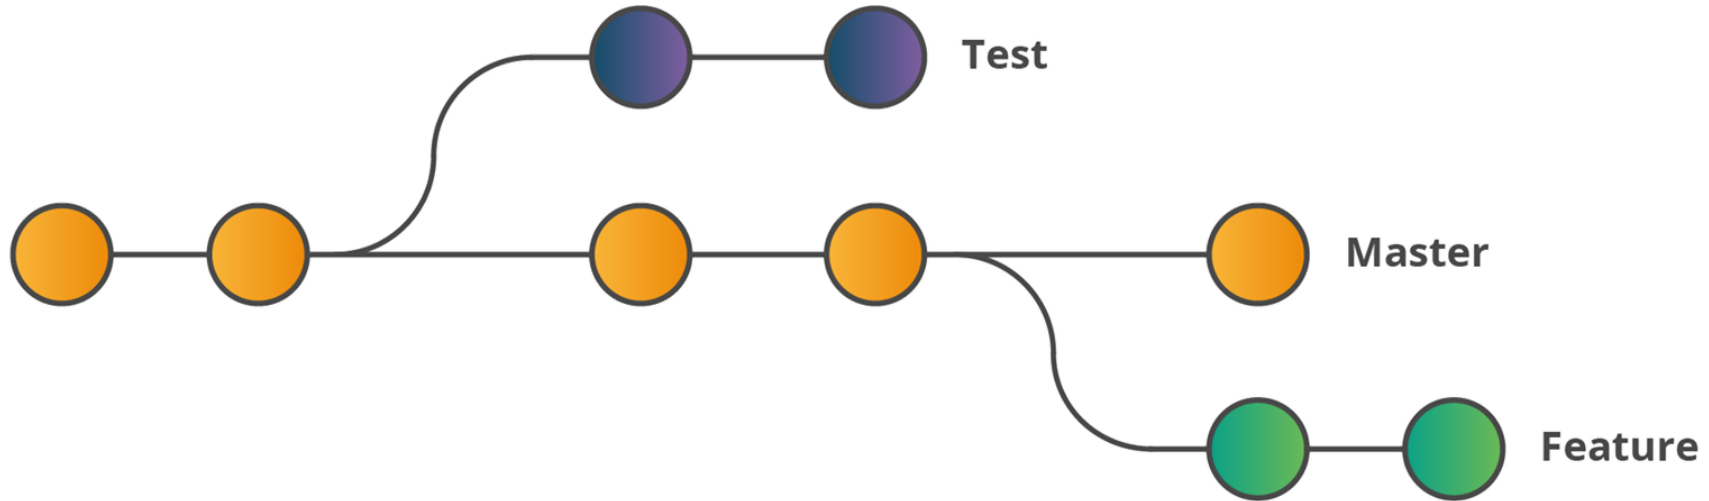

## Creating a Branch

- To create a new branch from your current branch

Syntax: `git branch <branchname>`

- You can then switch to this newly created branch

Syntax: `git checkout <branchname>`

## Creating a Branch

- Creating and switching to a new branch can be done with using **-b flag**

Syntax: `git checkout -b <branchname>`

- **Branch** command lists all the branches and also points to the current working branch

Syntax: `git branch`

- Merging integrates the changes made in different branches into one single branch




- Different modified branches can be **merged** together using merge

Syntax: `git merge <branchname>`

- The branch mentioned is merged into the current branch

## Merging in Git

- All the changes made in **Branch1** after merging are available in the Merged branch(Master)
- Branch1 becomes redundant after merging, hence it can be deleted

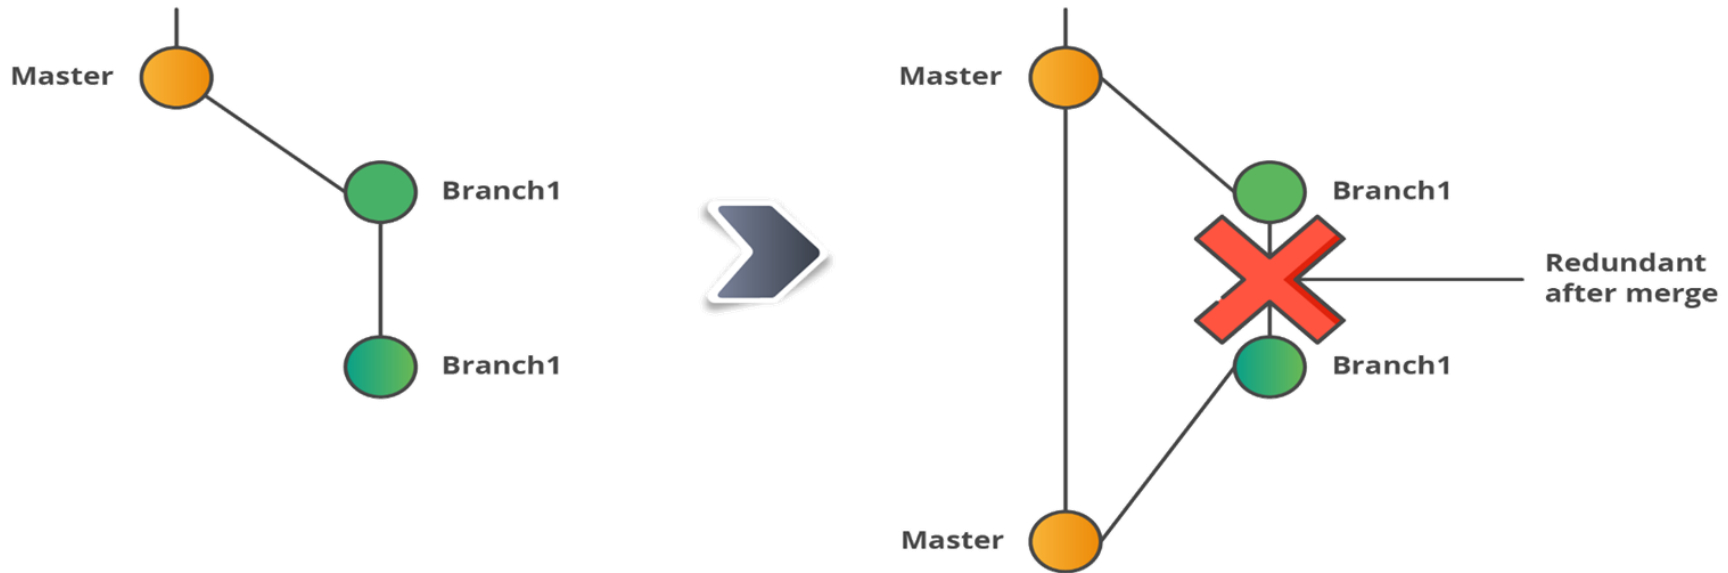

## Deleting a Branch

- **Merged** branches can be deleted using **-d** flag

Syntax: `git branch -d <branchname>`


- **Unmerged** branches can be deleted using **-D** flag

Syntax: `git branch -D <branchname>`




# Merge Conflicts

- Merge conflicts arise when two files having same content modified are merged
- Merge conflicts can occur on merging branches or when merging forked history together

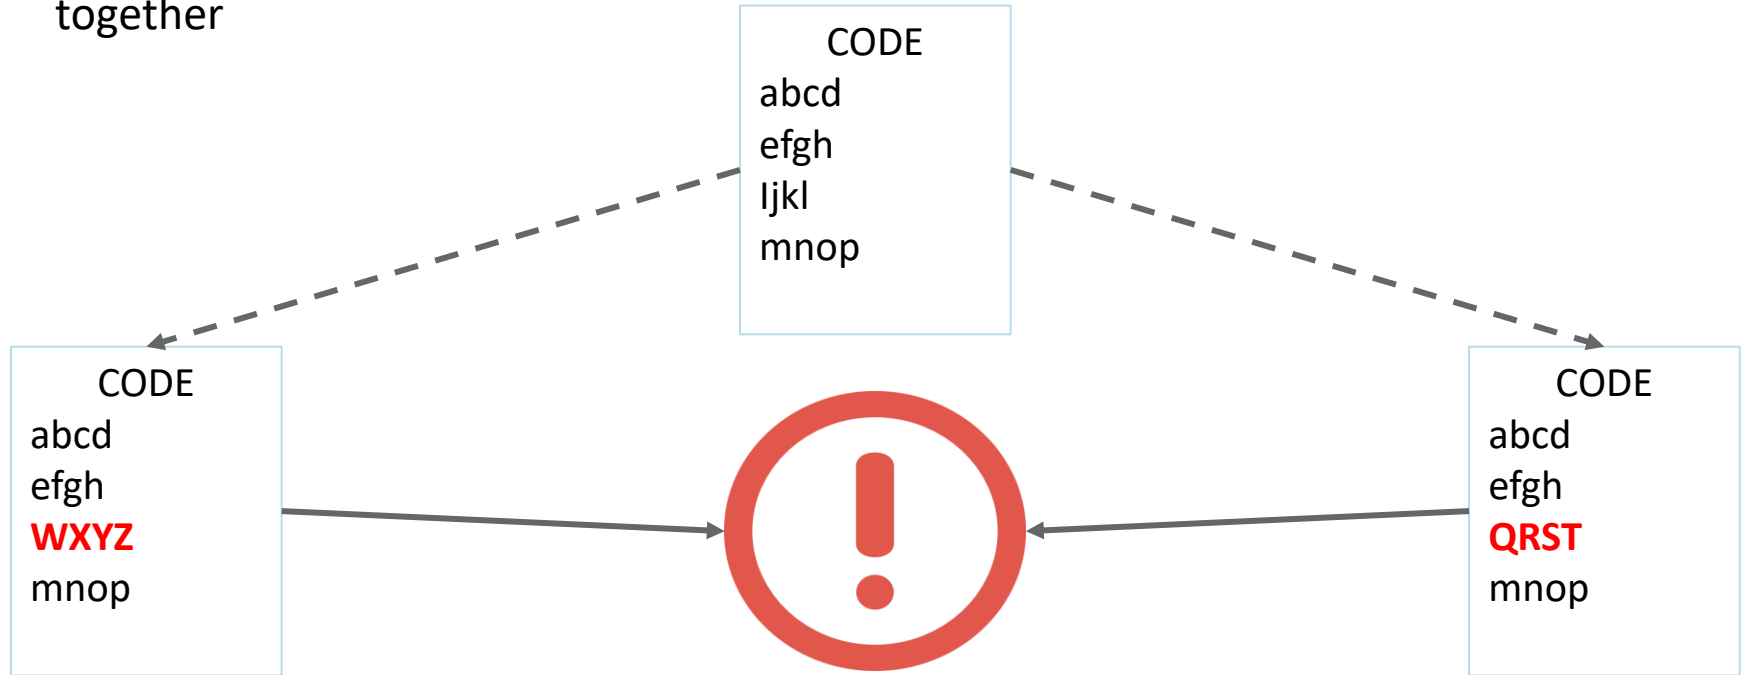


# Resolving Merge Conflicts

- Merge Conflicts are resolved manually by users
- Git provides different Merge-Tools to compare and choose the required changes
- User can also use third party Merge-Tools with Git

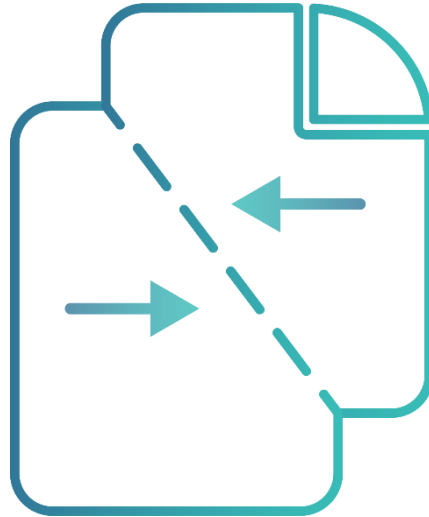


## Merge Conflicts

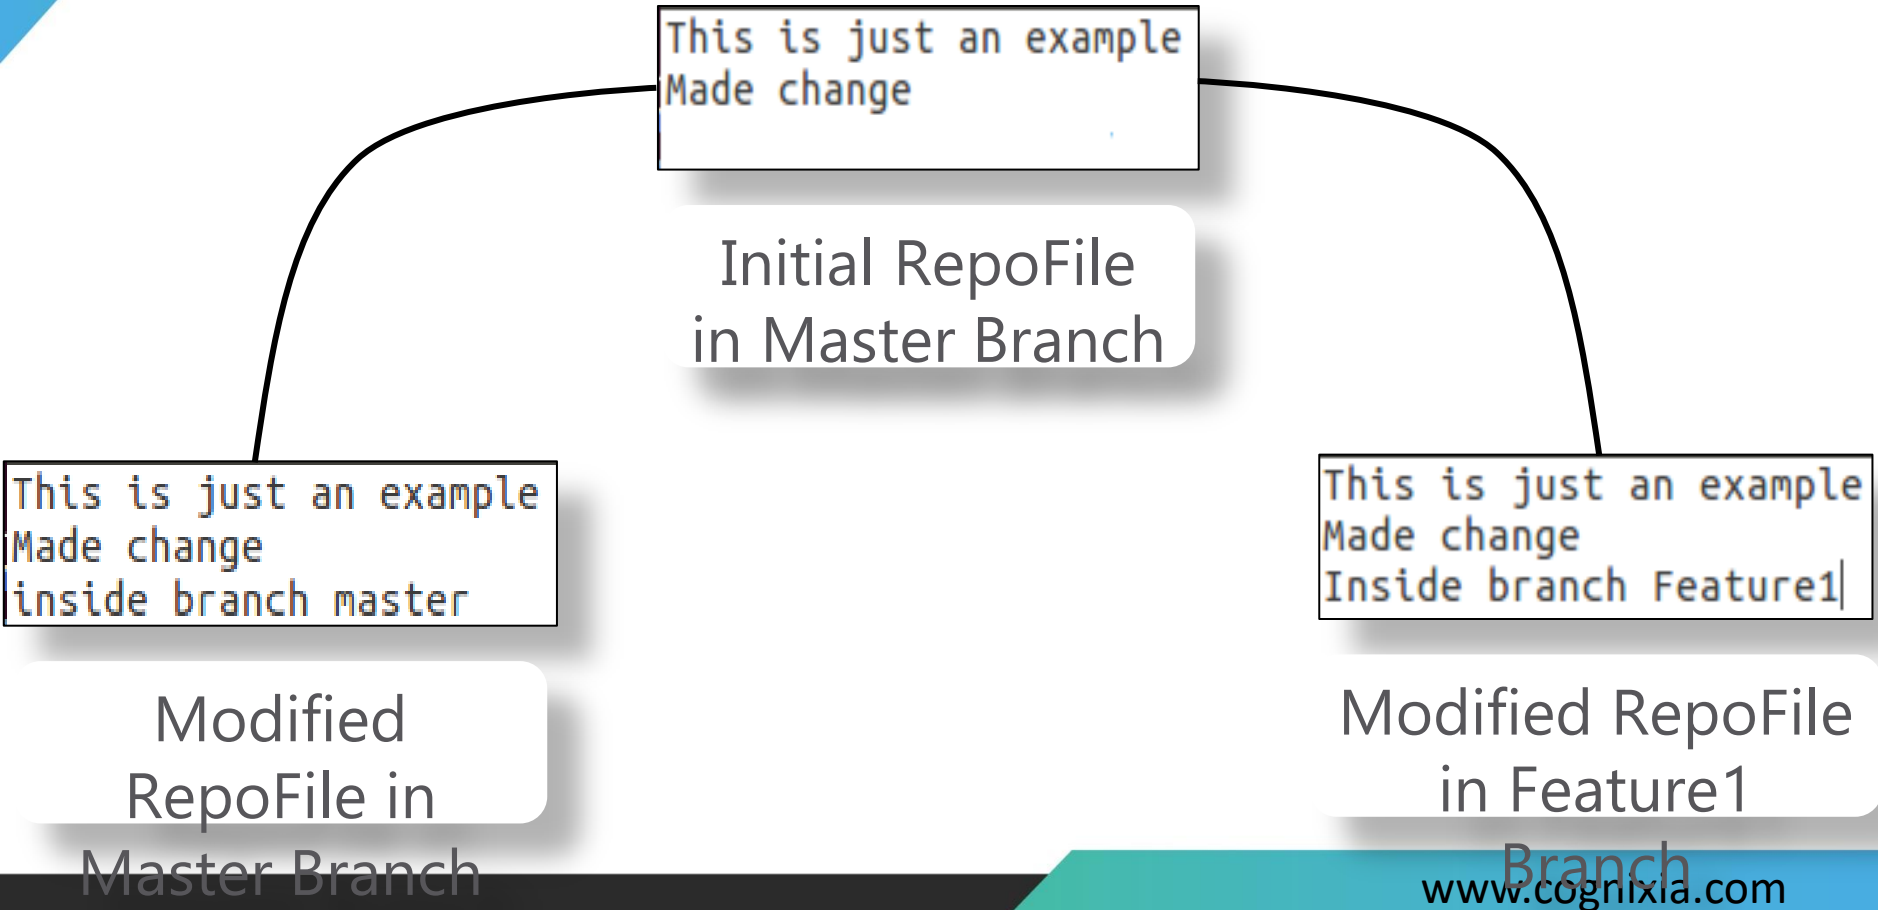

## Resolving Merge Conflicts

- Merge Conflict arises on merging branches
- Set a default merge tool before resolving conflict
- Commit the resolved changes
- Merge the branch again

Git Stashing is a way of creating a checkpoint for non-committed changes. It saves all the changes to a temporary location so the user can perform other tasks such as switching branches, reverting etc. These changes can then be reapplied where.



- To Create a stash of your current working directory

Syntax: `git stash save 'message'`

- To list all the saved stashes

Syntax: `git stash list`

- Stash list uses a stack structure to save the list

- Saved stashes can be applied at anytime on any branch

Syntax: `git stash apply <stash id>`

- After applying a stash it can still be accessed elsewhere because it remains in the stash

- Pop command can be used to apply the most recent stash and removing it from the stash stack

Syntax: `git stash pop`




- Stashes can be deleted from the stash list

```
Syntax: git stash drop <stack id>
```

- The entire stack can also be deleted using one command


```
Syntax: git stash clear
```

Git rebasing is used, when changes made in one branch needs to be reflected in another branch

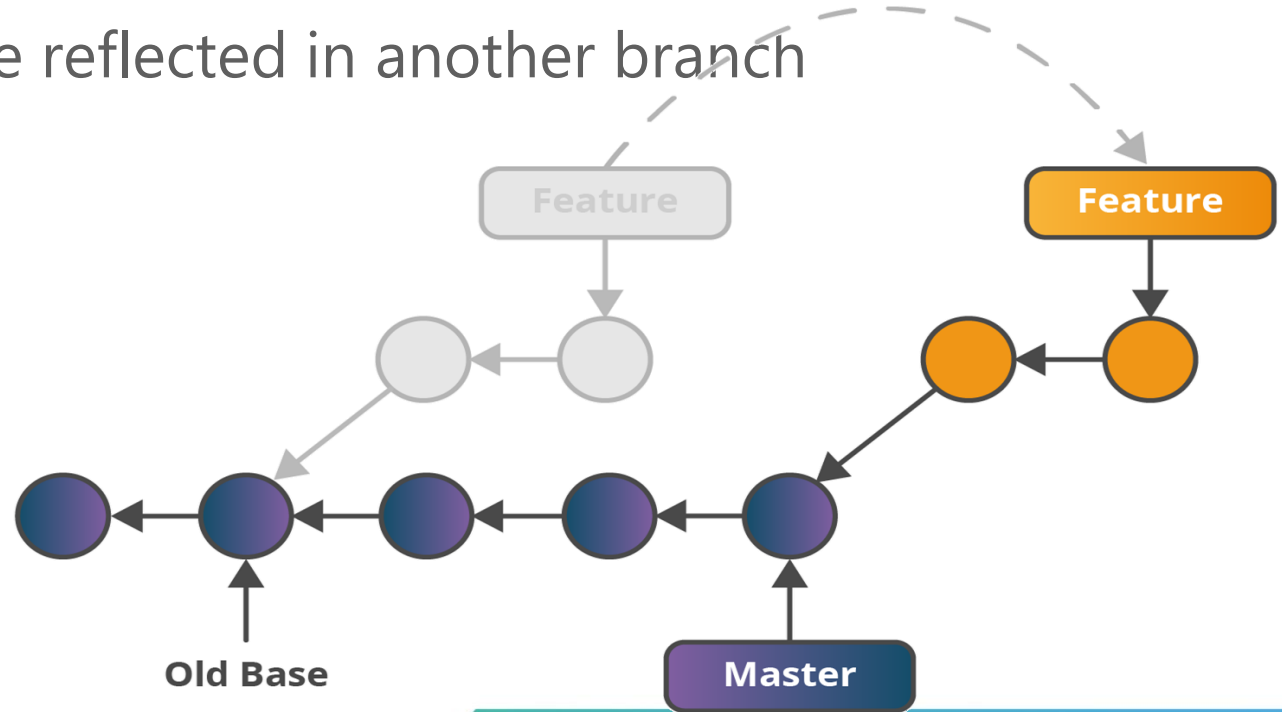

# Rebase

- Rebasing is the process of moving or combining a sequence of commits to a new base commit
- Rebasing is most useful and easily visualized in the context of a feature branching workflow
- The general process can be visualized as the following:

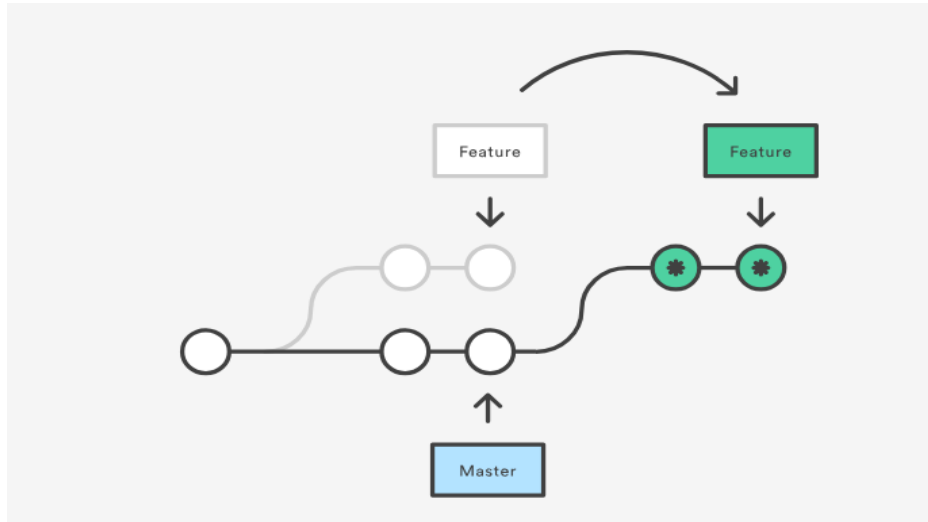


- From a content perspective, rebasing is changing the base of your branch from one commit to another making it appear as if you'd created your branch from a different commit
- Internally, Git accomplishes this by creating new commits and applying them to the specified base
- The primary reason for rebasing is to maintain a linear project history
- For example, consider a situation where the master branch has progressed since you started working on a feature branch
- You want to get the latest updates to the master branch in your feature branch, but you want to keep your branch's history clean so it appears as if you've been working off the latest master branch
- This gives the later benefit of a clean merge of your feature branch back into the master branch

- The benefits of having a clean history become tangible when performing Git operations to investigate the introduction of a regression. A more real-world scenario would be:
  - A bug is identified in the master branch. A feature that was working successfully is now broken.
  - A developer examines the history of the master branch using git log because of the "clean history" the developer is quickly able to reason about the history of the project.
  - The developer can not identify when the bug was introduced using git log so the developer executes a git bisect.
  - Because the git history is clean, git bisect has a refined set of commits to compare when looking for the regression. The developer quickly finds the commit that introduced the bug and is able to act accordingly.

## Two Options for Integrating Your Code

- You have two options for integrating your feature into the master branch:
  - merging directly or
  - rebasing and then merging
- The former option results in a 3-way merge and a merge commit, while the latter results in a fast-forward merge and a perfectly linear history
- The following diagram demonstrates how rebasing onto the master branch facilitates a fast-forward merge

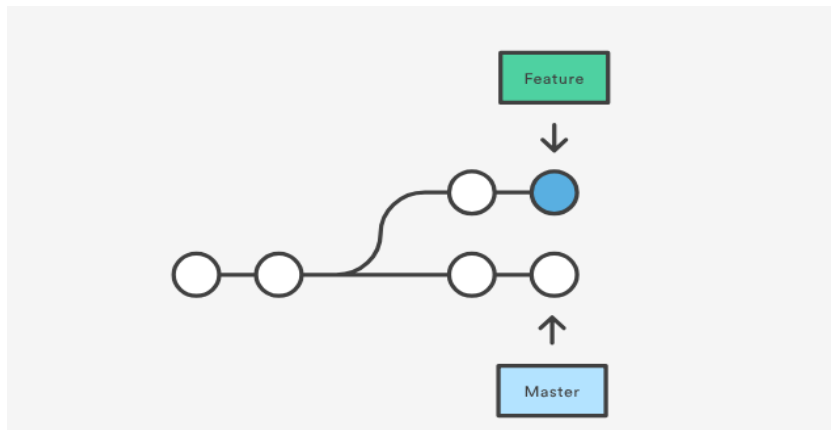


- To Rebase a branch

Syntax: `git rebase <rebase branch>`

- Revert or **undo** the changes made in the previous commit
- New commit is created without the changes made in the other commit

Syntax: `git revert <commit id>`


- Old commit still resides in the history

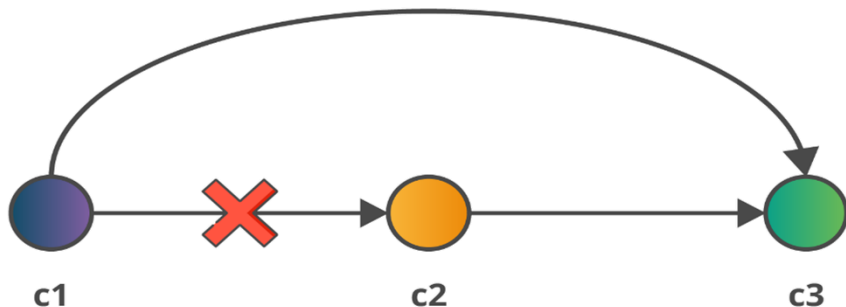



- Reset command can be used to undo changes at different levels
- Modifiers like --hard, --soft and --mixed can be used to decide the degree to which to reset

Syntax: `git reset <modifier> <commit id>`

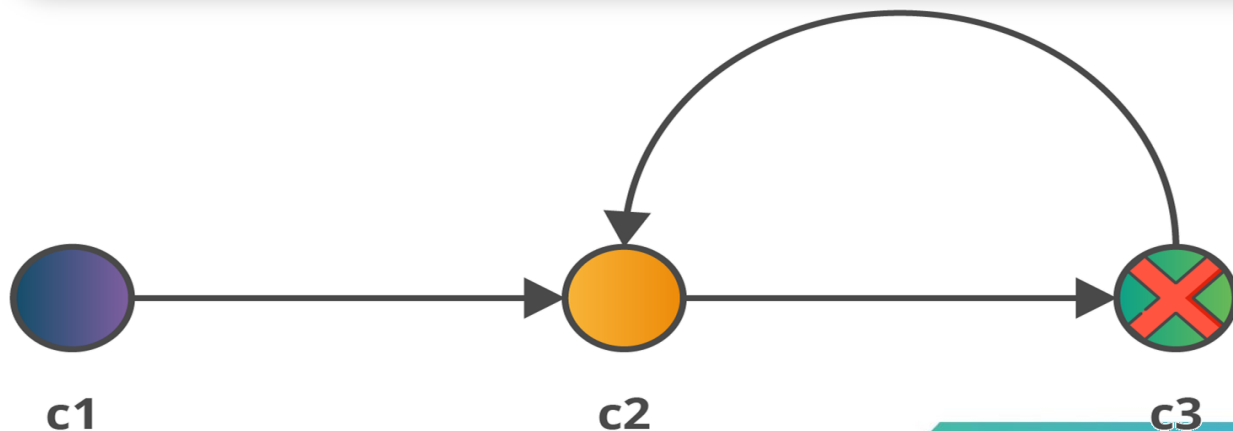



**THANK YOU**