

PL3

## 3. An Introduction to Reactive Programming

Dr. Islam Gamal

# Outline

- Intro to reactive applications
- The Observer pattern
- Event-based languages
- Reactive languages


# **INTRO TO REACTIVE APPLICATIONS**

# Software Taxonomy

- A **transformational** system
  - Accepts input, performs computation on it, produces output, and terminates
  - Compilers, shell tools, scientific computations



- A **reactive** system
  - Continuously interacts with the environment
  - Updates its state

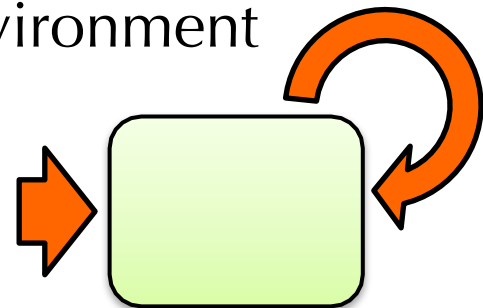

# Use of State


- Transformational systems:
  - Express transformations as incremental modifications of the internal data structures

State is not necessary to describe the system


- Reactive systems:
  - Represent the current state of interaction
  - Reflect changes of the external world during interaction

State is essential to describe the system

# Reactive Applications

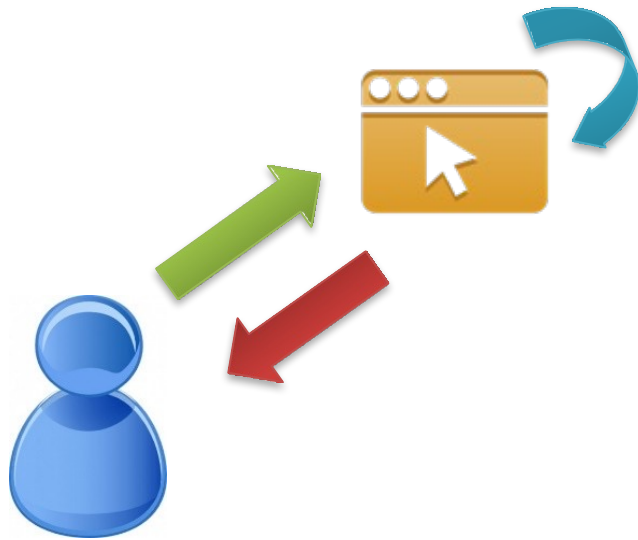

Interactive Applications UI

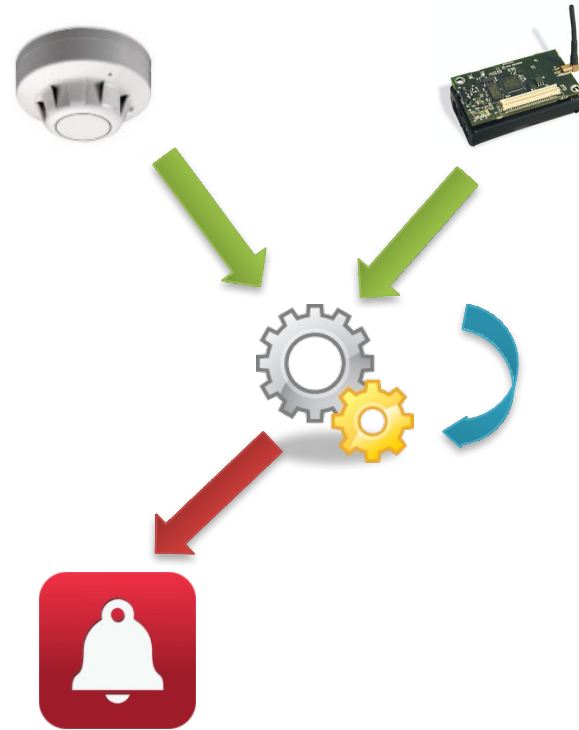

Monitoring / Control Systems

# Reactive Applications

- Many other examples
  - Web applications
  - Mobile apps
  - Distributed computations
    - Cloud
  - ...
- Typical operations
  - Detect events/notifications and react
  - Combine reactions
  - Propagate updates/changes



# Reactive Applications Why should we care?



- Event handling:
  - 30% of code in desktop applications
  - 50% of bugs reported during production cycle



# Reactive Programming

Now...

- Reactive applications are extremely common
  - Can we design new language features to specifically address this issue ?
- 
- Think about the problems solved by exceptions, visibility modifiers, inheritance, ...

# **REACTIVE PROGRAMMING**

# Reactive Programming

Definition... ?

*“Programming language abstractions  
(techniques and patterns)  
to develop reactive applications”*

For example, abstractions to:




- Represent event streams

- Automatically propagate changes in the state
- Combine events

- ...

# Reactive Programming

- Haskell: Fran, Yampa
- FrTime, Flapjax, REScala, Scala.react, ...
- Angular.js, Bacon.js, Reactive.js, ...
- Microsoft Reactive Extensions (Rx)
- Books 2014-16




# Reactive Programming





# Reactive Programming

Google

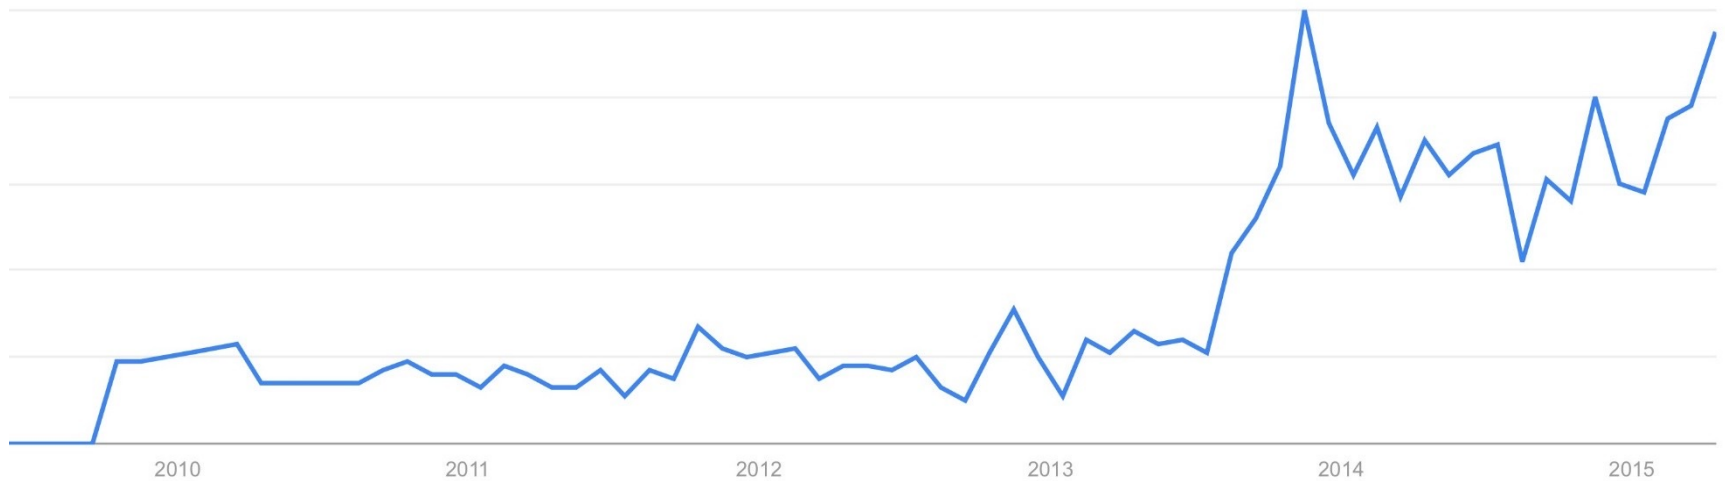


# **THE OBSERVER PATTERN**

# The (*good?* old) Observer Pattern

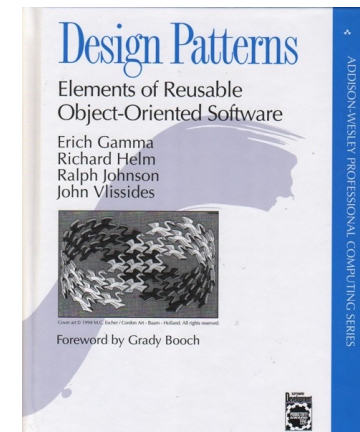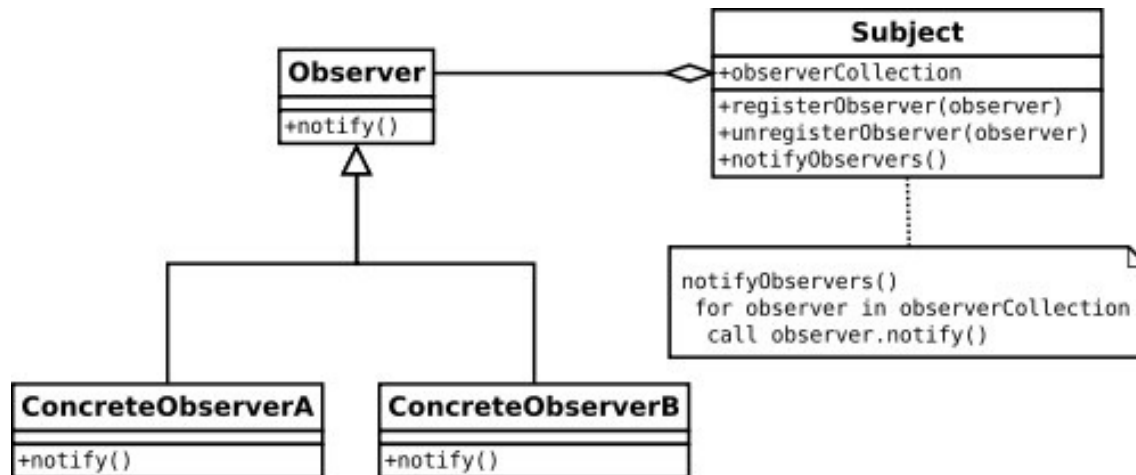



# The (*good?* old) Observer Pattern

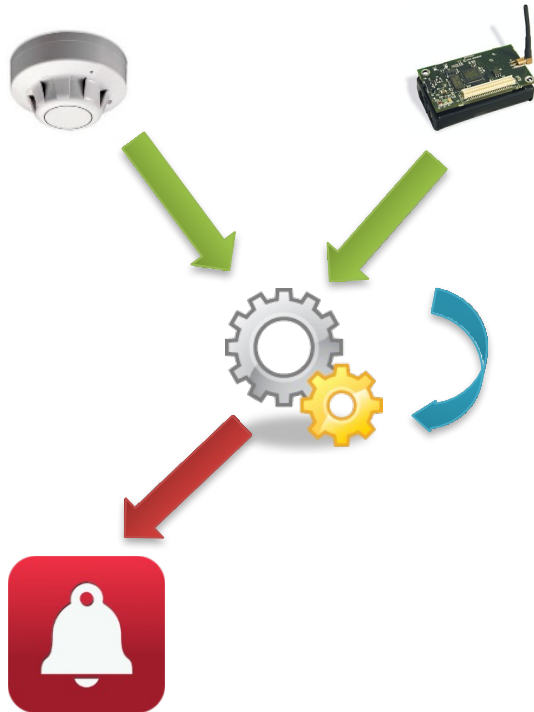

```
boolean highTemp;  
boolean smoke;
```

State

```
void Init() {  
    tempSensor.register(this);  
    smokeSensor.register(this);  
}
```

Registration

```
void notifyTempReading(TempEvent e) {  
    highTemp = e.getValue() > 45;  
    if (highTemp && smoke) {  
        alert.start();  
    }  
}
```

Callback  
functions

Control  
statements


```
void notifySmokeReading(SmokeEvent e) {  
    smoke = e.getIntensity() > 0.5;  
    if (highTemp && smoke) {  
        alert.start();  
    }  
}
```

Callback  
functions

Control  
statements

# The Observer Pattern

- What about Java Swing ?
  - `javax.swing`

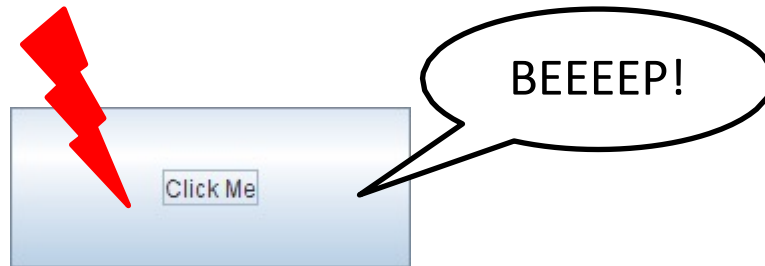


```
public class Beeper extends JPanel implements ActionListener {  
    JButton button;
```

```
    public Beeper() {  
        super(new BorderLayout());  
        button = new JButton("Click Me");  
        button.setPreferredSize(new Dimension(200, 80));  
        add(button, BorderLayout.CENTER);  
        button.addActionListener(this);  
    }
```

```
    public void actionPerformed(ActionEvent e) {  
        Toolkit.getDefaultToolkit().beep();  
    }
```

```
    private static void createAndShowGUI() { // Create the GUI and show it.  
        JFrame frame = new JFrame("Beeper"); //Create and set up the window.  
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);  
        JComponent newContentPane = new Beeper(); //Create and set up the content pane.  
        newContentPane.setOpaque(true);  
        frame.setContentPane(newContentPane);  
        frame.pack(); //Display the window.  
        frame.setVisible(true);  
    }
```

```
    public static void main(String[] args) {  
        javax.swing.SwingUtilities.invokeLater( new Runnable() { public void run() {createAndShowGUI();}});  
    }  
}
```

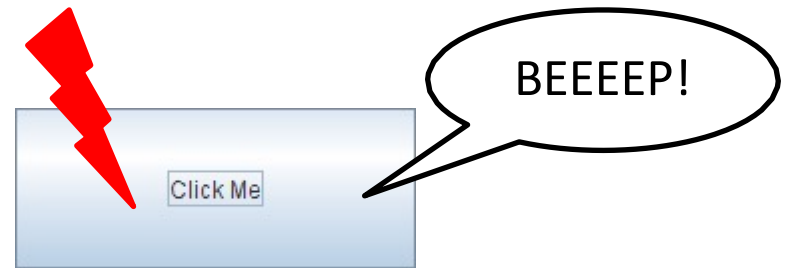

# **EVENT-BASED LANGUAGES**

# Event-based Languages

## Language-level support for events

- Events as object attributes
  - Describe changes of the object's state
  - Part of the interface
- Event-based languages are *better!*
  - More concise, clear programming intention, ...
  - C#, Ptolemy, EScala, EventJava, ...

# Example in C#


```
public class Drawing {  
    Collection<Figure> figures;  
    public event NoArgs Changed();  
    public virtual void Add(Figure figure) {  
        figures.Add(figure);  
        figure.Changed += OnChanged;  
        OnChanged();  
    }  
    public virtual void Remove(Figure figure) {  
        figures.Remove(figure);  
        figure.Changed -= OnChanged;  
        OnChanged();  
    }  
    protected virtual void OnChanged() {  
        if (Changed != null) { Changed(); }  
    }  
    ...  
}
```

# **EVENTS IN SCALA**

# REScala

- [www.rescala-lang.com](http://www.rescala-lang.com)

- An advanced event-based system
- Abstractions for time-changing values
- Bridging between them

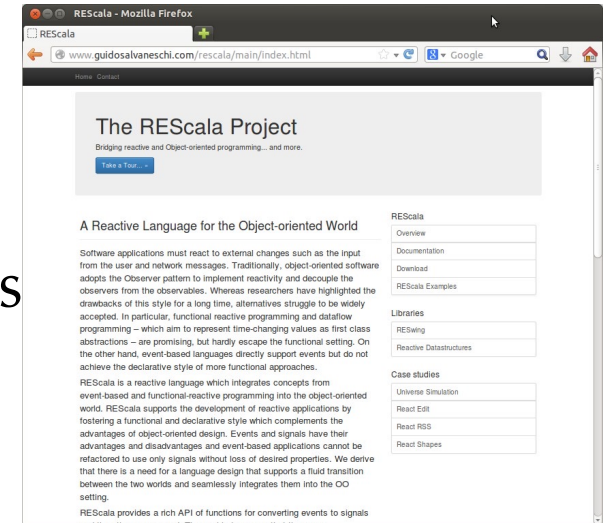

- **Philosophy:** foster a more declarative and functional style without sacrificing the power of OO design
- Pure Scala



# Adding Events to Scala

- C# events are recognized by the compiler
  - Scala does not support events by itself, but...
- Can we introduce events using the powerful Scala support for DSLs?
- Can we do even better than C# ?
  - E.g., event composition ?

# REScala events: Summary

- Different types of events: Imperative, declarative, ...
- Events carry a value
  - Bound to the event when the event is fired
  - Received by all the handlers
- Events are parametric types.
  - `Event[T]`, `Evt[T]`
- All events are subtype of `Event[T]`

# Imperative Events

- Valid event declarations

```
val e1 = Evt[Unit]()
```

```
val e2 = Evt[Int]()
```

```
val e3 = Evt[String]()
```

```
val e4 = Evt[Boolean]()
```

```
val e5: Event[Int] = Evt[Int]()
```

```
class Foo
```

```
val e6 = Evt[Foo]()
```

# Imperative Events

- Multiple values for the same event are expressed using tuples

```
val e1 = Evt[(Int,Int)]()
```

```
val e2 = Evt[(String,String)]()
```

```
val e3 = Evt[(String,Int)]()
```

```
val e4 = Evt[(Boolean,String,Int)]()
```

```
val e5: Evt[(Int,Int)] = Evt[(Int,Int)]()
```

# Handlers

- Handlers are executed when the event is fired
  - The += operator registers the handler.
  - The handler is a first class function
    - The attached value is the function parameter.

```
var state = 0
val e = Evt[Int]() e += {
  println(_) }
e += (x => println(x))
e += ((x: Int) => println(x))
e += (x => { // Multiple statements in the handler state = x
  println(x)
})
```

# Handlers

- The signature of the handler must conform the event
  - E.g., `Event[(Int,Int)]` requires `(Int,Int) => Unit`
  - The handler:
    - receives the attached value
    - performs side effects.

```
val e = Evt[(Int,String)]() e
+= (x => {
  println(x._1)
  println(x._2)
})
e += (x: (Int,String) => {
  println(x)
})
```

# Handlers

- Events without arguments still need a Unit argument in the handler.

```
val e = Evt[Unit]()  
e += { x => println("Fired!") }  
e += { (x: Unit) => println("Fired!") }
```

# Methods as Handlers

- Methods can be used as handlers.
  - *Partially applied functions* syntax
  - Types must be correct

```
def m1(x: Int) = {  
  val y = x + 1  
  println(y)  
}
```

```
val e = Evt[Int]  
e += m1 _  
e(10)
```



# Firing Events

- Method call syntax
- The value is bound to the event occurrence

```
val e1 = Evt[Int]()  
val e2 = Evt[Boolean]()  
val e3 = Evt[(Int,String)]()
```

```
e1(10)  
e2(false)  
e3((10,"Hallo"))
```

# Firing Events

- Registered handlers are executed every time the event is fired.
  - The actual parameter is provided to the handler

```
val e = Evt[Int]()  
e += { x =>  
  println(x) }  
e(10)  
e(11)
```

```
-- output ---  
- 10  
11
```

# Firing Events

- All registered handlers are executed
  - The execution order is non deterministic

```
val e = Evt[Int]()  
e += { x => println(x) }  
e += { x => println("n: " + x)} e(10)  
e(11)
```

```
-- output ---- 10  
n: 10  
11  
n: 11
```

# Firing Events

- The `.remove` operator unregisters a *handler* via its *handle*
- The `+=` operator also returns the *handle* that will be used for unregistration

```
val e = Evt[Int]()  
val handler1 = { x: Int => println(x) }  
val handler2 = { x: Int => println("n: " + x) }
```

```
val h1 = e += handler1  
val h2 = e += handler2  
e(10)  
h1.remove  
e(10)  
h2.remove  
e(10)
```

```
-- output ----  
10  
n: 10  
n: 10
```

# Imperative Events


- Events can be referred to generically

```
val e1: Event[Int] = Evt[Int]()
```

# **DECLARATIVE EVENTS**

# The Problem

- Imperative events are fired by the programmer
- Conceptually, certain events depend on other events

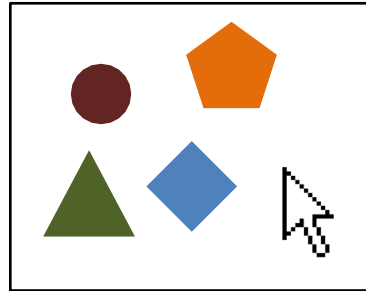

- Examples:
  - `mouseClickE` -> `museClickOnShape`
  - `mouseClose`, `keyboardClose` -> `closeWindow`
- Can we solve this problem enhancing the language?

# Declarative Events

- Declarative events are defined by a combination of other events.
- Some valid declarations:

```
val e1 = Evt[Int]()
```

```
val e2 = Evt[Int]()
```

```
val e3 = e1 || e2
```

```
val e4 = e1 && ((x: Int)=> x>10)
```

```
val e5 = e1 map ((x: Int)=> x.toString)
```



# OR events

- The event `e1 || e2` is fired upon the occurrence of one among `e1` or `e2`.
  - The events in the event expression have the same parameter type

```
val e1 = Evt[Int]()  
val e2 = Evt[Int]()  
val e1_OR_e2 = e1 || e2  
e1_OR_e2 += ((x: Int) => println(x))  
e1(10)  
e2(10)
```

```
-- output ----  
10  
10
```

# Predicate Events

- The event `e && p` is fired if `e` occurs and the predicate `p` is satisfied.
  - The predicate is a function that accepts the event parameter as a formal and returns Boolean.
  - `&&` filters events using a parameter and a predicate.

```
val e = Evt[Int]()  
val e_AND: Event[Int] = e && ((x: Int) => x>10)  
e_AND += ((x: Int) => println(x))  
e(5)  
e(15)  
-- output ---- 15
```

# Map Events

- The event `e map f` is obtained by applying `f` to the value carried by `e`.
  - The map function takes the event parameter as a formal.
  - The return type of map is the type parameter of the resulting event.

```
val e = Evt[Int]()  
val e_MAP: Event[String] = e map ((x: Int) => x.toString)  
e_MAP += ((x: String) => println("Here: " + x))  
e(5)  
e(15)  
-- output ----  
Here: 5  
Here: 15
```

# **EXAMPLES OF RESCALA EVENTS**

# Example: Figures

```
abstract class Figure {  
  val moved[Unit] = afterExecMoveBy  
  val resized[Unit]  
  val changed[Unit] = resized || moved || afterExecSetColor  
  val invalidated[Rectangle] = changed.map( _ => getBounds() )  
  ...  
  val afterExecMoveBy = new Evt[Unit]  
  val afterExecSetColor = new Evt[Unit]  
  ...  
  def moveBy(dx: Int, dy: Int) { position.move(dx, dy); afterExecMoveBy() }  
  def resize(s: Size) { size = s }  
  def setColor(col: Color) { color = col; afterExecSetColor() }  
  def getBounds(): Rectangle  
  ...  
}
```

# Example: Figures

```
class Connector(val start: Figure, val end: Figure) {  
    val h1 = start.changed += updateStart _  
    val h2 = end.changed += updateEnd _  
    ...  
    def updateStart() { ... }  
    def updateEnd() { ... }  
    ...  
    def dispose {  
        h1.remove  
        h2.remove  
    }  
}
```

# Example: Figures

- Inherited events
  - May be overridden
  - Are late bound

```
abstract class Figure {  
    val moved[Unit] = afterExecMoveBy  
    val resized[Unit]  
    ...  
}
```

```
class RectangleFigure extends Figure {  
    val resized = afterExecResize || afterExecSetBounds  
    override val moved = super.moved || afterExecSetBounds  
    ...  
    val afterExecResize = new Evt[Unit]  
    val afterExecSetBounds = new Evt[Unit]  
    ...  
    def resize(s: Size) { ... ; afterExecResize() }  
    def setBounds(x1: Int, y1: Int, x2: Int, y2: Int) { ... ; afterExecSetBounds }  
    ...  
}
```

# Example: Temperature Sensor

```
class TemperatureSensor {  
    val tempChanged[Int] = new Evt[Int]  
  
    ...  
    def run {  
        var currentTemp = measureTemp()  
        while(!stop) {  
            val newTemp = measureTemp()  
            if (newTemp != currentTemp) {  
                tempChanged(newTemp)  
                currentTemp = newTemp  
            }  
            sleep(100)  
        }  
    }  
}
```



# **REACTIVE LANGUAGES**

# Events and Functional Dependencies

Events are often used for functional dependencies

```
boolean highTemp := (temp.value > 45);
```

```
var a = 3  
var b = 7  
val c = a + b
```

```
a = 4  
b = 8
```

```
val update = Evt[Unit]()  
var a = 3  
var b = 7  
var c = a + b // Functional dependency
```

```
update += ( _ => {  
  c = a + b  
})
```

```
a = 4  
update()  
b = 8  
update()
```

# Constraints

- What about expressing functional dependencies as constraints ?

```
val a = 3
val b = 7
val c = a + b // Statement
println(c)
> 10
a = 4
println(c)
> 10
```

```
val a = 3
val b = 7
val c := a + b // Constraint
println(c)
> 10
a = 4
println(c)
> 11
```

# **EMBEDDING REACTIVE PROGRAMMING IN SCALA**

# Reactive Values


- **Vars:** primitive reactive values
  - Updated “manually”
- **Signals:** reactive expressions
  - The constraints “automatically” enforced

```
val a = Var(3)
val b = Var(7)
val c = Signal{ a() + b() }
println(c.now)
> 10
a()= 4
println(c.now)
> 11
```

# Reference Model

- Change propagation model
  - Dependency graph
  - Push-driven evaluation

```
val a = Var(3)
val b = Var(7)
val c = Signal{ a() + b() }
val d = Signal { 2 * c() }
...
```

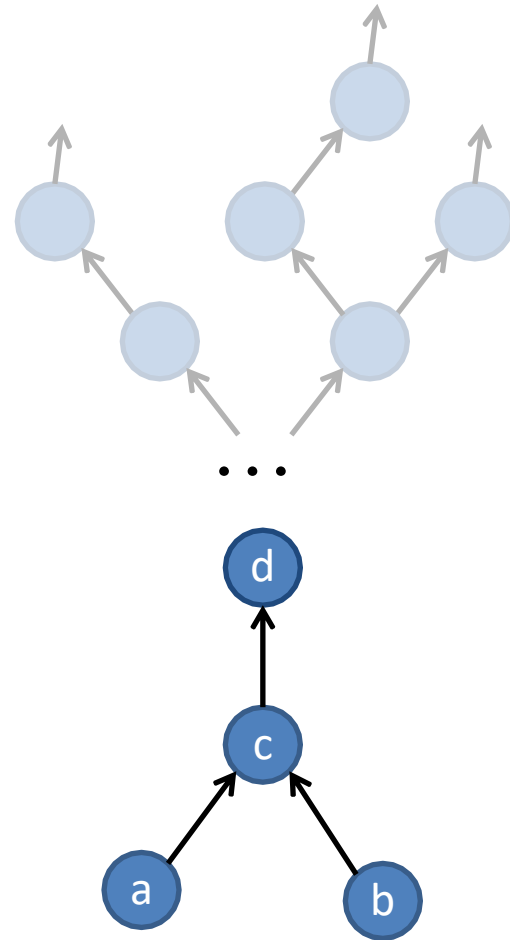

# **SIGNALS AND VARS**

# Vars

- Vars wrap *normal* Scala values
- Var[T] is a parametric type.
  - The parameter T is the type the var wraps around
  - Vars are assigned by the “()=” operator

```
val a = Var(0)
val b = Var("Hello World")
val c = Var(false)
val d: Var[Int] = Var(30)
val e: Var[String] = Var("REScala")
val f: Var[Boolean] = Var(false)
```

```
a()= 3
b()="New World"
c()=true
```




# Signals

- Syntax: `Signal{sigexpr}`
  - `Sigexpr` should be **side-effect free**
- Signals are parametric types.
  - A signal `Signal[T]` carries a value of type `T`

# Signals: Collecting Dependencies

- A **Var** or a **Signal** called with () in a signal expression is added to the dependencies of the defined signal

```
// Multiple vars  
// in a signal expression  
val a = Var(0)  
val b = Var(0)  
val s = Signal{ a() + b() }
```



# Signals: Examples

```
val a = Var(0)
```

```
val b = Var(0)
```

```
val c = Var(0)
```

```
val r: Signal[Int] = Signal{ a() + 1 } // Explicit type in var decl
```

```
val s = Signal{ a() + b() } // Multiple vars is a signal expression
```

```
val t = Signal{ s() * c() + 10 } // Mix signals and vars in signal expressions
```

```
val u = Signal{ s() * t() } // A signal that depends on other signals
```

# Signals: Examples

```
val a = Var(0)
val b = Var(2)
val c = Var(true)
val s = Signal{ if (c()) a() else b() }
```

```
def factorial(n: Int) = ...
val a = Var(0)
```

```
val s: Signal[Int] = Signal{ // A signal expression can be any code block
  val tmp = a() * 2
  val k = factorial(tmp)
  k + 2 // Returns an Int
}
```

# Signals

- Accessing reactive values: now
  - Often used to return to a *traditional* computation


```
val a = Var(0) val b = Var(2)
val c = Var(true)
val s: Signal[Int] = Signal{ a() + b() }
val t: Signal[Boolean] = Signal{ !c() }
```

```
val x: Int = a.now
val y: Int = s.now
```

```
val z: Boolean = t.now println(z)
```

# **EXAMPLES OF SIGNALS**


# Example

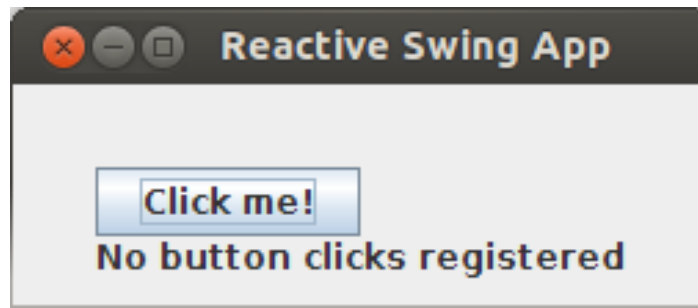

# Example: Observer

```
/* Create the graphics */  
title = "Reactive Swing App"  
val button = new Button {  
    text = "Click me!"  
}  
val label = new Label {  
    text = "No button clicks registered"  
}  
contents = new BoxPanel(Orientation.Vertical) {  
    contents += button  
    contents += label  
}
```

```
/* The logic */  
listenTo(button)  
var nClicks = 0  
reactions += {  
    case ButtonClicked(b) =>  
        nClicks += 1  
        label.text = "Number of button clicks: " + nClicks  
        if (nClicks > 0)  
            button.text = "Click me again"  
}
```

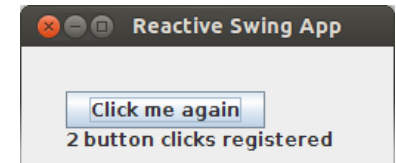



# Example: Signals

```
title = "Reactive Swing App"
val label = new ReactiveLabel
val button = new ReactiveButton

val nClicks = button.clicked.fold(0) {(x, _) => x + 1}

label.text = Signal { ( if (nClicks() == 0) "No" else nClicks() ) + " button clicks registered" }

button.text = Signal { "Click me" + ( if (nClicks() == 0) "!" else " again " ) }

contents = new BoxPanel(Orientation.Vertical) {
    contents += button
    contents += label
}
```



# Example: Smashing Particles




```
class Oval(center: Signal[Point], radius: Signal[Int]) { ... }  
  
val base = Var(0) // Increases indefinitely  
val linearTime = base()  
val cyclicTime = Signal{linearTime() % 200}  
  
val point1 = Signal{ new Point(20+ cyclicTime (), 20+ cyclicTime ()) }  
new Oval(point1, cyclicTime )  
... // 4 times
```

# **BASIC CONVERSION FUNCTIONS**


# REScala design principles

- Signals (and events) are objects fields
  - Inheritance, late binding, visibility modifiers, ...
- Conversion functions bridge signals and events

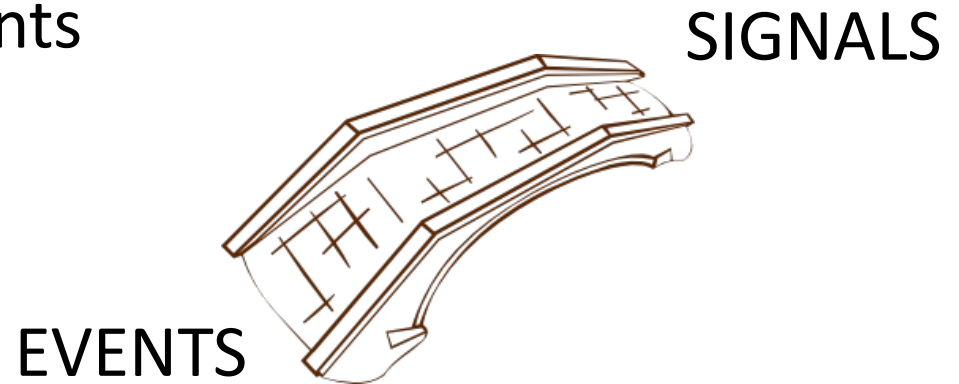

# Basic Conversion Functions

- **Changed** :: **Signal**[T] -> **Event**[T]
- **Latest** :: **Event**[T] -> **Signal**[T]

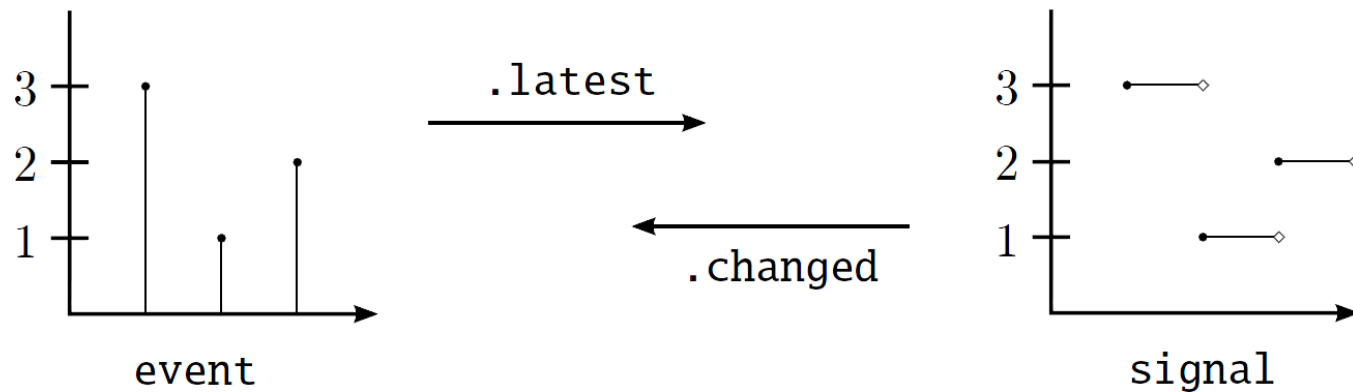

# Example: Changed

```
val SPEED = 10  
val time = Var(0)  
val space = Signal{ SPEED * time() }
```

```
while (true) {  
  Thread sleep 20  
  time() = time.now + 1  
}
```

```
space.changed += ((x: Int) => println(x))
```

```
-- output --
```

```
10
```

```
20
```

```
30
```

```
40
```

```
...
```

# Example: Latest

```
val senseTmp = Evt[Int]() // Fahrenheit
```

```
val threshold = 40
```

```
val fahrenheitTmp = senseTmp.latest(0)
```

```
val celsiusTmp = Signal{ (fahrenheitTmp() - 32) / 1.8 }
```

```
val alert = Signal{ if (celsiusTmp() > threshold ) "Warning" else "OK" }
```

# Quiz 1

```
val v1 = Var(4)
val v2 = Var(2)
val s1 = Signal{ v1() + v2() }
val s2 = Signal{ s1() / 3 }
```

```
assert(s2.now == 2)
v1()=1
assert(s2.now == 1)
```



# Quiz 2

```
var test = 0
val v1 = Var(4)
val v2 = Var(2)
val s1 = Signal{ v1() + v2() }
s1.changed += ((x: Int)=>{test+=1})

assert(test == 0)
v1()=1
assert(test == 1)
```

# Quiz 3


```
val e = Evt[Int]()  
val v1 = Var(4)  
val v2 = Var(2)  
val s1 = e.latest(0)  
val s2 = Signal{ v1() + v2() + s1() }
```

```
assert(s2.now == 6)  
e(2)  
assert(s2.now == 8)  
e(1)  
assert(s2.now == 7)
```

**TRUBLESHOOTING**

# Common pitfalls

- Establishing dependencies
  - `()` creates a dependency.  
Use only in signal expressions
  - **now** returns the current value
- Signals are **not** assignable.
  - Depend on other signals and vars
  - Are automatically updated




```
val a = Var(2)
val b = Var(3)
val c = Signal{ a.now + b() }
```

# Common pitfalls

- Avoid side effects in signal expressions


```
var c = 0
val s = Signal{
  val sum = a() + b();
  c = sum * 2
}
...
foo(c)
```



```
val c = Signal{
  val sum = a() + b();
  sum * 2
}
...
foo(c.now)
```

- Avoid cyclic dependencies

```
val a = Var(0)
val s = Signal{ a() + t() }
val t = Signal{ a() + s() + 1 }
```



# Reactive Abstractions and Mutability

- Signals and vars hold references to objects, not the objects themselves.

```
class Foo(init: Int){  
  var x = init  
}  
val foo = new Foo(1)
```

```
val varFoo = Var(foo)  
val s = Signal{  
  varFoo().x + 10  
}  
assert(s.now == 11)  
foo.x = 2  
assert(s.now == 11)
```

```
class Foo(init: Int){  
  var x = init  
}  
val foo = new Foo(1)
```

```
val varFoo = Var(foo)  
val s = Signal{  
  varFoo().x + 10  
}  
assert(s.now == 11)  
foo.x = 2  
varFoo()=foo  
assert(s.now == 11)
```

```
class Foo(x: Int) //Immutable  
val foo = new Foo(1)
```

```
val varFoo = Var(foo)  
val s = Signal{  
  varFoo().x + 10  
}  
assert(s.now == 11)  
varFoo()= new Foo(2)  
assert(s.now == 12)
```

**QUESTIONS?**