


STEP 1 - Create a CARET session, IP is 134.190.5.116



STEP 2 - Create Google Analytics property with address from 134.190.5.116/scotian-scout/

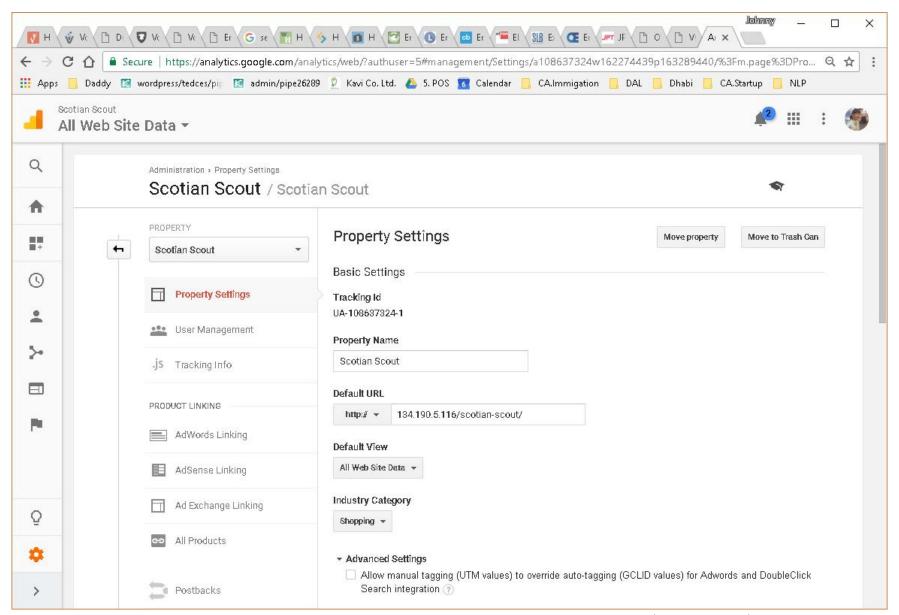

This page is used to test the proper operation of the Apache HTTP server after it has been installed. If you can read page, it means that the web server installed at this site is working properly, but has not yet been configured.

## If you are a member of the general public:

## If you are the website administrator:

The fact that you are seeing this page indicates that the website you just visited is either experiencing problems or is undergoing routine maintenance. 

If you would like to let the administrators of this webstvo@134.190.5.116's password: know that you've seen this page instead of the page [tvo@vc11-1-10 ~] \$ 1s -a sent to the name "webmaster" and directed to the website's domain should reach the appropriate perso [tvo@vc11-1-10 ~] \$

You may now add content to the directory /var/www Note that until you do so, people visiting your web:

```
login as: tvo
                                                             .bash logout .bash profile .bashrc
expected, you should send them e-mail. In general, n [tvo@vcl1-1-10 ~] $ sudo systematl start httpd.service
                                                      [tvo@vcl1-1-10 ~] $ sudo firewall-cmd --add-service=http
                                                     success
```

```
🗬 tvo@vcl1-1-10:~.
                                                                           \times
  libwayland-server.x86 64 1.12.0-1.fc25
 libwebp.x86 64 0.5.2-1.fc25
 libwmf-lite.x86 64 0.2.8.4-53.fc25
 libxcb.x86 64 1.12-1.fc25
 libxshmfence.x86 64 1.2-3.fc24
 m17n-db.noarch 1.7.0-7.fc25
 m17n-lib.x86 64 1.7.0-5.fc24
 mesa-libEGL.x86 64 17.0.5-3.fc25
 mesa-libGL.x86 64 17.0.5-3.fc25
 mesa-libqbm.x86 64 17.0.5-3.fc25
 mesa-libglapi.x86 64 17.0.5-3.fc25
 mesa-libwayland-egl.x86 64 17.0.5-3.fc25
 openjpeg2.x86 64 2.2.0-3.fc25
  opus.x86 64 1.1.5-1.fc25
 orc.x86 64 0.4.26-1.fc25
  pango.x86 64 1.40.9-1.fc25
  poppler-data.noarch 0.4.7-6.fc25
  psmisc.x86 64 22.21-8.fc24
  rest.x86 64 0.8.0-1.fc25
  urw-fonts.noarch 3:2.4-22.fc24
 webkitgtk4.x86 64 2.16.6-1.fc25
 webkitgtk4-jsc.x86 64 2.16.6-1.fc25
 webkitgtk4-plugin-process-gtk2.x86 64 2.16.6-1.fc25
 xml-common.noarch 0.6.3-44.fc24
 xorq-x11-font-utils.x86 64 1:7.5-32.fc25
Upgraded:
  emacs-filesystem.noarch 1:25.3-3.fc25
                                            qdk-pixbuf2.x86 64 2.36.9-1.fc25
Complete!
[tvo@vcl1-1-10 ~]$
```

STEP 4 – Install EMACS

```
tvo@vcl1-1-10:~/scotian-scout
                                                                          X
-rw-r--r-. 1 tvo vcl 18 Sep 30 2016 .bash loqout
rw-r--r-. 1 tvo vcl 193 Sep 30 2016 .bash profile
rw-r--r-. 1 tvo vcl 231 Sep 30 2016 .bashrc
drwxr----. 3 tvo vcl 19 Oct 25 20:31 .pki
drwxr-xr-x. 5 tvo vcl 78 Oct 25 20:31 scotian-scout
[tvo@vcl1-1-10 ~]$ cd scotian-scout
[tvo@vcl1-1-10 scotian-scout]$ git branch -a
 master
             gin/HEAD -> origin/master
[tvo@vcl1-1-10 scotian-scout]$ git branch ecmm6000-a2
[tvo@vcl1-1-10 scotian-scout]$ git branch -a
 ecmm6000-a2
 master
          origin/HEAD -> origin/master
[tvo@vcl1-1-10 scotian-scout]$ checkout ecmm6000-a2
-bash: checkout: command not found
[tvo@vcl1-1-10 scotian-scout]$ qit branch -a
 ecmm6000-a2
          origin/HEAD -> origin/master
[tvo@vcl1-1-10 scotian-scout]$ qit checkout ecmm6000-a2
Switched to branch 'ecmm6000-a2'
[tvo@vcl1-1-10 scotian-scout]$ git branch -a
 master
          origin/HEAD -> origin/master
[tvo@vcl1-1-10 scotian-scout]$
```

STEP 5 – Prepare Git, create branch ecmm6000-a2, checkout

```
₱ tvo@vcl1-1-10:/var.

                                                                             ×
File Edit Options Buffers Tools HTML SGML Text Help
<html>
       async src="https://www.googletagmanager.com/gtag/js?id=UA-108637324-1">\
  window.dataLayer = window.dataLayer || [];
  function qtaq() {dataLayer.push(arguments);}
  qtaq('js', new Date());
  gtag('config', 'UA-108637324-1');
   <script src="https://code.jquery.com/jquery-3.1.1.min.js"></script>
    <script src="http://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/js/bootstrap.mi\</pre>
n.js"></script>
          <link href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/boots\</pre>
rap.min.css" rel="stylesheet">
    <link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.7.0/css/font-awe\</pre>
some.min.css" rel="stylesheet">
    <link href="https://fonts.googleapis.com/css?family=Lobster" rel="styleshee\</pre>
    <link href="https://fonts.qooqleapis.com/css?family=Arimo" rel="stylesheet"\</pre>
    <link href="css/style.css" rel="stylesheet">
    <link href="css/ribbon.css" rel="stylesheet">
 </head>
-UU-:---F1 index.html
                             Top L1
                                       Git-master (HTML) -
For information about GNU Emacs and the GNU system, type C-h C-a.
```

STEP 6 – Added Google Analytics scrips

```
🧬 tvo@∨cl1-1-10:/∨ar.
                                                                         П
                                                                              X
File Edit Options Buffers Tools HTML SGML Text Help
<form method="post" action="https://poll.pollcode.com/63968692"><div class =</pre>
urvey" style="background-color:#4A9CEE;padding:2px;width:254px;font-family:Aria
l;font-size:small;color:#000000;box-shadow: Opx Opx 5px #888;background-image:
url('https://images.boardhost.com/bq/clouds.qif');margin:0 auto;"><div style="p
</div><input type="checkbox" name="answer" value="1" id="answer639686921" style\</pre>
="float:left;" /><label for="answer639686921" style="float:left;width:229px;">S\
earch engine</label><div style="clear:both;height:2px;"></div><input type="chec\
kbox" name="answer" value="2" id="answer639686922" style="float:left;" /><label
for="answer639686922" style="float:left; width: 229px; ">University events</label
><div style="clear:both;height:2px;"></div><input type="checkbox" name="answer"
value="3" id="answer639686923" style="float:left;" /><label for="answer6396869"
 (3" style="float:left;width:229px;">Nova Scotia Immigration Services</label><di\)</p>
v style="clear:both;height:2px;"></div><input type="checkbox" name="answer" val
ue="4" id="answer639686924" style="float:left;" /><label for="answer639686924"
style="float:left;width:229px;">Friends</label><div style="clear:both;height:2p
 ;"></div><input type="checkbox" name="answer" value="5" id="answer639686925" s
cvle="float:left;" /><label for="answer639686925" style="float:left;width:229px
 ">Others</label><div style="clear:both;height:2px;"></div><div align="center"
style="padding:3px;"><input type="submit" value=" Submit "></div><div align="ri"
ght" style="font-size:10px">pollcode.com <a href="https://pollcode.com/">free p'
olls</a></div></div></form>
     </div>
   \langle div \rangle
   <div class="mainbody">
     <div class="container">
       <div id="selection" class="row">
         <div class="col-sm-6 feature-image">
-UU-:---F1 index.html
                           34% L36
                                     Git-master
                                                 (HTML)
```


STEP 7 – Add the Customer Survey codes

```
₽ tvo@vcl1-1-10:~/scotian-scout

                                                                           ×
Nothing specified, nothing added.
Maybe you wanted to say 'git add .'?
[tvo@vcl1-1-10 scotian-scout]$ git add *
[tvo@vcl1-1-10 scotian-scout]$ git status
On branch ecmm6000-a2
Changes to be committed:
 (use "git reset HEAD <file>..." to unstage)
        modified: index.html
[tvo@vcl1-1-10 scotian-scout]$ git add .
[tvo@vcl1-1-10 scotian-scout]$ git status
On branch ecmm6000-a2
Changes to be committed:
  (use "qit reset HEAD <file>..." to unstage)
        modified: index.html
[tvo@vcll-1-10 scotian-scout]$ git remote add origin https://github.com/thuyvoka
vi/addingGA
fatal: remote origin already exists.
[tvo@vcl1-1-10 scotian-scout]$ git remote -v
origin https://github.com/cdconrad/scotian-scout (fetch)
origin https://github.com/cdconrad/scotian-scout (push)
[tvo@vcl1-1-10 scotian-scout] $ qit confiq remote.oriqin.url
https://github.com/cdconrad/scotian-scout
[tvo@vcl1-1-10 scotian-scout] $ git config remote.origin.url https://github.com/t
huyvokavi/scotian-scout.qit
[tvo@vcl1-1-10 scotian-scout] $ git config remote.origin.url
https://github.com/thuvvokavi/scotian-scout.git
[tvo@vcl1-1-10 scotian-scout]$
```

STEP 8 – Change remote repository to **thuyvokavi** 


```
[tvo@vcl1-1-10 scotian-scout]$ emacs index.html
[tvo@vcl1-1-10 scotian-scout] $ qit add index.html
[tvo@vcl1-1-10 scotian-scout] $ git commit -m "Added survey codes, Thuy"
[ecmm6000-a2 03a5e0e] Added survey codes, Thuy
1 file changed, 2 insertions(+), 1 deletion(-)
[tvo@vcl1-1-10 scotian-scout]$ git push
fatal: The current branch ecmm6000-a2 has no upstream branch.
To push the current branch and set the remote as upstream, use
   qit push --set-upstream oriqin ecmm6000-a2
[tvo@vcl1-1-10 scotian-scout]$ qit push --set-upstream oriqin ecmm6000-a2
Username for 'https://github.com': thuy.vo@dal.ca
Password for 'https://thuy.vo@dal.ca@qithub.com':
Counting objects: 3, done.
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 905 bytes | 0 bytes/s, done.
Total 3 (delta 2), reused 0 (delta 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/thuyvokavi/scotian-scout.git
   cb38878..03a5e0e ecmm6000-a2 -> ecmm6000-a2
Branch ecmm6000-a2 set up to track remote branch ecmm6000-a2 from origin.
[tvo@vcl1-1-10 scotian-scout]$
👺 tvo@vcl1-1-10:/var
                                                                                ×
                                                                           [tvo@vcl1-1-10 scotian-scout]$ qit merqe ecmm6000-a2
Updating 00dfda3..03a5e0e
Fast-forward
index.html | 13 ++++++++++
1 file changed, 12 insertions (+), 1 deletion (-)
```

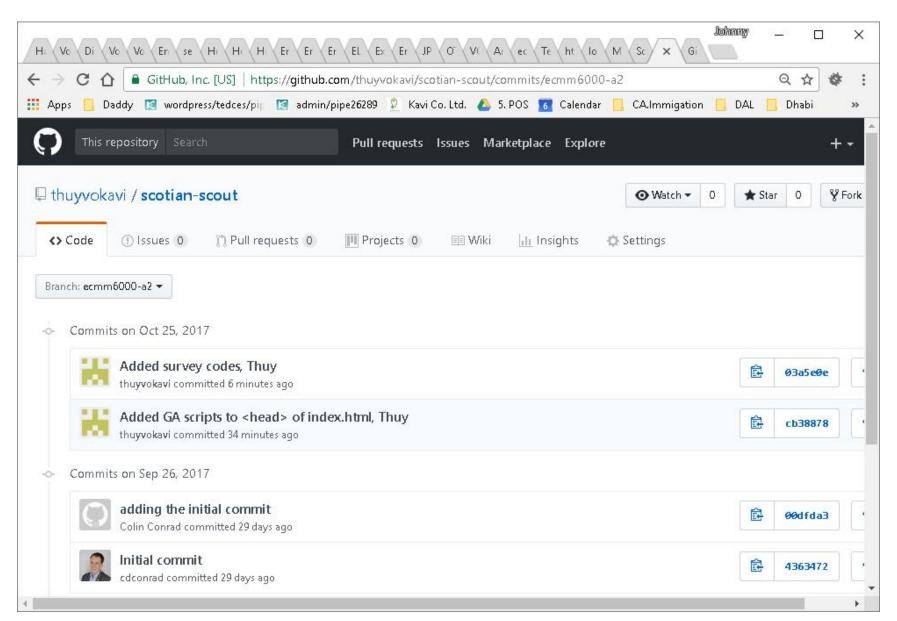


STEP 10 – Verify in GitHub.com

```
₽ tvo@vcl1-1-10:/var/www/html
                                                                           П
                                                                                ×
[tvo@vcl1-1-10 scotian-scout]$ ls
[tvo@vcl1-1-10 scotian-scout]$ cd scotian-scout
[tvo@vcl1-1-10 scotian-scout]$ ls
     mages index.html README.md
[tvo@vcl1-1-10 scotian-scout]$ cd ..
[tvo@vcl1-1-10 scotian-scout]$ cd ..
[tvo@vcl1-1-10 html]$ ls
[tvo@vcl1-1-10 html]$ rm -r -f tvo
rm: cannot remove 'tvo': Permission denied
[tvo@vcl1-1-10 html]$ sudo rm -r -f tvo
[tvo@vcl1-1-10 html]$ ls
[tvo@vcl1-1-10 html]$ scotian-scout
-bash: scotian-scout: command not found
[tvo@vcl1-1-10 html]$ cd scotian-scout
[tvo@vcl1-1-10 scotian-scout]$ ls
[tvo@vcl1-1-10 scotian-scout] sudo rm -r -f scotian-scout
[tvo@vcl1-1-10 scotian-scout]$ ls
[tvo@vcl1-1-10 scotian-scout]$ cd ...
[tvo@vcl1-1-10 html]$ ls
[tvo@vcl1-1-10 html]$ sudo rm -r -f scotian-scout
[tvo@vcl1-1-10 html]$ sudo cp -r /home/tvo/scotian-scout .
[tvo@vcl1-1-10 html]$ ls
[tvo@vcl1-1-10 html]$ ls scotian-scout
     mages index.html README.md
[tvo@vcl1-1-10 html]$
```


STEP 11: Copied scotian-scout to /var/www/html (APACHE's web root folder)

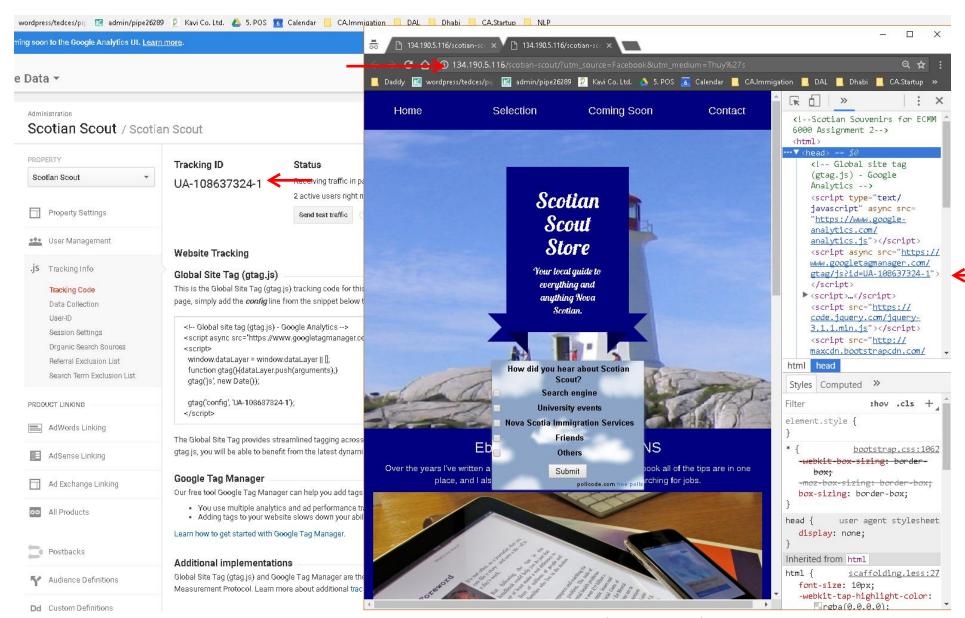


STEP 12 - Verify the Scotian-Scout at 134.190.5.116/scotian-scout/

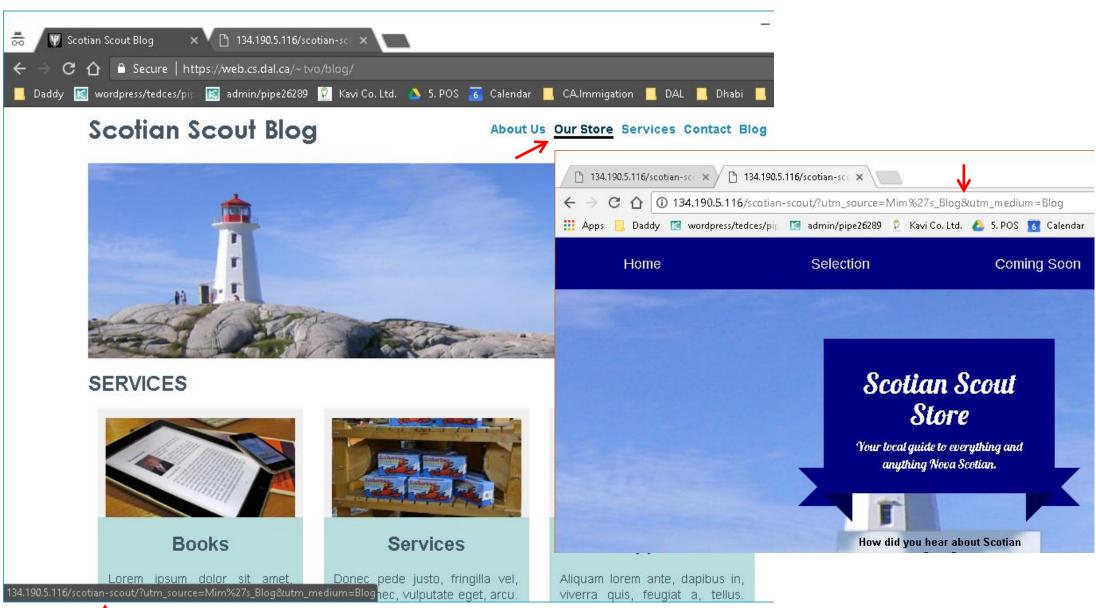

STEP 13 - Create Mim's blog with a link of **Our Store** to Scotian Scout, specifying UTM source and medium

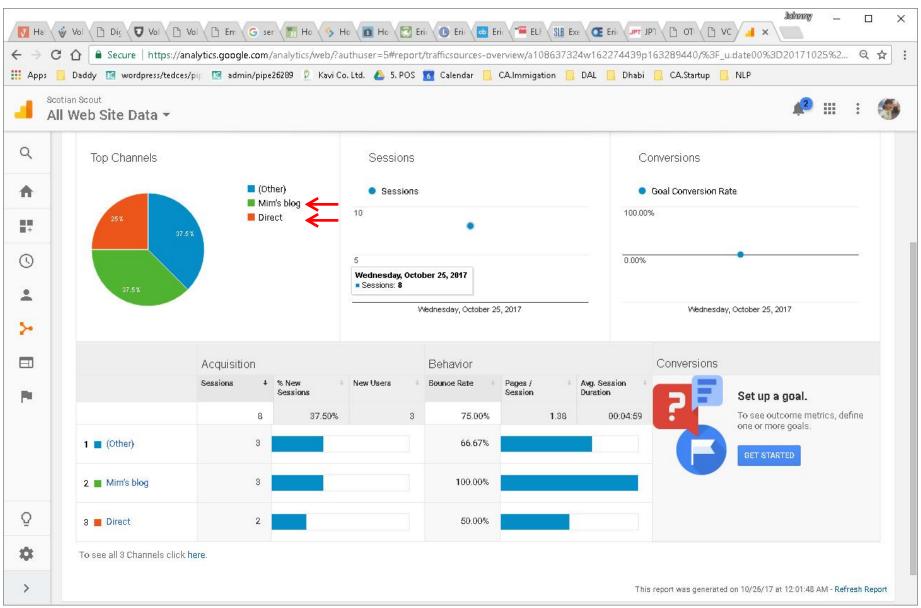

Step 14 –Google Analytics Dashboard to find inbounds from Mim's blogs versus from Direct / Facebook etc.

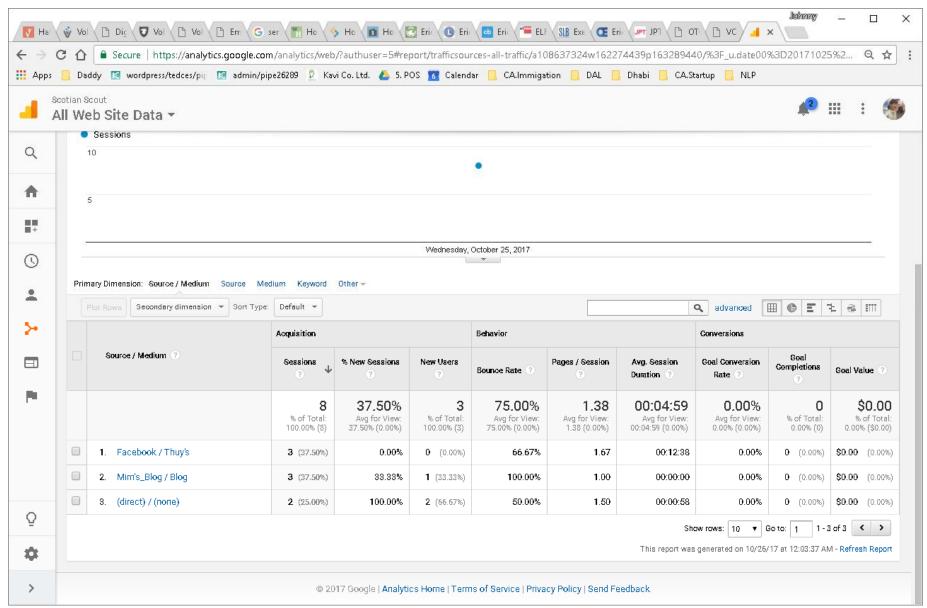

Step 14 –Google Analytics Dashboard to find inbounds from Mim's blogs versus from Direct / Facebook etc.