
ablate architecture

Find the direction a language model uses to refuse, subtract it, measure the result, and ship the edited model. Three ways in, one pipeline, no training.

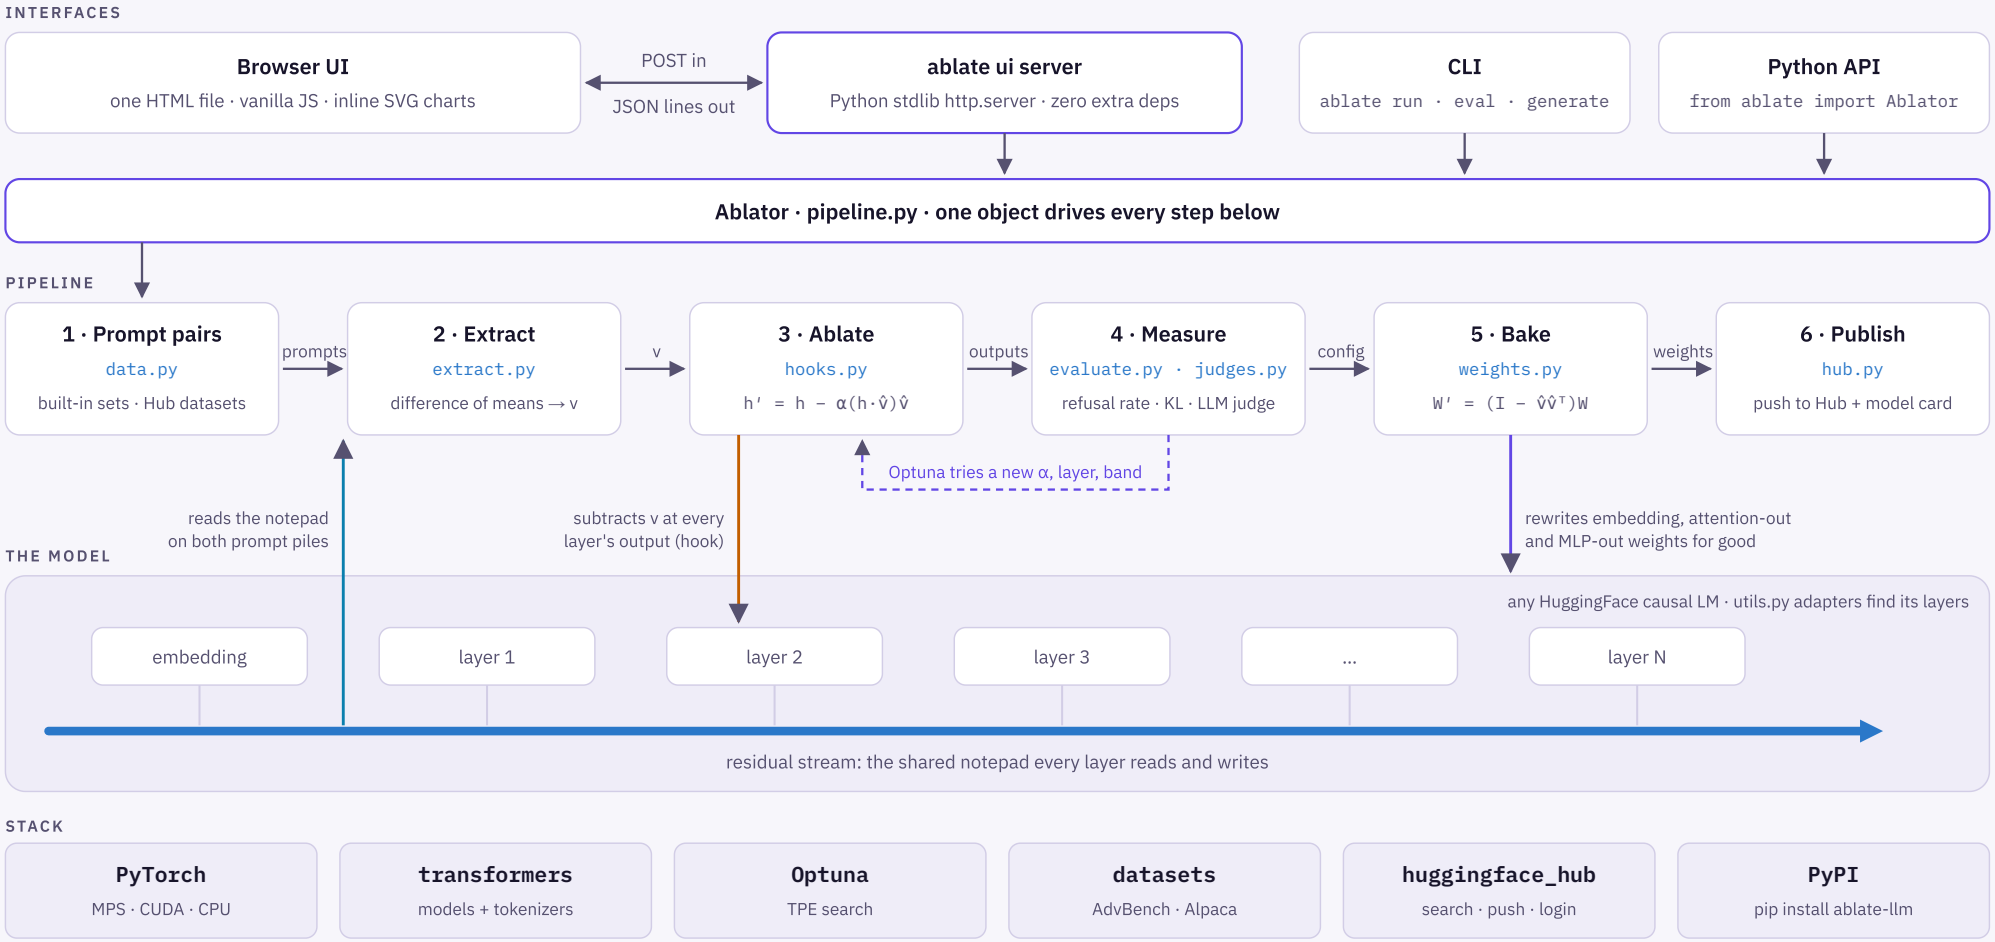

Coloured arrows are the only three places ablate touches the model: it reads the notepad (blue), subtracts the direction while the model runs (orange), or rewrites the weights for good (violet).

One forward pass, two answers

The playground sends the prompt twice in one batch. The hook edits row two and skips row one, so the original and the edited answer stream side by side.

Hook to explore, bake to ship

Both apply the same subtraction. A hook leaves the weights alone, so search is fast and reversible. Baking writes it into the weights and gives a normal checkpoint.

No web framework

The UI is one HTML file served by Python's built-in HTTP server. Long jobs stream JSON lines, so tokens and search trials appear as they happen.

Any model, small adapters

`utils.py` finds the layer list and the matrices that write to the notepad. Qwen, Llama, Mistral, SmolLM and GPT-2 all run through the same code.

`pip install "ablate-llm[all]"` `ablate ui` `github.com/AIAnytime/ablate` `huggingface.co/ai-anytime` `youtube.com/@AIAnytime`