

2.01-hpi-nomogram-testing

September 2, 2024

```
[7]: import pickle
import numpy as np
```

```
[33]: from importlib import reload
import prism.prnomogram_func
reload(prism.prnomogram_func)
from prism.prnomogram_func import prnomogram_refactor
```

0.1 Import nomogram arguments

```
[18]: filename = "nomogram_arguments_20240628_112200.pkl"

with open(filename, "rb") as f:
    prn_nomogram_args = pickle.load(f)


betas_senn, userLambda_senn, x_train0, x_train, data_train_test, senn_weights,
    ↪ bivariate_inputs_senn = prn_nomogram_args
```


```
[16]: # Get number of features
n_univ = x_train.shape[1]
n_biv = n_univ * (n_univ - 1) // 2
n_features = n_univ + n_biv

# feature_index = [12, 13, *range(60, 65)] #
# feature_index = [*range(0, 66)] # everything
# betas_all = np.zeros([n_features, 1])
# betas_all[feature_index, 0] = 1
betas_all = np.ones([n_features, 1])
```

```
[43]: device='cpu'
method='dirac'
```

```
[46]: prnomogram_refactor(betas_all, 0, x_train0, x_train, data_train_test,
    ↪ senn_weights, bivariate_inputs_senn, device=device, method=method)
# prnomogram_refactor(betas_senn, userLambda_senn, x_train0, x_train,
    ↪ data_train_test, senn_weights,
    ↪ bivariate_inputs_senn, device=device, method=method)
```

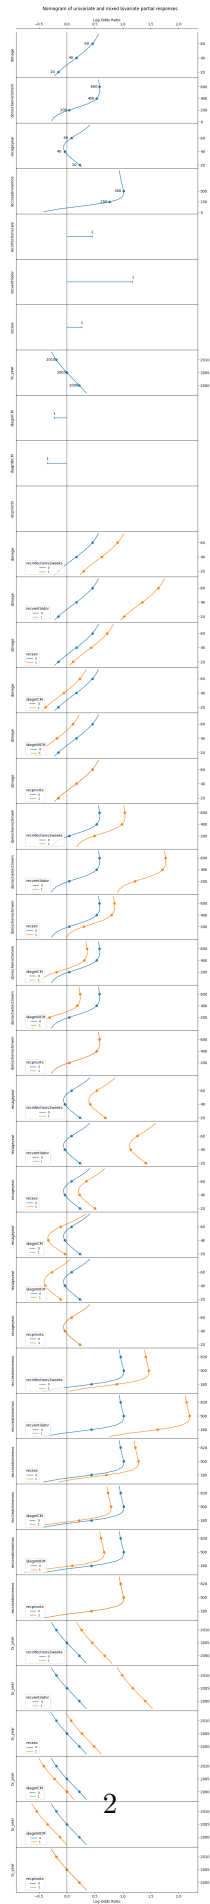

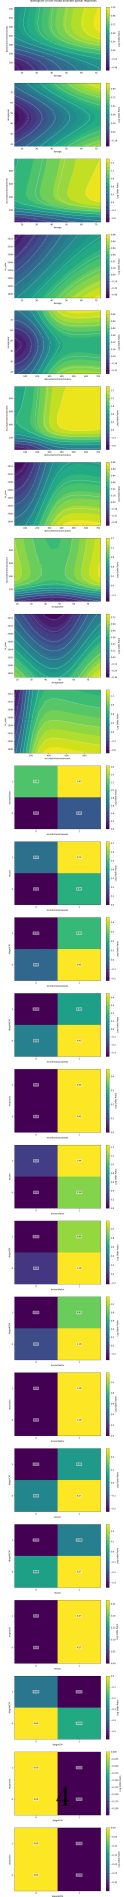

Reload prnomogram function after changes:

```
[45]: from importlib import reload
import prnomogram
reload(prnomogram)
from prnomogram import prnomogram_refactor
```