TRENDNET®
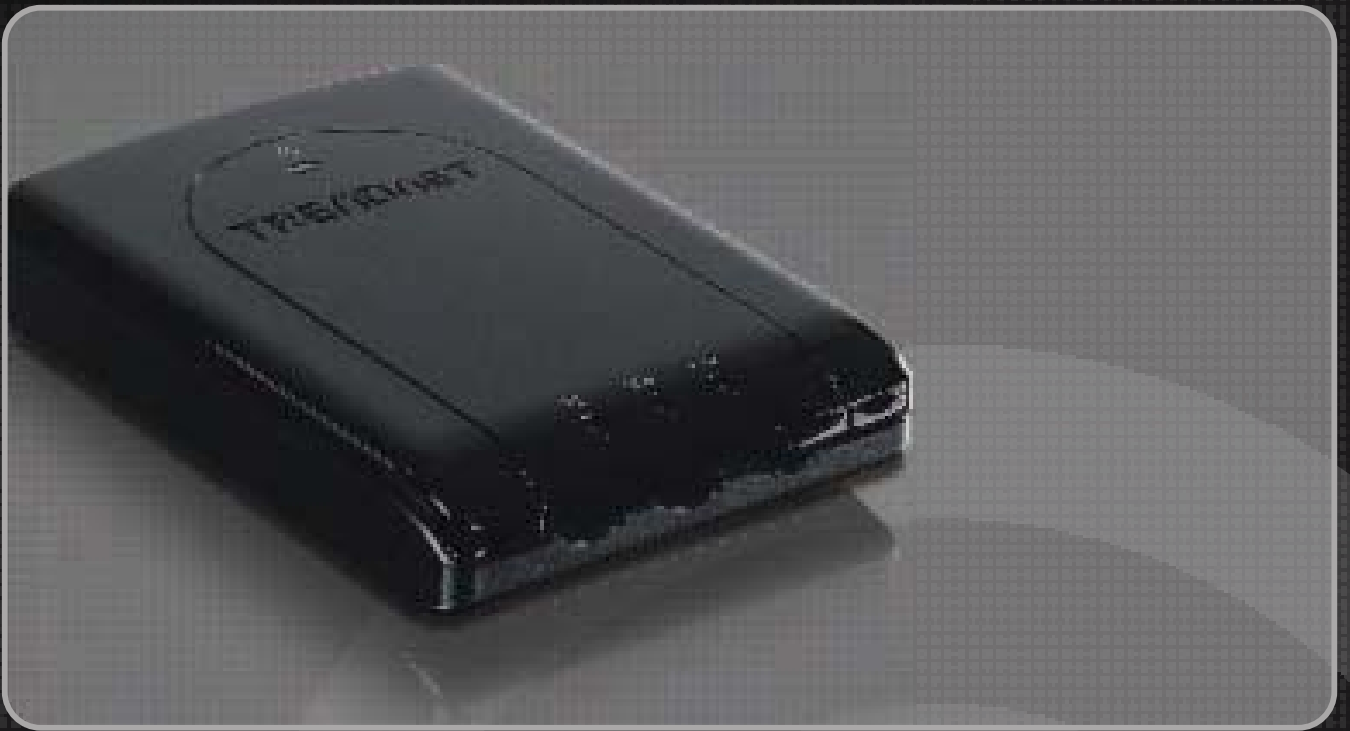
Quick Installation Guide

Guide d'installation rapide

Anleitung zur Schnellinstallation

Guía de instalación rápida

Руководство по быстрой установк

TEW-655BR3G

1.01

1. Before You Start

Package Contents

• TEW-655BR3G
• CD-ROM (User's Guide)
• Multi-Language Quick Installation Guide
• Cat.5 Ethernet Cable (1.5m/4.9ft)
• Power Adapter (5V DC, 2.0A)
• Lithium Ion Battery (3.7V, 1700mAh)

System Requirements

• A computer with a wireless network adapter properly installed
• Web Browser: Internet Explorer (6.0 or above)
• Broadband Internet or 3G Internet Service
• Cable/DSL Modem or 3G USB Adapter*
• TA-CC Car Charger (optional)

* For a list of compatible 3G USB Adapters, please go to
  http://www.trendnet.com/products/TEW-655BR3G.

Collect Internet Service Provider (ISP) Information

During the installation of your 150Mbps Mobile Wireless N Router, the Setup Wizard will automatically detect your ISP connection type. If the router cannot detect your ISP connection type, you can manually specify the connection type. Please verify your Internet connection type with your ISP and ensure you have all the information for one of the following connection types:

1. 3G (Auto Detection) connection
Pin Code (Optional): _____

2. 3G (Manual) connection
Country: _____
Telecom: _____
3G Network: _____
APN (Optional): _____
Pin Code (Optional): _____
Dialed Number: _____
Account (Optional): _____
Password (Optional): _____

3. iBurst connection
Account: _____
Password: _____
Primary DNS:_____. _____._____._____
Secondary DNS:_____. _____._____._____
Service Name (Optional): _____
Assigned IP Address (Optional): _____

4. Dynamic IP connection
HostName: _____
ISP registered Mac Address: _____

5. Static or Fixed IP connection
Static IP Address:_____. _____._____._____ (e.g. 215.24.24.129)
Static Subnet Mask: _____. _____._____._____
Static Gateway: ____. _____._____._____
Static Primary DNS:_____. _____._____._____
Static Secondary DNS:_____. _____._____._____

6. PPPoE connection

Account : _____
Password: _____
Primary DNS:_____. _____._____._____
Secondary DNS:_____. _____._____._____
Service Name (Optional): _____
Assigned IP Address (Optional): _____

7. PPTP connection

IP Mode: Dynamic IP Address or Static IP Address
My IP Address:_____. _____._____._____ (e.g. 215.24.24.129)
My Subnet Mask: _____. _____._____._____
Gateway IP: ____. _____._____._____
Service IP Adress / Name: _____
PPTP Account:_____. _____._____._____
PPTP Password:_____. _____._____._____.

8. L2TP connection

IP Mode: Dynamic IP Address or Static IP Address
IP Address:_____. _____._____._____ (e.g. 215.24.24.129)
Subnet Mask: _____. _____._____._____
WAN Gateway IP: ____. _____._____._____
Service IP Adress / Name: _____
L2TP Account:_____. _____._____._____
L2TP Password:_____. _____._____._____.

1. Verify that you have an Internet connection when connecting the 3G USB adapter to your computer. Open your browser (e.g. Internet Explorer) and type in a URL (e.g. http://www.trendnet.com) in the address bar.
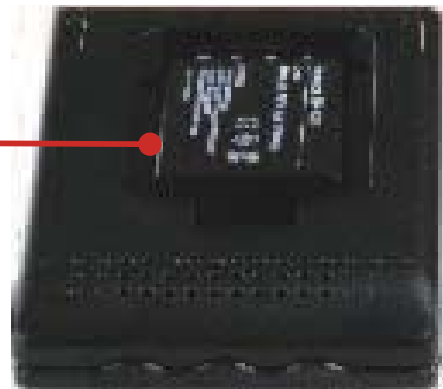
Note: You may need to activate your Internet connection. Please contact your ISP for more information.

Internet

3G USB Adapter
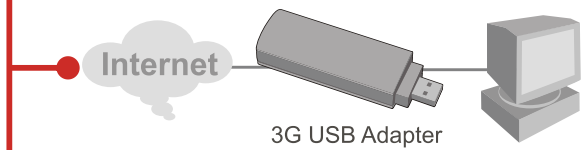
2. Remove the battery lid. The battery lid is located on the bottom of the router.

3. Insert the battery into the router.

4. Secure the battery lid back into the router.

ENGLISH

FRANÇAIS

DEUTSCH

ESPAÑOL

РУССКИЙ

5. Connect one end of the provided RJ-45 cable to the TEW-655BR3G's Ethernet port. Connect the other end of the cable to the computer's Ethernet port.

6. Connect the AC Power Adapter to the wireless router and then to a power outlet.

7. If you are using the TEW-655BR3G for the first time, you will need to charge your battery for 8 hours.

8. Connect your 3G USB adapter to the USB port on the TEW-655BR3G.

9. Move the Power switch to the on position.

10. Verify that the following panel lights are on: Power, Wireless, Ethernet and 3G (USB).

Note:
1. Gather all information related to your Internet Connection before you start. If necessary, contact your Internet Service Provider (ISP).
2. Below are steps for connecting to a 3G Internet connection. For instructions connecting to a Broadband Internet connection, please see question 5 in the Troubleshooting section.
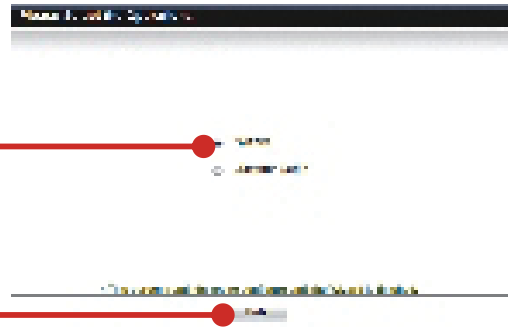
1. Open your web browser, type **http://192.168.10.1** in the Address bar, and then press **Enter**.
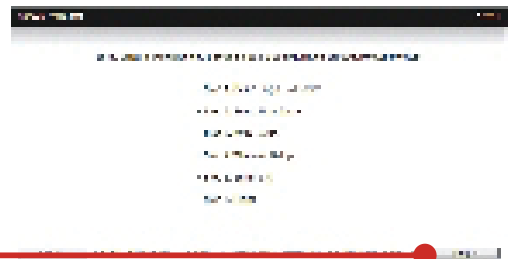
2. Enter the System Password, and then click **Login**. By default:
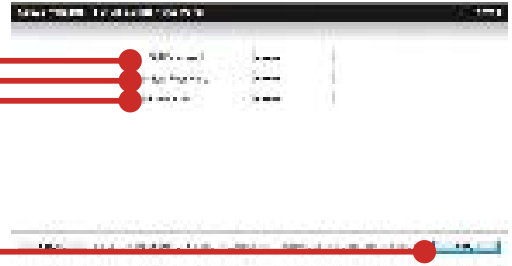
System Password: **admin**

3. Select **Wizard** and then click **Enter**.

4. Click **Next**.

ENGLISH

FRANÇAIS

DEUTSCH

ESPAÑOL

РУССКИЙ

5. Enter the Old password (By default, the **Password** is **admin**), enter a **New Password**, reconfirm the **New Password** and then click **Next**.

6. Select your Time Zone and then click **Next**.

7. Select **Wireless WAN** for WAN Interface. Select 3G or iBurst (the example shown is for 3G). Then click **Next**. Configure the settings based on information provided by your ISP. Follow the wizard instructions to complete the configuration.
Note: Each WAN type may have different options.
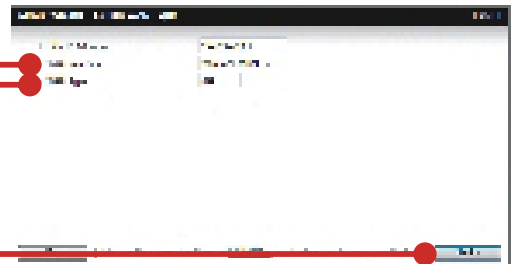
**8.** Enter the desired **Network ID** (**SSID)** and then click **Next**.
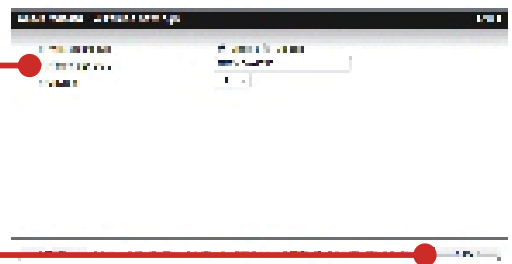
Note:

1. To protect your network from any unauthorized access it is recommended to enable wireless encryption.

2. The example below is for WPA2-PSK security. If you select WPA-PSK or WPA2-PSK, make sure your wireless adapters support WPA or WPA2. If your wireless adapters do not support WPA or WPA2, then select WEP.

9. Select the desired **Authentication** mode, select the desired Encryption type and enter characters for your Pre-Shared key and then click **Next**. For WPA-PSK or WPA2-PSK, the Pre-Shared Key must be between 8 and 63 ASCII or 64 HEX characters. Make sure to copy down the Pre-Shared Key.
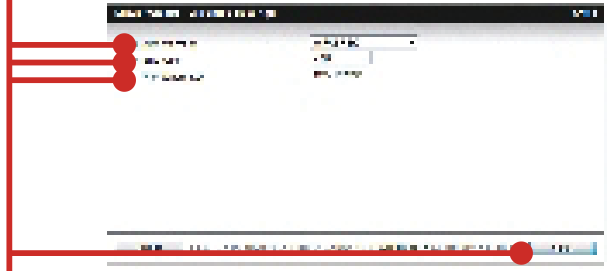
10. Check **Do you want to proceed with network testing?** and then click **Apply Settings.**
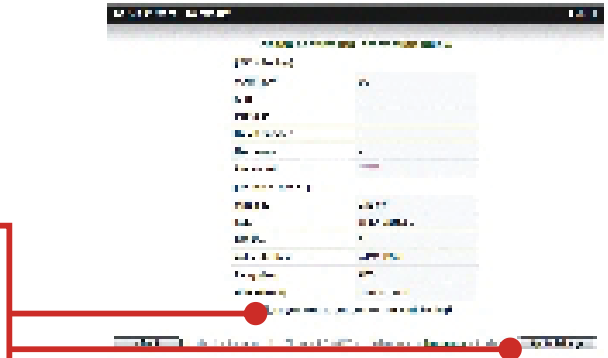
11. Wait around 43 seconds while the router reboots.
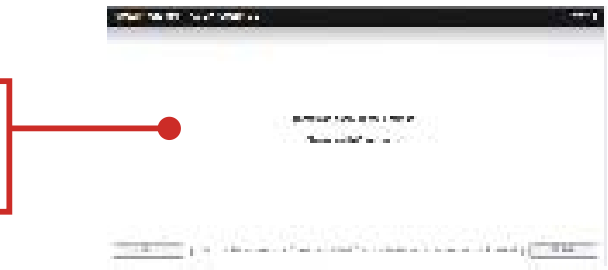
12. Wait around 15 seconds while the router tests the Internet connection.
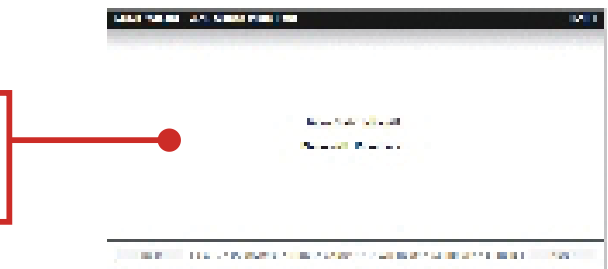
13. Click **Finish**.
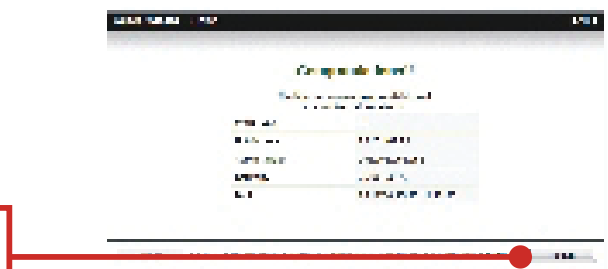
14. Connect your computer wirelessly to the TEW-655BR3G.

15. Open up your browser and enter in a URL (e.g. www.trendnet.com) to verify that you have Internet connection.
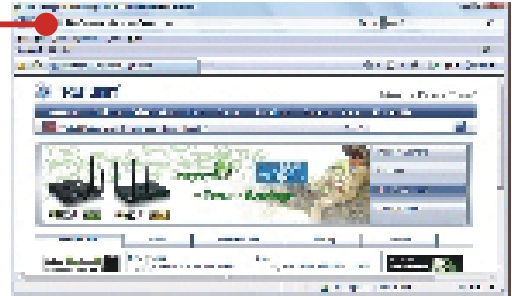
Your Configuration is now complete

For detailed information regarding the **TEW-655BR3G**'s configuration and advanced settings, please refer to the Troubleshooting section, User's Guide CD-ROM, or TRENDnet's website at http://www.trendnet.com.

Register Your Product

To ensure the highest level of customer service and support, please take a moment to register your product Online at: **www.trendnet.com/registe**r

Thank you for choosing TRENDnet

Power (Battery)
Green (Blinking): Battery is in use
Amber (Solid): Battery is running low and needs to be charged
Not Illuminated: Power switch is set to off position or the battery is dead

Power (Power Adapter)
Green (Solid): Power is on.
Amber (Solid; Power Switch set to on): Battery is charging or no battery is installed.
Amber (Solid; Power Switch set to off): Battery is charging.
Not Illuminated: Power adapter is not connected or battery is not installed.

Wireless:

Green (Solid):
Wireless is enabled.

Green (Blinking):
Activity is occurring from this link.

3G(USB):

Green (Solid):
3G connection is established

Green (Blinking):
Activity is occuring from this link

Ethernet:

Green (Solid):
Ethernet cable is connected to the Ethernet port and a connection is established

Green (Blinking):
Activity is occurring from this link.

ENGLISH

FRANÇAIS

DEUTSCH

ESPAÑOL

РУССКИЙ

1. Avant de commencer

Contenu de l'emballage

• TEW-655BR3G

• Guide de l'utilisateur sur CD-ROM

• Guide d´installation rapide en plusieurs langues

• Câble Ethernet de Cat.5 (1.5m/4.9ft)

• Adaptateur secteur (5V DC, 2.0A)

• Batería de iones de litio (3.7V, 1700mAh)

Configuration nécessaire

• Un ordinateur avec un adaptateur réseau câblé ou sans fil correctement installé

• Navigateur Internet : Internet Explorer (6.0 ou supérieur)

• Internet à large bande ou service Internet 3G

• Modem câble/DSL ou adaptateur USB 3G*

• TA-CC Chargeur allume-cigare (Optionnel)

* Pour une liste des adaptaeurs USB 3G compatibles, veuillez vous rendre sur http://www.trendnet.com/products/TEW-655BR3G.

Obtenez les informations de votre fournisseur d'accès Internet (FAI)

Durant l'installation de votre routeur sans fil N mobile 150 Mbps, l'assistant d'installation détectera automatiquement le type de connexion que vous avez auprès de votre FAI. Si le routeur n'y arrive pas, vous pouvez indiquer manuellement le type de connexion. Veuillez vérifier le type de votre connexion Internet auprès de votre FAI et assurez-vous de disposer de toutes les informations pour l'un des types suivants de connexions :

1. Connexion 3G (detección automática)
        Code Pin (Optionnel): _____

2. Connexion 3G (Manuel)
        Pays: _____
        Télécom: _____
        Réseau 3G : _____
        Nom du point d'accès (APN) (Optionnel): _____
        Code Pin (Optionnel): _____
        Numéro composé: _____
        Compte (optionnel): _____
        Mot de passe(optionnel): _____

3. Connexion iBurst
        Compte: _____
        Mot de passe: _____
        DNS principal:_____. _____._____._____
        DNS Secondaire:_____. _____._____._____
        Nom du service (optionnel): _____
        Adresse IP assignée (optionnel): _____

4. Connexion IP dynamique
        Nom d'hôte:_ _____
        Adresse Mac ISP enregistrée: _____

5. Connexion IP statique ou fixe
        Adresse IP statique:_____. _____._____._____ (p. ex. 215.24.24.129)
        Masque de sous-réseau statiquea: _____. _____._____._____
        Passerelle statique: _____. _____._____._____
        DNS statique principal:_____. _____._____._____
        DNS statique secondaire :_____. _____._____._____

6. Connexion PPPoE

        Compte: _____

        Mot de passe: _____

        DNS principal:_____. _____._____._____

        DNS Secondaire:_____. _____._____._____

        Nom du service (optionnel) : _____

        Adresse IP assignée (optionnel): _____

7. Connexion PPTP

        Mode IP : Adresse IP dynamique ou statique

        Mon adresse IP:_____. _____._____._____ (p. ex. 215.24.24.129)

        Mon masque de sous-réseau: _____. _____._____._____

        Passerelle IP: ____. _____._____._____

        Adresse/nom du service IP: _____

        Compte PPTP:_____. _____._____._____

        Mot de passe PPTP:_____. _____._____._____.

8. Connexion L2TP

        Mode IP : Adresse IP dynamique ou statique

        Adresse IP:_____. _____._____._____ (p. ex. 215.24.24.129)

        Masque de sous-réseau: _____. _____._____._____

        Passerelle IP WAN: ____. _____._____._____

        Adresse/nom du service IP: _____

        Compte L2TP:_____. _____._____._____

        Mot de passe L2TP:_____. _____._____._____.