



SOLIDProof
Bring trust into your projects

Blockchain Security | Smart Contract Audits | KYC

MADE IN GERMANY

Road to Glory

Audit

Security Assessment

07. February, 2022

For



Disclaimer	3
Description	5
Project Engagement	5
Logo	5
Contract Link	5
Methodology	7
Used Code from other Frameworks/Smart Contracts (direct imports)	8
Tested Contract Files	9
Source Lines	10
Risk Level	10
Capabilities	11
Inheritance Graph	12
CallGraph	13
Scope of Work/Verify Claims	14
Modifiers and public functions	21
Source Units in Scope	23
Critical issues	24
High issues	24
Medium issues	24
Low issues	24
Informational issues	25
Commented Code exist	25
Audit Comments	25
SWC Attacks	26

Disclaimer

SolidProof.io reports are not, nor should be considered, an “endorsement” or “disapproval” of any particular project or team. These reports are not, nor should be considered, an indication of the economics or value of any “product” or “asset” created by any team. SolidProof.io do not cover testing or auditing the integration with external contract or services (such as Uniswap, Uniswap, PancakeSwap etc’...)

SolidProof.io Audits do not provide any warranty or guarantee regarding the absolute bug- free nature of the technology analyzed, nor do they provide any indication of the technology proprietors. SolidProof Audits should not be used in any way to make decisions around investment or involvement with any particular project. These reports in no way provide investment advice, nor should be leveraged as investment advice of any sort.

SolidProof.io Reports represent an extensive auditing process intending to help our customers increase the quality of their code while reducing the high level of risk presented by cryptographic tokens and blockchain technology. Blockchain technology and cryptographic assets present a high level of ongoing risk. SolidProof’s position is that each company and individual are responsible for their own due diligence and continuous security. SolidProof in no way claims any guarantee of security or functionality of the technology we agree to analyze.

Version	Date	Description
1.0	07. February 2022	<ul style="list-style-type: none">• Layout project• Automated- /Manual-Security Testing• Summary

Network

Binance Smart Chain (BEP20)

Website

<https://roadtoglory.gg/>

Twitter

<https://twitter.com/roadtoglorygg>

Discord

<https://discord.com/invite/avmQHh9me7>



Description

Road to Glory is a Play to Earn game in which players collect barbarians and engage in fights to be rewarded.

The majority of the game is located on the Binance Smart Chain (BSC) blockchain.

Project Engagement

During the 4th of February 2022, **Road to Glory Team** engaged Solidproof.io to audit smart contracts that they created. The engagement was technical in nature and focused on identifying security flaws in the design and implementation of the contracts. They provided Solidproof.io with access to their code repository and whitepaper.

Logo



Contract Link

v1.0

- [Provided as files](#)
-

Vulnerability & Risk Level

Risk represents the probability that a certain source-threat will exploit vulnerability, and the impact of that event on the organization or system. Risk Level is computed based on CVSS version 3.0.

Level	Value	Vulnerability	Risk (Required Action)
Critical	9 - 10	A vulnerability that can disrupt the contract functioning in a number of scenarios, or creates a risk that the contract may be broken.	Immediate action to reduce risk level.
High	7 – 8.9	A vulnerability that affects the desired outcome when using a contract, or provides the opportunity to use a contract in an unintended way.	Implementation of corrective actions as soon as possible.
Medium	4 – 6.9	A vulnerability that could affect the desired outcome of executing the contract in a specific scenario.	Implementation of corrective actions in a certain period.
Low	2 – 3.9	A vulnerability that does not have a significant impact on possible scenarios for the use of the contract and is probably subjective.	Implementation of certain corrective actions or accepting the risk.
Informational	0 – 1.9	A vulnerability that have informational character but is not effecting any of the code.	An observation that does not determine a level of risk

Auditing Strategy and Techniques Applied

Throughout the review process, care was taken to evaluate the repository for security-related issues, code quality, and adherence to specification and best practices. To do so, reviewed line-by-line by our team of expert pentesters and smart contract developers, documenting any issues as there were discovered.

Methodology

The auditing process follows a routine series of steps:

1. Code review that includes the following:
 - i) Review of the specifications, sources, and instructions provided to SolidProof to make sure we understand the size, scope, and functionality of the smart contract.
 - ii) Manual review of code, which is the process of reading source code line-by-line in an attempt to identify potential vulnerabilities.
 - iii) Comparison to specification, which is the process of checking whether the code does what the specifications, sources, and instructions provided to SolidProof describe.
2. Testing and automated analysis that includes the following:
 - i) Test coverage analysis, which is the process of determining whether the test cases are actually covering the code and how much code is exercised when we run those test cases.
 - ii) Symbolic execution, which is analysing a program to determine what inputs causes each part of a program to execute.
3. Best practices review, which is a review of the smart contracts to improve efficiency, effectiveness, clarify, maintainability, security, and control based on the established industry and academic practices, recommendations, and research.
4. Specific, itemized, actionable recommendations to help you take steps to secure your smart contracts.

Used Code from other Frameworks/Smart Contracts (direct imports)

Imported packages:

Dependency / Import Path	Count
@openzeppelin/contracts-upgradeable/access/AccessControlUpgradeable.sol	2
@openzeppelin/contracts-upgradeable/proxy/utils/Initializable.sol	2
@openzeppelin/contracts-upgradeable/security/PausableUpgradeable.sol	2
@openzeppelin/contracts-upgradeable/security/ReentrancyGuardUpgradeable.sol	2
@openzeppelin/contracts-upgradeable/token/ERC721/ERC721Upgradeable.sol	2
@openzeppelin/contracts-upgradeable/utils/ContextUpgradeable.sol	2
@openzeppelin/contracts/utils/Counters.sol	2
@openzeppelin/contracts/utils/math/SafeMath.sol	2

Tested Contract Files

This audit covered the following files listed below with a SHA-1 Hash.


A file with a different Hash has been modified, intentionally or otherwise, after the security review. A different Hash could be (but not necessarily) an indication of a changed condition or potential vulnerability that was not within the scope of this review.

v1.0


File Name	SHA-1 Hash
contracts/RoadToGloryNFTMetadata.sol	315f78a2d453ea41e5a22a6e17d3be03714b87cb
contracts/IRoadToGloryNFTMetadata.sol	77379aa66d6c8b72e6d73b3cab22cc914d778abc
contracts/Random.sol	423c8e9d352225ac4f51e0bcb72be47627b5c626
contracts/RoadToGloryCandyV1.sol	25075abfeb7f7ad3bbe703afc5b2ca53fdfe0ed2
contracts/BarbarianMetadata.sol	5277112c8219464fde933b549594b38d35031eab

Metrics

Source Lines v1.0

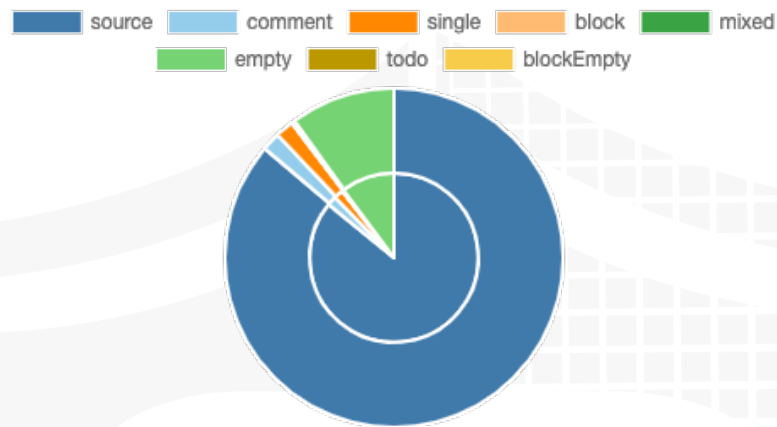

Risk Level v1.0

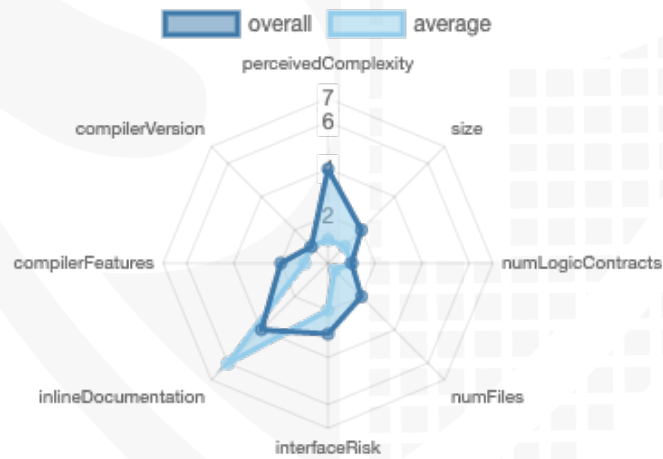

Capabilities

Components

Version	Contracts	Libraries	Interfaces	Abstract
1.0	2	2	1	0

Exposed Functions

This section lists functions that are explicitly declared public or payable. Please note that getter methods for public stateVars are not included.

Version	Public	Payable
1.0	19	3

Version	External	Internal	Private	Pure	View
1.0	16	22	0	0	10

State Variables

Version	Total	Public
1.0	18	10

Capabilities

Version	Solidity Versions observed	Experimental Features	Can Receive Funds	Uses Assembly	Has Destroyable Contracts
1.0	<code>^0.8.0</code>		yes		

Version	Transfers ETH	Low-Level Calls	DelegateCall	Uses Hash Functions	EC Recover	New/Create/Create2
1.0				yes		


Inheritance Graph

v1.0



CallGraph

v1.0



Scope of Work/Verify Claims

The above token Team provided us with the files that needs to be tested (Github, Bscscan, Etherscan, files, etc.). The scope of the audit is the main contract (usual the same name as team appended with .sol).

We will verify the following claims:

1. Correct implementation of Token standard
2. Deployer cannot mint any new tokens
3. Deployer cannot burn or lock user funds
4. Deployer cannot pause the contract
5. Overall checkup (Smart Contract Security)

Correct implementation of Token standard

- [✓] balanceOf(address) is present
 - [✓] balanceOf(address) -> () (correct return value)
 - [✓] balanceOf(address) is view
- [✓] ownerOf(uint256) is present
 - [✓] ownerOf(uint256) -> () (correct return value)
 - [✓] ownerOf(uint256) is view
- [✓] safeTransferFrom(address,address,uint256,bytes) is present
 - [✓] safeTransferFrom(address,address,uint256,bytes) -> () (correct return type)
 - [✓] Transfer(address,address,uint256) is emitted
- [✓] safeTransferFrom(address,address,uint256) is present
 - [✓] safeTransferFrom(address,address,uint256) -> () (correct return type)
 - [✓] Transfer(address,address,uint256) is emitted
- [✓] transferFrom(address,address,uint256) is present
 - [✓] transferFrom(address,address,uint256) -> () (correct return type)
 - [✓] Transfer(address,address,uint256) is emitted
- [✓] approve(address,uint256) is present
 - [✓] approve(address,uint256) -> () (correct return type)
 - [✓] Approval(address,address,uint256) is emitted
- [✓] setApprovalForAll(address,bool) is present
 - [✓] setApprovalForAll(address,bool) -> () (correct return type)
 - [✓] ApprovalForAll(address,address,bool) is emitted
- [✓] getApproved(uint256) is present
 - [✓] getApproved(uint256) -> () (correct return value)
 - [✓] getApproved(uint256) is view
- [✓] isApprovedForAll(address,address) is present
 - [✓] isApprovedForAll(address,address) -> () (correct return value)
 - [✓] isApprovedForAll(address,address) is view

- [✓] supportsInterface(bytes4) is present
 - [✓] supportsInterface(bytes4) -> () (correct return value)
 - [✓] supportsInterface(bytes4) is view
- [✓] name() is present
 - [✓] name() -> () (correct return value)
 - [✓] name() is view
- [✓] symbol() is present
 - [✓] symbol() -> () (correct return value)
- [✓] tokenURI(uint256) is present
 - [✓] tokenURI(uint256) -> () (correct return value)



Write functions of contract v1.0

▼ ROADTOGLORYCANDYV1
add_to_whitelist
approve
grantRole
initialize
presale_draw
process_pending_mints
renounceRole
reset_global_number_of_mints
reset_whitelist
revokeRole
safeTransferFrom
safeTransferFrom
set_max_mint_per_wallet
set_max_public_mints
set_metadata
set_mint_price
setApprovalForAll
transferFrom
withdraw_bnb
withdraw_test

▼ ROADTOGLORYNFTMETADATA
grantRole
initialize
renounceRole
revokeRole

Deployer cannot mint any new tokens

Name	Exist	Tested	Status
Deployer cannot mint	✓	✓	✓
Max / Total Supply	-		

Comments:

v1.0

- Everybody can mint tokens
 - If msg.sender is whitelisted and $\text{current_number_of_mints} + \text{count}$ is under/equal $\text{max_mint_per_wallet}$ or $\text{current_number_of_mints} + \text{count}$ is under/equal $\text{max_mint_per_wallet}$ and $\text{global_number_of_public_mints} + \text{count}$ is under/equal $\text{max_number_of_public_mints}$

Deployer cannot burn or lock user funds

Name	Exist	Tested	Status
Deployer cannot lock	✓	✓	✗
Deployer cannot burn	-	-	-

Comments:

v1.0

- Deployer can lock following functions
 - presale_draw

Deployer cannot pause the contract

Name	Exist	Tested	Status
Deployer cannot pause	—	—	—



Overall checkup (Smart Contract Security)


Tested	Verified
✓	✓

Legend

Attribute	Symbol
Verified / Checked	✓
Partly Verified	⚠
Unverified / Not checked	✗
Not available	—

Modifiers and public functions

v1.0



⌵	⚡ initialize	
	Ⓜ initializer	
	⚡ process_pending_mints	
⌵	⚡ presale_draw 💰	
	Ⓜ nonReentrant	
⌵	⚡ withdraw_test	
	Ⓜ nonReentrant	
	Ⓜ onlyRole	
⌵	⚡ withdraw_bnb	
	Ⓜ nonReentrant	
	Ⓜ onlyRole	
⌵	⚡ add_to_whitelist	
	Ⓜ nonReentrant	
	Ⓜ onlyRole	
⌵	⚡ reset_whitelist	
	Ⓜ onlyRole	
	Ⓜ nonReentrant	
⌵	⚡ set_mint_price	
	Ⓜ onlyRole	
	Ⓜ nonReentrant	
⌵	⚡ set_max_mint_per_wallet	
	Ⓜ onlyRole	
	Ⓜ nonReentrant	
⌵	⚡ set_max_public_mints	
	Ⓜ onlyRole	
	Ⓜ nonReentrant	
⌵	⚡ reset_global_number_of_mints	
	Ⓜ onlyRole	
⌵	⚡ set_metadata	
	Ⓜ onlyRole	
⌵	⚡ <Constructor> 💰	
	Ⓜ nonReentrant	

Comments

- Deployer can set following state variables without any limitations
 - DIRECTOR_ROLE
 - bnb_price_of_mint
 - max_mint_per_wallet
 - max_number_of_public_mints
 - global_number_of_public_mints
 - metadata_generator
- Deployer can enable/disable following state variables
 - DIRECTOR_ROLE










- Whitelisted
- Whitelist
- Deployer can set following addresses
 - DIRECTOR_ROLE
 - metadata_generator

Please check if an OnlyOwner or similar restrictive modifier has been forgotten.



Source Units in Scope

v1.0

Type	File	Logic Contracts	Interfaces	Lines	nLines	nSLOC	Comment Lines	Complex. Score	Capabilities
	contracts/RoadToGloryNFTMetadata.sol	1	————	93	93	82	1	68	————
	contracts/IRoadToGloryNFTMetadata.sol	————	1	13	8	4	1	3	————
	contracts/Random.sol	1	————	41	41	35	1	22	
	contracts/RoadToGloryCandyV1.sol	1	————	167	166	151	2	155	
	contracts/BarbarianMetadata.sol	1	————	17	17	14	1	2	————
	Totals	4	1	331	325	286	6	250	

Legend

Attribute	Description
Lines	total lines of the source unit
nLines	normalized lines of the source unit (e.g. normalizes functions spanning multiple lines)
nSLOC	normalized source lines of code (only source-code lines; no comments, no blank lines)
Comment Lines	lines containing single or block comments
Complexity Score	a custom complexity score derived from code statements that are known to introduce code complexity (branches, loops, calls, external interfaces, ...)

Audit Results

AUDIT PASSED

Critical issues

No critical issues

High issues

No high issues

Medium issues

No medium issues

Low issues

Issue	File	Type	Line	Description
#1	RoadTo GloryCa ndyV1	A floating pragma is set	2	The current pragma Solidity directive is „^0.8.0“.
#2	RoadTo GloryNF TMeta data	A floating pragma is set	2	The current pragma Solidity directive is „^0.8.0“.
#3	RoadTo GloryCa ndyV1	Missing Zero Address Validation (missing-zero-check)	117, 123	Check that the address is not zero
#4	RoadTo GloryNF TMeta data	State variables shadowing	25	Remove the state variable shadowing L33 and L34 can be removed because of the initialiser modifier in L32

#5	RoadTo GloryCa ndyV1	State variables shadowing	35	Remove the state variable shadowing L47 and L48 can be removed because of the initialiser modifier in L46
----	----------------------------	------------------------------	----	---

Informational issues

Issue	File	Type	Line	Description
#1	RoadTo GloryCa ndyV1	Test functions	See description	Remove test functions - withdraw_test L117 - withdraw_bnb L123

Commented Code exist

There are some instances of code being commented out in the following files that should be removed:

Line	Comment

Recommendation

Remove the commented code, or address them properly.

Audit Comments

We recommend you to use the special form of comments (NatSpec Format, Follow link for more information <https://docs.soliditylang.org/en/v0.5.10/natspec-format.html>) for your contracts to provide rich documentation for functions, return variables and more. This helps investors to make clear what that variables, functions etc. do.

07. February 2022:

- Read whole report for more information

SWC Attacks

ID	Title	Relationships	Status
SW C-1 36	Unencrypted Private Data On-Chain	CWE-767: Access to Critical Private Variable via Public Method	PASSED
SW C-1 35	Code With No Effects	CWE-1164: Irrelevant Code	PASSED
SW C-1 34	Message call with hardcoded gas amount	CWE-655: Improper Initialization	PASSED
SW C-1 33	Hash Collisions With Multiple Variable Length Arguments	CWE-294: Authentication Bypass by Capture-replay	PASSED
SW C-1 32	Unexpected Ether balance	CWE-667: Improper Locking	PASSED
SW C-1 31	Presence of unused variables	CWE-1164: Irrelevant Code	PASSED
SW C-1 30	Right-To-Left-Override control character (U+202E)	CWE-451: User Interface (UI) Misrepresentation of Critical Information	PASSED
SW C-1 29	Typographical Error	CWE-480: Use of Incorrect Operator	PASSED
SW C-1 28	DoS With Block Gas Limit	CWE-400: Uncontrolled Resource Consumption	PASSED

SW C-1 27	Arbitrary Jump with Function Type Variable	CWE-695: Use of Low-Level Functionality	PASSED
SW C-1 25	Incorrect Inheritance Order	CWE-696: Incorrect Behavior Order	PASSED
SW C-1 24	Write to Arbitrary Storage Location	CWE-123: Write-what-where Condition	PASSED
SW C-1 23	Requirement Violation	CWE-573: Improper Following of Specification by Caller	PASSED
SW C-1 22	Lack of Proper Signature Verification	CWE-345: Insufficient Verification of Data Authenticity	PASSED
SW C-1 21	Missing Protection against Signature Replay Attacks	CWE-347: Improper Verification of Cryptographic Signature	PASSED
SW C-1 20	Weak Sources of Randomness from Chain Attributes	CWE-330: Use of Insufficiently Random Values	PASSED
SW C-11 9	Shadowing State Variables	CWE-710: Improper Adherence to Coding Standards	NOT PASSED
SW C-11 8	Incorrect Constructor Name	CWE-665: Improper Initialization	PASSED
SW C-11 7	Signature Malleability	CWE-347: Improper Verification of Cryptographic Signature	PASSED

SW C-11 6	Timestamp Dependence	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
SW C-11 5	Authorization through tx.origin	CWE-477: Use of Obsolete Function	PASSED
SW C-11 4	Transaction Order Dependence	CWE-362: Concurrent Execution using Shared Resource with Improper Synchronization ('Race Condition')	PASSED
SW C-11 3	DoS with Failed Call	CWE-703: Improper Check or Handling of Exceptional Conditions	PASSED
SW C-11 2	Delegatecall to Untrusted Callee	CWE-829: Inclusion of Functionality from Untrusted Control Sphere	PASSED
SW C-11 1	Use of Deprecated Solidity Functions	CWE-477: Use of Obsolete Function	PASSED
SW C-11 0	Assert Violation	CWE-670: Always-Incorrect Control Flow Implementation	PASSED
SW C-1 09	Uninitialized Storage Pointer	CWE-824: Access of Uninitialized Pointer	PASSED
SW C-1 08	State Variable Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED
SW C-1 07	Reentrancy	CWE-841: Improper Enforcement of Behavioral Workflow	PASSED
SW C-1 06	Unprotected SELFDESTRUCT Instruction	CWE-284: Improper Access Control	PASSED

SW C-1 05	Unprotected Ether Withdrawal	CWE-284: Improper Access Control	PASSED
SW C-1 04	Unchecked Call Return Value	CWE-252: Unchecked Return Value	PASSED
SW C-1 03	Floating Pragma	CWE-664: Improper Control of a Resource Through its Lifetime	NOT PASSED
SW C-1 02	Outdated Compiler Version	CWE-937: Using Components with Known Vulnerabilities	PASSED
SW C-1 01	Integer Overflow and Underflow	CWE-682: Incorrect Calculation	PASSED
SW C-1 00	Function Default Visibility	CWE-710: Improper Adherence to Coding Standards	PASSED

The logo features the words "SolidProof" in a white, handwritten-style script. The "P" is particularly large and stylized, with a long horizontal stroke that extends to the left. The background is a solid blue color with a faint, large shield emblem. The shield has a blue-to-white gradient and a grid-like pattern on its right side.

SolidProof

Blockchain Security | Smart Contract Audits | KYC

A small horizontal bar representing the German flag, with black, red, and gold stripes.

MADE IN GERMANY